


TEST REPORT

Applicant: Hansong (Nanjing) Technology Ltd.
Address: 8th Kangping Road, Jiangning Economy and Technology Development Zone, Nanjing, 211106, China.
Equipment Type: PRC3 remote
Model Name: Stereo Hub HT RC (refer to section 2.3)
Brand Name: Platin
FCC ID: XCO-PRC3
ISED Number: 7756A-PRC3
47 CFR Part 15 Subpart C
Test Standard: RSS-Gen Issue 5
RSS-210 Issue 10
(refer to section 3.1)
Sample Arrival Date: Nov. 11, 2024
Test Date: Nov. 18, 2024 - Nov. 21, 2024
Date of Issue: Feb. 05, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Li Ganming**Checked by:** Ye Hongji**Approved by:** Sunny Zou
(Technical Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Feb. 05, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Test Verdict	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Environments	8
4.2	Test Equipment List	8
4.3	Measurement Uncertainty	8
4.4	Description of Test Setup	9
5	TEST ITEMS	11
5.1	Antenna Requirements	11
5.2	Conducted Emission	12
5.3	20 dB Bandwidth	13
5.4	Field Strength of Fundamental Emissions and Radiated Emissions	14
5.5	Transmitting Time	16
ANNEX A	TEST RESULT	17
A.1	Conducted Emissions	17

A.2	20 dB Bandwidth	19
A.3	Duty cycle.....	20
A.4	Field Strength of Fundamental Emissions.....	21
A.5	Radiated Emission	22
A.6	Transmitter Time	26
ANNEX B	TEST SETUP PHOTOS	27
ANNEX C	EUT EXTERNAL PHOTOS	27
ANNEX D	EUT INTERNAL PHOTOS	27

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Hansong (Nanjing) Technology Ltd.
Address	8th Kangping Road, Jiangning Economy and Technology Development Zone, Nanjing, 211106, China.

2.2 Manufacturer Information

Manufacturer	Hansong (Nanjing) Technology Ltd.
Address	8th Kangping Road, Jiangning Economy and Technology Development Zone, Nanjing, 211106, China.

2.3 General Description for Equipment under Test (EUT)

EUT Name	PRC3 remote
Model Name Under Test	Stereo Hub HT RC
Series Model Name	Surround Hub RC, Stereo Hub RC, Speaker RC, SM455 RC, SA-2250 RC
Description of Model name differentiation	Except that the below deviation, are identical with the original product as follows: 1. In circuit design, PCB layout, electronic component use, the above five types of motherboards, charging boards, etc., are exactly the same. 2. The burning software of 6 remote controls is the same file. 3. The difference points exist in the appearance of the 6 remote controls are different; Speaker RC / SM455 RC /SA-2250 RC reduce the use of 4 LED beads compared to the other 3 remote controls; The Speaker RC and SA-2250 RC lacks a long three-button structure on the key. (this information provided by the applicant)
Serial Number	H244RPTX00001
Hardware Version	PP1.0
Software Version	4.3
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	433.5 MHz
-----------------------------------	-----------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Type	FSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Operating Frequency	433.5 MHz
Antenna Type	Spring Antenna
Antenna Gain	2.5 dBi

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
4	RSS-210 Issue 10	Licence-Exempt Radio Apparatus: Category I Equipment

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-Gen 6.8	--	Pass ^{Note}
2	Conducted Emission	15.207	RSS-Gen 8.8	ANNEX A.1	Pass
3	20 dB Bandwidth	15.231(c)	RSS-Gen 6.7	ANNEX A.2	Pass
4	Duty Cycle	15.35	--	ANNEX A.3	Pass
5	Field Strength of Fundamental Emissions	15.231(b)	RSS-210 8.9	ANNEX A.4	Pass
6	Radiated Emissions	15.209 15.231(b)	RSS-Gen 8.9	ANNEX A.5	Pass
7	Transmitting Time	15.231(a)		ANNEX A.6	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	42% to 63%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+23.4°C to +25.9°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2024.08.01	2025.07.31
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2024.05.22	2025.05.21
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9163	00884	2022.02.20	2025.02.19
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2022.02.23	2025.02.22
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2025.09.03
Amplifier	COM-MV	ZT30-1000M	18110850	2024.08.01	2025.07.31
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2024.08.01	2025.07.31
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2024.08.01	2025.07.31

4.3 Measurement Uncertainty


The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.4 Description of Test Setup

4.4.1 For AC Power Supply Port Test

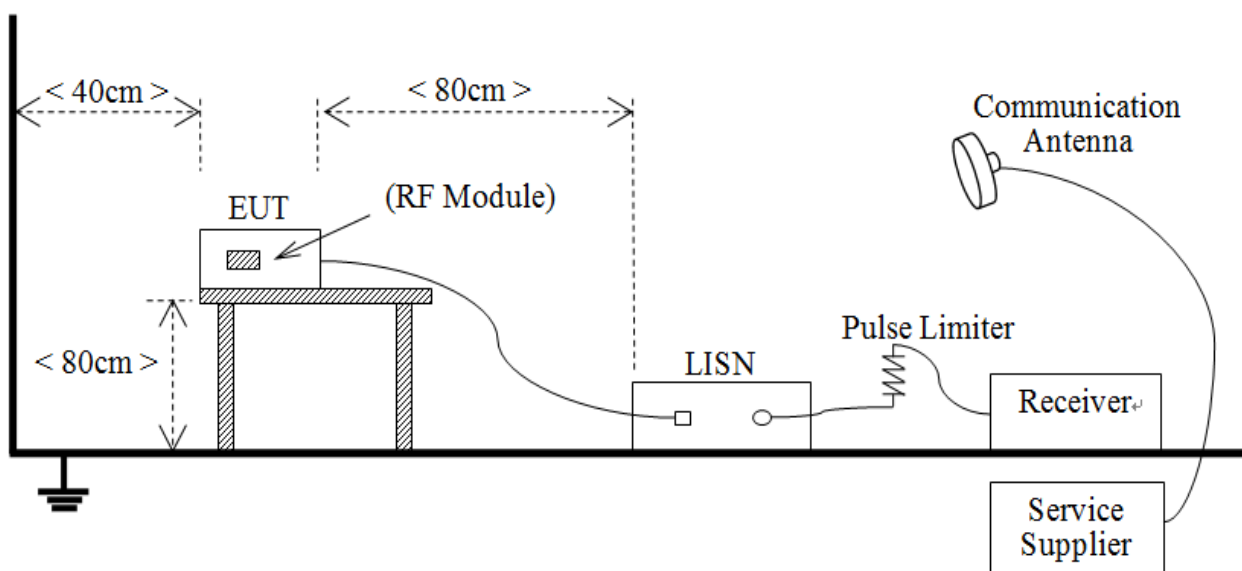


(Diagram 2)

4.4.2 For Radiated Test (Below 30 MHz)

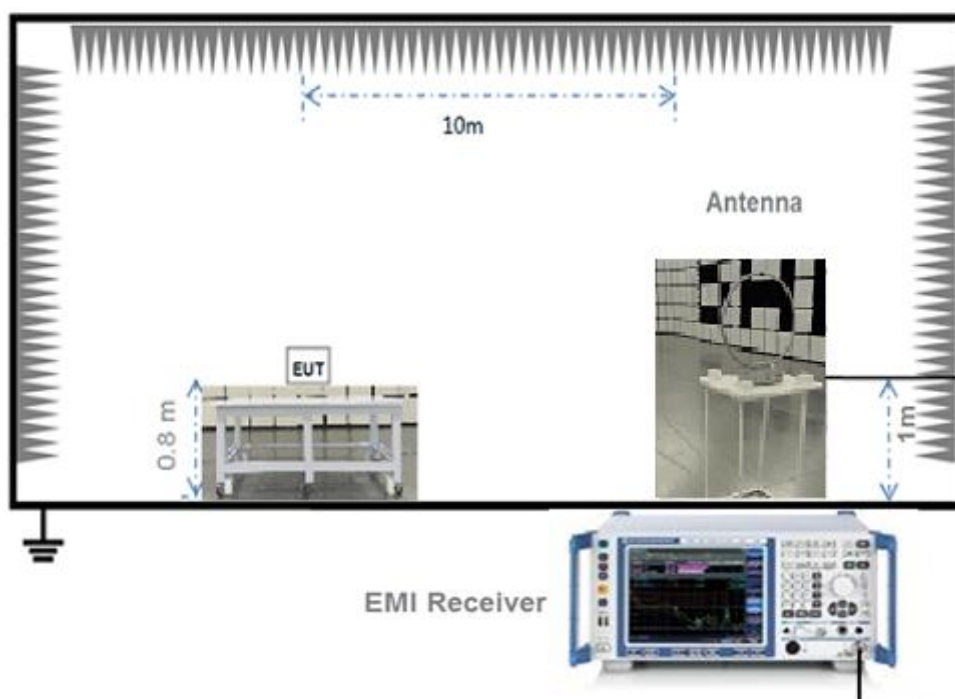


(Diagram 3)

4.4.3 For Radiated Test (30 MHz-1 GHz)

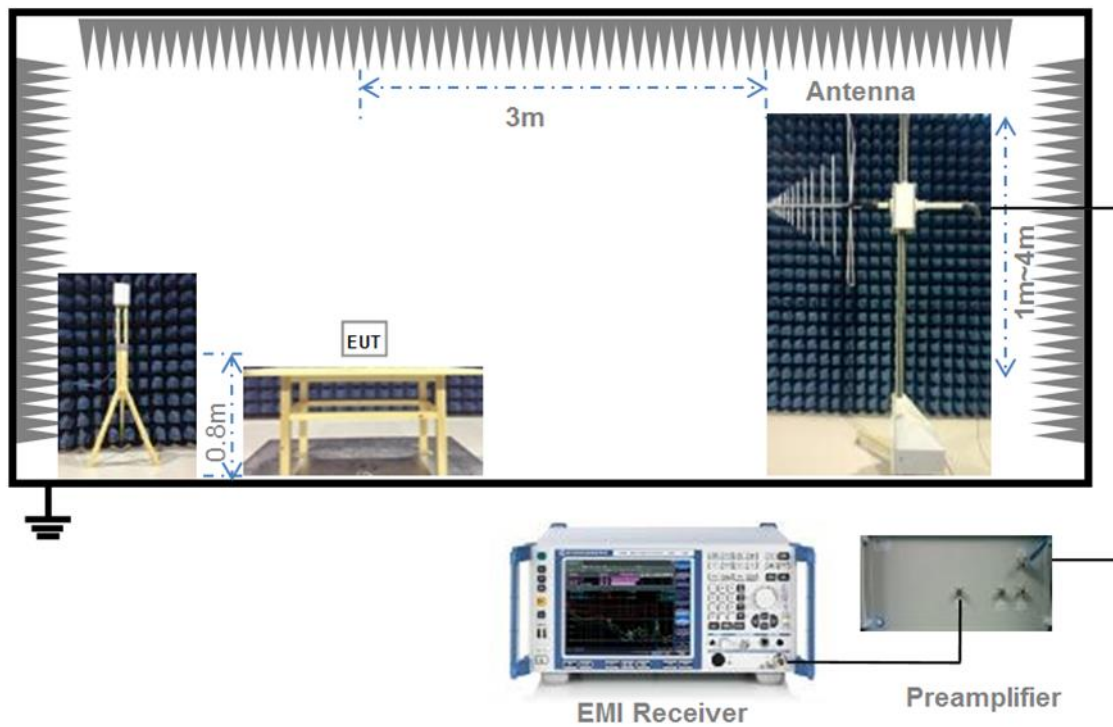

(Diagram 4)

4.4.4 For Radiated Test (Above 1 GHz)

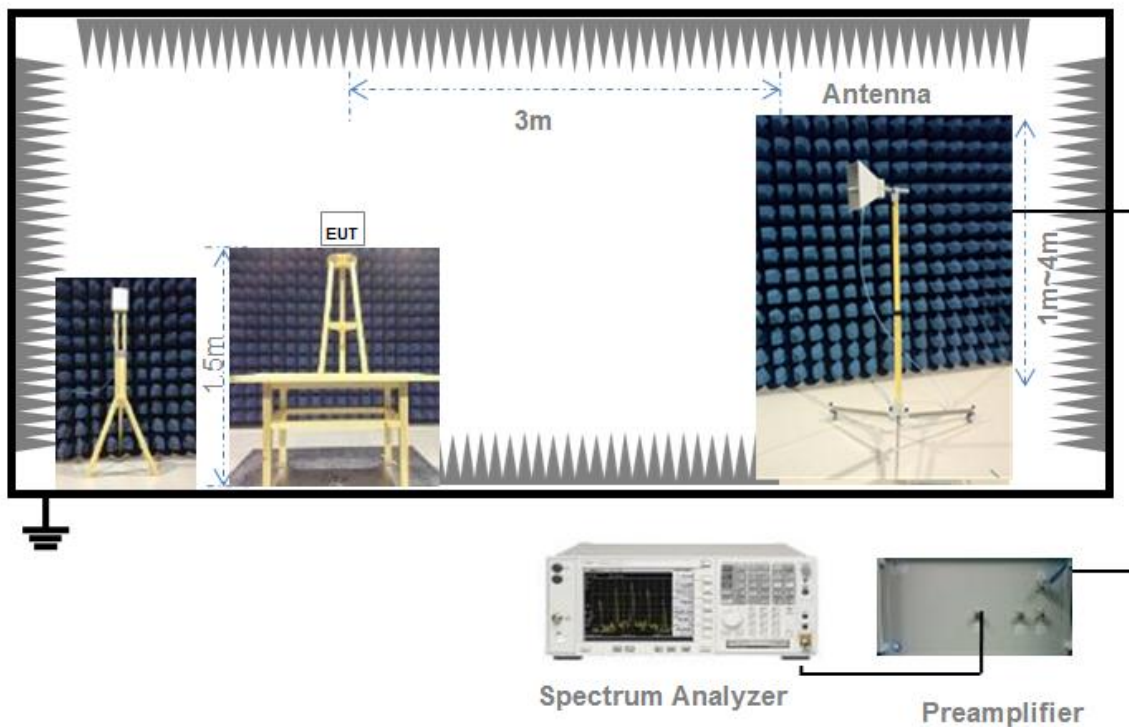

(Diagram 5)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS -Gen 6.8

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Conducted Emission

5.2.1 Limit

FCC §15.207; RSS-Gen 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.2.2 Test Setup

See section 4.4.1 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 20 dB Bandwidth

5.3.1 Limit

FCC §15.231; RSS-Gen 6.7

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

5.3.2 Test Setup

See section 4.4.3 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Span = two times and five times the OBW

RBW = 1% to 5% of the OBW

VBW $\geq$ three times RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Field Strength of Fundamental Emissions and Radiated Emissions

5.4.1 Limit

FCC §15.231 & §15.209; RSS-210 8.9

According to FCC section 15.231(b), In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	¹ 1250 to 3750	125 to 375
174-260	3750	375
260-470	¹ 3750 to 12500	375 to 1250
Above 470	12500	1250
¹ Linear interpolations.		

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)
0.009 - 0.490	2400/F(kHz)
0.490 - 1.705	24000/F(kHz)
1.705 - 30.0	30
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

Note:

- For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.4.2 Test Setup

See section 4.4.2 to 4.4.4 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented. The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.4.4 Test Result

Please refer to ANNEX A.4 & A.5.

5.5 Transmitting Time

5.5.1 Limit

FCC §15.231

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

5.5.2 Test Setup

See section 4.4.3 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT transmitter was activated, the spectrum analyzer single sweep was triggered while a command on the EUT was activated and plots were captured

5.5.4 Test Result

Please refer to ANNEX A.6.

ANNEX A TEST RESULT

A.1 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

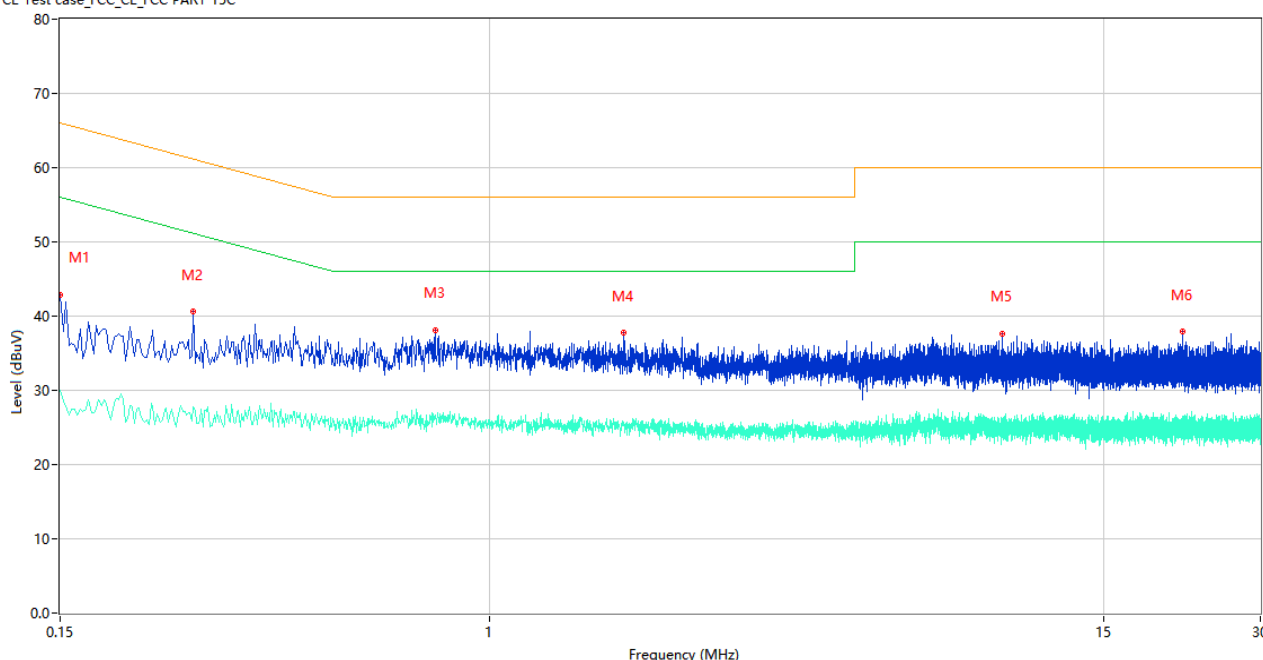

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	42.83	9.78	66.00	23.17	Peak	L	Pass
1**	0.150	30.02	9.78	56.00	25.98	AV	L	Pass
2	0.270	40.58	9.76	61.12	20.54	Peak	L	Pass
2**	0.270	27.74	9.76	51.12	23.38	AV	L	Pass
3	0.786	38.16	10.43	56.00	17.84	Peak	L	Pass
3**	0.786	26.69	10.43	46.00	19.31	AV	L	Pass
4	1.806	37.72	10.17	56.00	18.28	Peak	L	Pass
4**	1.806	25.75	10.17	46.00	20.25	AV	L	Pass
5	9.582	37.63	10.22	60.00	22.37	Peak	L	Pass
5**	9.582	26.01	10.22	50.00	23.99	AV	L	Pass
6	21.282	37.89	11.15	60.00	22.11	Peak	L	Pass
6**	21.282	25.24	11.15	50.00	24.76	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

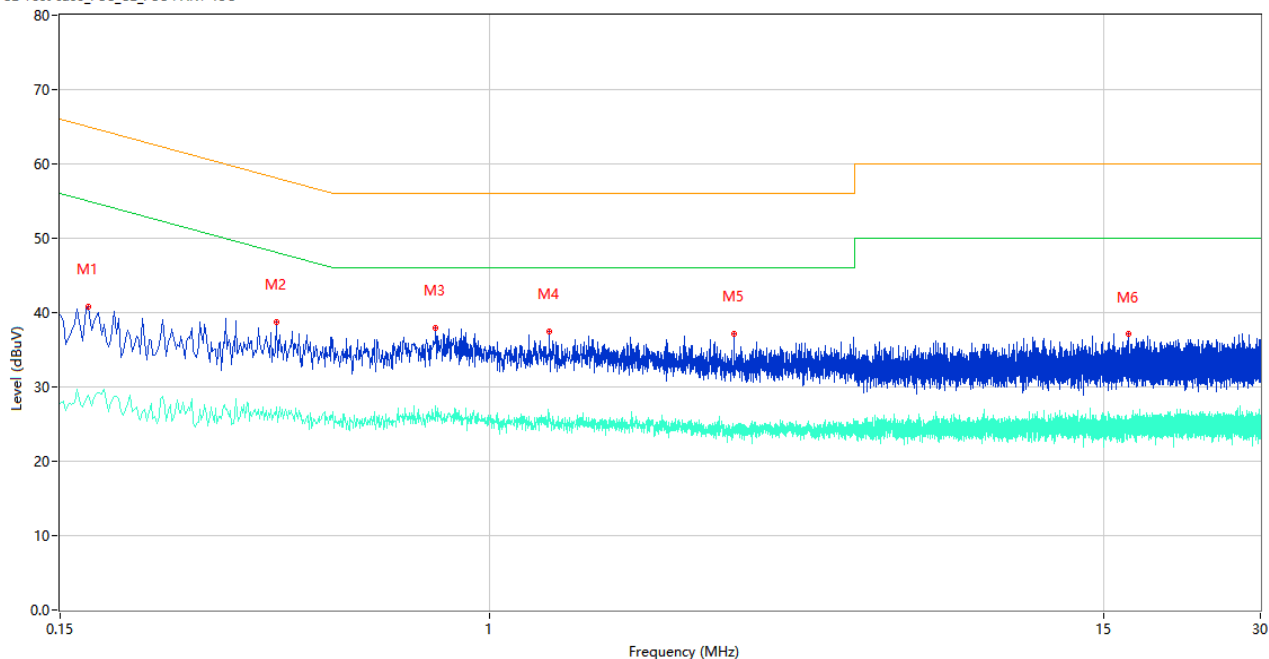

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.170	40.83	9.78	64.96	24.13	Peak	N	Pass
1**	0.170	28.91	9.78	54.96	26.05	AV	N	Pass
2	0.390	38.78	10.59	58.06	19.28	Peak	N	Pass
2**	0.390	27.27	10.59	48.06	20.79	AV	N	Pass
3	0.788	37.87	10.45	56.00	18.13	Peak	N	Pass
3**	0.788	27.48	10.45	46.00	18.52	AV	N	Pass
4	1.302	37.51	10.48	56.00	18.49	Peak	N	Pass
4**	1.302	26.44	10.48	46.00	19.56	AV	N	Pass
5	2.934	37.15	10.13	56.00	18.85	Peak	N	Pass
5**	2.934	24.11	10.13	46.00	21.89	AV	N	Pass
6	16.794	37.12	10.72	60.00	22.88	Peak	N	Pass
6**	16.794	24.61	10.72	50.00	25.39	AV	N	Pass


A.2 20 dB Bandwidth

Test Data

Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (kHz)	Verdict
433.5	87.260	1083.750	Pass

Test Plots

20 dB Bandwidth

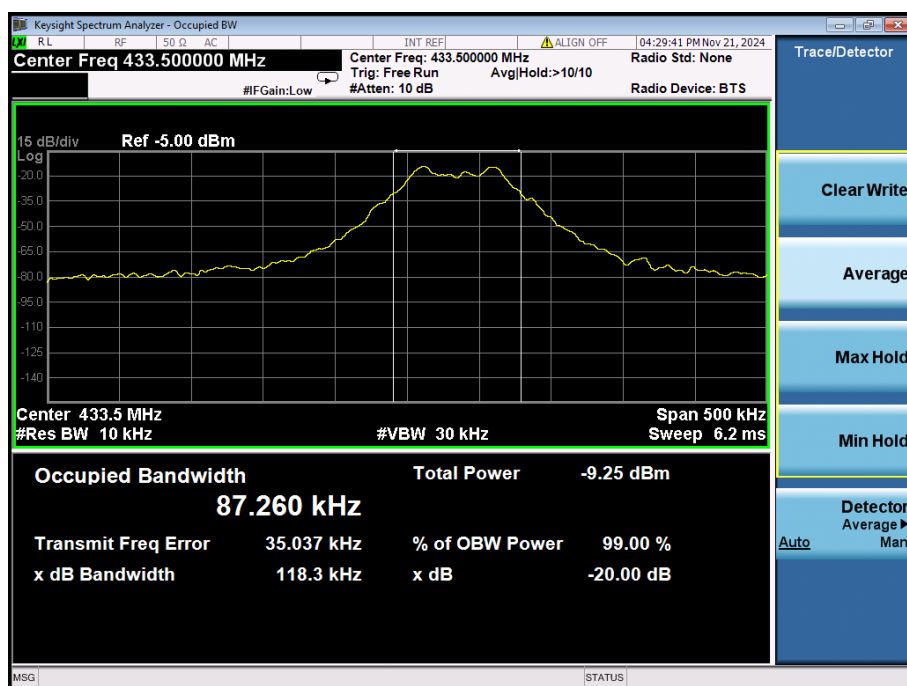


A.3 Duty cycle

Test Data


Data Transmissions	
On time within 100 msec	100 ms
Duty cycle correction factor	$20 \cdot \log(100/100) = 0 \text{ dB}$

Test Plots

Duty cycle

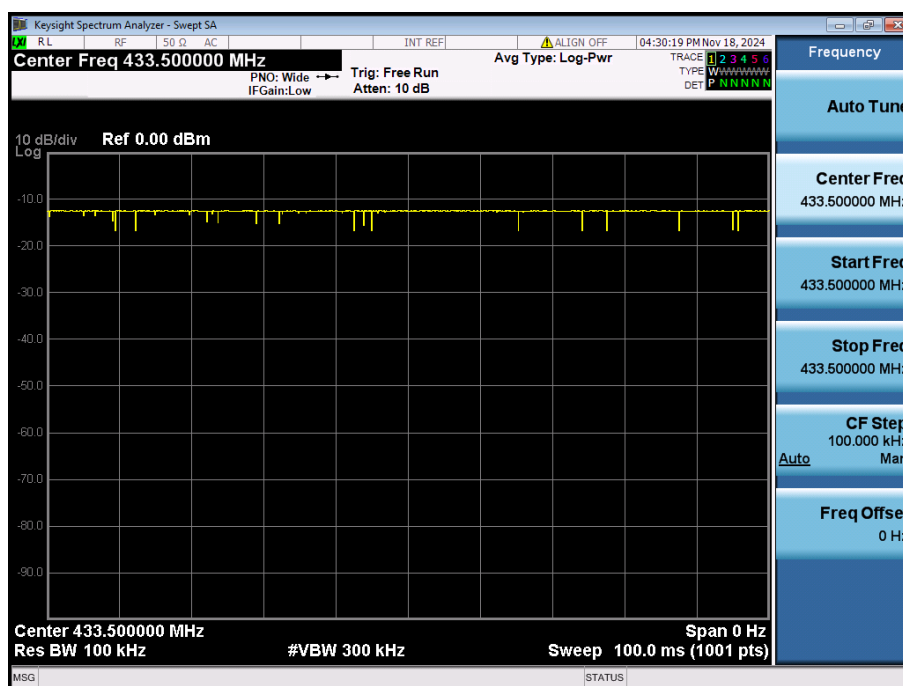

A.4 Field Strength of Fundamental Emissions

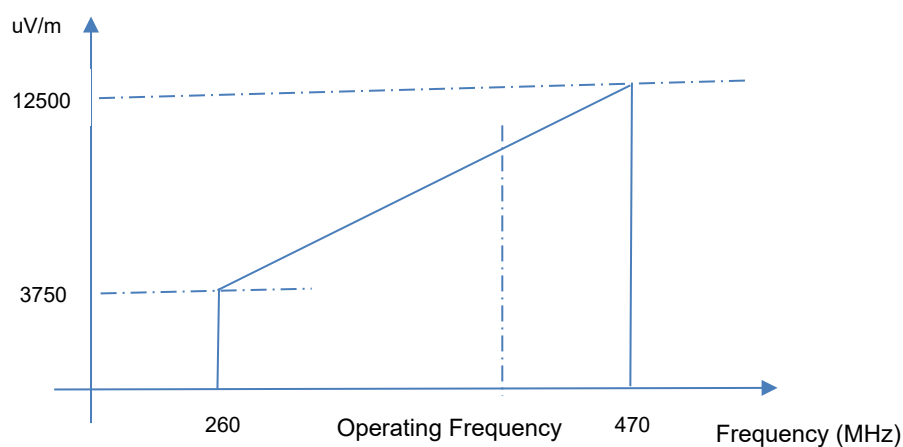

The Field Strength of Fundamental Emissions (Operating Frequency) is:

$$3750 \text{ uV/m} = 20 \cdot \log(3750) \text{ dBuV/m} = 71.48 \text{ dBuV/m}$$

$$12500 \text{ uV/m} = 20 \cdot \log(12500) \text{ dBuV/m} = 81.94 \text{ dBuV/m}$$

Test Data

Field Strength of Fundamental Emissions and Field strength of spurious emissions Value					
Operating Frequency (MHz)	Field Strength (dBuV/m)	Detector	Limit @3m (dBuV/m)	Margin (dB)	Antenna
433.5	78.24	PEAK	108.8	30.56	Horizontal
	67.99	PEAK	108.8	40.81	Vertical
	78.24	AVERAGE	80.8	10.56	Horizontal
	67.99	AVERAGE	80.8	20.81	Vertical
867.0	52.06	PEAK	80.8	28.74	Horizontal
	53.65	PEAK	80.8	27.15	Vertical
	52.06	AVERAGE	60.8	8.74	Horizontal
	53.65	AVERAGE	60.8	7.15	Vertical

A.5 Radiated Emission

Note ¹: The symbol of “--” in the table which means not application.

Note ²: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note ⁴: The verdict please refer to the A.3 field strength of fundamental emissions and field strength of spurious emissions value.

Test Data and Plots

Note ¹: Limit field strength of fundamental: $20 \cdot \log((12500-3750)/(470-260)+(f_c-260)+3750) \text{ dBuV/m} + 20 \text{ dB} = 108.8 \text{ dBuV/m@3m (PK)}$

Note ²: Limit field strength of harmonics: $20 \cdot \log((1250-375)/(470-260)+(f_c-260)+375) \text{ dBuV/m} + 20 \text{ dB} = 80.8 \text{ dBuV/m@3m (PK)}$


433.5 MHz, 30 MHz to 1 GHz, ANT H

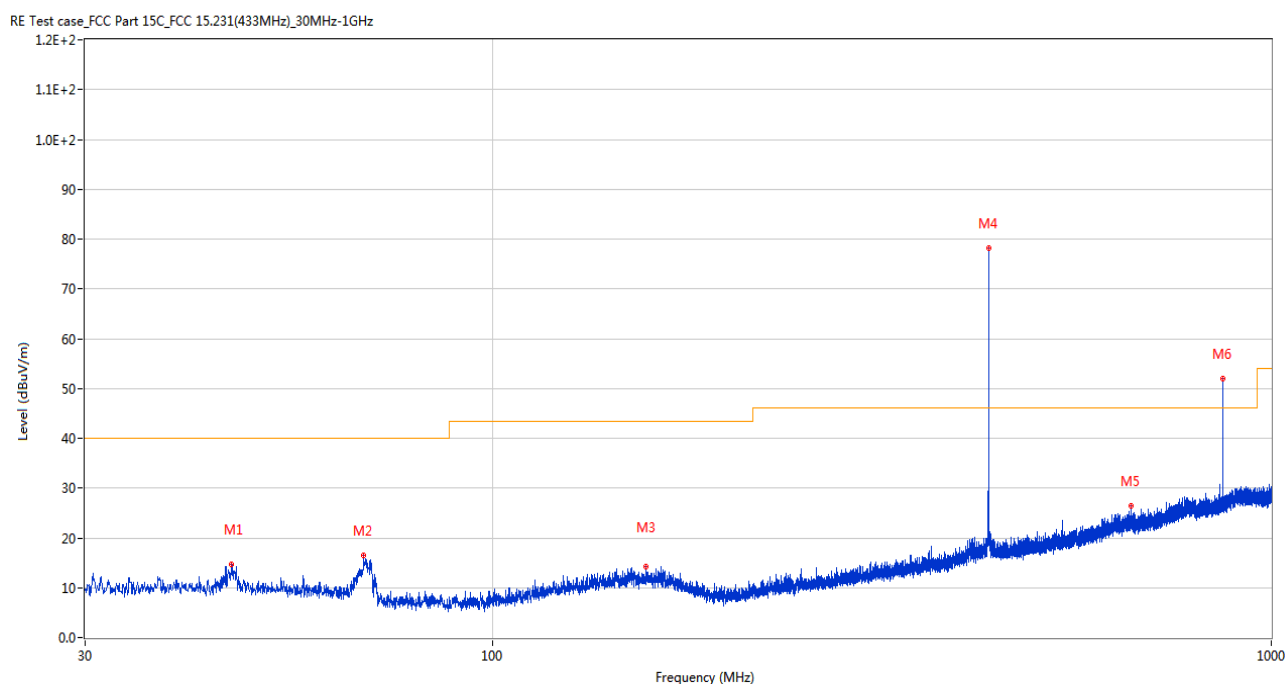

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	46.248	14.68	40.0	25.32	Peak	341.00	150	Horizontal	Pass
2	68.364	16.41	40.0	23.59	Peak	153.00	150	Horizontal	Pass
3	157.506	14.30	43.5	29.20	Peak	63.00	200	Horizontal	Pass
4	433.569	78.24	108.8	30.56	Peak	194.00	200	Horizontal	Pass
5	661.276	26.47	46.0	19.53	Peak	0.00	150	Horizontal	Pass
6	867.062	52.06	80.8	28.74	Peak	37.00	150	Horizontal	Pass

433.5 MHz, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.231(433MHz)_30MHz-1GHz

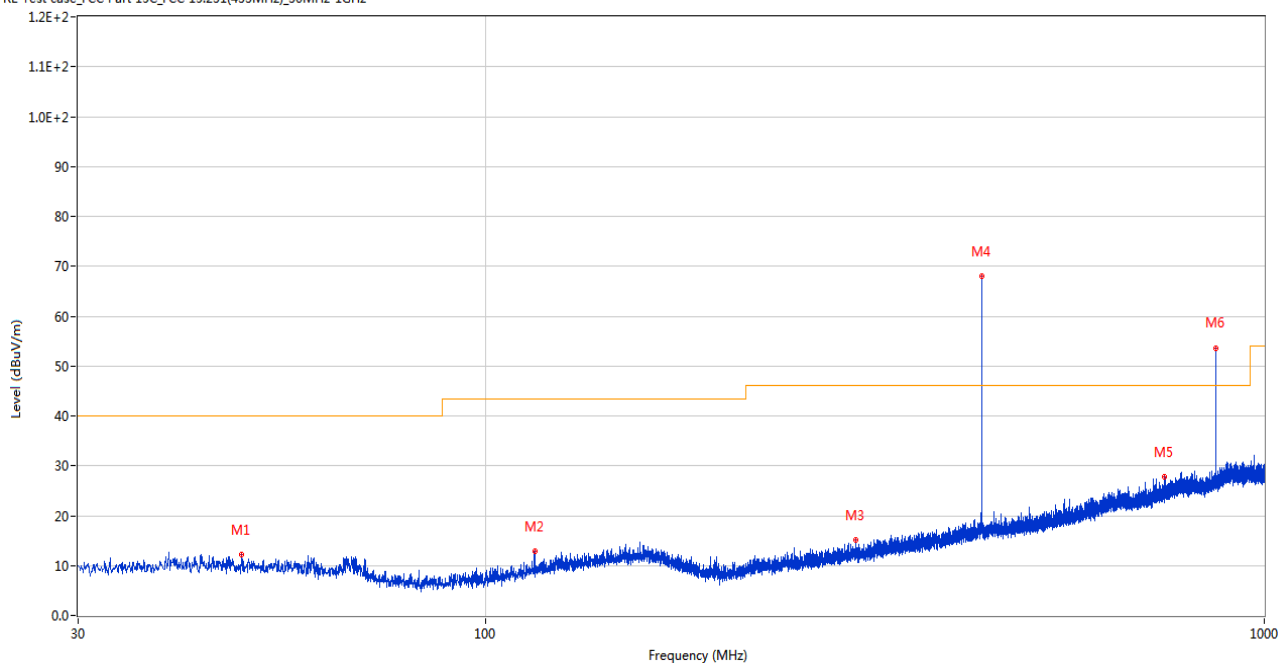

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.624	12.19	40.0	27.81	Peak	194.00	200	Vertical	Pass
2	115.651	12.90	43.5	30.60	Peak	0.00	200	Vertical	Pass
3	298.836	15.03	46.0	30.97	Peak	161.00	100	Vertical	Pass
4	433.520	67.99	108.8	40.81	Peak	121.00	100	Vertical	Pass
5	745.472	27.85	46.0	18.15	Peak	223.00	200	Vertical	Pass
6	867.062	53.65	80.8	27.15	Peak	145.00	200	Vertical	Pass

433.5 MHz, 1 GHz to 7 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.231(433MHz)_1GHz-7GHz

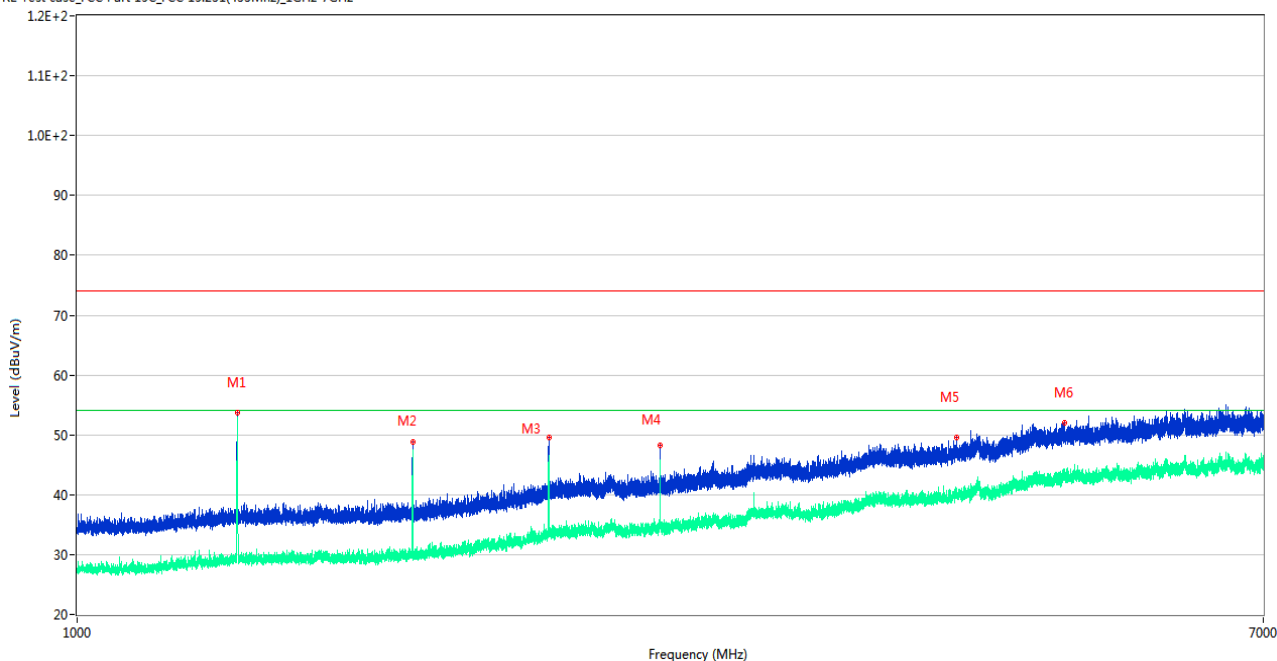

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1300.500	53.76	80.8	27.04	Peak	349.00	100	Horizontal	Pass
1**	1300.500	52.79	60.8	8.01	AV	349.00	100	Horizontal	Pass
2	1734.200	48.81	80.8	31.99	Peak	324.00	150	Horizontal	Pass
2**	1734.200	47.32	60.8	13.48	AV	324.00	150	Horizontal	Pass
3	2167.900	49.65	80.8	31.15	Peak	185.00	150	Horizontal	Pass
3**	2167.900	46.33	60.8	14.47	AV	185.00	150	Horizontal	Pass
4	2601.200	48.34	80.8	32.46	Peak	295.00	200	Horizontal	Pass
4**	2601.200	45.23	60.8	15.57	AV	295.00	200	Horizontal	Pass
5	4235.800	49.65	74.0	24.35	Peak	72.00	400	Horizontal	Pass
5**	4235.800	39.44	54.0	14.56	AV	72.00	400	Horizontal	Pass
6	5053.800	52.05	74.0	21.95	Peak	155.00	200	Horizontal	Pass
6**	5053.800	42.89	54.0	11.11	AV	155.00	200	Horizontal	Pass

433.5 MHz, 1 GHz to 7 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.231(433MHz)_1GHz-7GHz

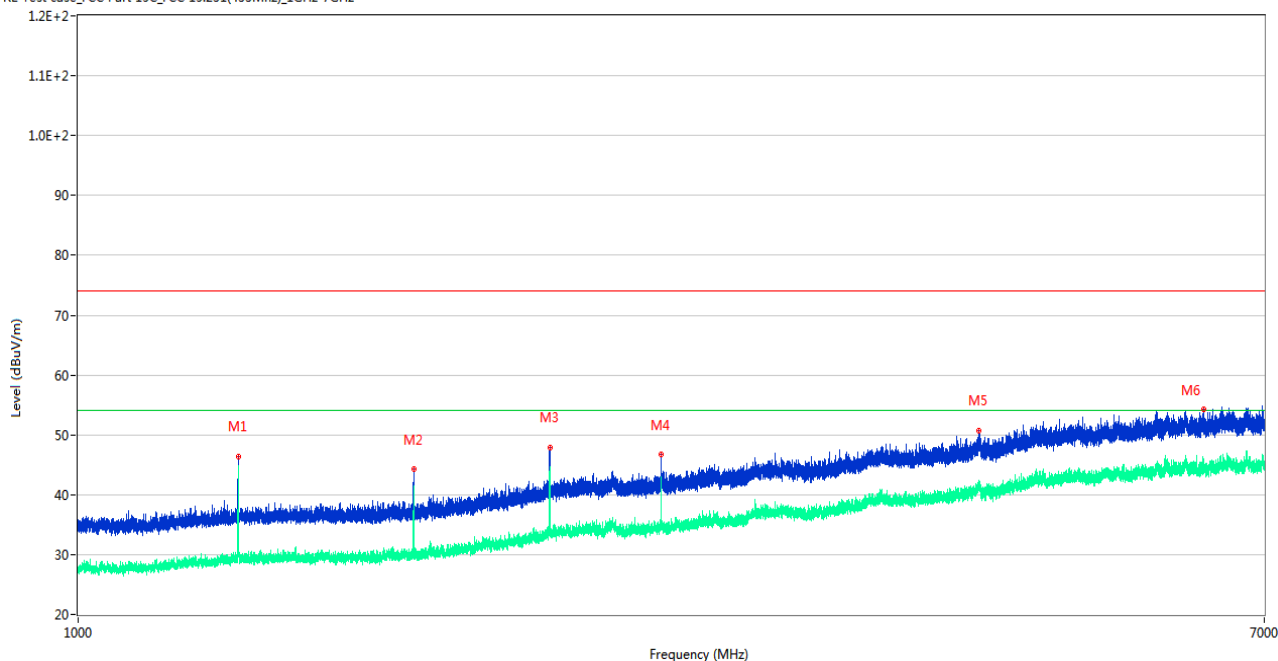

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1300.700	46.42	80.8	34.38	Peak	279.00	400	Vertical	Pass
1**	1300.700	44.73	60.8	16.07	AV	279.00	400	Vertical	Pass
2	1734.200	44.23	80.8	36.57	Peak	279.00	150	Vertical	Pass
2**	1734.200	41.29	60.8	19.51	AV	279.00	150	Vertical	Pass
3	2167.800	47.87	80.8	32.93	Peak	115.00	150	Vertical	Pass
3**	2167.800	44.72	60.8	16.08	AV	115.00	150	Vertical	Pass
4	2601.300	46.73	80.8	34.07	Peak	197.00	300	Vertical	Pass
4**	2601.300	43.04	60.8	17.76	AV	197.00	300	Vertical	Pass
5	4383.600	50.76	74.0	23.24	Peak	102.00	300	Vertical	Pass
5**	4383.600	40.57	54.0	13.43	AV	102.00	300	Vertical	Pass
6	6333.400	54.29	74.0	19.71	Peak	210.00	400	Vertical	Pass
6**	6333.400	45.28	54.0	8.72	AV	210.00	400	Vertical	Pass

A.6 Transmitter Time


Note: The EUT ceases transmission almost immediately upon being released. Therefore the longest period of time the transmitter should take to deactivate is a packet length.

Test Data

Frequency (MHz)	Transmission Period (s)	Limit (s)	Verdict
433.5	0.900	5.000	Pass

Test Plots

Transmission Period

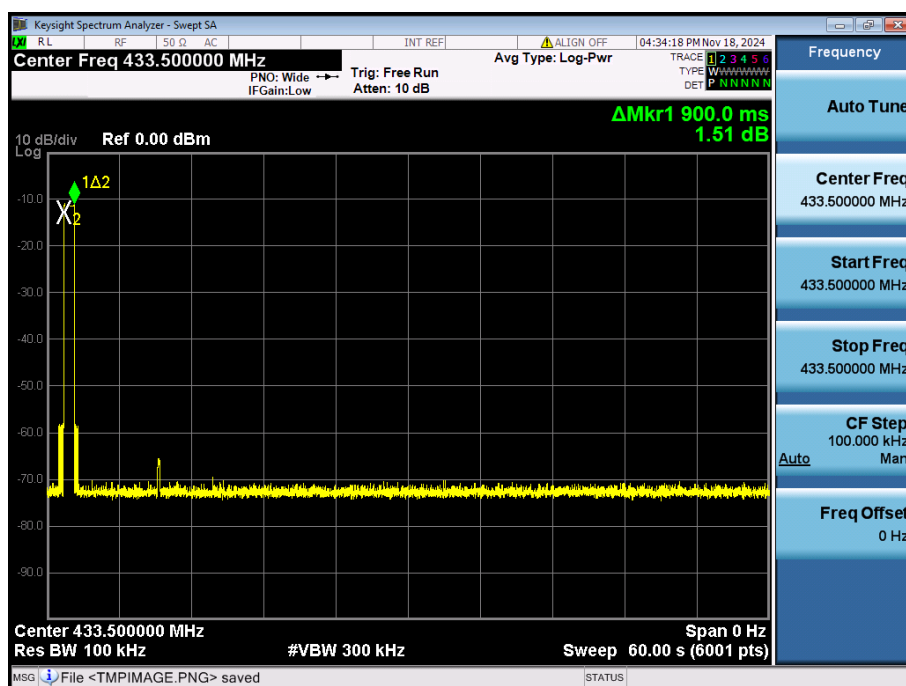

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ24B0417-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ24B0417-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ24B0417-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--