



## 2300 MHz Dipole Calibration Certificate

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL (Auden)**

Certificate No: **D2300V2-1018\_Jul18**

### CALIBRATION CERTIFICATE

Object **D2300V2 - SN:1018**

Calibration procedure(s) **QA CAL-05.v10**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 24, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-18 (No. 217-02672/02673) | Apr-19                |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-18 (No. 217-02672)       | Apr-19                |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-18 (No. 217-02673)       | Apr-19                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-18 (No. 217-02682)       | Apr-19                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-18 (No. 217-02683)       | Apr-19                |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)  | Dec-18                |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)  | Oct-18                |

| Secondary Standards             | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A            | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A           | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A           | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06         | SN: 100972     | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Issued: July 24, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.1    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2300 MHz $\pm$ 1 MHz   |             |

### Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.5           | 1.67 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 38.3 $\pm$ 6 % | 1.69 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

### SAR result with Head TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 12.4 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 49.0 W/kg $\pm$ 17.0 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 5.95 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.6 W/kg $\pm$ 16.5 % (k=2) |

### Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.9           | 1.81 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.3 $\pm$ 6 % | 1.85 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

### SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                          | 250 mW input power | 11.9 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 47.0 W/kg $\pm$ 17.0 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR measured                                            | 250 mW input power | 5.73 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 22.7 W/kg $\pm$ 16.5 % (k=2) |

**Appendix (Additional assessments outside the scope of SCS 0108)****Antenna Parameters with Head TSL**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.8 $\Omega$ - 2.9 j $\Omega$ |
| Return Loss                          | - 30.4 dB                      |

**Antenna Parameters with Body TSL**

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.8 $\Omega$ - 2.4 j $\Omega$ |
| Return Loss                          | - 27.7 dB                      |

**General Antenna Parameters and Design**

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.169 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | March 30, 2009 |

## DASY5 Validation Report for Head TSL

Date: 24.07.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1018**

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.69$  S/m;  $\epsilon_r = 38.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.08, 8.08, 8.08) @ 2300 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.7 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 23.9 W/kg


**SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.95 W/kg**

Maximum value of SAR (measured) = 19.9 W/kg

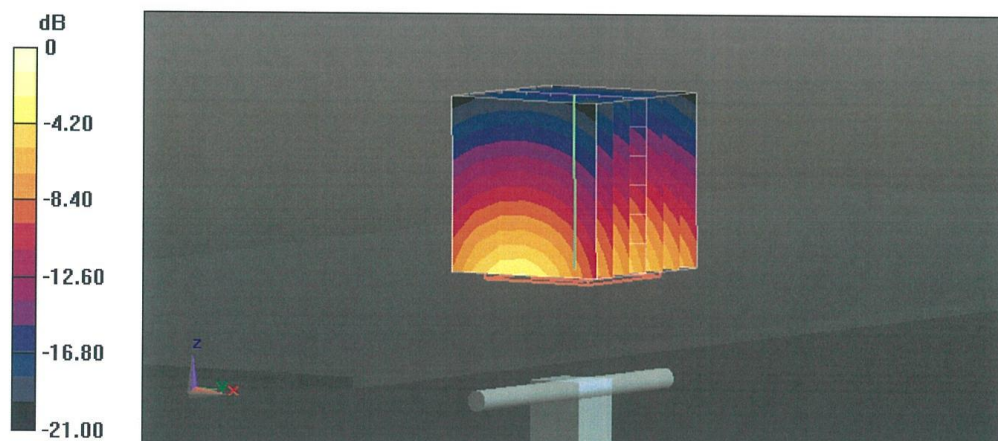

0 dB = 19.9 W/kg = 12.99 dBW/kg

### Impedance Measurement Plot for Head TSL

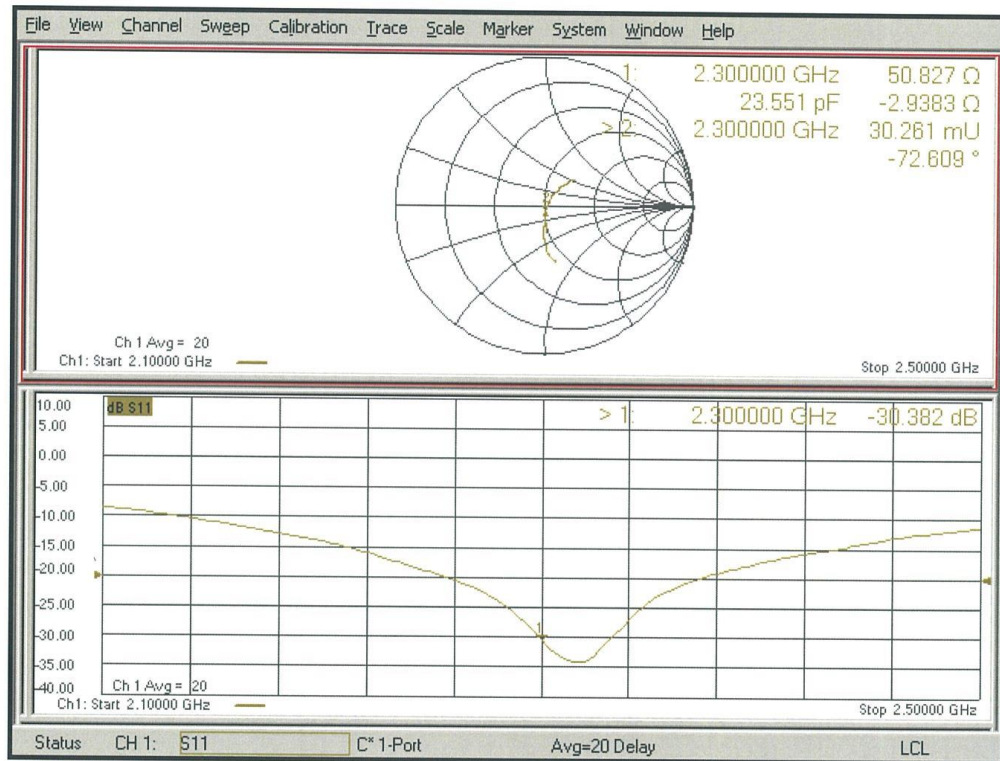

## DASY5 Validation Report for Body TSL

Date: 16.07.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN:1018**

Communication System: UID 0 - CW; Frequency: 2300 MHz

Medium parameters used:  $f = 2300$  MHz;  $\sigma = 1.85$  S/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.08, 8.08, 8.08) @ 2300 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.5 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 22.4 W/kg


**SAR(1 g) = 11.9 W/kg; SAR(10 g) = 5.73 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg

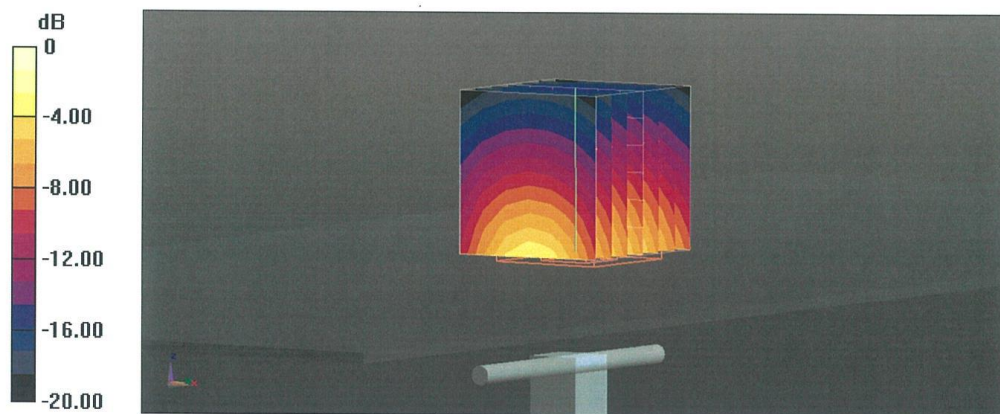

0 dB = 18.8 W/kg = 12.74 dBW/kg

### Impedance Measurement Plot for Body TSL

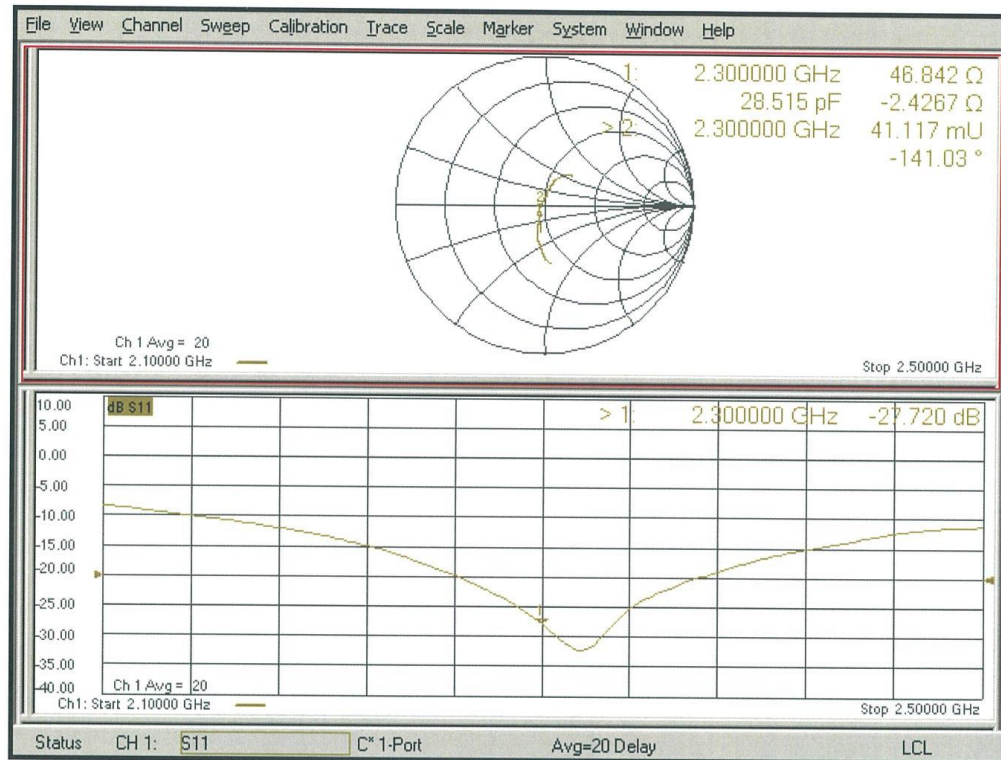

## 2450 MHz Dipole Calibration Certificate

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL-BJ (Auden)**

Certificate No: **D2450V2-853\_Jul17**

### CALIBRATION CERTIFICATE

Object **D2450V2 - SN:853**

Calibration procedure(s) **QA CAL-05.v9  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 21, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 7349           | 31-May-17 (No. EX3-7349_May17)    | May-18                 |
| DAE4                        | SN: 601            | 28-Mar-17 (No. DAE4-601_Mar17)    | Mar-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

|                |                       |                                   |                                                                                                    |
|----------------|-----------------------|-----------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by: | Name<br>Michael Weber | Function<br>Laboratory Technician | Signature<br> |
| Approved by:   | Katja Pokovic         | Technical Manager                 |               |

Issued: July 24, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.0    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2450 MHz $\pm$ 1 MHz   |             |

### Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 37.8 $\pm$ 6 % | 1.87 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

### SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 13.4 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 52.2 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.26 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 24.7 W/kg $\pm$ 16.5 % (k=2) |

### Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.1 $\pm$ 6 % | 2.04 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

### SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 12.9 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 50.4 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.03 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 23.8 W/kg $\pm$ 16.5 % (k=2) |

**Appendix (Additional assessments outside the scope of SCS 0108)****Antenna Parameters with Head TSL**

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.0 \Omega + 5.0 j\Omega$ |
| Return Loss                          | - 25.6 dB                   |

**Antenna Parameters with Body TSL**

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $49.6 \Omega + 6.3 j\Omega$ |
| Return Loss                          | - 24.0 dB                   |

**General Antenna Parameters and Design**

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.161 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | November 10, 2009 |

## DASY5 Validation Report for Head TSL

Date: 20.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 853**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.12, 8.12, 8.12); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.7 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 27.0 W/kg


**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.26 W/kg**

Maximum value of SAR (measured) = 21.5 W/kg

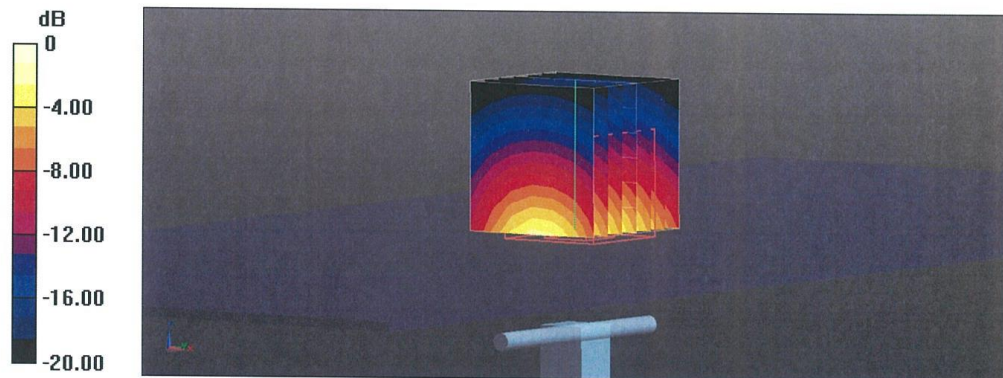

0 dB = 21.5 W/kg = 13.32 dBW/kg

### Impedance Measurement Plot for Head TSL

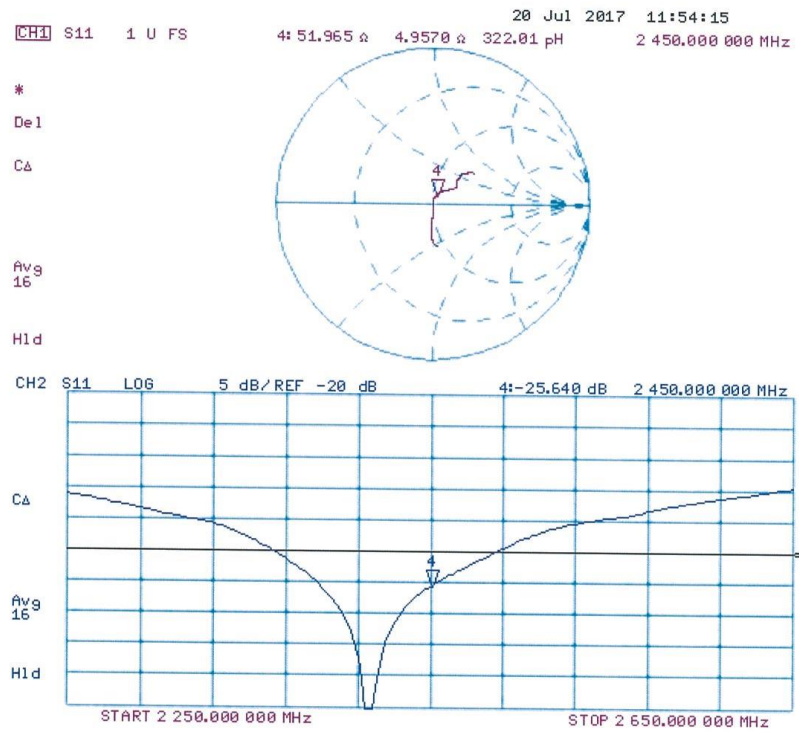

## DASY5 Validation Report for Body TSL

Date: 21.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 853**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.04$  S/m;  $\epsilon_r = 52.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.1, 8.1, 8.1); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.1 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 25.5 W/kg


**SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.03 W/kg**

Maximum value of SAR (measured) = 20.0 W/kg

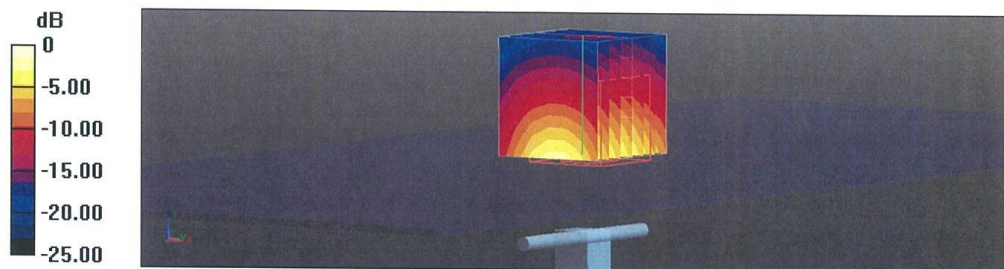

0 dB = 20.0 W/kg = 13.01 dBW/kg

### Impedance Measurement Plot for Body TSL

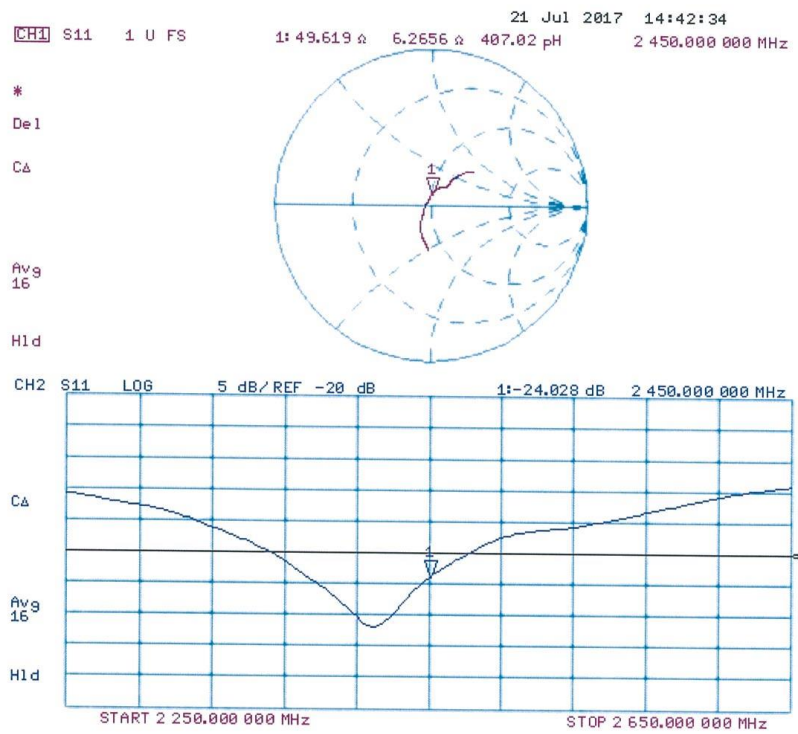

## ANNEX I Extended Calibration SAR Dipole

Referring to KDB865664 D01, if dipoles are verified in return loss ( <-20dBm, within 20% of prior calibration), and in impedance ( within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.

Justification of Extended Calibration SAR Dipole D750V3– serial no.1017

| Head                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-19           | -27.5            |           | 54.4                 |             | 0.5                        |              |
| 2018-7-17           | -26.0            | 5.5       | 55.1                 | 0.7         | -1.0                       | -1.5         |

| Body                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-19           | -29.1            |           | 49.3                 |             | -3.4                       |              |
| 2018-7-17           | -29.3            | -0.69     | 51.5                 | 2.2         | -3.1                       | 0.3          |

Justification of Extended Calibration SAR Dipole D835V2– serial no.4d069

| Head                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-19           | -32.4            |           | 52.1                 |             | -1.2                       |              |
| 2018-7-17           | -30.3            | 6.5       | 53.0                 | 1.1         | -1.0                       | 0.2          |

| Body                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-19           | -26.9            |           | 47.9                 |             | -3.9                       |              |
| 2018-7-17           | -25.5            | 5.2       | 48.5                 | 0.6         | -5.0                       | -1.1         |

## Justification of Extended Calibration SAR Dipole D1750V2– serial no.1003

| Head                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-21           | -37.1            |           | 50.9                 |             | 1.1                        |              |
| 2018-7-19           | -35.6            | 4.0       | 49.5                 | -1.4        | -1.6                       | -2.7         |

| Body                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-21           | -30.2            |           | 47.0                 |             | 0.1                        |              |
| 2018-7-19           | -27.6            | 8.6       | 46.0                 | -1.0        | -0.3                       | -0.4         |

## Justification of Extended Calibration SAR Dipole D1900V2– serial no.5d101

| Head                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-26           | -24.5            |           | 51.7                 |             | 5.8                        |              |
| 2018-7-24           | -22.9            | 6.5       | 50.6                 | -1.1        | 7.2                        | 1.4          |

| Body                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-26           | -22.0            |           | 46.2                 |             | 6.6                        |              |
| 2018-7-24           | -21.4            | 2.7       | 46.4                 | 0.2         | 7.4                        | 0.8          |

Justification of Extended Calibration SAR Dipole D2450V2– serial no.853

| Head                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-21           | -25.6            |           | 52.0                 |             | 5.0                        |              |
| 2018-7-19           | -23.1            | 9.8       | 53.6                 | 1.6         | 6.3                        | 1.3          |

| Body                |                  |           |                      |             |                            |              |
|---------------------|------------------|-----------|----------------------|-------------|----------------------------|--------------|
| Date of Measurement | Return-Loss (dB) | Delta (%) | Real Impedance (ohm) | Delta (ohm) | Imaginary Impedance (johm) | Delta (johm) |
| 2017-7-21           | -24.0            |           | 49.6                 |             | 6.3                        |              |
| 2018-7-19           | -22.0            | 8.3       | 50.4                 | 0.8         | 8.0                        | 1.7          |

## ANNEX J Variant Product Test

### J.1 Dielectric Performance and System Validation

**Table J.1-1: Dielectric Performance of Head Tissue Simulating Liquid**

| Measurement Date<br>(yyyy-mm-dd) | Type | Frequency | Permittivity<br>$\epsilon$ | Drift<br>(%) | Conductivity<br>$\sigma$ (S/m) | Drift<br>(%) |
|----------------------------------|------|-----------|----------------------------|--------------|--------------------------------|--------------|
| 2019-12-29                       | Head | 750 MHz   | 41.7                       | -0.57        | 0.898                          | 0.90         |
|                                  | Body | 750 MHz   | 55.35                      | -0.27        | 0.951                          | -0.94        |
| 2019-12-29                       | Head | 835 MHz   | 41.6                       | 0.24         | 0.901                          | 0.11         |
|                                  | Body | 835 MHz   | 56.1                       | 1.63         | 0.988                          | 1.86         |
| 2019-12-29                       | Head | 1750 MHz  | 40.68                      | 1.50         | 1.38                           | 0.73         |
|                                  | Body | 1750 MHz  | 53.22                      | -0.34        | 1.514                          | 1.61         |
| 2019-12-30                       | Head | 1900 MHz  | 39.55                      | -1.13        | 1.39                           | -0.71        |
|                                  | Body | 1900 MHz  | 53.19                      | -0.21        | 1.536                          | 1.05         |
| 2019-12-30                       | Head | 2300 MHz  | 39.35                      | -0.38        | 1.655                          | -0.90        |
|                                  | Body | 2300 MHz  | 53.56                      | 1.25         | 1.825                          | 0.83         |
| 2019-12-30                       | Head | 2450 MHz  | 39.76                      | 1.43         | 1.805                          | 0.28         |
|                                  | Body | 2450 MHz  | 51.8                       | -1.71        | 1.93                           | -1.03        |

**Table J.1-2: System Validation of Head**

| Measurement Date<br>(yyyy-mm-dd) | Frequency | Target value (W/kg) |                | Measured value(W/kg) |                | Deviation       |                |
|----------------------------------|-----------|---------------------|----------------|----------------------|----------------|-----------------|----------------|
|                                  |           | 10 g<br>Average     | 1 g<br>Average | 10 g<br>Average      | 1 g<br>Average | 10 g<br>Average | 1 g<br>Average |
| 2019-12-29                       | 750 MHz   | 5.57                | 8.57           | 5.52                 | 8.56           | -0.90%          | -0.12%         |
| 2019-12-29                       | 835 MHz   | 6.29                | 9.70           | 6.28                 | 9.8            | -0.16%          | 1.03%          |
| 2019-12-29                       | 1750 MHz  | 19.3                | 36.6           | 19.4                 | 36.04          | 0.52%           | -1.53%         |
| 2019-12-30                       | 1900 MHz  | 20.8                | 39.7           | 20.6                 | 40.28          | -0.96%          | 1.46%          |
| 2019-12-30                       | 2300 MHz  | 24.1                | 49.7           | 24.52                | 50.6           | 1.74%           | 1.81%          |
| 2019-12-30                       | 2450 MHz  | 24.2                | 51.6           | 24.36                | 52.4           | 0.66%           | 1.55%          |

**Table J.1-2: System Validation of Body**

| Measurement Date<br>(yyyy-mm-dd) | Frequency | Target value (W/kg) |                | Measured value(W/kg) |                | Deviation       |                |
|----------------------------------|-----------|---------------------|----------------|----------------------|----------------|-----------------|----------------|
|                                  |           | 10 g<br>Average     | 1 g<br>Average | 10 g<br>Average      | 1 g<br>Average | 10 g<br>Average | 1 g<br>Average |
| 2019-12-29                       | 750 MHz   | 5.63                | 8.55           | 5.6                  | 8.72           | -0.53%          | 1.99%          |
| 2019-12-29                       | 835 MHz   | 6.32                | 9.68           | 6.4                  | 9.52           | 1.27%           | -1.65%         |
| 2019-12-29                       | 1750 MHz  | 19.5                | 36.8           | 19.76                | 36.48          | 1.33%           | -0.87%         |
| 2019-12-30                       | 1900 MHz  | 20.9                | 39.7           | 20.64                | 39.32          | -1.24%          | -0.96%         |
| 2019-12-30                       | 2300 MHz  | 22.9                | 47.2           | 22.56                | 46.72          | -1.48%          | -1.02%         |
| 2019-12-30                       | 2450 MHz  | 24.5                | 52.3           | 24.88                | 51.48          | 1.55%           | -1.57%         |

## J.2 Spot Check

### J.2.1 Conducted power of selected case

**Table J.2-1: The conducted power results for 2G- Normal Power**

| GSM 850MHZ | Measured Power (dBm) |       |       |
|------------|----------------------|-------|-------|
|            | 251                  | 190   | 128   |
| Speech     | /                    | 32.23 | /     |
| GPRS(2Tx)  | /                    | /     | 31.09 |
| GSM1900MHZ | Measured Power (dBm) |       |       |
|            | 810                  | 661   | 512   |
| Speech     | /                    | 28.98 | /     |
| GPRS(2Tx)  | 27.05                | 27.16 | 27.13 |

**Table J.2-2: The conducted power results for 2G-Low Power**

| GSM1900MHZ | Measured Power (dBm) |       |     |
|------------|----------------------|-------|-----|
|            | 810                  | 661   | 512 |
| GPRS(2Tx)  | /                    | 21.53 | /   |

**Table J.2-3: The conducted Power for WCDMA- Normal Power**

| Item  | band  | FDDII result |             |             |
|-------|-------|--------------|-------------|-------------|
|       | ARFCN | 9538/9938    | 9400/9800   | 9262/9662   |
| WCDMA | \     | (1907.6MHz)  | (1880MHz)   | (1852.4MHz) |
|       |       | 21.94        | /           | 22.39       |
| Item  | band  | FDDIV result |             |             |
|       | ARFCN | 1513/1738    | 1412/1637   | 1312/1537   |
| WCDMA | \     | (1752.6MHz)  | (1732.4MHz) | (1712.4MHz) |
|       |       | 22.18        | /           | /           |
| Item  | band  | FDDV result  |             |             |
|       | ARFCN | 4233/4458    | 4183/4408   | 4132/4357   |
| WCDMA | \     | (846.6MHz)   | (836.6MHz)  | (826.4MHz)  |
|       |       | 24.45        | 24.27       |             |

**Table J.2-4: The conducted Power for WCDMA- Low Power**

| Item  | band  | FDDII result |             |             |
|-------|-------|--------------|-------------|-------------|
|       | ARFCN | 9538/9938    | 9400/9800   | 9262/9662   |
| WCDMA | \     | (1907.6MHz)  | (1880MHz)   | (1852.4MHz) |
|       |       | /            | /           | 18.83       |
| Item  | band  | FDDIV result |             |             |
|       | ARFCN | 1513/1738    | 1412/1637   | 1312/1537   |
| WCDMA | \     | (1752.6MHz)  | (1732.4MHz) | (1712.4MHz) |
|       |       | 18.66        | /           | /           |

**Table J.2-5: The conducted Power for LTE-Normal Power**

|           |            |             |       |
|-----------|------------|-------------|-------|
| LTE Band2 | 1RB-Middle | 1900(19100) | 22.83 |
| LTE Band4 | 1RB-Middle | 1720(20050) | 22.81 |

|            |            |              |       |
|------------|------------|--------------|-------|
| LTE Band4  | 1RB-Middle | 1745(20300)  | 22.66 |
| LTE Band5  | 1RB-Middle | 829(20450)   | 23.29 |
| LTE Band12 | 1RB-Middle | 704 (23060)  | 23.42 |
| LTE Band14 | 1RB-Middle | 793(2330)    | 23.23 |
| LTE Band30 | 1RB-Middle | 2310 (27710) | 22.26 |

**Table J.2-6: The conducted Power for LTE-Low Power**

|            |            |              |       |
|------------|------------|--------------|-------|
| LTE Band2  | 1RB-Middle | 1860(18700)  | 18.69 |
| LTE Band4  | 1RB-Middle | 1745(20300)  | 19.21 |
| LTE Band30 | 1RB-High   | 2310 (27710) | 20.42 |

**Table J.2-7: The conducted Power for WLAN**

| Mode / data rate  | Channel | Measured Power (dBm) |
|-------------------|---------|----------------------|
| 802.11b – 5.5Mbps | 6       | 18.77                |
| 802.11b – 5.5Mbps | 11      | 18.71                |

## J.2.2 Measurement results

| Test Band     | Channel | Frequency | Tune-Up | Measured Power | Test Position | Measured 10g SAR | Measured 1g SAR | Reported 10g SAR | Reported 1g SAR | Power Drift |
|---------------|---------|-----------|---------|----------------|---------------|------------------|-----------------|------------------|-----------------|-------------|
| GSM850        | 190     | 836.6     | 33.2    | 32.23          | Left Cheek    | 0.156            | 0.201           | 0.20             | 0.25            | 0.07        |
| GSM850        | 128     | 824.2     | 32      | 31.09          | Rear          | 0.434            | 0.561           | 0.54             | 0.69            | -0.02       |
| PCS1900       | 661     | 1880      | 30      | 28.98          | Right Cheek   | 0.097            | 0.159           | 0.12             | 0.20            | -0.1        |
| PCS1900       | 661     | 1880      | 22.5    | 21.53          | Bottom        | 0.271            | 0.516           | 0.34             | 0.65            | -0.02       |
| PCS1900       | 810     | 1909.8    | 28      | 27.05          | Rear          | 0.524            | 0.903           | 0.65             | 1.12            | 0.05        |
| PCS1900       | 661     | 1880      | 28      | 27.16          | Rear          | 0.496            | 0.869           | 0.60             | 1.05            | 0.08        |
| PCS1900       | 512     | 1850.2    | 28      | 27.13          | Rear          | 0.516            | 0.925           | 0.63             | 1.13            | -0.13       |
| WCDMA1900-B11 | 9538    | 1907.6    | 23.2    | 21.94          | Right Cheek   | 0.0858           | 0.139           | 0.11             | 0.19            | -0.02       |
| WCDMA1900-B11 | 9262    | 1852.4    | 20.2    | 18.83          | Bottom        | 0.35             | 0.664           | 0.48             | 0.91            | -0.01       |
| WCDMA1900-B11 | 9262    | 1852.4    | 23.2    | 22.39          | Rear          | 0.418            | 0.757           | 0.50             | 0.91            | 0.06        |
| WCDMA1700-B1V | 1513    | 1752.6    | 22.5    | 21.18          | Right Cheek   | 0.0792           | 0.125           | 0.11             | 0.17            | -0.09       |
| WCDMA1700-B1V | 1513    | 1752.6    | 20      | 18.66          | Bottom        | 0.366            | 0.714           | 0.50             | 0.97            | 0.12        |
| WCDMA1700-B1V | 1513    | 1752.6    | 22.5    | 21.18          | Rear          | 0.402            | 0.723           | 0.54             | 0.98            | 0.11        |
| WCDMA850-BV   | 4183    | 836.6     | 25.5    | 24.45          | Left Cheek    | 0.328            | 0.426           | 0.42             | 0.54            | -0.09       |
| WCDMA850-BV   | 4132    | 826.4     | 25.5    | 24.27          | Rear          | 0.462            | 0.597           | 0.61             | 0.79            | 0           |
| LTE1900-FDD2  | 19100   | 1900 MHz  | 24      | 22.83          | Right Cheek   | 0.119            | 0.199           | 0.16             | 0.26            | -0.03       |
| LTE1900-FDD2  | 18700   | 1860 MHz  | 20      | 18.69          | Bottom        | 0.423            | 0.815           | 0.57             | 1.10            | 0.05        |
| LTE1900-FDD2  | 19100   | 1900 MHz  | 24      | 22.83          | Rear          | 0.314            | 0.565           | 0.41             | 0.74            | -0.03       |
| LTE1700-FDD4  | 20050   | 1720 MHz  | 24      | 22.81          | Right Cheek   | 0.0831           | 0.128           | 0.11             | 0.17            | -0.08       |
| LTE1700-FDD4  | 20300   | 1745 MHz  | 20.5    | 19.21          | REar          | 0.333            | 0.587           | 0.45             | 0.79            | -0.19       |
| LTE1700-FDD4  | 20300   | 1745 MHz  | 24      | 22.66          | Rear          | 0.319            | 0.609           | 0.43             | 0.83            | -0.14       |
| LTE850-FDD5   | 20450   | 829 MHz   | 24.5    | 23.29          | Left Cheek    | 0.25             | 0.33            | 0.33             | 0.44            | -0.1        |
| LTE850-FDD5   | 20450   | 829 MHz   | 24.5    | 23.29          | Rear          | 0.356            | 0.467           | 0.47             | 0.62            | -0.05       |
| LTE700-FDD12  | 23060   | 704 MHz   | 24.5    | 23.42          | Left Cheek    | 0.198            | 0.26            | 0.25             | 0.33            | 0.09        |
| LTE700-FDD12  | 23060   | 704 MHz   | 24.5    | 23.42          | Rear          | 0.359            | 0.471           | 0.46             | 0.60            | -0.07       |
| LTE700-FDD14  | 2330    | -1307 MHz | 24.5    | 23.23          | Left Cheek    | 0.246            | 0.322           | 0.33             | 0.43            | 0.04        |
| LTE700-FDD14  | 2330    | -1307 MHz | 24.5    | 23.23          | Rear          | 0.447            | 0.589           | 0.60             | 0.79            | -0.02       |
| LTE2300-FDD30 | 27710   | 2310 MHz  | 24      | 22.26          | Left Cheek    | 0.119            | 0.216           | 0.18             | 0.32            | -0.08       |
| LTE2300-FDD30 | 27710   | 2310 MHz  | 21.5    | 20.42          | Rear          | 0.454            | 0.901           | 0.58             | 1.16            | 0.08        |
| LTE2300-FDD30 | 27710   | 2310 MHz  | 24      | 22.26          | Rear          | 0.324            | 0.619           | 0.48             | 0.92            | 0.07        |
| WLAN2450      | 11      | 2462      | 20      | 18.71          | Left Cheek    | 0.422            | 0.843           | 0.57             | 1.13            | 0.08        |
| WLAN2450      | 6       | 2437      | 20.5    | 18.77          | REar          | 0.131            | 0.247           | 0.20             | 0.37            | 0.08        |

### J.2.3 Reported SAR Comparison

**Table J.3.3-1: Comparison**

| Exposure Configuration                  | Technology Band | Reported SAR 1g(W/kg) Original | Reported SAR 1g(W/kg) Spot check | Equipment Class |
|-----------------------------------------|-----------------|--------------------------------|----------------------------------|-----------------|
| Head<br>(Separation Distance 0mm)       | GSM 850         | 0.17                           | 0.25                             | PCE             |
|                                         | PCS 1900        | 0.22                           | 0.20                             |                 |
|                                         | UMTS FDD 2      | 0.22                           | 0.19                             |                 |
|                                         | UMTS FDD 4      | 0.17                           | 0.17                             |                 |
|                                         | UMTS FDD 5      | 0.54                           | 0.54                             |                 |
|                                         | LTE Band 2      | 0.23                           | 0.26                             |                 |
|                                         | LTE Band 4      | 0.21                           | 0.17                             |                 |
|                                         | LTE Band 5      | 0.36                           | 0.44                             |                 |
|                                         | LTE Band 12     | 0.25                           | 0.33                             |                 |
|                                         | LTE Band 14     | 0.42                           | 0.43                             |                 |
|                                         | LTE Band 30     | 0.26                           | 0.32                             |                 |
|                                         | WiFi 2.4 GHz    | 1.28                           | 1.13                             | DTS             |
| Hotspot<br>(Separation Distance 10mm)   | GSM 850         | 0.62                           | 0.69                             | PCE             |
|                                         | PCS 1900        | 0.84                           | 0.65                             |                 |
|                                         | UMTS FDD 2      | 1.25                           | 0.91                             |                 |
|                                         | UMTS FDD 4      | 1.12                           | 0.97                             |                 |
|                                         | UMTS FDD 5      | 0.70                           | 0.79                             |                 |
|                                         | LTE Band 2      | 1.31                           | 1.10                             |                 |
|                                         | LTE Band 4      | 1.17                           | 0.79                             |                 |
|                                         | LTE Band 5      | 0.40                           | 0.62                             |                 |
|                                         | LTE Band 12     | 0.53                           | 0.60                             |                 |
|                                         | LTE Band 14     | 0.62                           | 0.79                             |                 |
|                                         | LTE Band 30     | 1.10                           | 1.16                             |                 |
|                                         | WiFi 2.4 GHz    | 0.34                           | 0.37                             | DTS             |
| Body worn<br>(Separation Distance 15mm) | PCS 1900        | 0.87                           | 1.13                             | PCE             |
|                                         | UMTS FDD 2      | 0.94                           | 0.91                             |                 |
|                                         | UMTS FDD 4      | 1.00                           | 0.98                             |                 |
|                                         | LTE Band 2      | 0.79                           | 0.74                             |                 |
|                                         | LTE Band 4      | 1.20                           | 0.83                             |                 |
|                                         | LTE Band 30     | 1.13                           | 0.92                             |                 |

Note: The spot check results marked by blue are larger than the original result. So they replace the original result and others are shared.

### J.3 List of Main Instruments

**Table J.4.1: List of Main Instruments**

| No. | Name                  | Type          | Serial Number | Calibration Date         | Valid Period |
|-----|-----------------------|---------------|---------------|--------------------------|--------------|
| 01  | Network analyzer      | E5071C        | MY46110673    | January 24, 2019         | One year     |
| 02  | Power meter           | NRP2          | 106277        | September 4, 2019        | One year     |
| 03  | Power sensor          | NRP8S         | 104291        |                          |              |
| 04  | Signal Generator      | E4438C        | MY49070393    | January 4, 2019          | One Year     |
| 05  | Amplifier             | 60S1G4        | 0331848       | No Calibration Requested |              |
| 06  | BTS                   | E5515C        | MY50263375    | January 17, 2019         | One year     |
| 07  | BTS                   | CMW500        | 159890        | January 3, 2019          | One year     |
| 08  | E-field Probe         | SPEAG EX3DV4  | 3617          | January 31, 2019         | One year     |
| 09  | DAE                   | SPEAG DAE4    | 771           | January 11,2019          | One year     |
| 10  | Dipole Validation Kit | SPEAG D750V3  | 1017          | July 18, 2019            | One year     |
| 11  | Dipole Validation Kit | SPEAG D835V2  | 4d069         | July 18, 2019            | One year     |
| 12  | Dipole Validation Kit | SPEAG D1750V2 | 1003          | July 16, 2019            | One year     |
| 13  | Dipole Validation Kit | SPEAG D1900V2 | 5d101         | July 17, 2019            | One year     |
| 14  | Dipole Validation Kit | SPEAG D2300V2 | 1018          | July 17, 2019            | One year     |
| 15  | Dipole Validation Kit | SPEAG D2450V2 | 853           | July 17, 2019            | One year     |

## J.4 GRAPH RESULTS

### GSM850\_CH190 Left Cheek

Date: 12/29/2019

Electronics: DAE4 Sn771

Medium: head 835 MHz

Medium parameters used:  $f = 836.6$ ;  $\sigma = 0.903$  mho/m;  $\epsilon_r = 41.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: GSM850 836.6 Duty Cycle: 1: 8.3

Probe: EX3DV4 – SN3617 ConvF(9.75,9.75,9.75)

**Area Scan (71x121x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.235 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.63 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.253 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.156 W/kg**

Maximum value of SAR (measured) = 0.237 W/kg

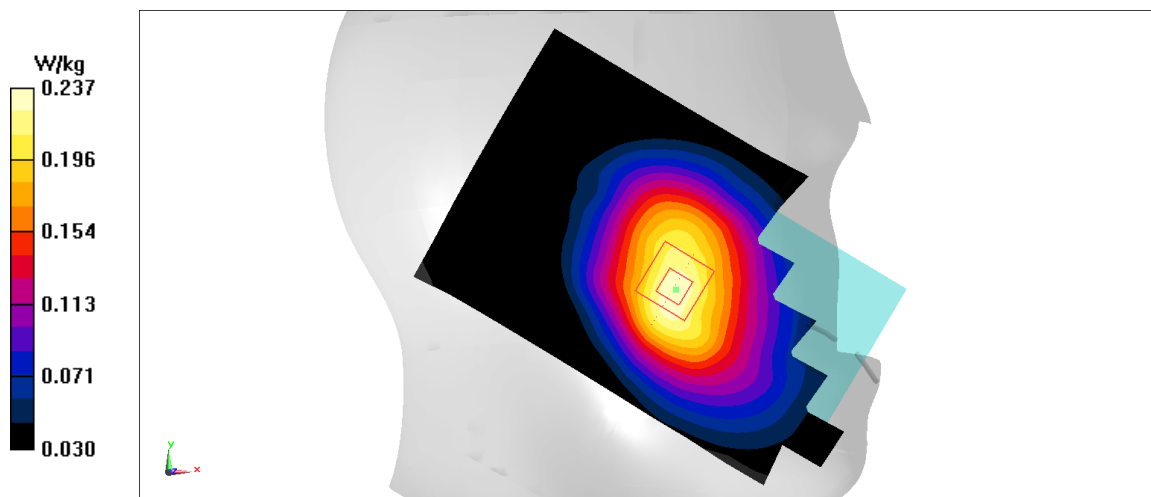


Fig A.1