



Dipole Verification Data> D1750V2, serial no. 1090

1750MHz – Head

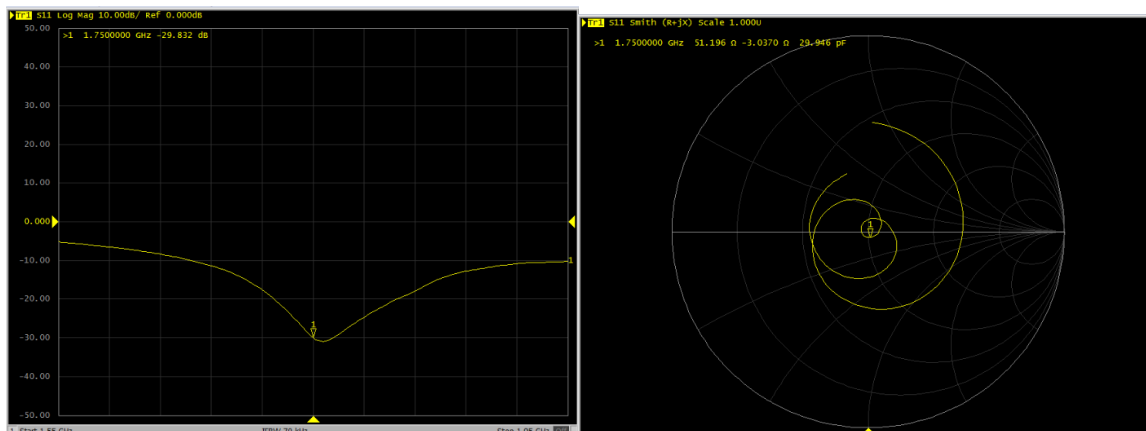

1750MHz – Body

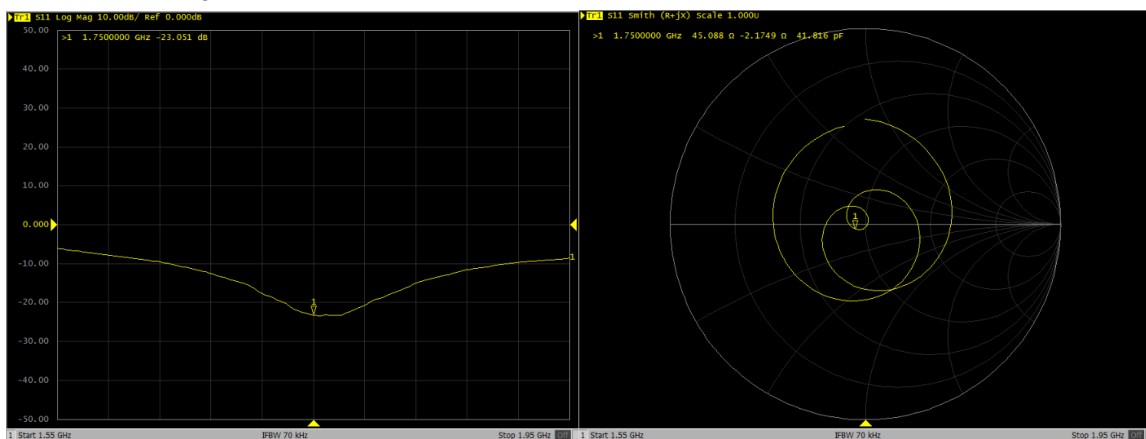



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Certificate No: **Z18-60536**

Client **Sporton**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d182**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **December 7, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRVD	102196	07-Mar-18 (CTTL, No.J18X01510)	Mar-19
Power sensor NRV-Z5	100596	07-Mar-18 (CTTL, No.J18X01510)	Mar-19
Reference Probe EX3DV4	SN 7514	27-Aug-18(SPEAG,No.EX3-7514_Aug18)	Aug-19
DAE4	SN 1555	20-Aug-18(SPEAG,No.DAE4-1555_Aug18)	Aug-19
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	23-Jan-18 (CTTL, No.J18X00560)	Jan-19
NetworkAnalyzer E5071C	MY46110673	24-Jan-18 (CTTL, No.J18X00561)	Jan-19

	Name	Function
Calibrated by:	Zhao Jing	SAR Test Engineer
Reviewed by:	Lin Hao	SAR Test Engineer
Approved by:	Qi Dianyuan	SAR Project Leader

Signature

Issued: December 10, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

lossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.2.1495
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.6 $\pm$ 6 %	1.44 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	39.6 mW / g $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.25 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	20.7 mW / g $\pm$ 18.7 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	51.8 $\pm$ 6 %	1.56 mho/m $\pm$ 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	39.9 mW / g $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.31 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.9 mW / g $\pm$ 18.7 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.1\Omega + 5.35j\Omega$
Return Loss	- 25.0dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$48.9\Omega + 6.19j\Omega$
Return Loss	- 24.0dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.067 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Date: 12.06.2018

DASY5 Validation Report for Head TSL

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d182

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 39.59$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.73, 7.73, 7.73) @ 1900 MHz; Calibrated: 8/27/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 8/20/2018
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 95.91 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.25 W/kg

Maximum value of SAR (measured) = 15.8 W/kg

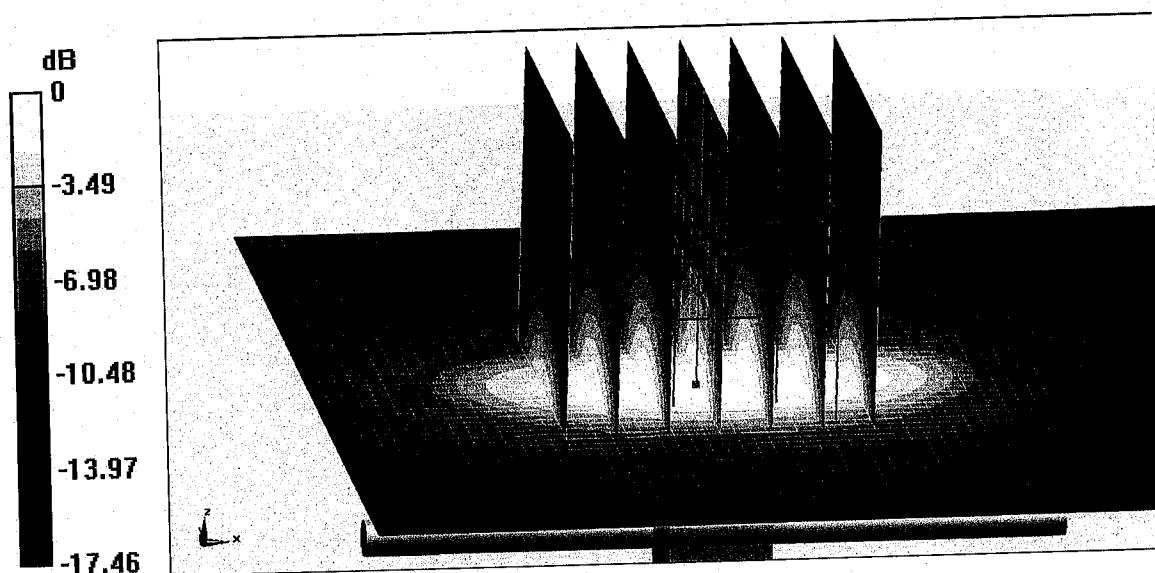


0 dB = 15.8 W/kg = 11.99 dBW/kg



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

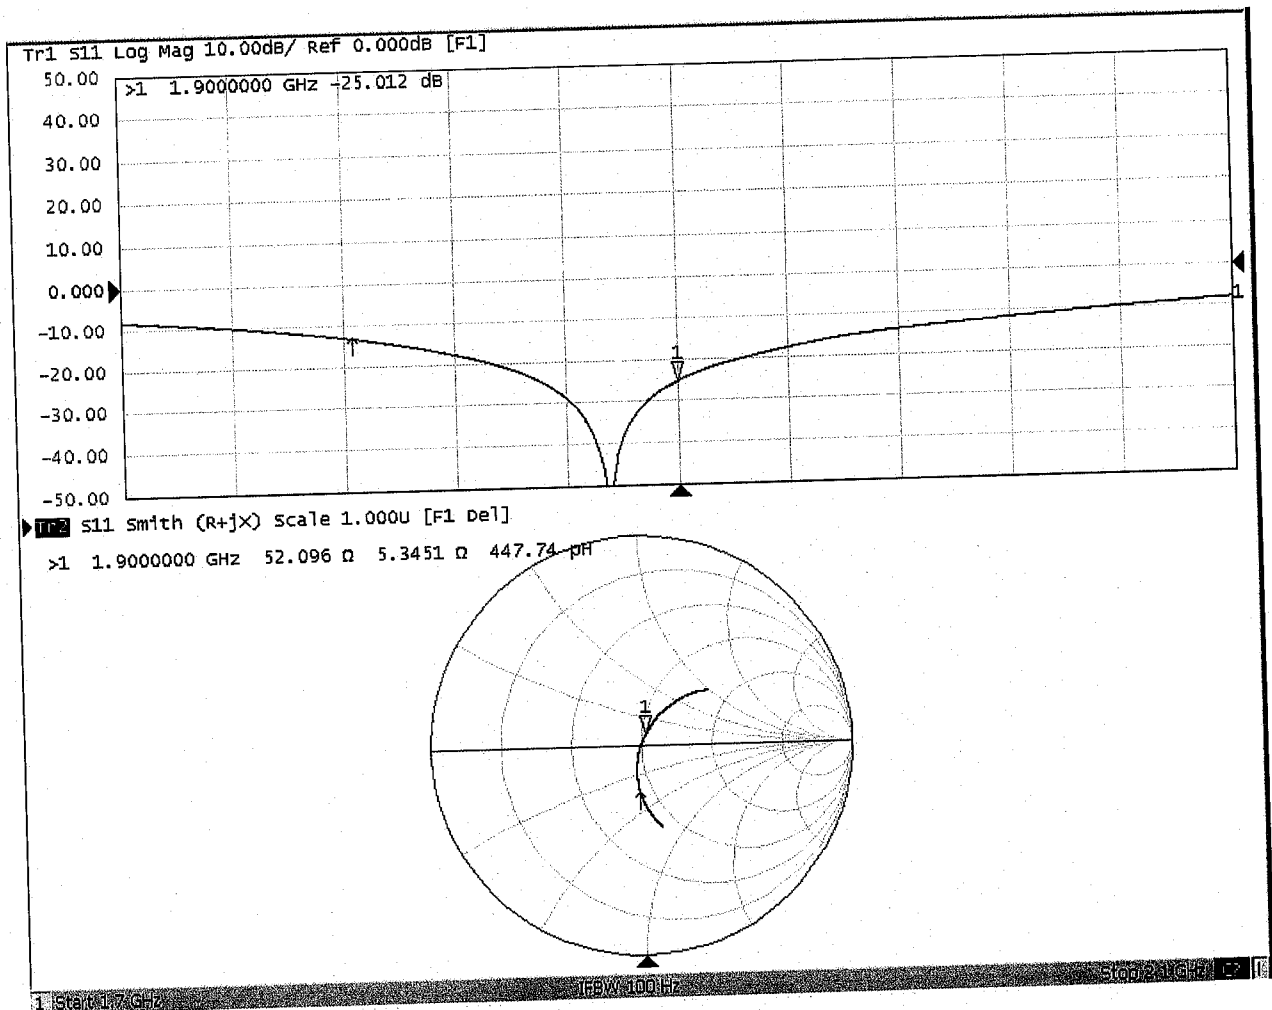



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Body TSL

Date: 12.05.2018

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d182

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.564$ S/m; $\epsilon_r = 51.82$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.53, 7.53, 7.53) @ 1900 MHz; Calibrated: 8/27/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 8/20/2018
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

System Performance Check/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84.07 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.31 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

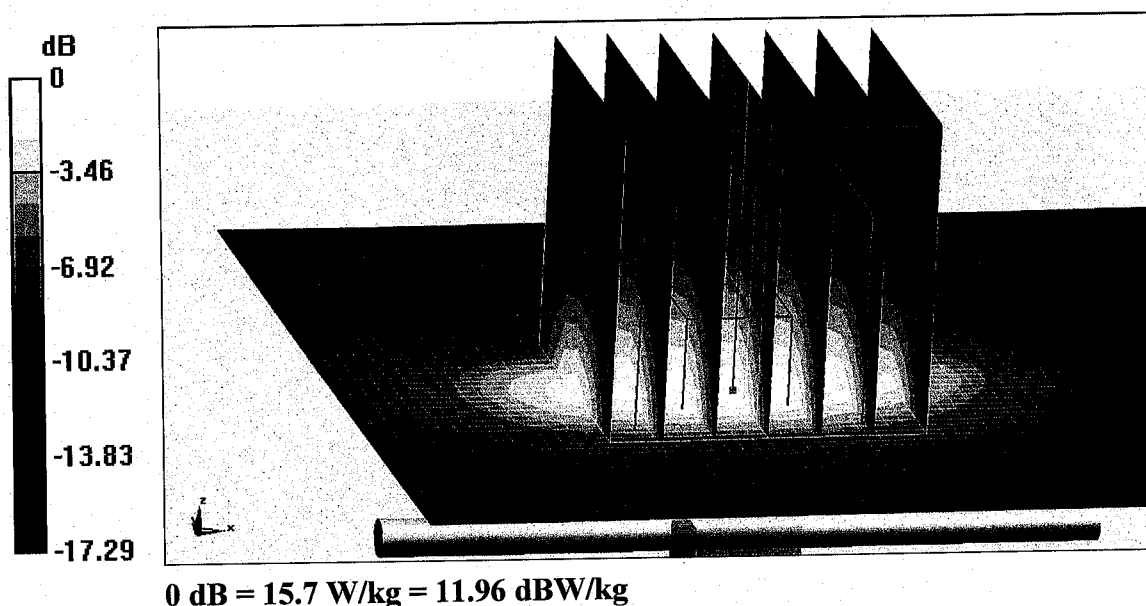




In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

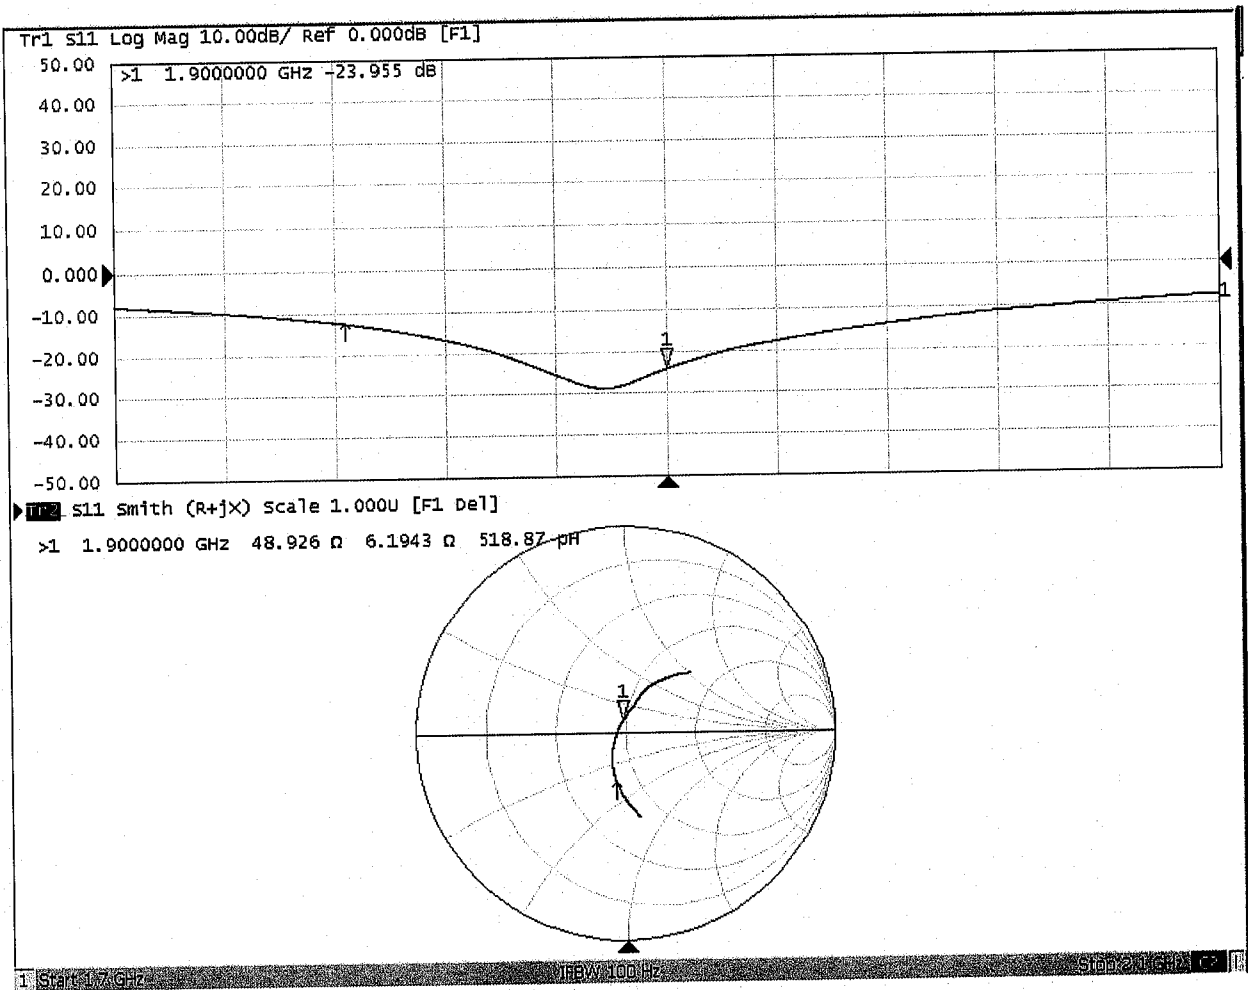

D1900V2, Serial No. 5d182 Extended Dipole Calibrations

Referring to KDB 865664 D01 v01r02, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


D1900V2 – serial no. 5d182												
	1900 Head						1900 Body					
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2018.12.7	-25		52.1		5.35		-24		48.9		6.19	
2019.11.25	-25.2	-0.8	53.9	1.8	5.15	-0.2	-24.2	-0.8	48.7	-0.2	5.93	-0.26

<Justification of the extended calibration>


The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data> D1900V2, serial no. 5d182

1900MHz - Head

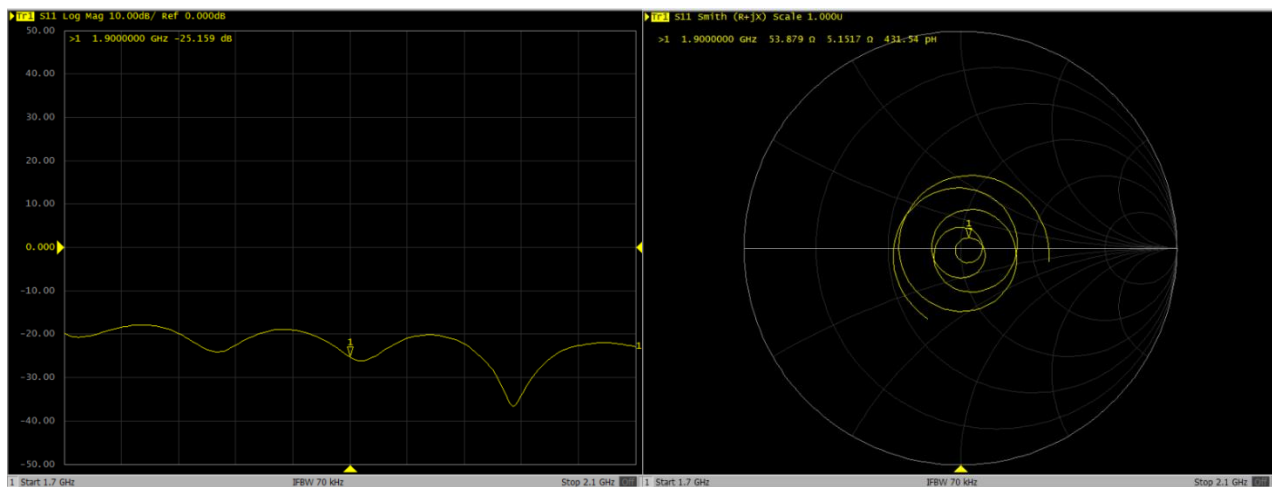

1900MHz - Body

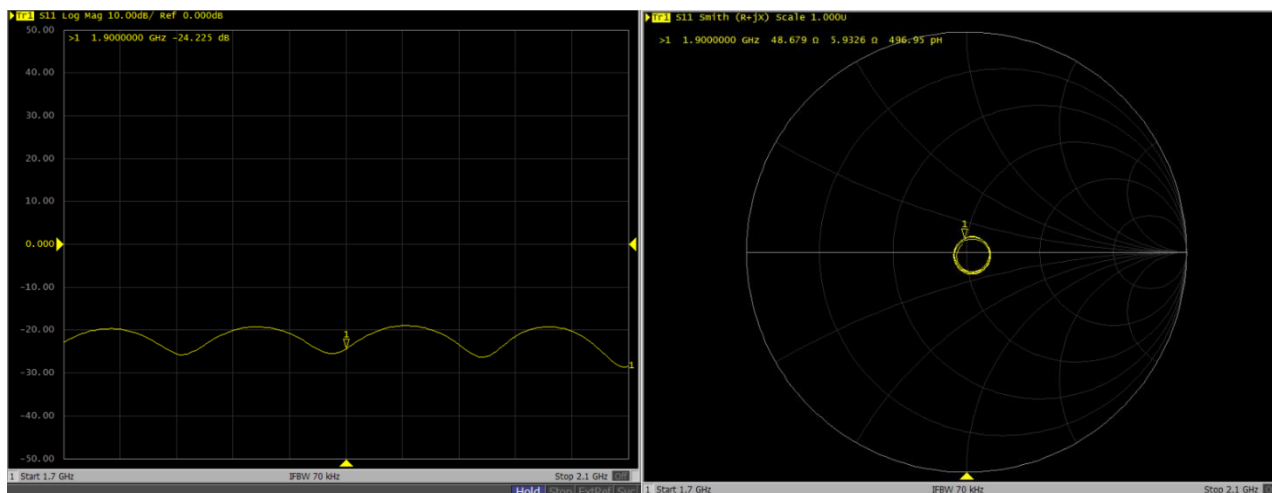



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **Sporton**

Certificate No: **Z18-60391**

CALIBRATION CERTIFICATE

Object **D2300V2 - SN: 1056**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **November 1, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22 ± 3) $^{\circ}\text{C}$ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRVD	102196	07-Mar-18 (CTTL, No.J18X01510)	Mar-19
Power sensor NRV-Z5	100596	07-Mar-18 (CTTL, No.J18X01510)	Mar-19
Reference Probe EX3DV4	SN 7514	27-Aug-18(SPEAG,No.EX3-7514_Aug18)	Aug-19
DAE4	SN 1555	20-Aug-18(SPEAG,No.DAE4-1555_Aug18)	Aug-19
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	23-Jan-18 (CTTL, No.J18X00560)	Jan-19
NetworkAnalyzer E5071C	MY46110673	24-Jan-18 (CTTL, No.J18X00561)	Jan-19

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: November 5, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

s _ p _ e _ a _ g**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.2.1495
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2300 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.4 $\pm$ 6 %	1.70 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	12.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	49.9 mW / g $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.97 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.8 mW / g $\pm$ 18.7 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.9	1.81 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.0 $\pm$ 6 %	1.86 mho/m $\pm$ 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	48.1 mW / g $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.82 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	23.1 mW / g $\pm$ 18.7 % (k=2)



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	46.5Ω- 3.86jΩ
Return Loss	- 25.3dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	43.9Ω- 2.30jΩ
Return Loss	- 23.1dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 11.01.2018

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1056

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.7$ S/m; $\epsilon_r = 39.42$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.42, 7.42, 7.42) @ 2300 MHz; Calibrated: 8/27/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 8/20/2018
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.4 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 26.1 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.97 W/kg

Maximum value of SAR (measured) = 21.0 W/kg

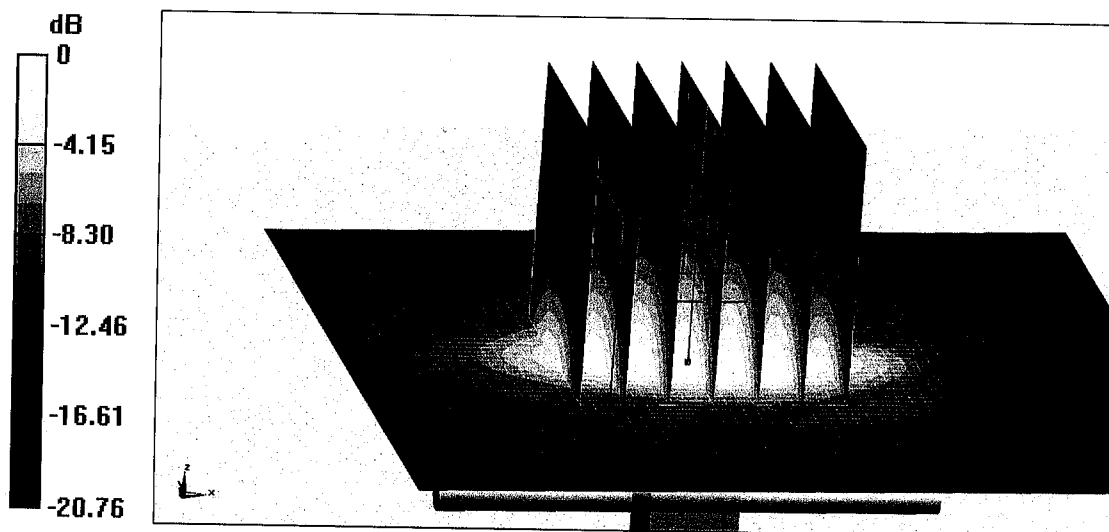


0 dB = 21.0 W/kg = 13.22 dBW/kg



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

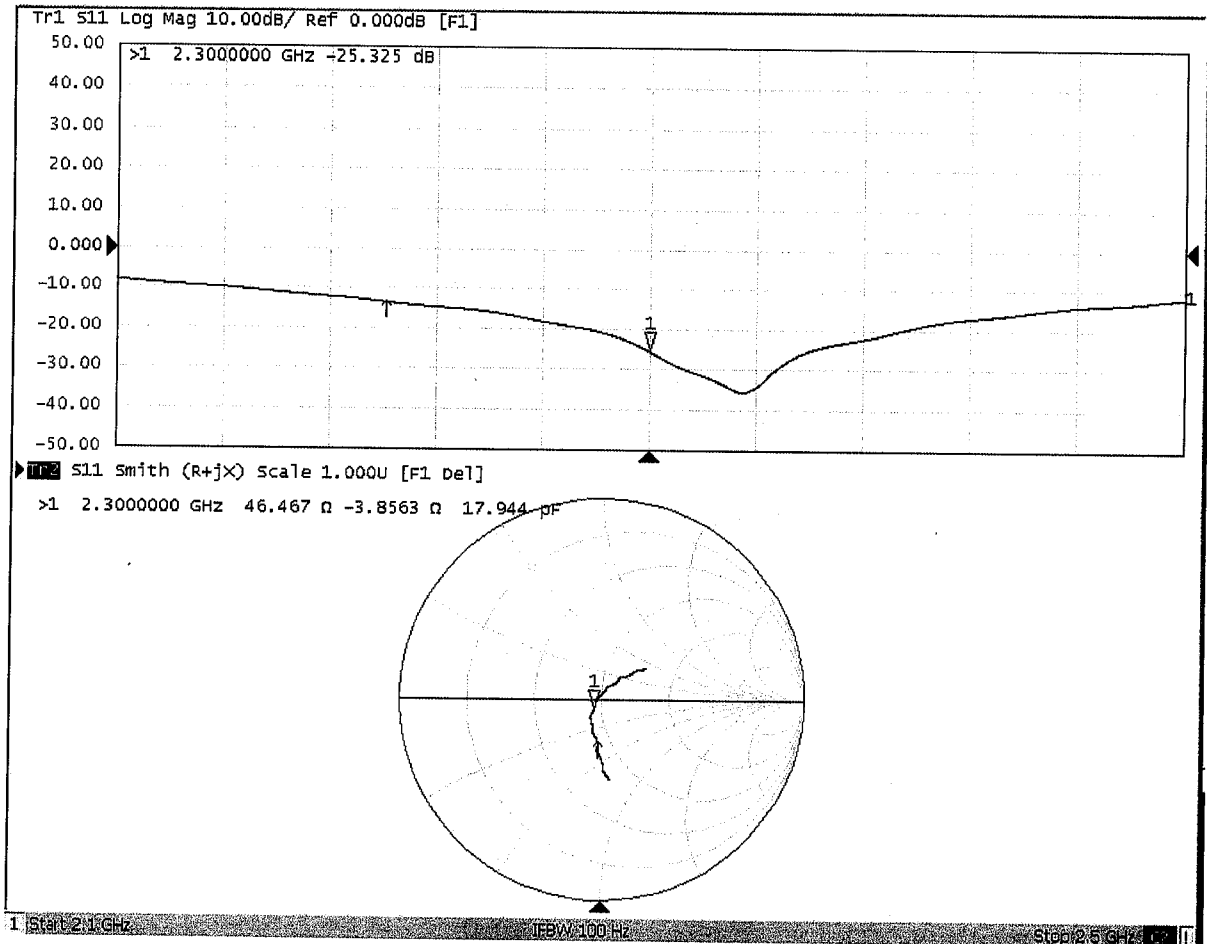



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Body TSL

Date: 11.01.2018

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2300 MHz; Type: D2300V2; Serial: D2300V2 - SN: 1056

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 52.96$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7514; ConvF(7.25, 7.25, 7.25) @ 2300 MHz; Calibrated: 8/27/2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1555; Calibrated: 8/20/2018
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.95 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 24.5 W/kg

SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.82 W/kg

Maximum value of SAR (measured) = 20.0 W/kg

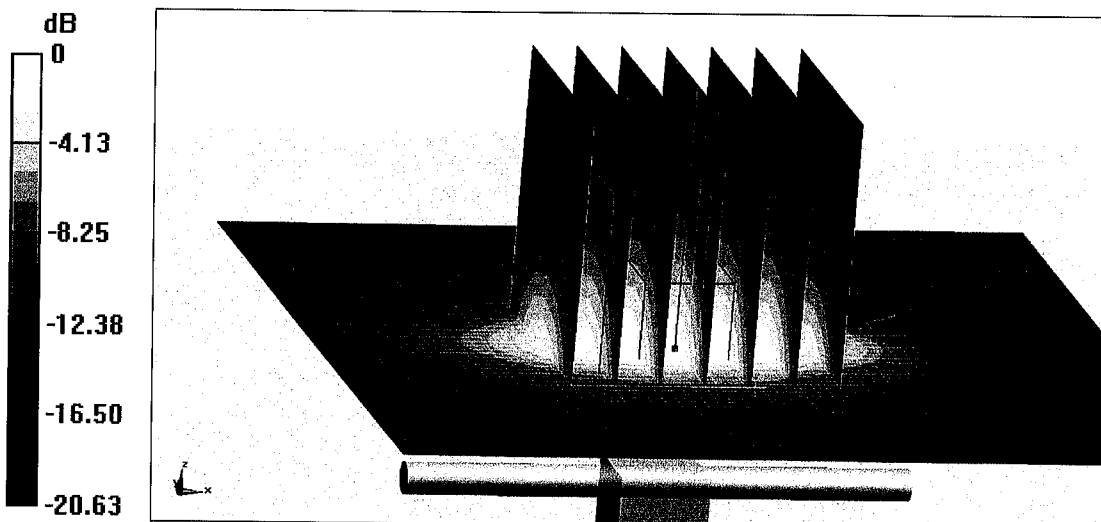


0 dB = 20.0 W/kg = 13.01 dBW/kg



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

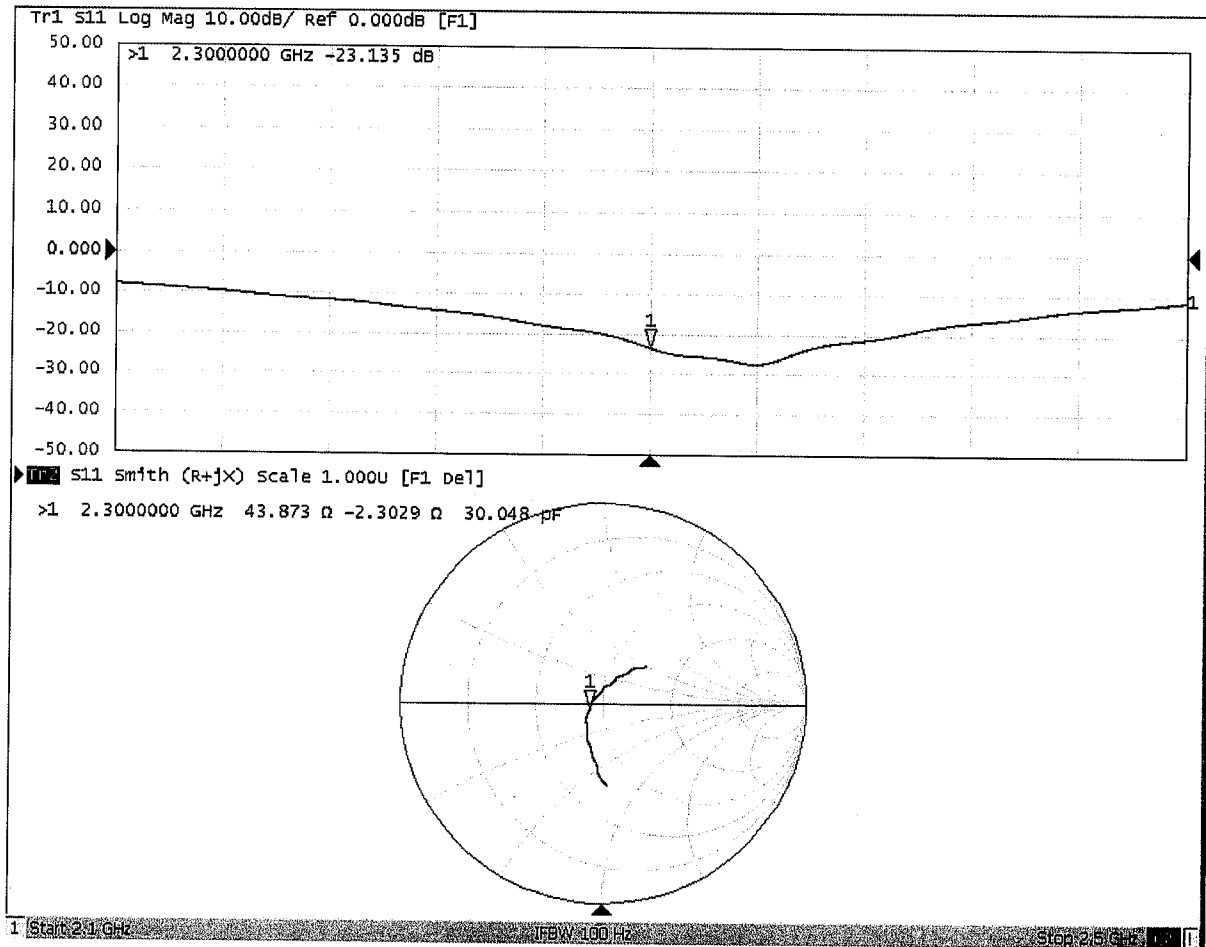



D2300V2, Serial No. 1056 Extended Dipole Calibrations

Referring to KDB 865664 D01 v01r02, if dipoles are verified in return loss ($< -20\text{dB}$, within 20% of prior calibration), and in impedance (within 5 ohm of prior calibration), the annual calibration is not necessary and the calibration interval can be extended.


D2300V2 – serial no. 1056												
	2300 Head						2300 Body					
Date of Measurement	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)	Return-Loss (dB)	Delta (%)	Real Impedance (ohm)	Delta (ohm)	Imaginary Impedance (ohm)	Delta (ohm)
2018.11.01	-25.3		46.5		-3.86		-23.1		43.9		-2.30	
2019.11.01	-24.4	3.6	45.9	-0.6	-4.08	-0.22	-22.4	3	43.3	-0.6	-2.30	0

<Justification of the extended calibration>


The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data> D2300V2, serial no. 1056

2300MHz - Head

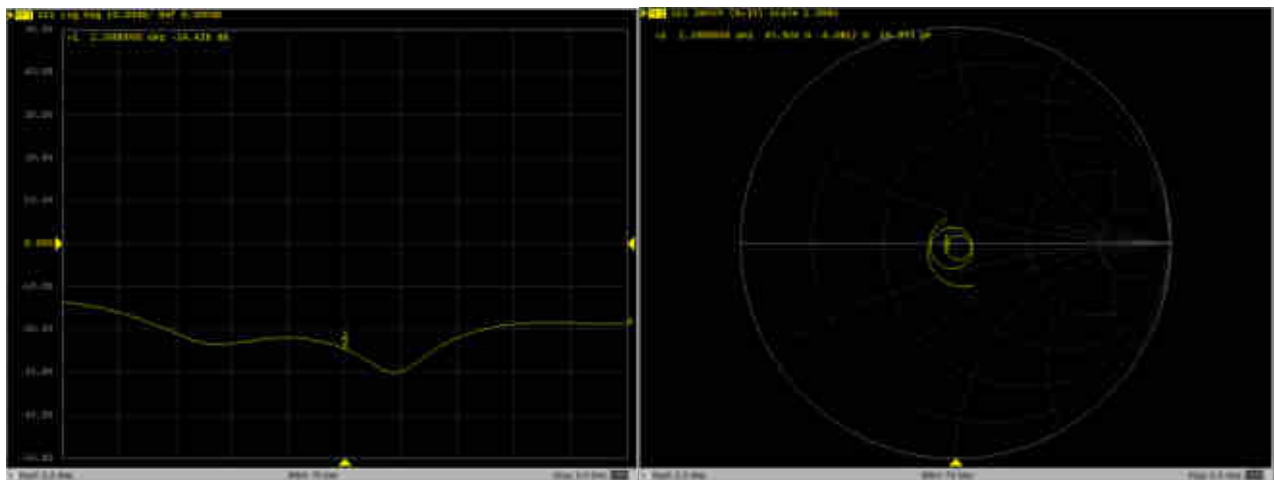

2300MHz – Body

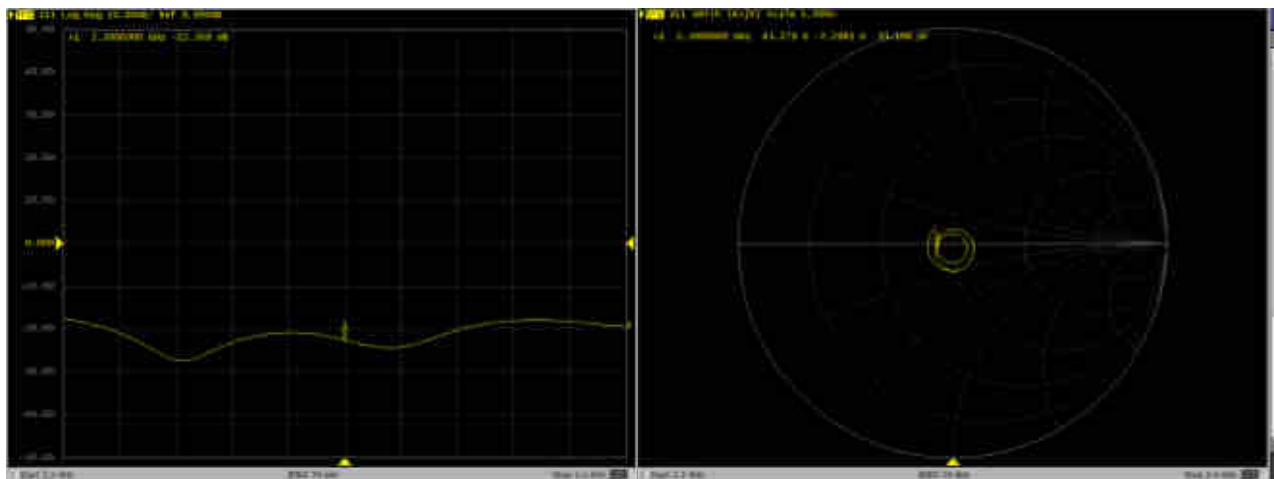



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

Sporton

Certificate No: **Z19-60134**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN: 924**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **April 15, 2019**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22 ± 3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	20-Aug-18 (CTTL, No.J18X06862)	Aug-19
Power sensor NRP8S	104291	20-Aug-18 (CTTL, No.J18X06862)	Aug-19
Reference Probe EX3DV4	SN 3617	31-Jan-19(SPEAG,No.EX3-3617_Jan19)	Jan-20
DAE4	SN 1331	06-Feb-19(SPEAG,No.DAE4-1331_Feb19)	Feb-20
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	23-Jan-19 (CTTL, No.J19X00336)	Jan-20
NetworkAnalyzer E5071C	MY46110673	24-Jan-19 (CTTL, No.J19X00547)	Jan-20

	Name	Function
Calibrated by:	Zhao Jing	SAR Test Engineer
Reviewed by:	Lin Hao	SAR Test Engineer
Approved by:	Qi Dianyuan	SAR Project Leader

Signature

Issued: April 20, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

s p e a g**CALIBRATION LABORATORY**

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2079

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.2.1495
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.4 $\pm$ 6 %	1.85 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.1 W/kg $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.99 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg $\pm$ 18.7 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.3 $\pm$ 6 %	2.01 mho/m $\pm$ 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.1 W/kg $\pm$ 18.8 % (k=2)
SAR averaged over 10 cm³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	5.83 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.3 W/kg $\pm$ 18.7 % (k=2)



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.9Ω+ 2.68 jΩ
Return Loss	- 29.9dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.8Ω+ 4.17 jΩ
Return Loss	- 27.2dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.019 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 04.15.2019

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 924

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 40.35$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.62, 7.62, 7.62) @ 2450 MHz; Calibrated: 1/31/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2/6/2019
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 86.73 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 28.0 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 5.99 W/kg

Maximum value of SAR (measured) = 22.2 W/kg

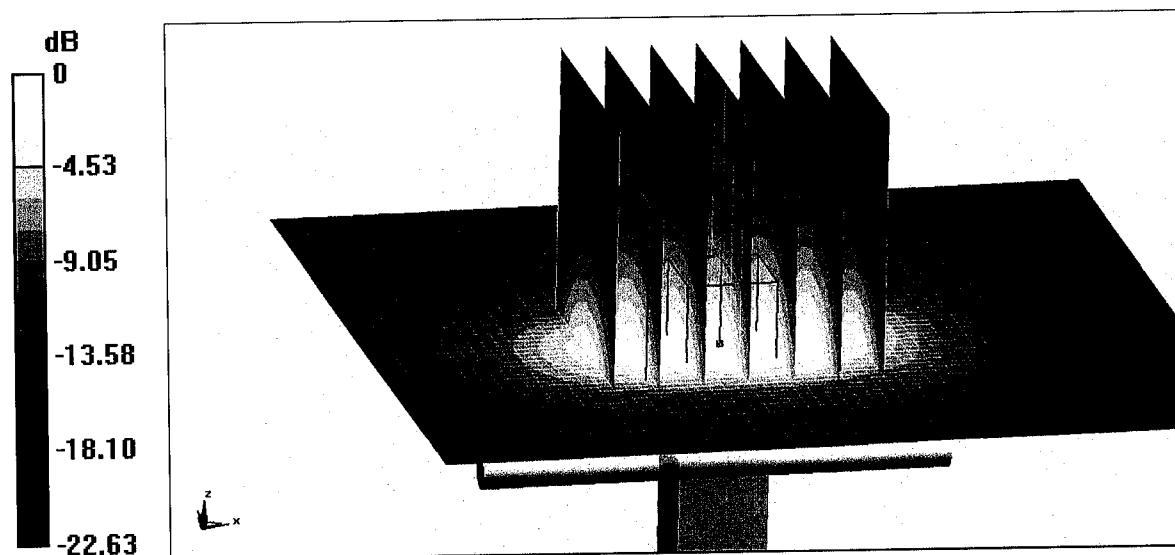

0 dB = 22.2 W/kg = 13.46 dBW/kg




In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

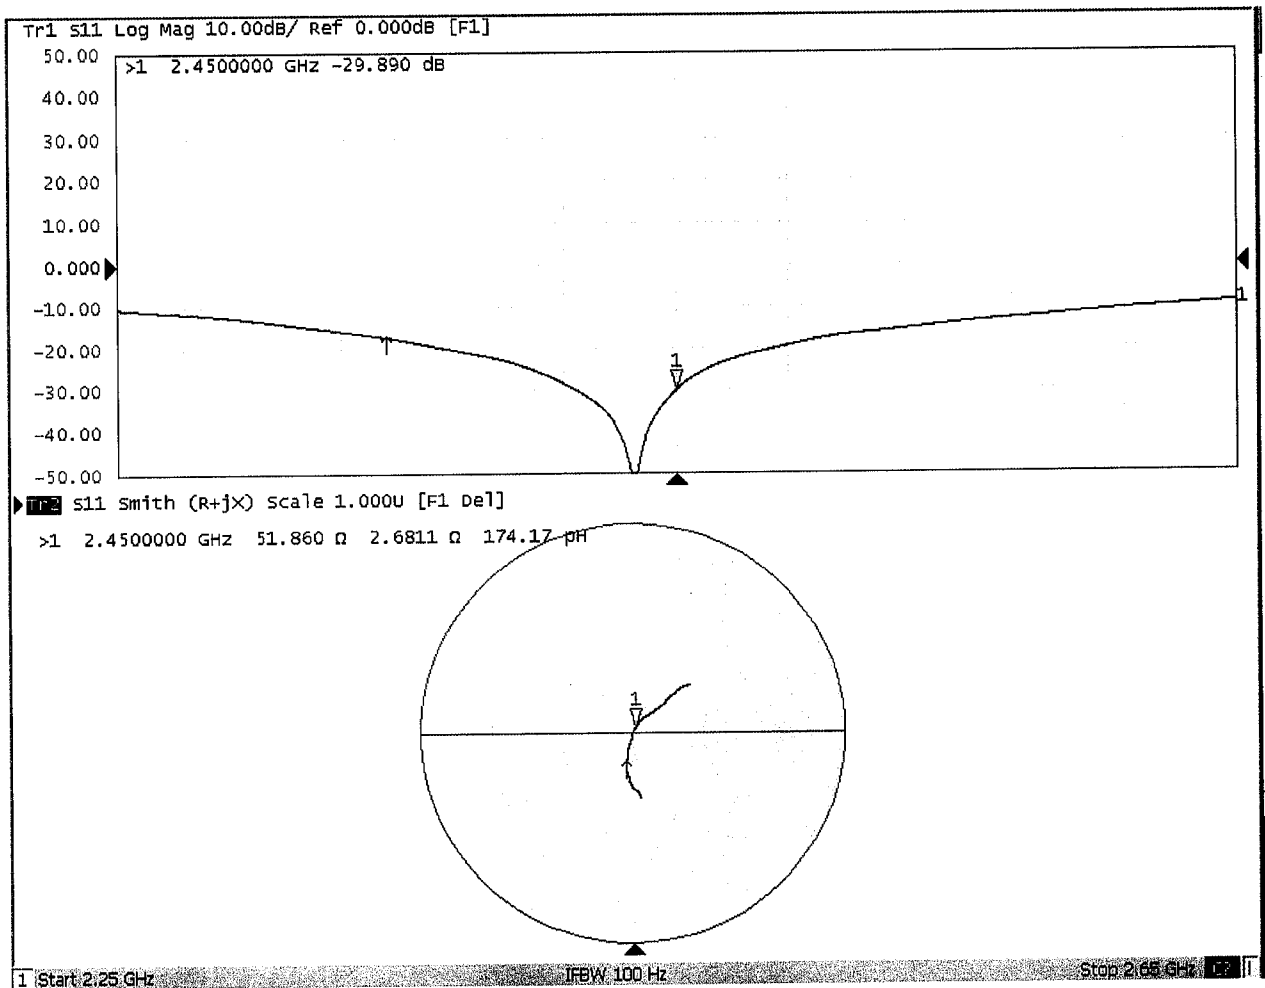



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Body TSL

Date: 04.15.2019

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 924

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.005$ S/m; $\epsilon_r = 54.25$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(7.79, 7.79, 7.79) @ 2450 MHz; Calibrated: 1/31/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2/6/2019
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.46 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 26.3 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.83 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

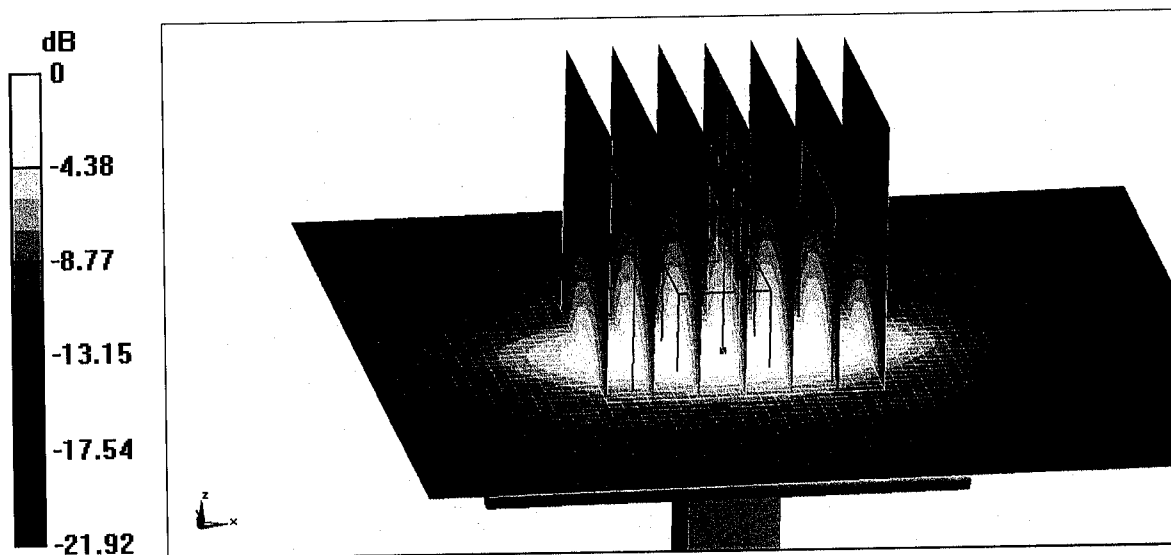


0 dB = 20.9 W/kg = 13.20 dBW/kg



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

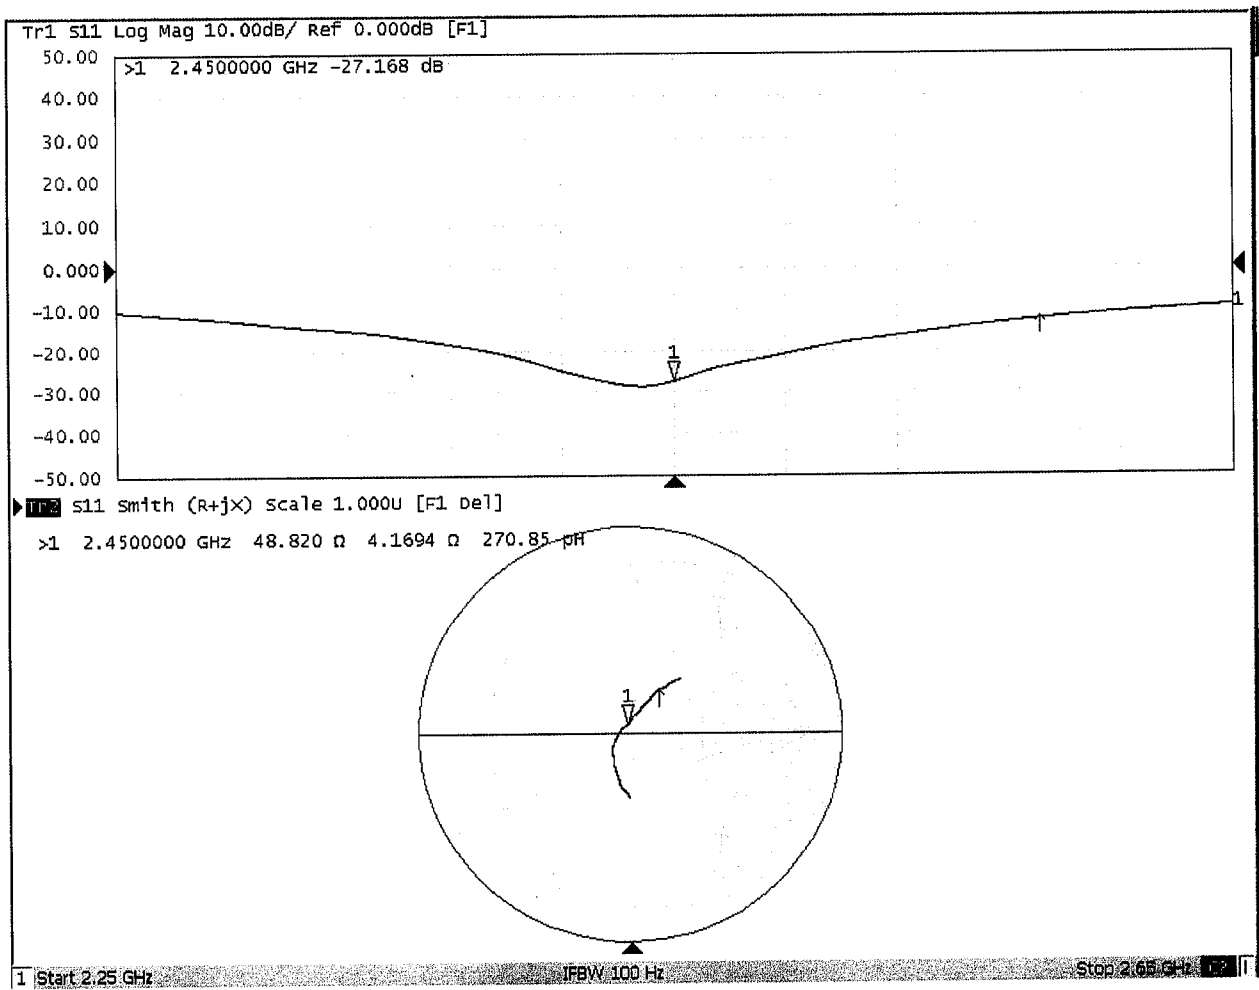



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client

Sporton

Certificate No: **Z18-60259**

CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN: 1167**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **August 03, 2018**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	102083	01-Nov-17 (CTTL, No.J17X08756)	Oct-18
Power sensor NRP-Z91	100542	01-Nov-17 (CTTL, No.J17X08756)	Oct-18
ReferenceProbe EX3DV4	SN 7464	12-Sep-17(SPEAG,No.EX3-7464_Sep17)	Sep-18
DAE4	SN 1524	13-Sep-17(SPEAG,No.DAE4-1524_Sep17)	Sep-18
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	23-Jan-18 (CTTL, No.J18X00560)	Jan-19
NetworkAnalyzerE5071C	MY46110673	24-Jan-18 (CTTL, No.J18X00561)	Jan-19

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: August 6, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.1.1476
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5250 MHz $\pm$ 1 MHz 5600 MHz $\pm$ 1 MHz 5750 MHz $\pm$ 1 MHz	

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.71 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	35.9 $\pm$ 6 %	4.82 mho/m $\pm$ 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5250 MHz

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.69 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	77.0 mW / g $\pm$ 24.4 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.20 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	22.0 mW / g $\pm$ 24.2 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.1 ± 6 %	5.18 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.09 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	80.8 mW / g ± 24.4 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.32 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	23.2 mW / g ± 24.2 % (k=2)

Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.4	5.22 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.9 ± 6 %	5.37 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	76.9 mW / g ± 24.4 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.17 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.6 mW / g ± 24.2 % (k=2)



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.36 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.4 ± 6 %	5.32 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL at 5250 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.46 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	74.4 mW /g ± 24.4 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	100 mW input power	2.10 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.9 mW /g ± 24.2 % (k=2)

Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.7 ± 6 %	5.79 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.73 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	77.1 mW /g ± 24.4 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	100 mW input power	2.16 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.5 mW /g ± 24.2 % (k=2)



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.3	5.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.5 ± 6 %	5.93 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL at 5750 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.43 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	74.3 mW /g ± 24.4 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	100 mW input power	2.08 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.8 mW /g ± 24.2 % (k=2)



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL at 5250 MHz

Impedance, transformed to feed point	50.3 Ω - 9.42j Ω
Return Loss	- 20.6dB

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	58.1 Ω - 7.15j Ω
Return Loss	- 20.0dB

Antenna Parameters with Head TSL at 5750 MHz

Impedance, transformed to feed point	53.5 Ω - 7.66j Ω
Return Loss	- 21.8dB

Antenna Parameters with Body TSL at 5250 MHz

Impedance, transformed to feed point	49.5 Ω - 7.40j Ω
Return Loss	- 22.6dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	58.0 Ω - 6.37j Ω
Return Loss	- 20.5dB

Antenna Parameters with Body TSL at 5750 MHz

Impedance, transformed to feed point	54.5 Ω - 7.07j Ω
Return Loss	- 21.9dB



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

General Antenna Parameters and Design

Electrical Delay (one direction)	1.065 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 07.27.2018

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1167

Communication System: CW; Frequency: 5250 MHz, Frequency: 5600 MHz,
Frequency: 5750 MHz,

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.822$ S/m; $\epsilon_r = 35.92$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.184$ S/m; $\epsilon_r = 35.14$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5750$ MHz; $\sigma = 5.365$ S/m; $\epsilon_r = 34.88$; $\rho = 1000$ kg/m³,

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(5.68, 5.68, 5.68) @ 5250 MHz; Calibrated: 9/12/2017, ConvF(4.98, 4.98, 4.98) @ 5600 MHz; Calibrated: 9/12/2017, ConvF(5.04, 5.04, 5.04) @ 5750 MHz; Calibrated: 9/12/2017,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1524; Calibrated: 9/13/2017
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Dipole Calibration /Pin=100mW, d=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 65.09 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 32.4 W/kg
SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.2 W/kg
Maximum value of SAR (measured) = 18.0 W/kg


Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.53 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 36.2 W/kg
SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.32 W/kg
Maximum value of SAR (measured) = 19.7 W/kg

Dipole Calibration /Pin=100mW, d=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.79 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 36.2 W/kg
SAR(1 g) = 7.7 W/kg; SAR(10 g) = 2.17 W/kg
Maximum value of SAR (measured) = 19.0 W/kg



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

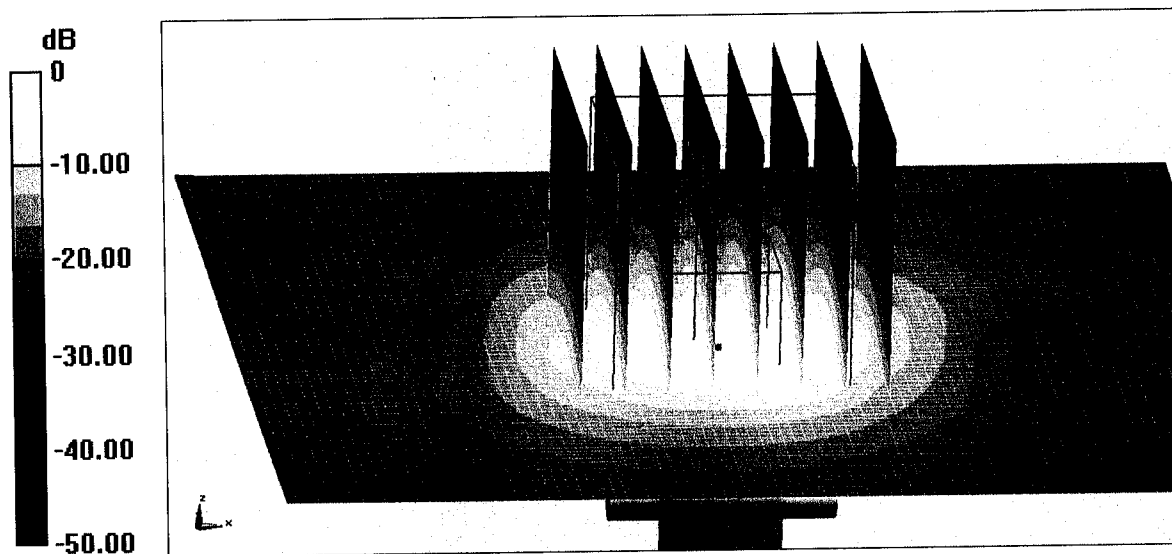


0 dB = 19.0 W/kg = 12.79 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn


Impedance Measurement Plot for Head TSL

Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [F1]

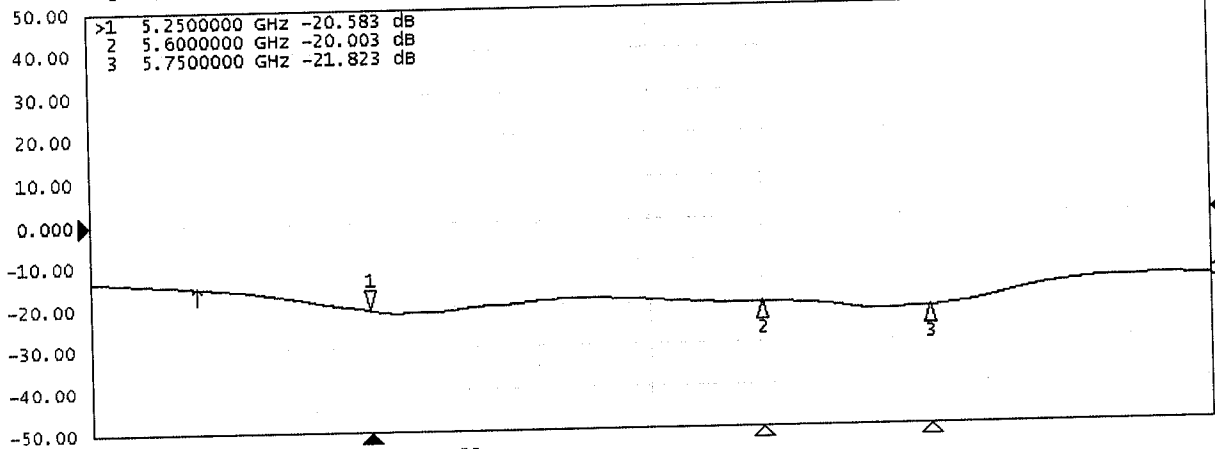

Tr2 S11 Smith (R+jX) scale 1.000U [F1 Del]

>1	5.250000 GHz	50.314 Ω	-9.4158 Ω	3.2196 pF
2	5.600000 GHz	58.136 Ω	-7.1538 Ω	3.9728 pF
3	5.750000 GHz	53.485 Ω	-7.6562 Ω	3.6153 pF

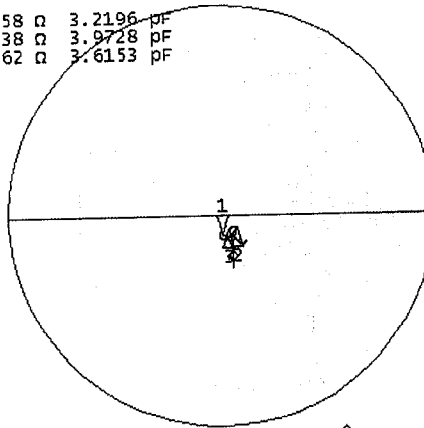



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Date: 08.02.2018

DASY5 Validation Report for Body TSL

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1167

Communication System: CW; Frequency: 5250 MHz, Frequency: 5600 MHz,
Frequency: 5750 MHz,

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.316$ S/m; $\epsilon_r = 48.42$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5600$ MHz; $\sigma = 5.789$ S/m; $\epsilon_r = 47.7$; $\rho = 1000$ kg/m³, Medium parameters used: $f = 5750$ MHz; $\sigma = 5.926$ S/m; $\epsilon_r = 48.45$; $\rho = 1000$ kg/m³,

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(5.29, 5.29, 5.29) @ 5250 MHz; Calibrated: 9/12/2017, ConvF(4.5, 4.5, 4.5) @ 5600 MHz; Calibrated: 9/12/2017, ConvF(4.59, 4.59, 4.59) @ 5750 MHz; Calibrated: 9/12/2017,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1524; Calibrated: 9/13/2017
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Dipole Calibration /Pin=100mW, d=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.14 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 31.9 W/kg
SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.1 W/kg
Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 62.32 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 36.3 W/kg
SAR(1 g) = 7.73 W/kg; SAR(10 g) = 2.16 W/kg
Maximum value of SAR (measured) = 19.1 W/kg


Dipole Calibration /Pin=100mW, d=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 63.99 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 35.2 W/kg
SAR(1 g) = 7.43 W/kg; SAR(10 g) = 2.08 W/kg
Maximum value of SAR (measured) = 18.0 W/kg



In Collaboration with

s p e a k
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>

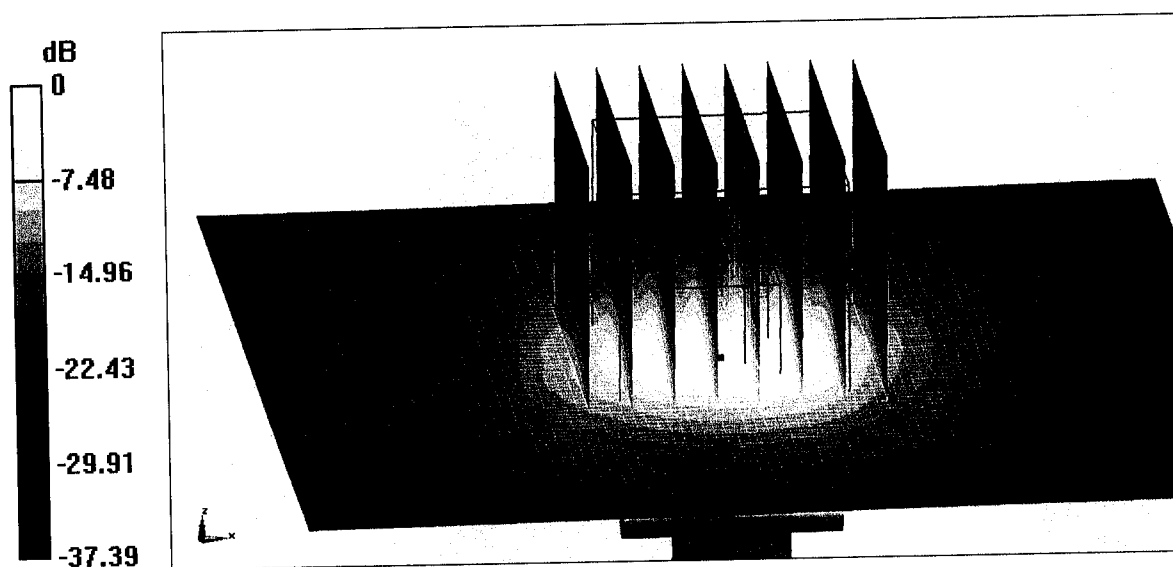

0 dB = 18.0 W/kg = 12.55 dBW/kg



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China


Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: cttl@chinattl.com

http://www.chinattl.cn

Impedance Measurement Plot for Body TSL

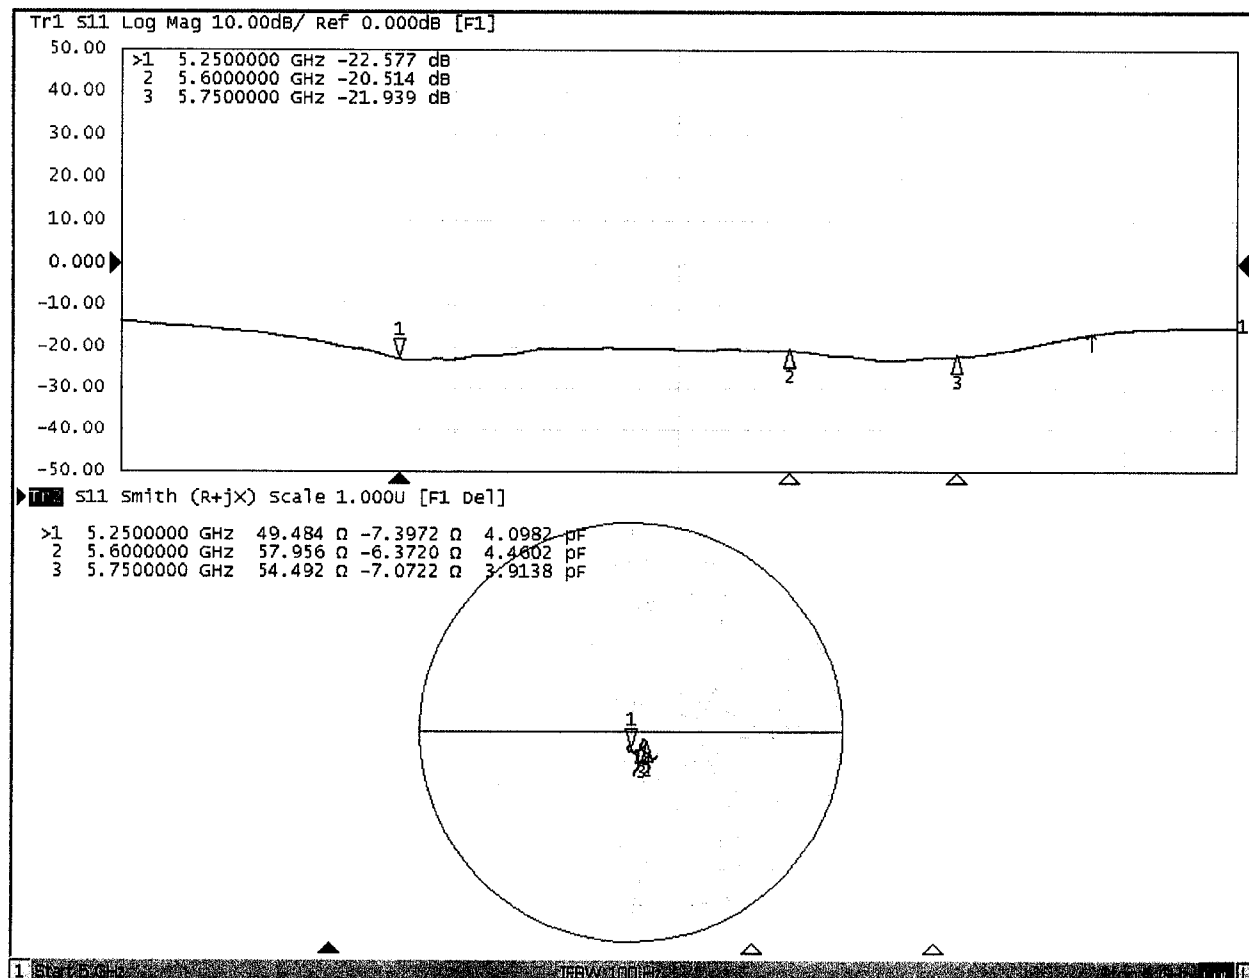


D5GHzV3, Serial No. 1167 Extended Dipole Calibrations

<Justification of the extended calibration>


The return loss is $< -20\text{dB}$, within 20% of prior calibration; the impedance is within 5 ohm of prior calibration. Therefore the verification result should support extended calibration.

Dipole Verification Data> D5GHzV3, serial no. 1167


5250MHz - Head

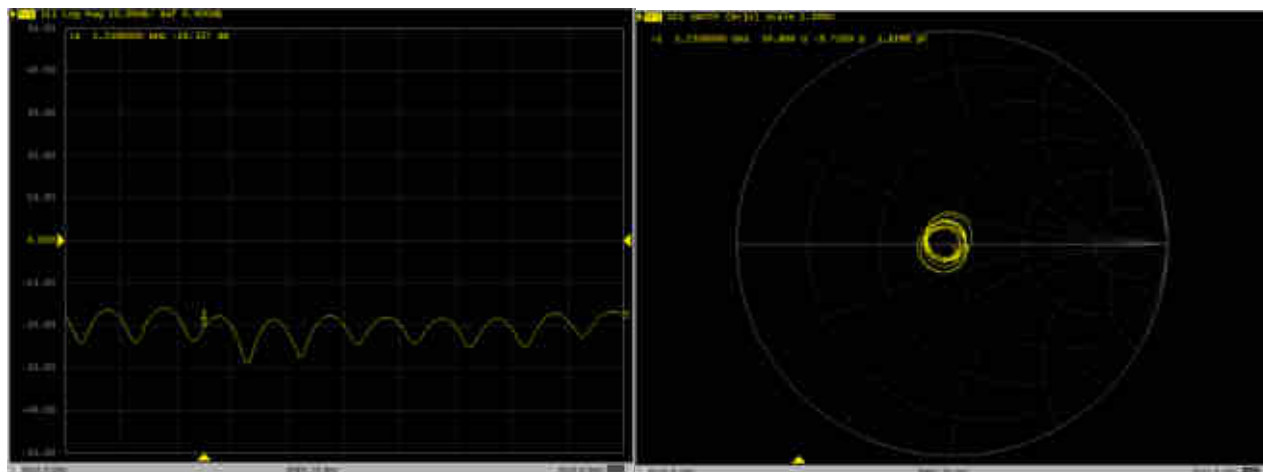


5250MHz – Body

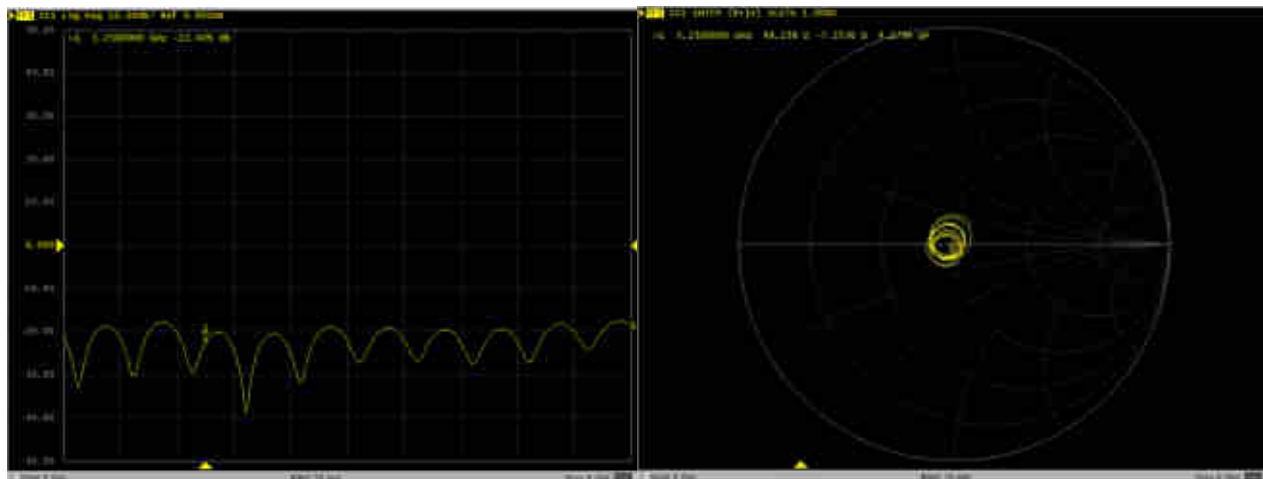


5600MHz – Head

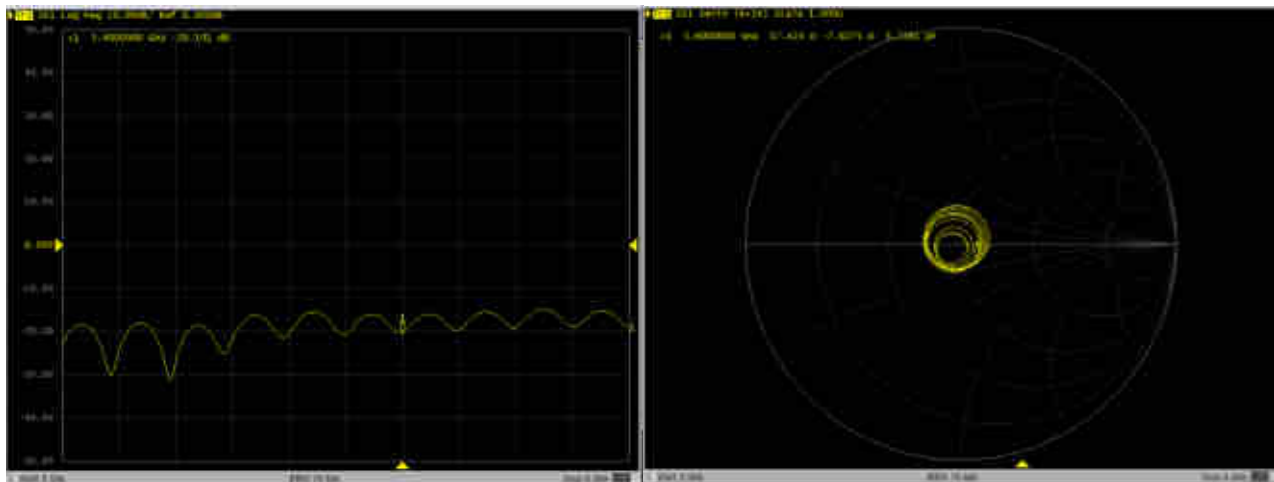


5600MHz – Body

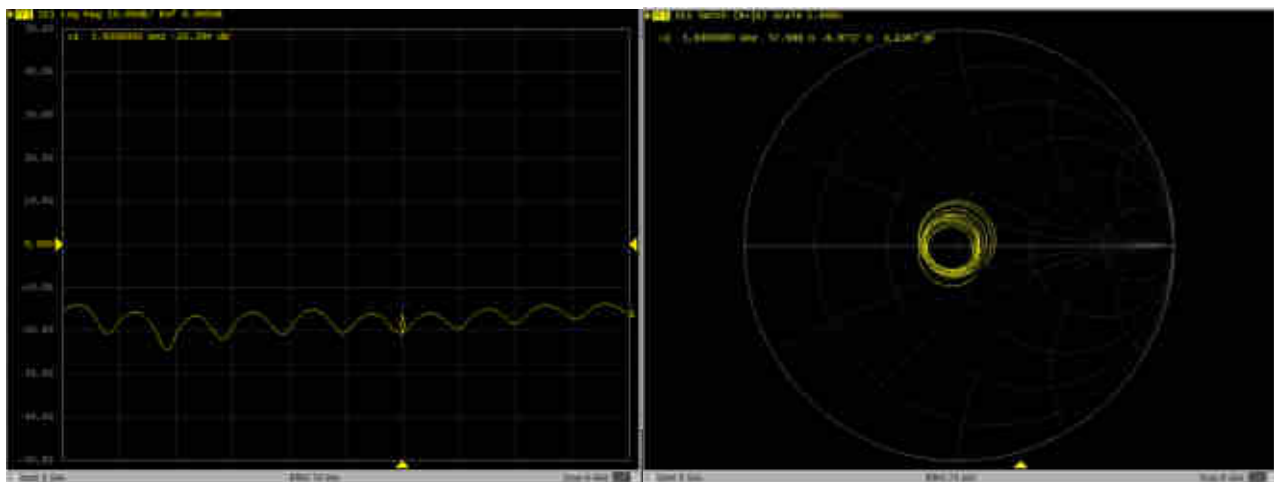

5750MHz – Head

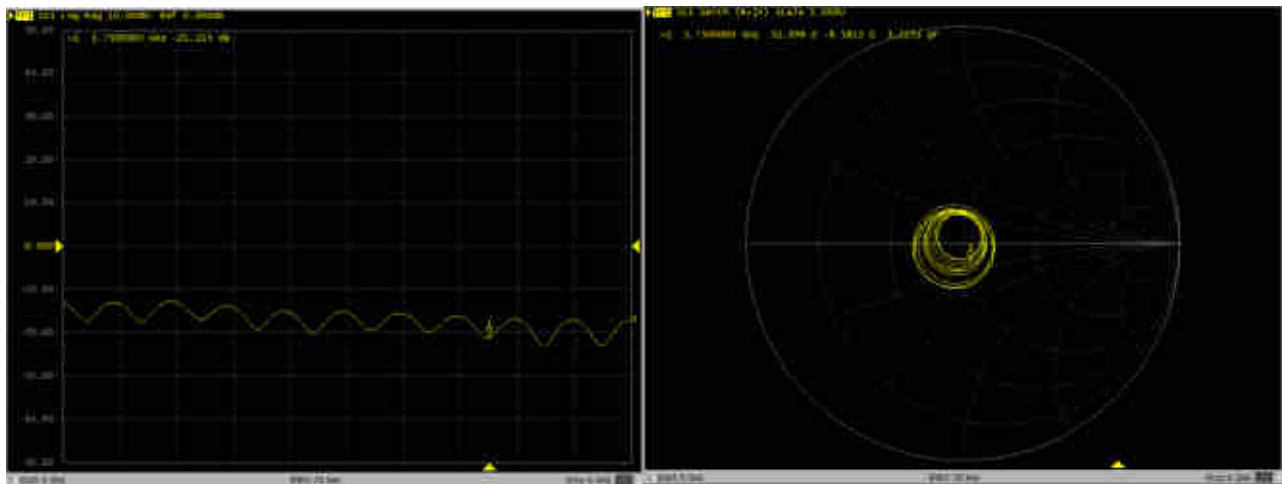

5750MHz – Body

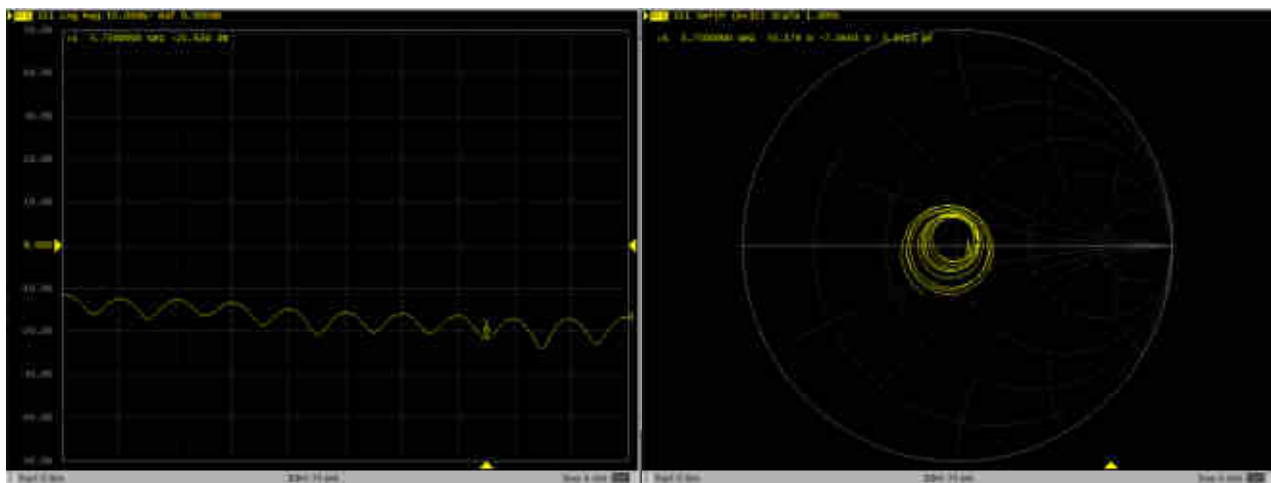



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Client : **Sporton**

Certificate No: **Z19-60307**

CALIBRATION CERTIFICATE

Object **DAE4 - SN: 1386**

Calibration Procedure(s) **FF-Z11-002-01**
Calibration Procedure for the Data Acquisition Electronics (DAEx)

Calibration date: **September 09, 2019**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22 ± 3) $^{\circ}\text{C}$ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	24-Jun-19 (CTTL, No.J19X05126)	Jun-20

	Name	Function
Calibrated by:	Yu Zongying	SAR Test Engineer
Reviewed by:	Lin Hao	SAR Test Engineer
Approved by:	Qi Dianyuan	SAR Project Leader

Signature

Issued: September 10, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: ctl@chinattl.com

[Http://www.chinattl.cn](http://www.chinattl.cn)

Glossary:

DAE

data acquisition electronics

Connector angle

information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.550 $\pm$ 0.15% (k=2)	404.640 $\pm$ 0.15% (k=2)	404.159 $\pm$ 0.15% (k=2)
Low Range	4.02000 $\pm$ 0.7% (k=2)	4.01341 $\pm$ 0.7% (k=2)	4.01171 $\pm$ 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	203.5° $\pm$ 1 °
---	------------------



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Client

Auden

Certificate No: **Z19-60180**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3753**

Calibration Procedure(s) **FF-Z11-004-01**
Calibration Procedures for Dosimetric E-field Probes

Calibration date: **June 19, 2019**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	20-Jun-18 (CTTL, No.J18X05032)	Jun-19
Power sensor NRP-Z91	101547	20-Jun-18 (CTTL, No.J18X05032)	Jun-19
Power sensor NRP-Z91	101548	20-Jun-18 (CTTL, No.J18X05032)	Jun-19
Reference10dBAttenuator	18N50W-10dB	09-Feb-18(CTTL, No.J18X01133)	Feb-20
Reference20dBAttenuator	18N50W-20dB	09-Feb-18(CTTL, No.J18X01132)	Feb-20
Reference Probe EX3DV4	SN 3617	31-Jan-19(SPEAG,No.EX3-3617_Jan19)	Jan-20
DAE4	SN 1331	06-Feb-19(SPEAG, No.DAE4-1331_Feb19)	Feb -20
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	21-Jun-18 (CTTL, No.J18X05033)	Jun-19
Network Analyzer E5071C	MY46110673	24-Jan-19 (CTTL, No.J19X00547)	Jan -20

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: June 20, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: ctl@chinatl.com

<http://www.chinatl.cn>

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta=0$ ($f \leq 900\text{MHz}$ in TEM-cell; $f > 1800\text{MHz}$: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800\text{MHz}$) and inside waveguide using analytical field distributions based on power measurements for $f > 800\text{MHz}$. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from $\pm 50\text{MHz}$ to $\pm 100\text{MHz}$.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: ctl@chinatl.com

[Http://www.chinatl.cn](http://www.chinatl.cn)

Probe EX3DV4

SN: 3753

Calibrated: June 19, 2019

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3753

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu V/(V/m)^2$) ^A	0.47	0.30	0.45	±10.0%
DCP(mV) ^B	102.8	109.1	104.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	165.9	±2.7%
		Y	0.0	0.0	1.0		120.3	
		Z	0.0	0.0	1.0		155.2	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 5 and Page 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3753

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.9	0.89	9.47	9.47	9.47	0.13	1.29	± 12.1%
835	41.5	0.90	9.13	9.13	9.13	0.12	1.28	± 12.1%
900	41.5	0.97	9.20	9.20	9.20	0.15	1.22	± 12.1%
1450	40.5	1.20	8.42	8.42	8.42	0.12	1.34	± 12.1%
1750	40.1	1.37	8.10	8.10	8.10	0.21	1.10	± 12.1%
1900	40.0	1.40	7.73	7.73	7.73	0.26	1.01	± 12.1%
2000	40.0	1.40	7.90	7.90	7.90	0.24	1.07	± 12.1%
2300	39.5	1.67	7.60	7.60	7.60	0.55	0.72	± 12.1%
2450	39.2	1.80	7.43	7.43	7.43	0.61	0.71	± 12.1%
2600	39.0	1.96	7.18	7.18	7.18	0.65	0.68	± 12.1%
3500	37.9	2.91	6.90	6.90	6.90	0.60	1.00	± 13.3%
5250	35.9	4.71	5.39	5.39	5.39	0.40	1.40	± 13.3%
5600	35.5	5.07	4.74	4.74	4.74	0.45	1.40	± 13.3%
5750	35.4	5.22	4.78	4.78	4.78	0.45	1.45	± 13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3753

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	9.67	9.67	9.67	0.40	0.80	±12.1%
835	55.2	0.97	9.29	9.29	9.29	0.19	1.29	±12.1%
900	55.0	1.05	9.29	9.29	9.29	0.23	1.13	±12.1%
1450	54.0	1.30	8.18	8.18	8.18	0.14	1.34	±12.1%
1750	53.4	1.49	7.74	7.74	7.74	0.21	1.17	±12.1%
1900	53.3	1.52	7.53	7.53	7.53	0.24	1.12	±12.1%
2000	53.3	1.52	7.72	7.72	7.72	0.23	1.16	±12.1%
2300	52.9	1.81	7.65	7.65	7.65	0.53	0.81	±12.1%
2450	52.7	1.95	7.55	7.55	7.55	0.65	0.72	±12.1%
2600	52.5	2.16	7.29	7.29	7.29	0.65	0.69	±12.1%
3500	51.3	3.31	6.59	6.59	6.59	0.55	1.07	±13.3%
5250	48.9	5.36	4.79	4.79	4.79	0.50	1.35	±13.3%
5600	48.5	5.77	4.19	4.19	4.19	0.50	1.30	±13.3%
5750	48.3	5.94	4.36	4.36	4.36	0.60	1.15	±13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

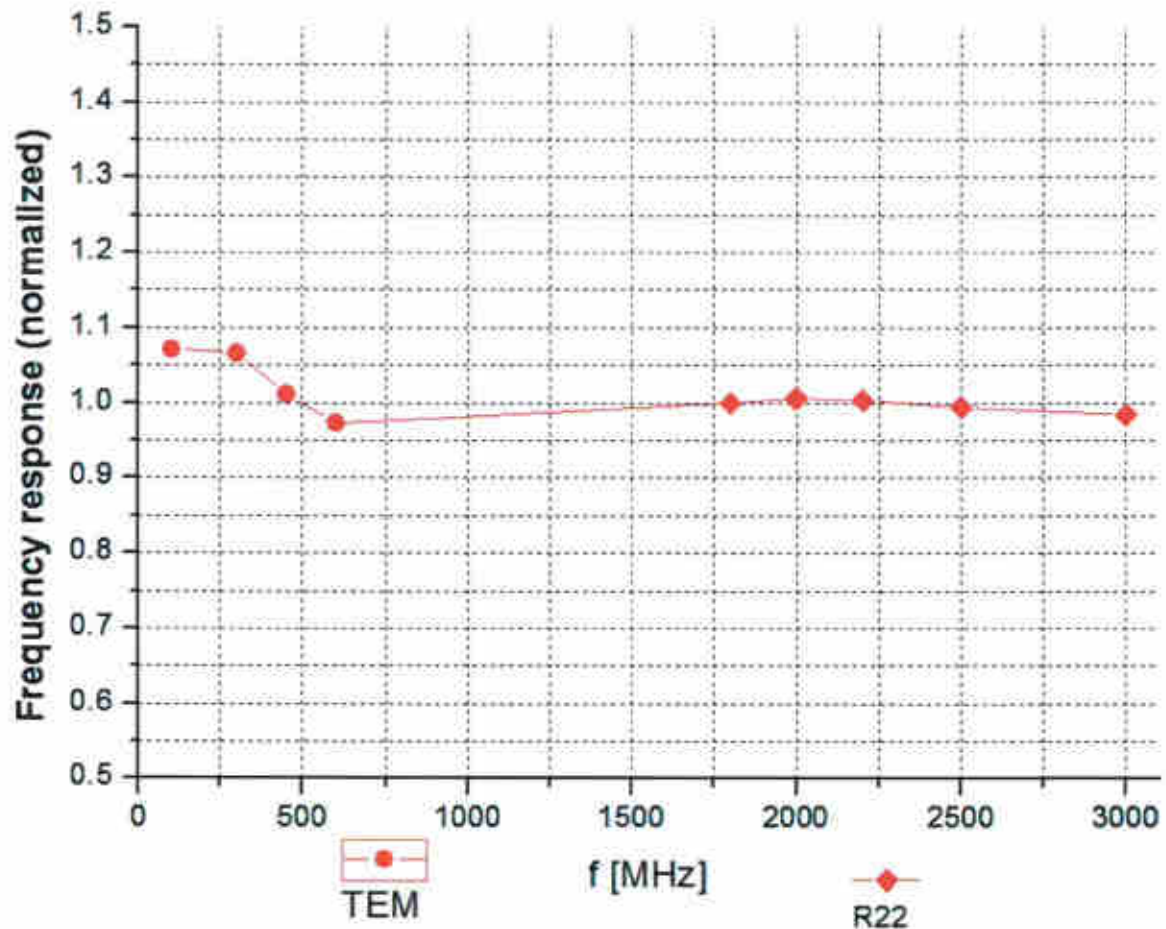



Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

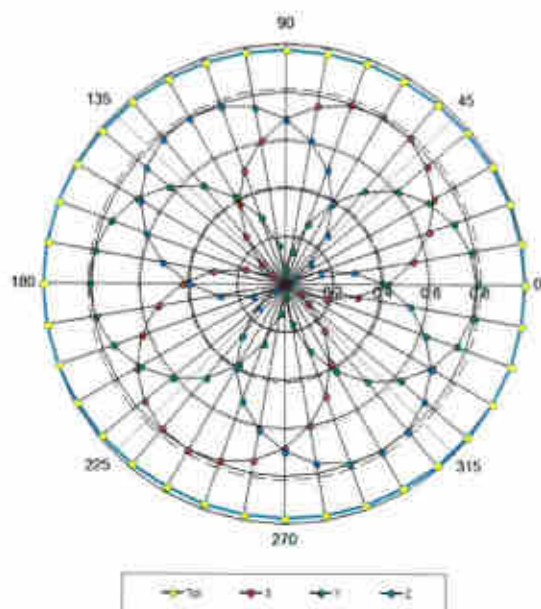

f=1800 MHz, R22

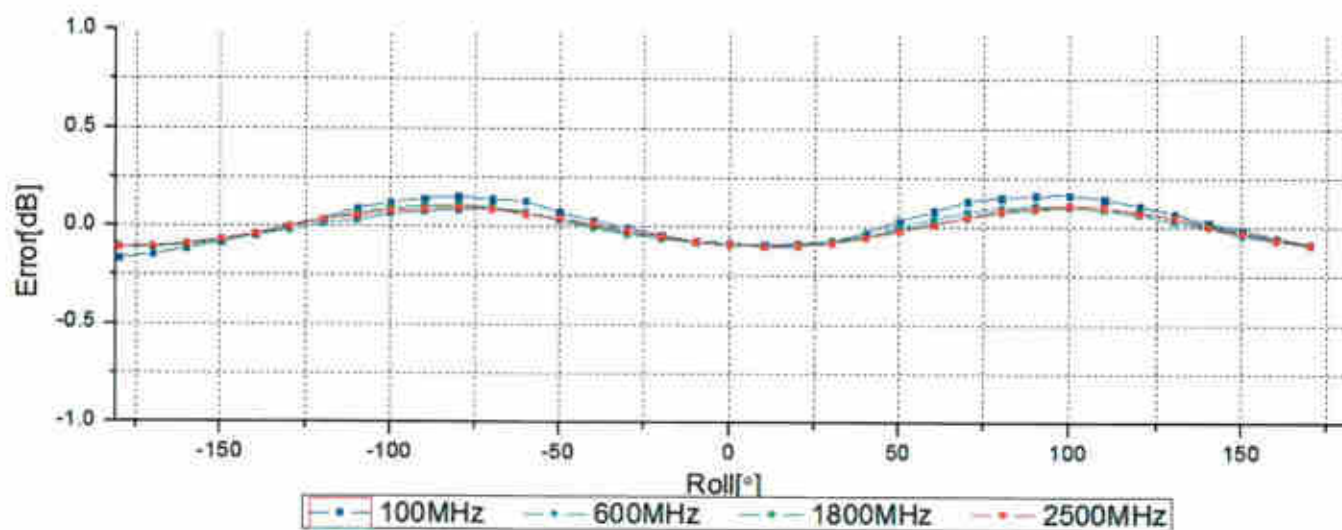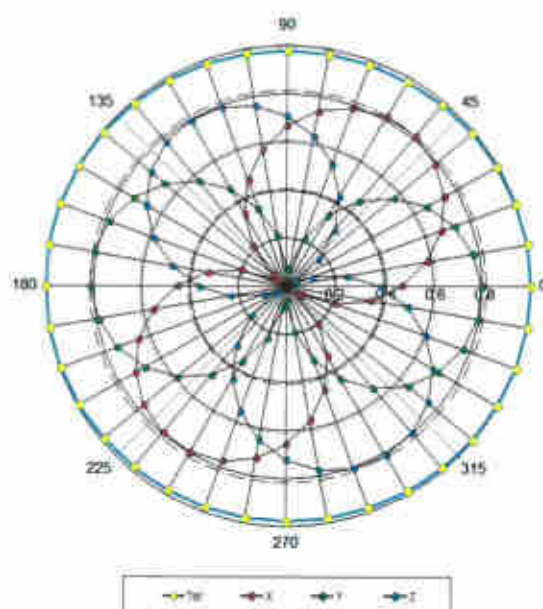



Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)



In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

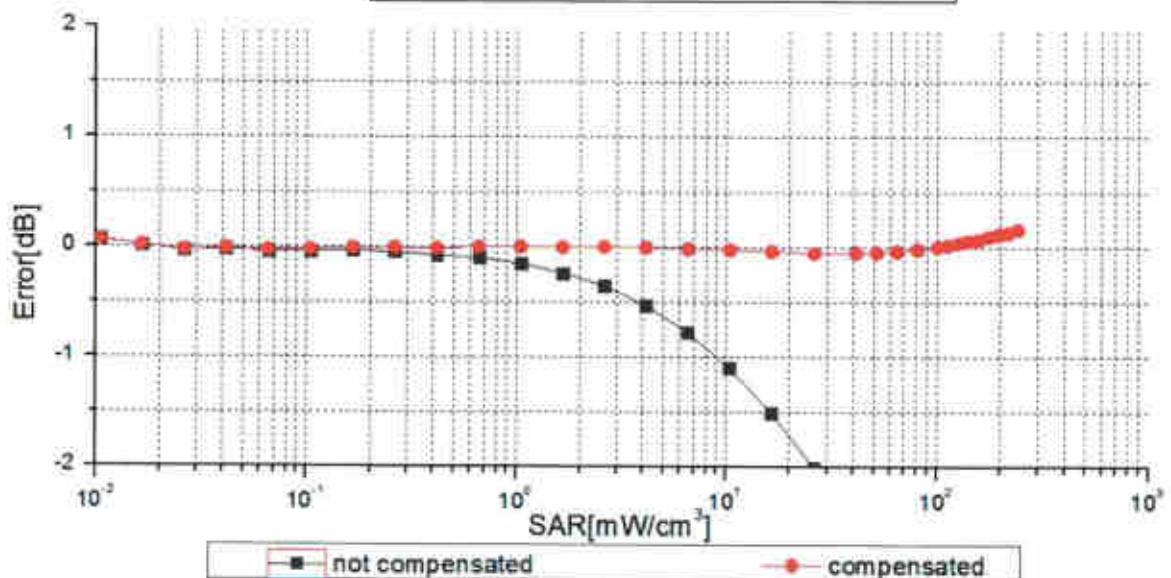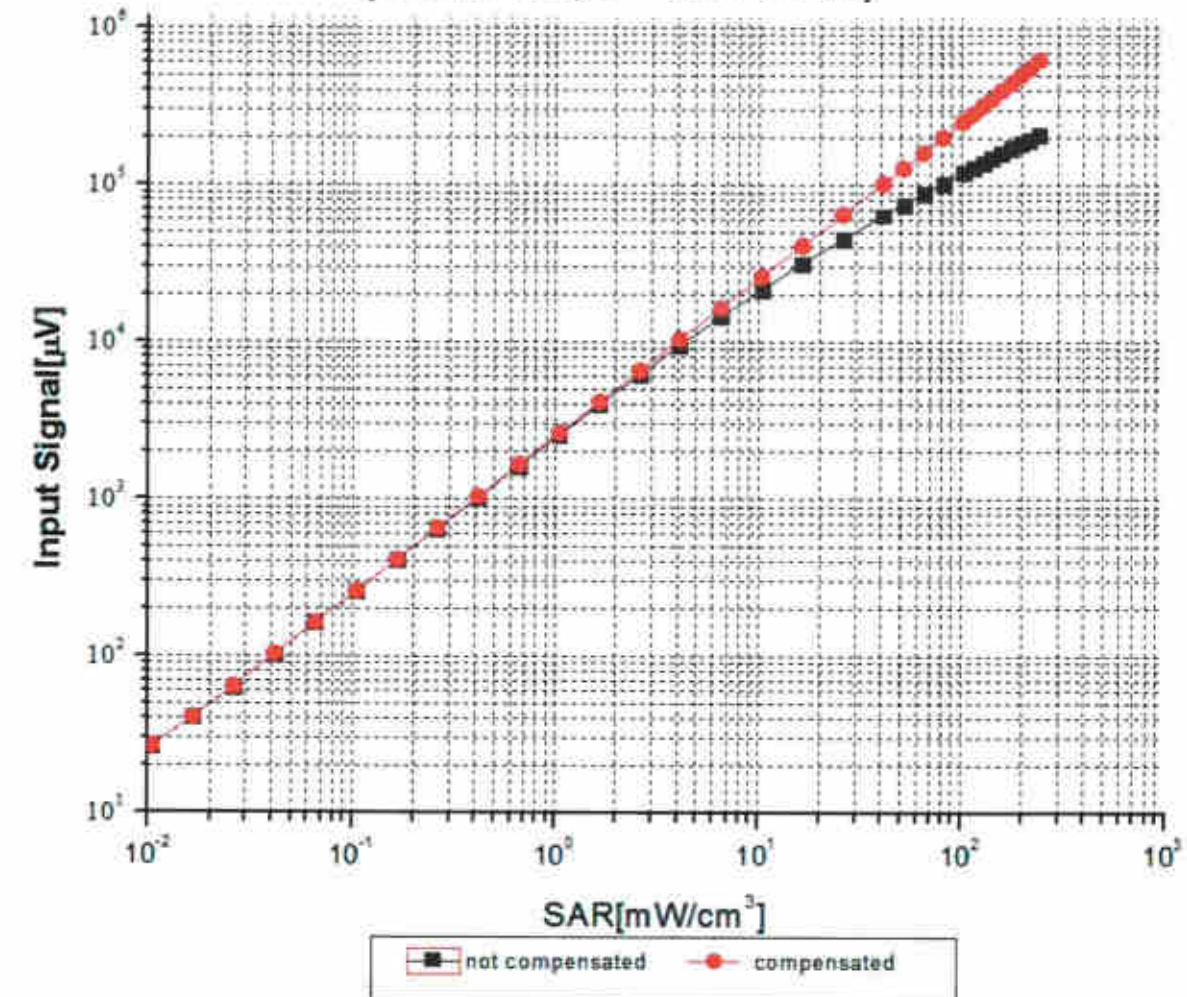

Uncertainty of Linearity Assessment: $\pm 0.9\%$ (k=2)





In Collaboration with
s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>


Conversion Factor Assessment

f=750 MHz, WGLS R9(H_convF)

f=1900 MHz, WGLS R22(H_convF)

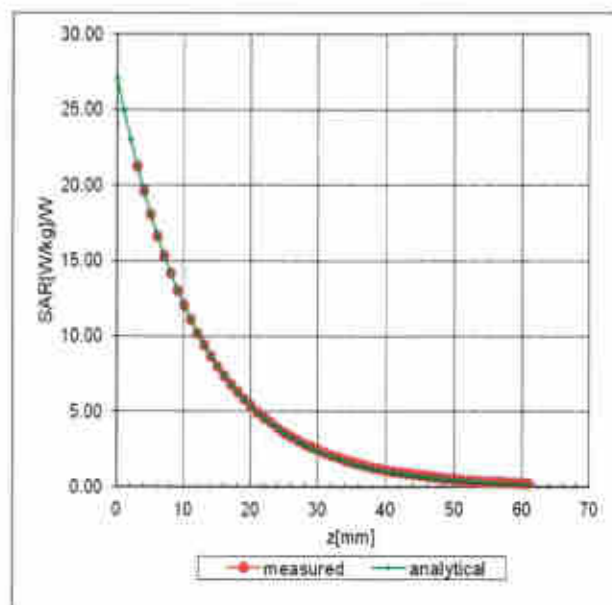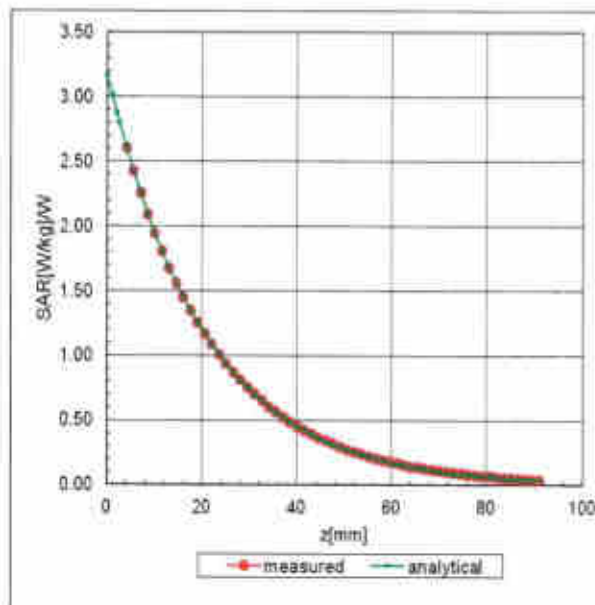

Deviation from Isotropy in Liquid

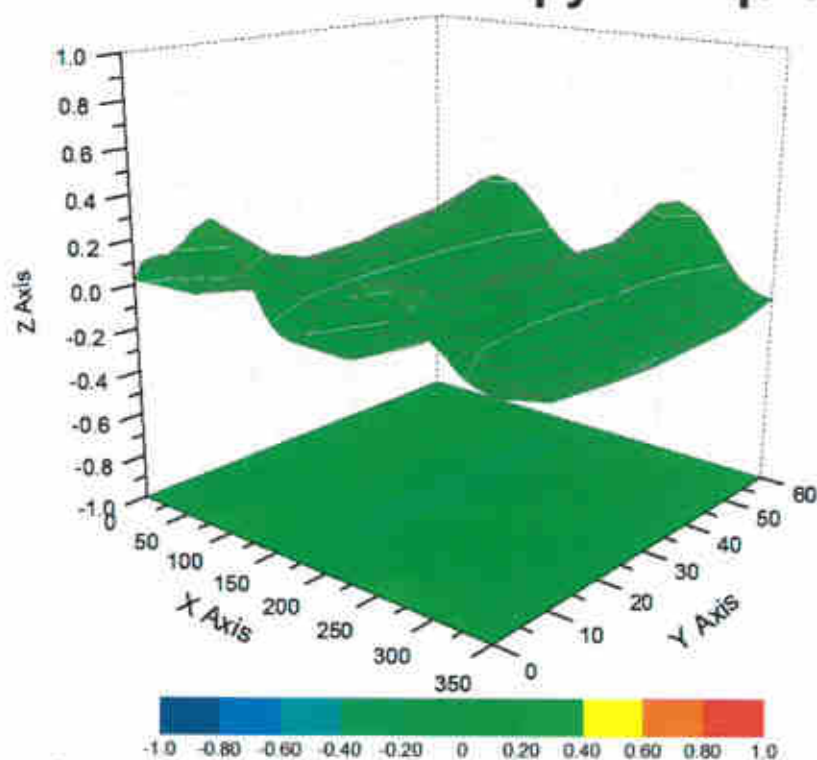

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ (K=2)



In Collaboration with

s p e a g

CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2512

Fax: +86-10-62304633-2504

E-mail: ctl@chinattl.com

<http://www.chinattl.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 3753

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	38.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



Appendix E. Conducted RF Output Power Table

The detailed power table are shown as follows.

Full Power

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	126	189	251		824.2	836.4	848.8	
Tx Channel	824.2	836.4	848.8	824.2	836.4	848.8	824.2	836.4
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	824.2	836.4
GSM 1 Tx slot	32.17	32.21	32.25	33.50	23.17	23.21	23.25	24.50
GPRS 1 Tx slot	32.22	32.25	32.28	33.50	23.22	23.25	23.28	24.50
GPRS 2 Tx slots	30.80	30.84	30.87	31.50	24.80	24.84	24.87	25.50
GPRS 3 Tx slots	28.81	28.82	28.84	29.50	24.55	24.56	24.58	25.24
GPRS 4 Tx slots	26.81	26.82	26.85	27.50	23.81	23.82	23.85	24.50
EDGE 1 Tx slot	26.55	26.76	26.58	28.00	17.55	17.76	17.58	19.00
EDGE 2 Tx slots	24.51	24.75	24.70	26.00	18.51	18.75	18.70	20.00
EDGE 3 Tx slots	22.47	22.53	22.51	24.00	18.21	18.27	18.25	19.74
EDGE 4 Tx slots	20.42	20.37	20.45	22.00	17.42	17.37	17.45	19.00

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Tx Channel	1852.2	1860	1868.8	1852.2	1860	1868.8	1852.2	1860
Frequency (MHz)	1852.2	1860	1868.8	1852.2	1860	1868.8	1852.2	1860
GSM 1 Tx slot	29.97	30.13	30.04	30.50	20.97	21.13	21.04	21.50
GPRS 1 Tx slot	29.95	30.11	30.00	30.50	20.95	21.11	21.00	21.50
GPRS 2 Tx slots	27.95	28.13	28.04	29.00	21.95	22.13	22.04	23.00
GPRS 3 Tx slots	25.94	26.15	26.02	27.00	21.68	21.89	21.76	22.74
GPRS 4 Tx slots	23.95	24.16	24.02	25.00	20.95	21.16	21.02	22.00
GPRS 5 Tx slots	25.94	26.02	25.92	27.00	18.94	17.02	16.92	18.00
EDGE 1 Tx slot	24.02	24.04	23.94	25.00	18.02	18.04	17.94	19.00
EDGE 2 Tx slots	22.01	22.05	21.88	23.00	17.75	17.79	17.60	18.74
EDGE 3 Tx slots	19.96	20.01	19.93	21.00	16.96	17.01	16.93	18.00

Band	WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
	9262	9400	9538		1312	1413	1513		4132	4182	4233	
Tx Channel	9662	9600	9638	1537	1638	1738	1838	1938	4367	4407	4458	4558
Frequency (MHz)	1824.4	1832	1837.8	1812.4	1722.4	1722.4	1722.4	1722.4	1824.4	1832	1837.8	1837.8
3GPP Rel 99	AMR 12.2Kbps	23.07	23.12	23.10	24.00	22.75	22.68	22.58	24.00	22.75	22.79	22.80
3GPP Rel 99	AMR 12.2Kbps	23.10	23.14	23.12	24.00	22.79	22.69	22.58	24.00	22.80	22.82	22.85
3GPP Rel 6	HSDPA Subtest-1	22.22	22.26	22.25	23.00	21.83	21.76	21.60	23.00	22.02	21.97	22.01
3GPP Rel 6	HSDPA Subtest-2	22.08	22.21	22.13	23.00	21.79	21.72	21.63	23.00	21.91	21.92	21.90
3GPP Rel 6	HSDPA Subtest-3	21.63	21.72	21.62	22.50	21.33	21.19	21.12	22.50	21.43	21.44	21.41
3GPP Rel 6	HSDPA Subtest-4	21.60	21.74	21.60	22.50	21.30	21.24	21.12	22.50	21.41	21.38	21.38
3GPP Rel 6	DC-HSDPA Subtest-1	22.11	22.15	22.13	23.00	21.65	21.52	21.35	23.00	21.81	21.79	21.79
3GPP Rel 6	DC-HSDPA Subtest-2	22.00	22.10	22.08	23.00	21.62	21.49	21.45	23.00	21.67	21.65	21.67
3GPP Rel 6	DC-HSDPA Subtest-3	21.52	21.62	21.55	22.50	21.15	20.95	20.88	22.50	21.23	21.24	21.20
3GPP Rel 6	DC-HSDPA Subtest-4	21.48	21.65	21.50	22.50	21.09	21.03	20.89	22.50	21.22	21.16	21.17
3GPP Rel 6	HSUPA Subtest-1	20.13	20.30	20.27	21.50	19.91	19.82	19.78	21.50	20.06	20.03	20.07
3GPP Rel 6	HSUPA Subtest-2	20.18	20.30	20.21	20.50	19.90	19.75	19.75	20.00	19.96	19.96	19.93
3GPP Rel 6	HSUPA Subtest-3	21.17	21.35	21.23	22.00	20.87	20.81	20.74	21.00	20.98	20.94	20.95
3GPP Rel 6	HSUPA Subtest-4	19.66	19.80	19.75	20.00	19.35	19.32	19.25	20.00	19.42	19.40	19.45
3GPP Rel 6	HSUPA Subtest-5	21.10	21.20	21.10	22.00	20.80	20.80	20.70	22.00	20.90	20.90	20.90
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.80	19.76	19.70	20.00	19.30	19.29	19.22	19.50	19.40	19.35	19.42



Reduced Power Mode for Receiver On

Band		WCDMA V			Tune-up Limit (dBm)
TX Channel		4132	4182	4233	
RX Channel		4357	4407	4458	
Frequency (MHz)		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	19.62	19.74	19.75	21.00
3GPP Rel 99	RMC 12.2Kbps	19.63	19.71	19.76	21.00
3GPP Rel 6	HSDPA Subtest-1	19.50	19.80	19.53	20.00
3GPP Rel 6	HSDPA Subtest-2	19.43	19.51	19.44	20.00
3GPP Rel 6	HSDPA Subtest-3	19.04	19.08	19.09	19.50
3GPP Rel 6	HSDPA Subtest-4	18.94	18.94	18.96	19.50
3GPP Rel 8	DC-HSDPA Subtest-1	19.29	19.35	19.34	20.00
3GPP Rel 8	DC-HSDPA Subtest-2	19.24	19.33	19.26	20.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.86	18.92	18.93	19.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.74	18.71	18.78	19.50
3GPP Rel 6	HSUPA Subtest-1	17.97	17.86	17.97	19.00
3GPP Rel 6	HSUPA Subtest-2	17.84	17.84	17.84	18.50
3GPP Rel 6	HSUPA Subtest-3	18.94	18.79	18.82	19.50
3GPP Rel 6	HSUPA Subtest-4	17.34	17.25	17.37	18.00
3GPP Rel 6	HSUPA Subtest-5	18.83	18.82	18.80	20.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	17.25	17.27	17.38	18.00

Reduced Power Mode for Hotspot On

GSM1900		Tx Channel Average Power (dBm)			Tune-up Limit (dBm)	Frame Average Power (dBm)			Tune-up Limit (dBm)
		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1860	1909.8		1850.2	1860	1909.8	
GSM 1 Tx slot		24.75	24.92	25.05		15.75	15.92	16.05	
GPRS 1 Tx slot		24.73	24.90	25.03	25.50	15.73	15.90	16.03	16.50
GPRS 2 Tx slots		22.68	22.89	22.86	24.00	16.68	16.89	16.86	18.00
GPRS 3 Tx slots		20.39	20.60	20.58	22.00	16.13	16.34	16.32	17.74
GPRS 4 Tx slots		16.66	16.84	16.02	20.00	15.66	15.84	16.02	17.00
EDGE 1 Tx slot		24.65	24.82	24.60	25.50	15.65	15.82	15.60	16.50
EDGE 2 Tx slots		22.30	22.36	22.01	23.50	16.30	16.36	16.01	17.50
EDGE 3 Tx slots		20.24	20.38	20.15	21.50	15.98	16.12	15.89	17.24
EDGE 4 Tx slots		18.86	18.89	18.73	19.50	15.86	15.89	15.73	16.50

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
		5262	5400	5638		1312	1413	1513	
Tx Channel		9892	9930	9938		1537	1638	1738	
Rx Channel		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99		17.93	17.96	18.04	19.00	18.87	18.90	18.88	20.00
3GPP Rel 99		17.95	18.05	18.02	19.00	18.93	18.92	18.90	20.00
3GPP Rel 6		17.50	17.78	18.01	18.50	18.17	18.21	18.22	19.00
3GPP Rel 6		17.39	17.62	17.93	18.50	18.04	18.09	18.15	19.00
3GPP Rel 6		16.93	17.15	17.40	18.00	17.57	17.66	17.69	18.50
3GPP Rel 6		16.89	17.09	17.38	18.00	17.56	17.58	17.65	18.50
3GPP Rel 8		17.31	17.53	17.81	18.50	17.98	17.99	18.02	19.00
3GPP Rel 8		17.16	17.44	17.71	18.50	17.87	17.86	17.93	19.00
3GPP Rel 8		16.74	16.95	17.19	18.00	17.40	17.48	17.45	18.50
3GPP Rel 8		16.65	16.90	17.14	18.00	17.40	17.32	17.45	18.50
3GPP Rel 6		15.58	15.65	16.00	16.50	16.74	16.79	16.76	17.50
3GPP Rel 6		15.64	15.75	16.13	16.50	16.24	16.37	16.28	16.50
3GPP Rel 6		16.60	16.85	17.10	17.50	17.28	17.31	17.30	17.50
3GPP Rel 6		15.10	15.39	15.70	16.00	15.82	15.82	15.85	16.00
3GPP Rel 6		16.50	16.70	16.90	17.50	17.20	17.20	17.20	17.50
3GPP Rel 7		15.05	15.33	15.55	16.00	15.73	15.70	15.77	16.00

Reduced Power Mode for Receiver Off

GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1860	1909.8		1850.2	1860	1909.8	
GSM 1 Tx slot		27.65	27.83	27.81	28.50	18.65	18.83	18.81	19.50
GPRS 1 Tx slot		27.63	27.80	27.78	28.50	18.63	18.80	18.78	19.50
GPRS 2 Tx slots		25.63	25.78	25.77	27.00	19.63	19.78	19.77	21.00
GPRS 3 Tx slots		23.91	24.12	24.07	25.00	19.65	19.86	19.81	20.74
GPRS 4 Tx slots		21.57	21.77	21.77	23.00	18.57	18.77	18.77	20.00
EDGE 1 Tx slot		25.94	26.02	25.92	27.00	16.94	17.02	16.92	18.00
EDGE 2 Tx slots		24.02	24.04	23.94	25.00	18.02	18.04	17.94	19.00
EDGE 3 Tx slots		22.01	22.05	21.86	23.00	17.75	17.79	17.60	18.74
EDGE 4 Tx slots		19.96	20.01	19.93	21.00	16.96	17.01	16.93	18.00

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		5262	5400	5638		1312	1413	1513	
Rx Channel		5682	5820	5938		1537	1638	1738	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	19.74	19.80	19.72	21.00	21.66	21.63	21.55	23.00
3GPP Rel 99	RMC 12.2Kbps	19.86	19.92	19.84	21.00	21.78	21.75	21.68	23.00
3GPP Rel 6	HSDPA Subtest-1	19.55	19.68	19.58	20.50	21.67	21.69	21.59	22.50
3GPP Rel 6	HSDPA Subtest-2	19.48	19.57	19.53	20.50	21.56	21.60	21.50	22.50
3GPP Rel 6	HSDPA Subtest-3	19.01	19.09	19.03	20.00	21.07	21.03	21.05	22.00
3GPP Rel 6	HSDPA Subtest-4	19.00	19.06	19.01	20.00	21.09	21.10	21.06	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	19.54	19.65	19.60	20.50	21.51	21.46	21.34	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	19.48	19.57	19.50	20.50	21.36	21.42	21.26	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	19.05	19.05	19.03	20.00	20.88	20.79	20.81	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	19.02	19.06	18.98	20.00	20.86	20.90	20.86	22.00
3GPP Rel 6	HSUPA Subtest-1	17.81	17.85	17.80	18.50	18.63	18.66	18.57	20.50
3GPP Rel 6	HSUPA Subtest-2	17.72	17.85	17.74	18.50	18.59	18.67	18.61	19.00
3GPP Rel 6	HSUPA Subtest-3	18.79	18.83	18.84	19.50	19.62	19.68	19.55	20.00
3GPP Rel 6	HSUPA Subtest-4	17.23	17.41	17.24	18.00	18.15	18.21	18.07	19.00
3GPP Rel 6	HSUPA Subtest-5	18.80	18.80	18.70	19.50	19.60	19.60	19.50	21.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	17.15	17.32	17.19	18.00	18.10	18.16	18.02	19.50

Band 2 (1800MHz Band) Part 24E									
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)		
Channel				18700	18900	19100			
Frequency (MHz)				1860	1880	1900			
20	QPSK	1	0	23.94	24.00	24.04	25		
20	QPSK	1	49	24.16	24.20	24.30			
20	QPSK	1	99	23.88	23.91	23.98			
20	QPSK	50	0	22.95	23.14	23.19	24		
20	QPSK	50	24	22.90	23.12	23.18			
20	QPSK	50	50	22.91	23.12	23.12			
20	QPSK	100	0	22.94	23.10	23.13	24		
20	16QAM	1	0	23.12	23.22	23.22			
20	16QAM	1	49	23.24	23.35	23.43			
20	16QAM	1	99	23.06	23.13	23.07	23		
20	16QAM	50	0	21.97	22.11	22.19			
20	16QAM	50	24	22.03	22.12	22.18			
20	16QAM	50	50	21.97	22.08	22.05	23		
20	16QAM	100	0	21.96	22.08	22.12			
20	64QAM	1	0	22.07	22.08	22.13			
20	64QAM	1	49	22.29	22.28	22.25	23		
20	64QAM	1	99	22.05	21.98	22.02			
20	64QAM	50	0	21.01	21.16	21.26			
20	64QAM	50	24	21.04	21.19	21.21	22		
20	64QAM	50	50	20.99	21.11	21.12			
20	64QAM	100	0	21.01	21.11	21.19			
Channel				18675	18900	19125	Tune-up limit (dBm)		
Frequency (MHz)				1857.5	1880	1902.5			
15	QPSK	1	0	23.83	23.99	23.99	25		
15	QPSK	1	37	24.01	24.03	24.19			
15	QPSK	1	74	23.78	23.93	23.89			
15	QPSK	36	0	22.92	23.12	23.18	24		
15	QPSK	36	20	22.92	23.12	23.18			
15	QPSK	36	39	22.92	23.10	23.09			
15	QPSK	75	0	22.95	23.14	23.16	24		
15	16QAM	1	0	23.12	23.50	23.28			
15	16QAM	1	37	23.32	23.26	23.48			
15	16QAM	1	74	23.08	23.19	23.10	23		
15	16QAM	36	0	21.92	22.16	22.12			
15	16QAM	36	20	21.93	22.08	22.15			
15	16QAM	36	39	21.91	22.04	22.05	23		
15	16QAM	75	0	21.95	22.07	22.14			
15	64QAM	1	0	22.05	22.09	22.18			
15	64QAM	1	37	22.52	22.25	22.37	23		
15	64QAM	1	74	22.03	22.04	22.05			
15	64QAM	36	0	21.01	21.10	21.18			
15	64QAM	36	20	21.02	21.14	21.20	22		
15	64QAM	36	39	21.00	21.11	21.13			
15	64QAM	75	0	21.00	21.12	21.18			
Channel				18650	18900	19150	Tune-up limit (dBm)		
Frequency (MHz)				1855	1880	1905			
10	QPSK	1	0	23.83	23.96	24.00	25		
10	QPSK	1	25	23.92	24.00	24.08			
10	QPSK	1	49	23.75	24.00	23.94			
10	QPSK	25	0	22.89	23.11	23.15	24		
10	QPSK	25	12	22.89	23.12	23.14			
10	QPSK	25	25	22.87	23.09	23.06			
10	QPSK	50	0	22.90	23.12	23.10	24		
10	16QAM	1	0	23.16	23.50	23.33			
10	16QAM	1	25	23.24	23.30	23.37			
10	16QAM	1	49	23.15	23.27	23.08	23		
10	16QAM	25	0	21.98	22.10	22.16			
10	16QAM	25	12	21.94	22.10	22.13			
10	16QAM	25	25	21.93	22.13	22.02	23		
10	16QAM	50	0	21.93	22.10	22.10			
10	64QAM	1	0	22.10	22.12	22.17			
10	64QAM	1	25	22.16	22.14	22.15	23		
10	64QAM	1	49	22.06	22.10	22.05			
10	64QAM	25	0	20.99	21.17	21.20			
10	64QAM	25	12	21.01	21.12	21.16	22		
10	64QAM	25	25	20.95	21.15	21.10			
10	64QAM	50	0	21.01	21.12	21.16			
Channel				18625	18900	19175	Tune-up limit (dBm)		
Frequency (MHz)				1852.5	1880	1907.5			
5	QPSK	1	0	23.71	23.90	23.93	25		
5	QPSK	1	12	23.98	24.15	24.09			
5	QPSK	1	24	23.70	23.86	23.81			
5	QPSK	12	0	22.86	23.03	23.00	24		
5	QPSK	12	7	22.91	23.05	23.03			
5	QPSK	12	13	22.87	23.03	22.95			
5	QPSK	25	0	22.88	23.05	23.01	24		
5	16QAM	1	0	23.08	23.16	23.08			
5	16QAM	1	12	23.32	23.44	23.32			
5	16QAM	1	24	23.04	23.21	23.00	23		
5	16QAM	12	0	21.87	22.01	22.00			
5	16QAM	12	7	21.92	22.07	21.99			
5	16QAM	12	13	21.84	22.00	21.90	23		
5	16QAM	25	0	21.82	22.04	21.95			
5	64QAM	1	0	22.08	22.14	22.02			
5	64QAM	1	12	22.21	22.34	22.28	23		
5	64QAM	1	24	21.92	22.04	21.91			
5	64QAM	12	0	20.99	21.10	21.06			
5	64QAM	12	7	21.02	21.12	21.11	22		
5	64QAM	12	13	20.95	21.06	20.98			
5	64QAM	25	0	20.98	21.10	21.05			
Channel				18600	18900	19160	Tune-up limit (dBm)		
Frequency (MHz)				1850.0	1880	1909.0			
3	QPSK	1	0	23.75	23.94	23.87	25		
3	QPSK	1	8	23.73	23.92	23.88			
3	QPSK	1	14	23.75	23.92	23.80			
3	QPSK	8	0	22.84	23.00	22.93	24		
3	QPSK	8	4	22.87	22.98	22.96			
3	QPSK	8	7	22.77	22.98	22.93			
3	QPSK	15	0	22.98	22.97	22.95	24		
3	16QAM	1	0	23.12	23.20	23.15			
3	16QAM	1	8	23.11	23.25	23.06			
3	16QAM	1	14	23.11	23.25	23.07	23		
3	16QAM	8	0	21.89	22.02	21.98			
3	16QAM	8	4	21.91	22.05	21.98			
3	16QAM	8	7	21.89	21.97	21.91	23		
3	16QAM	15	0	21.85	21.98	21.92			
3	64QAM	1	0	21.98	22.05	22.03			
3	64QAM	1	8	22.03	22.10	22.13	23		
3	64QAM	1	14	22.00	22.07	21.94			
3	64QAM	8	0	20.97	21.04	21.04			
3	64QAM	8	4	20.96	21.07	21.06	22		
3	64QAM	8	7	20.95	21.03	21.00			
3	64QAM	15	0	20.91	21.01	20.97			
Channel				18575	18900	19165	Tune-up limit (dBm)		
Frequency (MHz)				1850.0	1880	1909.0			
1.4	QPSK	1	0	23.85	24.01	23.80	25		
1.4	QPSK	1	3	24.00	24.20	24.04			
1.4	QPSK	1	5	23.90	24.02	23.89			
1.4	QPSK	3	0	23.99	24.08	24.02	24		
1.4	QPSK	3	1	24.04	24.20	24.12			
1.4	QPSK	3	3	24.03	24.14	24.03			
1.4	QPSK	6	0	23.91	23.97	23.97	24		
1.4	16QAM	1	0	23.15	23.26	23.09			
1.4	16QAM	1	3	23.34	23.40	23.19			
1.4	16QAM	1	5	23.14	23.24	23.05	24		
1.4	16QAM	3	0	22.98	23.10	22.95			
1.4	16QAM	3	1	23.05	23.15	23.01			
1.4	16QAM	3	3	23.02	23.13	22.93	23		
1.4	16QAM	6	0	22.08	22.21	22.12			
1.4	16QAM	6	1	22.10	22.18	22.05			
1.4	16QAM	1	3	22.28	22.32	22.16	23		
1.4	16QAM	1	5	22.12	22.21	22.02			
1.4	16QAM	3	0	22.13	22.24	22.15			
1.4	16QAM	3	1	22.19	22.28	22.14	23		
1.4	16QAM	3	3	22.16	22.16	22.13			
1.4	64QAM	6	0	21.04	21.14	21.09			

Full Power

Band 12 (700MHz Low Band) Part 27F (only on channel required)							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Med. Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23065	23130	Tune-up limit (dBm)
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	21.98	21.97	21.97	23.5
10	QPSK	1	25	22.19	22.16	22.16	
10	QPSK	1	49	22.05	22.06	22.04	
10	QPSK	25	0	23.08	23.14	23.17	24.5
10	QPSK	25	12	23.13	23.26	23.18	
10	QPSK	25	25	23.14	23.15	23.16	
10	QPSK	50	0	23.11	23.17	23.20	22.5
10	16QAM	1	0	21.16	21.17	21.10	
10	16QAM	1	25	21.39	21.33	21.39	
10	16QAM	1	49	21.22	21.21	21.20	23.5
10	16QAM	25	0	22.08	22.10	22.13	
10	16QAM	25	12	22.15	22.15	22.17	
10	16QAM	25	25	22.15	22.13	22.13	21.5
10	16QAM	50	0	22.07	22.13	22.14	
10	64QAM	1	0	20.10	20.15	20.14	
10	64QAM	1	25	20.36	20.33	20.39	22.5
10	64QAM	1	49	20.19	20.26	20.20	
10	64QAM	25	0	21.06	21.10	21.16	
10	64QAM	25	12	21.15	21.14	21.20	22.5
10	64QAM	25	25	21.14	21.15	21.15	
10	64QAM	50	0	21.11	21.11	21.18	
Channel				23035	23065	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	21.94	21.90	21.95	23.5
5	QPSK	1	12	22.10	22.09	22.13	
5	QPSK	1	24	22.04	22.03	22.03	
5	QPSK	12	0	23.09	23.10	23.06	24.5
5	QPSK	12	7	23.20	23.16	23.15	
5	QPSK	12	13	23.16	23.11	23.04	
5	QPSK	25	0	23.13	23.12	23.05	22.5
5	16QAM	1	0	21.09	21.07	21.01	
5	16QAM	1	12	21.31	21.25	21.36	
5	16QAM	1	24	21.12	21.14	21.17	23.5
5	16QAM	12	0	22.08	22.10	22.03	
5	16QAM	12	7	22.14	22.13	22.11	
5	16QAM	12	13	22.13	22.05	21.97	21.5
5	16QAM	25	0	22.16	22.09	22.03	
5	64QAM	1	0	20.02	20.14	20.07	
5	64QAM	1	12	20.32	20.27	20.29	22.5
5	64QAM	1	24	20.17	20.18	20.11	
5	64QAM	12	0	21.09	21.11	21.04	
5	64QAM	12	7	21.22	21.16	21.15	22.5
5	64QAM	12	13	21.19	21.07	20.99	
5	64QAM	25	0	21.12	21.09	21.03	
Channel				23025	23065	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	21.89	21.89	21.95	23.5
3	QPSK	1	8	22.09	22.11	22.12	
3	QPSK	1	14	22.03	22.01	22.03	
3	QPSK	8	0	23.03	23.06	23.07	24.5
3	QPSK	8	4	23.08	23.11	23.08	
3	QPSK	8	7	23.07	23.09	23.05	
3	QPSK	15	0	23.05	23.09	23.06	22.5
3	16QAM	1	0	21.06	21.09	21.04	
3	16QAM	1	8	21.32	21.30	21.38	
3	16QAM	1	14	21.12	21.19	21.17	23.5
3	16QAM	8	0	22.14	22.08	22.06	
3	16QAM	8	4	22.14	22.13	22.09	
3	16QAM	8	7	22.12	22.13	22.07	21.5
3	16QAM	15	0	22.04	22.08	22.01	
3	64QAM	1	0	20.08	20.05	20.08	
3	64QAM	1	8	20.34	20.26	20.36	22.5
3	64QAM	1	14	20.12	20.19	20.18	
3	64QAM	8	0	21.09	21.13	21.08	
3	64QAM	8	4	21.13	21.14	21.08	22.5
3	64QAM	8	7	21.13	21.14	21.04	
3	64QAM	15	0	21.07	21.05	21.01	
Channel				23017	23065	23173	Tune-up limit (dBm)
Frequency (MHz)				697.7	707.5	716.3	
1.4	QPSK	1	0	21.88	21.96	21.89	23.5
1.4	QPSK	1	3	22.12	22.10	22.10	
1.4	QPSK	1	5	22.04	22.00	22.01	
1.4	QPSK	3	0	24.07	24.11	24.07	25.5
1.4	QPSK	3	1	24.15	24.18	24.12	
1.4	QPSK	3	3	24.09	24.11	24.07	
1.4	QPSK	6	0	23.11	23.14	23.08	24.5
1.4	16QAM	1	0	21.15	21.09	21.00	
1.4	16QAM	1	3	21.32	21.30	21.35	
1.4	16QAM	1	5	21.18	21.14	21.14	22.5
1.4	16QAM	3	0	23.10	23.07	22.98	
1.4	16QAM	3	1	23.14	23.11	23.09	
1.4	16QAM	3	3	23.11	23.07	23.00	23.5
1.4	16QAM	6	0	22.19	22.15	22.14	
1.4	64QAM	1	0	20.06	20.05	20.06	
1.4	64QAM	1	3	20.28	20.32	20.30	21.5
1.4	64QAM	1	5	20.17	20.22	20.15	
1.4	64QAM	3	0	22.20	22.18	22.09	
1.4	64QAM	3	1	22.26	22.23	22.16	23.5
1.4	64QAM	3	3	22.23	22.19	22.09	
1.4	64QAM	6	0	21.11	21.10	21.04	

Band 14 (700MHz Band)							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Med. Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23360	23330		Tune-up limit (dBm)
Frequency (MHz)				793			
10	QPSK	1	0		20.85		22.5
10	QPSK	1	25		21.80		
10	QPSK	1	49		20.81		
10	QPSK	25	0		22.97		24.5
10	QPSK	25	12		22.94		
10	QPSK	25	25		22.90		
10	QPSK	50	0		22.92		21.5
10	16QAM	1	0		19.99		
10	16QAM	1	25		20.11		
10	16QAM	1	49		19.95		23.5
10	16QAM	25	0		21.91		
10	16QAM	25	12		21.96		
10	16QAM	25	25		21.85		20.5
10	16QAM	50	0		21.92		
10	64QAM	1	0		18.98		
10	64QAM	1	25		19.11		22.5
10	64QAM	1	49		18.95		
10	64QAM	25	0		20.91		
10	64QAM	25	12		20.92		22.5
10	64QAM	25	25		20.83		
10	64QAM	50	0		20.89		
Channel				23305	23330	23355	Tune-up limit (dBm)
Frequency (MHz)				790.5	793	795.5	
5	QPSK	1	0	20.81	20.83	20.78	22.5
5	QPSK	1	13	20.99	20.97	20.94	
5	QPSK	1	24	20.71	20.77	20.79	
5	QPSK	12	0	22.79	22.82	22.81	24.5
5	QPSK	12	7	22.86	22.87	22.84	
5	QPSK	12	13	22.83	22.78	22.76	
5	QPSK	25	0	22.82	22.80	22.82	21.5
5	16QAM	1	0	19.95	19.98	19.93	
5	16QAM	1	13	20.02	20.06	20.01	
5	16QAM	1	24	19.98	19.92	19.93	23.5
5	16QAM	12	0	21.79	21.78	21.80	
5	16QAM	12	7	21.85	21.84	21.80	
5	16QAM	12	13	21.80	21.75	21.71	20.5
5	16QAM	25	0	21.82	21.81	21.76	
5	64QAM	1	0	18.93	18.96	18.89	
5	64QAM	1	13	19.07	19.05	19.02	22.5
5	64QAM	1	24	18.95	18.92	18.93	
5	64QAM	12	0	20.78	20.81	20.83	
5	64QAM	12	7	20.86	20.86	20.84	22.5
5	64QAM	12	13	20.80	20.74	20.72	
5	64QAM	25	0	20.82	20.76	20.75	

Band 30							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				27060	27110	27170	Tune-up limit (dBm)
Frequency (MHz)				2310			
10	QPSK	1	0		18.97		20.5
10	QPSK	1	25		19.09		
10	QPSK	1	49		18.93		
10	QPSK	25	0		21.08		22.5
10	QPSK	25	12		21.15		
10	QPSK	25	25		21.01		
10	QPSK	50	0		20.81		22.5
10	16QAM	1	0		18.14		
10	16QAM	1	25		18.28		
10	16QAM	1	49		18.16		19.5
10	16QAM	25	0		19.85		
10	16QAM	25	12		19.92		
10	16QAM	25	25		19.81		21.5
10	16QAM	50	0		19.80		
10	64QAM	1	0		17.20		
10	64QAM	1	25		17.30		18.5
10	64QAM	1	49		17.21		
10	64QAM	25	0		18.89		
10	64QAM	25	12		18.92		20.5
10	64QAM	25	25		18.83		
10	64QAM	50	0		18.70		
Channel				27065	27110	27135	Tune-up limit (dBm)
Frequency (MHz)				2307.5	2310	2312.5	
5	QPSK	1	0	18.95	19.04	18.89	20.5
5	QPSK	1	12	19.09	19.03	19.02	
5	QPSK	1	24	18.92	18.87	18.85	
5	QPSK	12	0	21.04	21.05	21.01	22.5
5	QPSK	12	7	21.03	21.10	20.91	
5	QPSK	12	13	21.04	21.08	20.99	
5	QPSK	25	0	20.78	20.76	20.79	22.5
5	16QAM	1	0	18.06	18.07	18.10	
5	16QAM	1	12	18.23	18.13	18.19	
5	16QAM	1	24	18.09	18.09	18.09	19.5
5	16QAM	12	0	19.87	20.04	19.98	
5	16QAM	12	7	19.88	19.92	20.08	
5	16QAM	12	13	20.05	20.08	20.06	21.5
5	16QAM	25	0	19.70	19.78	19.73	
5	64QAM	1	0	17.14	17.17	17.16	
5	64QAM	1	12	17.21	17.25	17.28	18.5
5	64QAM	1	24	17.17	17.18	17.14	
5	64QAM	12	0	18.87	18.86	18.90	
5	64QAM	12	7	18.89	18.89	18.88	20.5
5	64QAM	12	13	18.85	18.87	18.86	
5	64QAM	25	0	18.64	18.61	18.67	

Full Power

Band 06							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				1320/2	132/22	1325/2	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	20.58	20.69	20.57	22
20	QPSK	1	49	20.83	20.87	20.66	
20	QPSK	1	99	20.48	20.52	20.30	
20	QPSK	50	0	22.63	22.78	22.54	24
20	QPSK	50	24	22.62	22.68	22.52	
20	QPSK	50	50	22.63	22.59	22.32	
20	QPSK	100	0	22.64	22.66	22.43	21
20	16QAM	1	0	19.86	19.91	19.84	
20	16QAM	1	49	20.11	20.08	20.01	
20	16QAM	1	99	19.80	19.70	19.65	23
20	16QAM	50	0	21.87	21.79	21.56	
20	16QAM	50	24	21.64	21.71	21.52	
20	16QAM	50	50	21.87	21.62	21.31	20
20	16QAM	100	0	21.87	21.69	21.37	
20	64QAM	1	0	18.76	18.83	18.80	
20	64QAM	1	49	18.94	19.01	18.93	22
20	64QAM	1	99	18.62	18.57	18.57	
20	64QAM	50	0	20.68	20.79	20.55	
20	64QAM	50	24	20.66	20.68	20.51	22
20	64QAM	50	50	20.67	20.58	20.32	
20	64QAM	100	0	20.65	20.69	20.45	
Channel				1320/7	132/22	1325/7	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	20.49	20.65	20.53	22
15	QPSK	1	37	20.76	20.83	20.59	
15	QPSK	1	74	20.47	20.50	20.23	
15	QPSK	36	0	22.56	22.81	22.46	24
15	QPSK	36	20	22.54	22.56	22.41	
15	QPSK	36	39	22.51	22.53	22.34	
15	QPSK	75	0	22.52	22.56	22.37	21
15	16QAM	1	0	19.80	19.89	19.81	
15	16QAM	1	37	20.06	20.07	20.00	
15	16QAM	1	74	19.75	19.67	19.58	23
15	16QAM	36	0	21.56	21.60	21.43	
15	16QAM	36	20	21.53	21.57	21.32	
15	16QAM	36	39	21.52	21.54	21.26	20
15	16QAM	75	0	21.56	21.59	21.35	
15	64QAM	1	0	18.68	18.77	18.76	
15	64QAM	1	37	18.85	18.92	18.85	22
15	64QAM	1	74	18.55	18.48	18.50	
15	64QAM	36	0	20.55	20.62	20.46	
15	64QAM	36	20	20.54	20.59	20.42	22
15	64QAM	36	39	20.55	20.51	20.32	
15	64QAM	75	0	20.57	20.56	20.36	
Channel				1320/2	132/22	1325/2	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	20.57	20.63	20.47	22
10	QPSK	1	25	20.81	20.85	20.63	
10	QPSK	1	49	20.38	20.51	20.28	
10	QPSK	25	0	22.53	22.56	22.44	24
10	QPSK	25	12	22.46	22.51	22.34	
10	QPSK	25	25	22.45	22.45	22.32	
10	QPSK	50	0	22.53	22.53	22.44	21
10	16QAM	1	0	19.76	19.83	19.76	
10	16QAM	1	25	20.02	20.04	20.00	
10	16QAM	1	49	19.71	19.63	19.64	23
10	16QAM	25	0	21.55	21.62	21.40	
10	16QAM	25	12	21.49	21.55	21.31	
10	16QAM	25	25	21.52	21.48	21.27	20
10	16QAM	50	0	21.56	21.57	21.37	
10	64QAM	1	0	18.71	18.77	18.79	
10	64QAM	1	25	18.91	18.92	18.97	22
10	64QAM	1	49	18.60	18.55	18.56	
10	64QAM	25	0	20.55	20.60	20.46	
10	64QAM	25	12	20.49	20.52	20.33	22
10	64QAM	25	25	20.50	20.47	20.31	
10	64QAM	50	0	20.53	20.55	20.43	
Channel				131/67	132/22	1326/7	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	20.56	20.64	20.49	22
5	QPSK	1	12	20.73	20.80	20.58	
5	QPSK	1	24	20.39	20.42	20.29	
5	QPSK	12	0	22.53	22.58	22.41	24
5	QPSK	12	7	22.55	22.58	22.46	
5	QPSK	12	13	22.50	22.52	22.40	
5	QPSK	25	0	22.53	22.54	22.38	21
5	16QAM	1	0	19.83	19.82	19.76	
5	16QAM	1	12	20.06	19.99	19.94	
5	16QAM	1	24	19.71	19.63	19.55	23
5	16QAM	12	0	21.56	21.58	21.33	
5	16QAM	12	7	21.56	21.61	21.37	
5	16QAM	12	13	21.51	21.54	21.31	20
5	16QAM	25	0	21.59	21.58	21.33	
5	64QAM	1	0	18.66	18.80	18.78	
5	64QAM	1	12	18.90	18.95	18.96	22
5	64QAM	1	24	18.57	18.54	18.56	
5	64QAM	12	0	20.59	20.61	20.45	
5	64QAM	12	7	20.61	20.60	20.47	22
5	64QAM	12	13	20.60	20.55	20.44	
5	64QAM	25	0	20.56	20.58	20.41	
Channel				131/67	132/22	1326/7	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	20.57	20.64	20.52	22
3	QPSK	1	8	20.77	20.84	20.57	
3	QPSK	1	14	20.44	20.48	20.22	
3	QPSK	8	0	22.47	22.52	22.36	24
3	QPSK	8	4	22.49	22.53	22.40	
3	QPSK	8	7	22.44	22.49	22.34	
3	QPSK	15	0	22.48	22.49	22.37	21
3	16QAM	1	0	19.82	19.81	19.83	
3	16QAM	1	8	20.03	20.00	19.92	
3	16QAM	1	14	19.77	19.66	19.61	23
3	16QAM	8	0	21.56	21.65	21.38	
3	16QAM	8	4	21.56	21.62	21.41	
3	16QAM	8	7	21.50	21.57	21.41	20
3	16QAM	15	0	21.51	21.55	21.34	
3	64QAM	1	0	18.71	18.81	18.73	
3	64QAM	1	8	18.87	18.94	18.85	22
3	64QAM	1	14	18.57	18.47	18.51	
3	64QAM	8	0	20.55	20.57	20.43	
3	64QAM	8	4	20.55	20.59	20.45	22
3	64QAM	8	7	20.52	20.53	20.43	
3	64QAM	15	0	20.50	20.53	20.39	
Channel				131/67	132/22	1326/7	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	20.49	20.65	20.53	22
1.4	QPSK	1	3	20.80	20.86	20.61	
1.4	QPSK	1	5	20.43	20.42	20.20	
1.4	QPSK	3	0	23.46	23.50	23.38	25
1.4	QPSK	3	1	23.52	23.53	23.43	
1.4	QPSK	3	3	23.47	23.51	23.35	
1.4	QPSK	6	0	22.49	22.50	22.40	24
1.4	16QAM	1	0	19.76	19.84	19.81	
1.4	16QAM	1	3	20.08	20.06	19.99	
1.4	16QAM	1	5	19.77	19.63	19.58	21
1.4	16QAM	3	0	22.39	22.48	22.30	
1.4	16QAM	3	1	22.45	22.51	22.37	
1.4	16QAM	3	3	22.39	22.46	22.32	23
1.4	16QAM	6	0	21.56	21.64	21.46	
1.4	64QAM	1	0	18.69	18.79	18.74	
1.4	64QAM	1	3	18.89	18.96	18.90	20
1.4	64QAM	1	5	18.55	18.51	18.51	
1.4	64QAM	3	0	21.54	21.65	21.42	
1.4	64QAM	3	1	21.64	21.65	21.47	23
1.4	64QAM	3	3	21.56	21.61	21.43	
1.4	64QAM	6	0	20.51	20.58	20.39	

Reduced Power Mode for Receiver On

Band 5 (Celluar Band) Part 22b(only on channel required)							
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq. 20450	Power Middle Ch. / Freq. 20525	Power High Ch. / Freq. 20600	Tune-up limit (dBm)
Channel				625	836.5	844	
Frequency (MHz)				20450	20525	20600	
10	QPSK	1	0	20.97	21.08	21.02	22.5
10	QPSK	1	25	21.19	21.40	21.44	
10	QPSK	1	49	21.05	21.03	21.02	
10	QPSK	25	0	21.12	21.16	21.24	
10	QPSK	25	12	21.08	21.14	21.23	22.5
10	QPSK	25	25	21.06	21.14	21.17	
10	QPSK	50	0	21.10	21.15	21.17	
10	16QAM	1	0	21.33	21.37	21.38	
10	16QAM	1	25	21.37	21.35	21.34	22.5
10	16QAM	1	49	21.33	21.25	21.39	
10	16QAM	25	0	21.12	21.10	21.21	
10	16QAM	25	12	21.09	21.12	21.22	
10	16QAM	25	25	21.08	21.16	21.14	22.5
10	16QAM	50	0	21.15	21.17	21.24	
10	64QAM	1	0	21.08	21.28	21.26	
10	64QAM	1	25	21.32	21.39	21.34	
10	64QAM	1	49	21.25	21.25	21.24	21.5
10	64QAM	25	0	20.04	20.14	20.16	
10	64QAM	25	12	20.07	20.11	20.17	
10	64QAM	25	25	20.11	20.12	20.13	
10	64QAM	50	0	20.08	20.14	20.17	
Channel				20425	20525	20625	
Frequency (MHz)				626.5	836.5	846.5	Tune-up limit (dBm)
5	QPSK	1	0	20.92	20.92	20.95	22.5
5	QPSK	1	12	21.10	21.16	21.21	
5	QPSK	1	24	20.89	20.88	20.91	
5	QPSK	12	0	20.97	20.99	21.13	
5	QPSK	12	7	21.08	21.11	21.17	22.5
5	QPSK	12	13	20.97	21.03	21.09	
5	QPSK	25	0	21.02	20.99	21.12	
5	16QAM	1	0	21.15	21.26	21.21	
5	16QAM	1	12	21.31	21.35	21.41	22.5
5	16QAM	1	24	21.25	21.20	21.24	
5	16QAM	12	0	21.03	21.03	21.05	
5	16QAM	12	7	20.99	21.07	21.11	
5	16QAM	12	13	20.98	21.06	21.12	22.5
5	16QAM	25	0	21.00	21.02	21.16	
5	64QAM	1	0	21.12	21.16	21.06	
5	64QAM	1	12	21.29	21.37	21.38	
5	64QAM	1	24	21.09	21.09	21.06	21.5
5	64QAM	12	0	20.00	20.06	20.06	
5	64QAM	12	7	20.04	20.12	20.11	
5	64QAM	12	13	20.07	20.11	20.12	
5	64QAM	25	0	19.97	20.03	20.16	
Channel				20415	20525	20635	
Frequency (MHz)				625.5	836.5	847.5	Tune-up limit (dBm)
3	QPSK	1	0	21.04	20.98	21.06	22.5
3	QPSK	1	8	20.98	20.99	21.05	
3	QPSK	1	14	21.00	21.02	21.04	
3	QPSK	8	0	20.97	21.06	21.09	
3	QPSK	8	4	21.09	21.08	21.16	22.5
3	QPSK	8	7	21.03	21.01	21.07	
3	QPSK	15	0	20.98	21.03	21.11	
3	16QAM	1	0	21.25	21.39	21.36	
3	16QAM	1	8	21.26	21.33	21.39	22.5
3	16QAM	1	14	21.30	21.34	21.32	
3	16QAM	8	0	21.06	21.15	21.13	
3	16QAM	8	4	21.07	21.15	21.18	
3	16QAM	8	7	21.03	21.07	21.17	22.5
3	16QAM	15	0	21.03	21.06	21.11	
3	64QAM	1	0	21.13	21.22	21.17	
3	64QAM	1	8	21.15	21.24	21.20	
3	64QAM	1	14	21.14	21.23	21.18	21.5
3	64QAM	8	0	20.08	20.07	20.14	
3	64QAM	8	4	20.08	20.08	20.21	
3	64QAM	8	7	19.99	20.07	20.11	
3	64QAM	15	0	20.05	20.07	20.12	
Channel				20407	20525	20643	
Frequency (MHz)				824.7	836.5	849.3	Tune-up limit (dBm)
1.4	QPSK	1	0	20.87	20.79	20.88	22.5
1.4	QPSK	1	3	21.06	21.08	21.13	
1.4	QPSK	1	5	20.84	20.83	20.88	
1.4	QPSK	3	0	20.91	20.90	21.03	
1.4	QPSK	3	1	21.05	20.98	21.11	22.5
1.4	QPSK	3	3	21.01	21.09	21.03	
1.4	QPSK	6	0	20.93	21.02	21.08	
1.4	16QAM	1	0	21.18	21.26	21.21	
1.4	16QAM	1	3	21.37	21.32	21.38	22.5
1.4	16QAM	1	5	21.12	21.19	21.17	
1.4	16QAM	3	0	20.96	20.97	21.03	
1.4	16QAM	3	1	20.99	20.99	21.06	
1.4	16QAM	3	3	21.01	21.03	21.09	22.5
1.4	16QAM	6	0	20.94	21.06	21.09	
1.4	64QAM	1	0	21.05	21.00	21.02	
1.4	64QAM	1	3	21.28	21.32	21.35	
1.4	64QAM	1	5	21.11	20.96	21.09	21.5
1.4	64QAM	3	0	19.96	20.07	20.06	
1.4	64QAM	3	1	19.97	20.07	20.14	
1.4	64QAM	3	3	20.00	20.03	20.09	
1.4	64QAM	6	0	19.93	20.03	20.03	21.5

Reduced Power Mode for Hotspot On

Band 2 (1900MHz Band)												
Part 24E												
BW (MHz)	Modulation	RB Size	RB Offset	Power Low Ch./Freq.	Power Middle Ch./Freq.	Power High Ch./Freq.	Tune-up limit (dBm)					
Channel												
Frequency (MHz)												
20	QPSK	1	0	18.91	18.92	18.90	20					
20	QPSK	1	49	18.92	19.04	19.40						
20	QPSK	1	99	18.90	18.91	18.90						
20	QPSK	50	0	18.93	19.02	19.19						
20	QPSK	50	24	18.91	19.00	19.15	20					
20	QPSK	50	50	18.85	18.97	19.16						
20	QPSK	100	0	18.94	18.95	19.17						
20	16QAM	1	0	19.13	19.27	19.27						
20	16QAM	1	49	19.35	19.38	19.23	20					
20	16QAM	1	99	19.06	19.13	19.31						
20	16QAM	50	0	18.99	19.07	19.19						
20	16QAM	50	24	18.95	19.03	19.25						
20	16QAM	50	50	18.88	18.98	19.13	20					
20	16QAM	100	0	18.88	19.03	19.17						
20	64QAM	1	0	19.08	19.09	19.11						
20	64QAM	1	49	19.27	19.27	19.35						
20	64QAM	1	99	19.06	18.90	19.18	20					
20	64QAM	50	0	18.95	19.01	19.18						
20	64QAM	50	24	18.95	19.10	19.15						
20	64QAM	50	50	18.86	18.95	19.13						
20	64QAM	100	0	18.95	19.02	19.23	20					
Channel												
Frequency (MHz)												
15	QPSK	1	0	18.79	18.90	18.98	20		Time-up limit (dBm)			
15	QPSK	1	37	19.05	19.13	19.25						
15	QPSK	1	74	18.71	18.83	18.92						
15	QPSK	36	0	18.93	19.06	19.20						
15	QPSK	36	20	18.89	19.04	19.16	20					
15	QPSK	36	39	18.89	19.00	19.15						
15	QPSK	75	0	18.91	19.02	19.19						
15	16QAM	1	0	19.16	19.27	19.32						
15	16QAM	1	37	19.36	19.23	19.23	20					
15	16QAM	1	74	19.07	19.24	19.33						
15	16QAM	36	0	19.00	19.05	19.15						
15	16QAM	36	20	18.93	19.05	19.21						
15	16QAM	36	39	18.91	19.00	19.15	20					
15	16QAM	75	0	19.03	19.05	19.16						
15	64QAM	1	0	19.04	19.13	19.27						
15	64QAM	1	37	19.28	19.38	19.34						
15	64QAM	1	74	18.92	19.10	19.30	20					
15	64QAM	36	0	18.95	19.07	19.23						
15	64QAM	36	20	19.03	19.12	19.19						
15	64QAM	36	39	18.93	19.03	19.22						
15	64QAM	75	0	18.98	19.02	19.19	20					
Channel												
Frequency (MHz)												
10	QPSK	1	0	18.83	18.94	19.03	20		Time-up limit (dBm)			
10	QPSK	1	25	18.91	19.05	19.15						
10	QPSK	1	49	18.79	18.89	19.08						
10	QPSK	25	0	19.00	19.02	19.25						
10	QPSK	25	12	18.94	19.00	19.25	20					
10	QPSK	25	25	18.97	19.07	19.14						
10	QPSK	50	0	18.95	19.06	19.23						
10	16QAM	1	0	19.28	19.37	19.23						
10	16QAM	1	25	19.30	19.31	19.30	20					
10	16QAM	1	49	19.14	19.25	19.36						
10	16QAM	25	0	19.06	19.11	19.23						
10	16QAM	25	12	18.98	19.05	19.23						
10	16QAM	25	25	18.91	19.01	19.20	20					
10	16QAM	50	0	19.07	19.03	19.25						
10	64QAM	1	0	19.16	19.19	19.32						
10	64QAM	1	25	19.20	19.28	19.31						
10	64QAM	1	49	19.03	19.22	19.25	20					
10	64QAM	25	0	18.98	19.03	19.27						
10	64QAM	25	12	18.88	19.11	19.28						
10	64QAM	25	25	18.96	19.12	19.17						
10	64QAM	50	0	19.01	19.04	19.21	20					
Channel												
Frequency (MHz)												
5	QPSK	1	0	18.75	18.85	19.00	20		Time-up limit (dBm)			
5	QPSK	1	12	18.96	19.08	19.27						
5	QPSK	1	24	18.66	18.83	18.99						
5	QPSK	12	0	18.85	19.00	19.16						
5	QPSK	12	7	18.95	19.03	19.11	20					
5	QPSK	12	13	18.87	19.03	19.08						
5	QPSK	25	0	18.92	18.98	19.11						
5	16QAM	1	0	19.10	19.18	19.34						
5	16QAM	1	12	19.34	19.22	19.30	20					
5	16QAM	1	24	19.05	19.15	19.34						
5	16QAM	12	0	18.89	18.97	19.16						
5	16QAM	12	7	18.97	19.03	19.21						
5	16QAM	12	13	18.83	19.00	19.21	20					
5	16QAM	25	0	18.98	19.08	19.19						
5	64QAM	1	0	19.06	19.14	19.31						
5	64QAM	1	12	19.22	19.31	19.30						
5	64QAM	1	24	18.95	19.06	19.26	20					
5	64QAM	12	0	18.93	19.01	19.24						
5	64QAM	12	7	19.02	19.08	19.30						
5	64QAM	12	13	18.90	19.08	19.25						
5	64QAM	25	0	18.96	19.03	19.14	20					
Channel												
Frequency (MHz)												
3	QPSK	1	0	18.88	18.96	19.11	20		Time-up limit (dBm)			
3	QPSK	1	8	18.84	18.89	19.03						
3	QPSK	1	14	18.77	18.92	19.05						
3	QPSK	8	0	18.86	19.00	19.15						
3	QPSK	8	7	18.95	19.01	19.11	20					
3	QPSK	8	7	18.85	19.01	19.09						
3	QPSK	15	0	18.85	19.05	19.12						
3	16QAM	1	0	19.19	19.30	19.32						
3	16QAM	1	8	19.24	19.32	19.35	20					
3	16QAM	1	14	19.18	19.30	19.35						
3	16QAM	8	0	18.98	19.15	19.28						
3	16QAM	8	4	19.03	19.14	19.30						
3	16QAM	8	7	19.08	19.11	19.27	20					
3	16QAM	15	0	18.93	19.02	19.15						
3	64QAM	1	0	19.09	19.17	19.30						
3	64QAM	1	8	19.16	19.21	19.33						
3	64QAM	1	14	19.08	19.21	19.39	20					
3	64QAM	8	0	19.00	19.11	19.27						
3	64QAM	8	4	19.07	19.11	19.24						
3	64QAM	8	7	19.09	19.12	19.23						
3	64QAM	15	0	18.87	18.99	19.20	20					
Channel												
Frequency (MHz)												
1.4	QPSK	1	0	18.87	18.96	19.08	20		Time-up limit (dBm)			
1.4	QPSK	1	3	19.00	19.11	19.28						
1.4	QPSK	1	5	18.87	18.94	19.06						
1.4	QPSK	3	0	18.98	19.13	19.26						
1.4	QPSK	3	1	19.05	19.16	19.30	20					
1.4	QPSK	3	3	18.98	19.13	19.21						
1.4	QPSK	6	0	19.02	19.10	19.29						
1.4	16QAM	1	0	19.23	19.35	19.32						
1.4	16QAM	1	3	19.32	19.32	19.30	20					
1.4	16QAM	1	5	19.24	19.38	19.31						
1.4	16QAM						20					
1.4	16QAM	3	1	19.09	19.24	19.38						
1.4	16QAM	3	3	19.05	19.15	19.28	20					
1.4	16QAM	6	0	19.16	19.20	19.39						
1.4	64QAM	1	0	19.11	19.24	19.38	20					
1.4	64QAM	1	3	19.25	19.38	19.35						
1.4	64QAM	1	5	19.13	19.24	19.31	20					
1.4	64QAM	3	0	19.16	19.20	19.31						
1.4	64QAM	3	1	19.29	19.29	19.35	20					
1.4	64QAM	3	3	19.18	19.21	19.32						
1.4	64QAM	6	0	19.01	19.10	19.29	20					
1.4	64QAM											

Band 2 (1900MHz Band) Part 24E										
BW (MHz)	Modulation	RB Size	RB Offset	Power Loss Ch. / Freq.	Power Margin Ch. / Freq.	Power Margin Ch. / Freq.	Power Margin Ch. / Freq.	Tune-up limit (dBm)		
Channel										
Frequency (MHz)				1860	1880	1900				
20	QPSK	1	0	20.84	20.91	20.80		22		
20	QPSK	1	48	20.88	20.95					
20	QPSK	1	96	20.81	20.81	20.86		22		
20	QPSK	50	0	20.90	21.01	21.14				
20	QPSK	50	24	20.86	20.96	21.12		22		
20	QPSK	50	50	20.76	20.90	21.10				
20	QPSK	100	0	20.87	20.93	21.12		22		
20	16QAM	1	0	21.03	21.25	21.24				
20	16QAM	1	48	21.23	21.24	21.16		22		
20	16QAM	1	96	21.00	21.05	21.26				
20	16QAM	50	0	20.97	20.98	21.16		22		
20	16QAM	50	24	20.92	20.93	21.23				
20	16QAM	50	50	20.82	20.96	21.07		22		
20	16QAM	100	0	20.86	20.95	21.11				
20	64QAM	1	0	21.00	20.99	21.07		22		
20	64QAM	1	48	21.15	21.24	21.32				
20	64QAM	1	96	20.97	20.94	21.13		22		
20	64QAM	50	0	20.90	20.93	21.14				
20	64QAM	50	24	20.92	21.00	21.05		22		
20	64QAM	50	50	20.83	20.88	21.04				
20	64QAM	100	0	20.87	20.92	21.20		22		
Channel										
Frequency (MHz)				1867.5	1885	1902.5			Tune-up limit (dBm)	
15	QPSK	1	0	20.77	20.85	20.95		22		
15	QPSK	1	37	21.01	21.03	21.21				
15	QPSK	1	74	20.61	20.74	20.87		22		
15	QPSK	36	0	20.88	21.02	21.18				
15	QPSK	36	20	20.62	21.01	21.07		22		
15	QPSK	36	39	20.83	20.94	21.10				
15	QPSK	75	0	20.88	20.88	21.12		22		
15	16QAM	1	0	21.12	21.19	21.30				
15	16QAM	1	37	21.23	21.18	21.14		22		
15	16QAM	1	74	20.97	21.21	21.26				
15	16QAM	36	0	20.90	20.97	21.11		22		
15	16QAM	36	20	20.86	20.96	21.13				
15	16QAM	36	39	20.84	20.98	21.07		22		
15	16QAM	75	0	20.88	21.03	21.06				
15	64QAM	1	0	20.99	21.06	21.18		22		
15	64QAM	1	37	21.18	21.31	21.24				
15	64QAM	1	74	20.87	21.08	21.23		22		
15	64QAM	36	0	20.91	20.99	21.13				
15	64QAM	36	20	20.98	21.06	21.09		22		
15	64QAM	36	39	20.89	21.06	21.19				
15	64QAM	75	0	20.90	20.99	21.18		22		
Channel										
Frequency (MHz)				1865	1885	1905			Tune-up limit (dBm)	
10	QPSK	1	0	20.76	20.80	20.93		22		
10	QPSK	1	25	20.85	21.03	21.14				
10	QPSK	1	49	20.77	20.82	21.01		22		
10	QPSK	25	0	20.92	20.93	21.15				
10	QPSK	25	12	20.90	20.91	21.18		22		
10	QPSK	25	25	20.81	21.00	21.06				
10	QPSK	50	0	20.85	21.03	21.15		22		
10	16QAM	1	0	21.27	21.32	21.16				
10	16QAM	1	25	21.20	21.21	21.29		22		
10	16QAM	1	49	21.09	21.19	21.31				
10	16QAM	25	0	21.01	21.01	21.17		22		
10	16QAM	25	12	20.92	21.04	21.14				
10	16QAM	25	25	20.90	21.07	21.13		22		
10	16QAM	50	0	20.94	20.93	21.18				
10	64QAM	1	0	21.06	21.12	21.25		22		
10	64QAM	1	25	21.10	21.21	21.30				
10	64QAM	1	49	21.01	21.16	21.16		22		
10	64QAM	25	0	20.96	20.93	21.24				
10	64QAM	25	12	20.95	21.02	21.25		22		
10	64QAM	25	25	20.82	21.09	21.13				
10	64QAM	50	0	21.00	21.03	21.18		22		
Channel										
Frequency (MHz)				1862.5	1880	1917.5			Tune-up limit (dBm)	
5	QPSK	1	0	20.66	20.80	20.91		22		
5	QPSK	1	12	20.88	21.01	21.25				
5	QPSK	1	24	20.63	20.73	20.96		22		
5	QPSK	12	0	20.84	20.98	21.15				
5	QPSK	12	7	20.94	21.01	21.05		22		
5	QPSK	12	13	20.83	21.00	21.03				
5	QPSK	25	0	20.85	21.04	21.07		22		
5	16QAM	1	0	21.01	21.09	21.28				
5	16QAM	1	12	21.30	21.13	21.28		22		
5	16QAM	1	24	21.03	21.13	21.32				
5	16QAM	12	0	20.87	20.93	21.13		22		
5	16QAM	12	7	20.96	20.96	21.14				
5	16QAM	12	13	20.76	20.96	21.05		22		
5	16QAM	25	0	20.82	21.04	21.08				
5	64QAM	1	0	21.05	21.11	21.24		22		
5	64QAM	1	12	21.19	21.30	21.26				
5	64QAM	1	24	20.92	21.02	21.23		22		
5	64QAM	12	0	20.88	20.93	21.22				
5	64QAM	12	7	20.93	21.06	21.21		22		
5	64QAM	12	13	20.86	21.06	21.13				
5	64QAM	25	0	20.88	20.96	21.04		22		
Channel										
Frequency (MHz)				1861.5	1880	1904.5			Tune-up limit (dBm)	
3	QPSK	1	0	20.75	20.94	21.06		22		
3	QPSK	1	8	20.76	20.87	20.98				
3	QPSK	1	14	20.76	20.82	21.00		22		
3	QPSK	8	0	20.81	20.99	21.12				
3	QPSK	8	4	20.85	20.91	21.10		22		
3	QPSK	8	7	20.81	20.98	21.09				
3	QPSK	15	0	20.78	20.95	21.17		22		
3	16QAM	1	0	21.09	21.25	21.30				
3	16QAM	1	8	21.17	21.26	21.32		22		
3	16QAM	1	14	21.17	21.27	21.33				
3	16QAM	8	0	20.97	21.09	21.21		22		
3	16QAM	8	4	20.98	21.04	21.20				
3	16QAM	8	7	20.90	21.09	21.21		22		
3	16QAM	15	0	20.85	21.05	21.13				
3	64QAM	1	0	21.00	21.16	21.22		22		
3	64QAM	1	8	21.08	21.19	21.24				
3	64QAM	1	14	21.03	21.12	21.33		22		
3	64QAM	8	0	20.91	21.02	21.23				
3	64QAM	8	4	20.92	21.10	21.14		22		
3	64QAM	8	7	20.90	21.10	21.19				
3	64QAM	15	0	20.84	20.92	21.10		22		
Channel										
Frequency (MHz)				1860.7	1880	1903.3			Tune-up limit (dBm)	
1.4	QPSK	1	0	20.85	20.86	21.04		22		
1.4	QPSK	1	3	20.90	21.10	21.26				
1.4	QPSK	1	5	20.81	20.89	21.04		22		
1.4	QPSK	3	0	20.96	21.10	21.21				
1.4	QPSK	3	1	20.97	21.10	21.27		22		
1.4	QPSK	3	3	20.96	21.24	21.17				
1.4	QPSK	6	0	21.00	21.08	21.25		22		
1.4	16QAM	1	0	21.15	21.27	21.25				
1.4	16QAM	1	3	21.29	21.27	21.30		22		
1.4	16QAM	1	5	21.21	21.31	21.21				
1.4	16QAM	3	0	20.99	21.12	21.23		22		
1.4	16QAM	3	1	21.07	21.21	21.32				
1.4	16QAM	3	3	21.05	21.16	21.28		22		
1.4	16QAM	6	0	21.09	21.15	21.30				
1.4	64QAM	1	0	21.07	21.14	21.34		22		
1.4	64QAM	1	3	21.21	21.28	21.31				
1.4	64QAM	1	5	21.09	21.23	21.22		22		
1.4	64QAM	3	0	21.11	21.15	21.22				
1.4	64QAM	3	1	21.23	21.22	21.31		22		
1.4	64QAM	3	3	21.09	21.20	21.26				
1.4	64QAM	6	0	20.93	21.03	21.22		22		
Channel										
Frequency (MHz)				1860.7	1880	1903.3			Tune-up limit (dBm)	
1.4	QPSK	1	0	20.85	20.86	21.04		24		
1.4	QPSK	1	3	20.90	21.10	21.26				
1.4	QPSK	1	5	20.81	20.89	21.04		24		
1.4	QPSK	3	0	20.96	21.10	21.21				
1.4	QPSK	3	1	20.97	21.10	21.27		24		
1.4	QPSK	3	3	20.96	21.24	21.17				
1.4	QPSK	6	0	21.00	21.08	21.25		24		
1.4	16QAM	1	0	21.15	21.27	21.25				
1.4	16QAM	1	3	21.29	21.27	21.30		24		
1.4	16QAM	1	5	21.21	21.31	21.21				
1.4	16QAM	3	0	20.99	21.12	21.23		24		
1.4	16QAM	3	1	21.07	21.21	21.32				
1.4	16QAM	3	3	21.05	21.16	21.28		24		
1.4	16QAM	6	0	21.09	21.15	21.30				
1.4	64QAM	1	0	21.07	21.14	21.34		24		
1.4	64QAM	1	3	21.21	21.28	21.31				
1.4	64QAM	1	5	21.09	21.23	21.22		24		
1.4	64QAM	3	0	21.11	21.15	21.22				
1.4	64QAM	3	1	21.23	21.22	21.31		24		
1.4	64QAM	3	3	21.09	21.20	21.26				
1.4	64QAM	6	0	20.93	21.03	21.22		24		
Channel										
Frequency (MHz)				1860.7	1880	1903.3			Tune-up limit (dBm)	
1.4	QPSK	1	0	20.75	20.87	20.99		24		
1.4	QPSK	1	3	20.99	23.04	23.03				
1.4	QPSK	1	5	22.69	22.74	22.73		24		
1.4	QPSK	3	0	20.96	21.10	21.21				
1.4	QPSK	3	1	20.97	21.10	21.27		24		
1.4	QPSK	3	3	20.96	21.24	21.17				
1.4	QPSK	6	0	21.00	21.08					



2CA DL Full Power

Configure	CA List	PCC							SCC				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq.	Channel		RB	RB Offset	Band	(MHz)	Freq.	Channel	Tx. Power (dBm)	Tx. Power (dBm)
Inter-Band	CA_2A-12A	Band 2	20M	1900	19100	QPSK	1	49	Band 12	10M	737.5	5095	24.06	24.30
		Band 12	10M	707.5	23095	QPSK	25	12	Band 2	20M	1960	900	23.19	23.26
	CA_12A-30A	Band 12	10M	707.5	23095	QPSK	25	12	Band 30	10M	2355	9820	23.19	23.26
		Band 30	10M	2310	27710	QPSK	25	12	Band 12	10M	737.5	5095	21.08	21.15
	CA_12A-66A	Band 12	10M	707.5	23095	QPSK	25	12	Band 66	20M	2155	66886	23.19	23.26
		Band 66	20M	1745	132322	QPSK	50	0	Band 12	10M	737.5	5095	22.56	22.78



2CA DL Hotspot on

Configure	CA List	PCC								SCC				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA	
		Band	(MHz)	Freq.	Channel		RB	RB	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power	
				(MHz)			Offset				(MHz)		(dBm)	(dBm)	
Inter-Band	CA_2A-12A	Band 2	20M	1900	19100	QPSK	1	49	Band 12	10M	737.5	5095	19.18	19.40	
	CA_12A-66A	Band 66	20M	1745	132322	QPSK	50	0	Band 12	10M	737.5	5095	19.61	19.70	



2CA DL Receiver Off

Configure	CA List	PCC							SCC				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq. (MHz)	Channel		RB	RB Offset	Band	(MHz)	Freq. (MHz)	Channel	Tx Power (dBm)	Tx Power (dBm)
Inter-Band	CA_2A-12A	Band 2	20M	1900	19100	QPSK	1	49	Band 12	10M	737.5	5095	21.21	21.35
	CA_12A-66A	Band 66	20M	1745	132322	QPSK	50	0	Band 12	10M	737.5	5095	21.48	21.60

Full Power

2.4GHz WLAN	Ant 1					
2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b 1Mbps	1	2412	16.80	18.00	100.00
		6	2437	17.00	18.00	
		11	2462	17.20	18.00	
	802.11g 6Mbps	1	2412	16.30	17.00	100.00
		6	2437	16.90	17.00	
		11	2462	15.90	17.00	
	802.11n-HT20 MCS0	1	2412	15.90	17.00	100.00
		6	2437	16.90	17.00	
		11	2462	14.80	16.50	

5GHz WLAN	Ant 1					
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	13.45	15.00	100.00
		40	5200	13.34	15.00	
		44	5220	13.54	15.00	
		48	5240	13.70	15.00	
	802.11n-HT20 MCS0	36	5180	12.85	14.00	100.00
		40	5200	13.02	14.00	
		44	5220	13.05	14.00	
		48	5240	13.15	14.00	
	802.11n-HT40 MCS0	36	5190	13.06	14.00	100.00
		46	5230	13.14	14.00	
	802.11ac-VHT20 MCS0	36	5180	12.84	14.00	100.00
		40	5200	12.81	14.00	
		44	5220	12.94	14.00	
		48	5240	13.14	14.00	
	802.11ac-VHT40 MCS0	36	5190	13.02	14.00	100.00
		46	5230	13.12	14.00	
	802.11ac-VHT80 MCS0	42	5210	13.50	14.00	100.00

5GHz WLAN	Ant 1					
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	13.85	15.00	100.00
		56	5280	13.94	15.00	
		60	5300	14.01	15.00	
		64	5320	13.91	15.00	
	802.11n-HT20 MCS0	52	5260	13.36	14.00	100.00
		56	5280	13.43	14.00	
		60	5300	13.48	14.00	
		64	5320	13.54	14.00	
	802.11n-HT40 MCS0	54	5270	13.42	14.00	100.00
		62	5310	12.88	14.00	
	802.11ac-VHT20 MCS0	52	5260	13.25	14.00	100.00
		56	5280	13.30	14.00	
		60	5300	13.41	14.00	
		64	5320	13.49	14.00	
	802.11ac-VHT40 MCS0	54	5270	13.26	14.00	100.00
		62	5310	12.86	14.00	
	802.11ac-VHT80 MCS0	58	5290	13.88	14.00	100.00

5GHz WLAN	Ant 1					
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	13.27	14.50	100.00
		116	5580	13.19	14.50	
		132	5660	13.16	14.50	
		140	5700	13.10	14.50	
	802.11n-HT20 MCS0	100	5500	12.95	14.50	100.00
		116	5580	13.10	14.50	
		132	5660	13.03	14.50	
		140	5700	13.06	14.50	
	802.11n-HT40 MCS0	102	5510	11.61	12.00	100.00
		110	5550	13.21	14.50	
		134	5670	13.06	14.00	
		100	5500	12.94	14.00	100.00
	802.11ac-VHT20 MCS0	116	5580	13.08	14.00	
		132	5660	13.92	14.50	
		140	5700	13.04	14.50	
		102	5510	11.51	12.00	100.00
	802.11ac-VHT40 MCS0	110	5550	13.14	14.00	
		134	5670	13.05	14.00	
		106	5530	13.84	15.00	

5GHz WLAN	Ant 1					
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	13.55	15.00	100.00
		157	5785	13.50	15.00	
		165	5825	13.68	15.00	
	802.11n-HT20 MCS0	149	5745	13.68	14.50	100.00
		157	5785	13.64	14.50	
		165	5825	13.60	14.50	
	802.11n-HT40 MCS0	151	5755	13.62	14.50	100.00
		159	5795	13.54	14.50	
		149	5745	13.62	14.50	100.00
	802.11ac-VHT20 MCS0	157	5785	13.47	14.50	
		165	5825	13.53	14.50	
	802.11ac-VHT40 MCS0	151	5755	13.47	14.50	100.00
		159	5795	13.42	14.50	
	802.11ac-VHT80 MCS0	155	5775	13.45	14.50	100.00

Reduced Power Mode for Receiver On

5GHz WLAN	Ant 1					
5.2GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	36	5180	11.34	13.00	100.00
		40	5200	11.37	13.00	
		44	5220	11.43	13.00	
		48	5240	11.59	13.00	
	802.11n-HT20 MCS0	36	5180	10.83	12.00	100.00
		40	5200	10.89	12.00	
		44	5220	11.03	12.00	
		48	5240	11.13	12.00	
	802.11n-HT40 MCS0	38	5190	11.03	12.00	100.00
		46	5230	11.11	12.00	
	802.11ac-VHT20 MCS0	36	5180	10.80	12.00	100.00
		40	5200	10.83	12.00	
		44	5220	10.90	12.00	
		48	5240	11.10	12.00	
	802.11ac-VHT40 MCS0	38	5190	11.01	12.00	100.00
		46	5230	11.11	12.00	
	802.11ac-VHT80 MCS0	42	5210	11.43	12.00	100.00

5GHz WLAN	Ant 1					
5.3GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	52	5260	11.74	13.00	100.00
		56	5280	11.87	13.00	
		60	5300	11.90	13.00	
		64	5320	11.80	13.00	
	802.11n-HT20 MCS0	52	5260	11.34	12.00	100.00
		56	5280	11.43	12.00	
		60	5300	11.46	12.00	
		64	5320	11.52	12.00	
	802.11n-HT40 MCS0	54	5270	11.39	12.00	100.00
		62	5310	10.85	12.00	
	802.11ac-VHT20 MCS0	52	5260	11.21	12.00	100.00
		56	5280	11.33	12.00	
		60	5300	11.37	12.00	
		64	5320	11.45	12.00	
	802.11ac-VHT40 MCS0	54	5270	11.25	12.00	100.00
		62	5310	10.85	12.00	
	802.11ac-VHT80 MCS0	58	5290	11.81	12.00	100.00

5GHz WLAN	Ant 1					
5.5GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	100	5500	11.16	12.50	100.00
		116	5580	11.08	12.50	
		132	5660	11.24	12.50	
		140	5700	9.42	10.00	
	802.11n-HT20 MCS0	100	5500	10.93	12.50	100.00
		116	5580	11.08	12.50	
		132	5660	11.10	12.50	
		140	5700	9.50	10.00	
	802.11n-HT40 MCS0	102	5510	9.58	10.00	100.00
		110	5550	11.18	12.50	
		134	5670	10.09	12.00	
	802.11ac-VHT20 MCS0	100	5500	10.90	12.00	100.00
		116	5580	11.04	12.00	
		132	5660	10.98	12.50	
		140	5700	9.39	10.00	
	802.11ac-VHT40 MCS0	102	5510	9.50	10.00	100.00
		110	5550	11.13	12.00	
		134	5670	10.10	12.00	
	802.11ac-VHT80 MCS0	106	5530	11.77	13.00	100.00

5GHz WLAN	Ant 1					
5.8GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11a 6Mbps	149	5745	11.48	13.00	100.00
		157	5785	11.43	13.00	
		166	5825	11.71	13.00	
	802.11n-HT20 MCS0	149	5745	11.70	12.50	100.00
		157	5785	11.86	12.50	
		166	5825	11.62	12.50	
	802.11n-HT40 MCS0	151	5755	11.63	12.50	100.00
		159	5795	11.55	12.50	
	802.11ac-VHT20 MCS0	149	5745	11.62	12.50	100.00
		157	5785	11.47	12.50	
		166	5825	11.53	12.50	
	802.11ac-VHT40 MCS0	151	5755	11.50	12.50	100.00
		159	5795	11.45	12.50	
	802.11ac-VHT80 MCS0	155	5775	11.42	12.50	100.00

Bluetooth BR/EDR

Mode	Channel	Frequency (MHz)	Average power (dBm)									Tune-up Limit
			Packet Type									
			DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5	
Bluetooth	CH 0	2402	9.90	9.40	9.40	7.50	6.70	6.50	7.30	6.60	6.40	10
	CH 39	2441	9.30	9.20	9.10	7.20	6.40	6.20	7.10	6.30	6.10	
	CH 78	2480	8.40	8.20	8.20	6.40	5.60	5.50	6.30	5.50	5.30	

duty cycle 76.74

Bluetooth LE

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	-3.28	-3.28
	CH 19	2440	-2.70	-2.70
	CH 39	2480	-3.90	-3.90
Tune-up Limit			-1	-1