



FCC RF Test Report

APPLICANT : Shenzhen Tinno Mobile Technology Corp.
EQUIPMENT : Watch
MODEL NAME : W568AA
FCC ID : XD6W568AA
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Apr. 01, 2025 ~ May 21, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	26
3.6 AC Conducted Emission Measurement.....	30
3.7 Antenna Requirements.....	32
4 LIST OF MEASURING EQUIPMENT	33
5 MEASUREMENT UNCERTAINTY	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR530516C	Rev. 01	Initial issue of report	Jun. 03, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.83 dB at 39.70 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.78 dB at 0.52 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Shenzhen Tinno Mobile Technology Corp.

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC

1.2 Manufacturer

Shenzhen Tinno Mobile Technology Corp.

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Watch
Model Name	W568AA
FCC ID	XD6W568AA
IMEI Code	Conducted: 865645070002080 Conduction: 865645070009598 Radiation: 865645070009895
HW Version	V1.0
SW Version	W568AAV01.05.10
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.54 dBm (0.1132 W) 802.11g : 21.22 dBm (0.1324 W) 802.11n HT20 : 21.25 dBm (0.1334 W)
99% Occupied Bandwidth	802.11b : 13.90MHz 802.11g : 16.87MHz 802.11n HT20 : 17.99MHz
Antenna Type / Gain	IFA Antenna type with gain -5.23 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

RSE Co-location Mode
802.11g CH11 2462MHz Tx + LTE Band 7 Link


Test Cases	
AC Conducted Emission	Mode 1 :LTE Band 5 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable(charging form adapter) + Battery + Charger
Remark: For Radiated Test Cases, The tests were performance with USB Cable, Adapter, Battery and charger.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

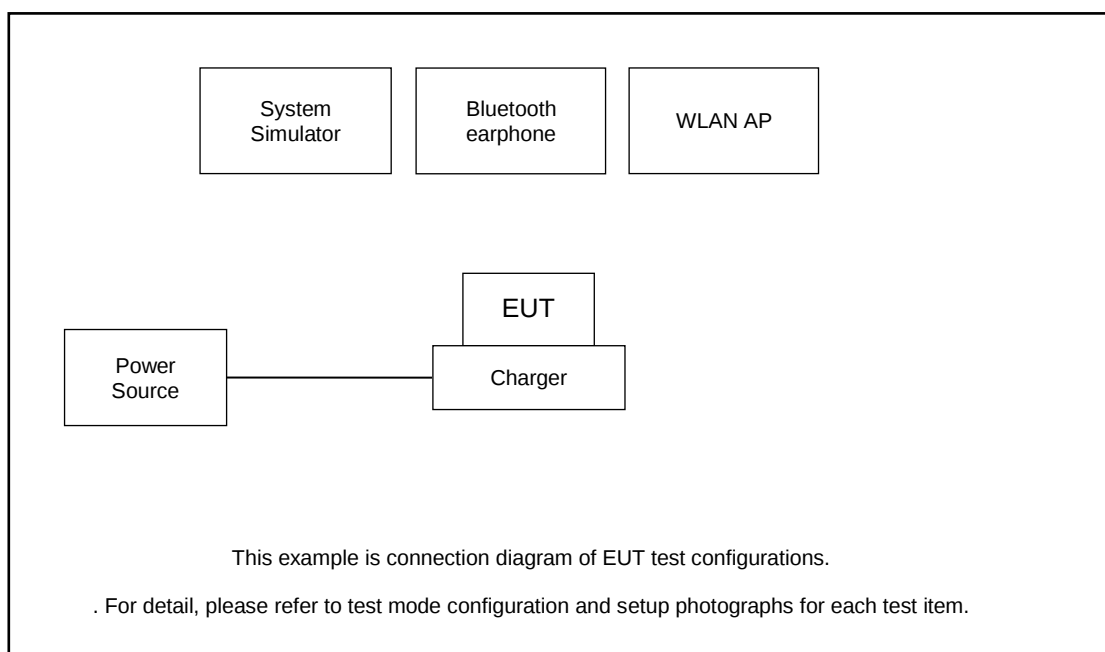

Radiated Emission:

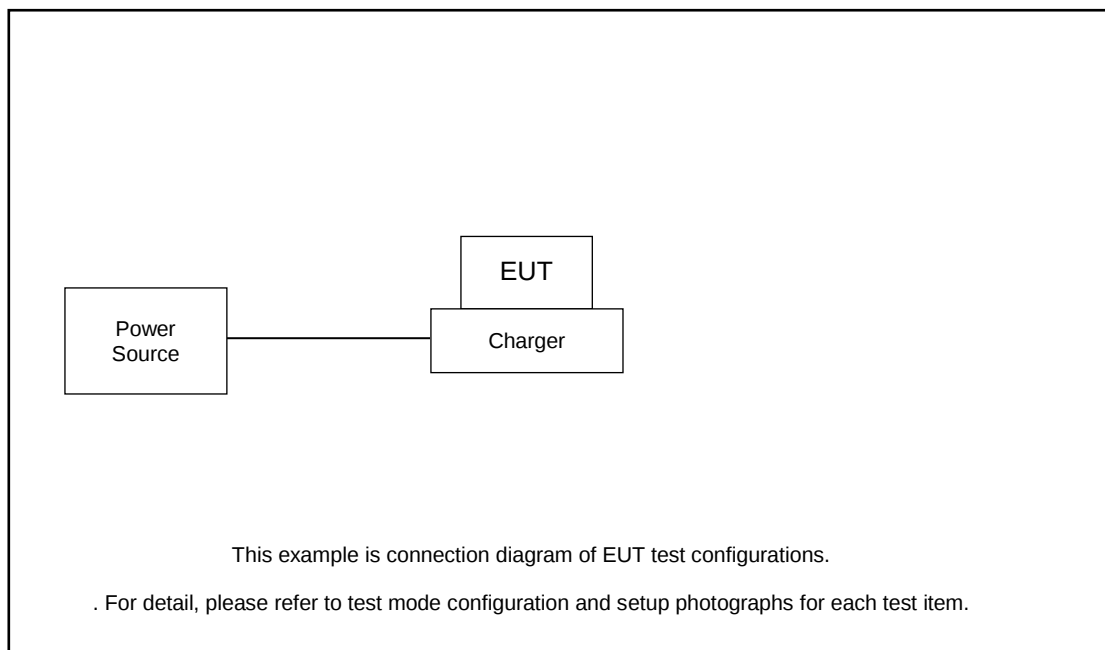

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.3 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 1.3 + 10 = 11.3 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

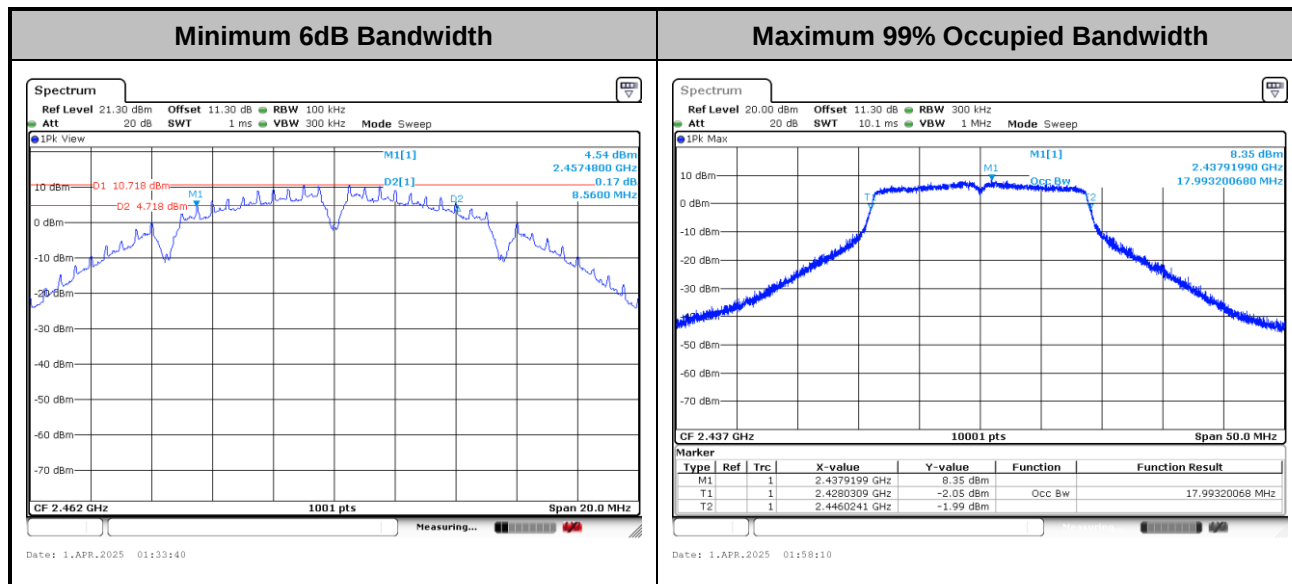

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

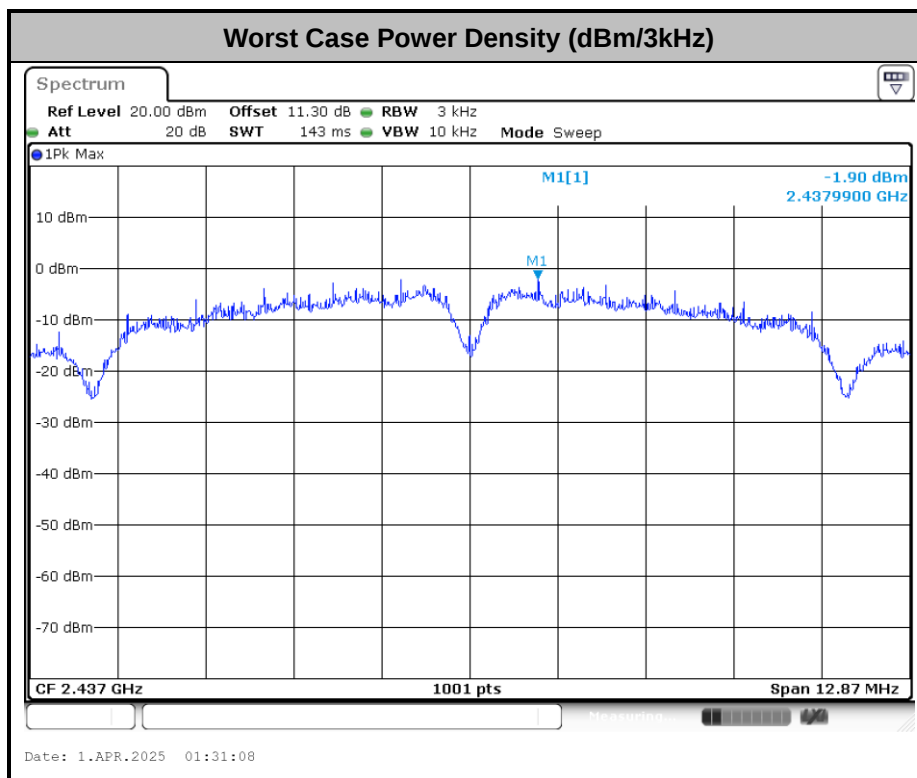

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Wen Shiwei	Temperature :	21~25°C
		Relative Humidity :	51~54%


Number of TX = 1, Ant. 1 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

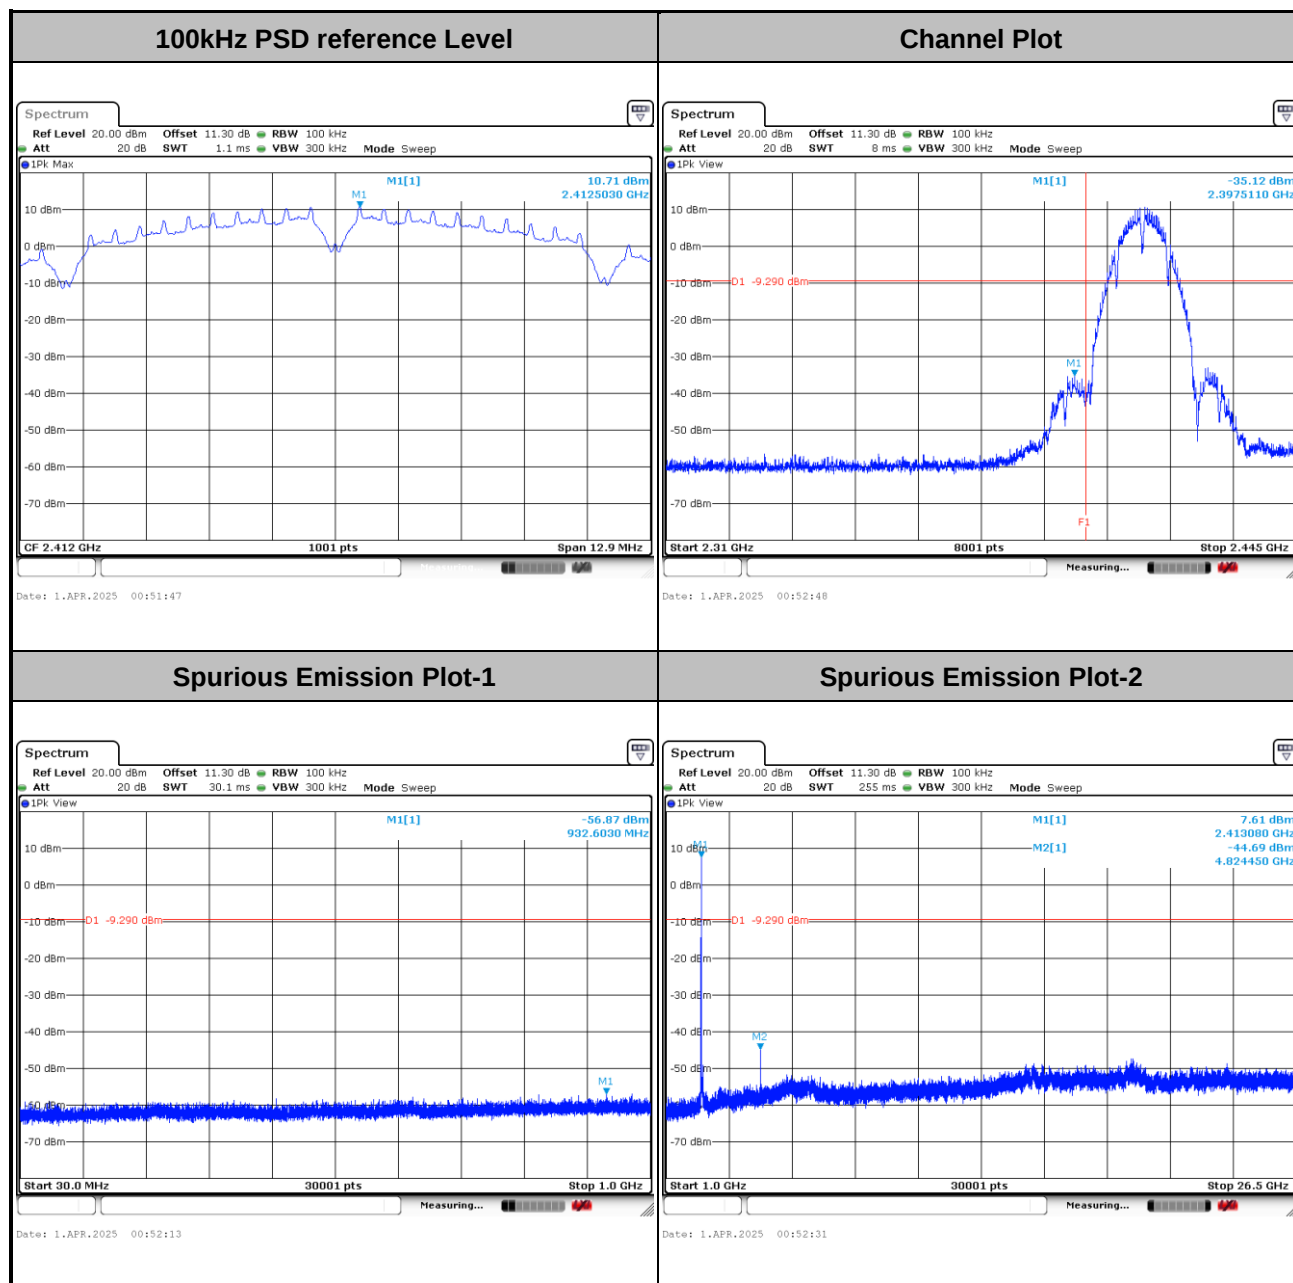




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

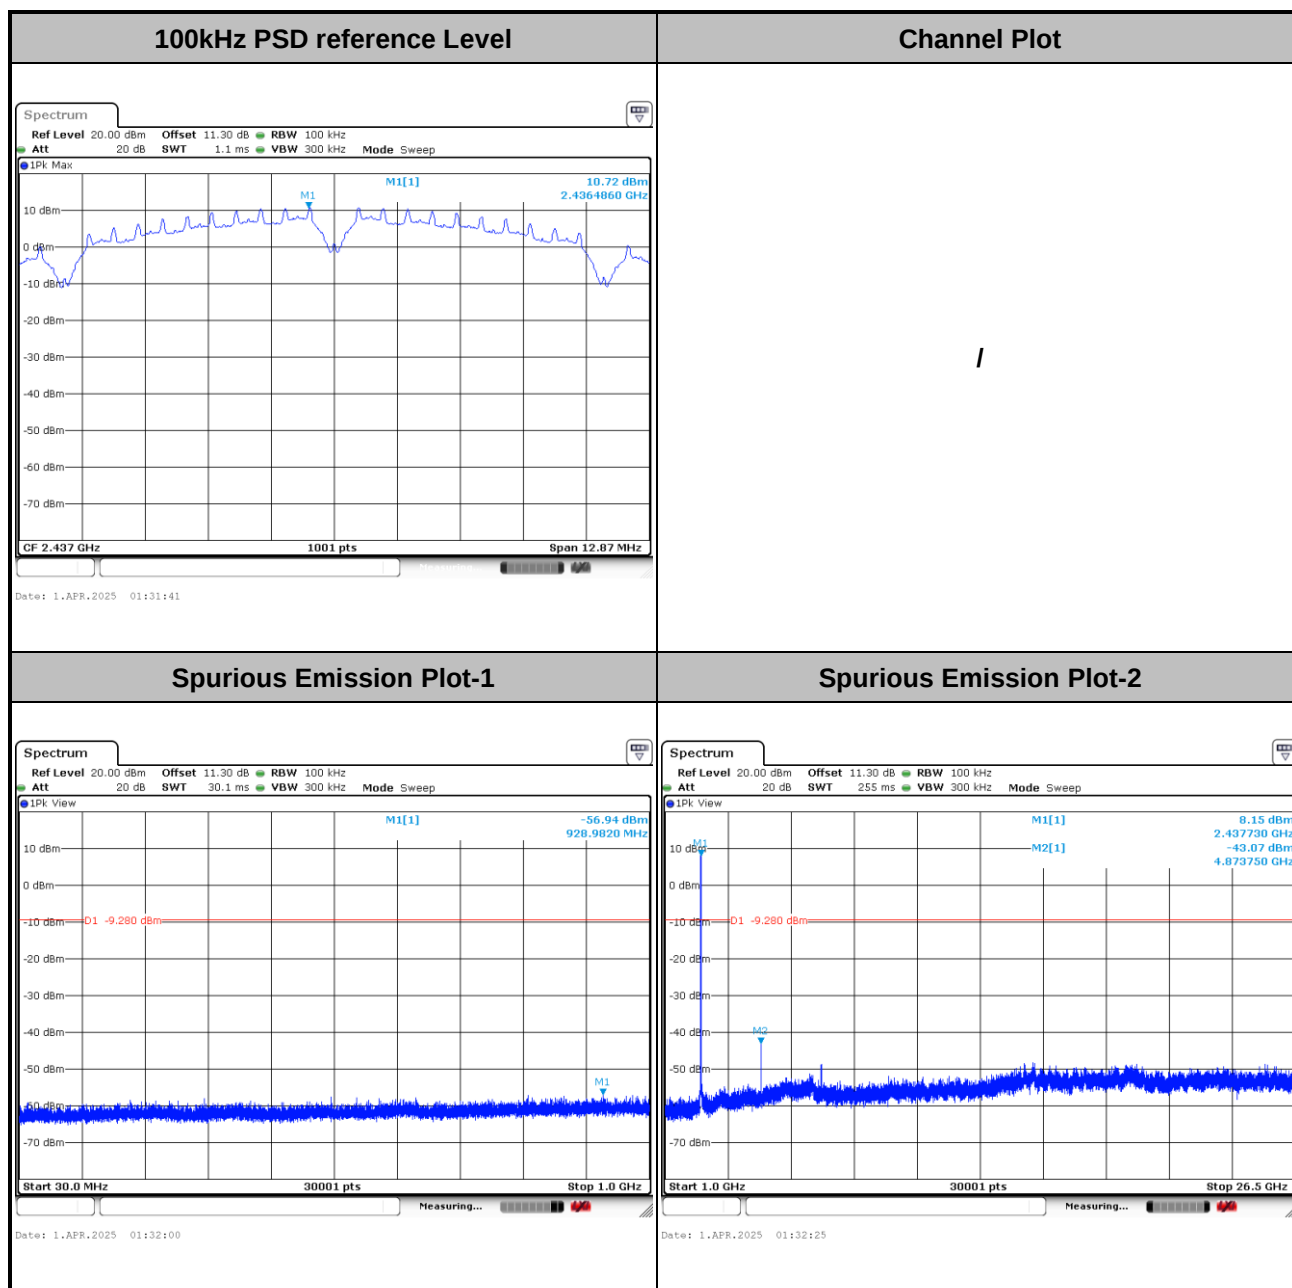




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----


100kHz PSD reference Level

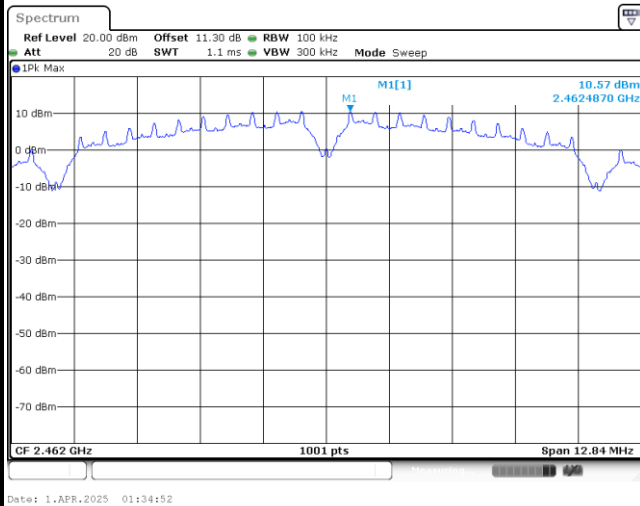


Channel Plot

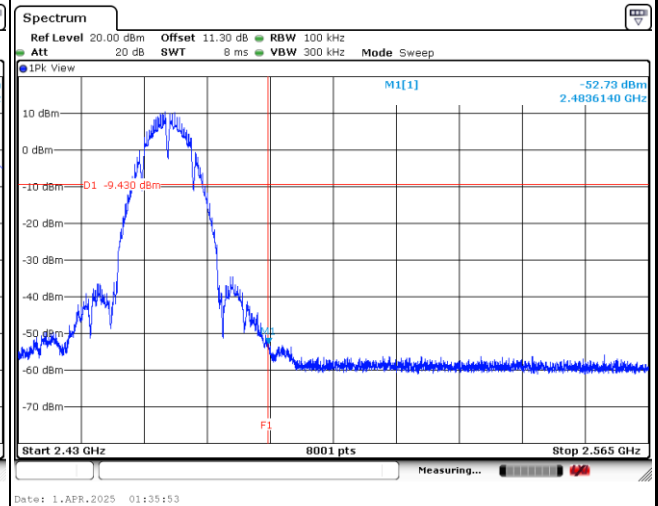

Spurious Emission Plot-1

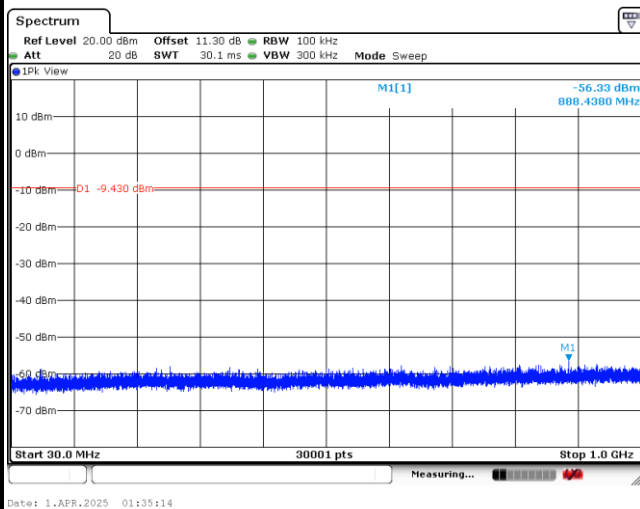


Spurious Emission Plot-2

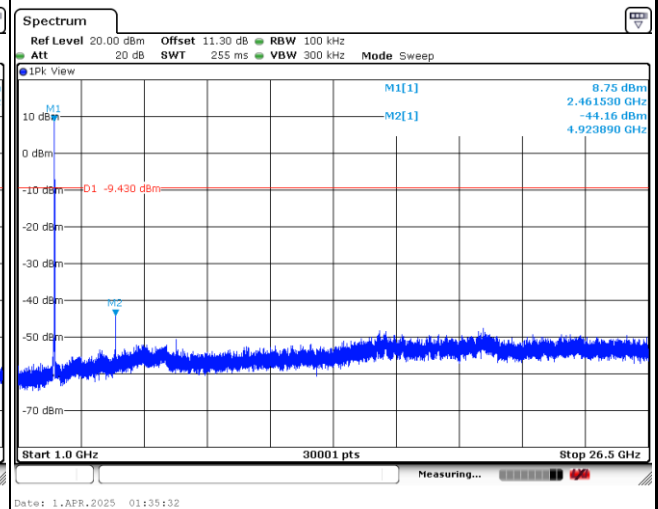




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

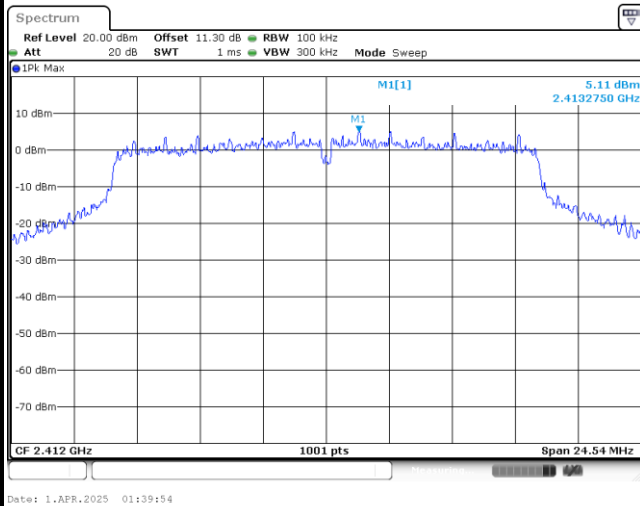


Channel Plot

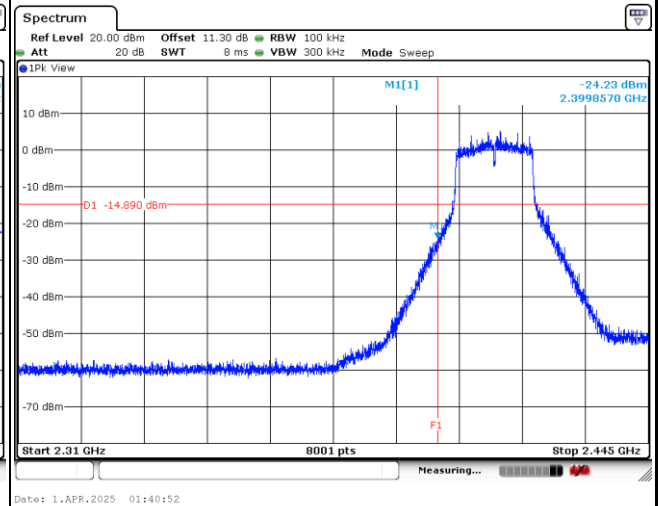

Spurious Emission Plot-1

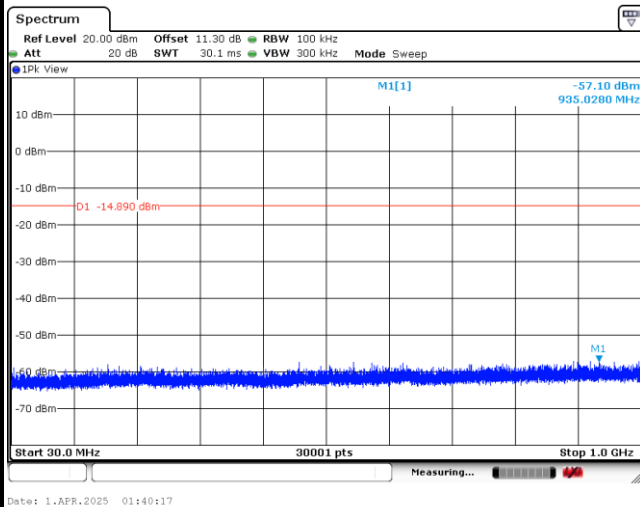


Spurious Emission Plot-2

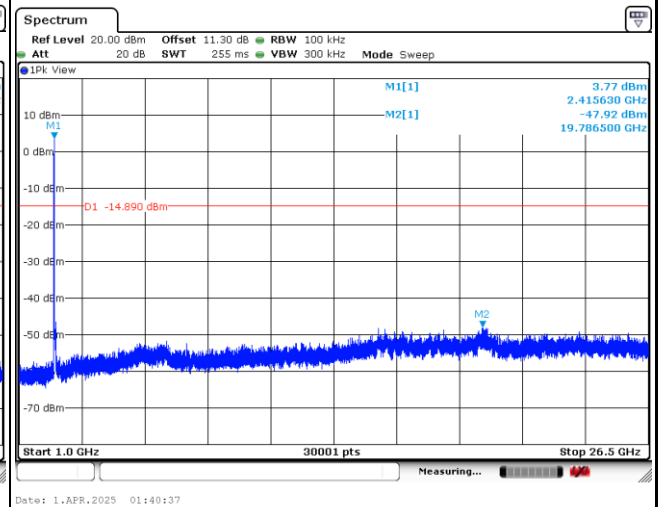




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

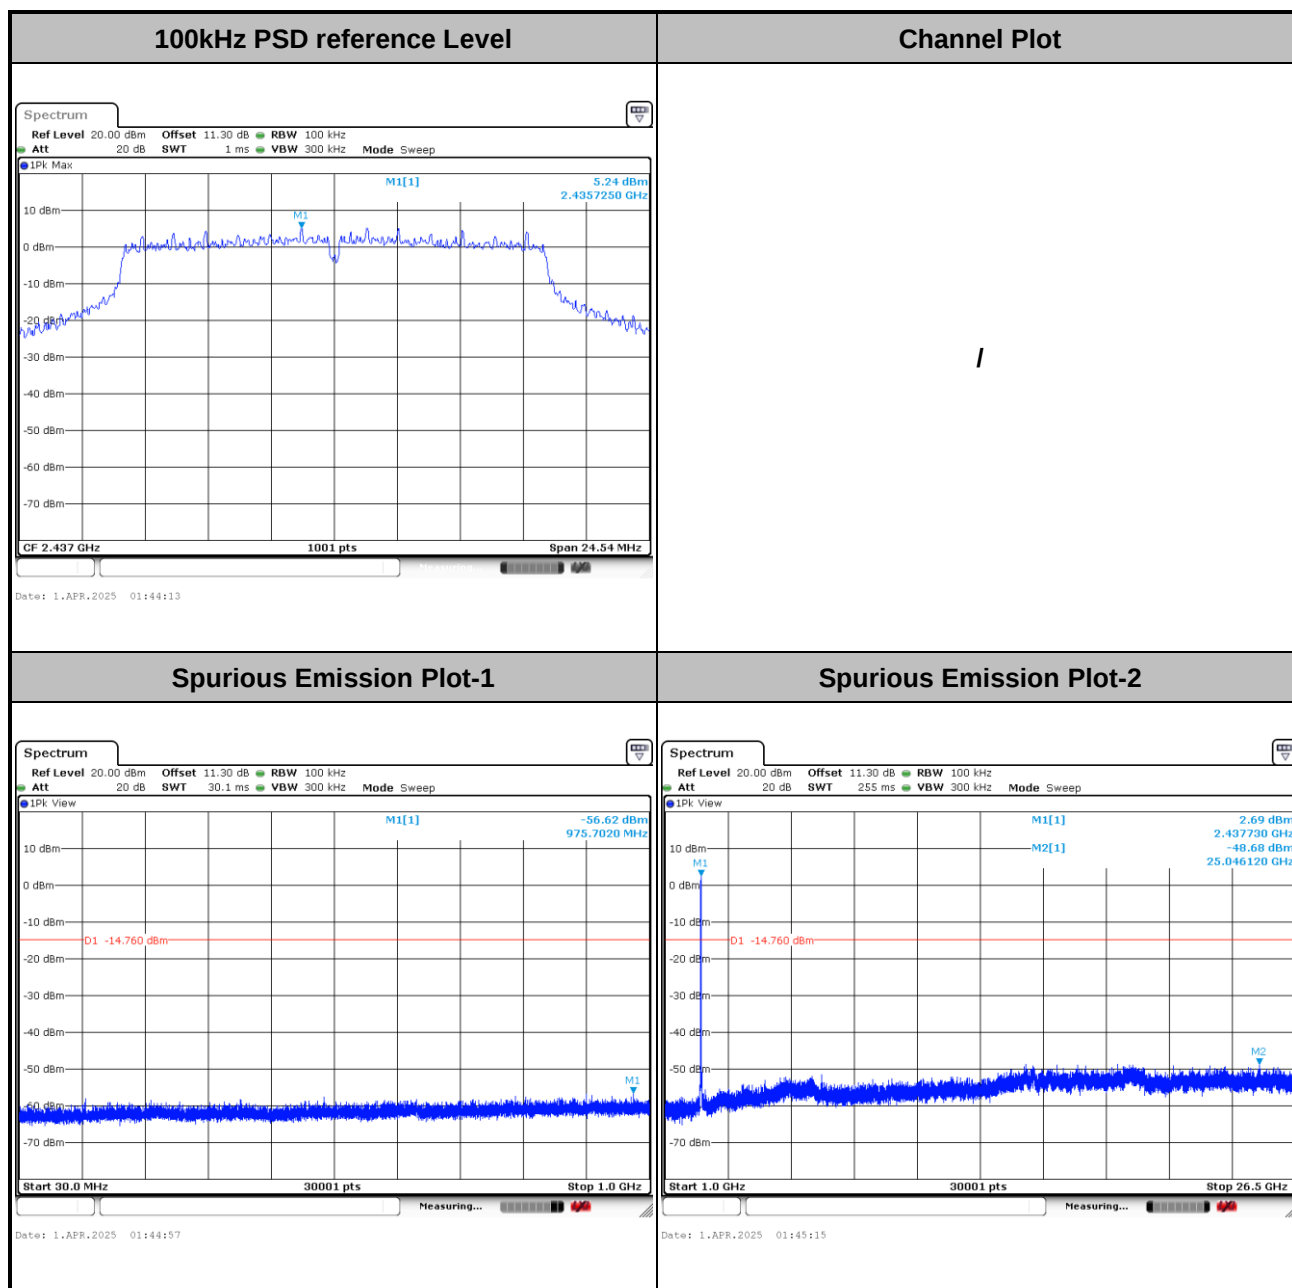




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

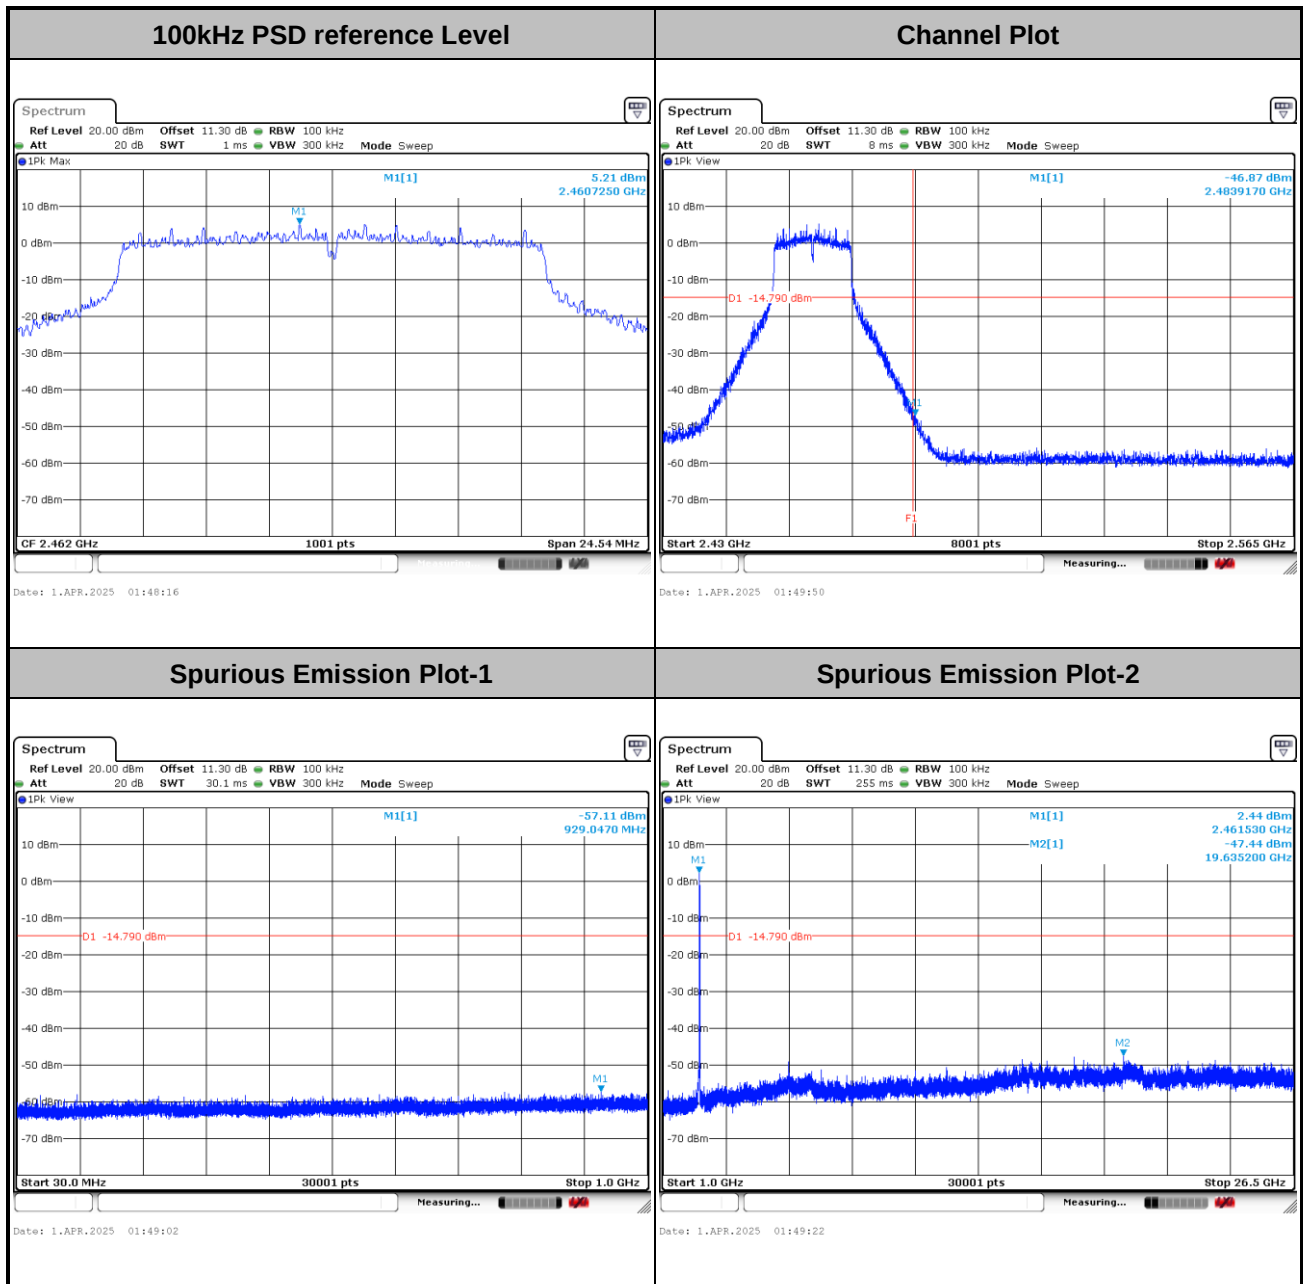




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----


100kHz PSD reference Level

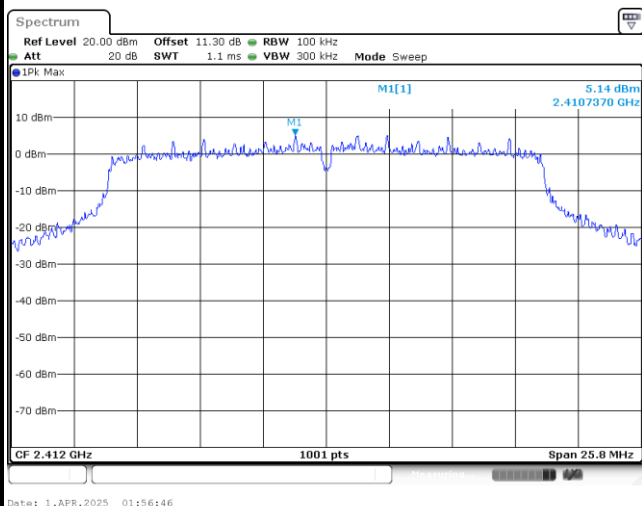


Channel Plot

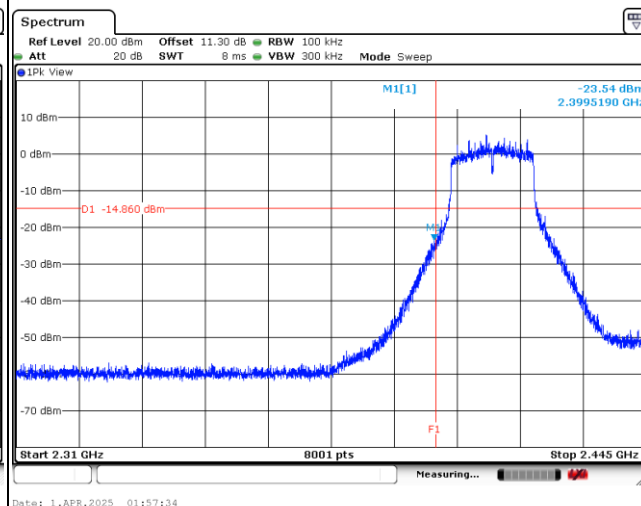

Spurious Emission Plot-1

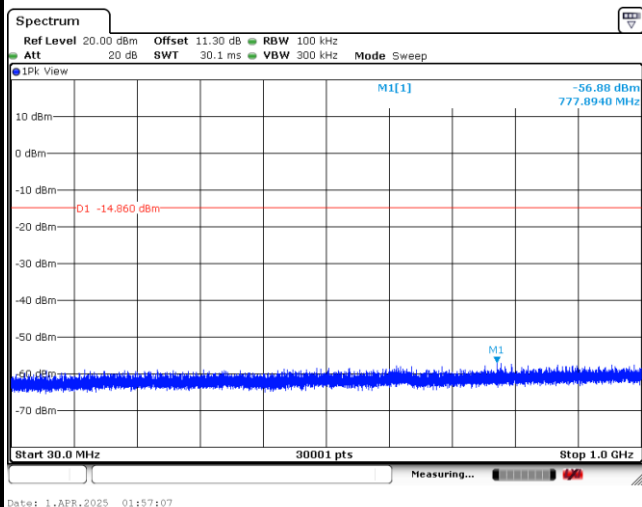


Spurious Emission Plot-2

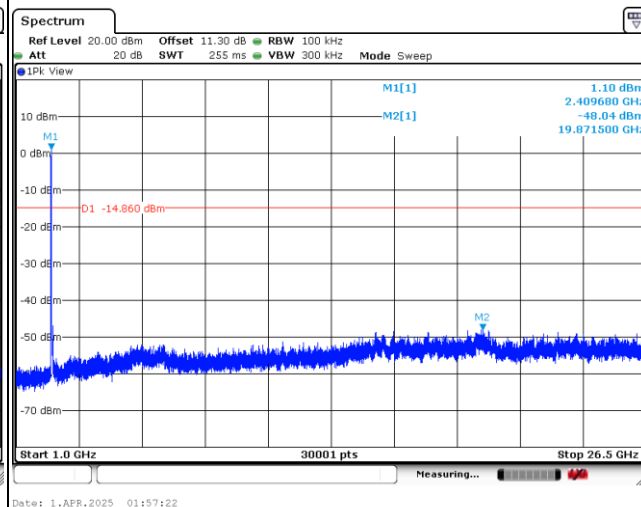



Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

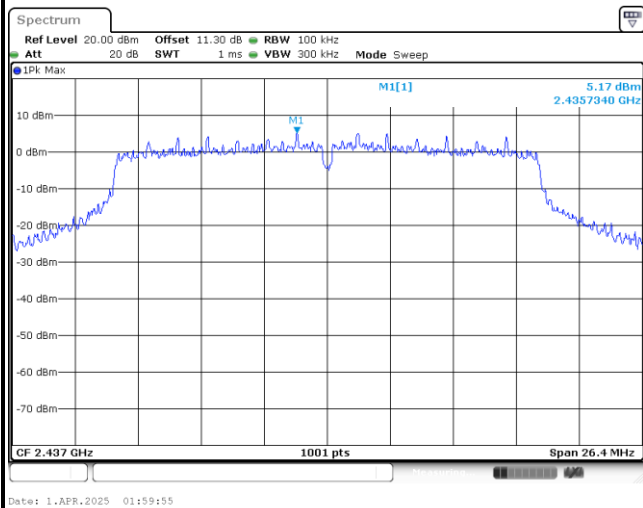


Channel Plot

/

Spurious Emission Plot-1

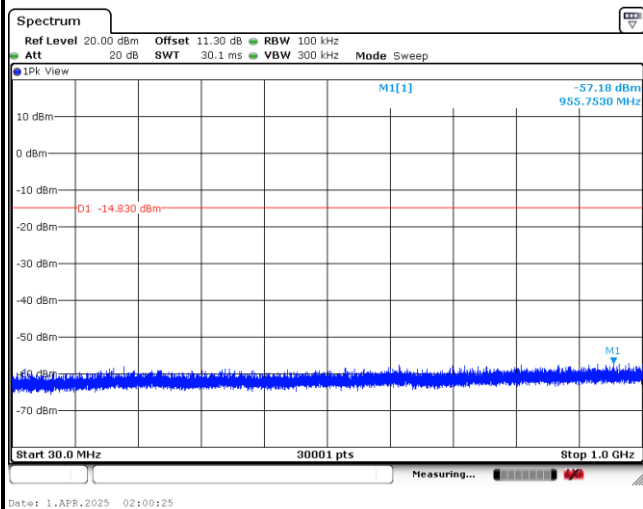


Spurious Emission Plot-2

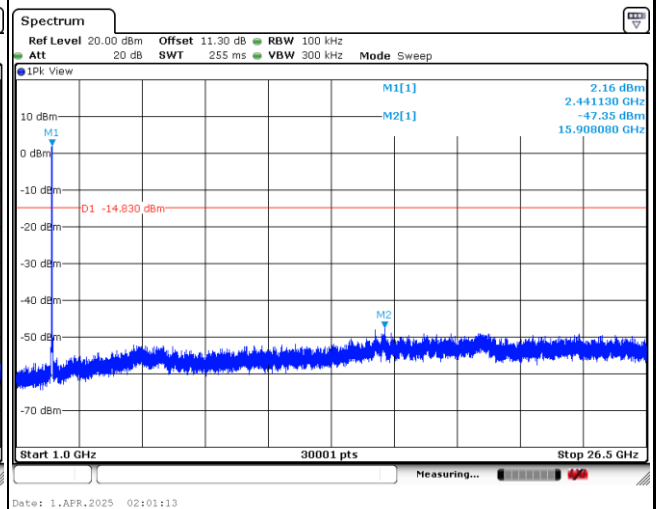



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

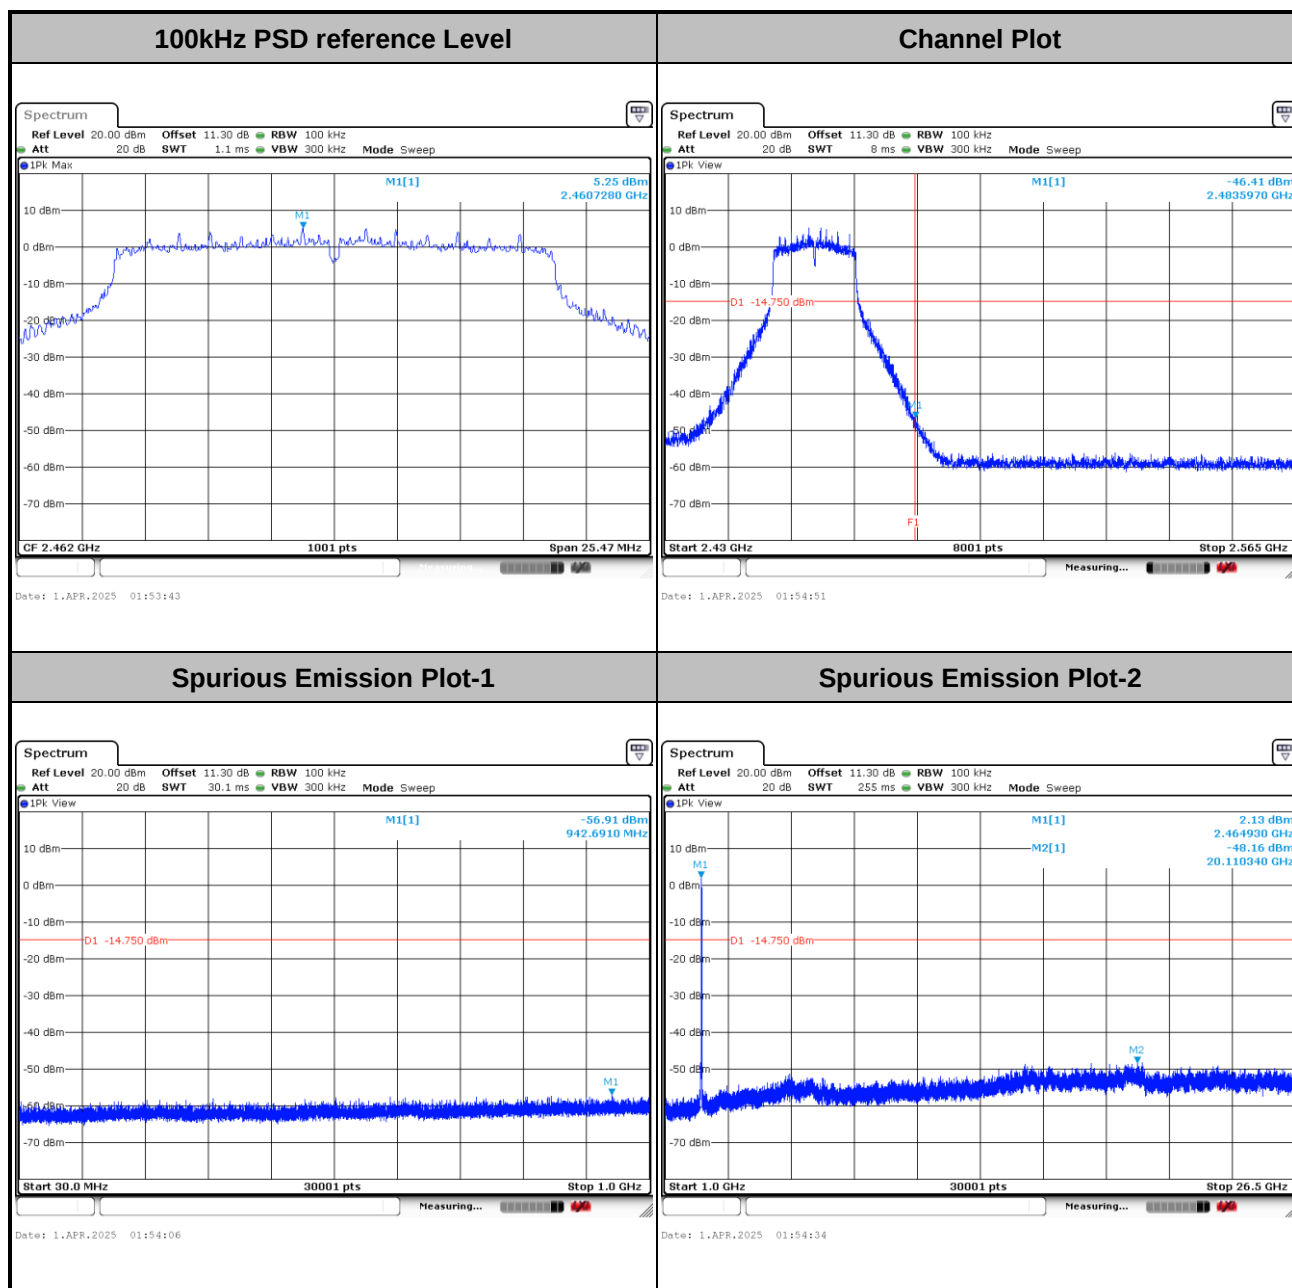

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

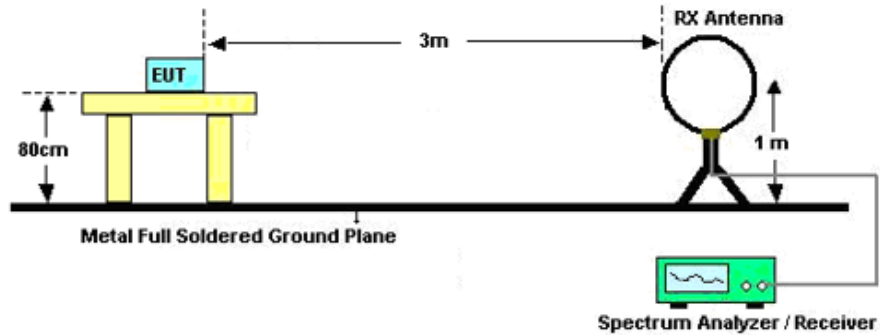

For radiated emissions from 30MHz to 1GHz

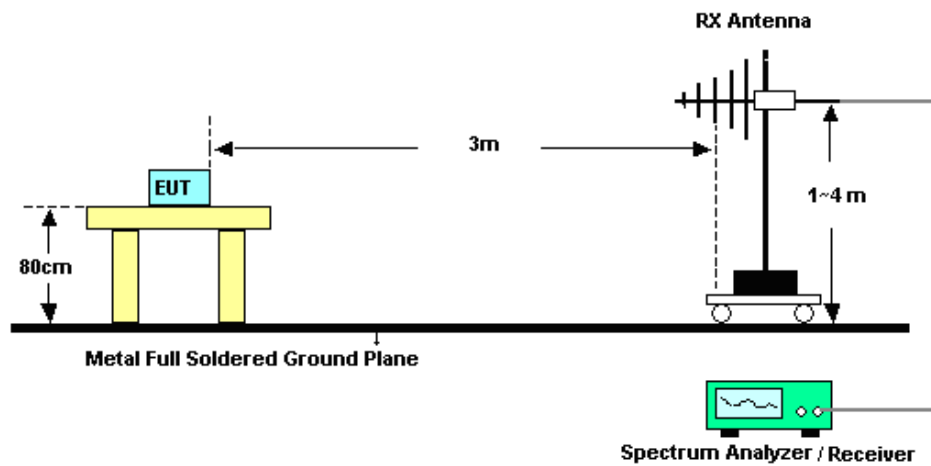

For radiated emissions above 1GHz

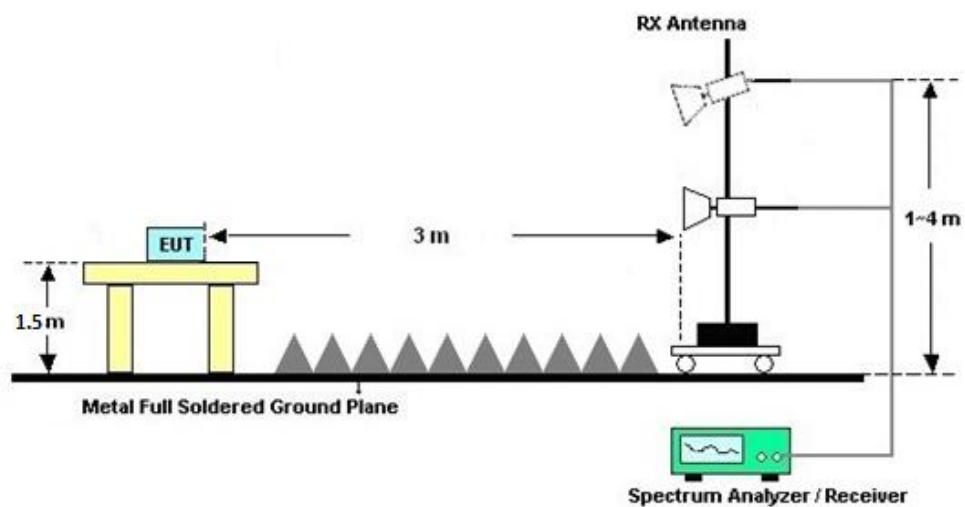

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

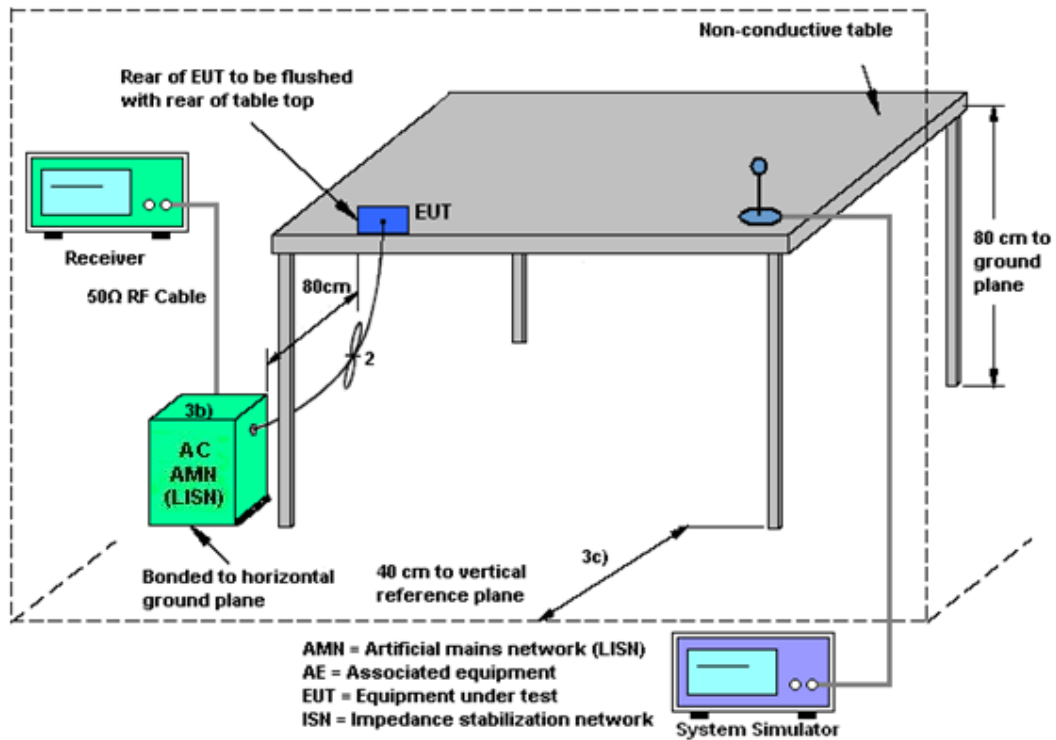

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Apr. 01, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Jan. 02, 2025	Apr. 01, 2025	Jan. 01, 2026	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	May 21, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	May 21, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	61601000 2470	100Vac~250Vac	Dec.25, 2024	May 21, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260 185	20Hz~26.5GHz	Dec. 25, 2024	May 13, 2025~ May 18, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150 213	10Hz~44GHz	Jul. 03, 2024	May 13, 2025~ May 18, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	May 13, 2025~ May 18, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	May 13, 2025~ May 18, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	May 13, 2025~ May 18, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	May 13, 2025~ May 18, 2025	Apr. 02, 2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	May 13, 2025~ May 18, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101 800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	May 13, 2025~ May 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270 105	0.5GHz~26.5Ghz	Oct. 14, 2024	May 13, 2025~ May 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 03, 2024	May 13, 2025~ May 18, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000 1985	N/A	Oct. 14, 2024	May 13, 2025~ May 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 13, 2025~ May 18, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 13, 2025~ May 18, 2025	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Wen Shiwei	Temperature:	21~25	°C
Test Date:	2025/4/1	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	13.83	8.60	0.50	Pass
11b	1Mbps	1	6	2437	13.88	8.58	0.50	Pass
11b	1Mbps	1	11	2462	13.90	8.56	0.50	Pass
11g	6Mbps	1	1	2412	16.84	16.36	0.50	Pass
11g	6Mbps	1	6	2437	16.85	16.36	0.50	Pass
11g	6Mbps	1	11	2462	16.87	16.36	0.50	Pass
HT20	MCS0	1	1	2412	17.95	17.20	0.50	Pass
HT20	MCS0	1	6	2437	17.99	17.60	0.50	Pass
HT20	MCS0	1	11	2462	17.91	16.98	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
					Ant 1	Ant 1
11b	1Mbps	1	1	2412	0.03	17.20
11b	1Mbps	1	6	2437	0.03	16.90
11b	1Mbps	1	11	2462	0.03	16.90
11g	6Mbps	1	1	2412	0.08	16.70
11g	6Mbps	1	6	2437	0.08	16.50
11g	6Mbps	1	11	2462	0.08	16.50
HT20	MCS0	1	1	2412	0.11	16.80
HT20	MCS0	1	6	2437	0.11	16.60
HT20	MCS0	1	11	2462	0.11	16.10

Setting
Ant 1
16.5
16.5
16.5
16.5
16.5
16.5
16.5
16

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	20.54	30.00	-5.23	15.31	36.00	Pass
11b	1Mbps	1	6	2437	20.23	30.00	-5.23	15.00	36.00	Pass
11b	1Mbps	1	11	2462	20.31	30.00	-5.23	15.08	36.00	Pass
11g	6Mbps	1	1	2412	21.22	30.00	-5.23	15.99	36.00	Pass
11g	6Mbps	1	6	2437	20.70	30.00	-5.23	15.47	36.00	Pass
11g	6Mbps	1	11	2462	20.92	30.00	-5.23	15.69	36.00	Pass
HT20	MCS0	1	1	2412	21.25	30.00	-5.23	16.02	36.00	Pass
HT20	MCS0	1	6	2437	20.89	30.00	-5.23	15.66	36.00	Pass
HT20	MCS0	1	11	2462	20.75	30.00	-5.23	15.52	36.00	Pass


Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-2.20	-6.90	8.00	Pass
11b	1Mbps	1	6	2437	-1.90	-6.90	8.00	Pass
11b	1Mbps	1	11	2462	-2.32	-6.90	8.00	Pass
11g	6Mbps	1	1	2412	-8.89	-6.90	8.00	Pass
11g	6Mbps	1	6	2437	-9.19	-6.90	8.00	Pass
11g	6Mbps	1	11	2462	-9.07	-6.90	8.00	Pass
HT20	MCS0	1	1	2412	-9.66	-6.90	8.00	Pass
HT20	MCS0	1	6	2437	-8.44	-6.90	8.00	Pass
HT20	MCS0	1	11	2462	-9.09	-6.90	8.00	Pass




Appendix B. AC Conducted Emission Test Results

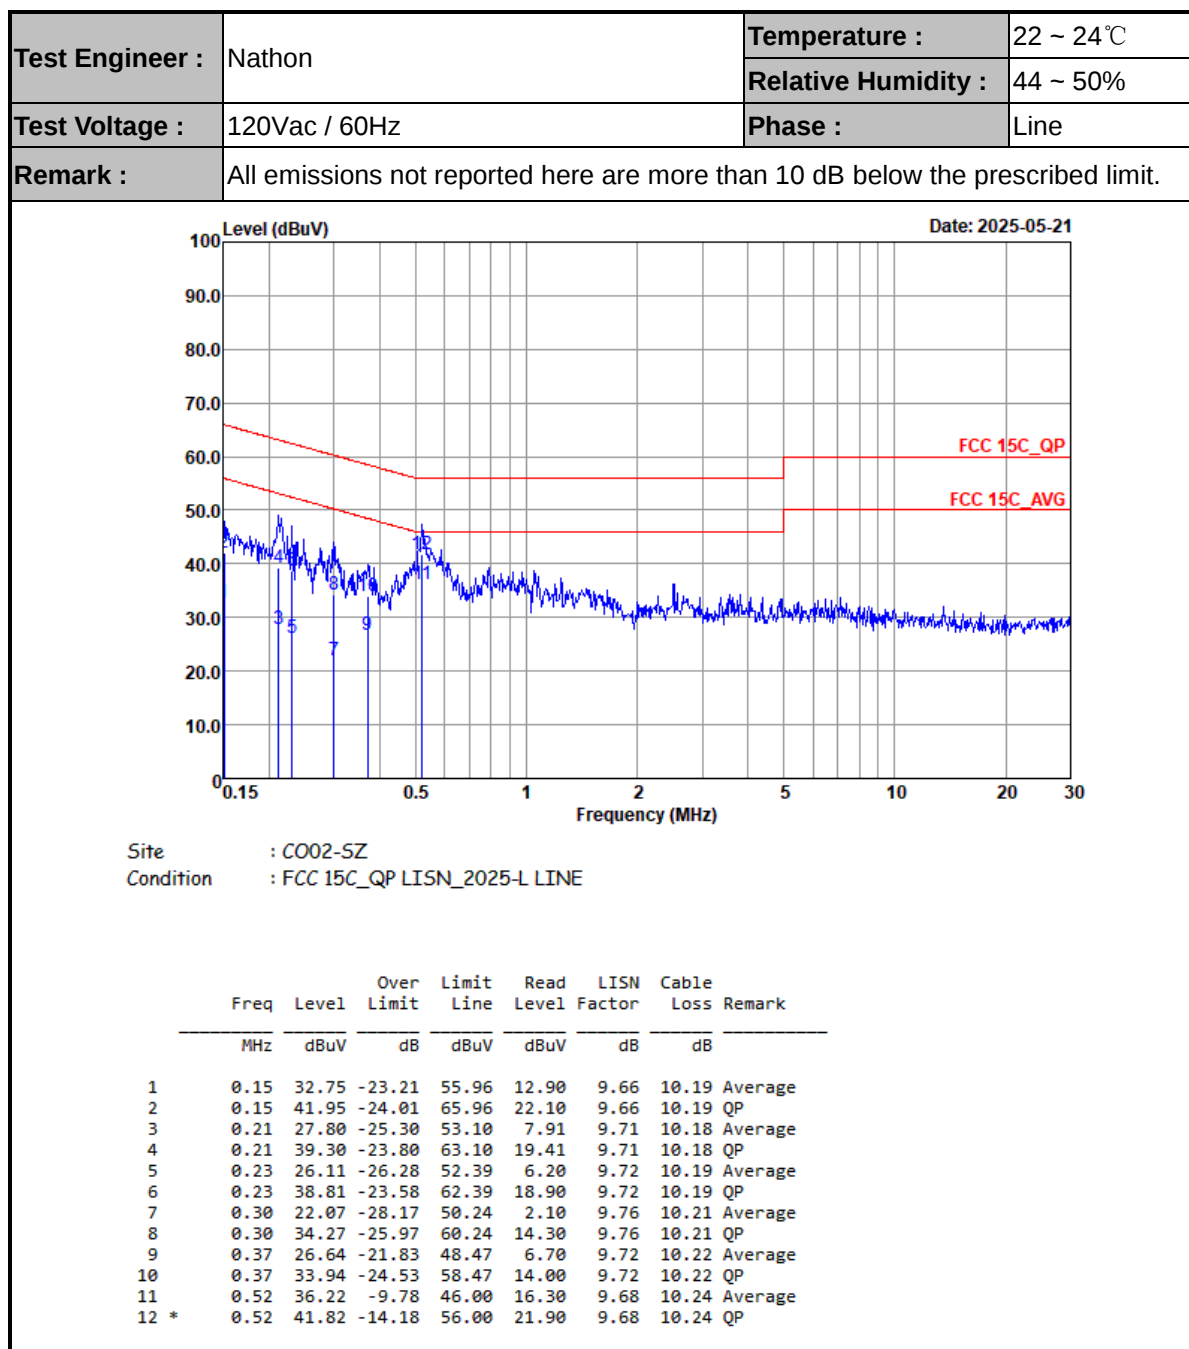



Test Engineer :	Nathon	Temperature :	22 ~ 24℃
		Relative Humidity :	44 ~ 50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

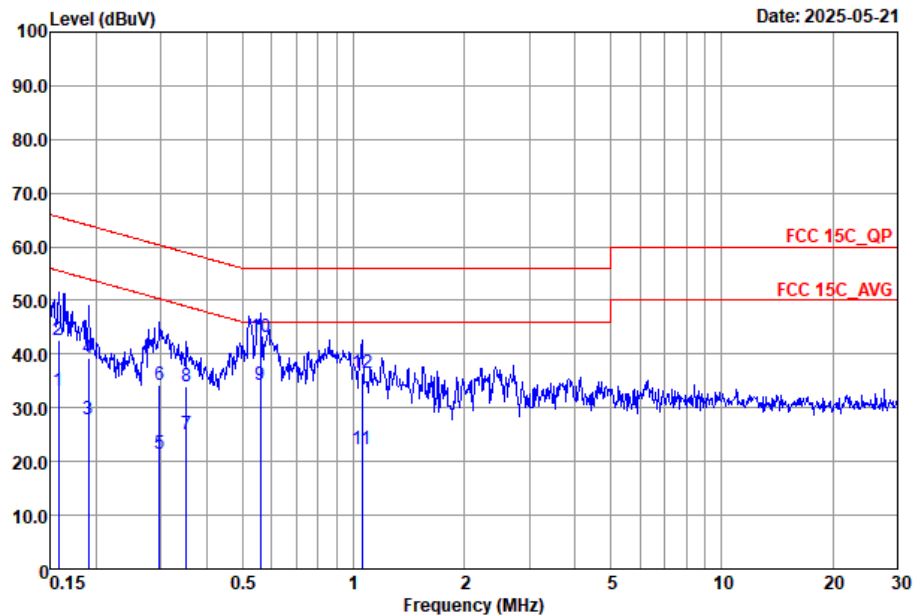

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	33.02	-22.54	55.56	13.20	9.63	10.19	Average
2	0.16	42.52	-23.04	65.56	22.70	9.63	10.19	QP
3	0.19	27.91	-26.11	54.02	7.90	9.83	10.18	Average
4	0.19	39.31	-24.71	64.02	19.30	9.83	10.18	QP
5	0.30	21.49	-28.83	50.32	1.40	9.88	10.21	Average
6	0.30	34.19	-26.13	60.32	14.10	9.88	10.21	QP
7	0.35	25.20	-23.71	48.91	5.39	9.59	10.22	Average
8	0.35	33.90	-25.01	58.91	14.09	9.59	10.22	QP
9	0.56	34.27	-11.73	46.00	14.40	9.63	10.24	Average
10 *	0.56	43.27	-12.73	56.00	23.40	9.63	10.24	QP
11	1.05	22.31	-23.69	46.00	2.40	9.68	10.23	Average
12	1.05	36.51	-19.49	56.00	16.60	9.68	10.23	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	HuaCong Liang	Relative Humidity :	50%
		Temperature :	20-22℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	2400-2483.5	802.11b	01	2412	1Mbps	-	-
Mode 13	2400-2483.5	802.11b	06	2437	1Mbps	-	-
Mode 14	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 15	2400-2483.5	802.11g	01	2412	6Mbps	-	-
Mode 16	2400-2483.5	802.11g	06	2437	6Mbps	-	-
Mode 17	2400-2483.5	802.11g	11	2462	6Mbps	-	-
Mode 18	2400-2483.5	802.11n HT20	01	2412	MCS0	-	-
Mode 19	2400-2483.5	802.11n HT20	06	2437	MCS0	-	-
Mode 20	2400-2483.5	802.11n HT20	11	2462	MCS0	-	-
Mode 21	2400-2483.5	802.11g	11	2462	6Mbps	-	LF
Mode 22	Co-location	802.11g	11	2462	6Mbps	-	-
Mode 22	Co-location	LTE B7 Link					

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
12	802.11b	01	2387.35	41.36	54.00	-12.64	V	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	44.90	74.00	-29.10	V	Peak	Pass	Harmonic
13	802.11b	06	-	-	-	-	-	-	-	Band Edge
	802.11b	06	7311.00	46.56	74.00	-27.44	H	Peak	Pass	Harmonic
14	802.11b	11	2483.51	39.11	54.00	-14.89	V	AVERAGE	Pass	Band Edge
	802.11b	11	7386.00	46.03	74.00	-27.97	H	Peak	Pass	Harmonic
15	802.11g	01	-	-	-	-	-	-	-	Band Edge
	802.11g	01	4824.00	44.17	74.00	-29.83	V	Peak	Pass	Harmonic
16	802.11g	06	-	-	-	-	-	-	-	Band Edge
	802.11g	06	7311.00	45.78	74.00	-28.22	V	Peak	Pass	Harmonic
17	802.11g	11	2483.55	49.59	54.00	-4.41	V	AVERAGE	Pass	Band Edge
17	802.11g	11	7386.00	46.27	74.00	-27.73	V	Peak	Pass	Harmonic
18	802.11n HT20	01	2389.95	48.40	54.00	-5.60	H	AVERAGE	Pass	Band Edge
18	802.11n HT20	01	4824.00	44.05	74.00	-29.95	V	Peak	Pass	Harmonic
19	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
19	802.11n HT20	06	7311.00	45.26	74.00	-28.74	V	Peak	Pass	Harmonic
20	802.11n HT20	11	2483.58	48.35	54.00	-5.65	V	AVERAGE	Pass	Band Edge
20	802.11n HT20	11	7386.00	45.71	74.00	-28.29	V	Peak	Pass	Harmonic
21	802.11g	11	39.70	36.17	40.00	-3.83	V	Peak	Pass	LF
22	802.11g	11	2483.52	48.29	54.00	-5.71	V	Average	Pass	Band Edge
22	802.11g	11	7386.00	44.81	74.00	-29.19	V	Peak	Pass	Harmonic



Mode	12																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>47.37</td><td>74.00</td><td>-26.63</td><td>42.54</td><td>30.60</td><td>6.87</td><td>32.64</td><td>170 350 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2389.82	47.37	74.00	-26.63	42.54	30.60	6.87	32.64	170 350 PEAK	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.46</td><td>-----</td><td>-----</td><td>98.59</td><td>30.62</td><td>6.89</td><td>32.64</td><td>170 350 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.46	-----	-----	98.59	30.62	6.89	32.64	170 350 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.82	47.37	74.00	-26.63	42.54	30.60	6.87	32.64	170 350 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	103.46	-----	-----	98.59	30.62	6.89	32.64	170 350 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.35</td><td>38.72</td><td>54.00</td><td>-15.28</td><td>33.91</td><td>30.60</td><td>6.86</td><td>32.65</td><td>170 350 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2387.35	38.72	54.00	-15.28	33.91	30.60	6.86	32.65	170 350 AVERAGE	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.06</td><td>-----</td><td>-----</td><td>96.17</td><td>30.63</td><td>6.89</td><td>32.63</td><td>170 350 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.06	-----	-----	96.17	30.63	6.89	32.63	170 350 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2387.35	38.72	54.00	-15.28	33.91	30.60	6.86	32.65	170 350 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	101.06	-----	-----	96.17	30.63	6.89	32.63	170 350 AVERAGE																																																																																	



Mode	12																																									
	Band Edge																																									
	2400-2483.5_802.11b_CH01_2412MHz																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-05-17 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2388.00</td><td>50.15</td><td>74.00</td><td>-23.85</td><td>45.33</td><td>30.60</td><td>6.86</td><td>32.64</td><td>130</td><td>175 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2388.00	50.15	74.00	-23.85	45.33	30.60	6.86	32.64	130	175 PEAK	Level (dBuV/m) Date: 2025-05-17 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>104.65</td><td>-----</td><td>-----</td><td>99.78</td><td>30.62</td><td>6.89</td><td>32.64</td><td>130</td><td>175 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2412.00	104.65	-----	-----	99.78	30.62	6.89	32.64	130	175 PEAK
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																
1 2388.00	50.15	74.00	-23.85	45.33	30.60	6.86	32.64	130	175 PEAK																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	104.65	-----	-----	99.78	30.62	6.89	32.64	130	175 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-05-17 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2387.35</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>36.55</td><td>30.60</td><td>6.86</td><td>32.65</td><td>130</td><td>175 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2387.35	41.36	54.00	-12.64	36.55	30.60	6.86	32.65	130	175 AVERAGE	Level (dBuV/m) Date: 2025-05-17 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>101.99</td><td>-----</td><td>-----</td><td>97.12</td><td>30.62</td><td>6.89</td><td>32.64</td><td>130</td><td>175 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1 2412.00	101.99	-----	-----	97.12	30.62	6.89	32.64	130	175 AVERAGE
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																	
1 2387.35	41.36	54.00	-12.64	36.55	30.60	6.86	32.65	130	175 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	101.99	-----	-----	97.12	30.62	6.89	32.64	130	175 AVERAGE																																	



Mode	12																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td>51.47</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4824.00	44.34	74.00	-29.66	51.47	35.30	10.16	52.59	---	---	Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>44.90</td><td>74.00</td><td>-29.10</td><td>52.03</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4824.00	44.90	74.00	-29.10	52.03	35.30	10.16	52.59	---	---	Peak
			Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	4824.00	44.34	74.00	-29.66	51.47	35.30	10.16	52.59	---	---	Peak																																																																																											
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	4824.00	44.90	74.00	-29.10	52.03	35.30	10.16	52.59	---	---	Peak																																																																																											







Mode	13																																																																																																																						
	Harmonic																																																																																																																						
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																						
Pol.	Horizontal										Vertical																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>45.60</td><td>74.00</td><td>-28.40</td><td>52.60</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>50.19</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	45.60	74.00	-28.40	52.60	35.35	10.27	52.62	---	---	Peak	2	7311.00	46.56	74.00	-27.44	50.19	36.58	12.01	52.22	---	---	Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.00</td><td>74.00</td><td>-30.00</td><td>51.00</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.38</td><td>74.00</td><td>-27.62</td><td>50.01</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.00	74.00	-30.00	51.00	35.35	10.27	52.62	---	---	Peak	2	7311.00	46.38	74.00	-27.62	50.01	36.58	12.01	52.22	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4874.00	45.60	74.00	-28.40	52.60	35.35	10.27	52.62	---	---	Peak																																																																																																												
2	7311.00	46.56	74.00	-27.44	50.19	36.58	12.01	52.22	---	---	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4874.00	44.00	74.00	-30.00	51.00	35.35	10.27	52.62	---	---	Peak																																																																																																												
2	7311.00	46.38	74.00	-27.62	50.01	36.58	12.01	52.22	---	---	Peak																																																																																																												





		14																																																																																	
Mode	Band Edge																																																																																		
	2400-2483.5_802.11b_CH11_2462MHz																																																																																		
Pol.	Horizontal										Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-05-17 PEAK_BE_74 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.27</td><td>47.47</td><td>74.00</td><td>-26.53</td><td>42.47</td><td>30.63</td><td>6.98</td><td>32.61</td><td>181</td><td>345</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2484.27	47.47	74.00	-26.53	42.47	30.63	6.98	32.61	181	345	PEAK	Level (dBuV/m) Date: 2025-05-17 PEAK_74 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.64</td><td>-----</td><td>-----</td><td>99.63</td><td>30.68</td><td>6.95</td><td>32.62</td><td>181</td><td>345</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	104.64	-----	-----	99.63	30.68	6.95	32.62	181	345	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2484.27	47.47	74.00	-26.53	42.47	30.63	6.98	32.61	181	345	PEAK																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	104.64	-----	-----	99.63	30.68	6.95	32.62	181	345	PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-05-17 AVG_BE_54 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>38.41</td><td>54.00</td><td>-15.59</td><td>33.41</td><td>30.63</td><td>6.98</td><td>32.61</td><td>181</td><td>345</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	38.41	54.00	-15.59	33.41	30.63	6.98	32.61	181	345	AVERAGE	Level (dBuV/m) Date: 2025-05-17 AVG_54 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.08</td><td>-----</td><td>-----</td><td>97.07</td><td>30.68</td><td>6.95</td><td>32.62</td><td>181</td><td>345</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	102.08	-----	-----	97.07	30.68	6.95	32.62	181	345	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.51	38.41	54.00	-15.59	33.41	30.63	6.98	32.61	181	345	AVERAGE																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	102.08	-----	-----	97.07	30.68	6.95	32.62	181	345	AVERAGE																																																																								

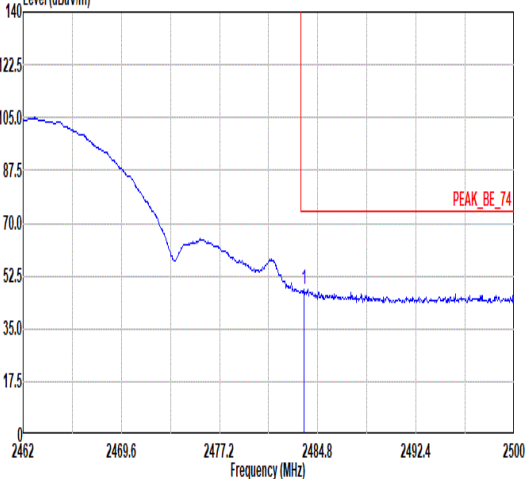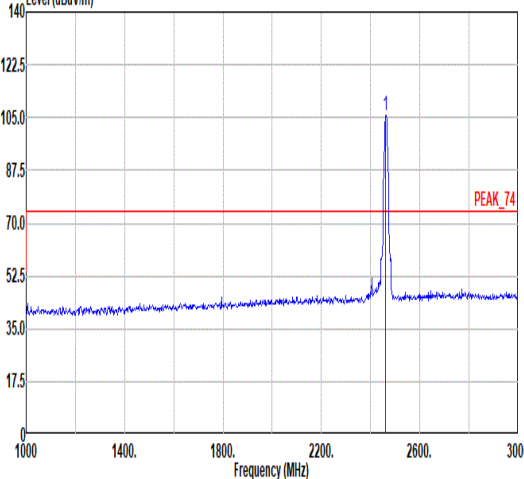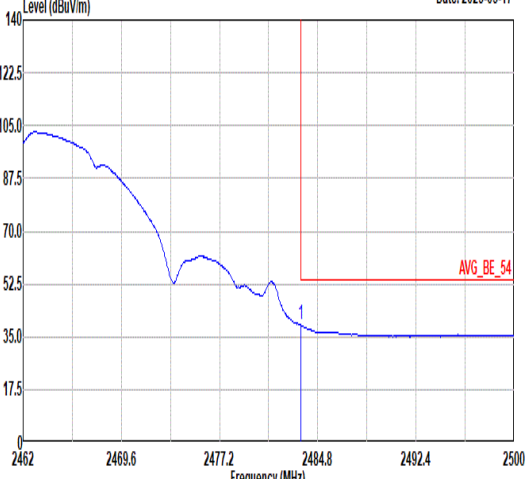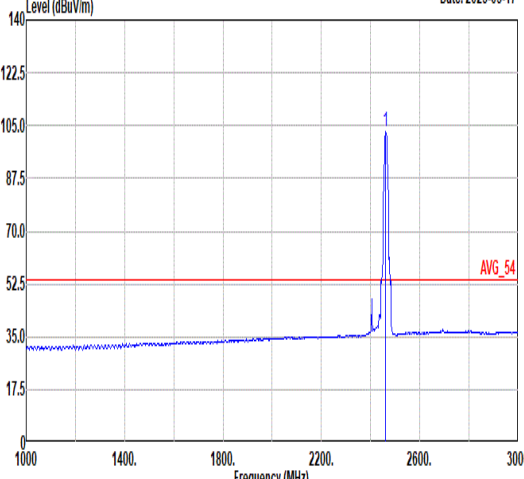

		14																																																																																	
Mode	Band Edge																																																																																		
	2400-2483.5_802.11b_CH11_2462MHz																																																																																		
Pol.	Vertical										Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-05-17  PEAK_BE_74 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.74</td><td>47.85</td><td>74.00</td><td>-26.15</td><td>42.85</td><td>30.63</td><td>6.98</td><td>32.61</td><td>130</td><td>195</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.74	47.85	74.00	-26.15	42.85	30.63	6.98	32.61	130	195	PEAK	Level (dBuV/m) Date: 2025-05-17  PEAK_74 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.79</td><td>-----</td><td>-----</td><td>100.78</td><td>30.68</td><td>6.95</td><td>32.62</td><td>130</td><td>195</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	105.79	-----	-----	100.78	30.68	6.95	32.62	130	195	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.74	47.85	74.00	-26.15	42.85	30.63	6.98	32.61	130	195	PEAK																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	105.79	-----	-----	100.78	30.68	6.95	32.62	130	195	PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-05-17  AVG_BE_54 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>39.11</td><td>54.00</td><td>-14.89</td><td>34.11</td><td>30.63</td><td>6.98</td><td>32.61</td><td>130</td><td>195</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	39.11	54.00	-14.89	34.11	30.63	6.98	32.61	130	195	AVERAGE	Level (dBuV/m) Date: 2025-05-17  AVG_54 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.78</td><td>-----</td><td>-----</td><td>97.77</td><td>30.68</td><td>6.95</td><td>32.62</td><td>130</td><td>195</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	102.78	-----	-----	97.77	30.68	6.95	32.62	130	195	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.51	39.11	54.00	-14.89	34.11	30.63	6.98	32.61	130	195	AVERAGE																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	102.78	-----	-----	97.77	30.68	6.95	32.62	130	195	AVERAGE																																																																								

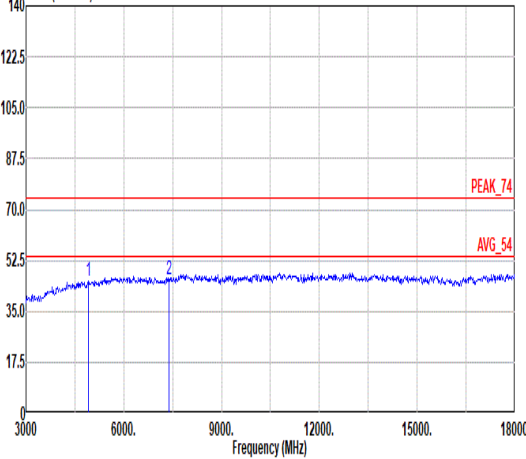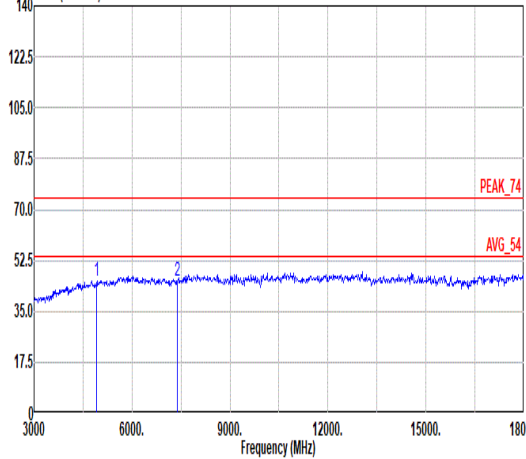

Mode	14																																																																																																																						
	Harmonic																																																																																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																						
Pol.	Horizontal										Vertical																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2025-05-17  <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>45.23</td><td>74.00</td><td>-28.77</td><td>52.02</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.03</td><td>74.00</td><td>-27.97</td><td>49.73</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	45.23	74.00	-28.77	52.02	35.54	10.32	52.65	---	---	Peak	2	7386.00	46.03	74.00	-27.97	49.73	36.57	11.98	52.25	---	---	Peak	Level (dBuV/m) Date: 2025-05-17  <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>51.99</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.67</td><td>74.00</td><td>-28.33</td><td>49.37</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	45.20	74.00	-28.80	51.99	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.67	74.00	-28.33	49.37	36.57	11.98	52.25	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4924.00	45.23	74.00	-28.77	52.02	35.54	10.32	52.65	---	---	Peak																																																																																																												
2	7386.00	46.03	74.00	-27.97	49.73	36.57	11.98	52.25	---	---	Peak																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	4924.00	45.20	74.00	-28.80	51.99	35.54	10.32	52.65	---	---	Peak																																																																																																												
2	7386.00	45.67	74.00	-28.33	49.37	36.57	11.98	52.25	---	---	Peak																																																																																																												



Mode	15																																																																																																						
	Harmonic																																																																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																						
Pol.	Horizontal										Vertical																																																																																												
Peak Avg	Level (dBuV/m) Date: 2025-05-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000. 9000. 12000. 15000. 18000 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>43.29</td><td>74.00</td><td>-30.71</td><td>50.42</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4824.00	43.29	74.00	-30.71	50.42	35.30	10.16	52.59	---	---	Peak	Level (dBuV/m) Date: 2025-05-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000. 9000. 12000. 15000. 18000 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4824.00</td><td>44.17</td><td>74.00</td><td>-29.83</td><td>51.30</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4824.00	44.17	74.00	-29.83	51.30	35.30	10.16	52.59	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	4824.00	43.29	74.00	-30.71	50.42	35.30	10.16	52.59	---	---	Peak																																																																																												
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	4824.00	44.17	74.00	-29.83	51.30	35.30	10.16	52.59	---	---	Peak																																																																																												



Mode	16										
	Harmonic										
	2400-2483.5_802.11g_CH06_2437MHz										
Pol.	Horizontal										Vertical
Peak Avg	</										



		17																																																																																	
Mode	Band Edge																																																																																		
	2400-2483.5_802.11g_CH11_2462MHz																																																																																		
Pol.	Horizontal										Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-05-17 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level decreasing from approximately 105 dBuV/m at 2462 MHz to about 45 dBuV/m at 2500 MHz. A red limit line is at 74.00 dB. A peak is labeled PEAK_BE_74 at 2483.51 MHz. <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>58.59</td><td>74.00</td><td>-15.41</td><td>53.59</td><td>30.63</td><td>6.98</td><td>32.61</td><td>163</td><td>351</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	58.59	74.00	-15.41	53.59	30.63	6.98	32.61	163	351	PEAK	Level (dBuV/m) Date: 2025-05-17 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level decreasing from approximately 105 dBuV/m at 2462 MHz to about 45 dBuV/m at 2500 MHz. A red limit line is at 74.00 dB. A peak is labeled PEAK_74 at 2462.00 MHz. <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>103.58</td><td>-----</td><td>-----</td><td>98.57</td><td>30.67</td><td>6.95</td><td>32.61</td><td>163</td><td>351</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	103.58	-----	-----	98.57	30.67	6.95	32.61	163	351	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.51	58.59	74.00	-15.41	53.59	30.63	6.98	32.61	163	351	PEAK																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	103.58	-----	-----	98.57	30.67	6.95	32.61	163	351	PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-05-17 Horizontal Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level decreasing from approximately 105 dBuV/m at 2462 MHz to about 45 dBuV/m at 2500 MHz. A red limit line is at 54.00 dB. An average is labeled AVG_BE_54 at 2483.51 MHz. <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>48.40</td><td>54.00</td><td>-5.60</td><td>43.40</td><td>30.63</td><td>6.98</td><td>32.61</td><td>163</td><td>351</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	48.40	54.00	-5.60	43.40	30.63	6.98	32.61	163	351	AVERAGE	Level (dBuV/m) Date: 2025-05-17 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal level decreasing from approximately 105 dBuV/m at 2462 MHz to about 45 dBuV/m at 2500 MHz. A red limit line is at 54.00 dB. An average is labeled AVG_54 at 2462.00 MHz. <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>96.60</td><td>-----</td><td>-----</td><td>91.59</td><td>30.68</td><td>6.95</td><td>32.62</td><td>163</td><td>351</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	96.60	-----	-----	91.59	30.68	6.95	32.62	163	351	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.51	48.40	54.00	-5.60	43.40	30.63	6.98	32.61	163	351	AVERAGE																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	96.60	-----	-----	91.59	30.68	6.95	32.62	163	351	AVERAGE																																																																								







		17																																																																																	
Mode	Band Edge																																																																																		
	2400-2483.5_802.11g_CH11_2462MHz																																																																																		
Pol.	Vertical										Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-05-17 PEAK_BE_74 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.58</td><td>60.30</td><td>74.00</td><td>-13.70</td><td>55.30</td><td>30.63</td><td>6.98</td><td>32.61</td><td>127</td><td>191</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.58	60.30	74.00	-13.70	55.30	30.63	6.98	32.61	127	191	PEAK	Level (dBuV/m) Date: 2025-05-17 PEAK_74 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.75</td><td>-----</td><td>-----</td><td>100.74</td><td>30.68</td><td>6.95</td><td>32.62</td><td>127</td><td>191</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	105.75	-----	-----	100.74	30.68	6.95	32.62	127	191	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.58	60.30	74.00	-13.70	55.30	30.63	6.98	32.61	127	191	PEAK																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	105.75	-----	-----	100.74	30.68	6.95	32.62	127	191	PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-05-17 AVG_BE_54 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>49.59</td><td>54.00</td><td>-4.41</td><td>44.59</td><td>30.63</td><td>6.98</td><td>32.61</td><td>127</td><td>191</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.55	49.59	54.00	-4.41	44.59	30.63	6.98	32.61	127	191	AVERAGE	Level (dBuV/m) Date: 2025-05-17 AVG_54 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.54</td><td>-----</td><td>-----</td><td>93.53</td><td>30.68</td><td>6.95</td><td>32.62</td><td>127</td><td>191</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	98.54	-----	-----	93.53	30.68	6.95	32.62	127	191	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.55	49.59	54.00	-4.41	44.59	30.63	6.98	32.61	127	191	AVERAGE																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	98.54	-----	-----	93.53	30.68	6.95	32.62	127	191	AVERAGE																																																																								



Mode	17																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																	
Pol.	Horizontal										Vertical																																																																																																							
Peak Avg	Level (dBuV/m) Date: 2025-05-18 PEAK_74 AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>44.27</td><td>74.00</td><td>-29.73</td><td>51.06</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.84</td><td>74.00</td><td>-28.16</td><td>49.54</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	44.27	74.00	-29.73	51.06	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.84	74.00	-28.16	49.54	36.57	11.98	52.25	---	---	Peak	Level (dBuV/m) Date: 2025-05-18 PEAK_74 AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>44.79</td><td>74.00</td><td>-29.21</td><td>51.58</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.27</td><td>74.00</td><td>-27.73</td><td>49.97</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	44.79	74.00	-29.21	51.58	35.54	10.32	52.65	---	---	Peak	2	7386.00	46.27	74.00	-27.73	49.97	36.57	11.98	52.25	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																										
1	4924.00	44.27	74.00	-29.73	51.06	35.54	10.32	52.65	---	---	Peak																																																																																																							
2	7386.00	45.84	74.00	-28.16	49.54	36.57	11.98	52.25	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																										
1	4924.00	44.79	74.00	-29.21	51.58	35.54	10.32	52.65	---	---	Peak																																																																																																							
2	7386.00	46.27	74.00	-27.73	49.97	36.57	11.98	52.25	---	---	Peak																																																																																																							

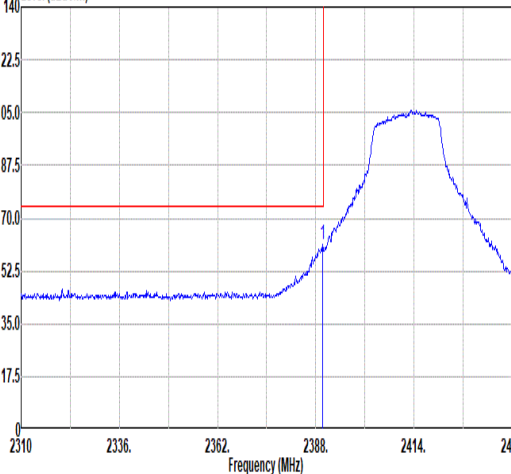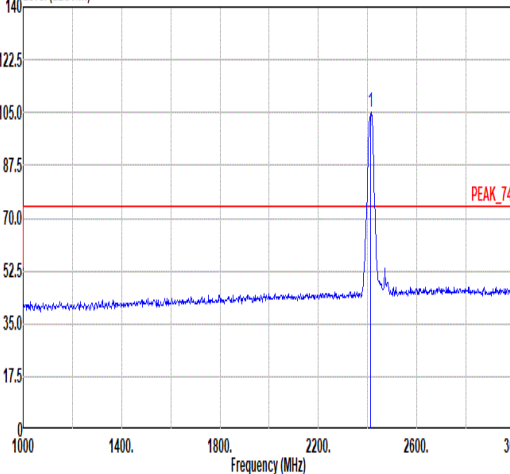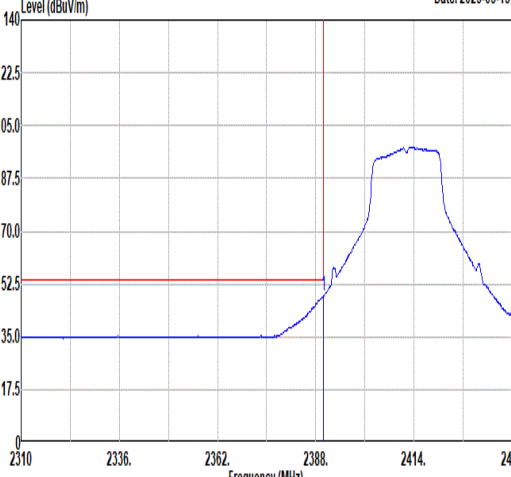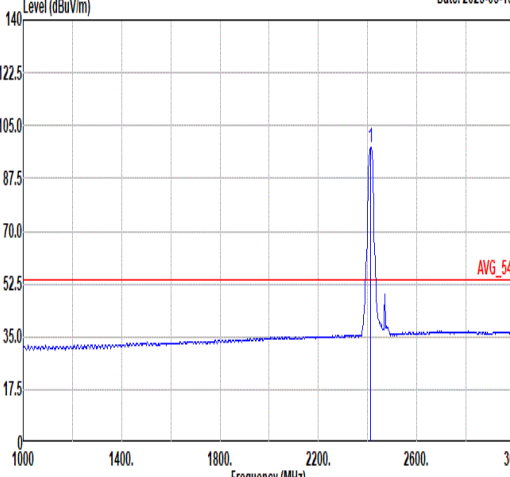

Mode	18																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-05-13  Frequency (MHz)					Level (dBuV/m) Date: 2025-05-13  Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.82</td><td>61.08</td><td>74.00</td><td>-12.92</td><td>56.25</td><td>30.60</td><td>6.87</td><td>32.64</td><td>283</td><td>2 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.82	61.08	74.00	-12.92	56.25	30.60	6.87	32.64	283	2 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>104.92</td><td>-----</td><td>-----</td><td>100.03</td><td>30.63</td><td>6.89</td><td>32.63</td><td>283</td><td>2 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	104.92	-----	-----	100.03	30.63	6.89	32.63	283
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.82	61.08	74.00	-12.92	56.25	30.60	6.87	32.64	283	2 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	104.92	-----	-----	100.03	30.63	6.89	32.63	283	2 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-05-13  Frequency (MHz)					Level (dBuV/m) Date: 2025-05-13  Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>48.40</td><td>54.00</td><td>-5.60</td><td>43.57</td><td>30.60</td><td>6.87</td><td>32.64</td><td>283</td><td>2 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.95	48.40	54.00	-5.60	43.57	30.60	6.87	32.64	283	2 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>97.71</td><td>-----</td><td>-----</td><td>92.82</td><td>30.63</td><td>6.89</td><td>32.63</td><td>283</td><td>2 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2412.00	97.71	-----	-----	92.82	30.63	6.89	32.63	283
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.95	48.40	54.00	-5.60	43.57	30.60	6.87	32.64	283	2 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2412.00	97.71	-----	-----	92.82	30.63	6.89	32.63	283	2 AVERAGE																																																																																



		18																																																
Mode	Band Edge																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																	
Pol.	Vertical					Fundamental																																												
Peak	Level (dBuV/m) Date: 2025-05-13 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.82</td><td>56.93</td><td>74.00</td><td>-17.07</td><td>52.10</td><td>30.60</td><td>6.87</td><td>32.64</td><td>390</td><td>266 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.82	56.93	74.00	-17.07	52.10	30.60	6.87	32.64	390	266 PEAK	Level (dBuV/m) Date: 2025-05-13 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>102.93</td><td>-----</td><td>-----</td><td>98.06</td><td>30.62</td><td>6.89</td><td>32.64</td><td>390</td><td>266 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	102.93	-----	-----	98.06	30.62	6.89	32.64	390	266 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 2389.82	56.93	74.00	-17.07	52.10	30.60	6.87	32.64	390	266 PEAK																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																									
1 2412.00	102.93	-----	-----	98.06	30.62	6.89	32.64	390	266 PEAK																																									
Avg	Level (dBuV/m) Date: 2025-05-13 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.95</td><td>46.03</td><td>54.00</td><td>-7.97</td><td>41.20</td><td>30.60</td><td>6.87</td><td>32.64</td><td>390</td><td>266 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.95	46.03	54.00	-7.97	41.20	30.60	6.87	32.64	390	266 AVERAGE	Level (dBuV/m) Date: 2025-05-13 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>95.84</td><td>-----</td><td>-----</td><td>90.95</td><td>30.63</td><td>6.89</td><td>32.63</td><td>390</td><td>266 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	95.84	-----	-----	90.95	30.63	6.89	32.63	390	266 AVERAGE
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 2389.95	46.03	54.00	-7.97	41.20	30.60	6.87	32.64	390	266 AVERAGE																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																									
1 2412.00	95.84	-----	-----	90.95	30.63	6.89	32.63	390	266 AVERAGE																																									



Mode	18																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																			
Pol.	Horizontal						Vertical																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-05-17 PEAK_74 AVG_54 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.31</td><td>74.00</td><td>-30.69</td><td>50.44</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.31	74.00	-30.69	50.44	35.30	10.16	52.59	---	---	Peak	Level (dBuV/m) Date: 2025-05-17 PEAK_74 AVG_54 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>44.05</td><td>74.00</td><td>-29.95</td><td>51.18</td><td>35.30</td><td>10.16</td><td>52.59</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	44.05	74.00	-29.95	51.18	35.30	10.16	52.59	---	---	Peak
			Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	43.31	74.00	-30.69	50.44	35.30	10.16	52.59	---	---	Peak																																																																																									
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	4824.00	44.05	74.00	-29.95	51.18	35.30	10.16	52.59	---	---	Peak																																																																																									



Mode	19																																																															
	Harmonic																																																															
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																															
Pol.	Horizontal																																																															
Peak Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz)																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.33</td><td>74.00</td><td>-29.67</td><td>51.33</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.05</td><td>74.00</td><td>-28.95</td><td>48.68</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	44.33	74.00	-29.67	51.33	35.35	10.27	52.62	---	---	Peak	2	7311.00	45.05	74.00	-28.95	48.68	36.58	12.01	52.22	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	4874.00	44.33	74.00	-29.67	51.33	35.35	10.27	52.62	---	---	Peak																																																					
2	7311.00	45.05	74.00	-28.95	48.68	36.58	12.01	52.22	---	---	Peak																																																					
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>43.40</td><td>74.00</td><td>-30.60</td><td>50.40</td><td>35.35</td><td>10.27</td><td>52.62</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>48.89</td><td>36.58</td><td>12.01</td><td>52.22</td><td>---</td><td>---</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	43.40	74.00	-30.60	50.40	35.35	10.27	52.62	---	---	Peak	2	7311.00	45.26	74.00	-28.74	48.89	36.58	12.01	52.22	---	---	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	4874.00	43.40	74.00	-30.60	50.40	35.35	10.27	52.62	---	---	Peak																																																					
2	7311.00	45.26	74.00	-28.74	48.89	36.58	12.01	52.22	---	---	Peak																																																					





Mode	20																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																											
Pol.	Horizontal					Fundamental																																																																						
Peak	Date: 2025-05-13 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2483.55</td><td>59.38</td><td>74.00</td><td>-14.62</td><td>54.38</td><td>30.63</td><td>6.98</td><td>32.61</td><td>319</td><td>186</td><td>PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.55	59.38	74.00	-14.62	54.38	30.63	6.98	32.61	319	186	PEAK	Date: 2025-05-13 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>103.41</td><td>-----</td><td>-----</td><td>98.40</td><td>30.67</td><td>6.95</td><td>32.61</td><td>319</td><td>186</td><td>PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2462.00	103.41	-----	-----	98.40	30.67	6.95	32.61	319	186	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.55	59.38	74.00	-14.62	54.38	30.63	6.98	32.61	319	186	PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2462.00	103.41	-----	-----	98.40	30.67	6.95	32.61	319	186	PEAK																																																																		
Avg	Date: 2025-05-13 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2483.51</td><td>47.66</td><td>54.00</td><td>-6.34</td><td>42.66</td><td>30.63</td><td>6.98</td><td>32.61</td><td>319</td><td>186</td><td>AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.51	47.66	54.00	-6.34	42.66	30.63	6.98	32.61	319	186	AVERAGE	Date: 2025-05-13 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2462.00</td><td>95.41</td><td>-----</td><td>-----</td><td>90.40</td><td>30.68</td><td>6.95</td><td>32.62</td><td>319</td><td>186</td><td>AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2462.00	95.41	-----	-----	90.40	30.68	6.95	32.62	319	186	AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.51	47.66	54.00	-6.34	42.66	30.63	6.98	32.61	319	186	AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2462.00	95.41	-----	-----	90.40	30.68	6.95	32.62	319	186	AVERAGE																																																																		



Mode	20																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																	
Pol.	Vertical					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-05-13 PEAK_BE_74 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>59.50</td><td>74.00</td><td>-14.50</td><td>54.50</td><td>30.63</td><td>6.98</td><td>32.61</td><td>155</td><td>193</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.51	59.50	74.00	-14.50	54.50	30.63	6.98	32.61	155	193	PEAK	Level (dBuV/m) Date: 2025-05-13 PEAK_74 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.23</td><td>-----</td><td>-----</td><td>100.22</td><td>30.67</td><td>6.95</td><td>32.61</td><td>155</td><td>193</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	105.23	-----	-----	100.22	30.67	6.95	32.61	155	193	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2483.51	59.50	74.00	-14.50	54.50	30.63	6.98	32.61	155	193	PEAK																																																																							
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	105.23	-----	-----	100.22	30.67	6.95	32.61	155	193	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-05-13 AVG_BE_54 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.58</td><td>48.35</td><td>54.00</td><td>-5.65</td><td>43.35</td><td>30.63</td><td>6.98</td><td>32.61</td><td>155</td><td>193</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.58	48.35	54.00	-5.65	43.35	30.63	6.98	32.61	155	193	AVERAGE	Level (dBuV/m) Date: 2025-05-13 AVG_54 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.10</td><td>-----</td><td>-----</td><td>93.09</td><td>30.67</td><td>6.95</td><td>32.61</td><td>155</td><td>193</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	98.10	-----	-----	93.09	30.67	6.95	32.61	155	193	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2483.58	48.35	54.00	-5.65	43.35	30.63	6.98	32.61	155	193	AVERAGE																																																																							
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2462.00	98.10	-----	-----	93.09	30.67	6.95	32.61	155	193	AVERAGE																																																																							



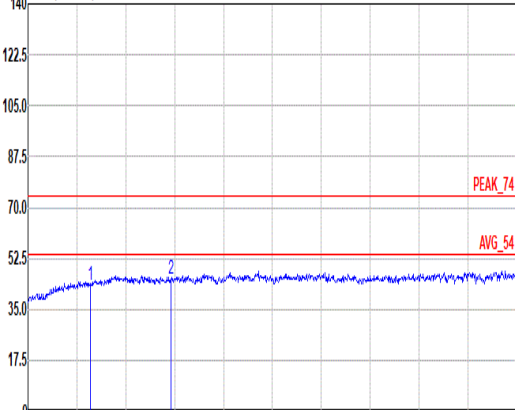
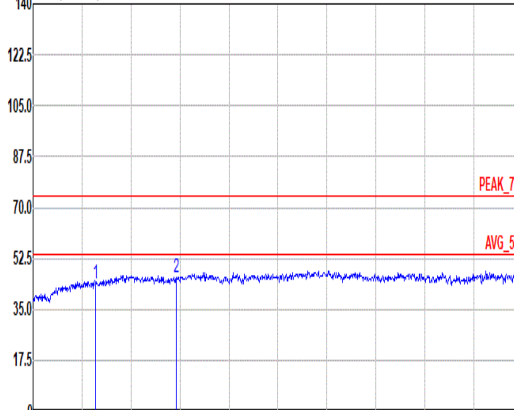


Mode	20																																																																																																																				
	Harmonic																																																																																																																				
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																				
Pol.	Horizontal										Vertical																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-05-17  PEAK_74 AVG_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.36</td><td>74.00</td><td>-30.64</td><td>50.15</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.54</td><td>74.00</td><td>-28.46</td><td>49.24</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	43.36	74.00	-30.64	50.15	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.54	74.00	-28.46	49.24	36.57	11.98	52.25	---	---	Peak	Level (dBuV/m) Date: 2025-05-17  PEAK_74 AVG_54 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.78</td><td>74.00</td><td>-30.22</td><td>50.57</td><td>35.54</td><td>10.32</td><td>52.65</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.71</td><td>74.00</td><td>-28.29</td><td>49.41</td><td>36.57</td><td>11.98</td><td>52.25</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	43.78	74.00	-30.22	50.57	35.54	10.32	52.65	---	---	Peak	2	7386.00	45.71	74.00	-28.29	49.41	36.57	11.98	52.25	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4924.00	43.36	74.00	-30.64	50.15	35.54	10.32	52.65	---	---	Peak																																																																																																										
2	7386.00	45.54	74.00	-28.46	49.24	36.57	11.98	52.25	---	---	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4924.00	43.78	74.00	-30.22	50.57	35.54	10.32	52.65	---	---	Peak																																																																																																										
2	7386.00	45.71	74.00	-28.29	49.41	36.57	11.98	52.25	---	---	Peak																																																																																																										







Mode	21																																																																																																																																																																			
	LF																																																																																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																		
Peak	Level (dBuV/m) Date: 2025-05-18 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>37.76</td><td>23.70</td><td>40.00</td><td>-16.30</td><td>42.95</td><td>19.52</td><td>1.13</td><td>39.90 --- Peak</td></tr><tr><td>2</td><td>159.01</td><td>18.98</td><td>43.50</td><td>-24.52</td><td>37.39</td><td>19.32</td><td>2.29</td><td>40.02 --- Peak</td></tr><tr><td>3</td><td>203.63</td><td>21.05</td><td>43.50</td><td>-22.45</td><td>41.99</td><td>16.46</td><td>2.59</td><td>39.99 --- Peak</td></tr><tr><td>4</td><td>443.22</td><td>24.92</td><td>46.00</td><td>-21.08</td><td>37.82</td><td>23.04</td><td>3.79</td><td>39.73 --- Peak</td></tr><tr><td>5</td><td>723.55</td><td>30.03</td><td>46.00</td><td>-15.97</td><td>37.48</td><td>27.26</td><td>4.83</td><td>39.54 --- Peak</td></tr><tr><td>6</td><td>856.44</td><td>31.45</td><td>46.00</td><td>-14.55</td><td>36.97</td><td>28.65</td><td>5.25</td><td>39.42 --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	37.76	23.70	40.00	-16.30	42.95	19.52	1.13	39.90 --- Peak	2	159.01	18.98	43.50	-24.52	37.39	19.32	2.29	40.02 --- Peak	3	203.63	21.05	43.50	-22.45	41.99	16.46	2.59	39.99 --- Peak	4	443.22	24.92	46.00	-21.08	37.82	23.04	3.79	39.73 --- Peak	5	723.55	30.03	46.00	-15.97	37.48	27.26	4.83	39.54 --- Peak	6	856.44	31.45	46.00	-14.55	36.97	28.65	5.25	39.42 --- Peak	Level (dBuV/m) Date: 2025-05-18 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>39.70</td><td>36.17</td><td>40.00</td><td>-3.83</td><td>55.19</td><td>19.73</td><td>1.16</td><td>39.91 --- Peak</td></tr><tr><td>2</td><td>55.22</td><td>28.75</td><td>40.00</td><td>-11.25</td><td>47.24</td><td>20.10</td><td>1.36</td><td>39.95 --- Peak</td></tr><tr><td>3</td><td>161.92</td><td>18.48</td><td>43.50</td><td>-25.02</td><td>36.87</td><td>19.32</td><td>2.31</td><td>40.02 --- Peak</td></tr><tr><td>4</td><td>203.63</td><td>19.77</td><td>43.50</td><td>-23.73</td><td>40.71</td><td>16.46</td><td>2.59</td><td>39.99 --- Peak</td></tr><tr><td>5</td><td>318.09</td><td>21.13</td><td>46.00</td><td>-24.87</td><td>37.65</td><td>20.17</td><td>3.21</td><td>39.90 --- Peak</td></tr><tr><td>6</td><td>532.46</td><td>25.02</td><td>46.00</td><td>-20.98</td><td>36.11</td><td>24.44</td><td>4.15</td><td>39.68 --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	39.70	36.17	40.00	-3.83	55.19	19.73	1.16	39.91 --- Peak	2	55.22	28.75	40.00	-11.25	47.24	20.10	1.36	39.95 --- Peak	3	161.92	18.48	43.50	-25.02	36.87	19.32	2.31	40.02 --- Peak	4	203.63	19.77	43.50	-23.73	40.71	16.46	2.59	39.99 --- Peak	5	318.09	21.13	46.00	-24.87	37.65	20.17	3.21	39.90 --- Peak	6	532.46	25.02	46.00	-20.98	36.11	24.44	4.15	39.68 --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																												
1	37.76	23.70	40.00	-16.30	42.95	19.52	1.13	39.90 --- Peak																																																																																																																																																												
2	159.01	18.98	43.50	-24.52	37.39	19.32	2.29	40.02 --- Peak																																																																																																																																																												
3	203.63	21.05	43.50	-22.45	41.99	16.46	2.59	39.99 --- Peak																																																																																																																																																												
4	443.22	24.92	46.00	-21.08	37.82	23.04	3.79	39.73 --- Peak																																																																																																																																																												
5	723.55	30.03	46.00	-15.97	37.48	27.26	4.83	39.54 --- Peak																																																																																																																																																												
6	856.44	31.45	46.00	-14.55	36.97	28.65	5.25	39.42 --- Peak																																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																																																												
1	39.70	36.17	40.00	-3.83	55.19	19.73	1.16	39.91 --- Peak																																																																																																																																																												
2	55.22	28.75	40.00	-11.25	47.24	20.10	1.36	39.95 --- Peak																																																																																																																																																												
3	161.92	18.48	43.50	-25.02	36.87	19.32	2.31	40.02 --- Peak																																																																																																																																																												
4	203.63	19.77	43.50	-23.73	40.71	16.46	2.59	39.99 --- Peak																																																																																																																																																												
5	318.09	21.13	46.00	-24.87	37.65	20.17	3.21	39.90 --- Peak																																																																																																																																																												
6	532.46	25.02	46.00	-20.98	36.11	24.44	4.15	39.68 --- Peak																																																																																																																																																												

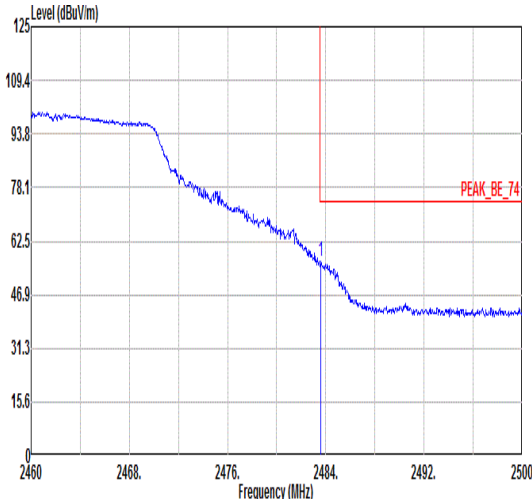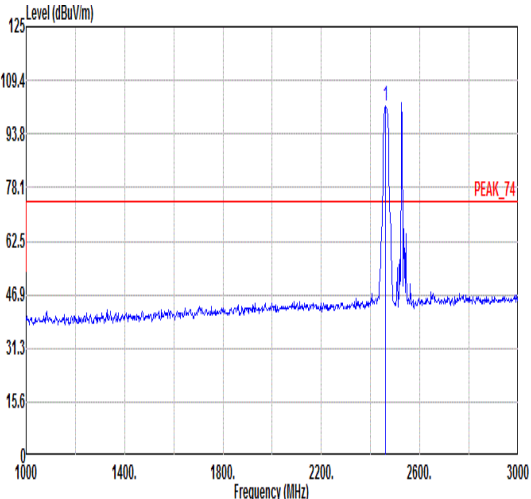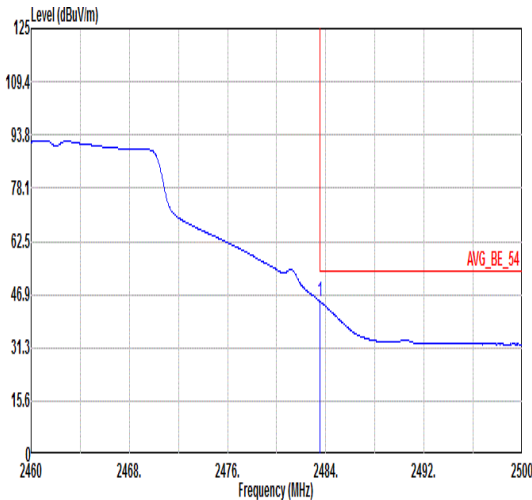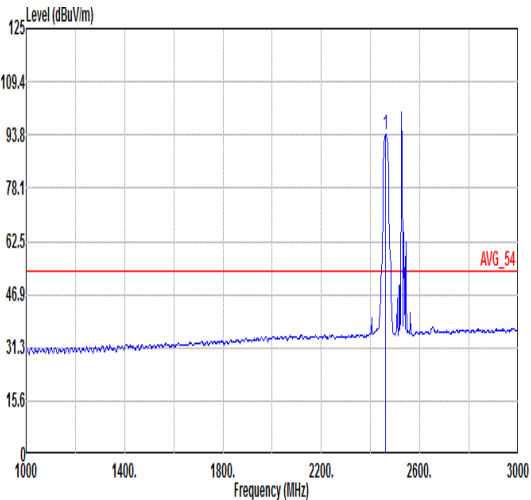

Mode	22																																																																																									
	Band Edge																																																																																									
	Co-location_802.11g_CH11_2462MHz																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.60</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>54.64</td><td>30.80</td><td>5.46</td><td>34.11</td><td>299</td><td>354 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	56.79	74.00	-17.21	54.64	30.80	5.46	34.11	299	354 Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.06</td><td>-----</td><td>-----</td><td>99.95</td><td>30.79</td><td>5.44</td><td>34.12</td><td>299</td><td>354 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.06	-----	-----	99.95	30.79	5.44	34.12	299
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.60	56.79	74.00	-17.21	54.64	30.80	5.46	34.11	299	354 Peak																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	102.06	-----	-----	99.95	30.79	5.44	34.12	299	354 Peak																																																																																
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>42.80</td><td>30.80</td><td>5.46</td><td>34.11</td><td>299</td><td>354 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	44.95	54.00	-9.05	42.80	30.80	5.46	34.11	299	354 Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>94.09</td><td>-----</td><td>-----</td><td>91.98</td><td>30.79</td><td>5.44</td><td>34.12</td><td>299</td><td>354 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	94.09	-----	-----	91.98	30.79	5.44	34.12	299
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.52	44.95	54.00	-9.05	42.80	30.80	5.46	34.11	299	354 Average																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	94.09	-----	-----	91.98	30.79	5.44	34.12	299	354 Average																																																																																



Note: The frequency point over limit line is LTE Band 7 RF signal which can be ignored.

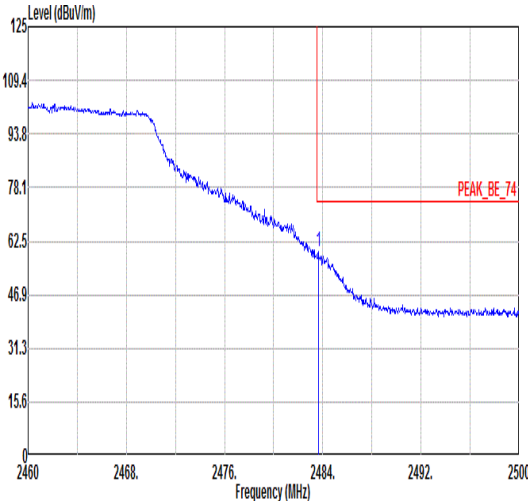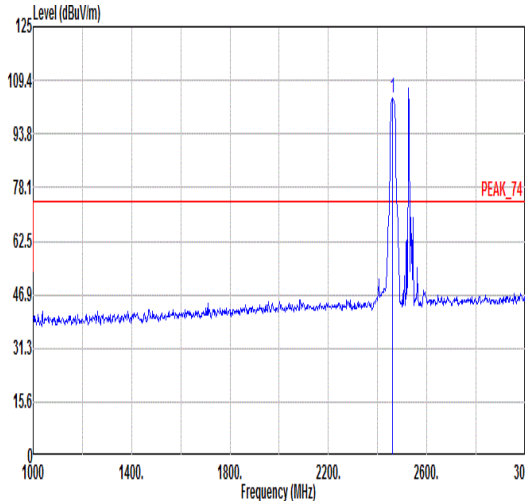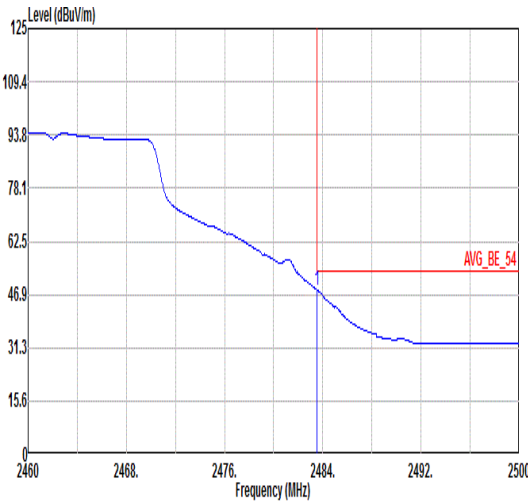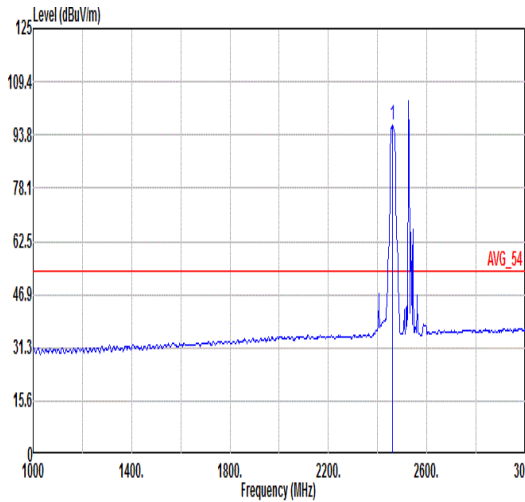

		22																																																																																																				
Mode		Band Edge																																																																																																				
		Co-location_802.11g_CH11_2462MHz																																																																																																				
Pol.		Vertical					Fundamental																																																																																															
Peak																																																																																																						
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.64</td><td>59.26</td><td>74.00</td><td>-14.74</td><td>57.11</td><td>30.80</td><td>5.46</td><td>34.11</td><td>100</td><td>187</td><td>Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.64	59.26	74.00	-14.74	57.11	30.80	5.46	34.11	100	187	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>104.22</td><td>-----</td><td>-----</td><td>102.11</td><td>30.79</td><td>5.44</td><td>34.12</td><td>100</td><td>187</td><td>Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	104.22	-----	-----	102.11	30.79	5.44	34.12	100	187
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.64	59.26	74.00	-14.74	57.11	30.80	5.46	34.11	100	187	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	104.22	-----	-----	102.11	30.79	5.44	34.12	100	187	Peak																																																																																											
Avg																																																																																																						
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.52</td><td>48.29</td><td>54.00</td><td>-5.71</td><td>46.14</td><td>30.80</td><td>5.46</td><td>34.11</td><td>100</td><td>187</td><td>Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.52	48.29	54.00	-5.71	46.14	30.80	5.46	34.11	100	187	Average	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>96.56</td><td>-----</td><td>-----</td><td>94.45</td><td>30.79</td><td>5.44</td><td>34.12</td><td>100</td><td>187</td><td>Average</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2462.00	96.56	-----	-----	94.45	30.79	5.44	34.12	100	187
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2483.52	48.29	54.00	-5.71	46.14	30.80	5.46	34.11	100	187	Average																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	96.56	-----	-----	94.45	30.79	5.44	34.12	100	187	Average																																																																																											

Note: The frequency point over limit line is LTE Band 7 RF signal which can be ignored.

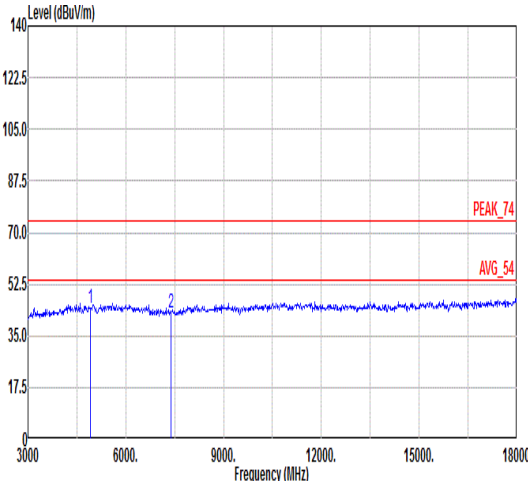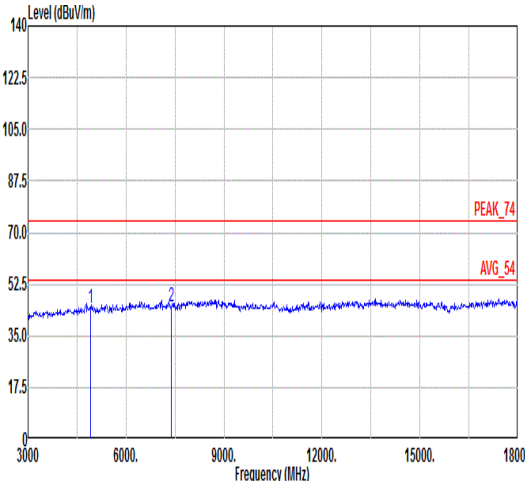


Mode	22																																																																																																																			
	Harmonic																																																																																																																			
	Co-location_802.11g_CH11_2462MHz																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.42</td><td>74.00</td><td>-29.58</td><td>50.80</td><td>36.58</td><td>8.57</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.00</td><td>74.00</td><td>-31.00</td><td>47.19</td><td>36.81</td><td>10.18</td><td>51.18</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	44.42	74.00	-29.58	50.80	36.58	8.57	51.53	---	---	Peak	2	7386.00	43.00	74.00	-31.00	47.19	36.81	10.18	51.18	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>44.24</td><td>74.00</td><td>-29.76</td><td>50.62</td><td>36.58</td><td>8.57</td><td>51.53</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>44.81</td><td>74.00</td><td>-29.19</td><td>49.00</td><td>36.81</td><td>10.18</td><td>51.18</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	44.24	74.00	-29.76	50.62	36.58	8.57	51.53	---	---	Peak	2	7386.00	44.81	74.00	-29.19	49.00	36.81	10.18	51.18	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	44.42	74.00	-29.58	50.80	36.58	8.57	51.53	---	---	Peak																																																																																																									
2	7386.00	43.00	74.00	-31.00	47.19	36.81	10.18	51.18	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4924.00	44.24	74.00	-29.76	50.62	36.58	8.57	51.53	---	---	Peak																																																																																																									
2	7386.00	44.81	74.00	-29.19	49.00	36.81	10.18	51.18	---	---	Peak																																																																																																									

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.29	-	-	10Hz
802.11g	98.07	-	-	10Hz
802.11n HT20	97.42	1.890	0.529	1KHz

802.11b

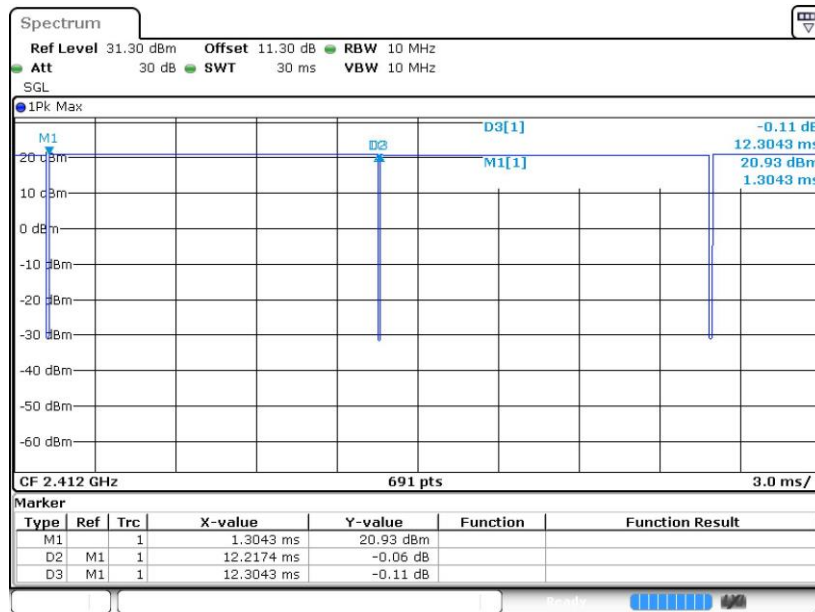



802.11g

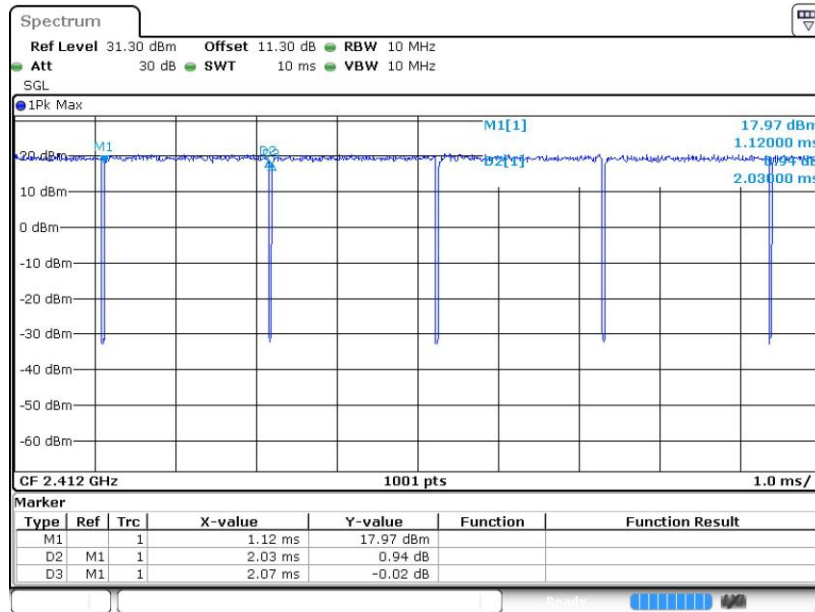

802.11n HT20

