# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

## **RF PIR Sensor**

**MODEL No.: TX88-GT08757** 

Trade mark: N/A

**FCC ID: XDP-GT08757** 

**REPORT NO: E0904088F** 

ISSUE DATE: June 10, 2009

Prepared for

Global Tech China Ltd.
Room 12,14th Floor, Tower 2, Evergain Plaza, 88 Container Port Rd., Kwai Chung,
Hong Kong

Prepared by

SHENZHEN EMTEK Co., Ltd.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China TEL: 86-755-26954280

FAX: 86-755-26954282

## **VERIFICATION OF COMPLIANCE**

Applicant:	Global Tech China Ltd. Room 12,14th Floor, Tower 2, Evergain Plaza, 88 Container Port Rd., Kwai Chung, Hong Kong
Product Description:	RF PIR Sensor
Model Number:	TX88-GT08757
Serial Number:	N/A
File Number:	E0904088F
Date of Test:	May 07, 2009 to June 01, 2009

## We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.231.

The test results of this report relate only to the tested sample identified in this report.

Approved By

David Lee/ Q.A. Manager SHENZHEN EMTEK Co., Ltd.

## **Table of Contents**

1.	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION	5
1.2	RELATED SUBMITTAL(S) / GRANT (S)	
1.3	TEST METHODOLOGY	5
1.4	SPECIAL ACCESSORIES	5
1.5	EQUIPMENT MODIFICATIONS	5
1.6	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE	7
2.4	LIMITATION	
2.5	CONFIGURATION OF TESTED SYSTEM	9
3.	SUMMARY OF TEST RESULTS	10
4.	DESCRIPTION OF TEST MODES	10
5.	CONDUCTED EMISSIONS TEST (NOT APPLICABLE IN THIS REPORT)	11
5.1	MEASUREMENT PROCEDURE:	11
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
5.3	MEASUREMENT EQUIPMENT USED:	
5.4	MEASUREMENT RESULT:	11
5.5	CONDUCTED MEASUREMENT PHOTOS:	11
6.	RADIATED EMISSION TEST	12
6.1	MEASUREMENT PROCEDURE	12
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
6.3	MEASUREMENT EQUIPMENT USED:	13
6.4	MEASUREMENT RESULT	14
7.	DEACTIVATION TESTING	16
7.1	REQUIREMENT	16
7.2	TEST SET-UP	16
7.3	MEASUREMENT EQUIPMENT USED:	16
7.4	Test Procedure	16
7.5	Test Data	16
8.	OCCUPIED BANDWIDTH	18
8.1.	REQUIREMENTS:	18
8.2	Measurement Procedure	18
83	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	18

SHENZHEN	EM'	TEK	Co.,	Ltd.
DEDODELL	_ ,			_

REPO	RT NO.: E0904088F	FCC ID: XDP-GT08757	DATE: 06/ 10/2009
8.4	MEASUREMENT EQUIPMEN	NT USED:	18
8.5	MEASUREMENT RESULTS:		18
9. AN	TENNA APPLICATION		20
9.1 A	ANTENNA REQUIREMENT		20
РНОТ	OGRAPHS OF SET UP	••••••	21
РНОТ	OGRAPHS OF EUT		23

## 1. GENERAL INFORMATION

## 1.1 Product Description

The Global Tech China Ltd. Model: TX88-GT08757 (referred to as the EUT in this report) The EUT is a short range, lower power, RF PIR Sensor designed as an Input Device. A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 433.92MHz, one channel.
- B). Power Supply: DC 9V

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: XDP-GT08757 filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a DoC procedure.

## 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

## 1.4 Special Accessories

Not available for this EUT intended for grant.

## 1.5 Equipment Modifications

Not available for this EUT intended for grant.

DATE: 06/ 10/2009

## 1.6 Test Facility

Site Description EMC Lab.

Accredited by CNAS, 2005.11.02

The certificate is valid until 2010.11

The Laboratory has been assessed and proved to be in compliance

with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)

The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen, 2008.3

The Laboratory has been assessed according to the requirements

ISO/IEC 170250.

Accredited by FCC, March 18, 2008

The Certificate Registration Number is 709623.

Accredited by Industry Canada, May 24, 2008 The Certificate Registration Number is 464

Name of Firm Site Location

SHENZHEN EMTEK Co., Ltd. Bldg 69, Majialong Industry Zone,

Nanshan District, Shenzhen, Guangdong, China

## 2. System Test Configuration

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

#### 2.3 Test Procedure

## 2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

#### 2.4 Limitation

## (1) Conducted Emission (Not applicable in this report)

According to section 15.207(a) Conducted Emission Limits is as following.

T.	Limits			
Frequency range		dB(uV)		
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

#### Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

## **Radiated Emission**

- a. The field strength of any emission within this band (section 15.231) shall not exceed 10000 micro volts/meter at 3 meters. (80dBuV at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- b. The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 and section 15.231(Intentional Radiators general limit). as below.

Frequency (MHz)	Field strength $\mu V/m$	Distance (m)	Field strength at 3m dBµV/m
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

- Remark: 1. Emission level in dBuV/m=20 log (uV/m)
  - 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  - 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205
  - 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of  $\xi$ 15.205, then the general radiated emission limits in  $\xi$  15.209 apply.

Fundamental	Field Strength of Fundamental			
Frequency(MHZ)				
• • • • • • • • • • • • • • • • • • • •	uV/m	dBuV/m		
433.92	10996.7	80.83		
Harmonics	1100.0	60.83		

- Remark: (1) Emission level in dBuV/m=20 log (uV/m)
  - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
  - (3)The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit

## 2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

EUT

# 3. Summary Of Test Results

FCC Rules	<b>Description Of Test</b>	Result
§ 15.207	Conducted Emission	N/A
§ 15.231 (b)	Radiated Emission	Compliant
§ 15.231 (c)	Bandwidth Test	Compliant
§ 15.231 (a)(1)	Deactivation Testing	Compliant

## 4. Description of test modes

The EUT (RF PIR Sensor) has been tested under normal operating condition. The EUT stay in continuous transmitting mode. The Frequency 433.92MHz was chosen for testing.

## 5. Conducted Emissions Test (Not applicable in this report)

## **5.1** Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured was complete.

## **5.2** Test SET-UP (Block Diagram of Configuration)

## **5.3** Measurement Equipment Used:

Conducted Emission Test Site # 4							
<b>EQUIPMENT</b>	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2009	05/29/2010		
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2009	05/29/2010		
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2009	05/29/2010		
50ΩCoaxial Switch	Anritsu	MP59B	M20531	05/29/2009	05/29/2010		

# 5.4 Measurement Result: N/A

## **5.5 Conducted Measurement Photos:**

N/A

DATE: 06/ 10/2009


## 6. Radiated Emission Test

## **6.1** Measurement Procedure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.

## **6.2** Test SET-UP (Block Diagram of Configuration)

Radiated Emission Test Set-Up

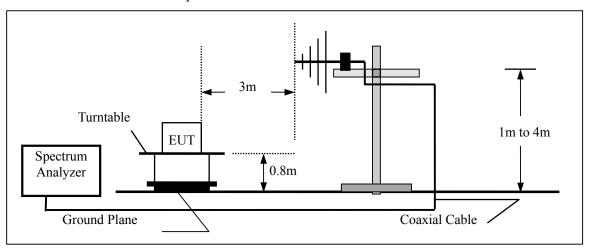

## **6.3** Measurement Equipment Used:

Open Area Test Site # 3							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Rohde & Schwarz	FSEM30	849720/019	05/29/2009	05/29/2010		
Amplifier	HP	8449B	3008A00277	05/29/2009	05/29/2010		
Horn Antenna	Sunol Sciences	DRH-118	A052604	05/29/2009	05/29/2010		
EMI Test Receiver	Rohde & Schwarz	ESCI	100028	05/29/2009	05/29/2010		
Amplifier	HP	HP8447E	1937A01046	05/29/2009	05/29/2010		
Broadband Antenna	Sunol Sciences	JB1	A040904-2	05/29/2009	05/29/2010		

#### DATE: 06/ 10/2009

#### **6.4** Measurement Result

## A. Fundamental Radiated Emission Data

Operation Mode: Transmitting Mode Test Date: June 01, 2009

Test Item: Fundamental Radiated Emission Data Temperature : 24 °C Fundamental Frequency: 433.92MHz Humidity : 52 % Test Result: PASS Test By: Andy

Freq.	Ant.Pol.	Emission Level	Limit 3m	Margin	Note
(MHz)	H/V	(dBuV)	(dBuV/m)	(dB)	
433.92	V	54.91	80.83	-25.92	Peak
867.84	V	32.28	60.83	-27.55	Peak
1301.76	V	38.73	54	-15.27	Peak
1735.68	V	39.55	60.83	-31.28	Peak
2169.60	V	40.20	60.83	-20.63	Peak
2603.52	V	40.92	60.83	-19.91	Peak
433.92	Н	47.84	80.83	-32.99	Peak
867.84	Н	30.02	60.83	-30.81	Peak
1301.76	Н	38.60	54	-15.40	Peak
1735.68	Н	38.20	60.83	-22.63	Peak
2169.60	Н	41.60	60.83	-19.23	Peak
2603.52	Н	41.82	60.83	-19.01	Peak

Note: 1. 1300.5MHz is in a restricted band. Above 1000MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The maximum Permitted average limit should be 54dBuV/m.

2. All x,y, z orientation has been investigated, and present only worst orientation data

#### Other harmonics emissions are lower than 20dB below the allowable limit.

**Note:** (1) All Readings are Peak Value.

- (2) Emission Level= Reading Level+Probe Factor +Cable Loss
- (3) The average measurement was not performed when the peak measured data under the limit of average detection.

All x,y, z orientation has been investigated, and present only worst orientation data

DATE: 06/ 10/2009

## B. General Radiated Emission Data

Operation Mode: Transmitting Mode Test Date: June 01, 2009

Test Item: General Radiated Emission Data Temperature : 24  $^{\circ}$ C Fundamental Frequency: 433.92MHz Humidity : 52% Test Result: PASS Test By: Andy

Freq.	Ant.Pol.	Emission Level	Limit 3m	Margin	Note
(MHz)	H/V	(dBuV)	(dBuV/m)	(dB)	
442.30	V	23.22	46.00	-22.78	Peak
459.04	V	43.37	46.00	-2.63	Peak
874.68	V	32.56	46.00	-13.44	Peak
963.41	V	31.25	46.00	-14.75	Peak
970.33	V	29.97	46.00	-26.03	Peak
983.57	V	28.73	46.00	-17.27	Peak
384.91	Н	22.68	46.00	-23.32	Peak
459.04	Н	40.84	46.00	-5.16	Peak
562.62	Н	24.60	46.00	-21.40	Peak
709.30	Н	27.33	46.00	-18.63	Peak
847.26	Н	30.04	46.00	-15.96	Peak
889.60	Н	31.02	46.00	-14.98	Peak

Note: Emission Level= Reading Level+ Probe Factor +Cable Loss

<sup>1.</sup> All x,y, z orientation has been investigated, and present only worst orientation data

## 7. DEACTIVATION TESTING

## 7.1 Requirement

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

#### 7.2 Test SET-UP

Same as 6.2 Radiated Emission Measurements.

## 7.3 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2009	05/29/2010
Pre-Amplifier	HP	8447D	2944A07999	05/29/2009	05/29/2010
Broadband Antenna	Sunol Sciences	JB1	A040904-2	05/29/2009	05/29/2010

#### **7.4 Test Procedure**

- 1. The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 2003. The specification used was the FCC 15.231(a) limits.
- 2. Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

#### 7.5 Test Data


**Environmental Conditions** 

Temperature:	24 ° C
Relative Humidity:	52%
ATM Pressure:	1032mbar

Test Mode: Transmitting

Transmitting time	Limit	Result
	(Second)	
2.2625S	5	PASS

Refer to the attached Duty Cycle plot

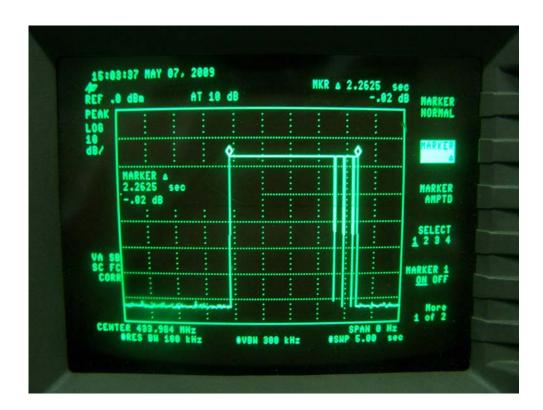

## 8. Occupied Bandwidth

#### 8.1. Requirements:

The bandwidth of t he emissions shall be no wide than 0.25% of the center frequency for devises operating above 70MHz and below 900MHz, Bandwidth is determined at the points 20dB down from the modulated carrier, For 433.92MHz center frequency allowed occupied bandwidth shall be less than (433.92/100)\*0.25=1.0848MHz

#### **8.2 Measurement Procedure**

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Set EUT as normal operation
- 3. Set SPA Center Frequency = fundamental frequency, RBW, VBW= 10KHz
- 4. Set SPA Max hold. Mark peak.

## 8.3 Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Measurement.

## **8.4** Measurement Equipment Used:

Same as 6.2 Radiated Emission Measurement.

## 8.5 Measurement Results:


The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209.

Refer to attached data chart.

20dB Occupied bandwidth is 60.5KHz.

The tested unit meets the standards requirements.

## **Band Width Test Data**

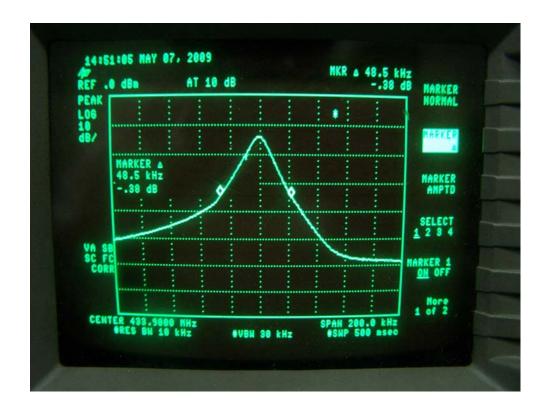

# 9. Antenna Application

# 9.1 Antenna requirement


The EUT's antenna used a dipole antenna and integrated on PCB, The EUT'S antenna is met the requirement of FCC part 15C section 15.203

DATE: 06/ 10/2009

# **APPENDIX 1**

## PHOTOGRAPHS OF SET UP


# Radiated Emission Setup Photos

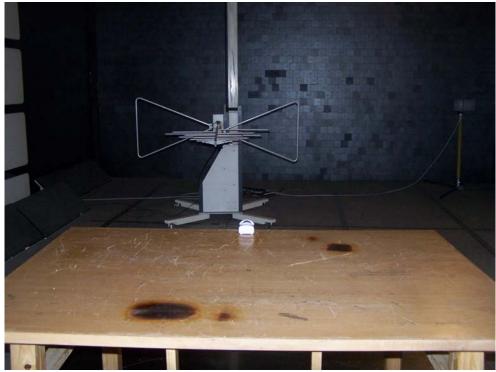


# **APPENDIX 2**

## PHOTOGRAPHS OF EUT


# UP View of TX

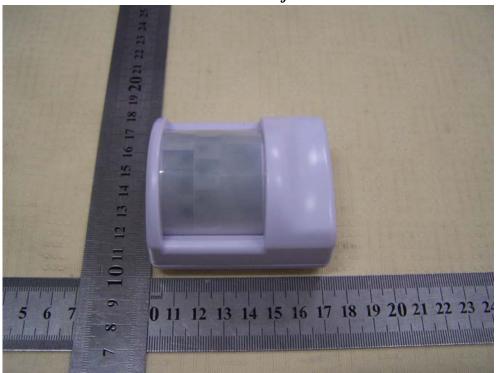

# Bottom View of TX

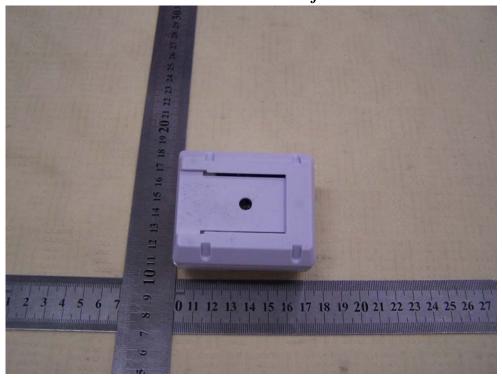

## Internal of TX-1

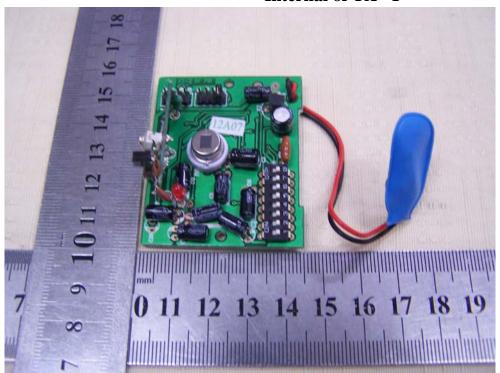

Internal of TX-2

