


Test Plots:

Occupied Bandwidth

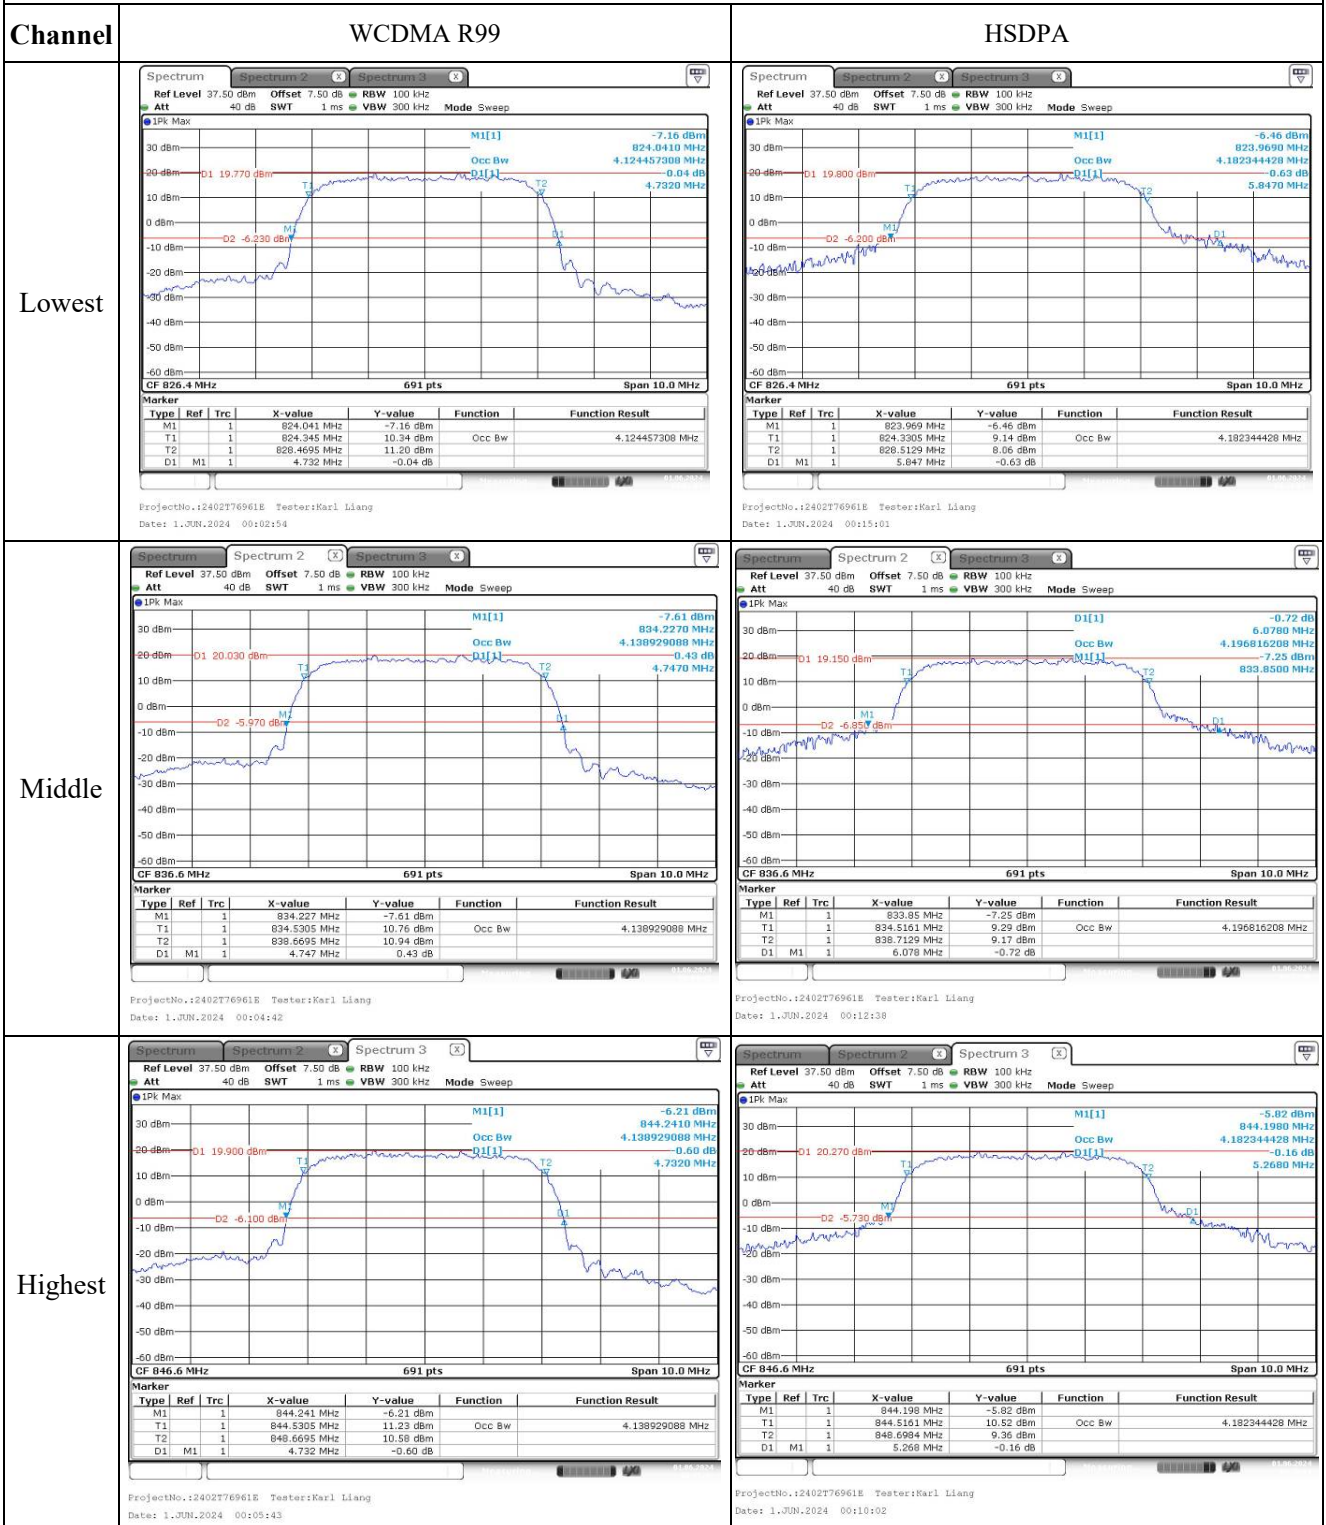


Occupied Bandwidth

Channel


HSUPA

Lowest

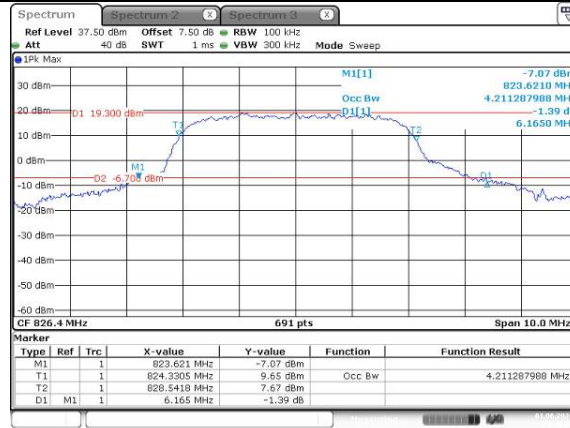


ProjectNo.:2402T76961E Tester:Karl Liang
Date: 1.JUN.2024 00:18:21

Middle

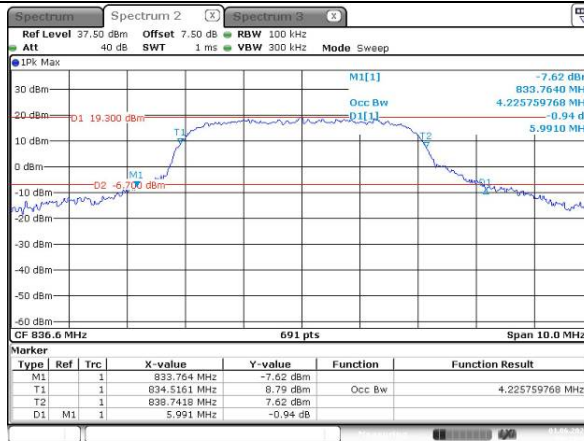

ProjectNo.:2402T76961E Tester:Karl Liang
Date: 1.JUN.2024 00:19:46

Highest

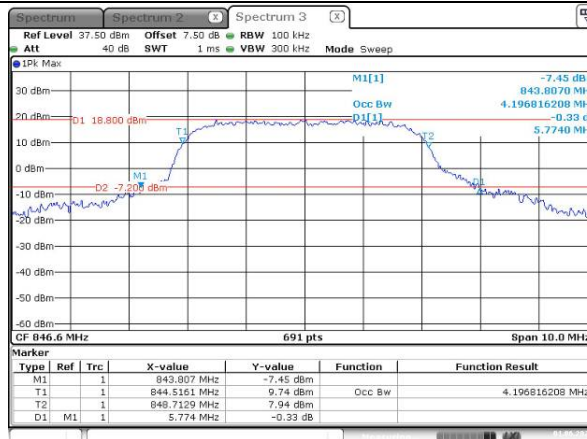



ProjectNo.:2402T76961E Tester:Karl Liang
Date: 1.JUN.2024 00:21:25

Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

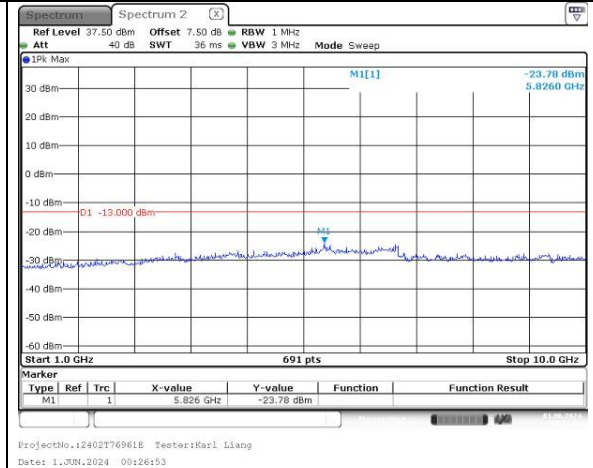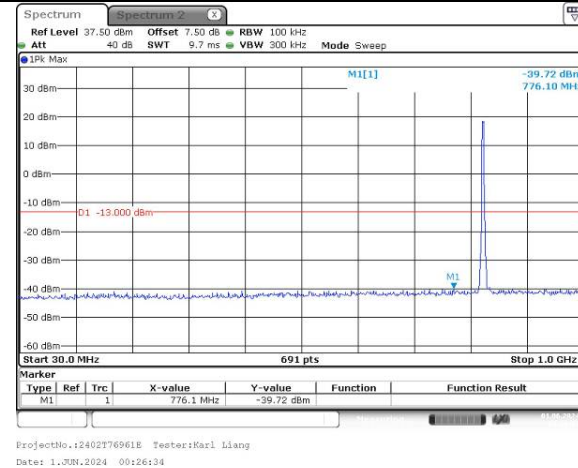

Middle

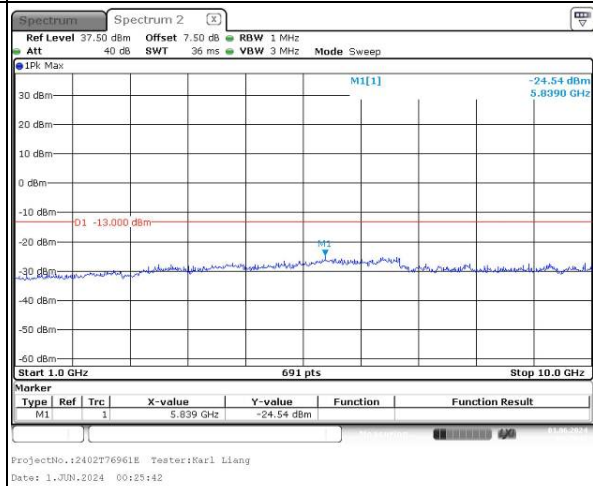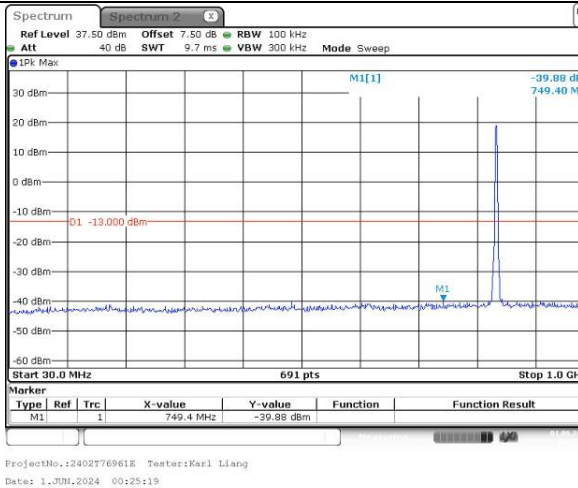

Highest

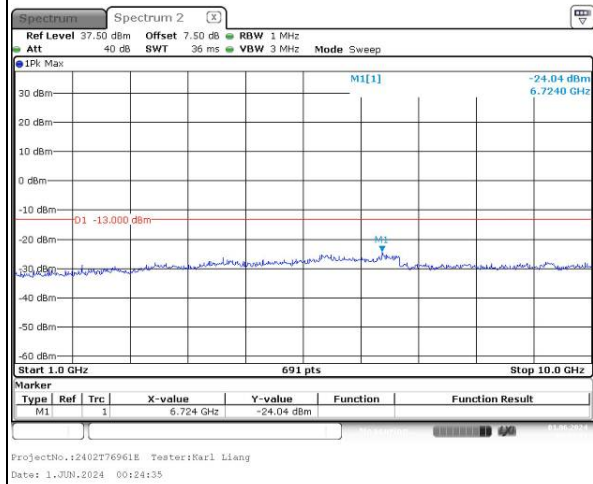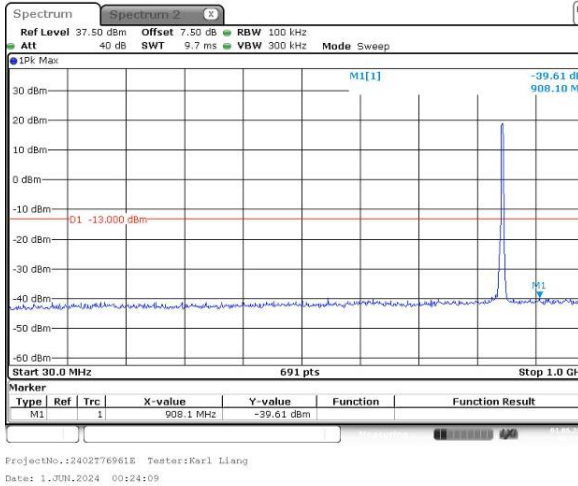

Out of band emission, Band Edge

Mode	Lowest	Highest
R99	ProjectNo.:2402T76961E Tester:Karl Liang Date: 2.JUN.2024 16:32:41	ProjectNo.:2402T76961E Tester:Karl Liang Date: 2.JUN.2024 16:33:29
HSUPA	ProjectNo.:2402T76961E Tester:Karl Liang Date: 2.JUN.2024 16:36:55	ProjectNo.:2402T76961E Tester:Karl Liang Date: 2.JUN.2024 16:37:24
HSDPA	ProjectNo.:2402T76961E Tester:Karl Liang Date: 2.JUN.2024 16:36:19	ProjectNo.:2402T76961E Tester:Karl Liang Date: 2.JUN.2024 16:35:49

5.6 Antenna Port Test Data and Results for LTE Bands:

Please refer to the attachment Appendix A.

5.7 Radiated Spurious Emissions

Serial Number:	2LTC-1	Test Date:	Below 1GHz: 2024/5/31 Above 1GHz: 2024/5/31
Test Site:	Chamber 10m, Chamber B	Test Mode:	Transmitting
Tester:	Zoo Zou, Leo Xiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.9~28.8	Relative Humidity: (%)	54~68	ATM Pressure: (kPa)	100.1~100.6
----------------------	-----------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
30MHz~1000MHz					
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2023/8/1	2024/7/31
Sonoma	Amplifier	310N	185914	2023/8/1	2024/7/31
R&S	EMI Test Receiver	ESCI	100224	2023/8/18	2024/8/17
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
R&S	Wideband Radio Communication Tester	CMW500	147473	2023/10/18	2024/10/17
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2023/9/9	2024/9/8
Agilent	Signal Generator	E8247C	MY43321350	2023/10/18	2024/10/17

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
AH	Horn Antenna	SAS-571	1177	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-03 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2023/11/17	2024/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2023/12/11	2024/12/10
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2023/9/9	2024/9/8
Agilent	Signal Generator	E8247C	MY43321350	2023/10/18	2024/10/17
AH	Preamplifier	PAM-0118P	469	2023/8/19	2024/8/18
AH	Preamplifier	PAM-1840VH	191	2023/9/7	2024/9/6
R&S	Spectrum Analyzer	FSV40	101944	2023/10/18	2024/10/17
R&S	Wideband Radio Communication Tester	CMW500	147473	2023/10/18	2024/10/17
Mini-Circuits	High Pass Filter	VHF-1200+	31102	2023/8/1	2024/7/31
Mini-Circuits	High Pass Filter	VHF-2700A+	31222	2023/12/1	2024/11/30
Mini-Circuits	High Pass Filter	VHF-6010+	31118	2023/12/1	2024/11/30

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

Cellular Band (30MHz-10GHz)

Channel Band (GSM-R to GSM)								
Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 850 Frequency:824.2MHz								
625.58	H	52.64	-49.40	0.00	0.25	-49.65	-13.00	36.65
625.77	V	53.47	-45.90	0.00	0.25	-46.15	-13.00	33.15
1648.40	H	68.66	-56.47	10.44	0.71	-46.74	-13.00	33.74
1648.40	V	66.94	-58.79	10.44	0.71	-49.06	-13.00	36.06
2472.60	H	64.62	-58.16	12.88	1.25	-46.53	-13.00	33.53
2472.60	V	69.64	-53.19	12.88	1.25	-41.56	-13.00	28.56
3296.80	H	64.06	-55.33	13.60	1.59	-43.32	-13.00	30.32
3296.80	V	67.33	-52.06	13.60	1.59	-40.05	-13.00	27.05
GPRS 850 Frequency:836.6MHz								
625.14	H	52.89	-49.16	0.00	0.25	-49.41	-13.00	36.41
625.89	V	53.78	-45.59	0.00	0.25	-45.84	-13.00	32.84
1673.20	H	69.70	-55.05	10.61	0.73	-45.17	-13.00	32.17
1673.20	V	67.57	-57.78	10.61	0.73	-47.90	-13.00	34.90
2509.80	H	65.55	-57.33	13.11	1.25	-45.47	-13.00	32.47
2509.80	V	67.62	-55.28	13.11	1.25	-43.42	-13.00	30.42
3346.40	H	60.44	-58.77	13.83	1.61	-46.55	-13.00	33.55
3346.40	V	64.25	-55.01	13.83	1.61	-42.79	-13.00	29.79
GPRS 850 Frequency:848.8MHz								
625.56	H	53.05	-48.99	0.00	0.25	-49.24	-13.00	36.24
625.40	V	53.90	-45.48	0.00	0.25	-45.73	-13.00	32.73
1697.60	H	68.48	-55.89	10.78	0.75	-45.86	-13.00	32.86
1697.60	V	71.13	-53.84	10.78	0.75	-43.81	-13.00	30.81
2546.40	H	69.17	-53.70	13.15	1.27	-41.82	-13.00	28.82
2546.40	V	65.92	-57.09	13.15	1.27	-45.21	-13.00	32.21
3395.20	H	56.02	-62.97	14.08	1.64	-50.53	-13.00	37.53
3395.20	V	62.89	-56.20	14.08	1.64	-43.76	-13.00	30.76

PCS Band (30MHz-20GHz)

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 1900 Frequency:1850.2MHz								
626.13	H	53.35	-48.68	0.00	0.25	-48.93	-13.00	35.93
625.63	V	54.01	-45.36	0.00	0.25	-45.61	-13.00	32.61
3700.40	H	58.10	-60.47	14.00	1.83	-48.30	-13.00	35.30
3700.40	V	59.26	-59.29	14.00	1.83	-47.12	-13.00	34.12
5550.60	H	51.72	-62.39	13.95	1.27	-49.71	-13.00	36.71
5550.60	V	51.24	-62.72	13.95	1.27	-50.04	-13.00	37.04
GPRS 1900 Frequency:1880MHz								
625.21	H	53.56	-48.48	0.00	0.25	-48.73	-13.00	35.73
624.75	V	54.14	-45.26	0.00	0.25	-45.51	-13.00	32.51
3760.00	H	58.31	-59.53	13.76	1.63	-47.40	-13.00	34.40
3760.00	V	59.76	-57.95	13.76	1.63	-45.82	-13.00	32.82
5640.00	H	51.14	-62.58	14.02	1.31	-49.87	-13.00	36.87
5640.00	V	52.88	-60.73	14.02	1.31	-48.02	-13.00	35.02
GPRS 1900 Frequency:1909.8MHz								
625.87	H	53.77	-48.26	0.00	0.25	-48.51	-13.00	35.51
625.38	V	54.24	-45.14	0.00	0.25	-45.39	-13.00	32.39
3819.60	H	59.27	-58.00	13.56	1.50	-45.94	-13.00	32.94
3819.60	V	60.80	-56.28	13.56	1.50	-44.22	-13.00	31.22
5729.40	H	52.92	-61.10	13.96	1.31	-48.45	-13.00	35.45
5729.40	V	53.25	-60.74	13.96	1.31	-48.09	-13.00	35.09

WCDMA Band 2(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 2 Frequency:1852.4 MHz								
625.76	H	53.38	-48.66	0.00	0.25	-48.91	-13.00	35.91
625.73	V	54.21	-45.16	0.00	0.25	-45.41	-13.00	32.41
3704.80	H	48.30	-70.22	13.98	1.81	-58.05	-13.00	45.05
3704.80	V	48.40	-70.09	13.98	1.81	-57.92	-13.00	44.92
5557.20	H	48.36	-65.69	13.97	1.27	-52.99	-13.00	39.99
5557.20	V	49.50	-64.40	13.97	1.27	-51.70	-13.00	38.70
WCDMA Band 2 Frequency:1880MHz								
625.59	H	53.53	-48.51	0.00	0.25	-48.76	-13.00	35.76
625.20	V	54.37	-45.02	0.00	0.25	-45.27	-13.00	32.27
3760.00	H	48.59	-69.25	13.76	1.63	-57.12	-13.00	44.12
3760.00	V	49.26	-68.45	13.76	1.63	-56.32	-13.00	43.32
5640.00	H	49.22	-64.50	14.02	1.31	-51.79	-13.00	38.79
5640.00	V	50.37	-63.24	14.02	1.31	-50.53	-13.00	37.53
WCDMA Band 2 Frequency:1907.6MHz								
626.22	H	53.76	-48.27	0.00	0.25	-48.52	-13.00	35.52
625.42	V	54.53	-44.85	0.00	0.25	-45.10	-13.00	32.10
3815.20	H	50.52	-66.77	13.57	1.50	-54.70	-13.00	41.70
3815.20	V	52.09	-65.01	13.57	1.50	-52.94	-13.00	39.94
5722.80	H	50.47	-63.52	13.95	1.32	-50.89	-13.00	37.89
5722.80	V	51.75	-62.19	13.95	1.32	-49.56	-13.00	36.56

WCDMA Band 4(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 4 Frequency:1712.4 MHz								
625.68	H	53.25	-48.79	0.00	0.25	-49.04	-13.00	36.04
625.54	V	53.79	-45.59	0.00	0.25	-45.84	-13.00	32.84
3424.80	H	59.31	-59.59	14.03	1.63	-47.19	-13.00	34.19
3424.80	V	54.54	-64.43	14.03	1.63	-52.03	-13.00	39.03
5137.20	H	58.10	-58.40	13.94	1.39	-45.85	-13.00	32.85
5137.20	V	56.35	-60.07	13.94	1.39	-47.52	-13.00	34.52
WCDMA Band 4 Frequency:1732.6MHz								
625.95	H	53.48	-48.55	0.00	0.25	-48.80	-13.00	35.80
624.99	V	54.16	-45.23	0.00	0.25	-45.48	-13.00	32.48
3465.20	H	60.08	-58.70	13.90	1.62	-46.42	-13.00	33.42
3465.20	V	55.40	-63.41	13.90	1.62	-51.13	-13.00	38.13
5197.80	H	58.23	-58.14	14.00	1.52	-45.66	-13.00	32.66
5197.80	V	55.62	-60.82	14.00	1.52	-48.34	-13.00	35.34
WCDMA Band 4 Frequency:1752.6MHz								
625.28	H	53.67	-48.37	0.00	0.25	-48.62	-13.00	35.62
625.23	V	54.26	-45.12	0.00	0.25	-45.37	-13.00	32.37
3505.20	H	62.33	-56.37	13.82	1.60	-44.15	-13.00	31.15
3505.20	V	55.85	-62.85	13.82	1.60	-50.63	-13.00	37.63
5257.80	H	60.16	-56.57	14.17	1.31	-43.71	-13.00	30.71
5257.80	V	59.31	-57.50	14.17	1.31	-44.64	-13.00	31.64

WCDMA Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
625.32	H	52.35	-49.69	0.00	0.25	-49.94	-13.00	36.94
625.88	V	53.51	-45.86	0.00	0.25	-46.11	-13.00	33.11
1652.80	H	46.42	-78.64	10.47	0.72	-68.89	-13.00	55.89
1652.80	V	46.13	-79.53	10.47	0.72	-69.78	-13.00	56.78
2479.20	H	45.28	-77.52	12.93	1.25	-65.84	-13.00	52.84
2479.20	V	46.05	-76.79	12.93	1.25	-65.11	-13.00	52.11
3305.60	H	45.31	-74.08	13.63	1.59	-62.04	-13.00	49.04
3305.60	V	45.14	-74.26	13.63	1.59	-62.22	-13.00	49.22
WCDMA Band 5 Frequency:836.6MHz								
626.84	H	53.02	-49.00	0.00	0.25	-49.25	-13.00	36.25
625.15	V	53.81	-45.58	0.00	0.25	-45.83	-13.00	32.83
1673.20	H	52.14	-72.61	10.61	0.73	-62.73	-13.00	49.73
1673.20	V	50.32	-75.03	10.61	0.73	-65.15	-13.00	52.15
2509.80	H	48.71	-74.17	13.11	1.25	-62.31	-13.00	49.31
2509.80	V	46.53	-76.37	13.11	1.25	-64.51	-13.00	51.51
3346.40	H	51.35	-67.86	13.83	1.61	-55.64	-13.00	42.64
3346.40	V	47.56	-71.70	13.83	1.61	-59.48	-13.00	46.48
WCDMA Band 5 Frequency:846.6MHz								
625.55	H	53.26	-48.78	0.00	0.25	-49.03	-13.00	36.03
625.78	V	54.05	-45.32	0.00	0.25	-45.57	-13.00	32.57
1693.20	H	59.32	-65.12	10.75	0.75	-55.12	-13.00	42.12
1693.20	V	58.27	-66.77	10.75	0.75	-56.77	-13.00	43.77
2539.80	H	51.31	-71.56	13.14	1.27	-59.69	-13.00	46.69
2539.80	V	46.49	-76.50	13.14	1.27	-64.63	-13.00	51.63
3386.40	H	53.80	-65.23	14.03	1.63	-52.83	-13.00	39.83
3386.40	V	49.29	-69.83	14.03	1.63	-57.43	-13.00	44.43

LTE Bands:

(The Worst modulation and bandwidth was below)

LTE Band 2(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK,Frequency:1850.7 MHz								
625.93	H	54.33	-47.70	0.00	0.25	-47.95	-13.00	34.95
625.45	V	55.63	-43.75	0.00	0.25	-44.00	-13.00	31.00
3701.40	H	49.33	-69.23	13.99	1.83	-57.07	-13.00	44.07
3701.40	V	50.34	-68.20	13.99	1.83	-56.04	-13.00	43.04
5552.10	H	56.27	-57.83	13.96	1.27	-45.14	-13.00	32.14
5552.10	V	54.44	-59.51	13.96	1.27	-46.82	-13.00	33.82
1RB, 1.4MHz, QPSK,Frequency:1880 MHz								
626.19	H	54.80	-47.23	0.00	0.25	-47.48	-13.00	34.48
624.89	V	55.82	-43.57	0.00	0.25	-43.82	-13.00	30.82
3760.00	H	50.24	-67.60	13.76	1.63	-55.47	-13.00	42.47
3760.00	V	49.18	-68.53	13.76	1.63	-56.40	-13.00	43.40
5640.00	H	57.47	-56.25	14.02	1.31	-43.54	-13.00	30.54
5640.00	V	55.45	-58.16	14.02	1.31	-45.45	-13.00	32.45
1RB, 1.4MHz, QPSK,Frequency:1909.3 MHz								
626.58	H	54.85	-47.17	0.00	0.25	-47.42	-13.00	34.42
624.82	V	55.91	-43.48	0.00	0.25	-43.73	-13.00	30.73
3818.60	H	52.52	-64.75	13.56	1.50	-52.69	-13.00	39.69
3818.60	V	52.61	-64.48	13.56	1.50	-52.42	-13.00	39.42
5727.90	H	58.64	-55.37	13.96	1.31	-42.72	-13.00	29.72
5727.90	V	56.27	-57.71	13.96	1.31	-45.06	-13.00	32.06

LTE Band 4(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK,Frequency:1710.7 MHz								
625.36	H	56.16	-45.88	0.00	0.25	-46.13	-13.00	33.13
625.03	V	56.35	-43.04	0.00	0.25	-43.29	-13.00	30.29
3421.40	H	48.26	-70.65	14.04	1.63	-58.24	-13.00	45.24
3421.40	V	47.38	-71.60	14.04	1.63	-59.19	-13.00	46.19
5132.10	H	50.16	-66.35	13.93	1.37	-53.79	-13.00	40.79
5132.10	V	48.27	-68.15	13.93	1.37	-55.59	-13.00	42.59
1RB, 1.4MHz, QPSK,Frequency:1732.5 MHz								
625.51	H	56.67	-45.37	0.00	0.25	-45.62	-13.00	32.62
624.83	V	56.15	-43.24	0.00	0.25	-43.49	-13.00	30.49
3465.00	H	48.79	-69.99	13.91	1.62	-57.70	-13.00	44.70
3465.00	V	48.20	-70.61	13.91	1.62	-58.32	-13.00	45.32
5197.50	H	50.25	-66.12	14.00	1.52	-53.64	-13.00	40.64
5197.50	V	49.37	-67.07	14.00	1.52	-54.59	-13.00	41.59
1RB, 1.4MHz, QPSK,Frequency:1754.3MHz								
625.81	H	56.76	-45.28	0.00	0.25	-45.53	-13.00	32.53
624.57	V	56.41	-42.99	0.00	0.25	-43.24	-13.00	30.24
3508.60	H	48.49	-70.22	13.83	1.60	-57.99	-13.00	44.99
3508.60	V	48.75	-69.96	13.83	1.60	-57.73	-13.00	44.73
5262.90	H	50.93	-65.84	14.19	1.29	-52.94	-13.00	39.94
5262.90	V	48.34	-68.51	14.19	1.29	-55.61	-13.00	42.61

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 1.4MHz, QPSK, Frequency: 824.7 MHz								
626.51	H	53.88	-48.14	0.00	0.25	-48.39	-13.00	35.39
624.67	V	54.95	-44.45	0.00	0.25	-44.70	-13.00	31.70
1649.40	H	59.70	-65.41	10.45	0.71	-55.67	-13.00	42.67
1649.40	V	60.47	-65.24	10.45	0.71	-55.50	-13.00	42.50
2474.10	H	50.65	-72.13	12.89	1.25	-60.49	-13.00	47.49
2474.10	V	49.79	-73.04	12.89	1.25	-61.40	-13.00	48.40
3298.80	H	53.44	-65.97	13.60	1.59	-53.96	-13.00	40.96
3298.80	V	55.60	-63.81	13.60	1.59	-51.80	-13.00	38.80
1RB, 1.4MHz, QPSK, Frequency: 836.5 MHz								
626.16	H	54.03	-48.00	0.00	0.25	-48.25	-13.00	35.25
624.79	V	55.14	-44.26	0.00	0.25	-44.51	-13.00	31.51
1673.00	H	62.83	-61.92	10.61	0.73	-52.04	-13.00	39.04
1673.00	V	62.70	-62.65	10.61	0.73	-52.77	-13.00	39.77
2509.50	H	50.48	-72.40	13.11	1.25	-60.54	-13.00	47.54
2509.50	V	51.10	-71.80	13.11	1.25	-59.94	-13.00	46.94
3346.00	H	54.17	-65.04	13.83	1.61	-52.82	-13.00	39.82
3346.00	V	57.24	-62.02	13.83	1.61	-49.80	-13.00	36.80
1RB, 1.4MHz, QPSK, Frequency: 848.3 MHz								
626.64	H	54.27	-47.75	0.00	0.25	-48.00	-13.00	35.00
625.22	V	55.44	-43.94	0.00	0.25	-44.19	-13.00	31.19
1696.60	H	59.26	-65.12	10.78	0.75	-55.09	-13.00	42.09
1696.60	V	61.95	-63.03	10.78	0.75	-53.00	-13.00	40.00
2544.90	H	51.88	-70.99	13.14	1.27	-59.12	-13.00	46.12
2544.90	V	48.80	-74.21	13.14	1.27	-62.34	-13.00	49.34
3393.20	H	54.77	-64.23	14.07	1.64	-51.80	-13.00	38.80
3393.20	V	52.88	-66.21	14.07	1.64	-53.78	-13.00	40.78

LTE Band 7(30MHz-26GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 5MHz, QPSK, Frequency: 2502.5 MHz								
626.75	H	54.98	-47.04	0.00	0.25	-47.29	-25.00	22.29
625.30	V	55.26	-44.12	0.00	0.25	-44.37	-25.00	19.37
5005.00	H	55.97	-61.68	14.00	1.43	-49.11	-25.00	24.11
5005.00	V	60.17	-57.24	14.00	1.43	-44.67	-25.00	19.67
7507.50	H	49.46	-59.67	13.20	1.33	-47.80	-25.00	22.80
7507.50	V	48.98	-60.63	13.20	1.33	-48.76	-25.00	23.76
1RB, 5MHz, QPSK, Frequency: 2535 MHz								
626.82	H	55.07	-46.95	0.00	0.25	-47.20	-25.00	22.20
624.93	V	55.80	-43.59	0.00	0.25	-43.84	-25.00	18.84
5070.00	H	57.17	-59.74	13.93	1.34	-47.15	-25.00	22.15
5070.00	V	60.85	-55.87	13.93	1.34	-43.28	-25.00	18.28
7605.00	H	50.54	-58.87	13.21	1.40	-47.06	-25.00	22.06
7605.00	V	48.22	-61.59	13.21	1.40	-49.78	-25.00	24.78
1RB, 5MHz, QPSK, Frequency: 2567.5 MHz								
626.03	H	55.32	-46.71	0.00	0.25	-46.96	-25.00	21.96
625.27	V	56.04	-43.34	0.00	0.25	-43.59	-25.00	18.59
5135.00	H	58.16	-58.34	13.94	1.38	-45.78	-25.00	20.78
5135.00	V	60.58	-55.84	13.94	1.38	-43.28	-25.00	18.28
7702.50	H	50.68	-59.01	13.40	1.47	-47.08	-25.00	22.08
7702.50	V	49.87	-60.14	13.40	1.47	-48.21	-25.00	23.21

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

APPENDIX A - EUT PHOTOGRAPHS

Please refer to the attachment 2402T76961E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and
2402T76961E-RF-INP EUT INTERNAL PHOTOGRAPHS

APPENDIX B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402T76961E-RF-00G-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******