





11N20SISO-Ant1-2437-1000~26500-PASS

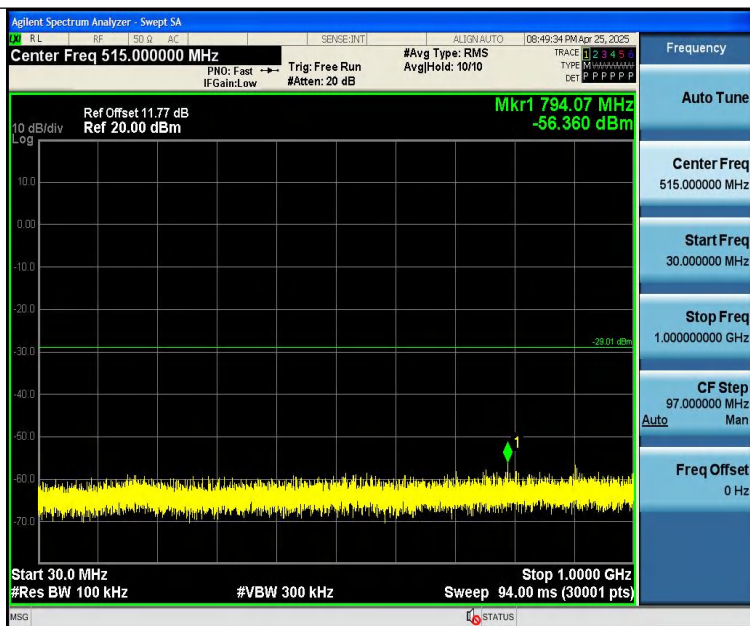


11N20SISO-Ant1-2462-0~Reference-PASS

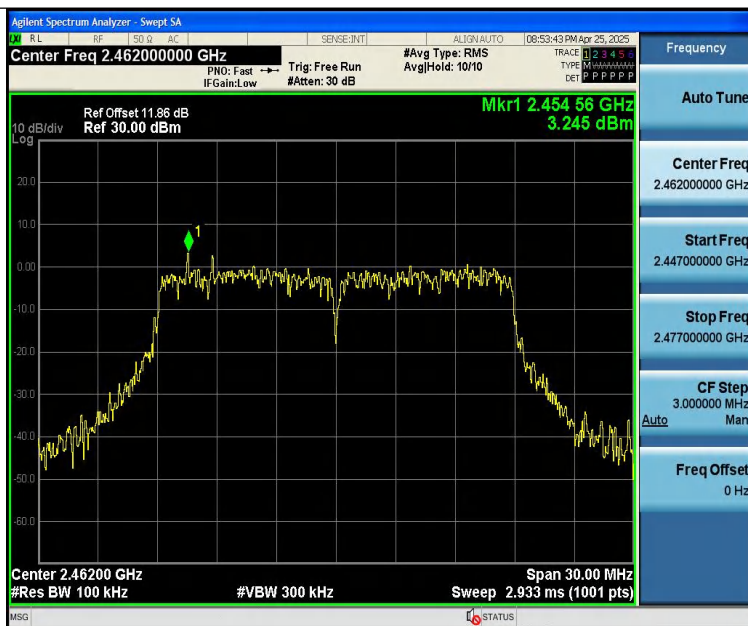


11N20SISO-Ant1-2462-30~1000-PASS




11N20SISO-Ant1-2462-1000~26500-PASS

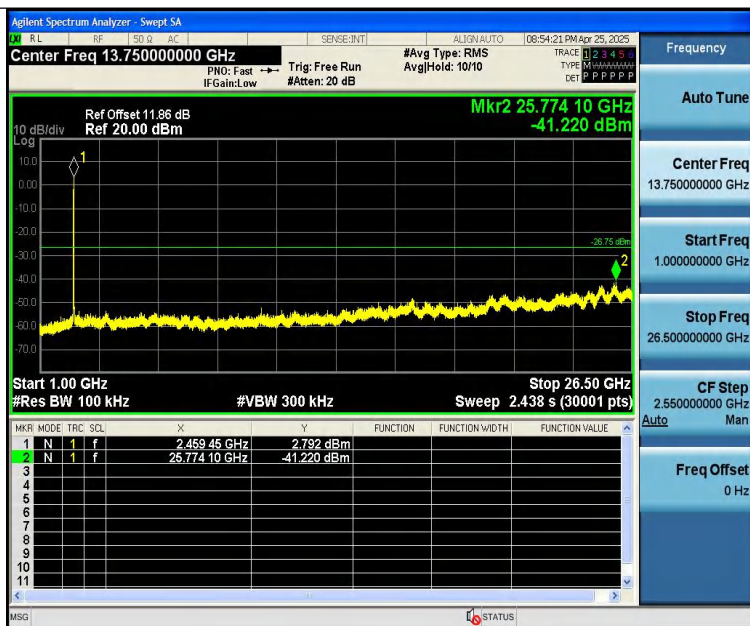


11N40SISO-Ant1-2422-0~Reference-PASS

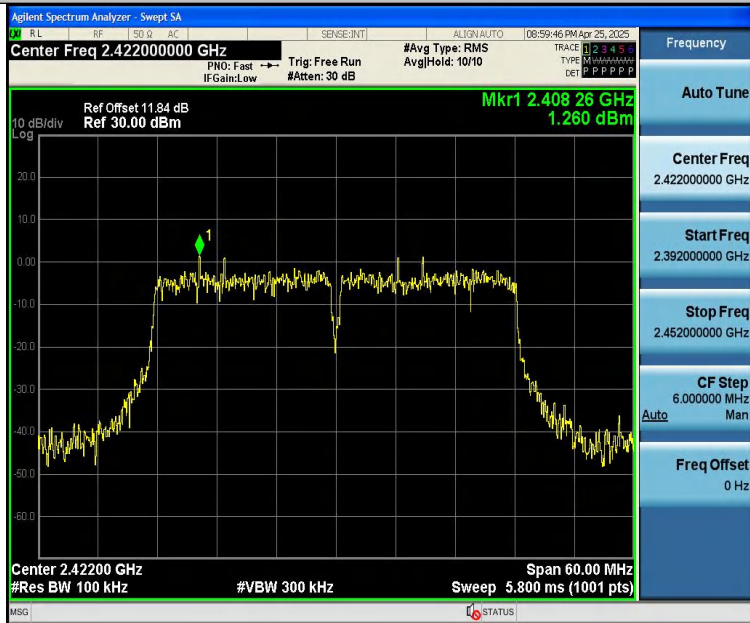


11N40SISO-Ant1-2422-30~1000-PASS

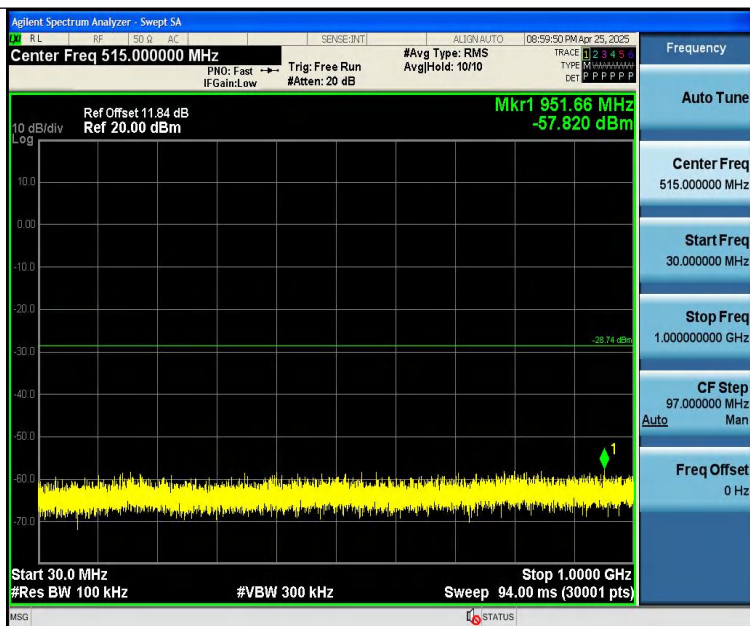


11N40SISO-Ant1-2422-1000~26500-PASS

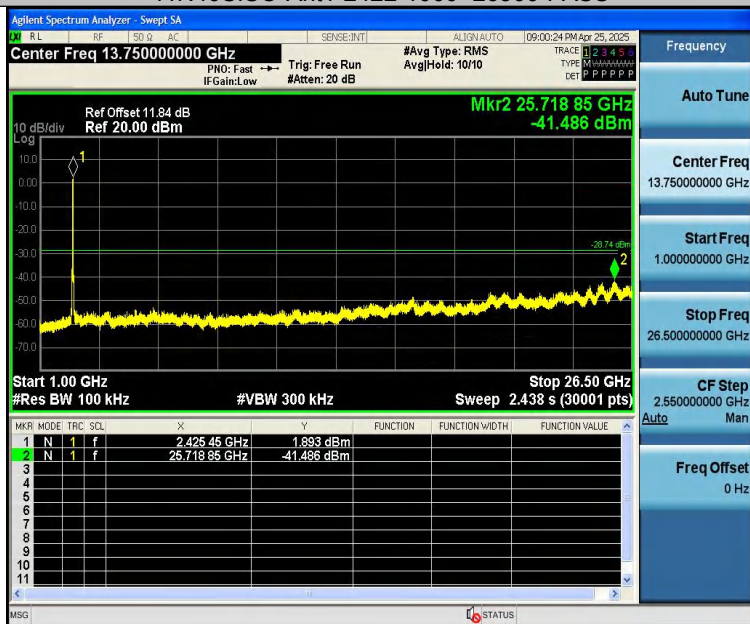


11N40SISO-Ant1-2437-0~Reference-PASS

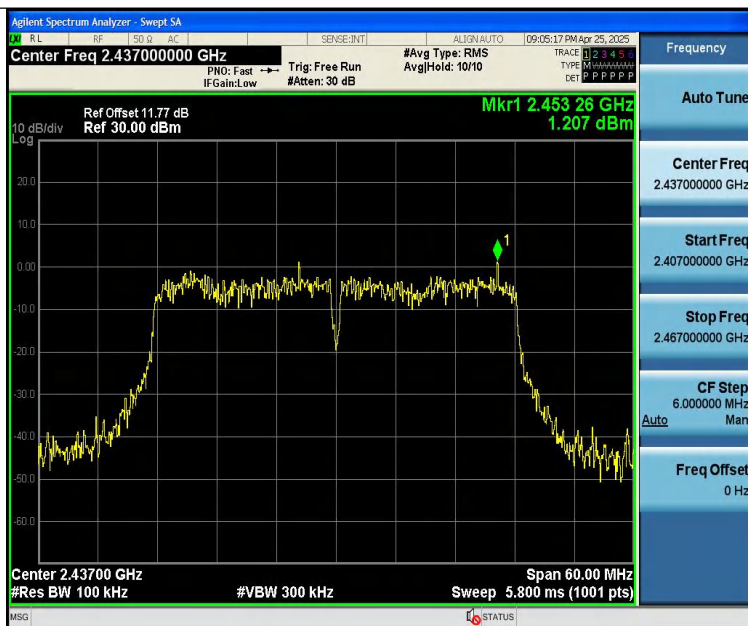

11N40SISO-Ant1-2437-30~1000-PASS

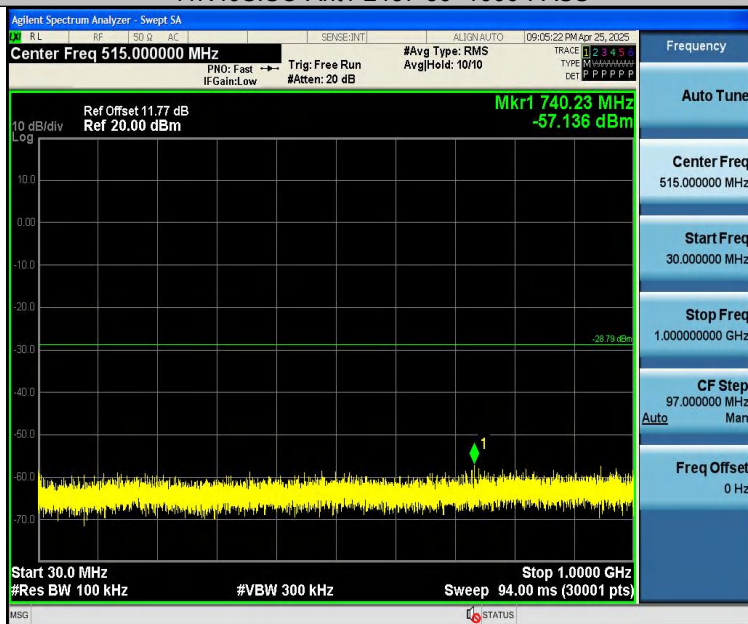


11N40SISO-Ant1-2437-1000~26500-PASS

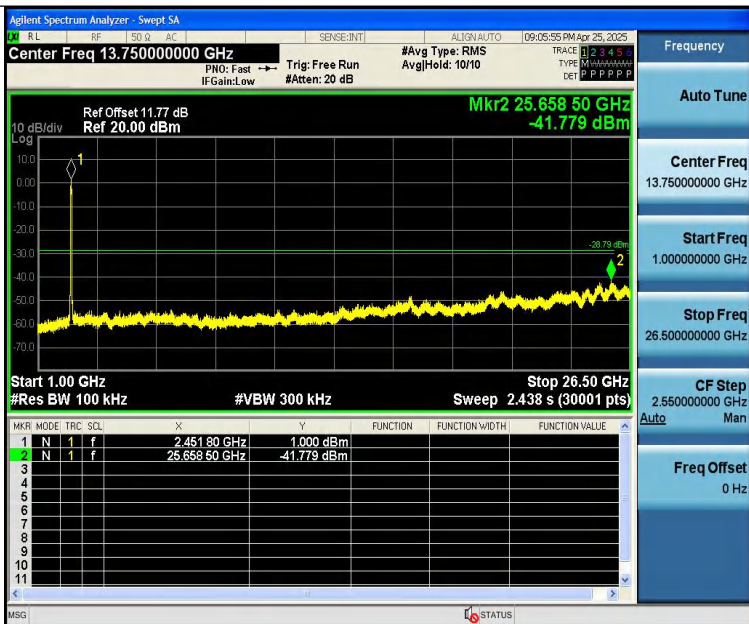


11N40SISO-Ant1-2452-0~Reference-PASS



11N40SISO-Ant1-2452-30~1000-PASS

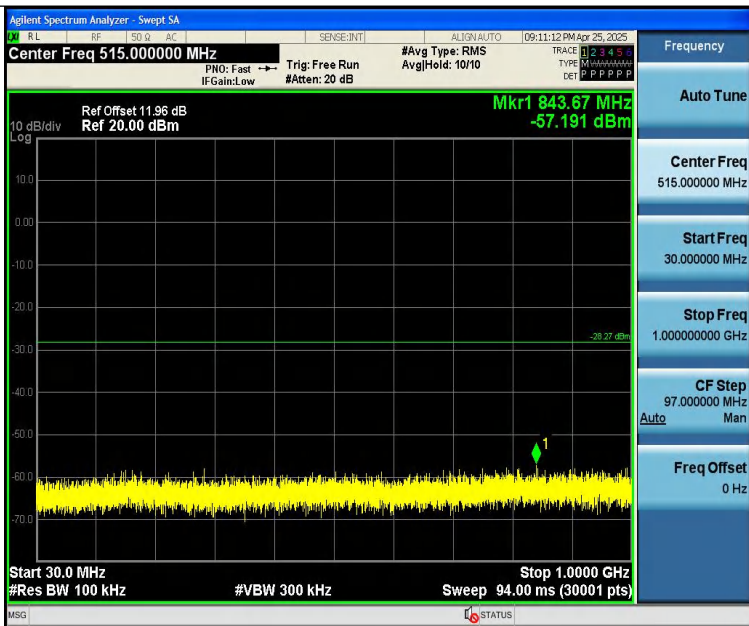

11N40SISO-Ant1-2452-1000~26500-PASS

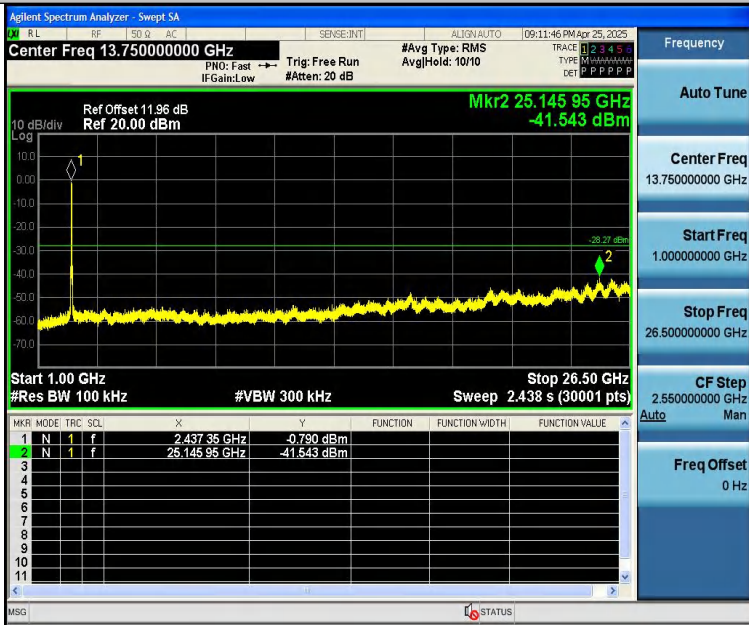


8 Band Edge Measurement

Test Requirement	:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Setup




8.3 Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	10.89	-26.74	≤-19.11	PASS
11B	Ant1	High	2462	9.54	-45.37	≤-20.46	PASS
11G	Ant1	Low	2412	5.06	-30.29	≤-24.94	PASS
11G	Ant1	High	2462	4.78	-45.67	≤-25.22	PASS
11N20SISO	Ant1	Low	2412	4.93	-31.73	≤-25.07	PASS
11N20SISO	Ant1	High	2462	4.16	-44.14	≤-25.84	PASS
11N40SISO	Ant1	Low	2422	2.02	-30.18	≤-27.98	PASS
11N40SISO	Ant1	High	2452	1.78	-37.76	≤-28.22	PASS




Test Graphs:




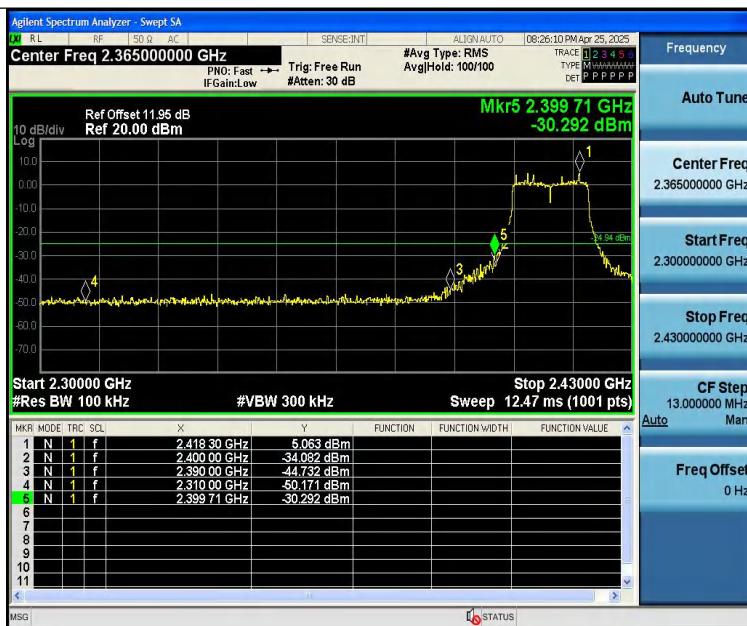


11G-Ant1-2462-PASS

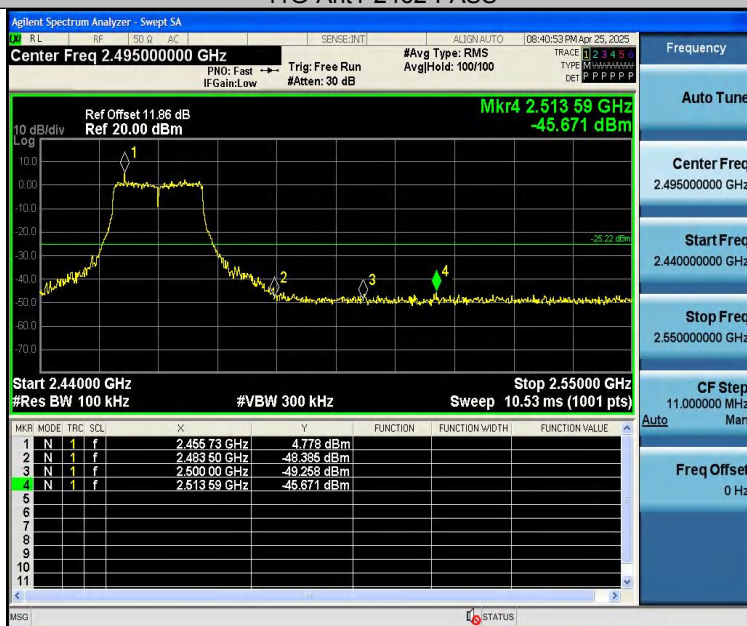

11N20SISO-Ant1-2412-PASS

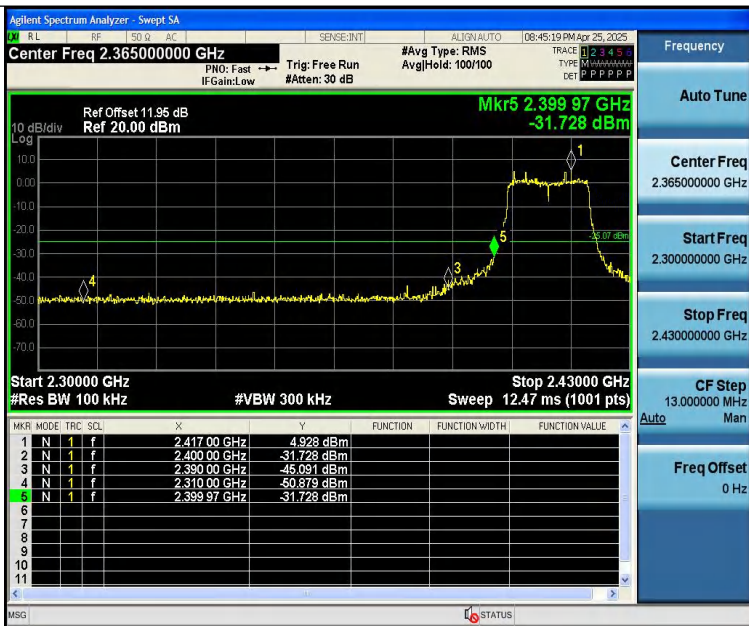

11N20SISO-Ant1-2462-PASS

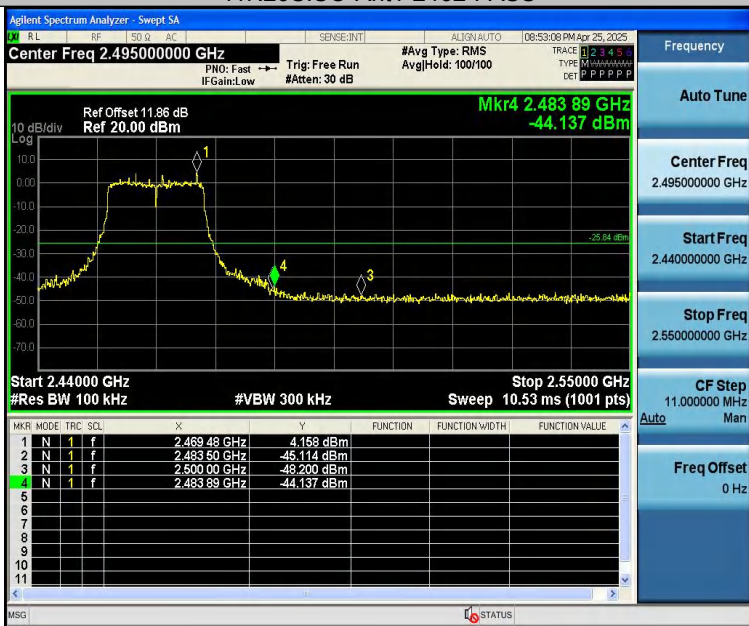

11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2452-PASS





9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

9.2 Test Setup



9.3 Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.080	2405.960	2417.040	0.5	PASS
11B	Ant1	2437	10.080	2431.960	2442.040	0.5	PASS
11B	Ant1	2462	11.080	2456.960	2468.040	0.5	PASS
11G	Ant1	2412	16.320	2403.840	2420.160	0.5	PASS
11G	Ant1	2437	16.320	2428.840	2445.160	0.5	PASS
11G	Ant1	2462	16.320	2453.840	2470.160	0.5	PASS
11N20SISO	Ant1	2412	17.560	2403.240	2420.800	0.5	PASS
11N20SISO	Ant1	2437	17.160	2428.240	2445.400	0.5	PASS
11N20SISO	Ant1	2462	16.920	2453.480	2470.400	0.5	PASS
11N40SISO	Ant1	2422	35.520	2404.240	2439.760	0.5	PASS
11N40SISO	Ant1	2437	35.280	2419.240	2454.520	0.5	PASS
11N40SISO	Ant1	2452	35.280	2434.240	2469.520	0.5	PASS



Test Graphs:





11G-Ant1-2412-PASS



11G-Ant1-2437-PASS



11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS




11N20SISO-Ant1-2437-PASS




11N20SISO-Ant1-2462-PASS



11N40SISO-Ant1-2422-PASS

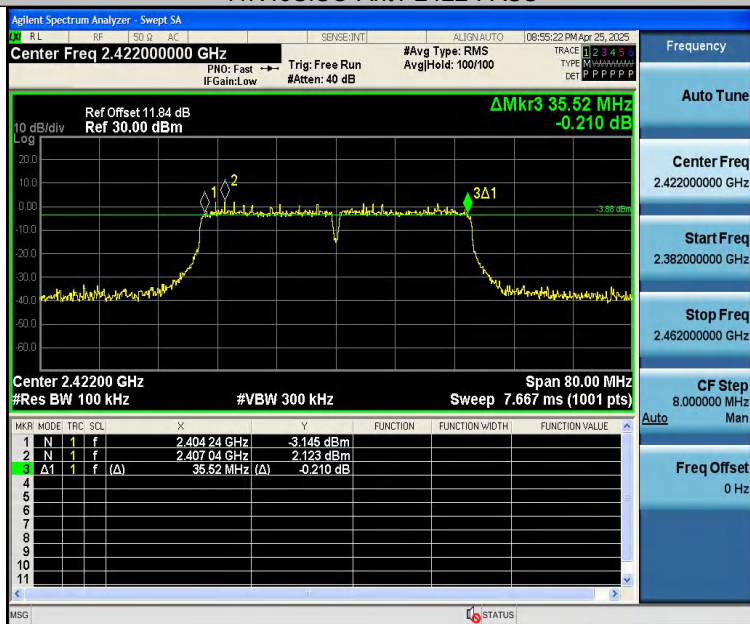

11N40SISO-Ant1-2437-PASS

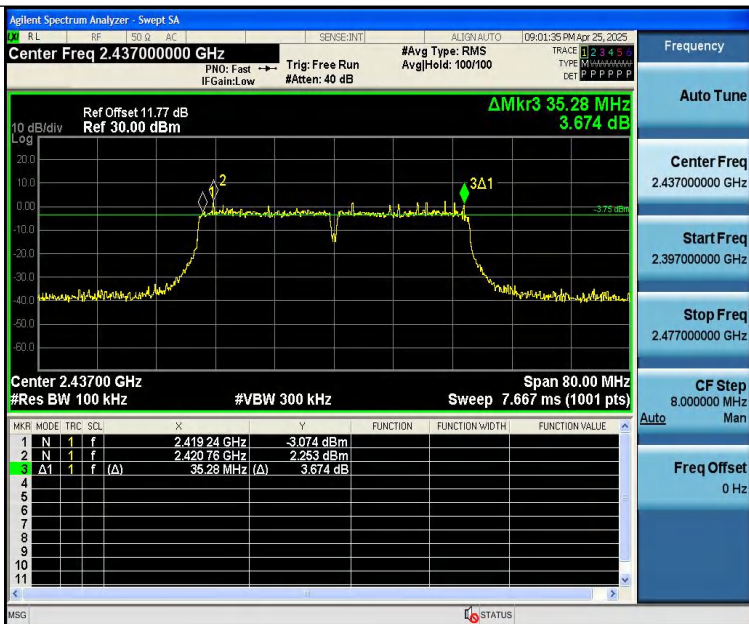

11N40SISO-Ant1-2452-PASS

