

Test Plot 1#: GSM 850 Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 836.6\text{MHz}$; $\sigma = 0.945\text{ S/m}$; $\epsilon_r = 40.905$; $\rho = 1000\text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.249 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.06 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

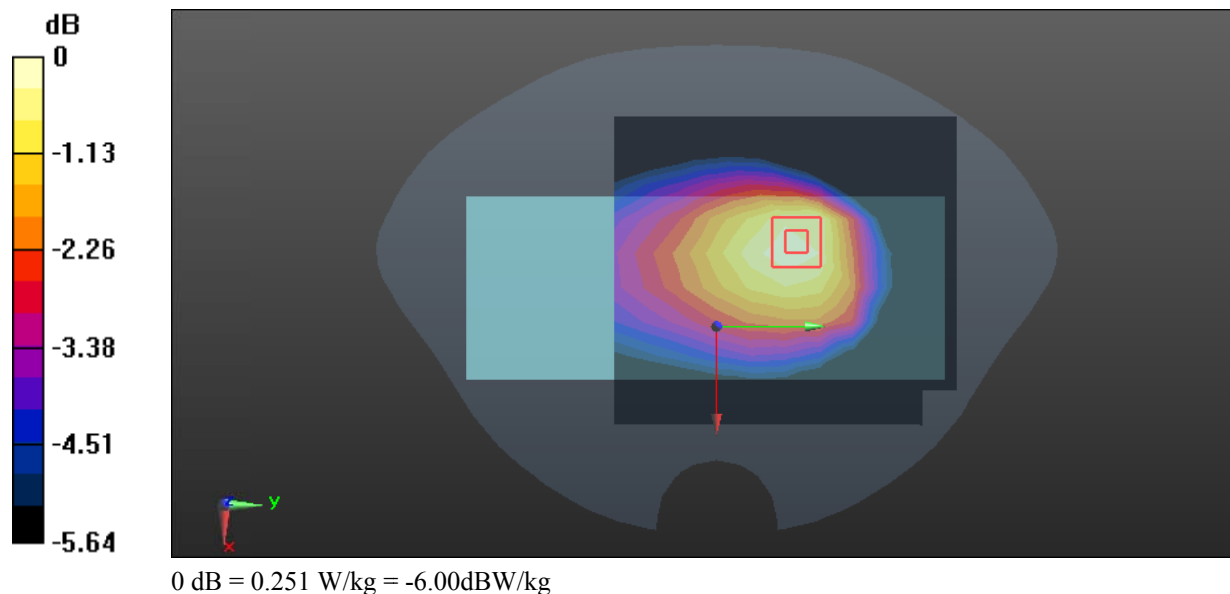

Test Plot 2#: GSM 850 Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 836.6MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6\text{MHz}$; $\sigma = 0.945\text{ S/m}$; $\epsilon_r = 40.905$; $\rho = 1000\text{ kg/m}^3$;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.82 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.60 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.54 W/kg; SAR(10 g) = 0.990 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

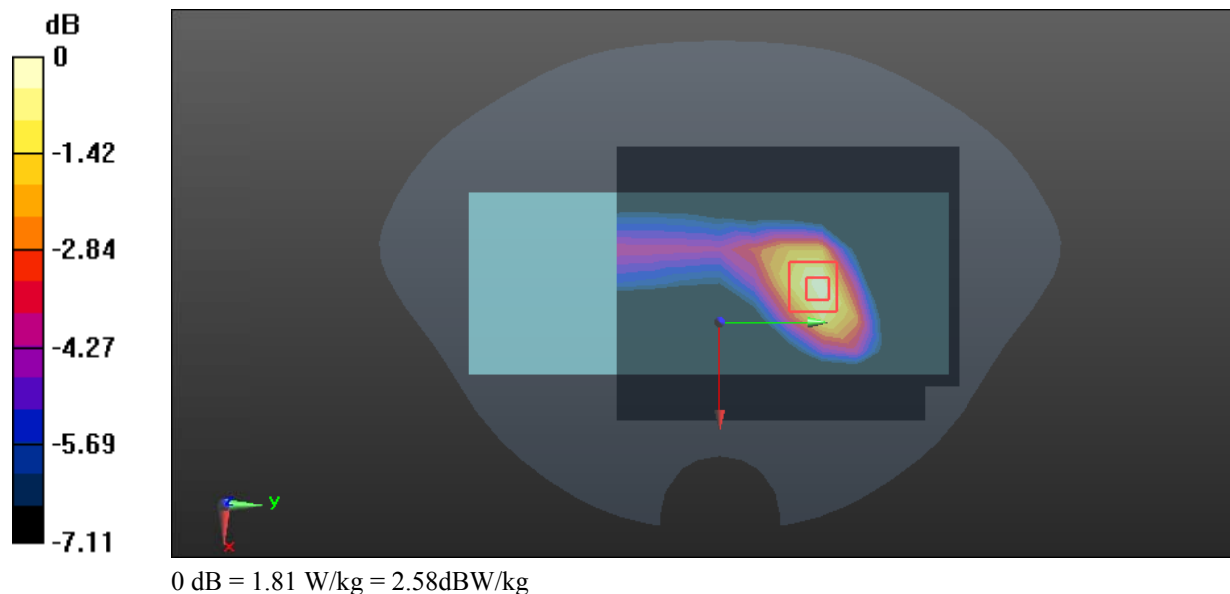

Test Plot 3#: PCS 1900 Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.42\text{ S/m}$; $\epsilon_r = 39.359$; $\rho = 1000\text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.124 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.550 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

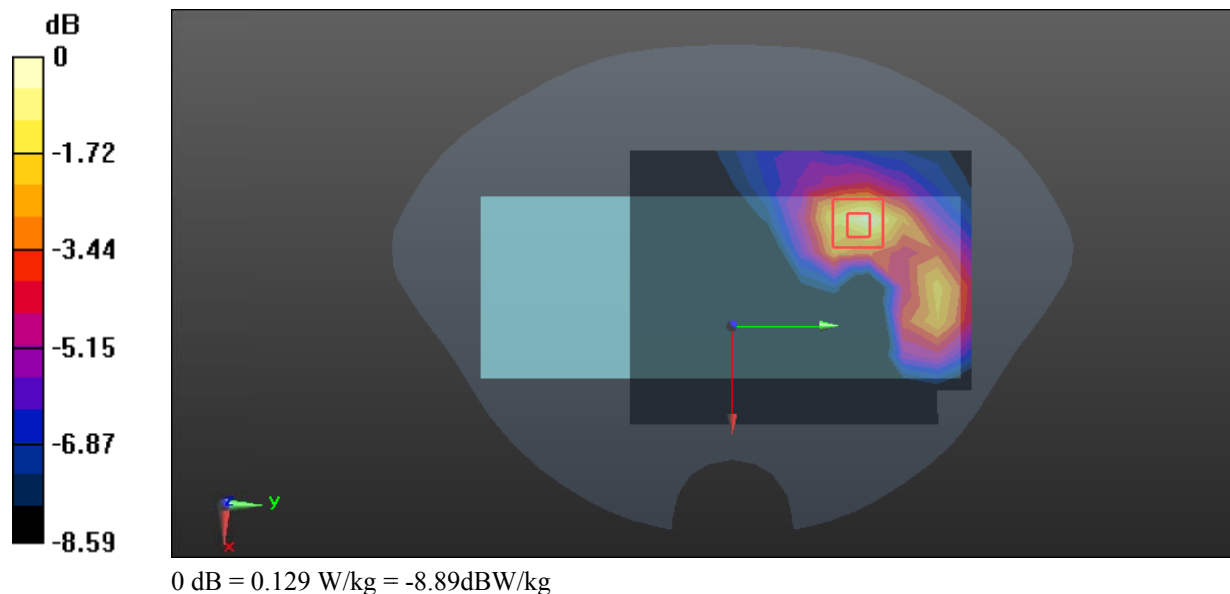

Test Plot 4#: PCS 1900 Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880MHz; Duty Cycle: 1:2
 Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.42\text{ S/m}$; $\epsilon_r = 39.359$; $\rho = 1000\text{ kg/m}^3$;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.81 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.47 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.915 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

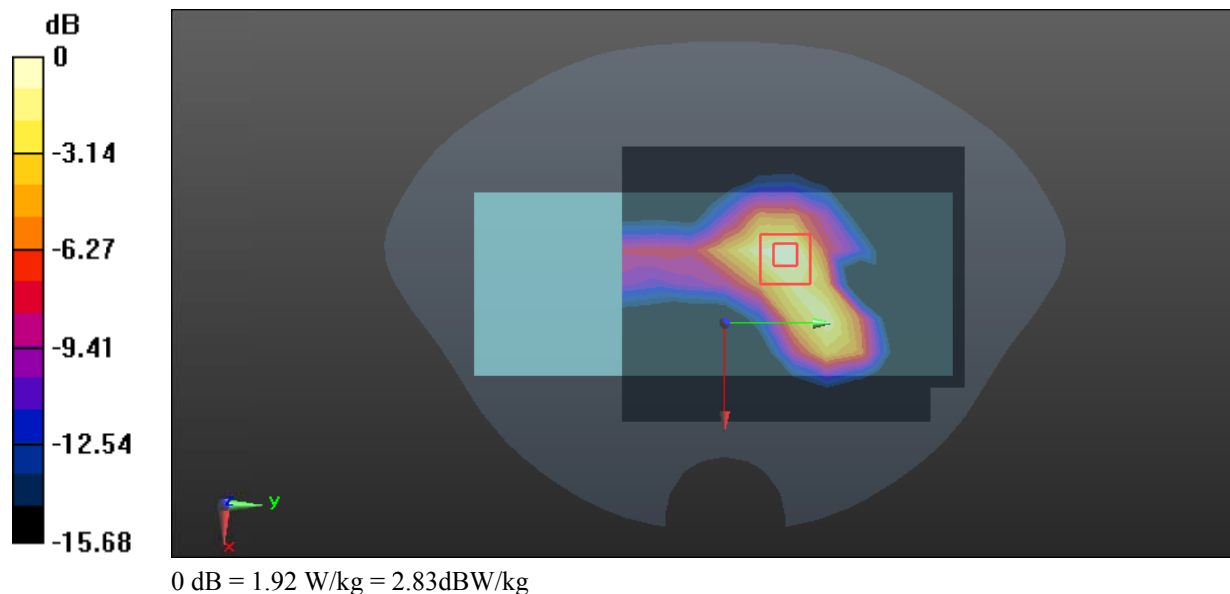

Test Plot 5#: WCDMA Band 2 Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: WCDMA (0); Frequency:1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.359$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.194 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.152 V/m; Power Drift = 0.00dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.205 W/kg

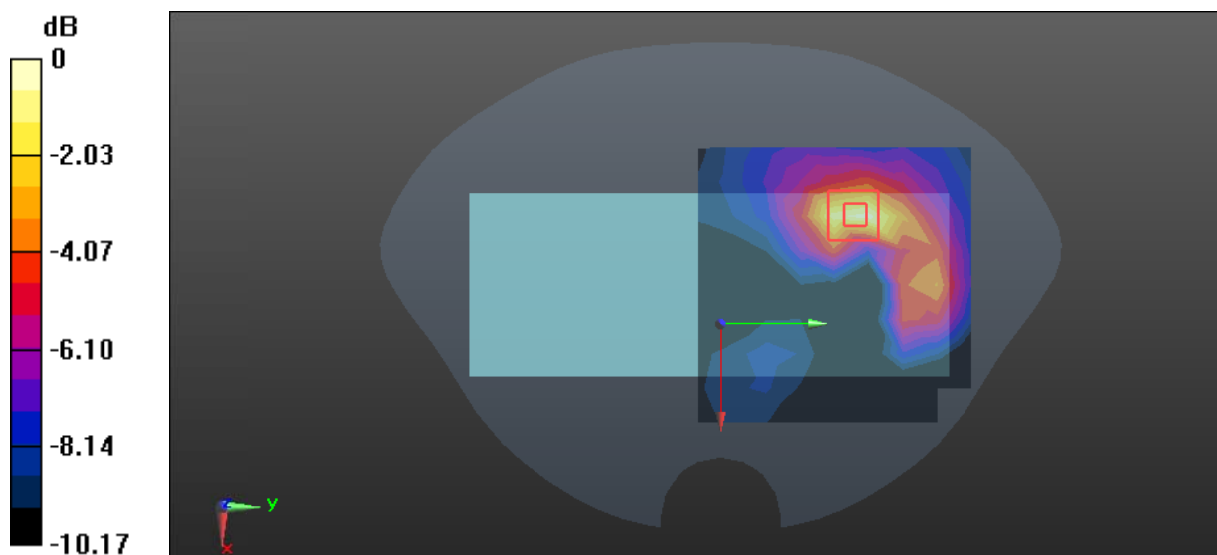

0 dB = 0.205 W/kg = -6.88dBW/kg

Test Plot 6#: WCDMA Band 2 Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: WCDMA (0); Frequency:1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.359$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.48 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.86 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.92 W/kg

SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.34 W/kg

Maximum value of SAR (measured) = 2.90 W/kg

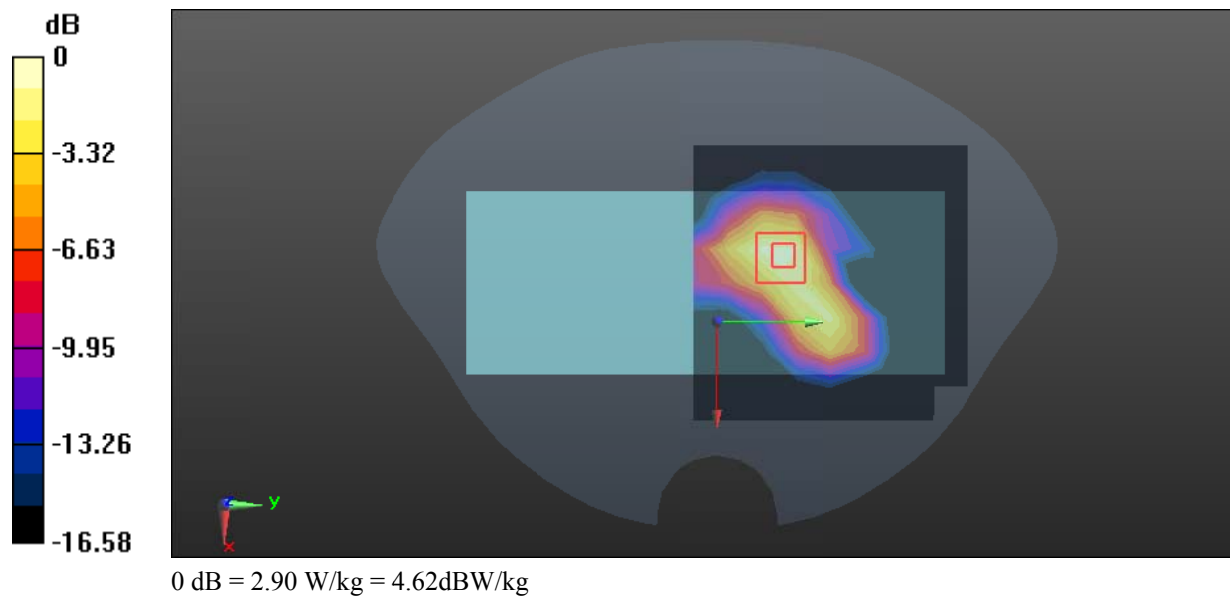

Test Plot 7#: WCDMA Band 4 Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: WCDMA (0); Frequency:1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.174 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.964 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

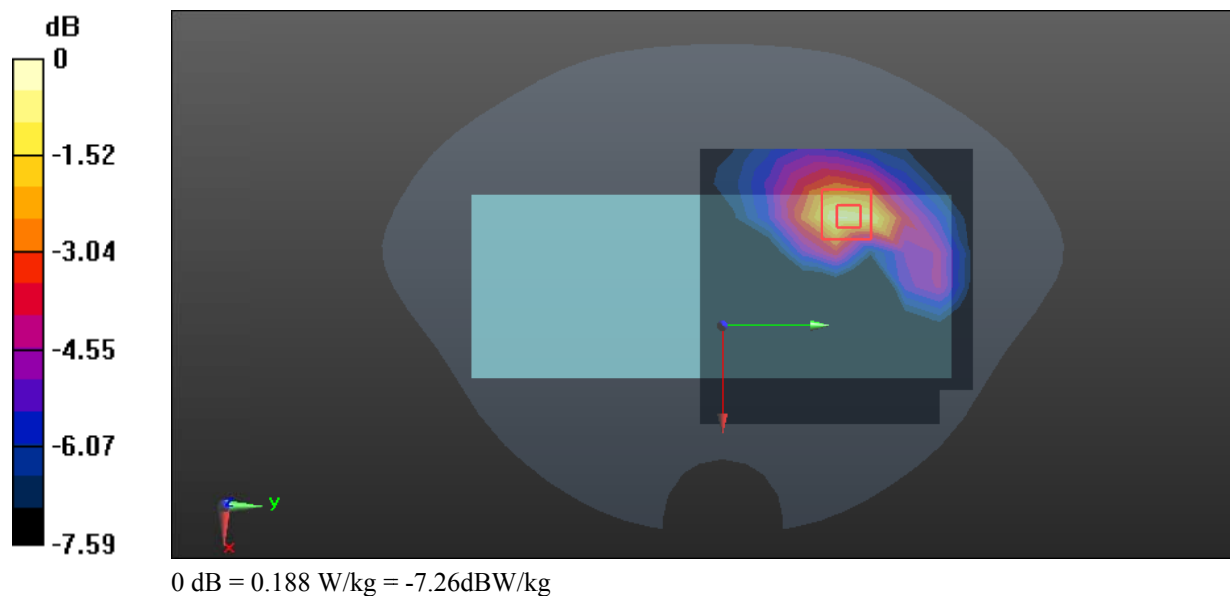

Test Plot 8#: WCDMA Band 4 Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.66 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.33 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.869 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

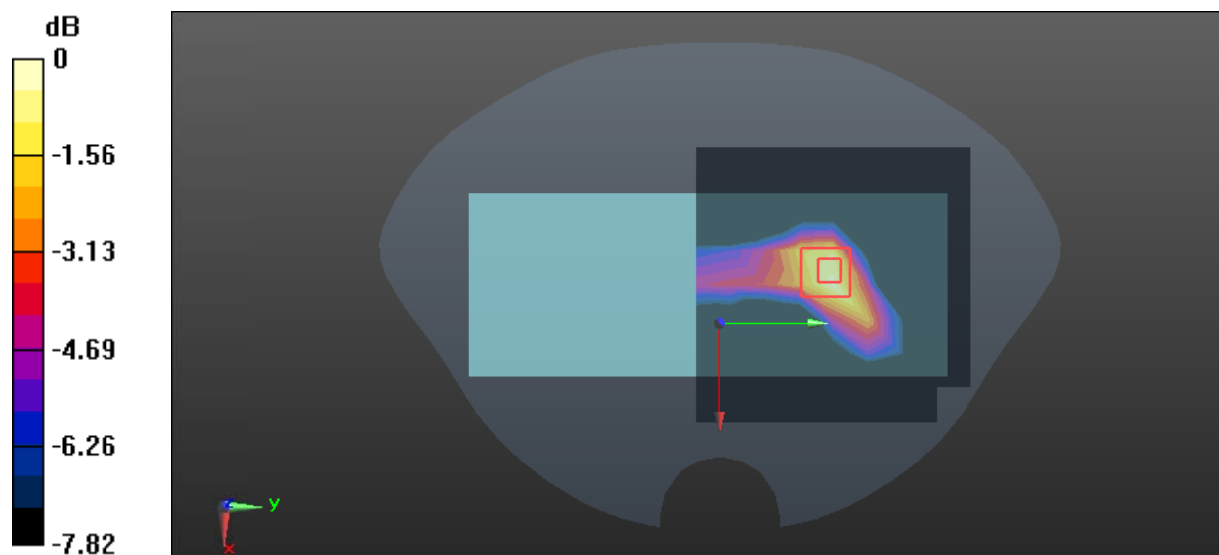

0 dB = 1.77 W/kg = 2.48dBW/kg

Test Plot 9#: WCDMA Band 5 Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: WCDMA (0); Frequency:836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=836.6$ MHz; $\sigma=0.945$ S/m; $\epsilon_r=40.905$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.157 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

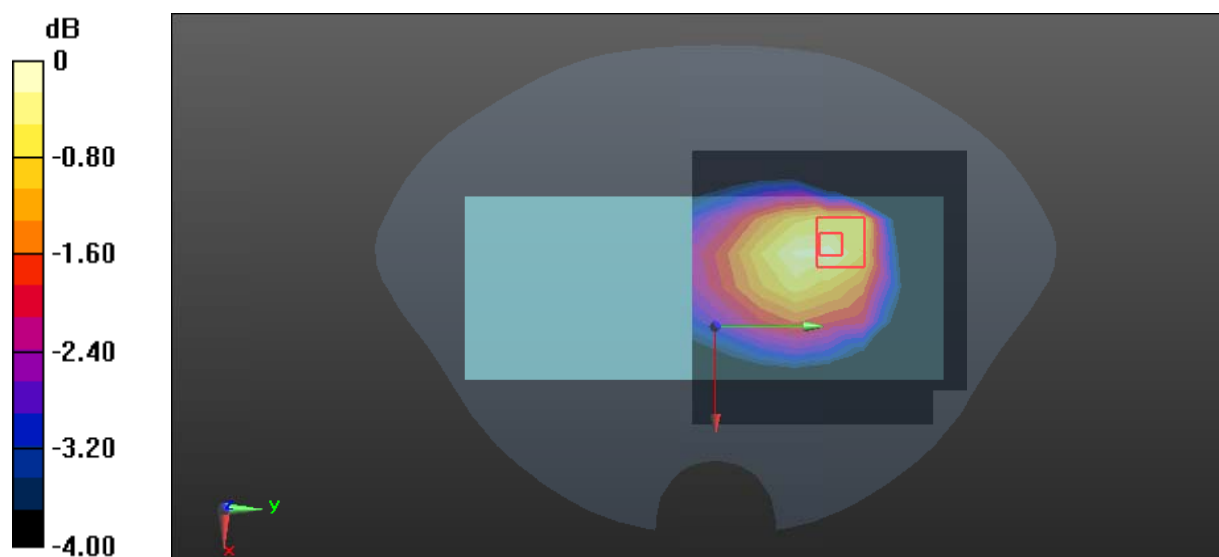

0 dB = 0.162 W/kg = -7.90dBW/kg

Test Plot 10#: WCDMA Band 5 Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: WCDMA (0); Frequency:836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 40.905$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.25 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.57 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.722 W/kg

Maximum value of SAR (measured) = 1.31 W/kg

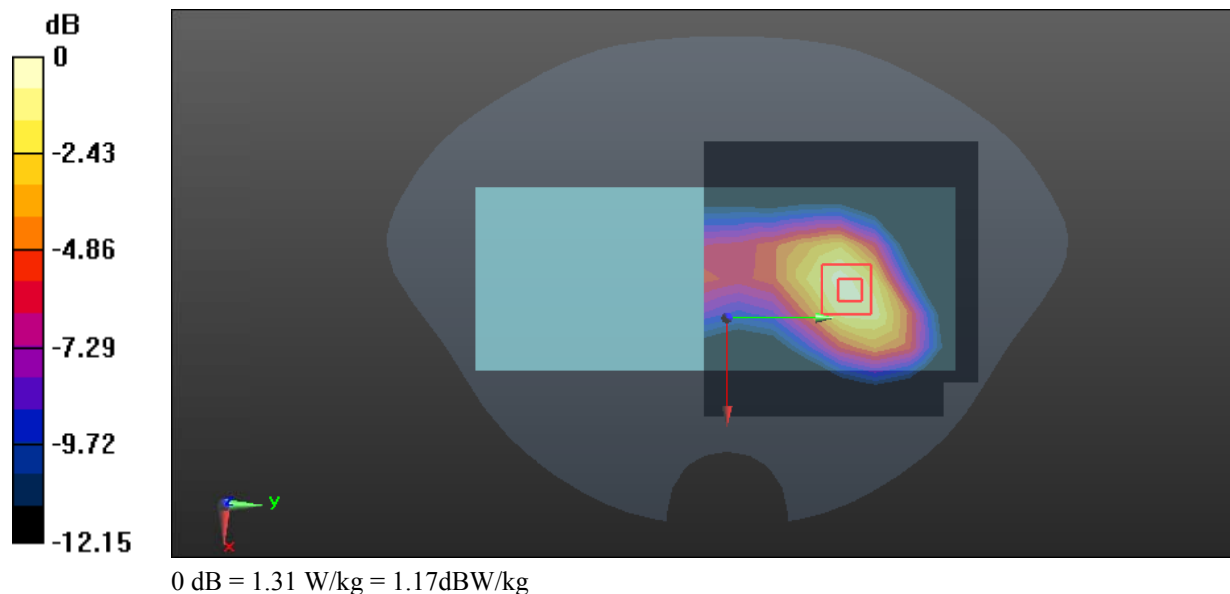

Test Plot 11#: LTE Band 2 1RB Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.359$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.182 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.569 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

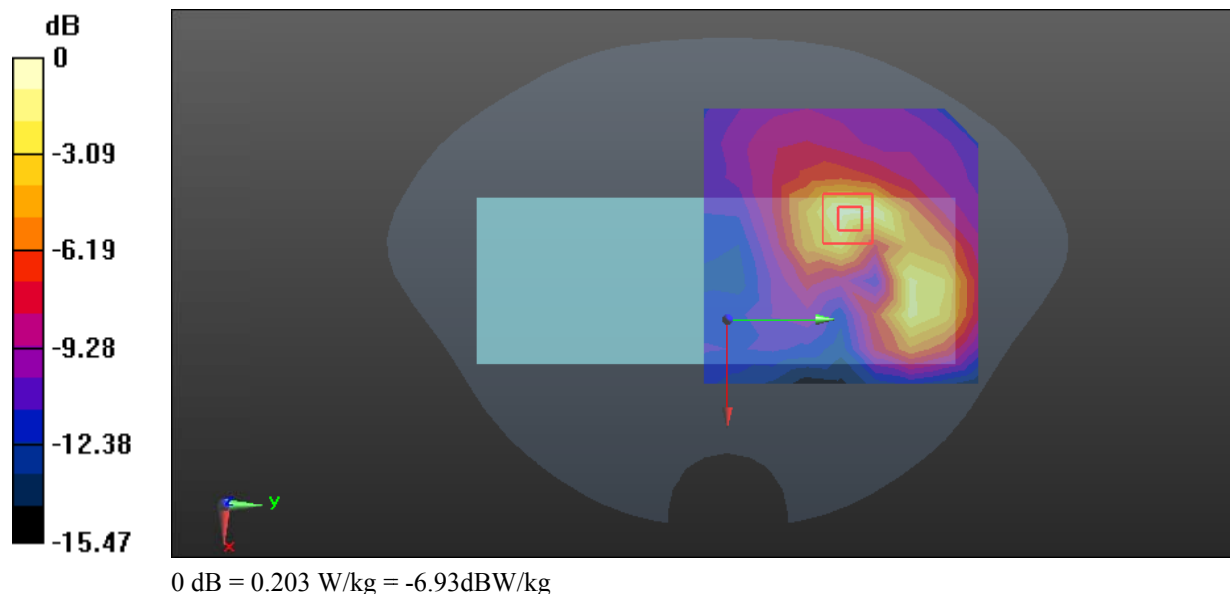

Test Plot 12#: LTE Band 2 1RB Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.359$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x11x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.31 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.14 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.34 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.16 W/kg

Maximum value of SAR (measured) = 2.45 W/kg

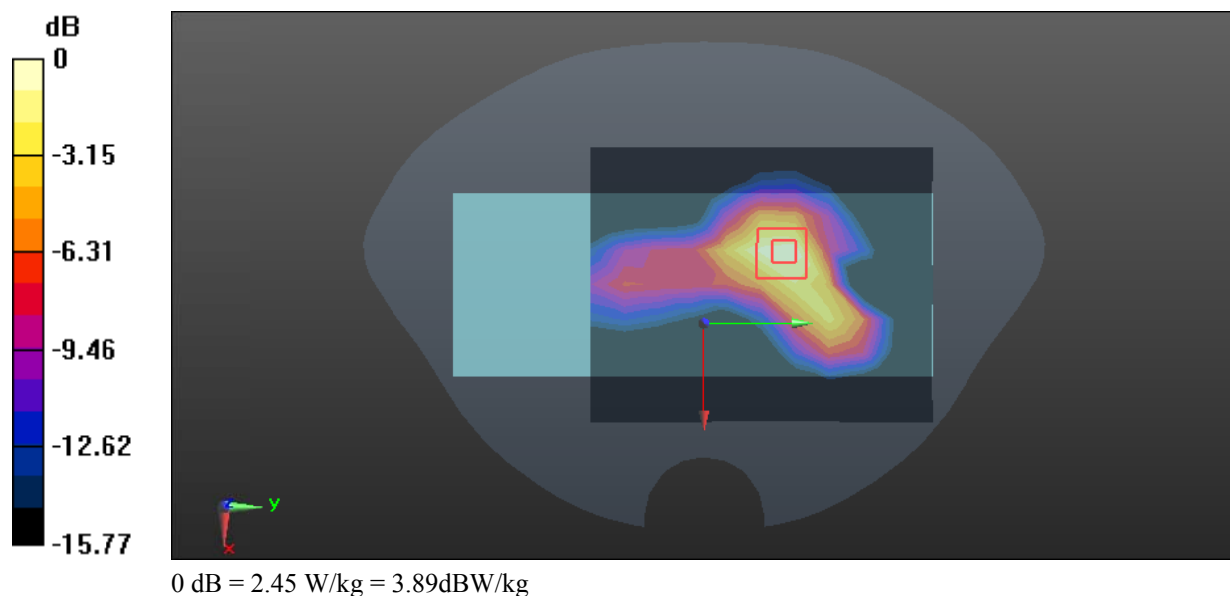

Test Plot 13#: LTE Band 4 1RB Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.165 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.542 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

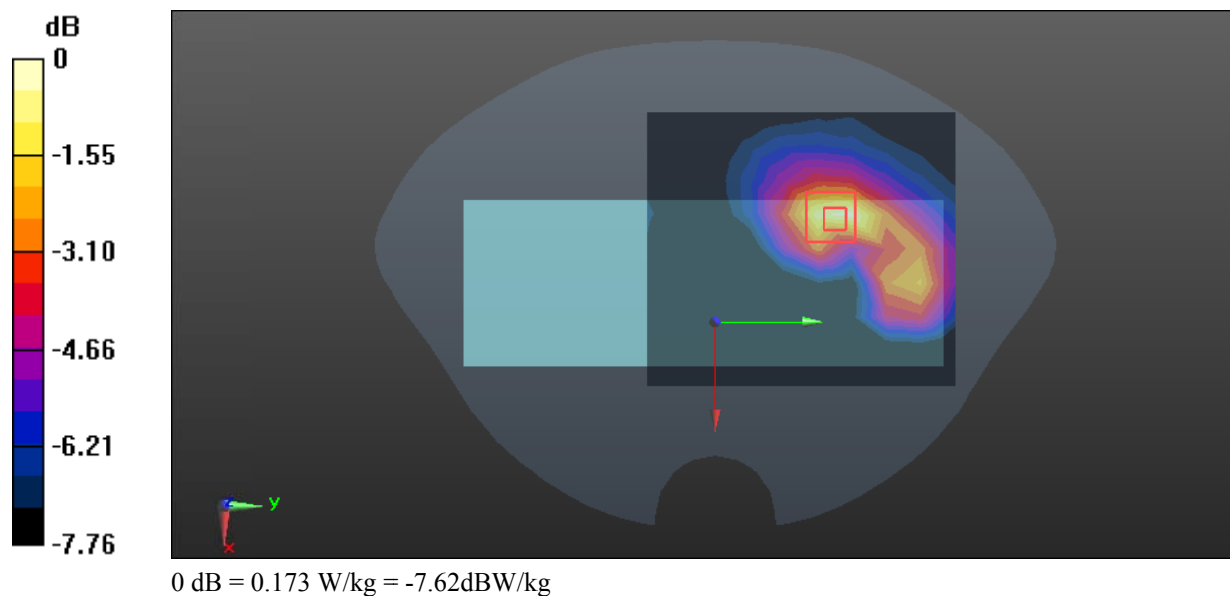

Test Plot 14#: LTE Band 4 1RB Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.392$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1732.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.33 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.96 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.681 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

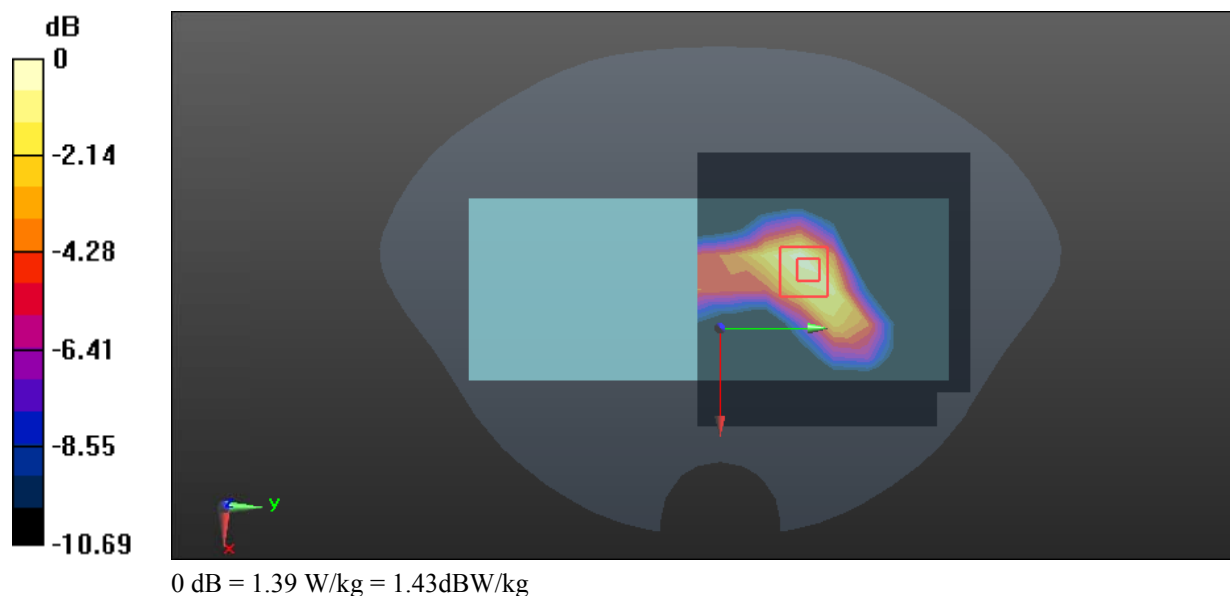

Test Plot 15#: LTE Band 5 1RB Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 40.907$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x10x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.199 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.716 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.230 W/kg

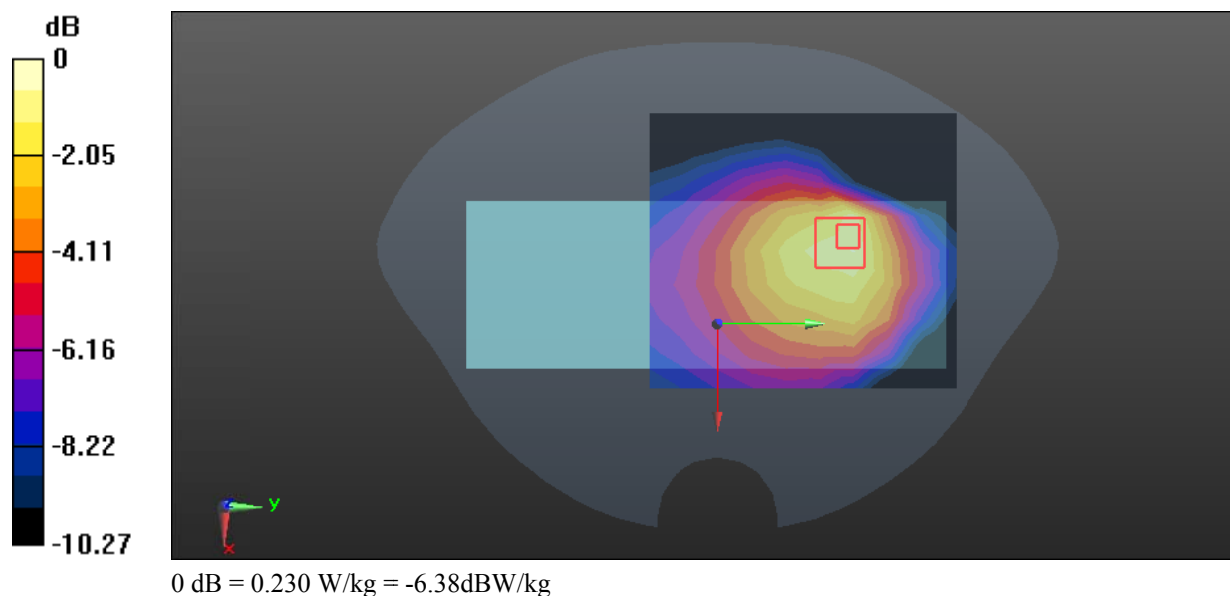

Test Plot 16#: LTE Band 5 50%RB Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=836.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r=40.907$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.896 W/kg; SAR(10 g) = 0.570 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

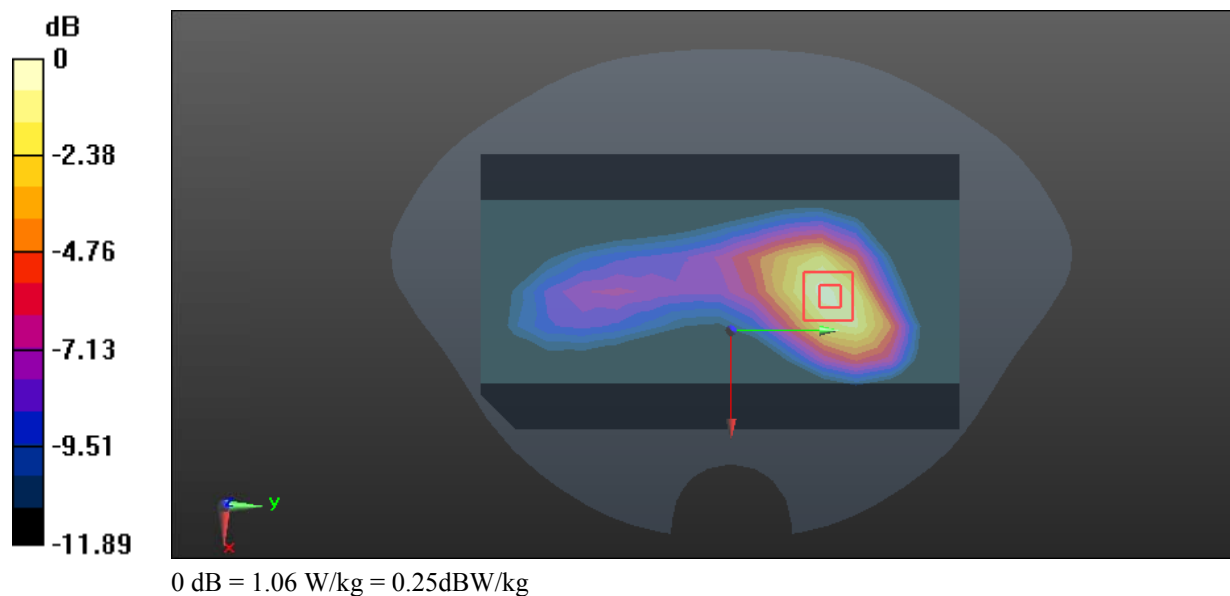

Test Plot 17#: LTE Band 7 1RB Low Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:2510 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.926$ S/m; $\epsilon_r = 40.159$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2510 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.23 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.119 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.584 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

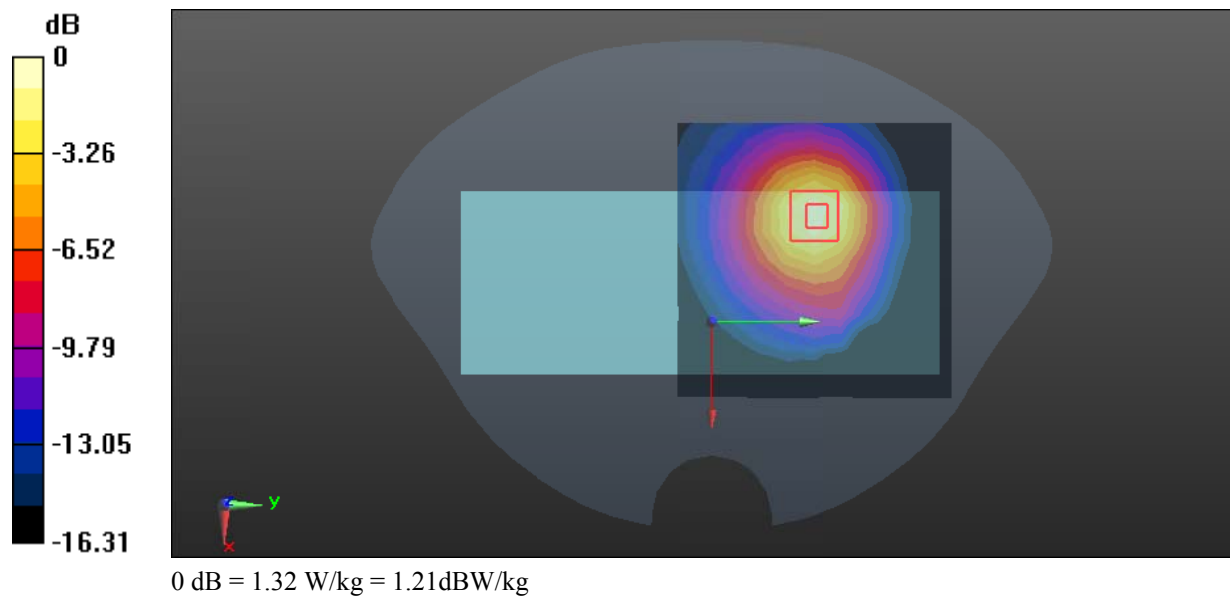

Test Plot 18#: LTE Band 7 1RB Mid Limb Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic FDD-LTE (0); Frequency:2535 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 40.072$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2535 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 3.18 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.017 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 5.87 W/kg

SAR(1 g) = 3.03 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 3.86 W/kg

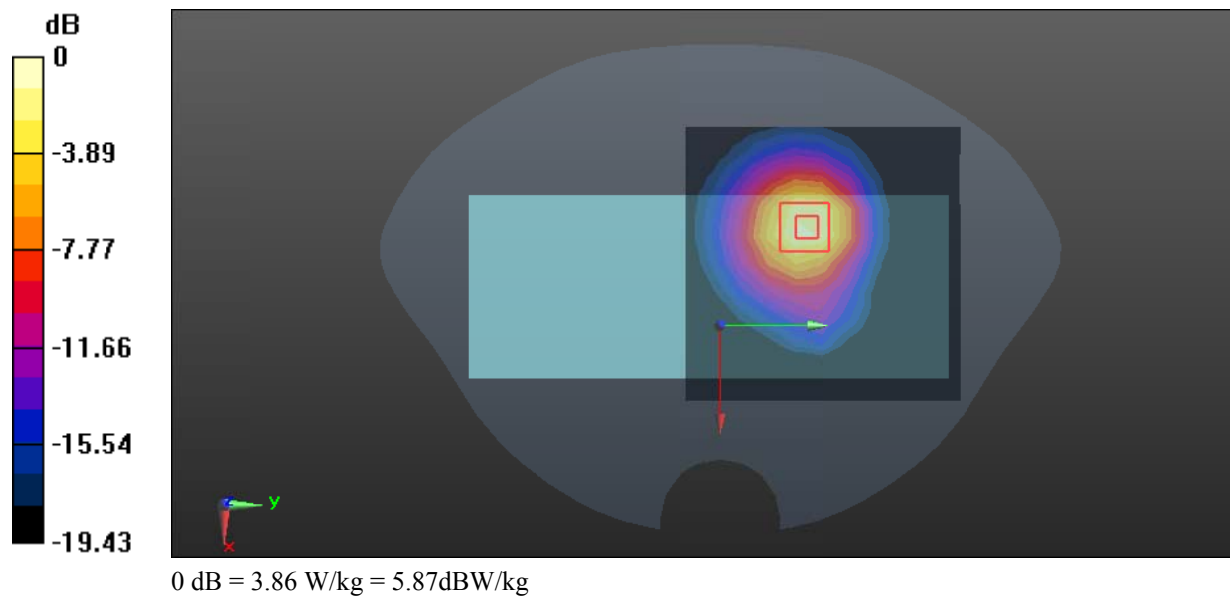

Test Plot 19#: LTE Band 38 1RB Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic TDD-LTE (0); Frequency:2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 39.879$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2595 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.748 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.501 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.332 W/kg

Maximum value of SAR (measured) = 0.818 W/kg

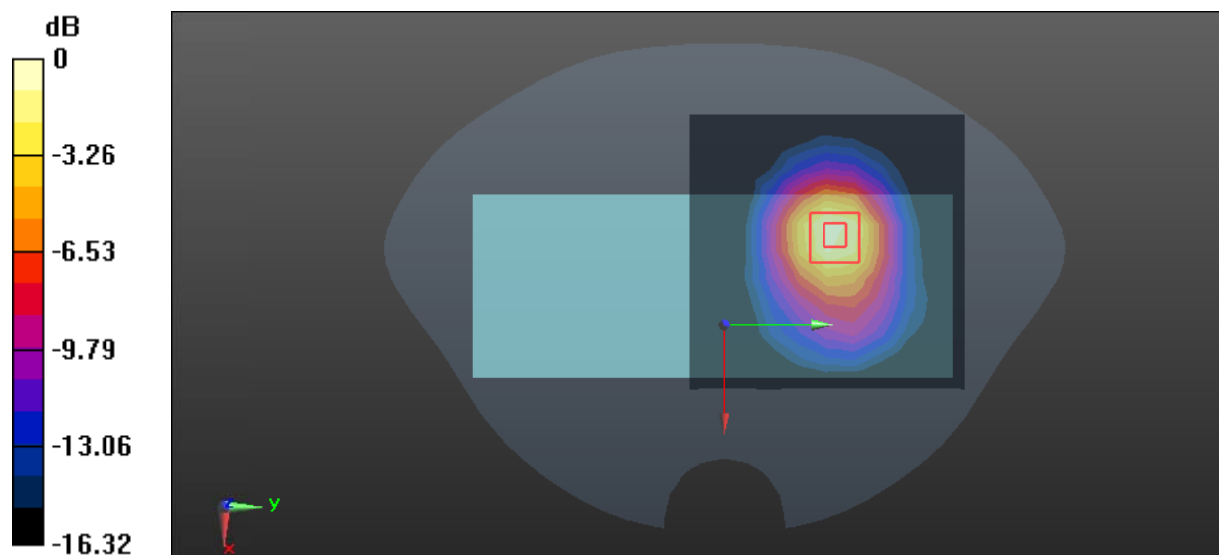

0 dB = 0.818 W/kg = -0.87dBW/kg

Test Plot 20#: LTE Band 38 50%RB Mid Limb Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: Generic TDD-LTE (0); Frequency:2595 MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f = 2595$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 39.879$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2595 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 2.14 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.472 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 3.37 W/kg

SAR(1 g) = 1.64 W/kg; SAR(10 g) = 0.734 W/kg

Maximum value of SAR (measured) = 2.17 W/kg

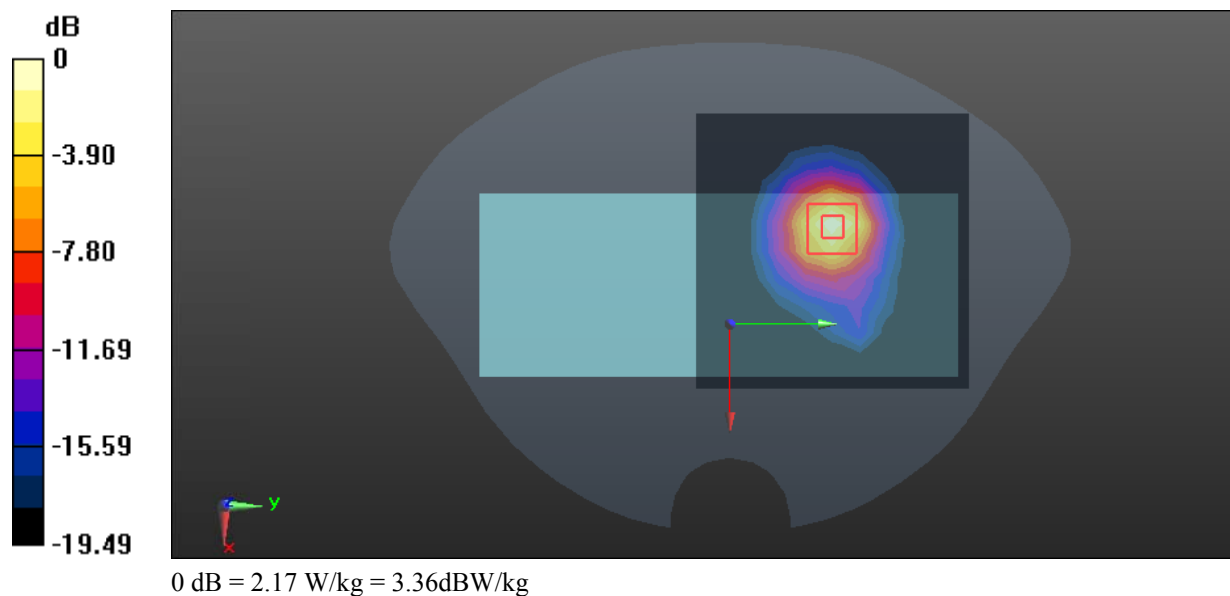

Test Plot 21#: 2.4G WIFI Mid Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11b (0); Frequency:2437 MHz; Duty Cycle: 1:1.015
 Medium parameters used: $f=2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r=40.418$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0932 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.777 V/m; Power Drift = 0.19dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.0985 W/kg

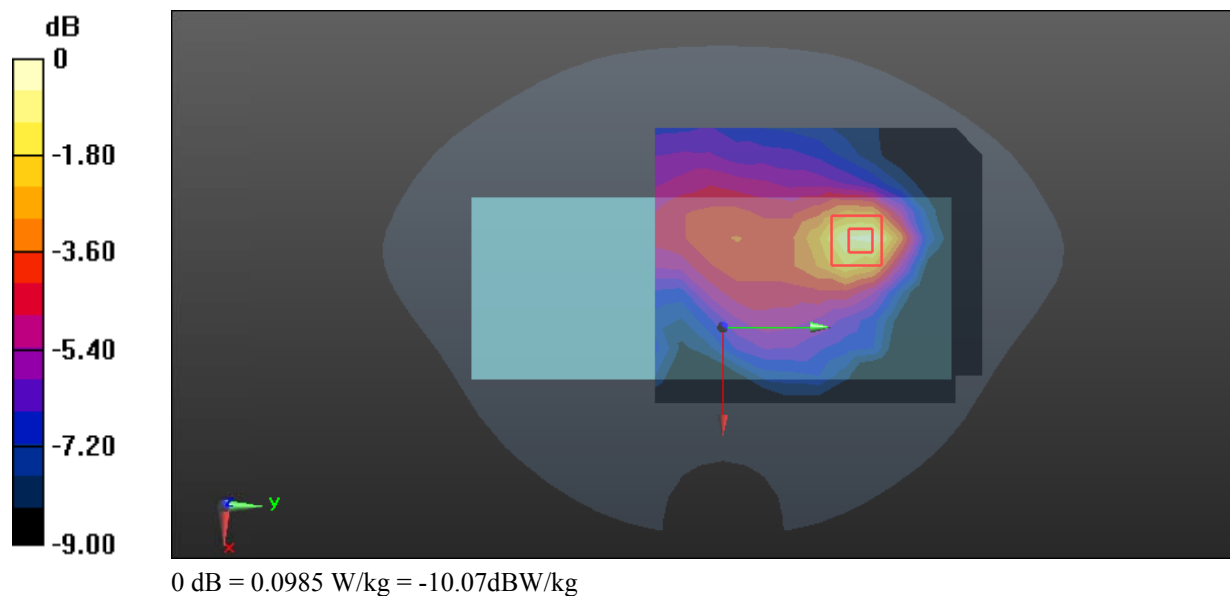

Test Plot 22#: 2.4G WIFI Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11b (0); Frequency:2437 MHz; Duty Cycle: 1:1.015
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.805$ S/m; $\epsilon_r = 40.418$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.455 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.68 V/m; Power Drift = 0.02dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.526 W/kg

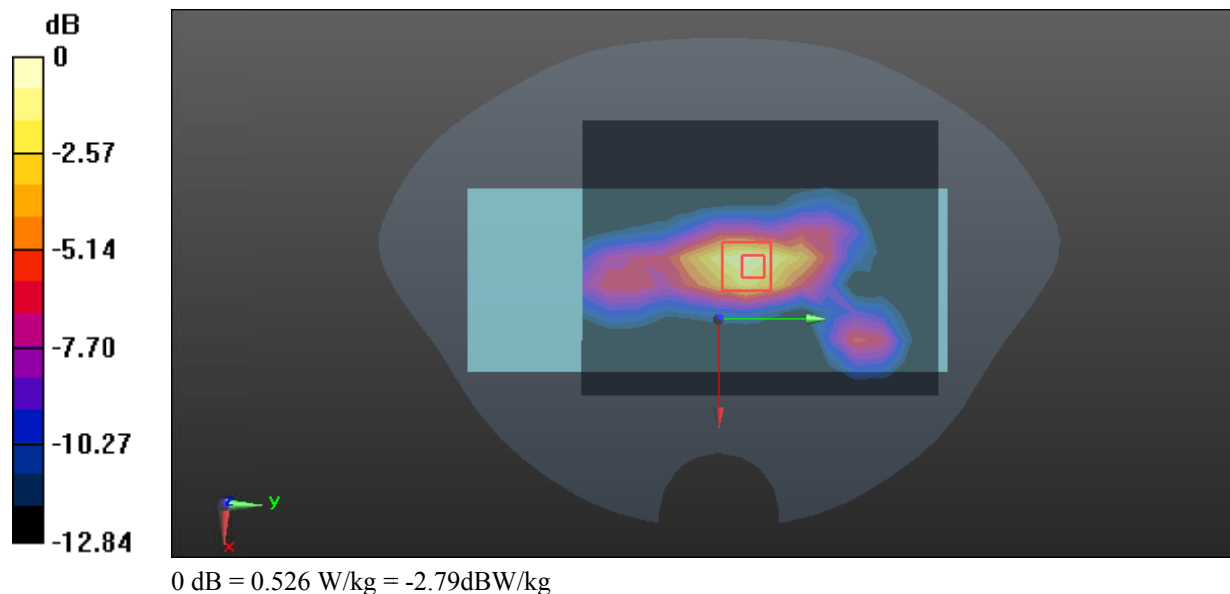

Test Plot 23#: 5.2G WIFI High Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11a (0); Frequency:5240 MHz; Duty Cycle: 1:1.018
 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.512$ S/m; $\epsilon_r = 36.896$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5240 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (12x14x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.145 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.622 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

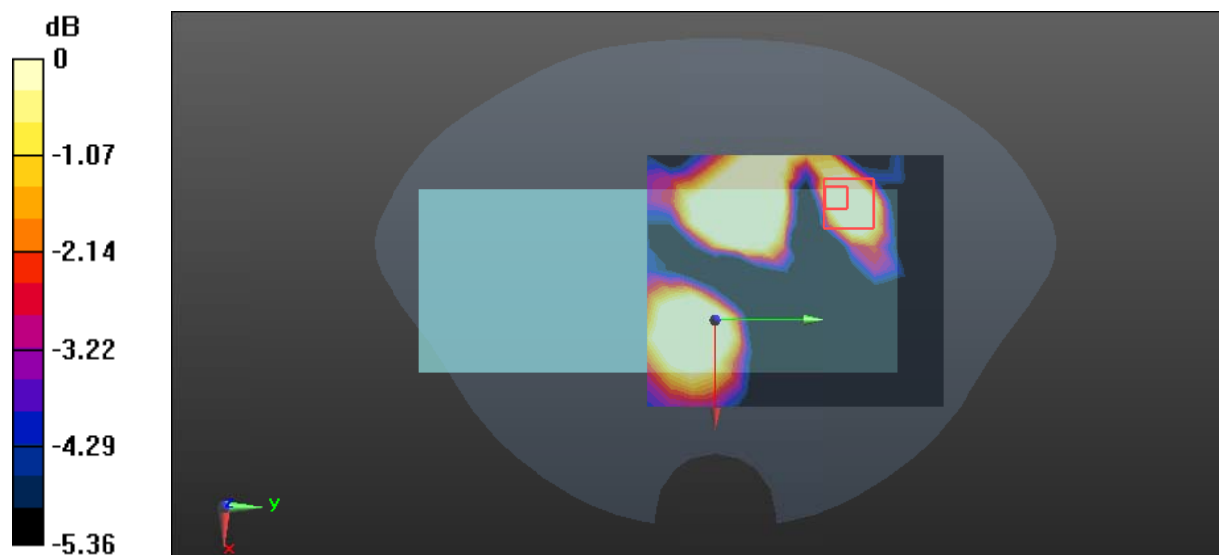

Test Plot 24#: 5.2G WIFI Mid Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11a (0); Frequency:5240 MHz; Duty Cycle: 1:1.018
 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.512$ S/m; $\epsilon_r = 36.896$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5240 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.42 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.668 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 4.94 W/kg

SAR(1 g) = 1.55 W/kg; SAR(10 g) = 0.471 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

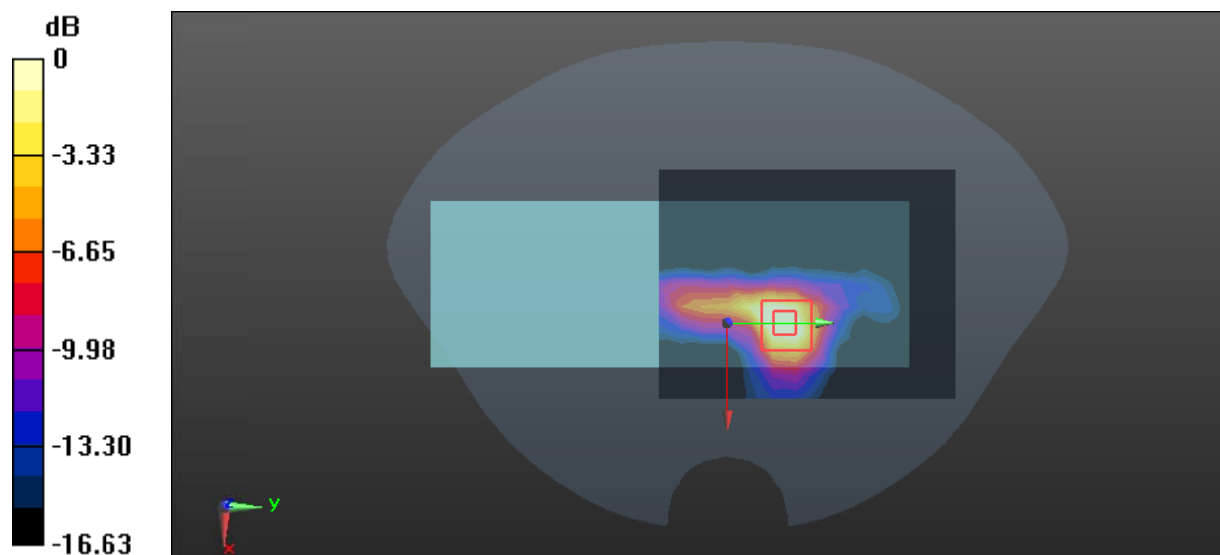

0 dB = 1.87 W/kg = 2.72 dBW/kg

Test Plot 25#: 5.3G WIFI High Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11a (0); Frequency:5320 MHz; Duty Cycle: 1:1.018
 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.623$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5320 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (12x14x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.162 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.733 V/m; Power Drift = 0.12dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

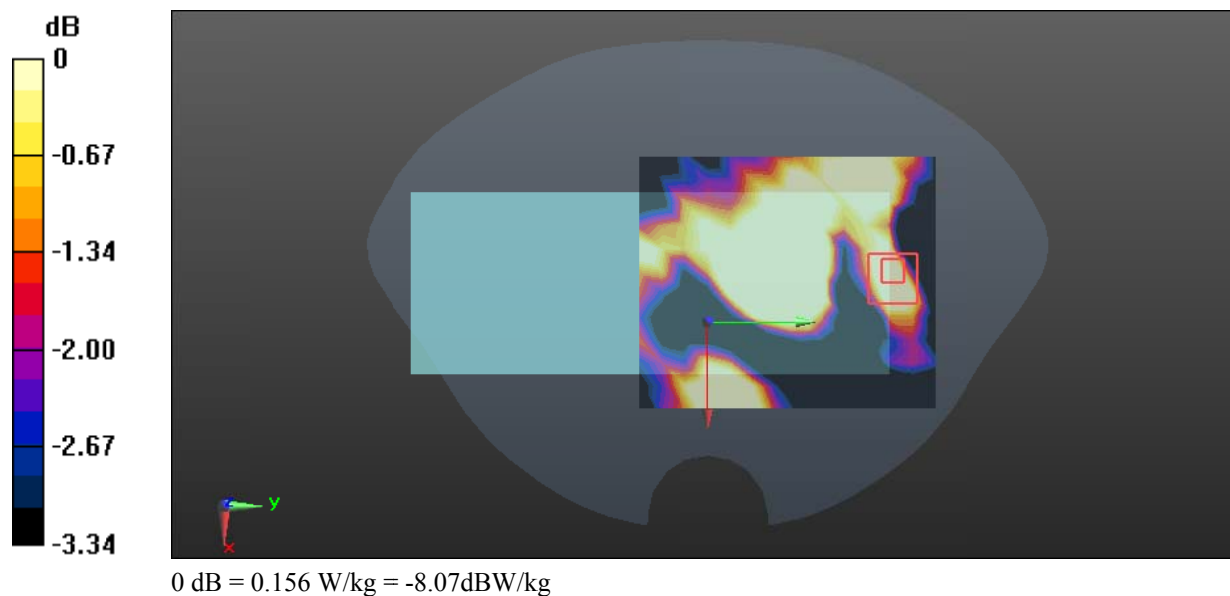

Test Plot 26#: 5.3G WIFI High Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11a (0); Frequency:5320 MHz; Duty Cycle: 1:1.018
 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.623$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5320 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.44 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.038 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 4.90 W/kg

SAR(1 g) = 1.53 W/kg; SAR(10 g) = 0.473 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

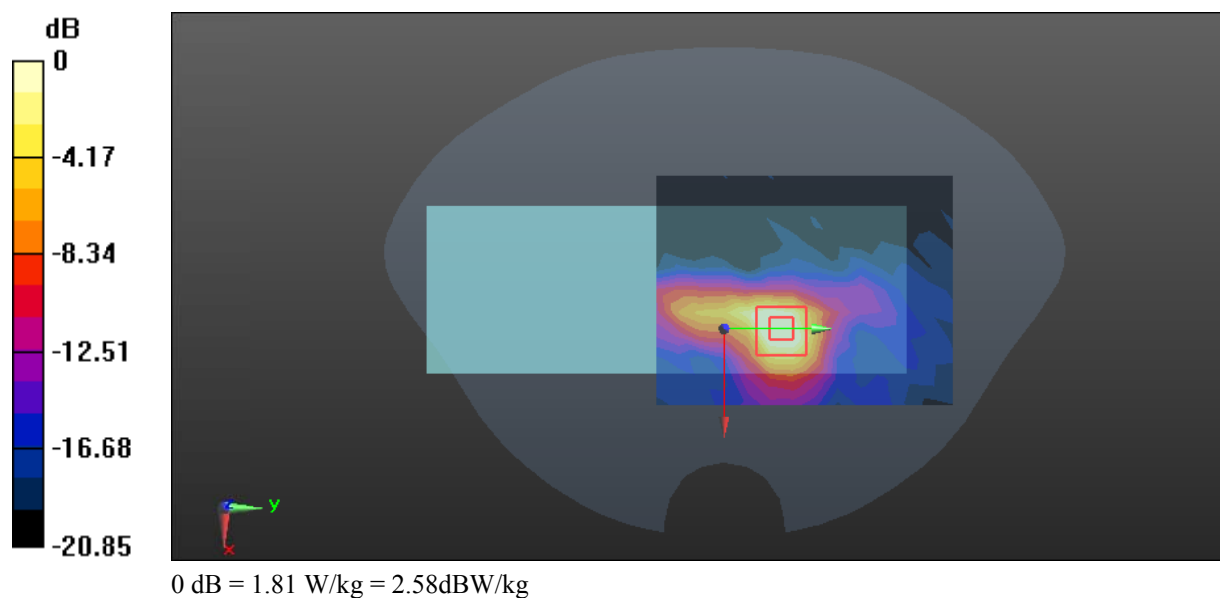

Test Plot 27#: 5.6G WIFI Low Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11a (0); Frequency:5500 MHz; Duty Cycle: 1:1.018
 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.807$ S/m; $\epsilon_r = 36.188$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5500 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (12x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.191 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.039 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

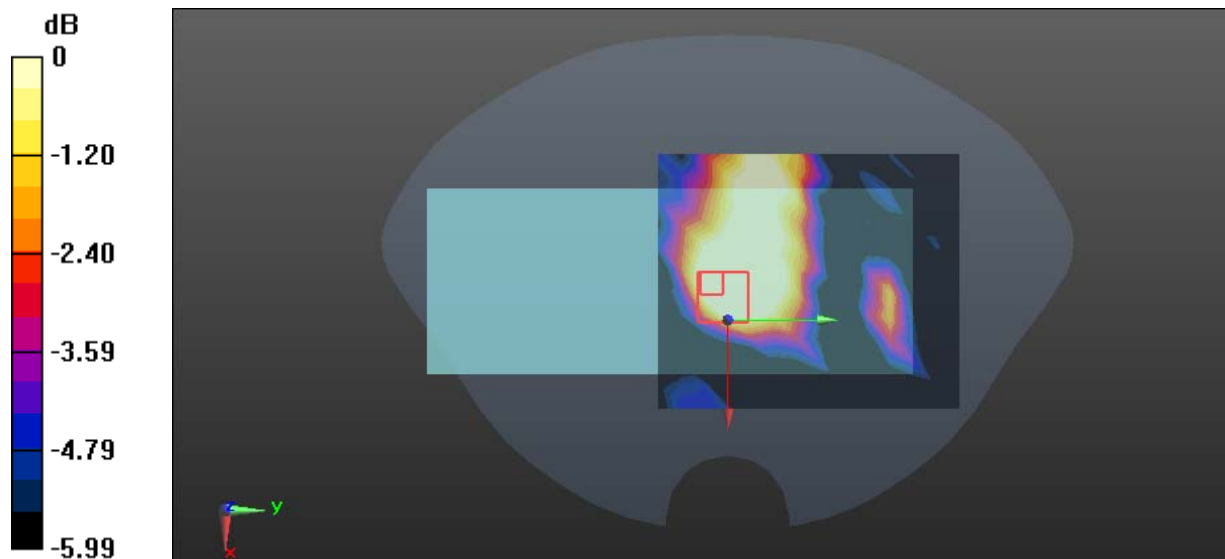

0 dB = 0.115 W/kg = -9.39 dBW/kg

Test Plot 28#: 5.6G WIFI Low Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11a (0); Frequency:5500 MHz; Duty Cycle: 1:1.018
 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.807$ S/m; $\epsilon_r = 36.188$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5500 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.12 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.523 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.27 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

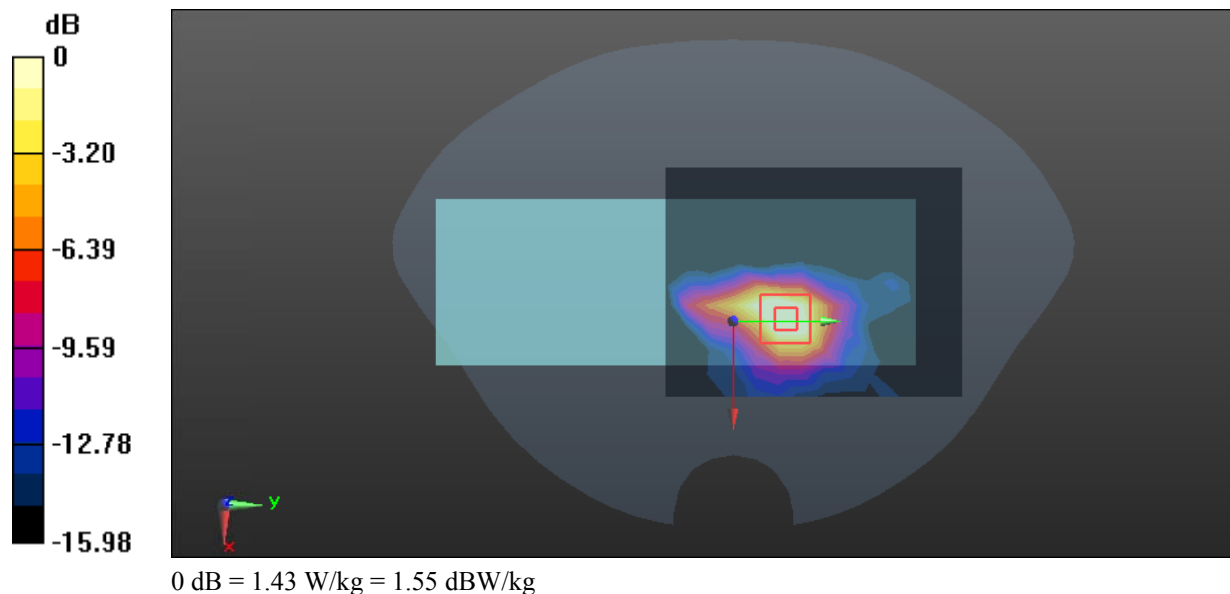

Test Plot 29#: 5.8G WIFI Low Body Back**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11n40 (0); Frequency:5755 MHz; Duty Cycle: 1:1.039

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 35.649$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5755 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (12x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.280 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.751 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

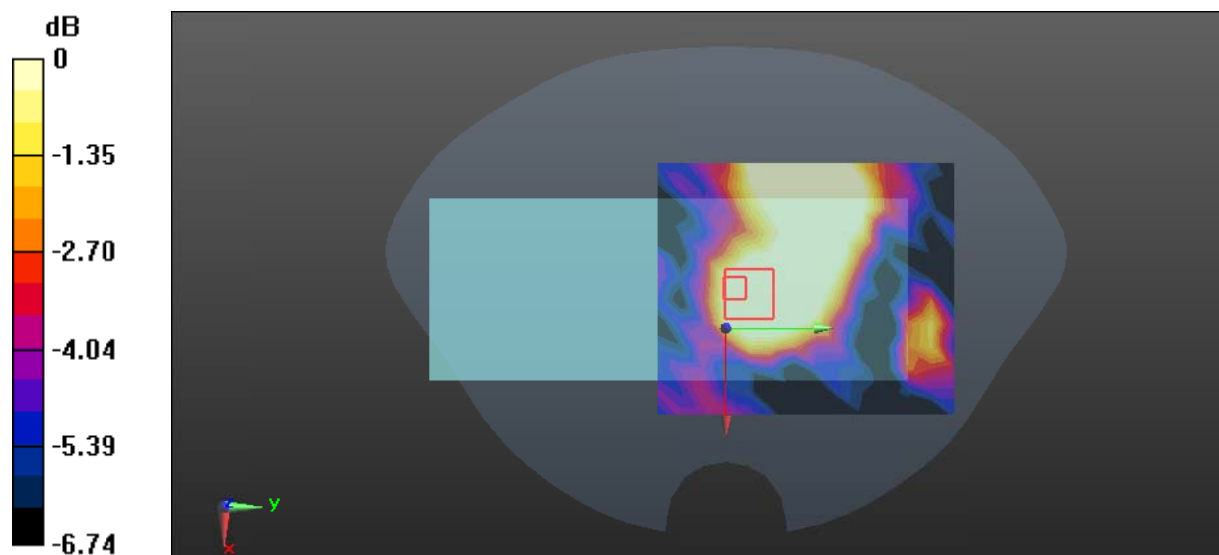

0 dB = 0.190 W/kg = -7.21 dBW/kg

Test Plot 30#: 5.8G WIFI Low Limb Right**DUT: POS terminal; Type: N96; Serial:2QGM-1**

Communication System: 802.11n40 (0); Frequency:5755 MHz; Duty Cycle: 1:1.039
 Medium parameters used: $f = 5755$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 35.649$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5755 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x14x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.00 W/kg

Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.269 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 7.14 W/kg

SAR(1 g) = 2.27 W/kg; SAR(10 g) = 0.762 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

