

Test Report of FCC Part 15 C for FCC Certificate

On Behalf of

(HK)EASYSKY ENTERPRISE LIMITED

Product description: Telecontrolled Aircraft

Model No.: 9801, 9802, 9803, 9804, 9805, 9806, 9807, 9808, 9809, 9810

FCC ID: XEA-98X

Prepared for: (HK)EASYSKY ENTERPRISE LIMITED

Room17, 6F, ShunAn Commercial Bud, Number 112-114, Fudao Street, Central District, HK

Prepared by: Bontek Compliance Laboratory Ltd

1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

Tel: 86-755-86337020 Fax: 86-755-86337028

Issue Date: June 05, 2009

Test Date: June 01~03, 2009

Test by:

Reviewed By:



Kendy Wang

Kendy Wang

Tony Wu

Tony Wu

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 Product Description for Equipment Under Test (EUT)	3
1.2 Related Submittal(s) / Grant (s)	3
1.3 Test Methodology	3
1.4 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION	5
2.1 EUT Configuration	5
2.2 EUT Exercise	5
2.3 General Test Procedures.....	5
2.4 List of Measuring Equipments Used	6
3. SUMMARY OF TEST RESULTS	7
4. TEST OF CONDUCTED EMISSION.....	8
4.1 Applicable Standard.....	8
4.2 Test Setup Diagram	8
5- RADIATED EMISSIONS.....	9
5.1 Limit of Radiated Emissions.....	9
5.2 EUT Setup	9
5.3 Test Procedure	10
5.4 Test Result.....	11
6- EMISSIONS WITHIN BAND EDGES.....	16
6.1 Limit of Emissions within Band Edges	16
6.2 Test Procedure	16
6.3 Emissions within Band Edges Test Result.....	16
7. ANTENNA REQUIREMENT.....	18
7.1 Standard Applicable.....	18
7.2 Antenna Connected Construction	18

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	(HK)EASYSKY ENTERPRISE LIMITED
Address of applicant:	Room17, 6F, ShunAn Commercial Bud, Number 112-114, Fudao Street, Central District, HK
Manufacturer:	(HK)EASYSKY ENTERPRISE LIMITED
Address of manufacturer:	Room17, 6F, ShunAn Commercial Bud, Number 112-114, Fudao Street, Central District, HK
EUT Description:	Telecontrolled Aircraft
Trade Name:	N/A
EUT Model No.:	9801
Supplementary Models No.:	9802, 9803, 9804, 9805, 9806, 9807, 9808, 9809, 9810 Note: 9801 and other supplementary models are share the same transmitter but with different outlook receiver models.
Rated Voltage	DC 9V (6 x1.5V AAA battery) for Transmitter
Frequency range	27.145MHz
Number of channels	1
Channel Separation	None
Product Class:	Low Power Communication Device Transmitter
Measurement Procedure	ANSI C63.4-2003

Remark: * *The test data gathered are from the production sample provided by the manufacturer.*

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.227 rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

IC Registration No.: 126111

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 126111 on March, 2008.

2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 List of Measuring Equipments Used

Items	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Calibration Period
1	EMI Test Receiver	R&S	ESCI	100687	2009-2-22	1 Year
2	EMI Test Receiver	R&S	ESPI	100097	2009-2-22	1 Year
3	Amplifier	HP	8447D	1937A024 92	2009-2-22	1 Year
4	3 phase Artificial Mains (L.I.S.N)	SCHWARZBECK	NSLK 8128	8128247	2009-3-31	1 Year
5	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2009-2-22	1 Year
6	Horn Antenna	SCHWARZBECK	BBHA9120A	D69250	2009-2-27	1 Year
7	Loop Antenna	Daze	SLA003	0024	2009-2-27	1 Year
8	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2009-9-04	1 Year
9	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2009-9-04	1 Year
10	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2009-9-04	1 Year
11	Power Clamp	SCHWARZBECK	MDS-21	3812	2009-2-22	1 Year

3. SUMMARY OF TEST RESULTS

EUT Fundamental Frequency	FCC Rules	Description of Test	Result
27.145MHz	15.207	Disturbance Voltage at The Mains Terminals	N/A, without AC power supply
	15.227	Radiation Emission	Pass
	15.227	Emissions within Band Edges	Pass


4. TEST OF CONDUCTED EMISSION

4.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

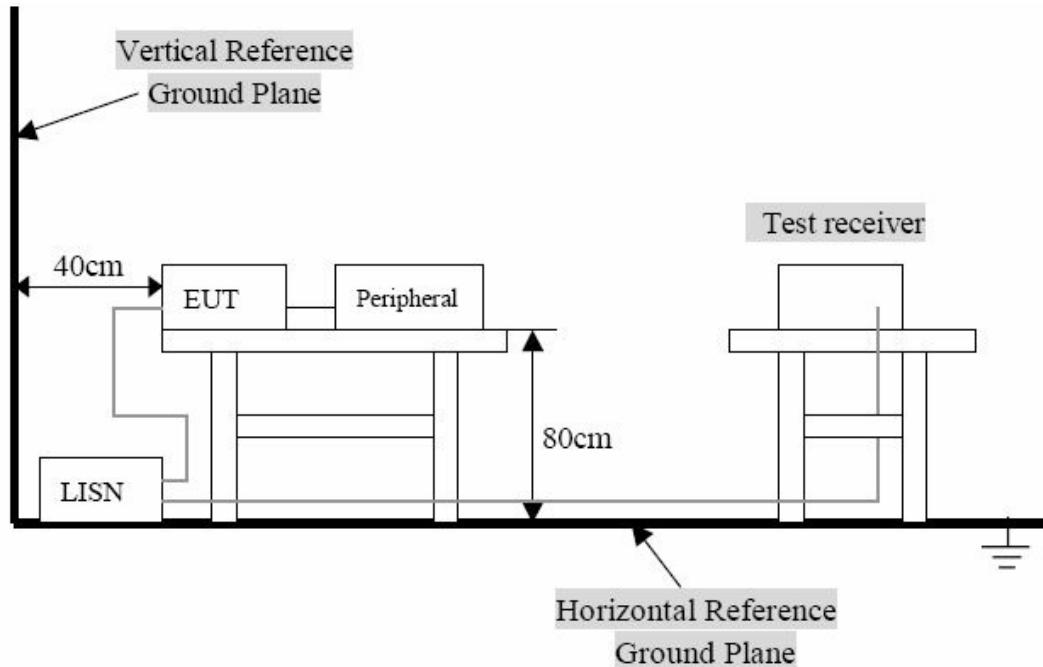

Remark: 1. The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.

2. The EUT is excluded from investigation of Disturbance Voltage at The Mains Terminals, for it is powered by DC 9V (6 x1.5V AAA battery). According to the Section 15.207(d), measurement to demonstrate compliance with the limits of Disturbance Voltage at The Mains Terminals are not required to the devices which only employed battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

5- RADIATED EMISSIONS

5.1 Limit of Radiated Emissions

Limit of Field Strength of Fundamental Emissions (FCC 47CFR 15.227):

Frequency Range (MHz)	Field Strength of Fundamental Emission (Peak) (μ V/m)	Field Strength of Fundamental Emission (Average) (μ V/m)
26.96-27.28	100,000 μ V/m (100dB μ V/m)	10,000 μ V/m (80dB μ V/m)

Limits of Spurious Emissions (FCC 47 CFR 15.209 Class B):

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
960 ~ 1000	3	54

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

5.2 EUT Setup

Radiated Measurement Setup

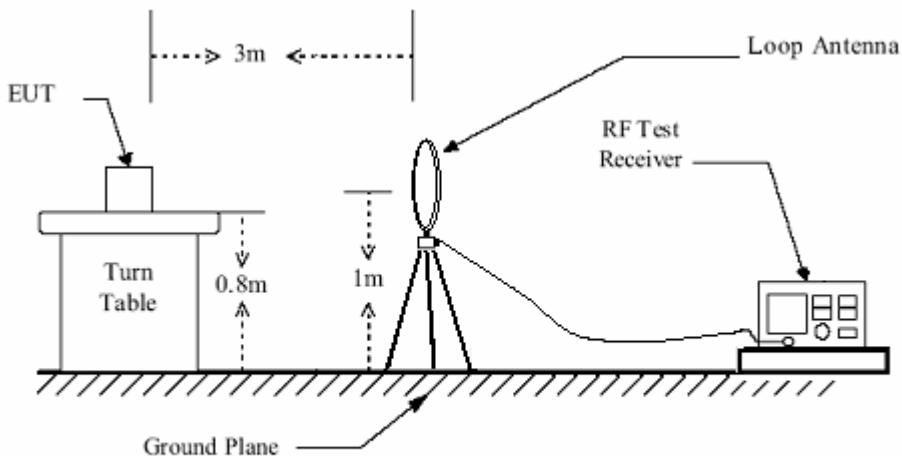


Figure 2 : Frequencies measured below 30 MHz configuration

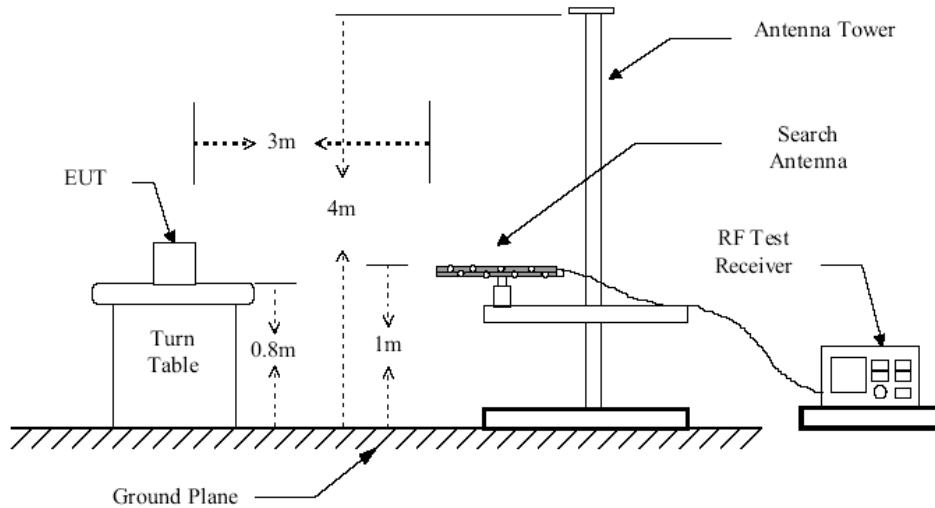


Figure 1 : Frequencies measured below 1 GHz configuration

5.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2003.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). For Spurious Emissions test, The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 6). For Field Strength of Fundamental Emissions test, Positioned the loop antenna with its plane vertical at the specified distance of 3 meters between its center and the EUT. The center of the loop antenna is set with 1m above the grounded plane. Then rotated about its vertical axis for finding out the maximum emission level of the EUT.

5.4 Test Result


Temperature (°C) : 22~23	EUT: Telecontrolled Aircraft
Humidity (%RH): 50~54	M/N: 9801
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuous Transmitting

Fundamental Emission Test Data


Frequency (MHz)	Read Value dB μ V	Transd	Result dB μ V/m	Limit (dB μ V/m)	Margin (dB)	Polarization
Peak Measurement						
27.1454	73.4	8.5	81.9	100	18.1	Vertical
27.1454	65.9	8.5	74.4	100	25.6	Horizontal
Average Measurement						
27.1454	67.9	8.5	76.4	80	3.6	Vertical
27.1454	60.4	8.5	68.9	80	11.1	Horizontal

Result: The field strength of any emission within the operation band did not exceed 80(dB μ V/m) for average value or 100 dB(dB μ V/m) for peak value.

Average Vertical

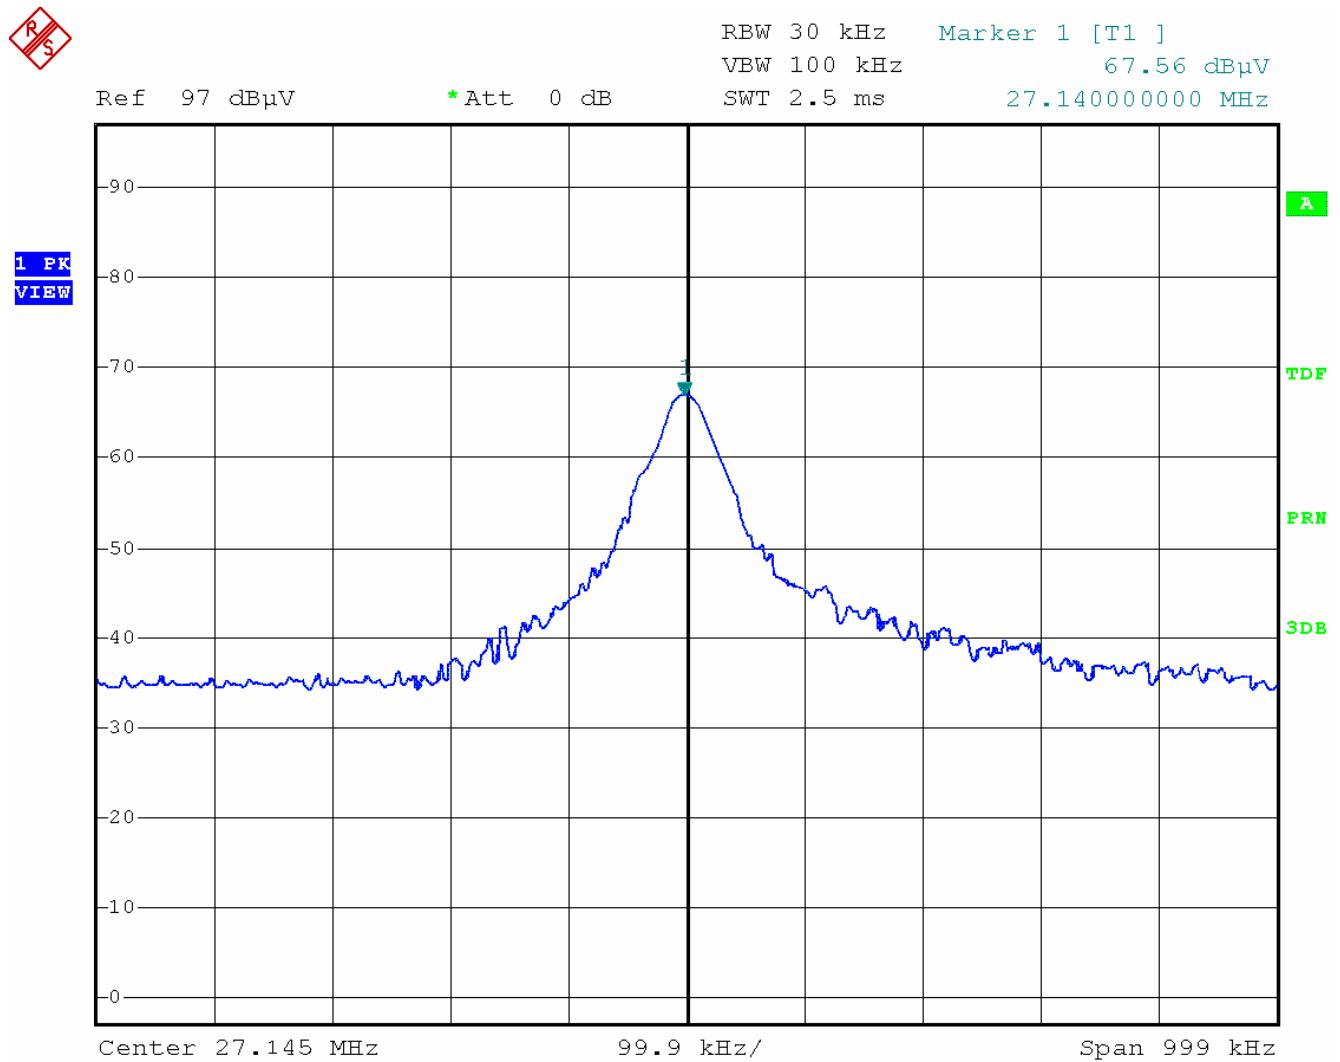

Average Horizontal

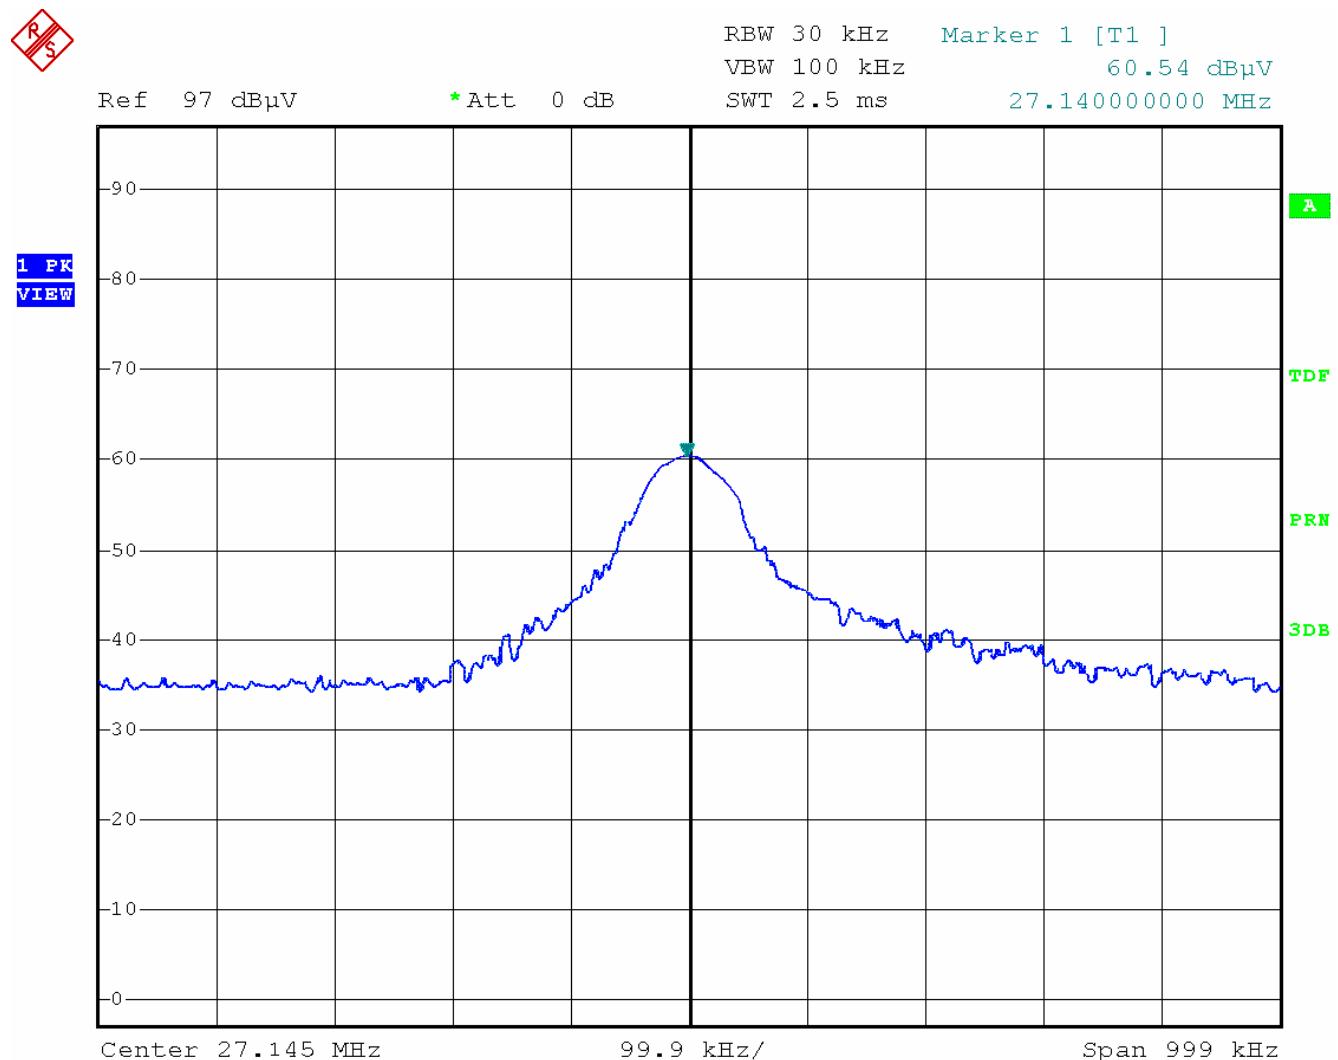


Harmonics & Spurious Emission

RADIATED EMISSION TEST DATA

EUT: Telecontrolled Aircraft
Operating Condition: ON
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 9.0V from battery
Comment: Polarisation:H
Start of Test: 06/01/09 18:34 PM

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
Transducer VULB9163 NEW				

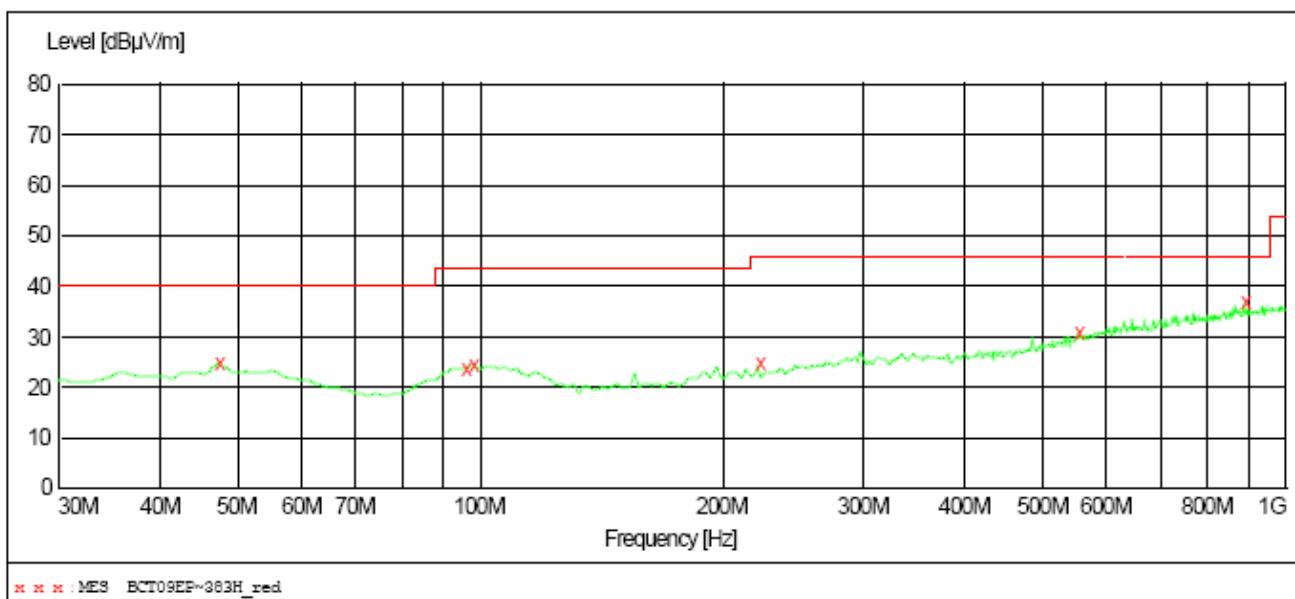

MEASUREMENT RESULT: "BCT09EP~383H_red"

6/01/2009 18:34

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
47.460000	24.90	16.7	40.0	15.1	QP	300.0	0.00	HORIZONTAL
95.960000	23.90	18.0	43.5	19.6	QP	300.0	0.00	HORIZONTAL
97.900000	24.40	18.2	43.5	19.1	QP	300.0	0.00	HORIZONTAL
222.060000	24.60	17.1	43.5	18.9	QP	300.0	0.00	HORIZONTAL
553.800000	31.00	24.1	46.0	15.0	QP	100.0	0.00	HORIZONTAL
891.360000	36.90	29.1	46.0	9.1	QP	300.0	0.00	HORIZONTAL


Harmonics & Spurious Emission

RADIATED EMISSION TEST DATA

EUT: Telecontrolled Aircraft
Operating Condition: ON
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 9.0V from battery
Comment: Polarisation:V
Start of Test: 06/01/09 18:30 PM

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz
				VULB9163 NEW

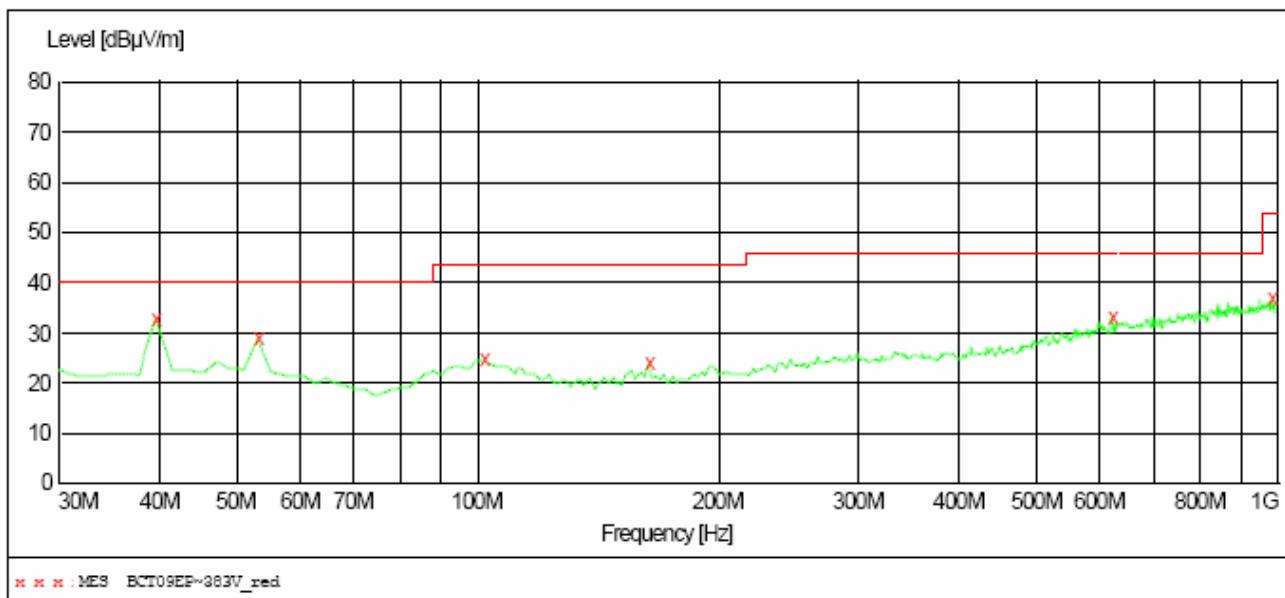

MEASUREMENT RESULT: "BCT09EP~383V_red"

6/01/2009 18:30

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
39.700000	33.00	16.7	40.0	7.0	QP	100.0	0.00	VERTICAL
53.280000	29.20	16.6	40.0	10.8	QP	100.0	0.00	VERTICAL
101.780000	24.60	18.2	43.5	18.9	QP	100.0	0.00	VERTICAL
163.860000	24.10	14.8	43.5	19.4	QP	100.0	0.00	VERTICAL
621.700000	33.20	25.6	46.0	12.8	QP	100.0	0.00	VERTICAL
986.420000	36.90	30.0	54.0	17.1	QP	100.0	0.00	VERTICAL

6- EMISSIONS WITHIN BAND EDGES

6.1 Limit of Emissions within Band Edges

According to the section 15.227 of FCC Part 15 Subpart C, The field strength of any emission within this band shall not exceed 10,000 microvolts/ meter at 3 meter. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

6.2 Test Procedure

Positioned the loop antenna with its plane vertical at the specified distance of 3 meters between its center and the EUT. The center of the loop antenna is set with 1m above the grounded plane. Then rotated about its vertical axis for finding out the maximum emission level of the EUT. (Details refer to the relevant sections of the standard ANSI C63.4-2003 'Methods of Measurement of Radio Noise Emissions from Low –Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.)


Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

6.3 Emissions within Band Edges Test Result

Temperature (°C) : 22~23	EUT: Telecontrolled Aircraft
Humidity (%RH): 50~54	M/N: 9801
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuous Transmitting

Test plots see following:

RS

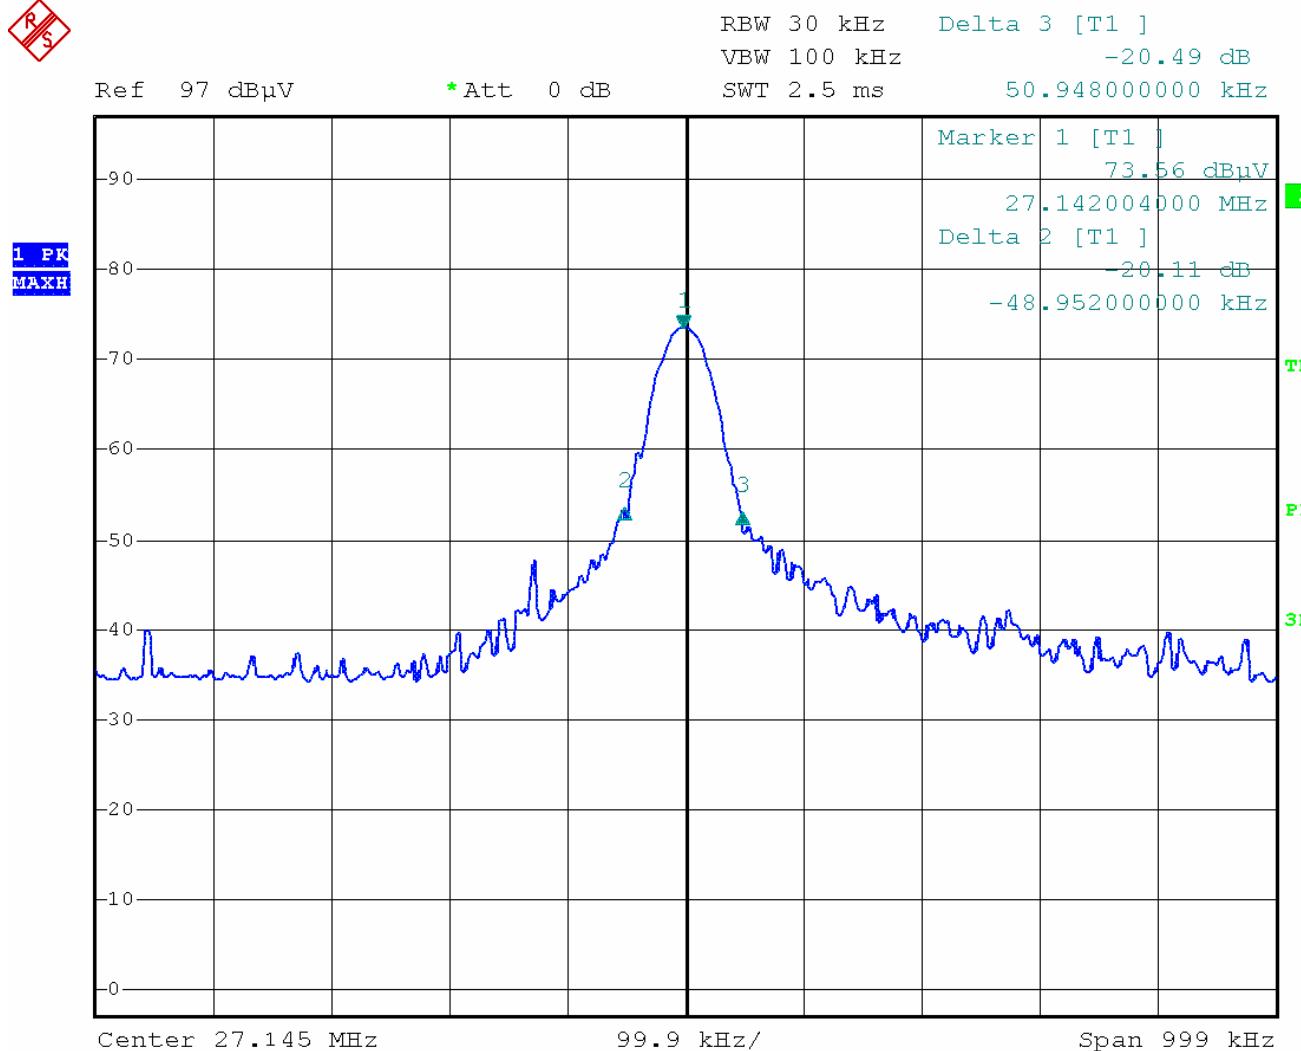

7. ANTENNA REQUIREMENT

7.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2 Antenna Connected Construction

The antenna connector is designed with a fixable screw thread pole antenna. It is compliance with the requirement of unique coupling to the intentional radiator.