FCC SAR Test Report

APPLICANT : Megabyte Limited

EQUIPMENT: UHF Portable RFID Reader

BRAND NAME: Myndar

MODEL NAME : H3B-01-MB, H3B-01-39, H3B-01-PH

FCC ID : XEK-MHANDH3

STANDARD : FCC 47 CFR Part 2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2013

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Este man?

Approved by: Jones Tsai / Manager

ilac-MRA



Report No.: FA6O1207

SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)

Page 1 of 25

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: XEK-MHANDH3

Issued Date : Nov. 21, 2016

Form version. : 160427

SPORTON LAB. FCC SAR Test Report

Table of Contents

Report No.: FA6O1207

1. Statement of Compliance	4	
2. Administration Data	4	
3. Guidance Applied	5	
4. Equipment Under Test (EUT) Information	5	
4.1 General Information	5	
5. RF Exposure Limits		
5.1 Uncontrolled Environment	6	
5.2 Controlled Environment		
6. Specific Absorption Rate (SAR)		
6.1 Introduction	7	
6.2 SAR Definition		
7. System Description and Setup		
7.1 E-Field Probe	9	
7.2 Data Acquisition Electronics (DAE)	9	
7.3 Phantom		
7.4 Device Holder		
8. Measurement Procedures		
8.1 Spatial Peak SAR Evaluation		
8.2 Power Reference Measurement		
8.3 Area Scan		
8.4 Zoom Scan		
8.5 Volume Scan Procedures		
8.6 Power Drift Monitoring		
9. Test Equipment List		
10. System Verification		
10.1 Tissue Simulating Liquids		
10.2 Tissue Verification		
10.3 System Performance Check Results		
11. Conducted RF Output Power (Unit: dBm)	19	
12. SAR test exclusions table		
13. SAR Test Results		
13.1 Body SAR		
13.2 Repeated SAR Measurement		
14. Simultaneous Transmission Analysis		
14.1 Body Exposure Conditions		
14.2 Hand Exposure Conditions		
15. Uncertainty Assessment		
16. References	25	
Appendix A. Plots of System Performance Check		
Appendix B. Plots of High SAR Measurement		
Appendix C. DASY Calibration Certificate		
Appendix D. Test Setup Photos		

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA6O1207	Rev. 01	Initial issue of report	Nov. 21, 2016

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: XEK-MHANDH3

Issued Date : Nov. 21, 2016 Form version. : 160427

Report No.: FA6O1207

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Megabyte Limited, UHF Portable RFID Reader, H3B-01-MB, H3B-01-39, H3B-01-PH, are as follows.

Report No.: FA6O1207

	Highest SAR Summary	
UHF RFID	Body (Separation 0mm) 1g SAR (W/kg)	Highest Simultaneous Transmission 1g SAR (W/kg)
RFID 900MHz	1.13	1.25
Date of Testing:	2016/11/9	
Remark: 1. According to SAR test exclusion guidance of KDB447498, extremity standalone SAR is not required for this device.		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body, 4.0 W/kg for Extremity) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Testing Laboratory		
Test Site SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	

Applicant Applicant		
Company Name Megabyte Limited		
Address Unit 507, 5/F, Building 12W. No. 12 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong		

Manufacturer		
Company Name Megabyte Limited		
	Unit 507, 5/F, Building 12W. No. 12 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong	

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

Issued Date: Nov. 21, 2016 Form version.: 160427 FCC ID: XEK-MHANDH3 Page 4 of 25

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

Report No.: FA6O1207

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification			
Equipment Name	JHF Portable RFID Reader		
Brand Name	Myndar		
Model Name	H3B-01-MB, H3B-01-39, H3B-01-PH		
FCC ID	XEK-MHANDH3		
S/N	H3B201605130013		
Wireless Technology and Frequency Range	Bluetooth: 2402 MHz ~ 2480 MHz RFID: 902 MHz ~ 928 MHz NFC: 13.56 MHz		
Mode	Bluetooth BR/EDR/LE RFID: DSB-ASK NFC: ASK		
EUT Stage	Identical Prototype		

SPORTON INTERNATIONAL INC.

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Report No.: FA6O1207

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

Report No.: FA6O1207

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{odv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

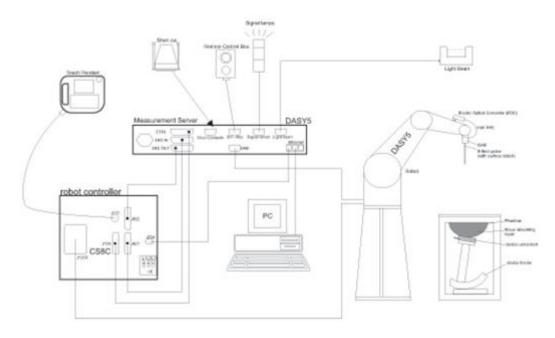

Report No.: FA6O1207

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing,
 AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
Directivity	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μW/g – >100 mW/g; Linearity: ±0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	3



Report No.: FA6O1207

<EX3DV4 Probe>

Construction	Symmetric design with triangular core	
	Built-in shielding against static charges	
	PEEK enclosure material (resistant to organic	
	solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz	
	Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis)	
	±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μW/g – >100 mW/g	
	Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm)	
	Tip diameter: 2.5 mm (body: 12 mm)	
	Typical distance from probe tip to dipole centers: 1	
	mm	



7.2 <u>Data Acquisition Electronics (DAE)</u>

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: XEK-MHANDH3

Issued Date : Nov. 21, 2016

Page 9 of 25 Form version. : 160427

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	7 5
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Report No.: FA6O1207

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

VEET I Halltonia		
Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

SPORTON INTERNATIONAL INC.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.





Report No.: FA6O1207

Mounting Device for Hand-Held Transmitters

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: XEK-MHANDH3

Issued Date : Nov. 21, 2016
Page 11 of 25
Form version. : 160427

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No.: FA6O1207

- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz		
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$		
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°		
	\leq 2 GHz: \leq 15 mm 2 – 3 GHz: \leq 12 mm	$3 - 4 \text{ GHz:} \le 12 \text{ mm}$ $4 - 6 \text{ GHz:} \le 10 \text{ mm}$		
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.			

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Iss FCC ID: XEK-MHANDH3 Page 13 of 25 Form

Issued Date: Nov. 21, 2016 Form version.: 160427

Report No.: FA6O1207

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Report No.: FA6O1207

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			\leq 2 GHz: \leq 8 mm 2 – 3 GHz: \leq 5 mm [*]	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$
	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Nov. 21, 2016

FCC ID : XEK-MHANDH3 Page 14 of 25 Form version. : 160427

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9. Test Equipment List

Manufacture	Name of Environment	Time (Mandal	Serial Number	Calibration		
Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date	
SPEAG	900MHz System Validation Kit	D900V2	043	Jun. 27, 2016	Jun. 26, 2017	
SPEAG	Data Acquisition Electronics	DAE4	679	Jun. 13, 2016	Jun. 12, 2017	
SPEAG	Dosimetric E-Field Probe	EX3DV4	3898	Jul. 11, 2016	Jul. 10, 2017	
Wisewind	Thermometer	HTC-1	TM560	Oct. 12, 2016	Oct. 11, 2017	
SPEAG	Device Holder	N/A	N/A	N/A	N/A	
R&S	Signal Generator	MG3710A	6201502524	Dec. 18, 2015	Dec. 17, 2016	
Agilent	ENA Network Analyzer	E5071C	MY46316648	Jan. 12, 2016	Jan. 11, 2017	
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 19, 2016	Jul. 18, 2017	
LINE SEIKI	Digital Thermometer	LKMelectronic	DTM3000SPEZIAL	Sep. 05, 2016	Sep. 04, 2017	
Anritsu	Power Meter	ML2495A	1419002	May. 10, 2016	May. 09, 2017	
Anritsu	Power Sensor	MA2411B	1339124	May. 10, 2016	May. 09, 2017	
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 21, 2016	Jun. 20, 2017	
Mini-Circuits	Power Amplifier	ZVE-8G+	D120604	Mar. 16, 2016	Mar. 15, 2017	
Mini-Circuits	Power Amplifier	ZHL-42W+	QA1344002	Mar. 16, 2016	Mar. 15, 2017	
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1		
Woken	Attenuator 1	WK0602-XX	N/A	Note 1		
PE	Attenuator 2	PE7005-10	N/A	No	te 1	
PE	Attenuator 3	PE7005-3	N/A	Note 1		

Report No.: FA6O1207

General Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and
the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the
network analyzer. The reading of the power meter was offset by the path loss difference between the path to the
power meter and the path to the system check source to monitor the actual power level fed to the system check
source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

Page 16 of 25







Report No.: FA6O1207

Fig 10.2 Photo of Liquid Height for Body SAR

TEL: 886-3-327-3456 / FAX: 886-3-328-4978

FCC ID: XEK-MHANDH3

Issued Date: Nov. 21, 2016 Form version.: 160427



10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target

Report No.: FA6O1207

tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
				For Head				
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
				For Body				
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)		
Water	64~78%		
Mineral oil	11~18%		
Emulsifiers	9~15%		
Additives and Salt	2~3%		

<Tissue Dielectric Parameter Check Results>


Frequency (MHz)	Tissue Type	Liquid Temp. (℃)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date	
900	MSL	22.8	1.047	56.650	1.05	55.00	-0.29	3.00	±5	2016/11/9	Ì

SPORTON INTERNATIONAL INC.TEL: 886-3-327-3456 / FAX: 886-3-328-4978

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	1g SAR	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/11/9	900	MSL	250	D900V2-043	EX3DV4 - SN3898	DAE4 Sn679	2.58	10.80	10.32	-4.44

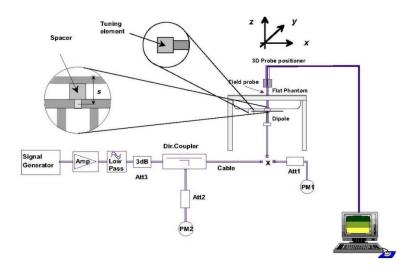



Report No.: FA6O1207

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

11. Conducted RF Output Power (Unit: dBm)

<RFID Conducted Power>

Band	F	Tune-up		
TX Channel	Low	Middle	High	Limit
Frequency (MHz)	902.75	915.25	927.25	(dBm)
RFID900MHz	24.97	24.90	24.94	25.00

Report No.: FA6O1207

12. SAR test exclusions table

Maximum Average power(dBm)						
Bluetooth-BR/EDR Bluetooth-LE RFID900MHz						
7.5	7.5	25.0				

General Note:

- 1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
- 2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- 3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- 4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
- 5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance 50 mm)-(f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance 50 mm) 10] mW at > 1500 MHz and ≤ 6 GHz
- 7. Detail antenna location of this device please refers to Appendix D.

<1g SAR exclusion for body>

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
7.5	< 5	2.48	1.89

Note

Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 1.89 which is <= 3, SAR testing is not required.

<10g SAR exclusion for Hand>

Exposure	Wireless Interface	RFID	ВТ
Position	Calculated Frequency	902MHz	2480MHz
	Maximum power (dBm)	25	7.5
	Maximum rated power(mW)	316.0	6.0
	Separation distance(mm)	80.0	85.0
Hand	exclusion threshold	332.0	445.0
	Testing required?	No	No

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Nov. 21, 2016

FCC ID : XEK-MHANDH3 Page 19 of 25 Form version. : 160427

13. SAR Test Results

General Note:

- 1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Report No.: FA6O1207

- b. For RFID: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- 2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - · ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - · ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - · ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.

13.1 Body SAR

<RFID SAR>

Plot No.	Band	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	RFID900MHz	Bottom Face	0mm	Low	902.75	24.97	25.00	1.007	0	0.921	0.927
	RFID900MHz	Bottom Face	0mm	Middle	915.25	24.90	25.00	1.023	0.05	0.999	1.022
01	RFID900MHz	Bottom Face	0mm	High	927.25	24.94	25.00	1.014	-0.01	1.110	1.125
	RFID900MHz	Edge 1	0mm	Low	902.75	24.97	25.00	1.007	-0.04	0.065	0.065
	RFID900MHz	Edge 2	0mm	Low	902.75	24.97	25.00	1.007	-0.04	0.182	0.183
	RFID900MHz	Edge 3	0mm	Low	902.75	24.97	25.00	1.007	-0.04	0.061	0.061
	RFID900MHz	Edge 4	0mm	Low	902.75	24.97	25.00	1.007	0	0.207	0.208

13.2 Repeated SAR Measurement

No.	Band	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)		Tune-up Scaling Factor		Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	RFID900MHz	Bottom Face	0mm	High	927.25	24.94	25.00	1.014	-0.01	1.110		1.125
2nd	RFID900MHz	Bottom Face	0mm	High	927.25	24.94	25.00	1.014	-0.03	1.100	1.01	1.115

General Note:

- 1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- 2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated measured SAR.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

SPORTON INTERNATIONAL INC.TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issi

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Body / Extremity
1.	RFID + Bluetooth	Yes

Report No.: FA6O1207

General Note:

- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis. Bluetooth/RFID SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - i) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]· [√f(GHz)/x] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.
 - iv) For body Bluetooth estimated SAR is conservatively determined by 5mm for Body SAR test separation, for all applicable exposure positions.

<1g estimated SAR for Body>

Mode	Max Power	Exposure Position	Body	
2.4GHz Bluetooth	7.5dBm	Estimated SAR (W/kg)	0.252 W/kg	

<10g estimated SAR for Hand>

Mode	Max Power	Exposure Position	hand
2.4GHz Bluetooth	7.5dBm	Estimated SAR (W/kg)	1.0 W/kg
RFID	25dBm	Estimated SAR (W/kg)	1.0 W/kg

SPORTON INTERNATIONAL INC. TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Nov. 21, 2016 Form version.: 160427

FCC ID: XEK-MHANDH3

14.1 Body Exposure Conditions

Exposure Position	1 RFID	2 Bluetooth	1+2 Summed
<u> </u>	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	1g SAR (W/kg)
Front	1.125	0.126	1.251
Back	0.065	0.126	0.191
Left side	0.183	0.126	0.309
Right side	0.061	0.126	0.187
Top side	0.208	0.126	0.334

Report No.: FA6O1207

14.2 Hand Exposure Conditions

	3	4	2:4
Exposure Position	RFID	Bluetooth	3+4 Summed
	Estimated 10g SAR (W/kg)	Estimated 10g SAR (W/kg)	10g SAR (W/kg)
Hand	1.000	1.000	2.000

Test Engineer: Nick Yu and Poa Pan

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Nov. 21, 2016 Form version. : 160427

FCC ID: XEK-MHANDH3 Page 22 of 25

15. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

Report No.: FA6O1207

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

Table 15.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

SPORTON LAB. FCC SAR Test Report

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	
Measurement System								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6	
Linearity	4.7	R	1.732	1	1	2.7	2.7	
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	
Modulation Response	3.2	R	1.732	1	1	1.8	1.8	
Readout Electronics	0.3	N	1	1	1	0.3	0.3	
Response Time	0.0	R	1.732	1	1	0.0	0.0	
Integration Time	2.6	R	1.732	1	1	1.5	1.5	
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7	
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2	
Test Sample Related								
Device Positioning	3.0	N	1	1	1	3.0	3.0	
Device Holder	3.6	N	1	1	1	3.6	3.6	
Power Drift	5.0	R	1.732	1	1	2.9	2.9	
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	
Phantom and Setup								
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5	
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0	
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1	
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0	
Temp. unc Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0	
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4	
Temp. unc Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	
Cor	Combined Std. Uncertainty							
Co	K=2	K=2						
Exp	22.9%	22.7%						

Report No.: FA6O1207

Table 15.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

TEL: 886-3-327-3456 / FAX: 886-3-328-4978 Issued Date: Nov. 21, 2016 Form version. : 160427

FCC ID: XEK-MHANDH3 Page 24 of 25

16. References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

Report No.: FA6O1207

- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [7] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.