

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
UHF Mobile RFID Reader

ISSUED TO
Megabyte Limited

Units 507, 5/F, Building 12W, No. 12 Science Park West Avenue, Hong Kong Science Park, Shatin, NT Hong Kong



Tested by:

Ye Hongji

Date:

Aug. 16, 2021

Approved by:

Liao Jianming
(Technical Director)

Date:

Aug. 16, 2021

Report No.: BL-SZ2160937-605

EUT Name: UHF Mobile RFID Reader

Model Name: MTRAY-F1-39-BW

Brand Name: Myndar

Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)

FCC ID: XEK-MTRAYF139

Test Conclusion: Pass

Test Date: Jul. 07, 2021 ~ Jul. 14, 2021

Date of Issue: Aug. 16, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
Rev. 01	Aug. 16, 2021	Initial Issue

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Measurement Uncertainty	11
4.4	Description of Test Setup	12
4.4.1	For Antenna Port Test	12
4.4.2	For AC Power Supply Port Test	12
4.4.3	For Radiated Test (Below 30 MHz)	13
4.4.4	For Radiated Test (30 MHz-1 GHz)	13
4.4.5	For Radiated Test (Above 1 GHz)	14
4.5	Measurement Results Explanation Example	15
4.5.1	For conducted test items:	15

5	TEST ITEMS.....	16
5.1	Antenna Requirements.....	16
5.1.1	Relevant Standards.....	16
5.1.2	Antenna Anti-Replacement Construction	16
5.1.3	Antenna Gain	16
5.2	Number of Hopping Frequencies	17
5.2.1	Limit.....	17
5.2.2	Test Procedure.....	17
5.2.3	Test Result	17
5.3	Peak Output Power	18
5.3.1	Test Limit.....	18
5.3.2	Test Setup.....	18
5.3.3	Test Procedure.....	18
5.3.4	Test Result	18
5.4	Occupied Bandwidth	19
5.4.1	Limit.....	19
5.4.2	Test Setup.....	19
5.4.3	Test Procedure.....	19
5.4.4	Test Result	19
5.5	Carrier Frequency Separation	20
5.5.1	Limit.....	20
5.5.2	Test Setup.....	20
5.5.3	Test Procedure.....	20
5.5.4	Test Result	20
5.6	Time of Occupancy (Dwell time)	21
5.6.1	Limit.....	21
5.6.2	Test Setup.....	21
5.6.3	Test Procedure.....	21
5.6.4	Test Result	21
5.7	Conducted Spurious Emission & Authorized-band band-edge	22
5.7.1	Limit.....	22
5.7.2	Test Setup.....	22

5.7.3	Test Procedure	22
5.7.4	Test Result	22
5.8	Conducted Emission	23
5.8.1	Limit.....	23
5.8.2	Test Setup	23
5.8.3	Test Procedure	23
5.8.4	Test Result	23
5.9	Radiated Spurious Emission	24
5.9.1	Limit.....	24
5.9.2	Test Setup	24
5.9.3	Test Procedure	24
5.9.4	Test Result	25
5.10	Band Edge (Restricted-band band-edge).....	26
5.10.1	Limit.....	26
5.10.2	Test Setup	26
5.10.3	Test Procedure	26
5.10.4	Test Result	26
ANNEX A	TEST RESULT	27
A.1	Number of Hopping Frequency	27
A.2	Peak Output Power	28
A.3	20 dB and 99% bandwidth	29
A.4	Hopping Frequency Separation.....	31
A.5	Average Time of Occupancy	32
A.6	Conducted Spurious Emissions & Authorized-band band-edge	33
A.7	Conducted Emissions.....	37
A.8	Radiated Spurious Emission	39
A.9	Band Edge (Restricted-band band-edge).....	59
ANNEX B	TEST SETUP PHOTOS	61
ANNEX C	EUT EXTERNAL PHOTOS	61
ANNEX D	EUT INTERNAL PHOTOS	61

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Megabyte Limited
Address	Units 507, 5/F, Building 12W, No. 12 Science Park West Avenue, Hong Kong Science Park, Shatin, NT Hong Kong

2.2 Manufacturer Information

Manufacturer	N/A
Address	N/A

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Type	UHF Mobile RFID Reader
Model Name Under Test	MTRAY-F1-39-BW
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n U-NII-1/3 RFID
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	Frequency hopping system
Modulation Type	RFID
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Frequency Range	The frequency range used is 902 MHz to 928 MHz.
Number of channel	50
Tested Channel	0 (902.75 MHz), 26 (915.25 MHz), 50 (927.25 MHz)
Antenna Type	PCB Antenna
Antenna Gain	-1.0 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
1	902.75	26	915.25
2	903.25	27	915.75
3	903.75	28	916.25
4	904.25	29	916.75
5	904.75	30	917.25
6	905.25	31	917.75
7	905.75	32	918.25
8	906.25	33	918.75
9	906.75	34	919.25
10	907.25	35	919.75
11	907.75	36	920.25
12	908.25	37	920.75
13	908.75	38	921.25
14	909.25	39	921.75
15	909.75	40	922.25
16	910.25	41	922.75
17	910.75	42	923.25
18	911.25	43	923.75
19	911.75	44	924.25
20	912.25	45	924.75
21	912.75	46	925.25
22	913.25	47	925.75
23	913.75	48	926.25
24	914.25	49	926.75
25	914.75	50	927.25

2.6 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	ModuleReaderManager		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Soft Set	
RFID	ALL	2000	

Run Software

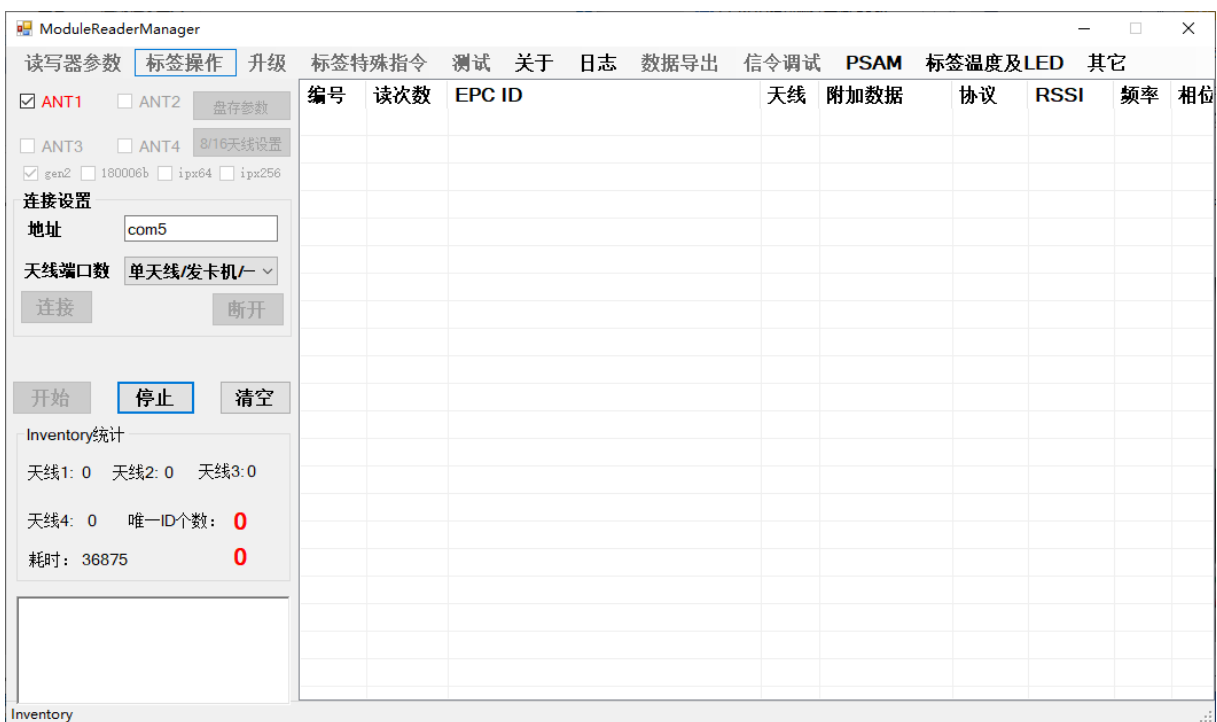

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Verdict

No.	Description	FCC Part No.	Modulation Technology	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.1	Pass	--
3	Peak Output Power	15.247(b)	Frequency hopping system	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Frequency hopping system	Low/Middle/High	ANNEX A.3	Pass	--
5	Carrier Frequency Separation	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.4	Pass	--
6	Time of Occupancy (Dwell time)	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.5	Pass	--
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.6	Pass	--
8	Conducted Emission	15.207	Frequency hopping system	Low/Middle/High	ANNEX A.7	Pass	--
9	Radiated Spurious Emission	15.209 15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.8	Pass	--
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.9	Pass	--

Note 1: Please refer to section 5.1.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.06.01	2022.05.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.01	2022.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±2.8%
RF output power, conducted	±1.28 dB
Power Spectral Density, conducted	±1.30 dB
Unwanted Emissions, conducted	±1.84 dB
All emissions, radiated	±5.36 dB
Temperature	±0.82°C
Humidity	±4.1%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

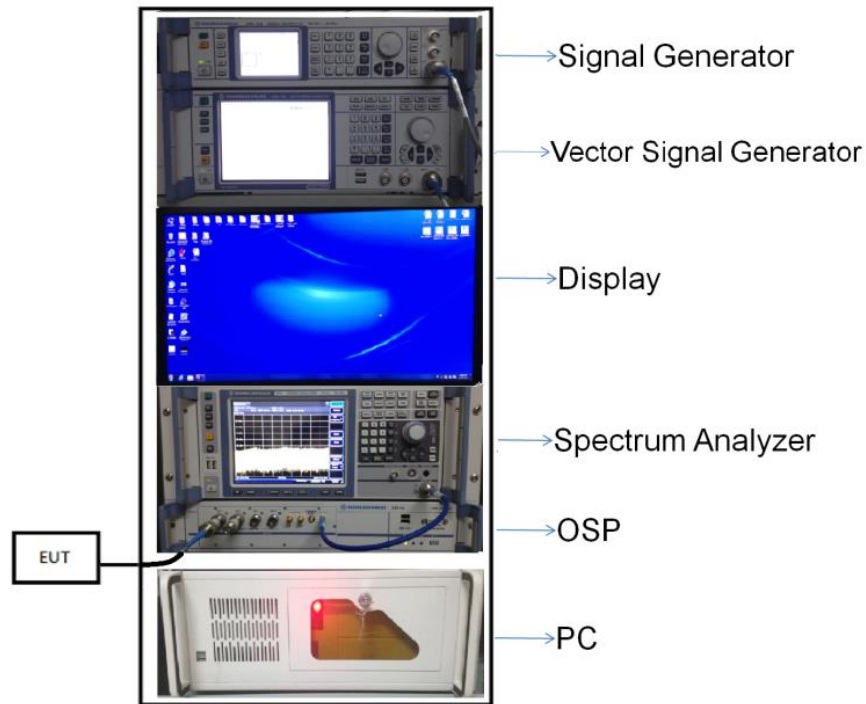


(Diagram 1)

4.4.2 For AC Power Supply Port Test

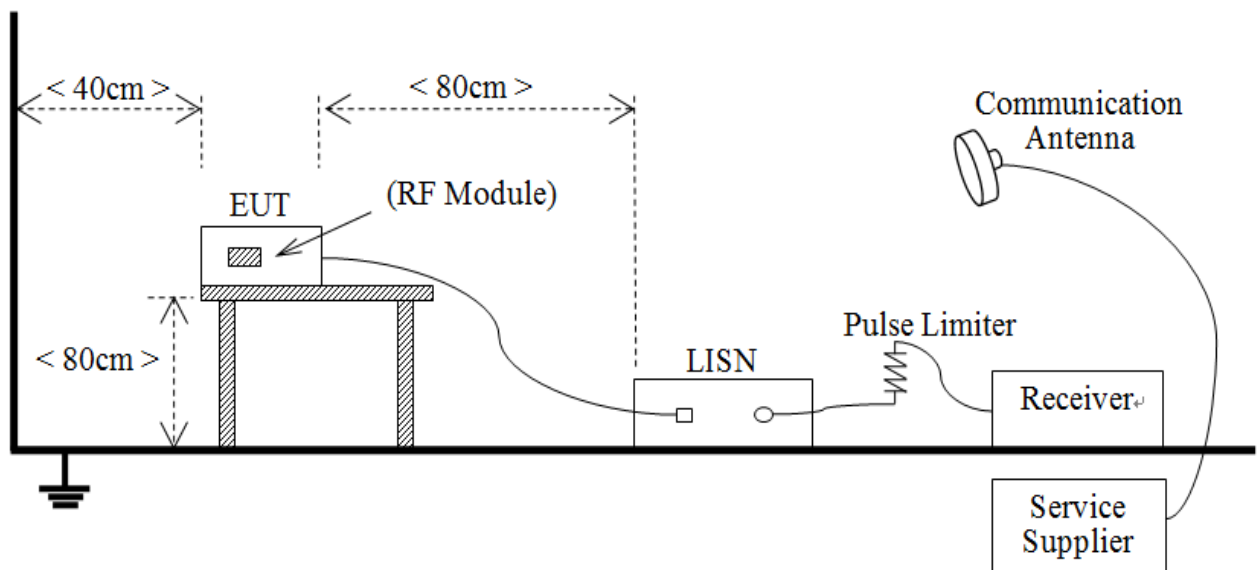


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

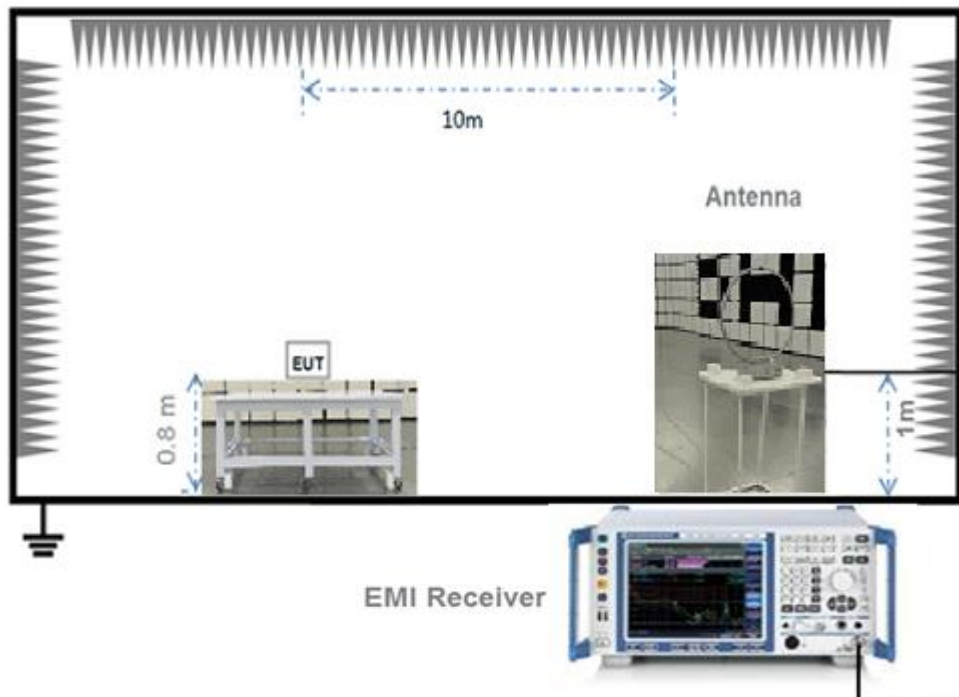


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

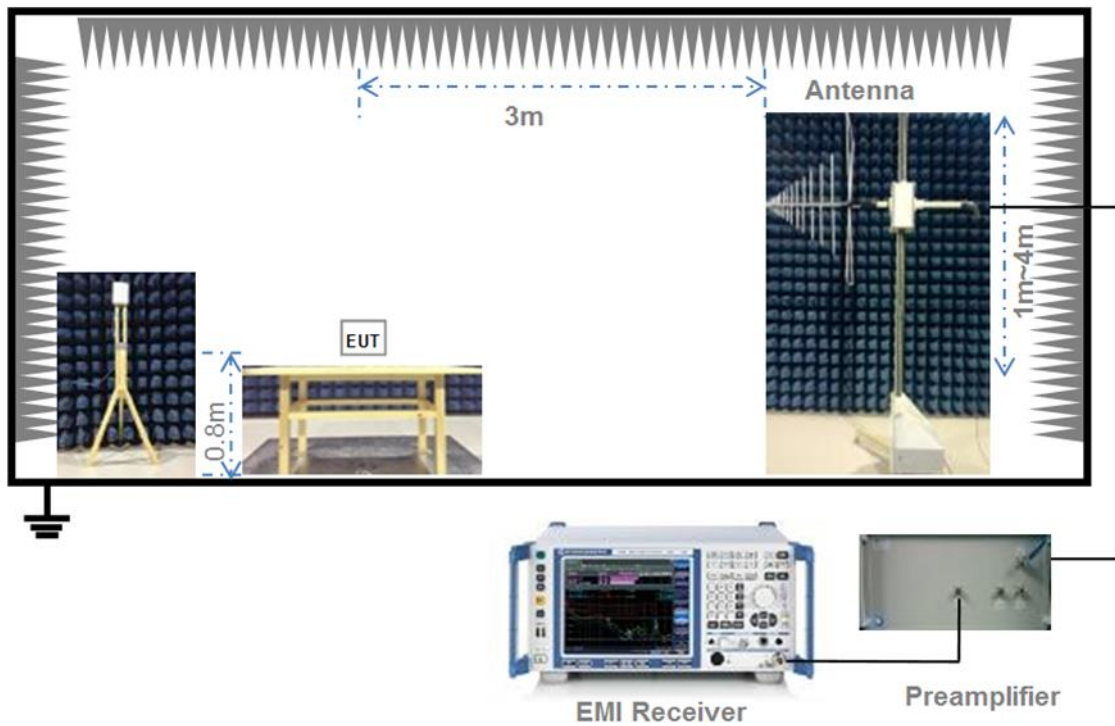

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

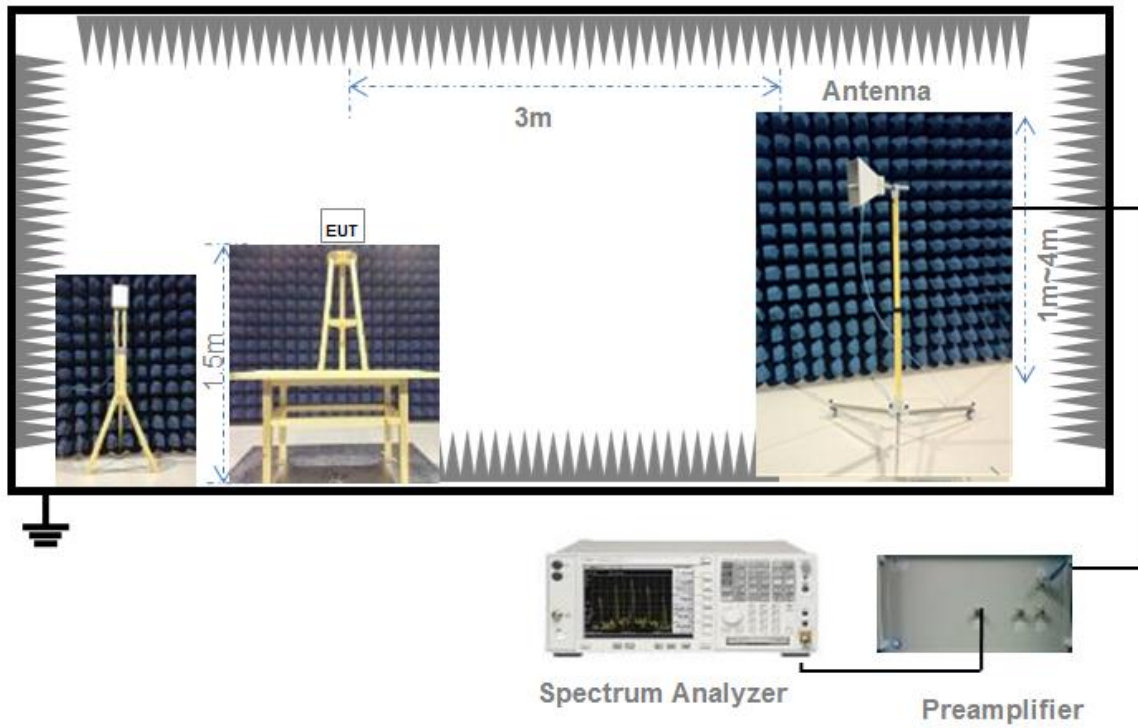

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203; RSS-247, 5.4 (d)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a); RSS-247, 5.1 (c)

For FHSs in the band 902-928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 20-second period. If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping channels and the average time of occupancy on any channel shall not be greater than 0.4 seconds within a 10-second period. The maximum 20 dB bandwidth of the hopping channel shall be 500 kHz.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.3 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (a)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

RSS-247, 5.4 (2)

For FHSs operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (c)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6 and A.7

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	902/F(kHz)	300
0.490 - 1.705	9020/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
RFID	902-928	50	50	Pass

Test plots

RFID

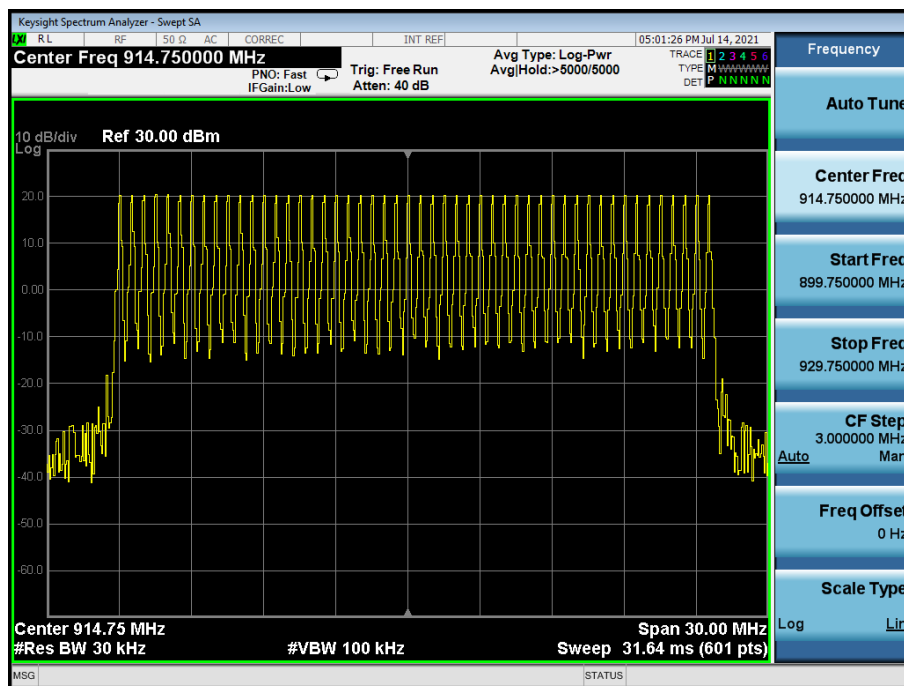


A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	RFID		dBm	mW	
	dBm	mW			
Low	20.28	106.54	30	1000	Pass
Middle	20.21	104.98			Pass
High	20.18	104.16			Pass

Test plots


LOW CHANNEL

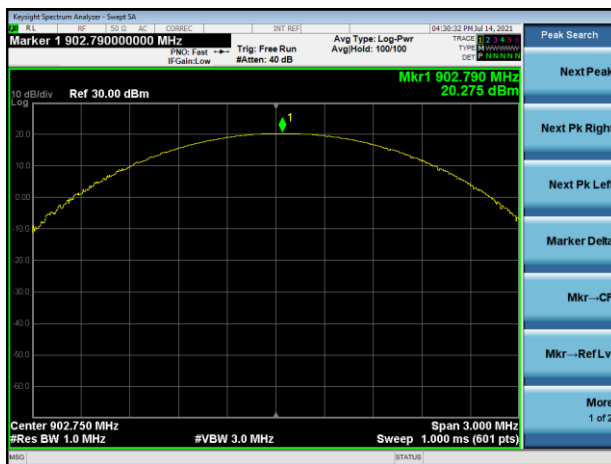

MIDDLE CHANNEL



HIGH CHANNEL

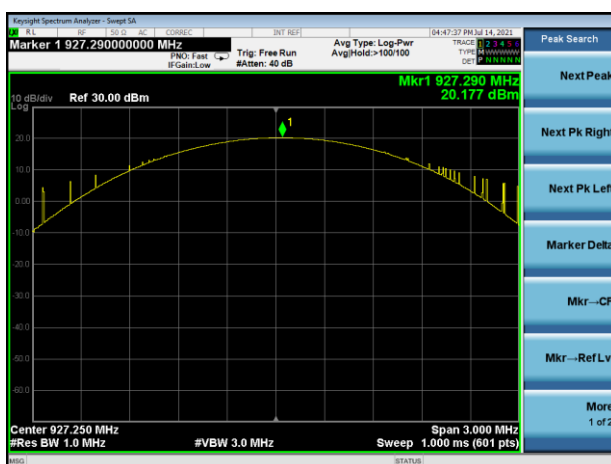

A.3 20 dB and 99% bandwidth

Test Data

RFID			
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Verdict
Low	0.187000	0.259080	Pass
Middle	0.190000	0.257310	Pass
High	0.190000	0.253940	Pass

Test plots (20 dB Bandwidth)

LOW CHANNEL



MIDDLE CHANNEL



HIGH CHANNEL



Test plots (99% Bandwidth)

LOW CHANNEL



MIDDLE CHANNEL



HIGH CHANNEL




A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Verdict
RFID	0.4975	0.1900	Pass

Test Plots

RFID

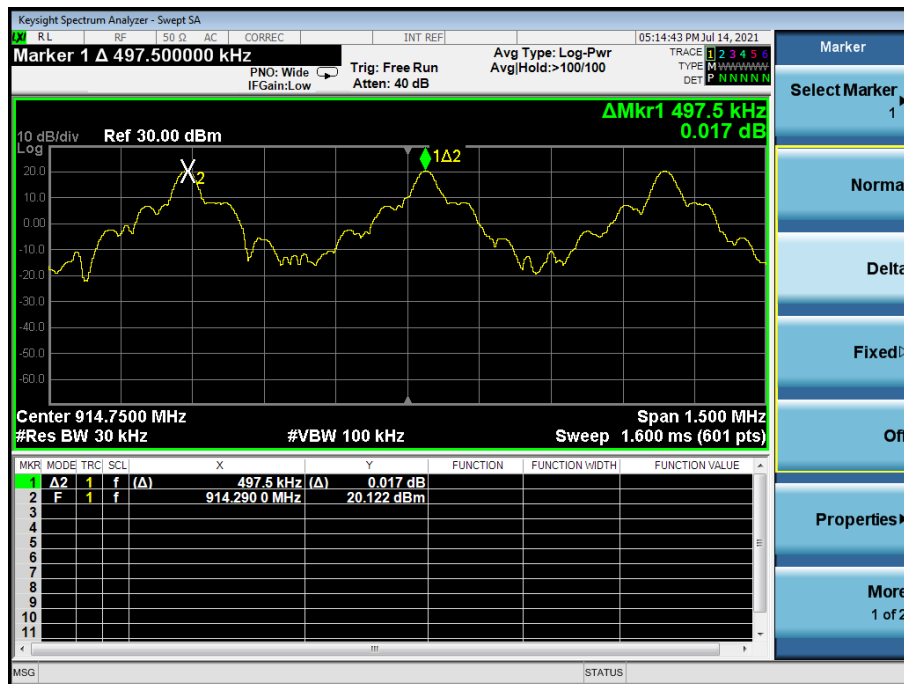


A.5 Average Time of Occupancy

Test Data

Total of Dwell(ms)	Limit (sec)	Verdict
360.000	0.4	Pass

RFID

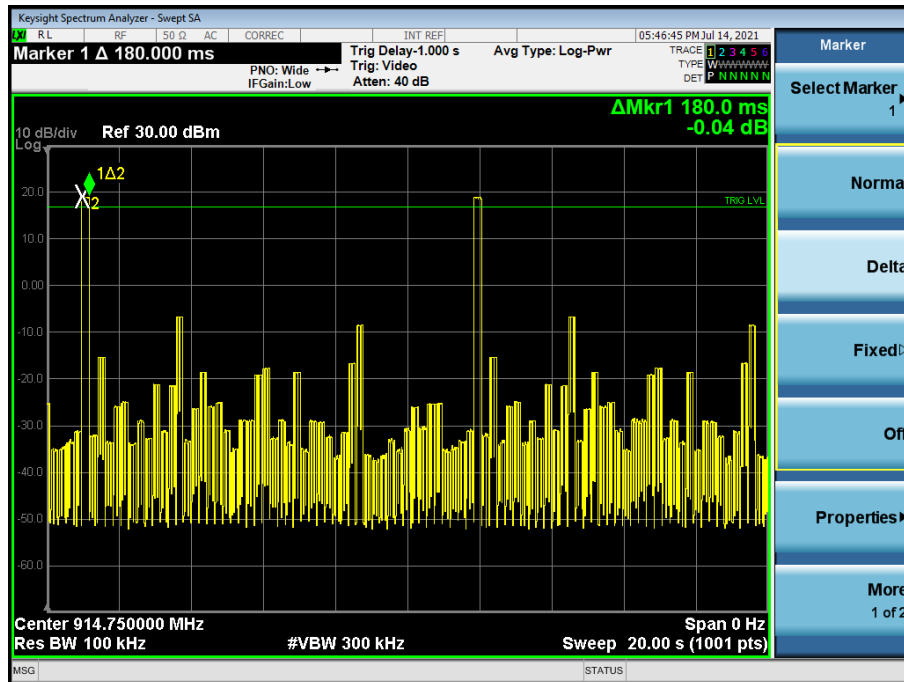

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

RFID				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-18.84	20.20	0.20	Pass
Middle	-32.68	20.17	0.17	Pass
High	-11.81	20.14	0.14	Pass

RFID				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Hopping	-17.70	20.20	0.20	Pass

Test Plots


LOW CHANNEL, CARRIER LEVEL

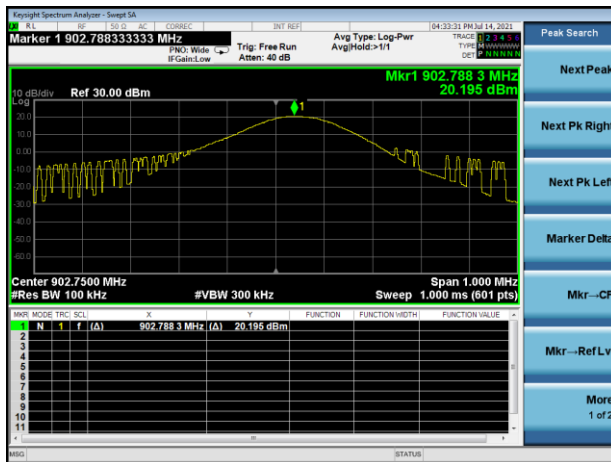


LOW CHANNEL, Band Edge




LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

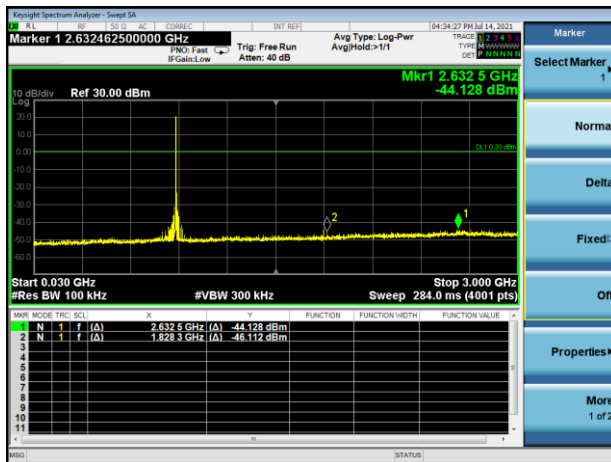


LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

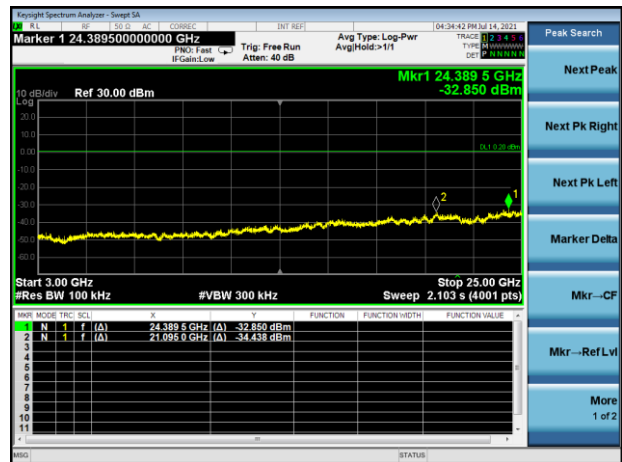


MIDDLE CHANNEL, CARRIER LEVEL

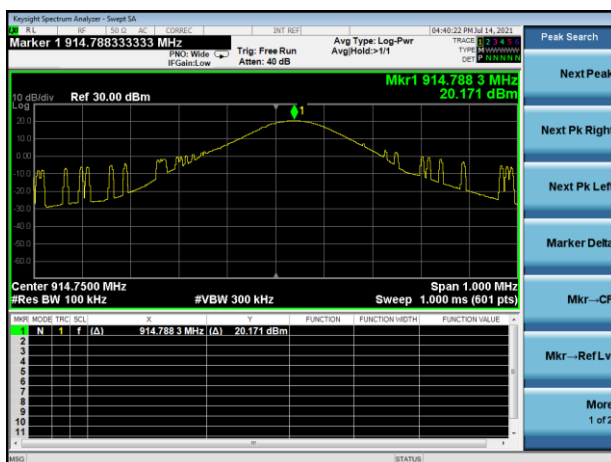


MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

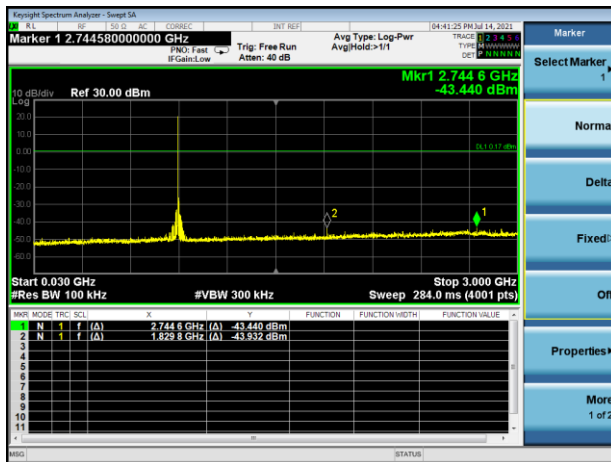

MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

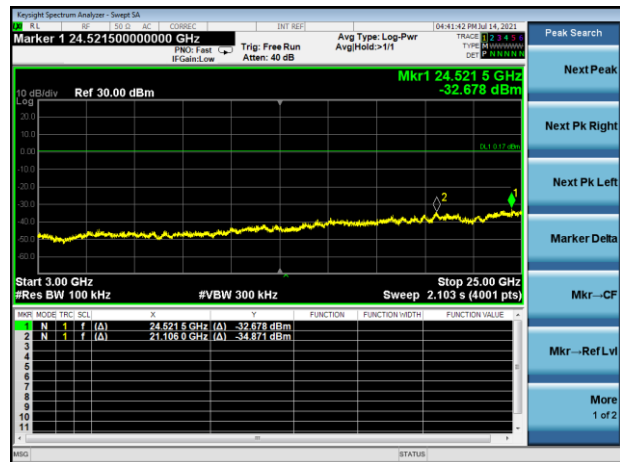


HIGH CHANNEL , CARRIER LEVEL

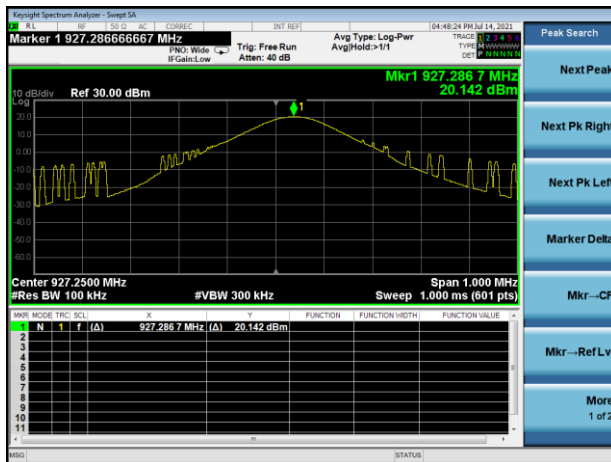


HIGH CHANNEL , BAND EDGE




HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

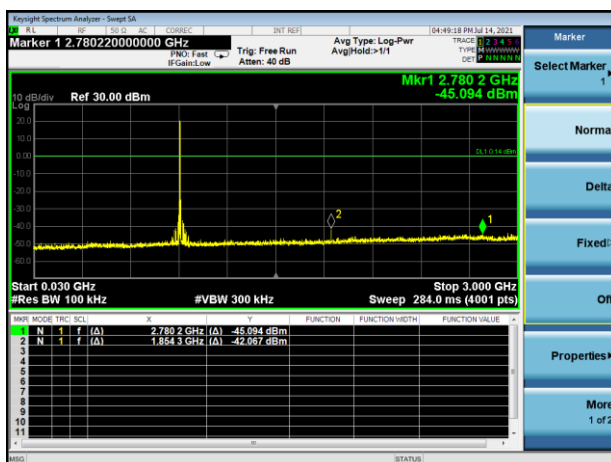


HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

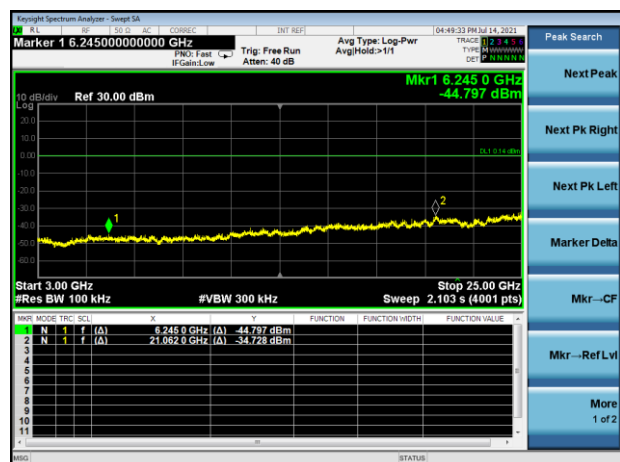


HOPPING, CARRIER LEVEL

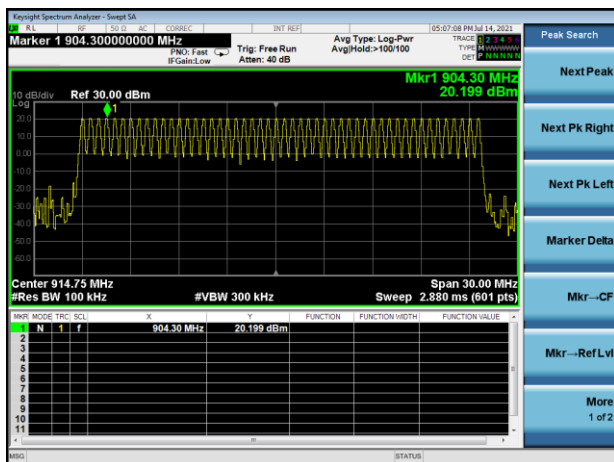


Hopping BAND EDGE (LOW)

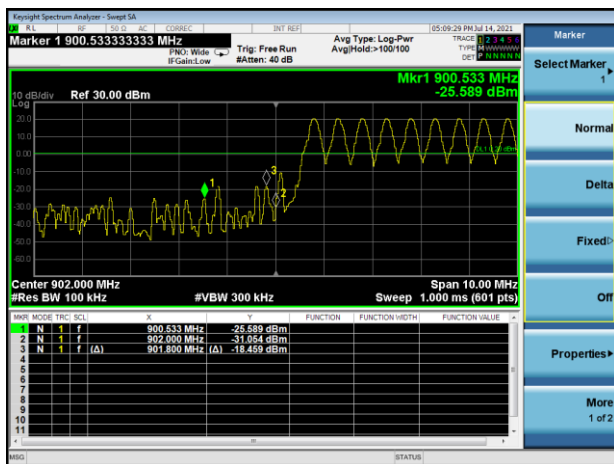


Hopping BAND EDGE (HIGH)

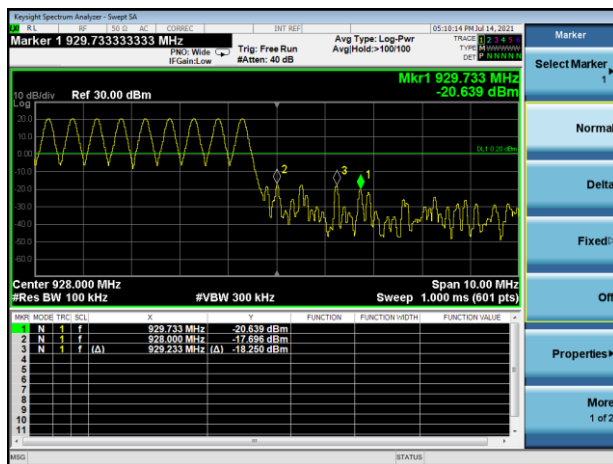

Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

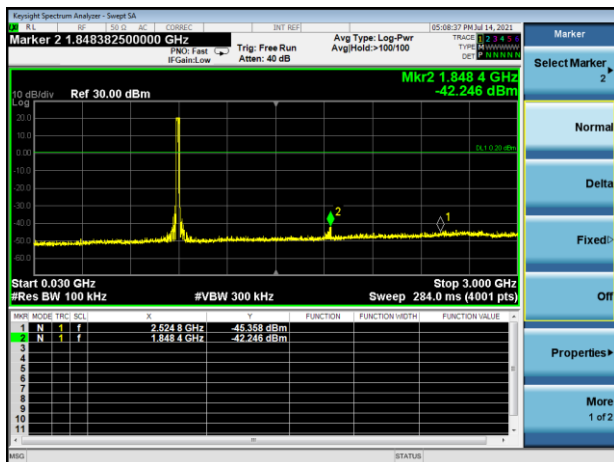

Hopping Mode, SPURIOUS 3 GHz ~ 25 GHz

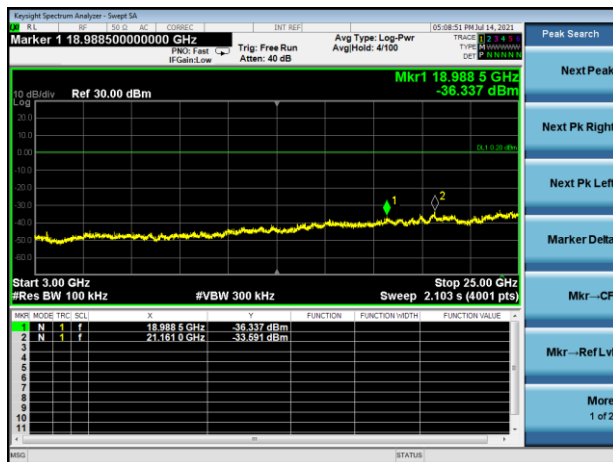

A.7 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

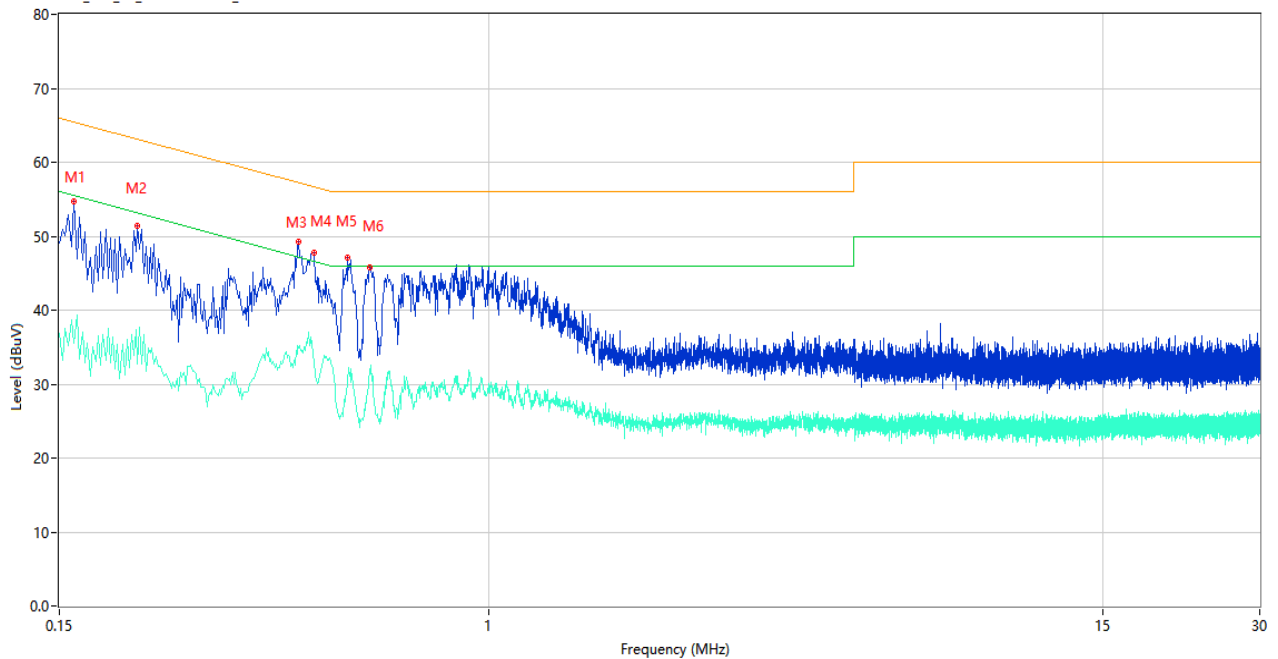

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.160	54.70	10.40	65.46	-10.76	Peak	L	Pass
1**	0.160	35.57	10.40	55.46	-19.89	AV	L	Pass
2	0.212	51.48	10.38	63.13	-11.65	Peak	L	Pass
2**	0.212	32.67	10.38	53.13	-20.46	AV	L	Pass
3	0.432	49.20	10.31	57.21	-8.01	Peak	L	Pass
3**	0.432	34.90	10.31	47.21	-12.31	AV	L	Pass
4	0.462	47.82	10.30	56.66	-8.84	Peak	L	Pass
4**	0.462	33.28	10.30	46.66	-13.38	AV	L	Pass
5	0.536	47.03	10.29	56.00	-8.97	Peak	L	Pass
5**	0.536	30.47	10.29	46.00	-15.53	AV	L	Pass
6	0.590	45.71	10.28	56.00	-10.29	Peak	L	Pass
6**	0.590	32.05	10.28	46.00	-13.95	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_ Class B

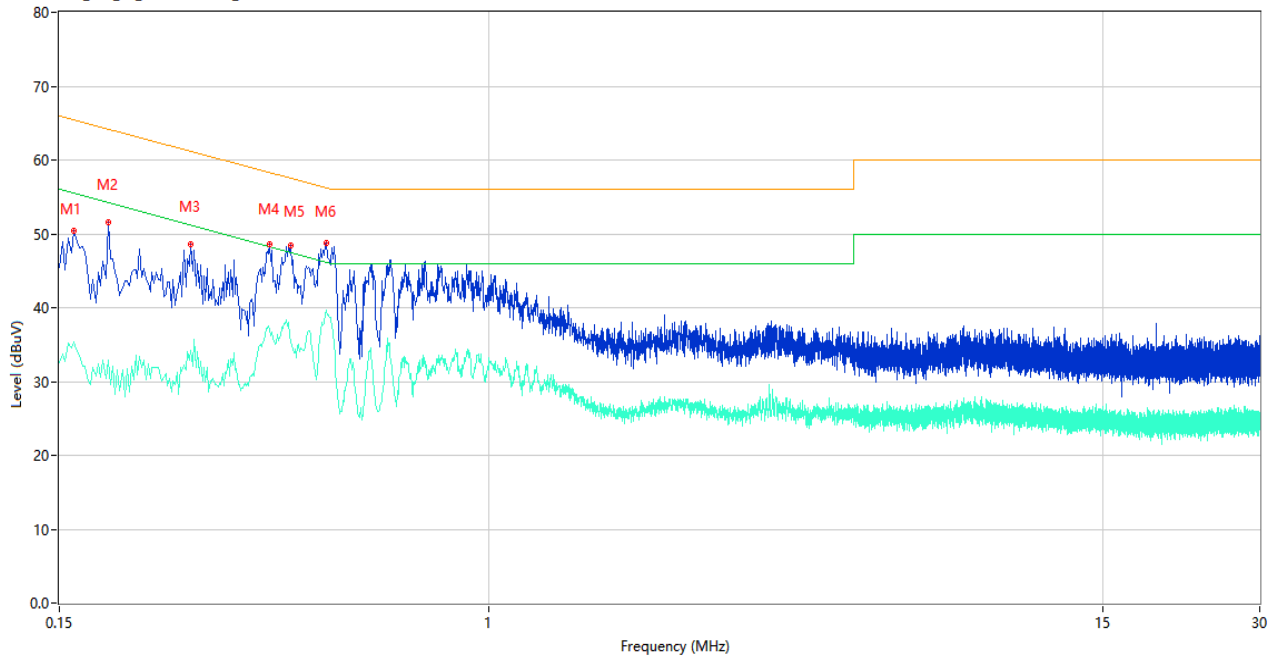

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.160	50.38	10.40	65.46	-15.08	Peak	N	Pass
1**	0.160	35.41	10.40	55.46	-20.05	AV	N	Pass
2	0.186	51.57	10.39	64.21	-12.64	Peak	N	Pass
2**	0.186	32.86	10.39	54.21	-21.35	AV	N	Pass
3	0.268	48.65	10.34	61.18	-12.53	Peak	N	Pass
3**	0.268	34.16	10.34	51.18	-17.02	AV	N	Pass
4	0.380	48.52	10.30	58.28	-9.76	Peak	N	Pass
4**	0.380	37.00	10.30	48.28	-11.28	AV	N	Pass
5	0.416	48.47	10.31	57.53	-9.06	Peak	N	Pass
5**	0.416	35.58	10.31	47.53	-11.95	AV	N	Pass
6	0.488	48.77	10.29	56.20	-7.43	Peak	N	Pass
6**	0.488	39.64	10.29	46.20	-6.56	AV	N	Pass

A.8 Radiated Spurious Emission

Note¹: The symbol of "--" in the table which means not application.


Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

Low Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

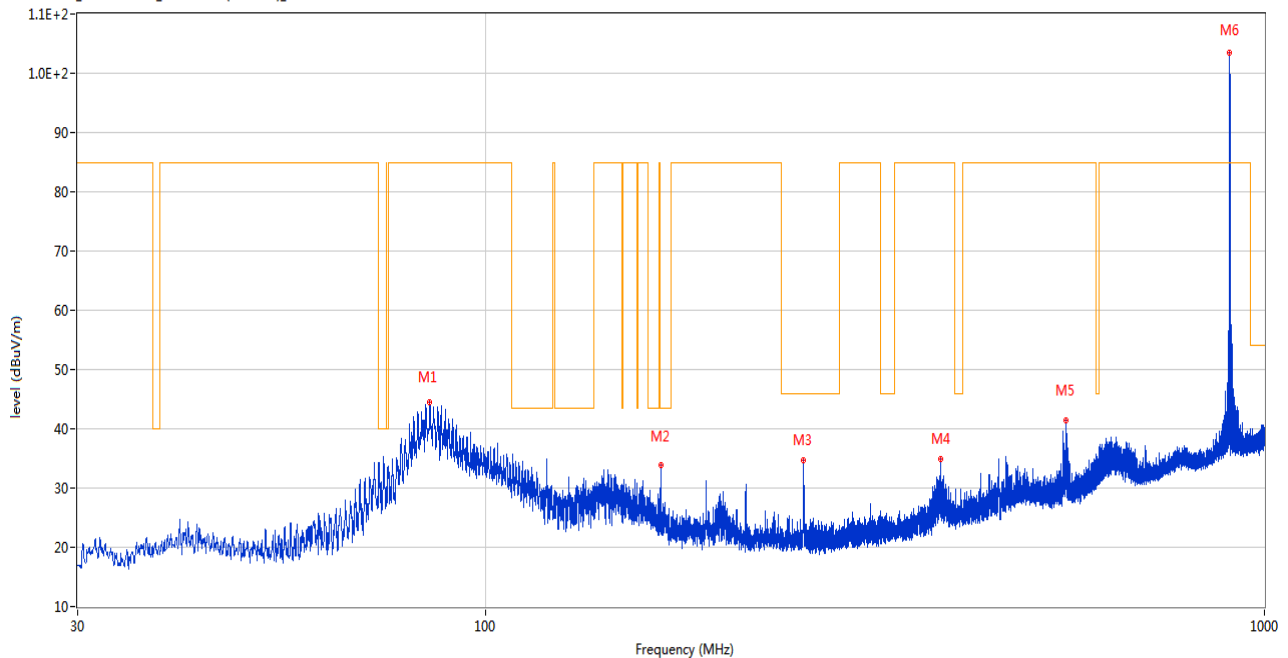

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	84.902	44.40	-29.81	84.9	-40.50	Peak	135.00	200	Horizontal	Pass
2	167.982	33.88	-24.78	43.5	-9.62	Peak	266.00	100	Horizontal	Pass
3	256.010	34.60	-25.51	46.0	-11.40	Peak	204.00	200	Horizontal	Pass
4	384.147	34.92	-21.51	84.9	-49.98	Peak	157.00	200	Horizontal	Pass
5	555.643	41.45	-16.72	84.9	-43.45	Peak	114.00	100	Horizontal	Pass
6	902.806	103.47	-7.74	84.9	18.57	Peak	190.00	100	Horizontal	N/A

Low Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

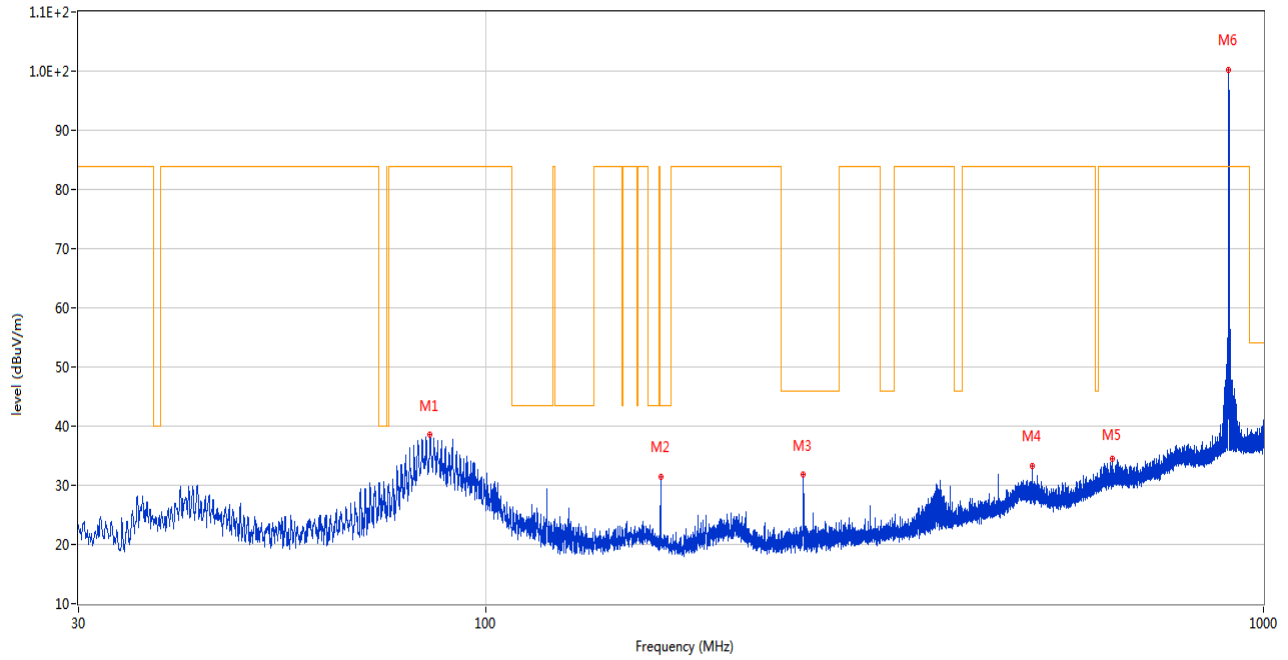

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	84.854	38.54	-29.81	83.9	-45.36	Peak	95.00	200	Vertical	Pass
2	168.031	31.34	-24.78	43.5	-12.16	Peak	170.00	200	Vertical	Pass
3	256.155	31.79	-25.51	46.0	-14.21	Peak	203.00	100	Vertical	Pass
4	503.990	33.32	-18.25	83.9	-50.58	Peak	216.00	200	Vertical	Pass
5	639.451	34.41	-13.34	83.9	-49.49	Peak	221.00	100	Vertical	Pass
6	902.806	100.22	-7.74	83.9	16.32	Peak	123.00	100	Vertical	N/A

Middle Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

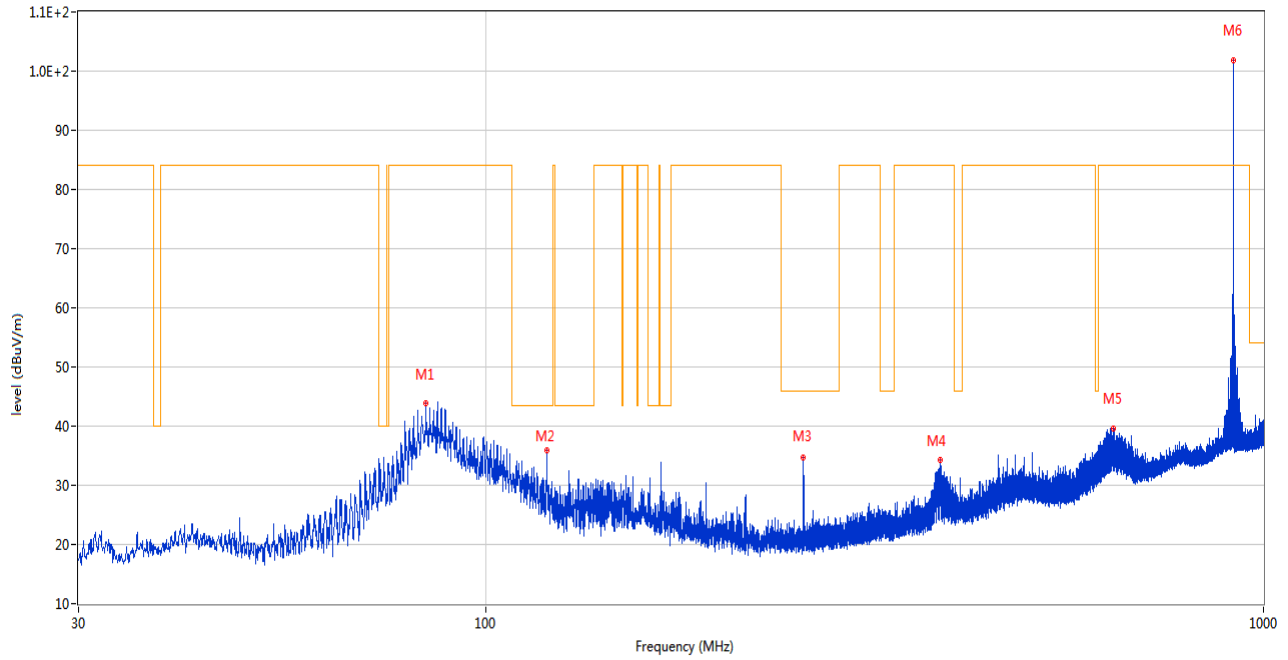

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	83.883	43.78	-29.80	84.1	-40.32	Peak	147.00	200	Horizontal	Pass
2	120.016	35.84	-26.44	43.5	-7.66	Peak	316.00	200	Horizontal	Pass
3	256.155	34.68	-25.51	46.0	-11.32	Peak	89.00	200	Horizontal	Pass
4	384.098	34.37	-21.51	84.1	-49.73	Peak	158.00	200	Horizontal	Pass
5	640.421	39.66	-13.34	84.1	-44.44	Peak	176.00	200	Horizontal	Pass
6	914.786	101.88	-7.71	84.1	17.78	Peak	188.00	200	Horizontal	N/A

Middle Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

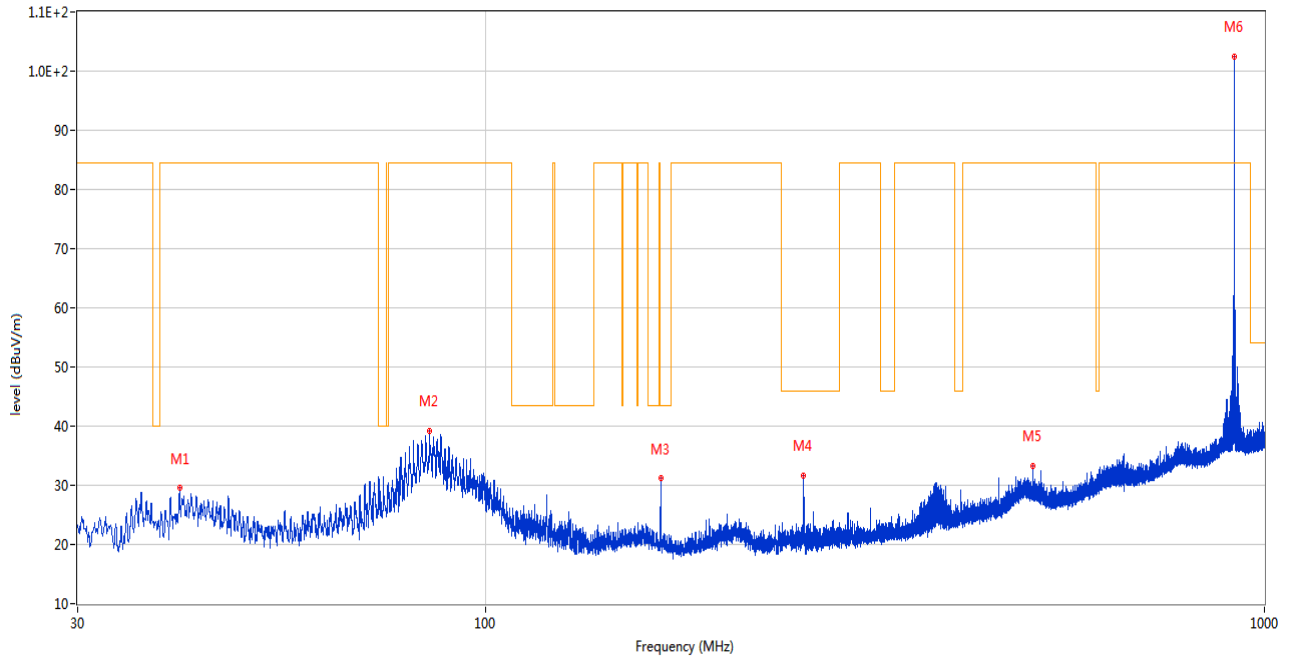

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.525	29.51	-25.77	84.4	-54.89	Peak	334.00	100	Vertical	Pass
2	84.902	39.22	-29.81	84.4	-45.18	Peak	125.00	100	Vertical	Pass
3	168.031	31.23	-24.78	43.5	-12.27	Peak	147.00	200	Vertical	Pass
4	256.155	31.67	-25.51	46.0	-14.33	Peak	194.00	100	Vertical	Pass
5	504.039	33.24	-18.25	84.4	-51.16	Peak	217.00	200	Vertical	Pass
6	914.786	102.36	-7.71	84.4	17.96	Peak	177.00	100	Vertical	N/A

High Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

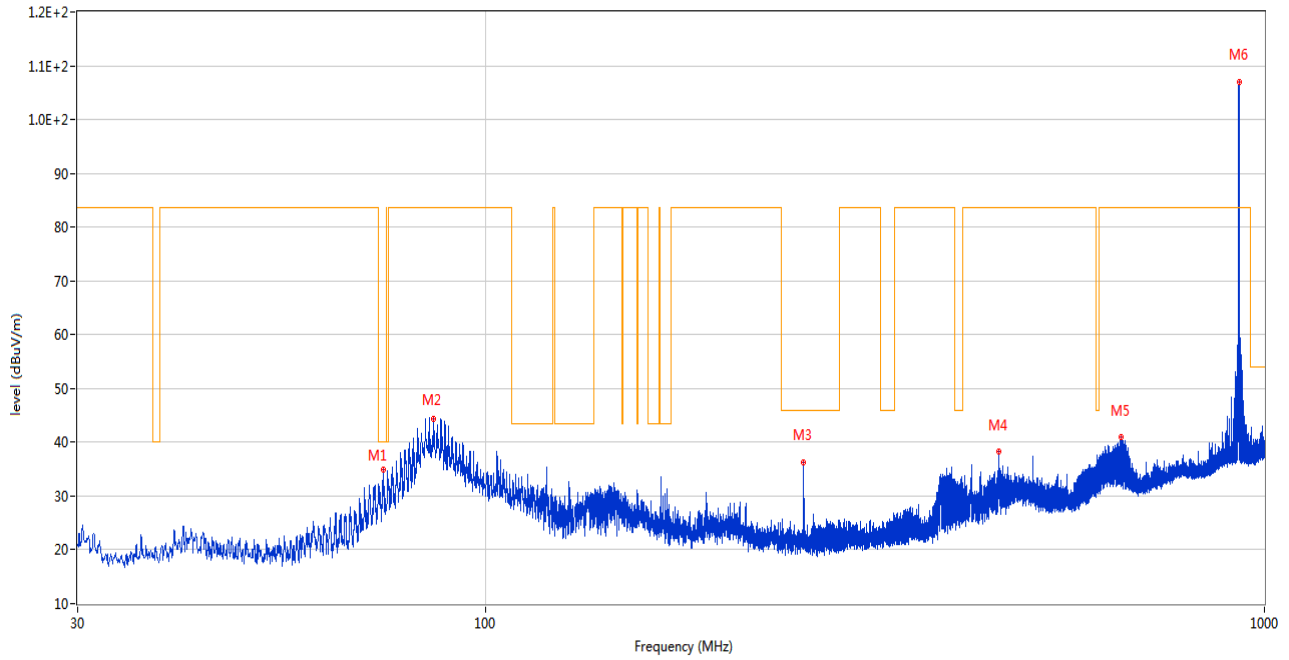

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	73.990	34.96	-29.15	40.0	-5.04	Peak	150.00	200	Horizontal	Pass
2	85.824	44.34	-29.77	83.7	-39.36	Peak	163.00	200	Horizontal	Pass
3	256.155	36.24	-25.51	46.0	-9.76	Peak	193.00	200	Horizontal	Pass
4	456.073	38.35	-19.32	83.7	-45.35	Peak	165.00	100	Horizontal	Pass
5	655.019	40.88	-13.51	83.7	-42.82	Peak	105.00	200	Horizontal	Pass
6	927.298	106.96	-7.81	83.7	23.26	Peak	21.00	100	Horizontal	N/A

High Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

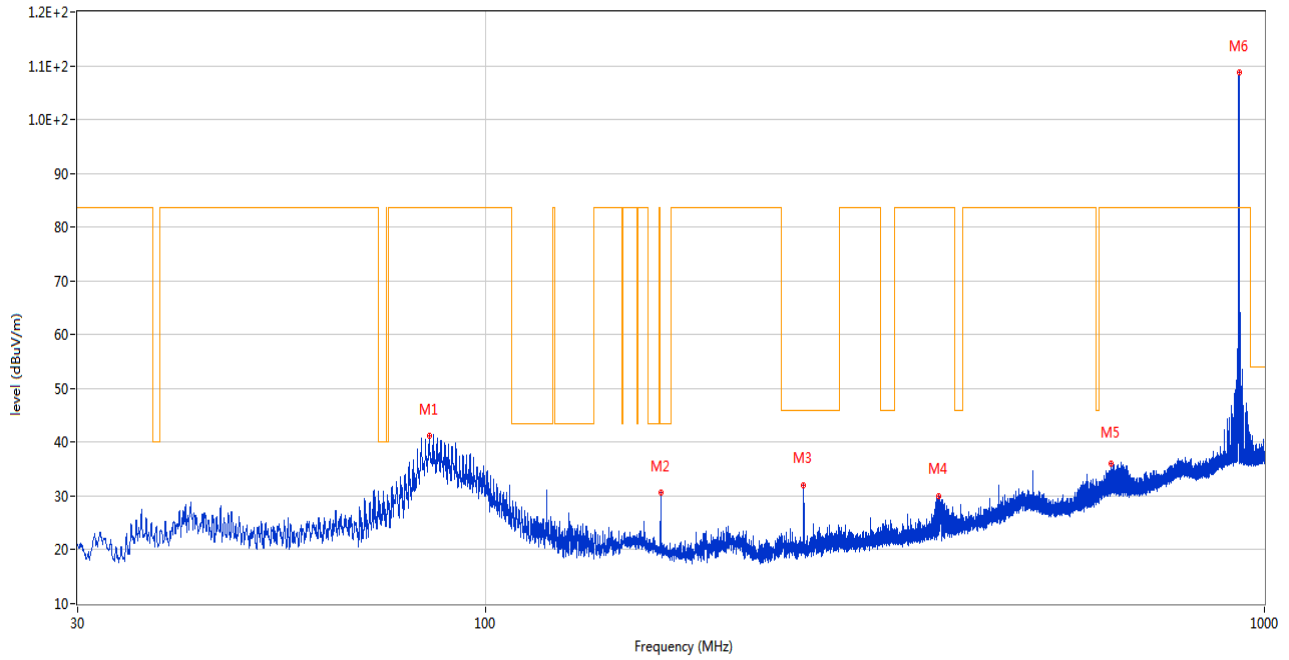

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	84.805	41.17	-29.81	83.6	-42.43	Peak	228.00	100	Vertical	Pass
2	167.982	30.66	-24.78	43.5	-12.84	Peak	183.00	200	Vertical	Pass
3	256.204	31.94	-25.51	46.0	-14.06	Peak	0.00	200	Vertical	Pass
4	381.916	29.92	-21.55	83.6	-53.68	Peak	97.00	100	Vertical	Pass
5	635.329	36.04	-13.44	83.6	-47.56	Peak	222.00	100	Vertical	Pass
6	927.298	108.68	-7.81	83.6	25.08	Peak	109.00	100	Vertical	N/A

Hopping Mode, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

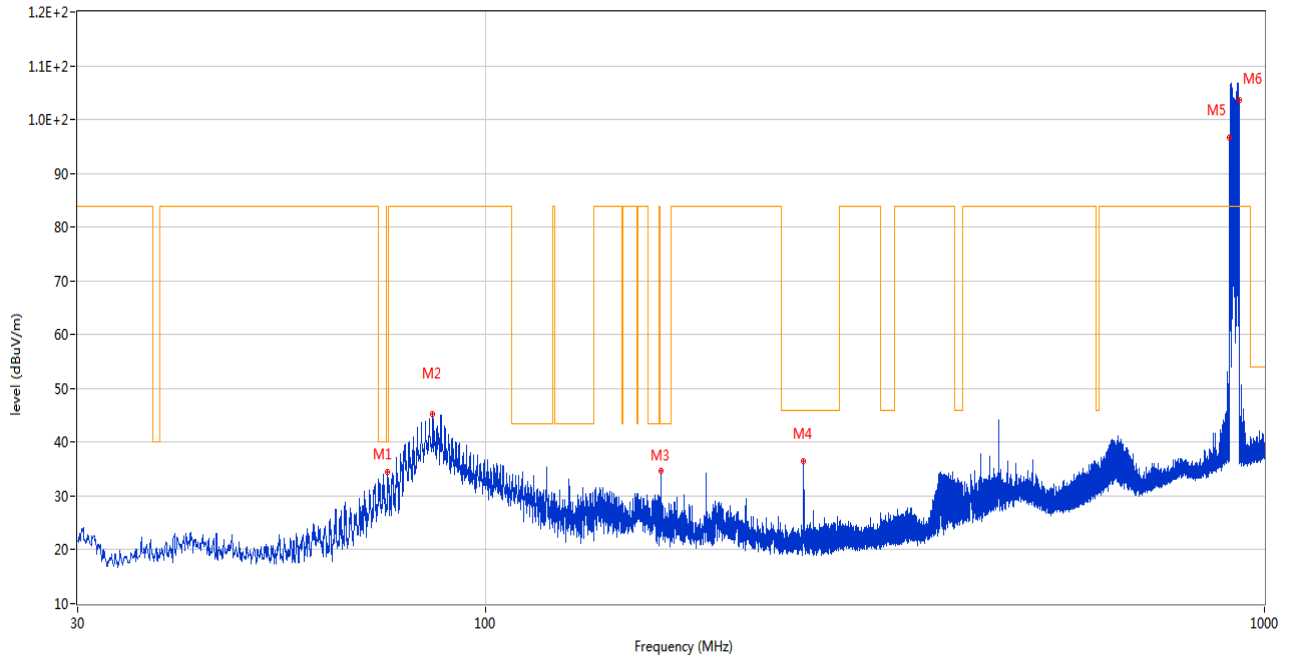

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	75.008	34.48	-29.27	40.0	-5.52	Peak	155.00	200	Horizontal	Pass
2	85.630	45.24	-29.78	83.8	-38.56	Peak	160.00	200	Horizontal	Pass
3	167.982	34.59	-24.78	43.5	-8.91	Peak	268.00	100	Horizontal	Pass
4	256.204	36.39	-25.51	46.0	-9.61	Peak	178.00	200	Horizontal	Pass
5	902.806	96.63	-7.74	83.8	12.83	Peak	172.00	200	Horizontal	N/A
6	927.298	103.61	-7.81	83.8	19.81	Peak	0.00	200	Horizontal	N/A


Hopping Mode, 30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(902-928)_30MHz-1GHz

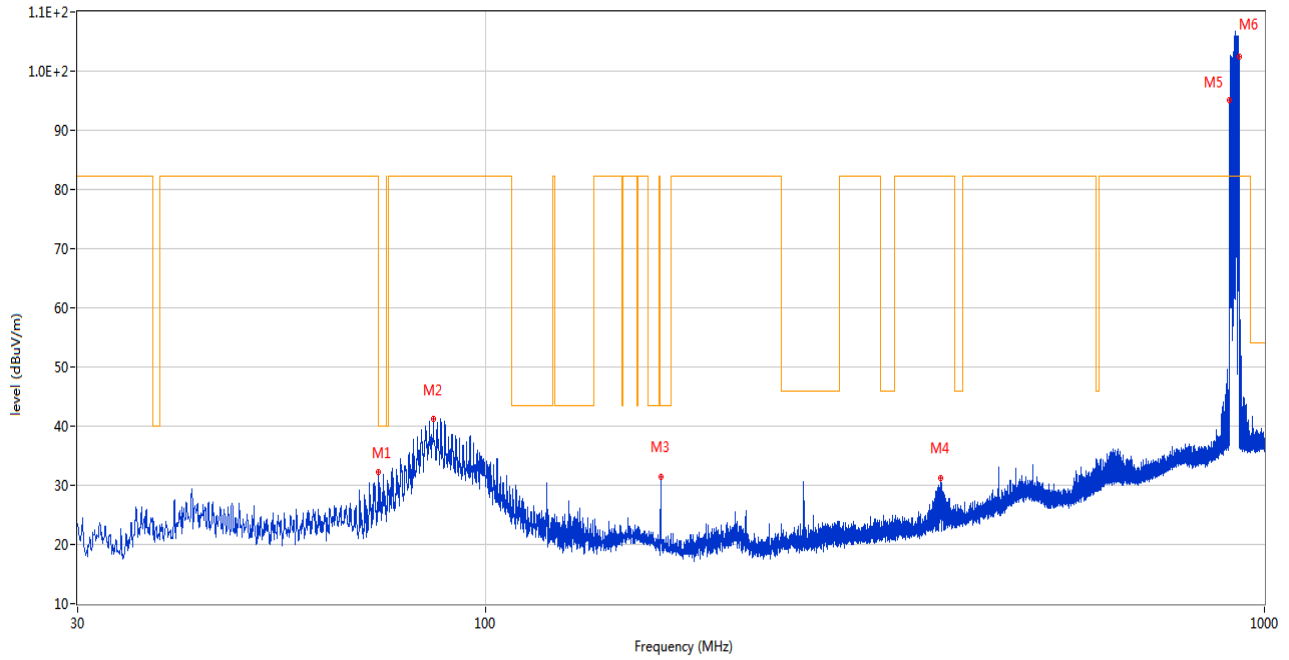


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	72.971	32.34	-29.01	82.3	-49.96	Peak	218.00	100	Vertical	Pass
2	85.824	41.27	-29.77	82.3	-41.03	Peak	246.00	100	Vertical	Pass
3	167.982	31.33	-24.78	43.5	-12.17	Peak	175.00	200	Vertical	Pass
4	384.002	31.32	-21.51	82.3	-50.98	Peak	93.00	100	Vertical	Pass
5	902.806	95.14	-7.74	82.3	12.84	Peak	310.00	100	Vertical	N/A
6	927.298	102.36	-7.81	82.3	20.06	Peak	310.00	100	Vertical	N/A

Low Channel, 850 MHz to 950 MHz, ANT H

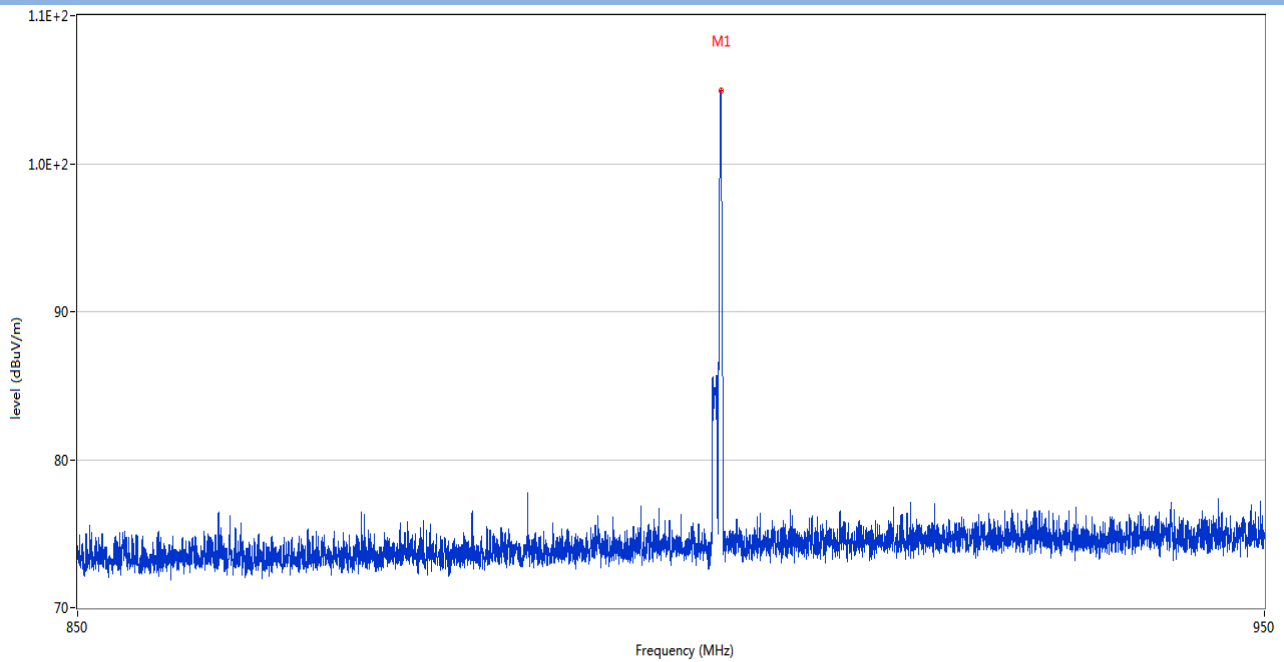


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	902.800	104.94	30.02	--	28.94	Peak	76.00	100	Horizontal	N/A

Low Channel, 850 MHz to 950 MHz, ANT V

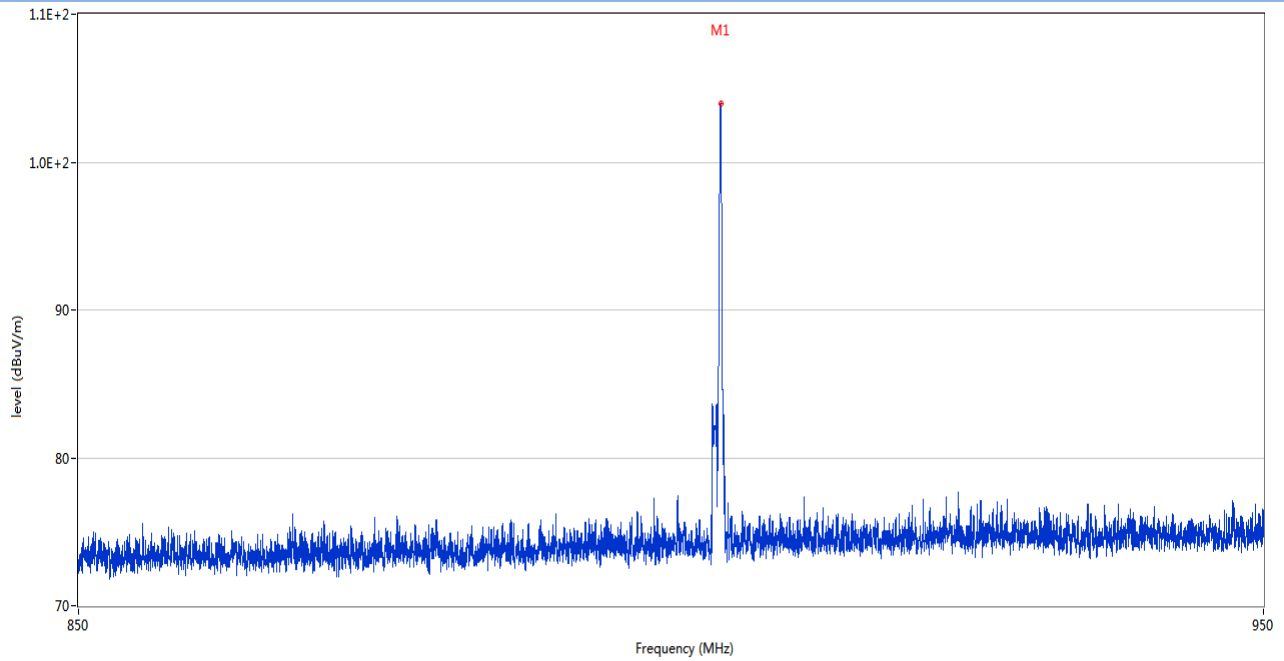


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	902.800	103.94	30.02	--	-256.06	Peak	360.00	100	Vertical	Pass

Middle Channel, 850 MHz to 950 MHz, ANT H

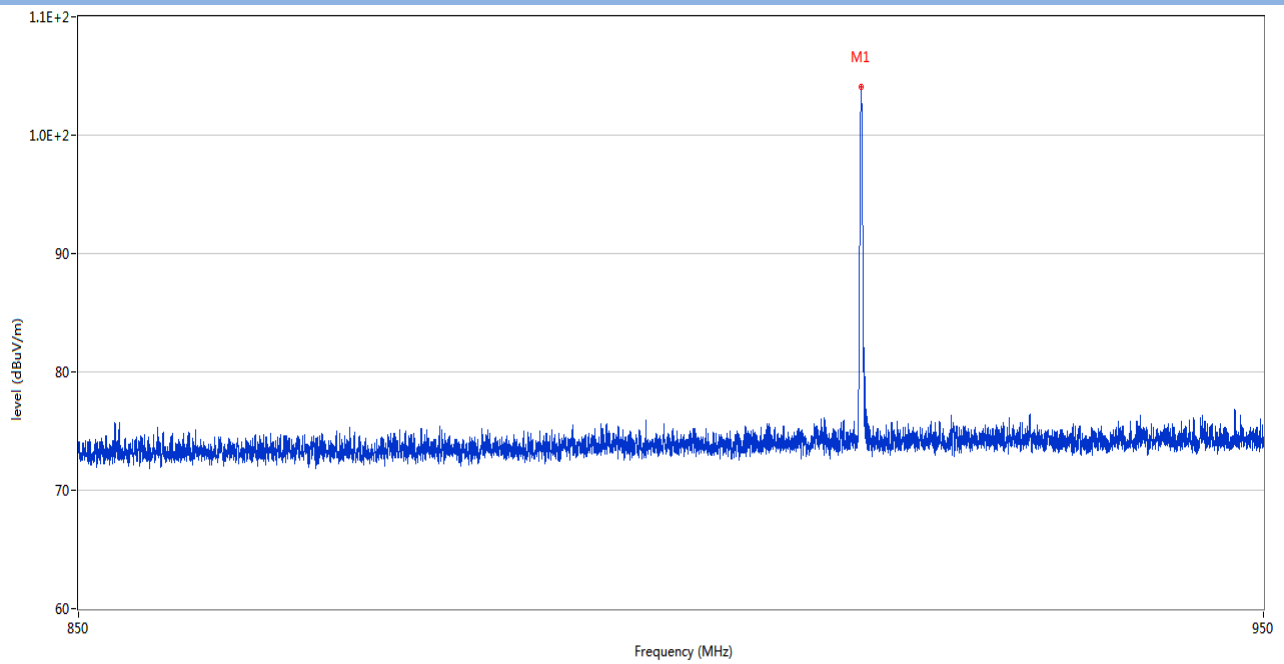


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	914.790	104.08	30.39	--	-84.92	Peak	189.00	100	Horizontal	Pass

Middle Channel, 850 MHz to 950 MHz, ANT V

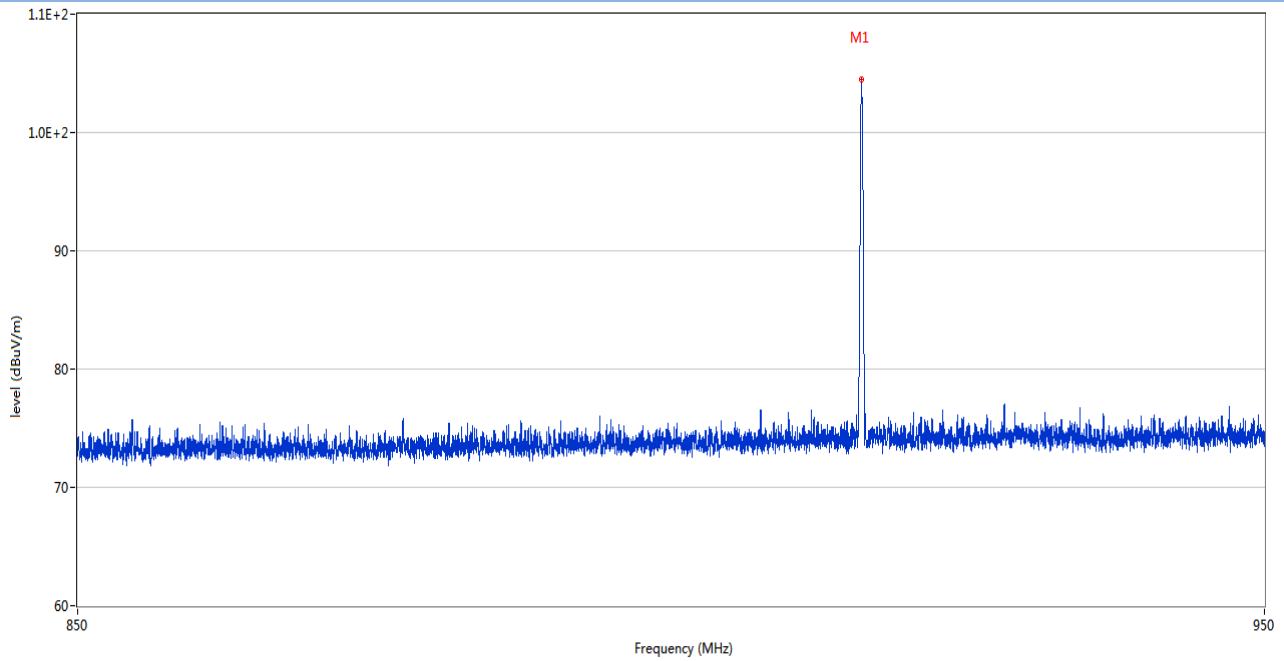


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	914.800	104.44	30.39	--	-78.56	Peak	183.00	100	Vertical	Pass

High Channel, 850 MHz to 950 MHz, ANT H

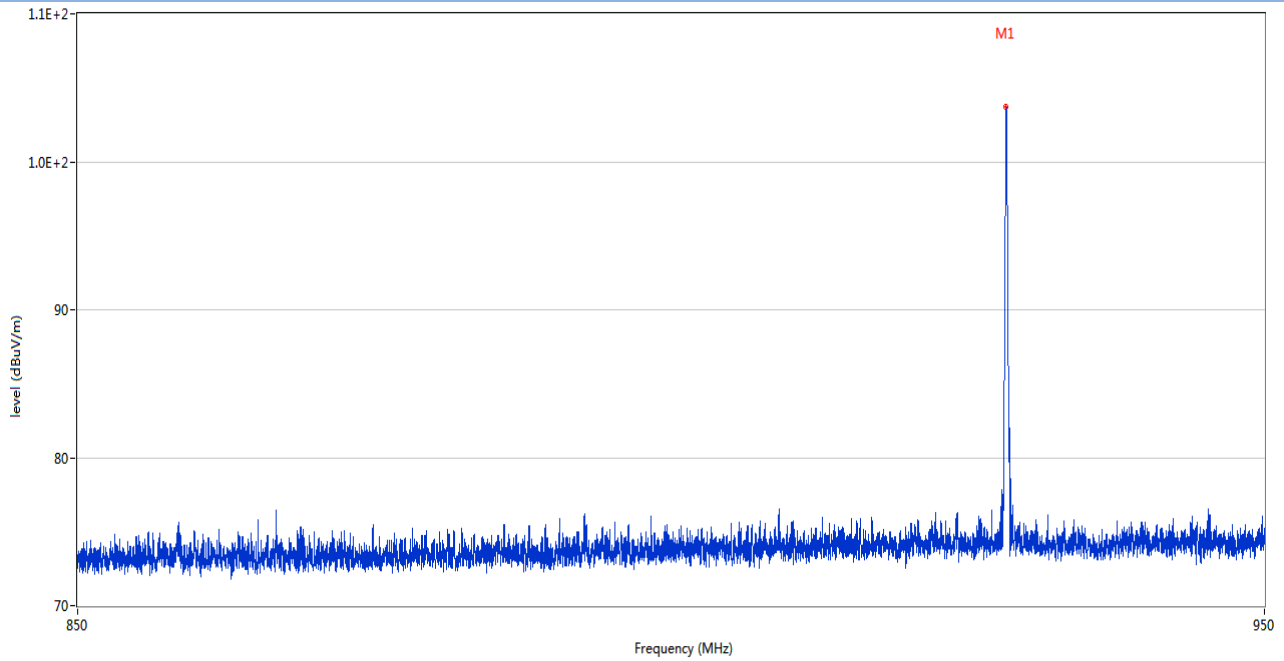


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	927.290	103.67	30.57	--	21.67	Peak	82.00	100	Horizontal	N/A

High Channel, 850 MHz to 950 MHz, ANT V

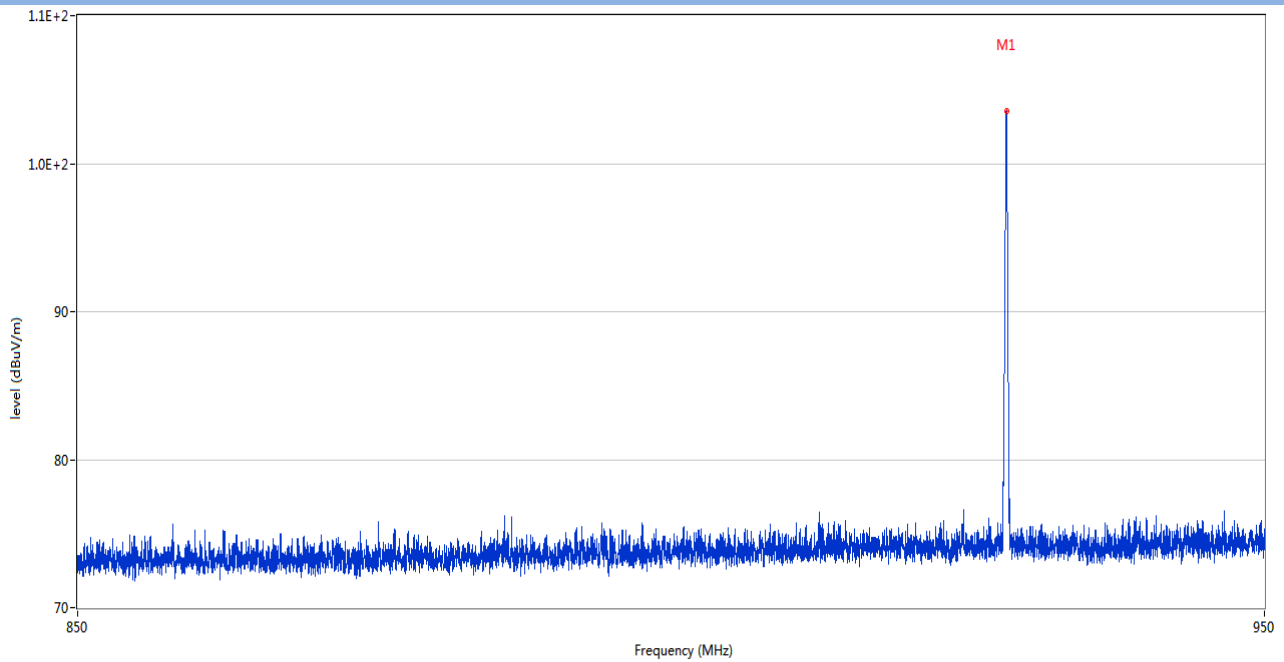


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	927.300	103.56	30.57	--	-146.44	Peak	250.00	100	Vertical	Pass

Hopping Mode, 850 MHz to 950 MHz, ANT H

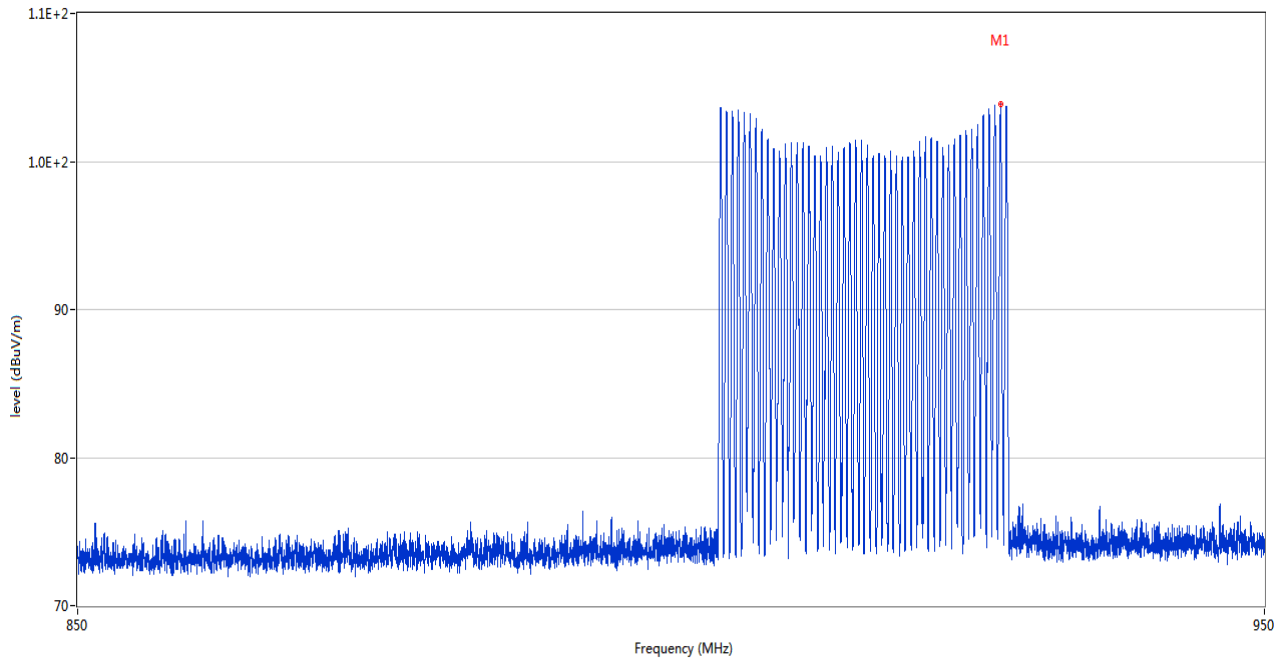

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	926.800	103.84	30.55	--	23.84	Peak	80.00	100	Horizontal	N/A

Hopping Mode, 850 MHz to 950 MHz, ANT V

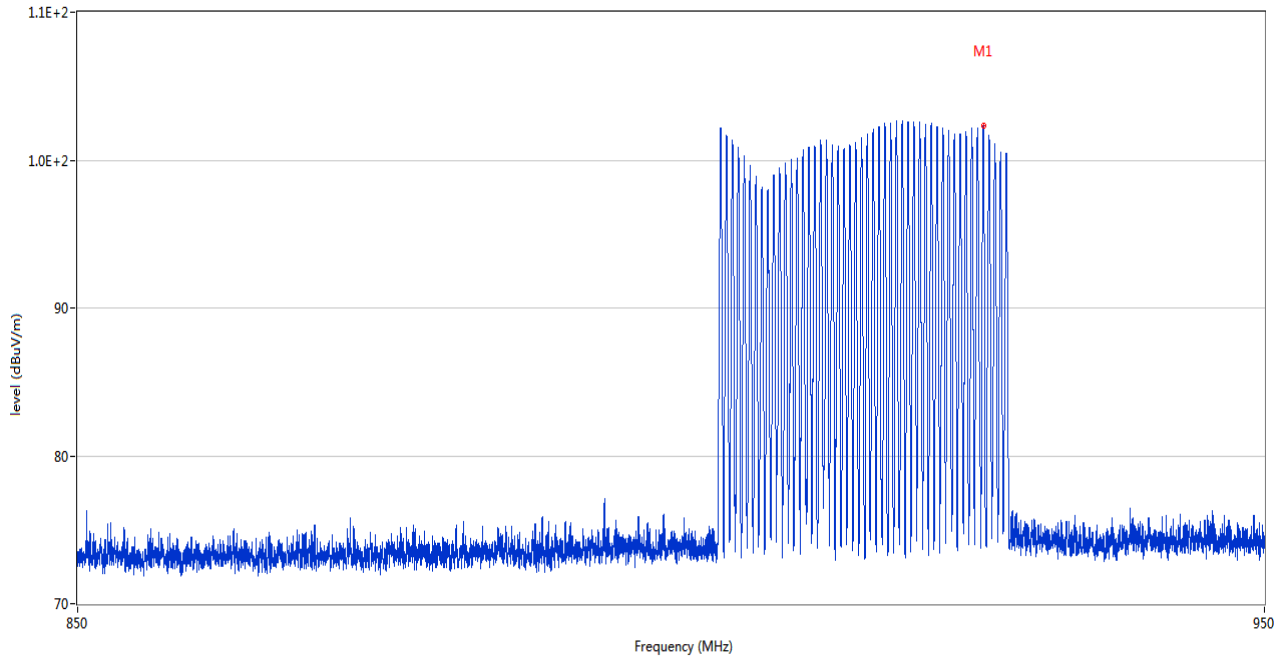

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	925.295	102.29	30.49	--	-0.71	Peak	103.00	100	Vertical	Pass

Low Channel, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1532.500	38.47	-17.47	74.0	-35.53	Peak	168.00	150	Horizontal	Pass
1**	1532.500	29.80	-17.47	54.0	-24.20	AV	168.00	150	Horizontal	Pass
2	2777.300	45.61	-10.49	74.0	-28.39	Peak	80.00	150	Horizontal	Pass
2**	2777.300	35.70	-10.49	54.0	-18.30	AV	80.00	150	Horizontal	Pass
3	4941.200	51.29	-3.11	74.0	-22.71	Peak	230.00	150	Horizontal	Pass
3**	4941.200	41.43	-3.11	54.0	-12.57	AV	230.00	150	Horizontal	Pass
4	6696.200	53.26	-0.51	84.9	-31.64	Peak	20.00	150	Horizontal	Pass
4**	6696.200	43.96	-0.51	84.9	-40.94	AV	20.00	150	Horizontal	Pass
5	8028.550	48.84	-2.72	74.0	-25.16	Peak	330.00	150	Horizontal	Pass
5**	8028.550	40.76	-2.72	54.0	-13.24	AV	330.00	150	Horizontal	Pass
6	9452.951	50.96	-0.79	74.0	-23.04	Peak	211.00	150	Horizontal	Pass
6**	9452.951	43.44	-0.79	54.0	-10.56	AV	211.00	150	Horizontal	Pass

Low Channel, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1879.800	40.39	-16.41	83.9	-43.51	Peak	180.00	150	Vertical	Pass
1**	1879.800	30.34	-16.41	83.9	-53.56	AV	180.00	150	Vertical	Pass
2	2820.800	44.83	-10.42	74.0	-29.17	Peak	189.00	150	Vertical	Pass
2**	2820.800	36.18	-10.42	54.0	-17.82	AV	189.00	150	Vertical	Pass
3	3611.000	48.22	-7.05	74.0	-25.78	Peak	121.00	150	Vertical	Pass
3**	3611.000	45.02	-7.05	54.0	-8.98	AV	121.00	150	Vertical	Pass
4	4689.200	51.00	-3.66	74.0	-23.00	Peak	23.00	150	Vertical	Pass
4**	4689.200	40.10	-3.66	54.0	-13.90	AV	23.00	150	Vertical	Pass
5	6976.200	53.78	0.77	83.9	-30.12	Peak	360.00	150	Vertical	Pass
5**	6976.200	43.39	0.77	83.9	-40.51	AV	360.00	150	Vertical	Pass
6	9451.300	51.68	-0.81	74.0	-22.32	Peak	360.00	150	Vertical	Pass
6**	9451.300	41.76	-0.81	54.0	-12.24	AV	360.00	150	Vertical	Pass

Middle Channel, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1955.600	41.58	-16.03	84.1	-42.52	Peak	184.00	150	Horizontal	Pass
1**	1955.600	32.61	-16.03	84.1	-51.49	AV	184.00	150	Horizontal	Pass
2	2817.100	44.94	-10.51	74.0	-29.06	Peak	213.00	150	Horizontal	Pass
2**	2817.100	35.60	-10.51	54.0	-18.40	AV	213.00	150	Horizontal	Pass
3	4915.400	51.54	-2.37	74.0	-22.46	Peak	256.00	150	Horizontal	Pass
3**	4915.400	41.97	-2.37	54.0	-12.03	AV	256.00	150	Horizontal	Pass
4	6315.600	54.80	-1.51	84.1	-29.30	Peak	108.00	150	Horizontal	Pass
4**	6315.600	50.88	-1.51	84.1	-33.22	AV	108.00	150	Horizontal	Pass
5	7218.700	50.95	-4.26	84.1	-33.15	Peak	81.00	150	Horizontal	Pass
5**	7218.700	49.52	-4.26	84.1	-34.58	AV	81.00	150	Horizontal	Pass
6	9023.500	51.16	-0.60	74.0	-22.84	Peak	125.00	150	Horizontal	Pass
6**	9023.500	49.75	-0.60	54.0	-4.25	AV	125.00	150	Horizontal	Pass

Middle Channel, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1492.300	39.72	-17.43	74.0	-34.28	Peak	217.00	100	Vertical	Pass
1**	1492.300	29.67	-17.43	54.0	-24.33	AV	217.00	100	Vertical	Pass
2	2800.900	44.94	-10.24	74.0	-29.06	Peak	300.00	100	Vertical	Pass
2**	2800.900	35.78	-10.24	54.0	-18.22	AV	300.00	100	Vertical	Pass
3	4047.200	48.69	-4.76	74.0	-25.31	Peak	347.00	100	Vertical	Pass
3**	4047.200	38.83	-4.76	54.0	-15.17	AV	347.00	100	Vertical	Pass
4	6316.400	55.64	-1.53	84.4	-28.76	Peak	117.00	100	Vertical	Pass
4**	6316.400	50.20	-1.53	84.4	-34.20	AV	117.00	100	Vertical	Pass
5	7218.400	51.55	-4.28	84.4	-32.85	Peak	222.00	100	Vertical	Pass
5**	7218.400	49.00	-4.28	84.4	-35.40	AV	222.00	100	Vertical	Pass
6	9022.451	52.60	-0.57	74.0	-21.40	Peak	123.00	100	Vertical	Pass
6**	9022.451	50.50	-0.57	54.0	-3.50	AV	123.00	100	Vertical	Pass

High Channel, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1577.400	38.49	-17.39	74.0	-35.51	Peak	346.00	150	Horizontal	Pass
1**	1577.400	29.58	-17.39	54.0	-24.42	AV	346.00	150	Horizontal	Pass
2	2692.800	45.67	-11.30	74.0	-28.33	Peak	23.00	150	Horizontal	Pass
2**	2692.800	34.81	-11.30	54.0	-19.19	AV	23.00	150	Horizontal	Pass
3	3688.800	47.15	-5.97	74.0	-26.85	Peak	116.00	150	Horizontal	Pass
3**	3688.800	36.89	-5.97	54.0	-17.11	AV	116.00	150	Horizontal	Pass
4	4803.000	50.97	-2.66	74.0	-23.03	Peak	329.00	150	Horizontal	Pass
4**	4803.000	41.93	-2.66	54.0	-12.07	AV	329.00	150	Horizontal	Pass
5	6276.200	53.70	-0.24	83.7	-30.00	Peak	316.00	150	Horizontal	Pass
5**	6276.200	44.09	-0.24	83.7	-39.61	AV	316.00	150	Horizontal	Pass
6	9455.050	51.09	-0.76	74.0	-22.91	Peak	151.00	150	Horizontal	Pass
6**	9455.050	41.56	-0.76	54.0	-12.44	AV	151.00	150	Horizontal	Pass

High Channel, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1986.000	40.47	-15.40	83.6	-43.13	Peak	210.00	150	Vertical	Pass
1**	1986.000	31.71	-15.40	83.6	-51.89	AV	210.00	150	Vertical	Pass
2	2841.300	45.20	-10.14	74.0	-28.80	Peak	360.00	150	Vertical	Pass
2**	2841.300	36.03	-10.14	54.0	-17.97	AV	360.00	150	Vertical	Pass
3	4800.400	51.58	-2.56	74.0	-22.42	Peak	125.00	150	Vertical	Pass
3**	4800.400	42.17	-2.56	54.0	-11.83	AV	125.00	150	Vertical	Pass
4	6688.800	53.40	-0.25	83.6	-30.20	Peak	360.00	150	Vertical	Pass
4**	6688.800	44.41	-0.25	83.6	-39.19	AV	360.00	150	Vertical	Pass
5	8345.200	48.20	-2.67	74.0	-25.80	Peak	199.00	150	Vertical	Pass
5**	8345.200	40.80	-2.67	54.0	-13.20	AV	199.00	150	Vertical	Pass
6	9464.500	51.19	-0.67	74.0	-22.81	Peak	125.00	150	Vertical	Pass
6**	9464.500	42.02	-0.67	54.0	-11.98	AV	125.00	150	Vertical	Pass

Hopping Mode, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1978.100	40.32	-15.25	83.8	-43.48	Peak	61.00	150	Horizontal	Pass
1**	1978.100	31.20	-15.25	83.8	-52.60	AV	61.00	150	Horizontal	Pass
2	2781.800	44.56	-10.52	74.0	-29.44	Peak	0.00	150	Horizontal	Pass
2**	2781.800	34.94	-10.52	54.0	-19.06	AV	0.00	150	Horizontal	Pass
3	3623.200	46.97	-7.30	74.0	-27.03	Peak	40.00	150	Horizontal	Pass
3**	3623.200	42.10	-7.30	54.0	-11.90	AV	40.00	150	Horizontal	Pass
4	4529.200	50.56	-4.15	74.0	-23.44	Peak	40.00	150	Horizontal	Pass
4**	4529.200	40.93	-4.15	54.0	-13.07	AV	40.00	150	Horizontal	Pass
5	6695.600	53.58	-0.48	83.8	-30.22	Peak	326.00	150	Horizontal	Pass
5**	6695.600	44.18	-0.48	83.8	-39.62	AV	326.00	150	Horizontal	Pass
6	9626.050	50.84	0.05	83.8	-32.96	Peak	314.00	150	Horizontal	Pass
6**	9626.050	41.68	0.05	83.8	-42.12	AV	314.00	150	Horizontal	Pass

Hopping Mode, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1003.200	43.24	-17.89	74.0	-30.76	Peak	277.00	150	Vertical	Pass
1**	1003.200	31.55	-17.89	54.0	-22.45	AV	277.00	150	Vertical	Pass
2	2753.200	45.13	-10.86	74.0	-28.87	Peak	268.00	150	Vertical	Pass
2**	2753.200	35.10	-10.86	54.0	-18.90	AV	268.00	150	Vertical	Pass
3	3623.200	49.56	-7.30	74.0	-24.44	Peak	294.00	150	Vertical	Pass
3**	3623.200	45.42	-7.30	54.0	-8.58	AV	294.00	150	Vertical	Pass
4	4886.000	50.79	-3.34	74.0	-23.21	Peak	197.00	150	Vertical	Pass
4**	4886.000	41.19	-3.34	54.0	-12.81	AV	197.00	150	Vertical	Pass
5	6337.200	53.38	-1.25	82.3	-28.92	Peak	168.00	150	Vertical	Pass
5**	6337.200	47.65	-1.25	82.3	-34.65	AV	168.00	150	Vertical	Pass
6	8321.950	48.98	-2.09	74.0	-25.02	Peak	206.00	150	Vertical	Pass
6**	8321.950	38.93	-2.09	54.0	-15.07	AV	206.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note⁴: The Level (dBuV/m) has been corrected by factor.

Test Data


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
RFID	Low	614	42.56	3.16	74	31.445	PEAK	Pass
		614	N/A	N/A	54	N/A	AVERAGE	Pass
RFID	HIGH	960	46.90	28.00	74	27.105	PEAK	Pass
		960	N/A	N/A	54	N/A	AVERAGE	Pass
RFID(Hopping)	Low	614	42.49	3.16	74	31.508	PEAK	Pass
		614	N/A	N/A	54	N/A	AVERAGE	Pass
RFID(Hopping)	HIGH	960	47.37	28.00	74	26.631	PEAK	Pass
		960	N/A	N/A	54	N/A	AVERAGE	Pass

Test Plots


LOW CHANNEL

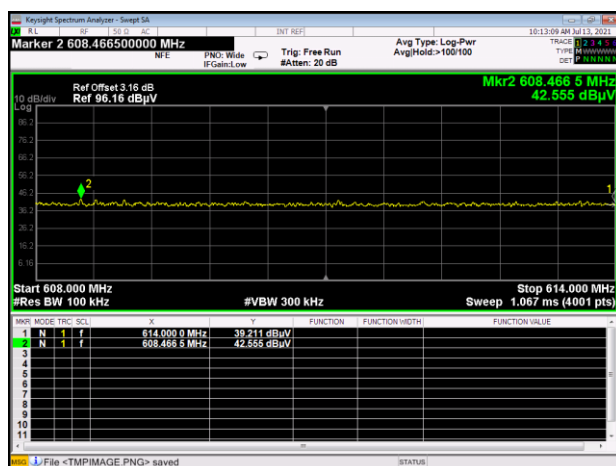

HIGH CHANNEL

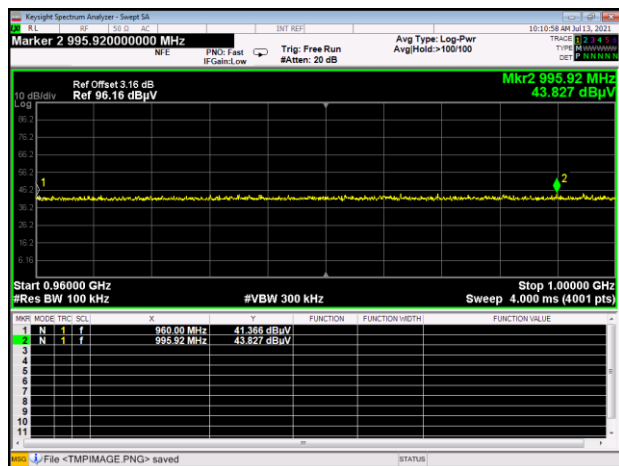


HIGH CHANNEL

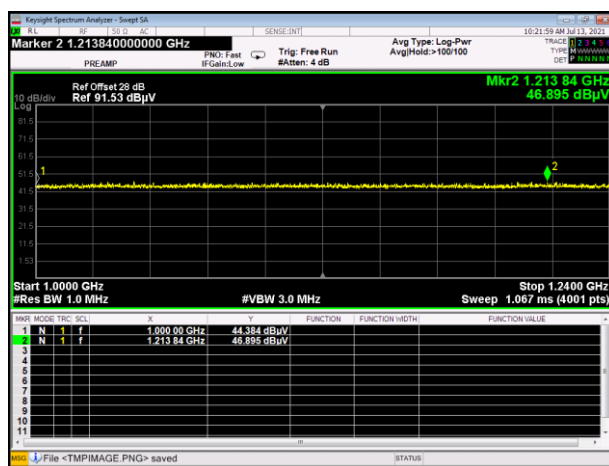


Hopping Mode:


LOW CHANNEL

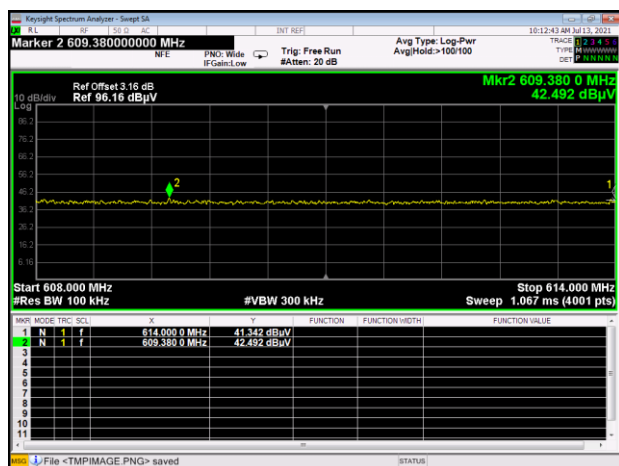

HIGH CHANNEL

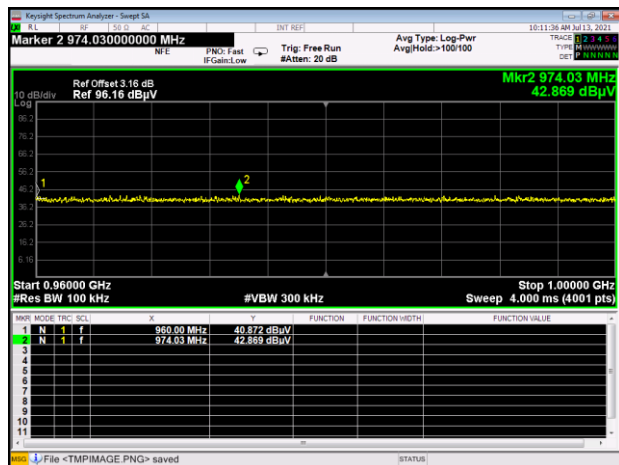

HIGH CHANNEL

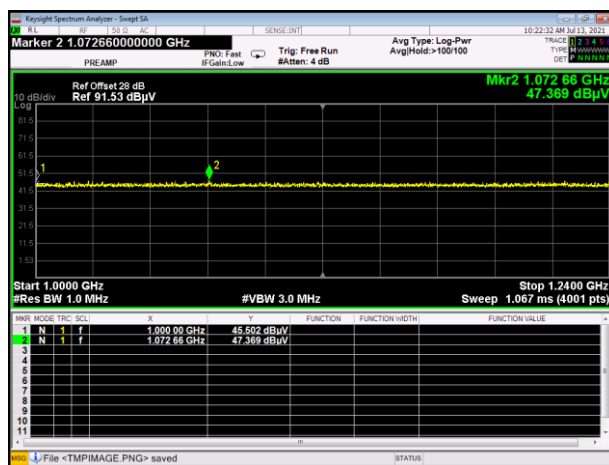

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2160937-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2160937-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2160937-AI.PDF”.

--END OF REPORT--