

Produkte Products

Seite 1 von 15 Prüfbericht - Nr.: 14045648 001 Page 1 of 15 Test Report No.: Auftraggeber: **Megabyte Limited** Client: Unit 507, Building 12W, No. 12 Science Park West Avenue Hong Kong Science Park, Shatin, N.T., Hong Kong Gegenstand der Prüfung: **UHF Portable RFID Reader** Test Item: Bezeichnung: T8-01-MB Serien-Nr.: Engineering sample Identification: T8-01-39, T8-01-PH Serial No.: Wareneingangs-Nr.: A000386196-002 Eingangsdatum: 30.06.2016 Receipt No.: Date of Receipt: Prüfort: TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Testing Location: Hona Kona **Hong Kong Productivity Council** HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong Zustand des Prüfgegenstandes bei Anlieferung: Test samples are not damaged and suitable Condition of test item at delivery: for testina. Prüfarundlage: FCC Part 15 Subpart C Test Specification: ANSI C63.10-2013 Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben Prüfergebnis: genannter Prüfgrundlage. Test Results: The above mentioned product was tested and **passed**. Prüflaboratorium: TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Testing Laboratory: Hong Kong geprüft/ tested by: kontrolliert/ reviewed by: Benny Lau Sharon Li 23.12.2016 Senior Project Manager 23.12.2016 Department Manager Datum Name/Stellung Datum Unterschrift Name/Stellung Unterschrift Date Name/Position Name/Position Signature Date Signature FCC ID: XEK-MTRAYT8 Sonstiges: Other Aspects This device is a composite device. This report contains the test result of the NFC transmitter portion. Abkürzungen: P(ass) entspricht Prüfgrundlage Abbreviations: P(ass) passed F(ail) entspricht nicht Prüfgrundlage F(ail) failed N/A nicht anwendbar not applicable

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

N/T

nicht getestet



Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents	4
Independent Operation Modes	4
Related Submittal(s) Grants	5
Remark	5
Test Set-up and Operation Mode	6
Principle of Configuration Selection	6
Test Operation and Test Software	6
Special Accessories and Auxiliary Equipment	6
Countermeasures to achieve EMC Compliance	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation	7
Test Setup Diagram	8
List of Test and Measurement Instruments	10
Measurement Uncertainty	11
Results FCC Part 15 – Subpart C	12
FCC 15.203 – Antenna Requirement 1	12
FCC 15.204 – Antenna Requirement 2	12
FCC 15.207 – Conducted Emission on AC Mains	12
FCC 15.215 (c) – 20 dB Bandwidth	13
FCC 15.225 (a)(b)(c) – Radiated Emission	13
FCC 15.225 (d) – Radiated Emissions	14
FCC 15.225 (e) – Frequency Tolerance	15

Date: 23.12.2016





Appendix 1 – Test protocols	4 pages
Appendix 2 – Test setup	2 pages
Appendix 3 – EUT External Photos	4 pages
Appendix 4 – EUT Internal Photos	14 pages
Appendix 5 – RF exposure information	2 pages



Product information

Manufacturers declarations

	Transmitter
Operating frequency range	13.56 MHz
Type of modulation	ASK
Number of channels	1
Channel separation	N/A
Type of antenna	Integral Antenna
Antenna gain (dBi)	N/A
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	Yes
Nominal voltage	100-240VAC/ 3.7VDC
Independent Operation Modes	Transmitting

Product function and intended use

The equipment under test (EUT) is a mobile RFID reader. It is a compact NFC and UHF RFID reader with Bluetooth and WIFI connectivity.

The manufacturer declared that the model: T8-01-39 and T8-01-PH are identical to the model T8-01-MB except the logo plate.

FCC ID: XEK-MTRAYT8

Models	Product description
T8-01-MB	UHF Portable RFID Reader
T8-01-39, T8-01-PH	OHF FUITABLE NEID NEAUEL

Submitted documents

Circuit Diagram Block Diagram Technical Description User manual Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Test Report No.: 14045648 001 Date: 23.12.2016 Page 4 of 15



Related Submittal(s) Grants

This device is a composite device. This is a single application for certification of the NFC transmitter. The RFID portion is authorized under the certification procedure (refer to test report 14045645 001 issued by TÜV Rheinland HK Ltd on 23.12.2016).

The Bluetooth portion is authorized under the certification procedure (refer to test report 14045646 001 and 14045647 001 and 14047147 001 issued by TÜV Rheinland HK Ltd on 23.12.2016).

The WIFI portion is authorized under the certification procedure (refer to test report 14045649 001 and 14047148 001 and 14047149 001 issued by TÜV Rheinland HK Ltd on 23.12.2016).

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Report No.: 14045648 001 Date: 23.12.2016 Page 5 of 15



Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation

level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the applicant was used to control the operating channel as well as the maximum output power level. The maximum RF output power and the operating frequencies was selected according to the instruction given by the manufacturer. The setting of the maximum RF output power and the operating frequency range expected by the customer shall be fixed on the firmware of the final end product.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- AC-DC adaptor Model: EA1024AR-050 Input: 100-240 VAC 50/60 Hz; Output: 5.0VDC 2A) (Provided by the applicant)

Countermeasures to achieve EMC Compliance

- Nil

Test Report No.: 14045648 001 Date: 23.12.2016 Page 6 of 15



Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

FS = R + AF + CF + FA - PA

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.


FA and PA are only be used for the measuring frequency above 1 GHz.

Test Report No.: 14045648 001 Date: 23.12.2016 Page 7 of 15




Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

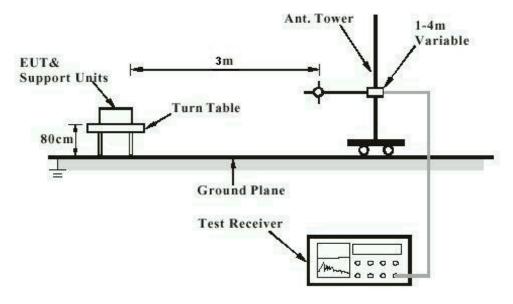

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

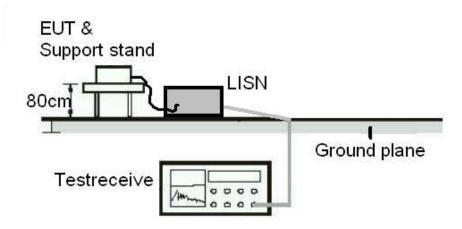

Test Report No.: 14045648 001 Date: 23.12.2016 Page 8 of 15



Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

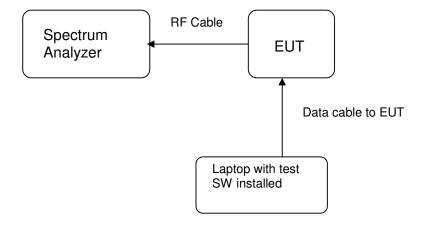

Test Report No.: 14045648 001 Date: 23.12.2016 Page 9 of 15



List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC Registration number: 90656)

Radiated Emission

Equipment	Manufacturer	Туре	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	25-Apr-16	25-Apr-17
New Fully Ancheonic				
Chamber	TDK	N/A	19-Apr-16	19-Apr-17
Cable	Hubersuhner	SUCOFLEX 104	31-Mar-16	31-Mar-18
Test Receiver	R&S	ESU26	7-Dec-15	7-Dec-16
Bi-conical Antenna	R&S	HK116	1-Sep-15	1-Sep-17
Log Periodic Antenna	R&S	HL223	1-Sep-15	1-Sep-17
Coaxial cable	Harbour	LL335	10-Jun-16	10-Jun-18
Microwave amplifer 0.5- 26.5GHz, 25dB gain	HP	83017A	18-Jul-16	18-Jul-18
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17
Horn Antenna	EMCO	3115	26-Aug-15	26-Aug-17
Active Loop Antenna	EMCO	6502	27-Oct-16	27-Oct-17

AC Mains Conducted Emission

Equipment	Manufacturer	Туре	Cal. Date	Due Date
Test Receiver	R&S	ESU40	26-Jul-16	26-Jul-17
RF Voltage Probe	Schwarzbeck	TK9416	11-Feb-16	11-Feb-17
LISN	R&S	ESH3-Z5	15-Jun-16	15-Jun-17
Double Shield Cable	Radiall	RG142	14-Sep-15	14-Sep-17
Pulse Limiter	R&S	ESH3-Z2	3-Jun-16	3-Jun-18

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Туре	Cal. Date	Due Date
Spectrum Analyzer	R&S	FSP30	12-Jan-15	12-Jan-2017
Temperature Chamber	Binder	MK 240	9020-0028	N/A

Test Report No.: 14045648 001 Date: 23.12.2016 Page 10 of 15



Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is ± 3.43 dB.

The estimated combined standard uncertainty for radiated emissions measurements is ± 5.10 dB (30MHz to 200MHz) and ± 5.08 dB (200MHz to 1000MHz) and is ± 5.10 dB (30MHz to 200MHz) and ± 5.08 dB (above 1GHz).

The estimated combined standard uncertainty for antenna conducted emission is ±1.56dB

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for the level of confidence is approximately 95%.

Test Report No.: 14045648 001 Date: 23.12.2016 Page 11 of 15



Results FCC Part 15 - Subpart C

FCC 15.203 - Antenna Requirement 1

Pass

FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the

device

Results: a) Antenna type:

Fixed Integral antenna

b) Manufacturer and model no:

N/A

c) Peak Gain:

N/A

Verdict: Pass

FCC 15.204 – Antenna Requirement 2

N/A

FCC Requirement: An intentional radiator may be operated only with the antenna with which it is

authorized. If an antenna is marketed with the intentional radiator, it shall be of a type

which is authorized with the intentional radiator.

Results: Only one integral antenna can be used.

Verdict: N/A

FCC 15.207 - Conducted Emission on AC Mains

Pass

Test Specification: ANSI C63.10 - 2013

Mode of operation: TX mode

Port of testing : AC Mains input port of power supply

Supply voltage : 120Vac 60Hz

Temperature : 23°C Humidity : 50%

Requirement: 15.207(a)

Results: Pass

Live measurement

Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBμV	Average dBμV	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 - 0,5	0.174	43.9	26.2	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found			56	46	Pass
> 5 - 30	13.559	50.1	46.1	60	50	Pass

Neutral measurement

Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBμV	Average dBμV	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 - 0,5	0.166	45.6	29.3	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found			56	46	Pass
> 5 - 30	13.562	51.6	48.0	60	50	Pass

Test Report No.: 14045648 001 Date: 23.12.2016 Page 12 of 15



Results: Pre-scan has been conducted to determine the worst-case mode from all possible

combinations between available modulations and data rate.

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits.

For test Results plots refer to Appendix 1.

FCC 15.215 (c) - 20 dB Bandwidth

Pass

Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the

emission, is contained within the frequency band designated in the rule section under

which the equipment is operated.

Test Specification: ANSI C63.10-2013

Mode of operation: TX Mode Supply voltage: 120VAC Temperature: 23°C Humidity: 50%

Results: For test protocols refer to Appendix 1.

Frequency	20 dB left	Limit	20 dB right	Limit
(MHz)	(MHz)	(MHz)	(MHz)	(MHz)
13.560	13.548	> 13.110	13.572	

FCC 15.225 (a)(b)(c) - Radiated Emission

Pass

Test Specification: ANSI C63.10 - 2013

Mode of operation: Tx mode
Port of testing: Enclosure
Supply voltage: 120VAC
Temperature: 23°C
Humidity: 50%

Requirement:

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not

exceed 15,848 microvolts/meter at 30 meters (124 dBuV /m at 3 meters with

extrapolation factor of 40 dB/decade).

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters (90.5 dBuV /m at 3

meters with extrapolation factor of 40 dB/decade).

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters (80.5 dBuV /m at 3 $^{\circ}$

meters with extrapolation factor of 40 dB/decade).

Results: For test protocols refer to Appendix 1.

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
13.560	55.70	124.0 / PK
No peak found		90.5 / PK
No peak found		80.5 / PK

Test Report No.: 14045648 001 Date: 23.12.2016 Page 13 of 15



FCC 15.225 (d) – Radiated Emissions Pass						
Mode of operation Port of testing Frequency range	Temperature : 23°C					
Requirement:		th of any emissions appearing outsid the general radiated emission limits				
Results:	Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Simultaneous transmission was investigated and no new emissions were found. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.					
	Vertical Polarization					
Fre MH 99.8	iz	Level dBuV/m	Limit/ Detector dBuV/m			
488.1		31.9 43.5 / QP 36.5 46.0 / QP				
Horizontal Polarization						
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m			
99.8	03	36.7	43.5 / QP			
488.173		44.9	46.0 / QP			

Test Report No.: 14045648 001 Date: 23.12.2016 Page 14 of 15



FCC 15.225 (e) - Frequency Tolerance

Pass

Test Specification: ANSI C63.10-2013

Mode of operation: Tx mode
Port of testing: Antenna port

Requirement: The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the

operating frequency over a temperature variation of -20 degrees to +50 degrees C in 10 degrees C steps at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage or battery end point at a

temperature of 20 degrees C. For battery operated equipment, the equipment tests shall

be performed using a new battery.

Results: Pass

Frequency stability with respect to ambient tempeature

Temp.	Supply Voltage	Frequency	Frequency error	Limit	Verdict
(°C)	(VDC)	(MHz)	(%)	(%)	
50	3.7	13.559890	-0.00029	+/- 0.01	Pass
40	3.7	13.559900	-0.00022	+/- 0.01	Pass
30	3.7	13.559910	-0.00015	+/- 0.01	Pass
20	3.7	13.559930	0.00000	+/- 0.01	Reference
10	3.7	13.559940	0.00007	+/- 0.01	Pass
0	3.7	13.559950	0.00015	+/- 0.01	Pass
-10	3.7	13.559920	-0.00007	+/- 0.01	Pass
-20	3.7	13.559880	-0.00037	+/- 0.01	Pass

Frequency stability when varying supply voltage

Temp. (°C)	Supply Voltage (VDC)	Frequency (MHz)	Frequency error (%)	Limit (%)	Verdict
20	102	13.559930	0	+/- 0.01	Pass
20	120	13.559930	0	+/- 0.01	Reference
20	138	13.559930	0	+/- 0.01	Pass

Test Report No.: 14045648 001 Date: 23.12.2016 Page 15 of 15