

# FCC/ISED RF Test Report As per

## RSS-247 Issue 2

### FCC Part 15.247 Subpart C & ICES 003 Issue 6 on the

#### ZX Wired Thermostat

IC:8410A-ZXWU; FCCID: XEY-ZX-WU

Product Service

Choose certainty.  
Add value.



RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Test Specialist	Abderrahmane Ferhat	12-09-2019	
Authorised Signatory	Scott Drysdale	12-09-2019	

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

#### EXECUTIVE SUMMARY

A sample of this product was tested and found to be in compliance with FCC Part 15.247 Subpart C/ ICES 003 Issue 6 and RSS-247 Issue 2.

 A2LA Cert. No. 2955.20	<b>DISCLAIMER AND COPYRIGHT</b> This non-binding report has been prepared by TÜV SÜD Canada with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Canada. No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.
	<b>ACCREDITATION</b> Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.



## Contents

<b>1</b>	<b>Report Summary</b>	<b>7</b>
<b>2</b>	<b>Introduction</b>	<b>10</b>
<b>3</b>	<b>EUT: ZX WIRED THERMOSTAT</b>	<b>15</b>
3.1	Specifications:	15
3.2	Modes of Operation	18
3.3	Setup Diagram	18
<b>4</b>	<b>Deviations from the Standard</b>	<b>19</b>
<b>5</b>	<b>Measurement Uncertainty</b>	<b>19</b>
<b>6</b>	<b>99% Bandwidth</b>	<b>20</b>
6.1	Purpose & Methods	20
6.2	Test Specifications	20
6.3	Test Results	21
6.4	Graphs	22
6.5	Test Instruments	27
<b>7</b>	<b>6dB Bandwidth of Digitally Modulated Systems</b>	<b>28</b>
7.1	Purpose & Methods	28
7.2	Test Specifications	28
7.3	Test Results	29
7.4	Graphs	30
7.5	Test Instruments	33
<b>8</b>	<b>Hopping Channel</b>	<b>34</b>
8.1	Purpose & Methods	34
8.2	Test Specifications	34
8.3	Limits	35
8.4	Test Results	35
8.5	Graphs	36
8.6	Test Instruments	39
<b>9</b>	<b>Channel Separation</b>	<b>40</b>
9.1	Purpose & Methods	40
9.2	Test Specifications	40
9.3	Limits	41
9.4	Test Results	41
9.5	Graphs	42
9.6	Test Instruments	43
<b>10</b>	<b>Time of Occupancy</b>	<b>44</b>
10.1	Purpose & Methods	44
10.2	Test Specifications	44
10.3	Limits	45
10.4	Test Results	45
10.5	Graphs	46
10.6	Test Instruments	47

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 2 of 100



<b>11</b>	<b>Maximum Peak Envelope Conducted Power – Digital Modulated .....</b>	<b>48</b>
11.1	Purpose & Methods.....	48
11.2	Test Specifications .....	49
11.3	Limits .....	50
11.4	Tests Results.....	50
11.5	Graphs.....	51
11.6	Test Instruments.....	58
<b>12</b>	<b>Power Spectral Density .....</b>	<b>59</b>
12.1	Purpose & Methods.....	59
12.2	Test Specifications .....	59
12.3	Limits .....	60
12.4	Test Results .....	60
12.5	Graphs.....	61
12.6	Test Instruments.....	64
<b>13</b>	<b>Band Edge Spurious Emission (-20 dBc Requirement) .....</b>	<b>65</b>
13.1	Purpose & Methods.....	65
13.2	Test Specifications .....	65
13.3	Limits .....	66
13.4	Test Setup .....	66
13.5	Test Results .....	66
13.6	Graphs.....	67
13.7	Test Instruments.....	80
<b>14</b>	<b>Tx Spurious Radiated Emissions .....</b>	<b>81</b>
14.1	Purpose & Methods.....	81
14.2	Test Specifications .....	82
14.3	Limits .....	83
14.4	Results .....	83
14.5	Graphs.....	85
14.6	Test Instruments.....	96

## TABLE OF APPENDICES

<b>APPENDIX A</b>	<b>Tx Spurious Emissions – Worst Cases .....</b>	<b>97</b>
-------------------	--	-----------



## LIST OF TABLES

Table 1 – Modification Records .....	7
Table 2 – Test Summary Table .....	12
Table 3 – EUT – ZX WIRED THERMOSTAT – Specifications for 2.4GHz .....	15
Table 4 – EUT – ZX WIRED THERMOSTAT – Specifications for 900 MHz .....	15
Table 5 List of Channels for ZX Wired Thermostat 2.4 GHz .....	16
Table 6 List of Channels for ZX Wired Thermostat 900 MHz .....	17
Table 7 Acceptable Uncertainties .....	19
Table 8 – 99% Bandwidth Results .....	21
Table 9 – 99% Bandwidth Results .....	21
Table 10: 99%BW Test Equipment .....	27
Table 11 – 6dB Bandwidth Results .....	29
Table 12: 6 dB OBW Test Equipment .....	33
Table 13 – Hopping Channel Results .....	35
Table 14: Hopping Channel Test Equipment .....	39
Table 15 – Channel Separation Results .....	41
Table 16: Channel Separation Test Equipment .....	43
Table 17 – Time Occupancy Results .....	45
Table 18: Time of Occupancy Test Equipment .....	47
Table 19 – Test Results Peak-Power Measurements ZX Wired Thermostat (2.4GHz) .....	50
Table 20 – Test Results Peak-Power Measurements ZX Wired Thermostat (900MHz) .....	51
Table 21: Conducted Peak Power Test Equipment .....	58
Table 22- Results – PKPSD .....	60
Table 23 – Test Instrumentation – PKPS .....	64
Table 24- Results Band Edge – 2.4GHz Band .....	66
Table 25- Results – Band Edge – 900GHz Band .....	67
Table 26 – Test Instrumentation – Band Edge .....	80
Table 27 Limits – Tx Spurious .....	81
Table 28 – Test Results for Tx Spurious Emission – Worst Cases(2.4GHz) .....	83
Table 29 – Test Results for Tx Spurious Emission – Worst Cases(900MHz) .....	84
Table 30 – Test Instrumentation – Tx Spurious Emission .....	96

## LIST OF FIGURES

Figure 1: EUT Setup Diagram – ZX WIRED THERMOSTAT – Spurious emissions .....	18
--	----



## LIST OF GRAPHS

Graph 1 Test Results – 99% Bandwidth Results – Lower Channel (#0) ZX Wired Thermostat(2.4GHz) .....	22
Graph 2 Test Results – 99% Bandwidth Results – Middle Channel (#19) ZX Wired Thermostat(2.4GHz).....	23
Graph 3 Test Results – 99% Bandwidth Results – Highest Channel (#39) ZX Wired Thermostat(2.4GHz) .....	24
Graph 4 Test Results – 99% Bandwidth Results – Low Channel ZX Wired Thermostat (900MHz) .....	25
Graph 5 Test Results – 99% Bandwidth Results – Mid Channel ZX Wired Thermostat (900MHz).....	26
Graph 6 Test Results – 99% Bandwidth Results – High Channel ZX Wired Thermostat(900MHz) .....	27
Graph 7 Test Results – 6dB Bandwidth Results – Low Channel ZX Wired Thermostat(2.4GHz) .....	30
Graph 8 Test Results – 6dB Bandwidth Results – Mid Channel ZX Wired Thermostat(2.4GHz) .....	31
Graph 9 Test Results – 6dB Bandwidth Results – High Channel ZX Wired Thermostat(2.4GHz) .....	32
Graph 10: Hopping Channel – ZX Wired Thermostat (900MHz) – 902MHz – 912.1MHz .....	36
Graph 11: Hopping Channel – ZX Wired Thermostat (900MHz) – 912.1MHz – 920.1MHz .....	37
Graph 12: Hopping Channel – ZX Wired Thermostat (900MHz) – 920.1MHz – 928MHz .....	38
Graph 13: Channel Separation – ZX Wired Thermostat (900MHz) .....	42
Graph 14: Time of Occupancy – ZX Wired Thermostat (900MHz) .....	46
Graph 15 Test Results – Conducted Peak Power Measurements – Low Channel .....	52
Graph 16 Test Results – Conducted Peak Power Measurements – Mid Channel .....	53
Graph 17 Test Results – Conducted Peak Power Measurements – High Channel.....	54
Graph 18 Test Results – Conducted Peak Power Measurements – Low Channel .....	55
Graph 19 Test Results – Conducted Peak Power Measurements – Mid Channel .....	56
Graph 20 Test Results – Conducted Peak Power Measurements – High Channel.....	57
Graph 21 Test Results – PKPSD – Low Channel .....	61
Graph 22 Test Results – PKPSD – Mid Channel .....	62
Graph 23 Test Results – PKPSD – High Channel .....	63
Graph 24 Test Results – Low Band Edge – 9kHz to 150kHz – Low Channel .....	68
Graph 25 Test Results – Band Edge –150kHz to 30MHz – Low Channel.....	69
Graph 26 Test Results – Band Edge –30MHz to 2.4GHz– Low Channel.....	70
Graph 27 Test Results – Band Edge –2.4GHz to 2.402GHz– Mid Channel.....	71
Graph 28 Test Results – Band Edge –2.402GHz to 2.4835GHz– Mid Channel.....	72
Graph 29 Test Results – Band Edge –2.4835GHz to 25GHz– High Channel .....	73
Graph 30 Test Results – Band Edge – 9kHz to 150kHz – Low Channel .....	74
Graph 31 Test Results – Band Edge –150kHz to 30MHz – Low Channel.....	75
Graph 32 Test Results – Band Edge –30MHz to 1GHz – Low Channel.....	76
Graph 33 Test Results – Band Edge – 900MHz to 902.46 MHz– Mid Channel .....	77
Graph 34 Test Results – Band Edge – 902 to 928MHz– Mid Channel.....	78
Graph 35 Test Results – Band Edge –1GHz to 10 GHz – High Channel .....	79
Graph 36 Test Results – Tx Spurious emission 9kHz – 150kHz: Mid Channel ZX Wired Thermostat (900MHz) ..	86
Graph 37 Test Results – Tx Spurious emission 150kHz – 30MHz: Mid Channel ZX Wired Thermostat (900MHz) .....	87
Graph 38 Test Results – Tx Spurious emission 30MHz – 1GHz (Vertical polarisation): Mid Channel ZX Wired Thermostat (900MHz).....	88
Graph 39 Test Results – Tx Spurious emission 30MHz – 1GHz (Vertical polarisation): Mid Channel ZX Wired Thermostat (2.4GHz) .....	89

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.



Graph 40 Test Results – Tx Spurious emission 30MHz – 1GHz (Horizontal polarisation): Mid Channel ZX Wired Thermostat (900MHz).....	90
Graph 41 Test Results – Tx Spurious emission 30MHz – 1GHz (Horizontal polarisation): Mid Channel ZX Wired Thermostat (2.4GHz) .....	91
Graph 42 Test Results – Tx Spurious emission 1GHz – 3GHz-(Vertical polarisation): Mid Channel ZX Wired Thermostat (900MHz).....	92
Graph 43 Test Results – Tx Spurious emission 1GHz – 3GHz-(Horizontal polarisation): Mid Channel ZX Wired Thermostat (900MHz).....	93
Graph 44 Test Results – Tx Spurious emission 3GHz – 10GHz (Vertical polarisation): Mid Channel ZX Wired Thermostat (900MHz).....	94
Graph 45 Test Results – Tx Spurious emission 3GHz – 10GHz (Horizontal polarisation): Mid Channel ZX Wired Thermostat (900MHz).....	95



## 1 Report Summary

### Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	March 23 <sup>rd</sup> , 2020

**Table 1 – Modification Records**

### Acronyms & Definitions

The following definitions and acronyms are applicable in this report. See also ANSI C63.14.

#### Acronyms

<b>AM</b>	Amplitude Modulation
<b>DTS</b>	Digital Transmission System
<b>EIRP</b>	Equivalent Isotropical Radiated Power
<b>ETSI</b>	European Telecommunications Standards Institute
<b>EUT</b>	Equipment Under Test
<b>FVIN</b>	Firmware Version Identification Number
<b>HVIN</b>	Hardware Version Identification Number(s)
<b>OOB</b>	Out of Band
<b>PKPSD</b>	Peak Power Spectrum Density
<b>RBW</b>	Resolution Bandwidth
<b>RF</b>	Radio Frequency of oscillation rate of electromagnetic fields (e.g. radio waves: 9kHz to 300GHz)
<b>RMS</b>	Root mean square, i.e., $V_p / \sqrt{2}$
<b>Rx</b>	Referred as antennae for receiving RF signals
<b>SD</b>	Spurious Domain
<b>TR</b>	Technical Report
<b>Tx</b>	Referred as antenna for transmitting RF signals
<b>VBW</b>	Video Bandwidth
<b>Vp</b>	Peak Voltage

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 7 of 100



**COMMERCIAL-IN-CONFIDENCE**

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 8 of 100



**EMC** – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

**EMI** – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

**EUT** – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 9 of 100



## 2 Introduction

<b>Applicant:</b>	Verdant Environmental Technologies, Inc.
<b>Manufacturer:</b>	Verdant Environmental Technologies, Inc.
<b>Number of Samples Tested:</b>	1
<b>Test Specification/Issue/Date:</b>	RSS-247 <a href="#">Issue 2</a> : February 2017 FCC Part 15 Subpart C.247 2016 ICES 003 Issue 6:2019
<b>Test Plan/Issue/Date:</b>	N/A
<b>Project Number:</b>	7169007677
<b>Date:</b>	2019-02-26
<b>Date of Receipt of EUT:</b>	2019-02-10
<b>Start of Test:</b>	2019-02-26
<b>Finish of Test:</b>	2019-02-26
<b>Name of Tester(s):</b>	Abdoulaye Ndiaye Jose Martinez-Ortega
<b>Related Documents:</b>	ANSI C63.10:2013 FCC 15. Subpart 15 Subpart C/RSS-247

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 10 of 100



### Brief Summary of Results

A brief summary of the tests carried out in accordance with RSS-247 Issue 2, FCC Part 15 Subpart 15.247, FCC Part 15 Subpart 15.207 & FCC Part 15 Subpart 15.209 is summarized in Table 2.

Report Section	FCC Rule	IC Rule	Description	Class/Limit	Result
<u>6</u>	15.247(a)(1)	RSS-GEN.6.7	99% Bandwidth DTS+FHSS	Refer to RSS GEN.6.7	Pass
	15.247(a)(1)(i)	RSS-247.5.1	99% Bandwidth Hopping System	$\leq 500\text{kHz}$	Pass
<u>7</u>	15.247(a)(2)	RSS-247.5.2(a)	6 dB Bandwidth	$> 500\text{kHz}$	Pass
<u>8</u>	15.247(a)(1)(i)	RSS 247 5.1 (c)	Hopping Channels	$\geq 50$	Pass
<u>9</u>	15.247(a)(1)	RSS 247 5.1 (2)	Channel Separation	$> 25\text{ kHz}$ or $20\text{ dB BW}$	Pass
<u>10</u>	15.247(a)(1)(i)	RSS 247 5.1 (c)	Time of occupancy	$< 0.4\text{ s}$ in 20s period	Pass
<u>11</u>	§15.247(b)(3)	RSS-247.5.4(d)	Maximum Peak Output Power (DTS)	$< 1\text{W}$	Pass
	15.247(b)(2)	RSS-247.5.4(a)	Maximum Peak Output Power (FHSS)	$< 1\text{W}$	
<u>12</u>	15.247(f)	RSS-247 5.2(b)	Power Spectral Density	$< 8\text{dBm}$ in any 3kHz Band	Pass
<u>13</u>	§15.247(d)	RSS-247 5.5	Band-Edge Spurious Conducted Emission	$\leq 20\text{dBc}$	Pass

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 11 of 100



<u>14</u>	§15.209(a)	RSS-247 5.5	Tx Spurious Radiated Emission	Quasi-Peak Average	Pass
<u>15</u>	15.207(a)	RSS GEN 8.8	Conducted Emission	Quasi-Peak Average	Pass
-	15.247(h)	RSS 247 5.1	FHSS Intelligence	Note 3	Pass
-	15.247 (i)	RSS-102	RF Exposure	Note 4	Pass
-	15.247(b)(4)	RSS 247 5.4 (3)	Antenna Gain	<6dBi <Note 2>	Pass
-	15.203 & 15.247(b)	RSS-210	Antenna Requirement	Note 1	Not Applicable

Note 1: Manufacture uses a SMA antenna connector for unique coupling to the intentional radiator  
 Note 2: For the Antenna requirement specified in FCC 15.203 (RSS-247 section 5.5), the unit uses a trace antenna with a gain of less than 6 dBi.  
 Note 3: The EUT does not coordinate transmission with any other FHSS to avoid simultaneous occupation of hopping frequencies  
 Note 4: For maximum permissible exposure, this device operates at less than 1 Watt at 902 - 928MHz and at 2.4GHz – 2.48GHz. It is designed to operate less than 20 cm from any personnel during normal operation. No testing is required; however, it complies with SAR exemption evaluation as determined the RF Exposure exhibits

**Table 2 – Test Summary Table**



## Declaration of Build Status

This report addresses the EMC verification testing and test results of the ZX Wired Thermostat as herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:

RSS-247 Issue 2:2017

FCC Part 15 Subpart C 15.247:2016

ICES 003 Issue 6: 2019

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc, unless otherwise stated.

For a more detailed list of the standards and the revision used, see the "Applicable Standards, Specifications and Methods" section of this report.

## Notes, Justification

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS-247 section 5.5), the unit uses a trace antenna with a gain of less than 6 dBi

For the Restricted Bands of operation, the EUT is designed to only operate between 902 – 907.6 MHz and 2.402 – 2.48GHz.

**COMMERCIAL-IN-CONFIDENCE**

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 13 of 100



The EUT does not coordinate transmission with any other FHSS to avoid simultaneous occupation of hopping frequencies.

For maximum permissible exposure, this device operates at less than 1 Watt at 902 - 928MHz and 2.4GHz – 2.48GHz. It is designed to operate less than 20 cm from any personnel during normal operation. No testing is required; however, it complies with SAR exemption evaluation as determined the RF Exposure exhibits.

For the scope of this test report, the EUT was mounted in three orthogonal axes to maximize emissions. Worst case results are presented

**COMMERCIAL-IN-CONFIDENCE**

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 14 of 100



### 3 EUT: ZX WIRED THERMOSTAT

#### 3.1 Specifications:

PRODUCT NAME:	ZX WIRED THERMOSTAT
MANUFACTURER:	Verdant Environmental Technologies, Inc
MODEL	2.4G
FREQUENCY RANGE (MHz)	2402-2480
VOLTAGE RATING:	24Vdc
HVIN	WU
FVIN	V1.00

Table 3 – EUT – ZX WIRED THERMOSTAT – Specifications for 2.4GHz

PRODUCT NAME:	ZX WIRED THERMOSTAT
MANUFACTURER:	Verdant Environmental Technologies, Inc
MODEL	900 MHz
FREQUENCY RANGE (MHz)	902-928
VOLTAGE RATING:	24Vdc
HVIN	WU
FVIN	V1.00

Table 4 – EUT – ZX WIRED THERMOSTAT – Specifications for 900 MHz

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 15 of 100



Channels	Frequency (GHz)	Channels	Frequency (GHz)
Channel #0	2.402	Channel #20	2.442
Channel #1	2.404	Channel #21	2.444
Channel #2	2.406	Channel #22	2.446
Channel #3	2.408	Channel #23	2.448
Channel #4	2.410	Channel #24	2.450
Channel #5	2.412	Channel #25	2.452
Channel #6	2.414	Channel #26	2.454
Channel #7	2.416	Channel #27	2.456
Channel #8	2.418	Channel #28	2.458
Channel #9	2.420	Channel #29	2.460
Channel #10	2.422	Channel #30	2.462
Channel #11	2.424	Channel #31	2.464
Channel #12	2.426	Channel #32	2.466
Channel #13	2.428	Channel #33	2.468
Channel #14	2.430	Channel #34	2.470
Channel #15	2.432	Channel #35	2.472
Channel #16	2.434	Channel #36	2.474
Channel #17	2.436	Channel #37	2.476
Channel #18	2.438	Channel #38	2.478
Channel #19	2.440	Channel #39	2.480

**Table 5 List of Channels for ZX Wired Thermostat 2.4 GHz**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 16 of 100



Channels	Frequency (MHz)
#0	902.46
#1	902.84
#2	903.22
#3	903.6
#4	903.98
#5	904.36
#6	904.74
#7	905.12
#8	905.5
#9	905.88
#10	906.26
#11	906.64
#12	907.02
#13	907.4
#14	907.78
#15	908.16
#16	908.54
#17	908.92
#18	909.3
#19	909.68
#20	910.06
#21	910.44
#22	910.82
#23	911.2
#24	911.58
#25	911.96
#26	912.34
#27	912.72
#28	913.1
#29	913.48
#30	913.86
#31	914.24
#32	914.62

Channels	Frequency (MHz)
#33	915
#34	915.38
#35	915.76
#36	916.14
#37	916.52
#38	916.90
#39	917.28
#40	917.66
#41	918.04
#42	918.42
#43	918.8
#44	919.18
#45	919.56
#46	919.94
#47	920.32
#48	920.7
#49	921.08
#50	921.46
#51	921.84
#52	922.22
#53	922.6
#54	922.98
#55	923.36
#56	923.74
#57	924.12
#58	924.5
#59	924.88
#60	925.26
#61	925.64
#62	926.02
#63	926.4
#64	926.78
#65	927.16

Channels	Frequency (MHz)
#66	927.54
#67	927.92

**Table 6 List of Channels for ZX Wired Thermostat 900 MHz**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 17 of 100



### 3.2 Modes of Operation


The ZX WIRED THERMOSTAT is operating in the 2.4 GHz and 915 MHz bands. For operation, wireless was configured to transmit at maximum possible duty cycle

The transmitter was provided in 2 different settings:

- A configuration with special test firmware was installed on the EUT to control hopping through its pseudo random sequence and single channel
- A configuration with low, medium and high channels transmitting continuously at a 100% duty cycle.

### 3.3 Setup Diagram

During the EUT was exercised by powering to the rated voltage and connecting according to Figure 1.

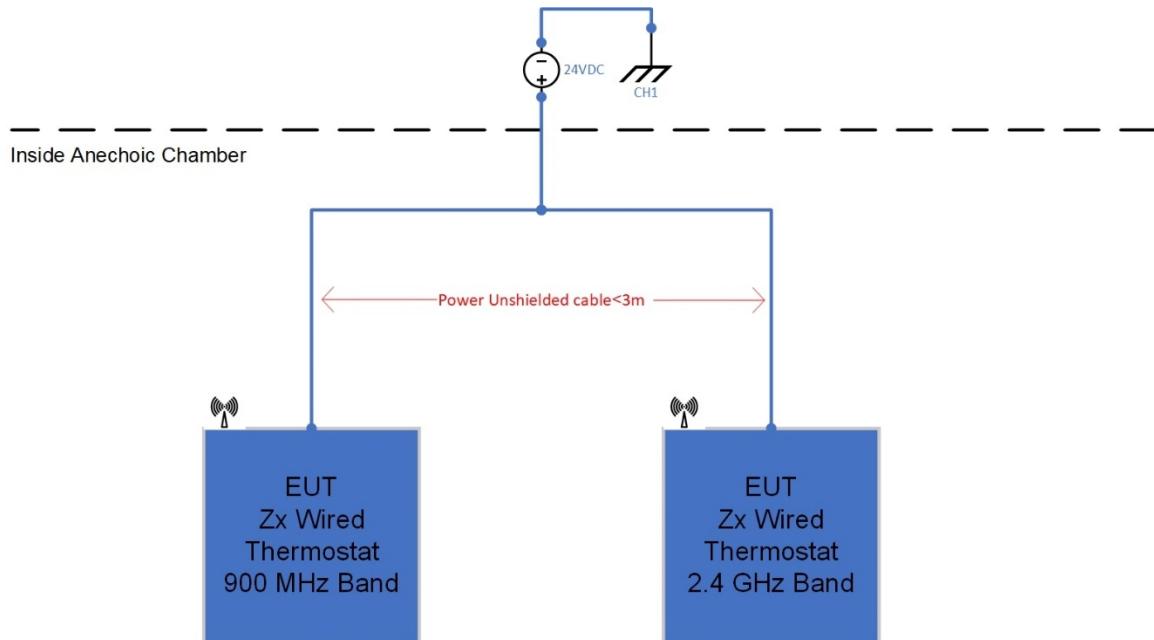

**Figure 1: EUT Setup Diagram – ZX WIRED THERMOSTAT – Spurious emissions**



## 4 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

## 5 Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2. For instance, for the range of 0.15MHz-30MHz, 30MHz – 1GHz and 1GHz – 18GHz is  $\pm 3.3$  dB,  $\pm 4.25$  dB and  $\pm 4.93$  dB, respectively with a 'k=2' coverage factor and a 95% confidence level.

Parameter	Uncertainty
Occupied channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5$ dB
Power Spectral Density, conducted	$\pm 3$ dB
Unwanted Emission, conducted	$\pm 3$ dB
All emission, radiated	$\pm 6$ dB
Temperature	$\pm 3^\circ\text{C}$
Time Occupancy	$\pm 3\%$

**Table 7 Acceptable Uncertainties**



## 6 99% Bandwidth

### 6.1 Purpose & Methods

The Purpose & Methods of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information. The test method is a defined in ANSI C63.10.

### 6.2 Test Specifications

**REFERENCE STANDARD** FCC 15.247(a)(1)  
ANSI C63.10-2013 Clause 6.9  
RSS-247.5.1

#### SPECIFICATIONS

<b>Limit – Bandwidth (kHz)</b>	≤500
<b>Frequency range (MHz)</b>	2402 902.46 2442 915 2480 927.52

**RBW (kHz):** Set to 1% to 3% of the 99% bandwidth

**VBW (kHz)** 3xRBW

#### EUT

**Identification** ZX Wired Thermostat (2.4GHz)  
ZX Wired Thermostat (915MHz)

**Voltage Input** 24Vdc

#### ENVIRONMENTAL & TEST INFO

**Test Date (YYYY-MM-DD)** 2019-03-22

**Temperature (°C)** 23.4± 2

**Humidity (%)** 36.3 ± 5

**Atmospheric Pressure kPa (For Info Only)** 109.7

**Tester** Abderrahmane Ferhat

**Client Witness** No Witness

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 20 of 100



## 6.3 Test Results

### ZX Wired Thermostat (2.4GHz)

All the Channels gave a maximum of 1.0416 MHz for 99% BW. Details are depicted in Table 8.

Channel	Frequency (MHz)	99% Bandwidth (MHz)	Results
Low channel	2402	1.0416	Pass
Middle Channel	2442	1.0416	Pass
Highest Channel	2480	1.0416	Pass
Note 1: No Limit is applicable, but according to RSS GEN 5 the RBW has to be set to 1% to 3% of the 99% bandwidth			

**Table 8 – 99% Bandwidth Results**

### ZX Wired Thermostat (900MHz)

The Channel #0 gave a maximum of 182.7 kHz for 99% BW. Details are depicted in Table 9.


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	Limits (kHz)	Results
Low channel	902.46	182.7	≤500	Pass
Middle Channel	915	181.9	≤500	Pass
Highest Channel	927.52	181.1	≤500	Pass

**Table 9 – 99% Bandwidth Results**



## 6.4 Graphs

The graphs showed below show the OBW during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the 99% bandwidth of a channel during operation of the EUT. Max hold is performed for a duration of not less than 1 minute. No attenuator was used between the EUT and the Spectrum Analyzer.

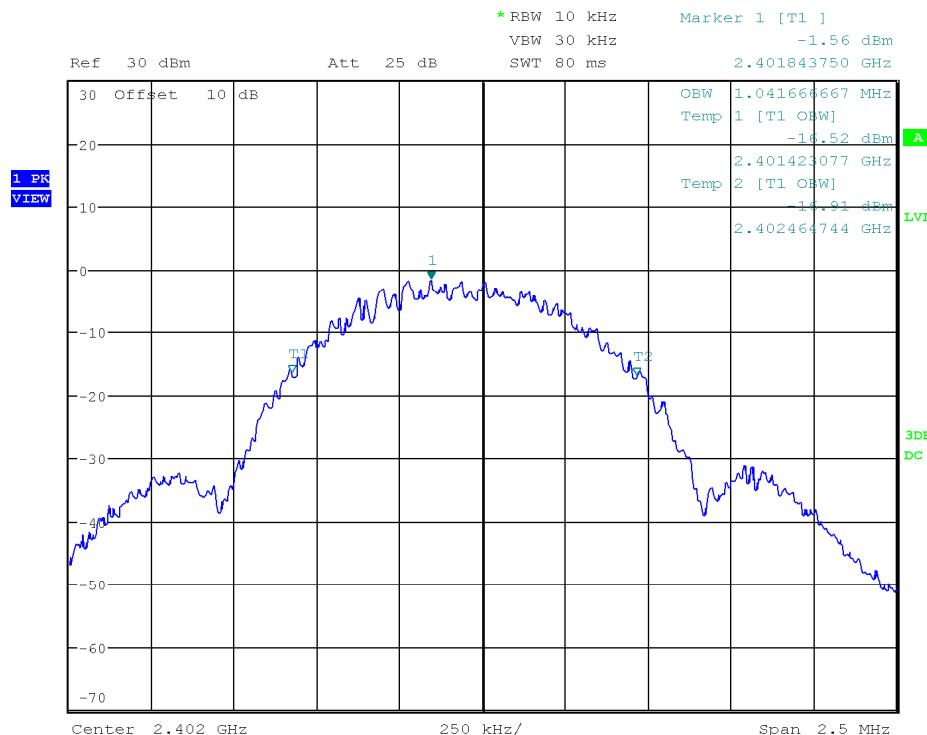


Date: 22.MAR.2019 14:59:11

**Graph 1 Test Results – 99% Bandwidth Results – Lower Channel (#0) ZX Wired Thermostat(2.4GHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

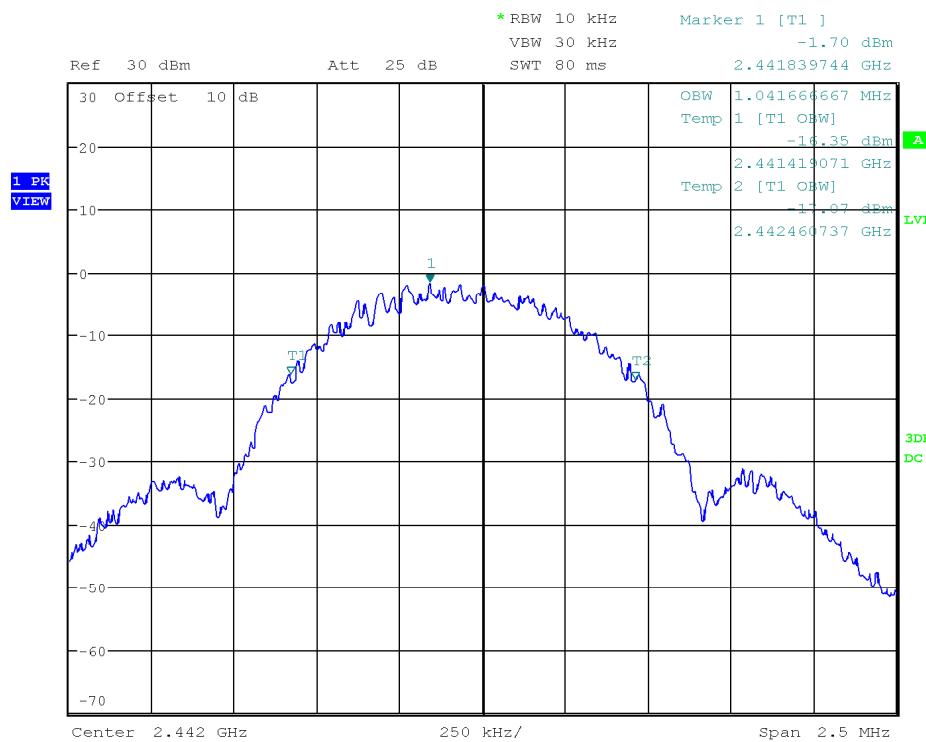


Date: 22.MAR.2019 15:39:57

## Graph 2 Test Results – 99% Bandwidth Results – Middle Channel (#19) ZX Wired Thermostat(2.4GHz)

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

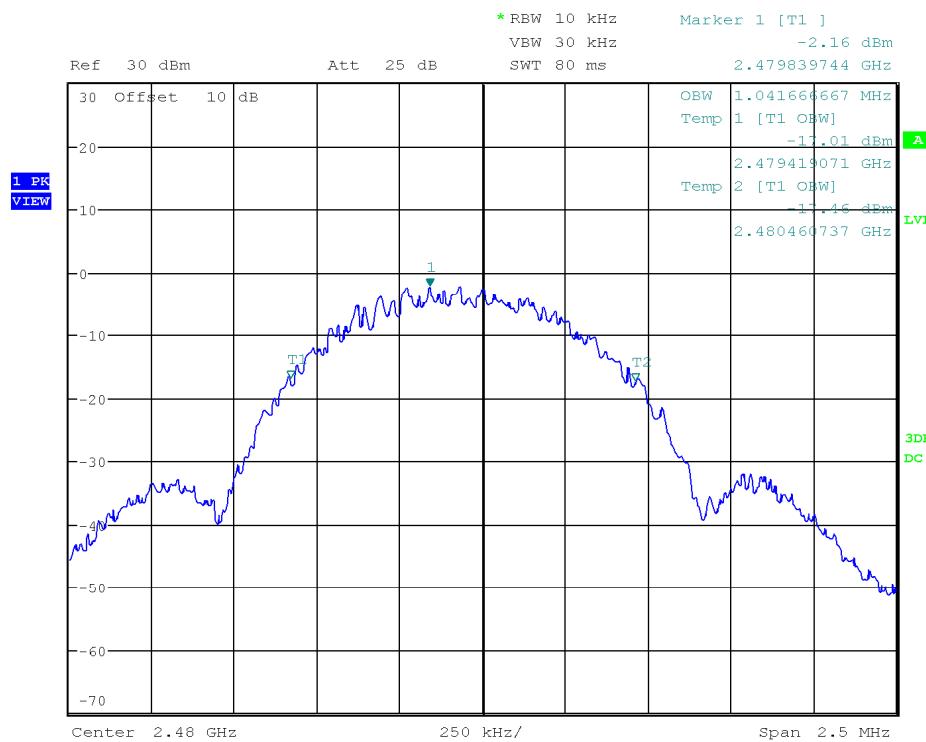


Date: 22.MAR.2019 16:12:14

### Graph 3 Test Results – 99% Bandwidth Results – Highest Channel (#39) ZX Wired Thermostat(2.4GHz)

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

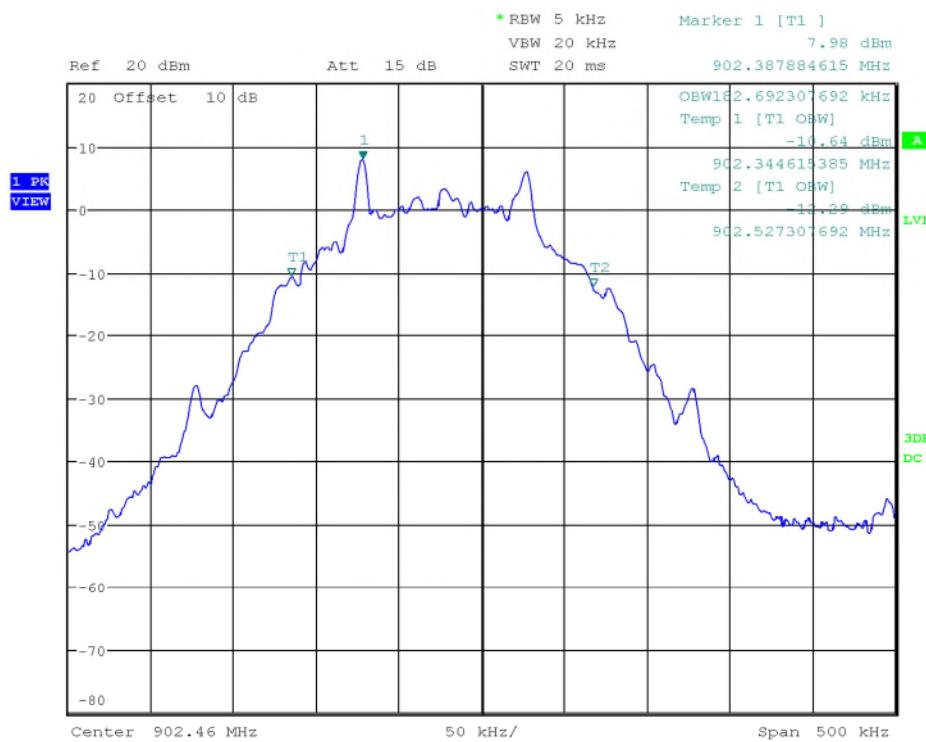


Date: 22.MAR.2019 13:08:39

### Graph 4 Test Results – 99% Bandwidth Results – Low Channel ZX Wired Thermostat (900MHz)

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

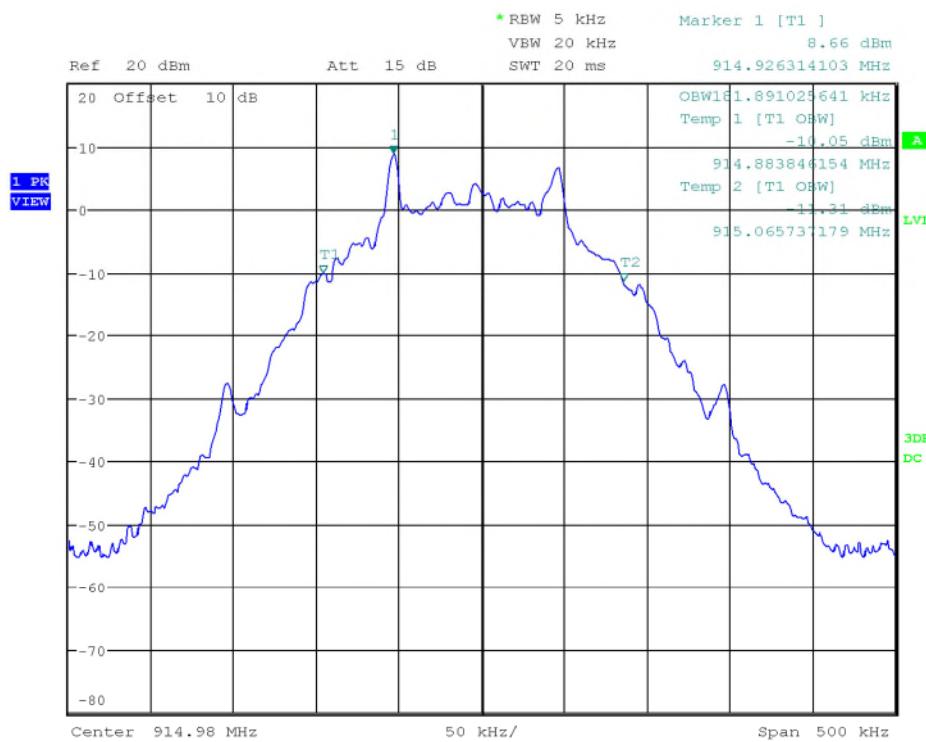


Date: 22.MAR.2019 13:25:24

### Graph 5 Test Results – 99% Bandwidth Results – Mid Channel ZX Wired Thermostat (900MHz)

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

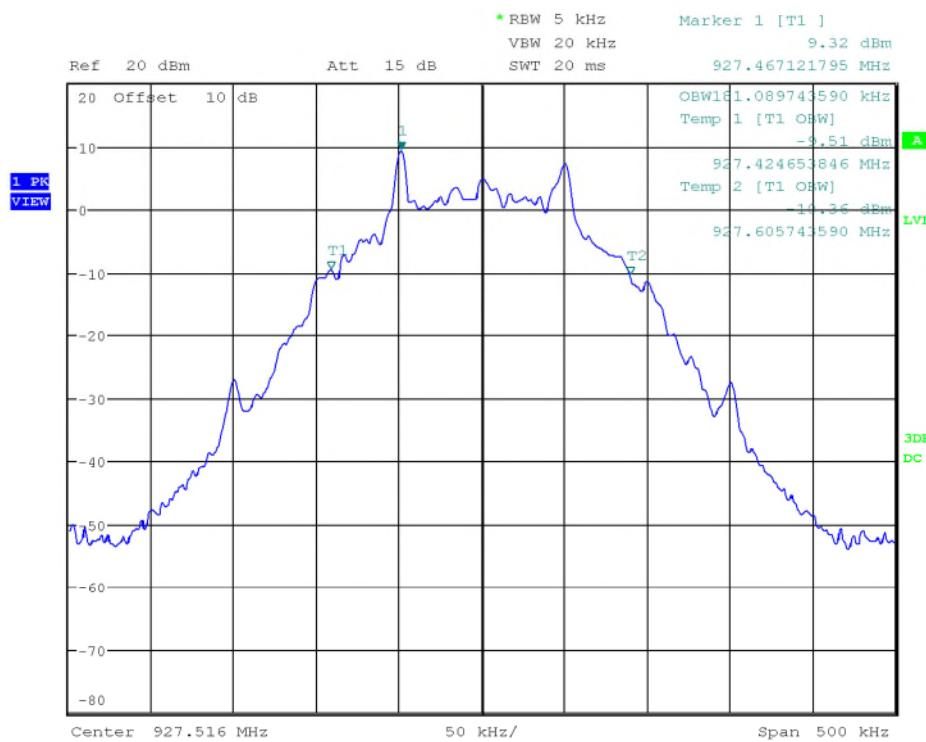

Date: 22.MAR.2019 13:33:54

### Graph 6 Test Results – 99% Bandwidth Results – High Channel ZX Wired Thermostat(900MHz)

#### 6.5 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 10.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

Table 10: 99%BW Test Equipment

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.



## 7 6dB Bandwidth of Digitally Modulated Systems

### 7.1 Purpose & Methods

The Purpose & Methods of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information. The test method is a defined in ANSI C63.10.

### 7.2 Test Specifications

<b>REFERENCE STANDARD</b>	FCC Part 15.247(a)2 RSS-247 5.2(a)
---------------------------	---------------------------------------

#### SPECIFICATIONS

<b>Limit – 6dB Bandwidth(kHz)</b>	≥500kHz
<b>Test Frequency (MHz):</b>	2402 2442 2480
<b>RBW (kHz)</b>	10
<b>VBW (kHz)</b>	30
<b>EUT</b>	
<b>Identification</b>	ZX Wired Thermostat (900MHz)
<b>Voltage Input</b>	24Vdc
<b>Environmental</b>	Normal Conditions
<b>Test Date (YYYY-MM-DD)</b>	2019-03-22
<b>Temperature (°C)</b>	23.4 ± 1
<b>Humidity (%)</b>	36.3 ± 5
<b>Atmospheric Pressure kPa (For Info Only)</b>	109.7
<b>Tester(s)</b>	Abderrahmane Ferhat
<b>Client Witness</b>	No witness

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 28 of 100



### 7.3 Test Results

#### ZX Wired Thermostat (2.4GHz)

The Channel #0 and Channel #19 gave a maximum of 596.955kHz for 6dB BW. Details are depicted in Table 11

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Results
Low channel:	2402	596.955	≥500	Pass
Middle Channel	2442	596.955	≥500	Pass
Highest Channel	2480	560.897	≥500	Pass

**Table 11 – 6dB Bandwidth Results**

COMMERCIAL-IN-CONFIDENCE


No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 29 of 100



## 7.4 Graphs

The graphs showed below show the OBW during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the 99% bandwidth of a channel during operation of the EUT. Max hold is performed for a duration of not less than 1 minute. No attenuator was used between the EUT and the Spectrum Analyzer.

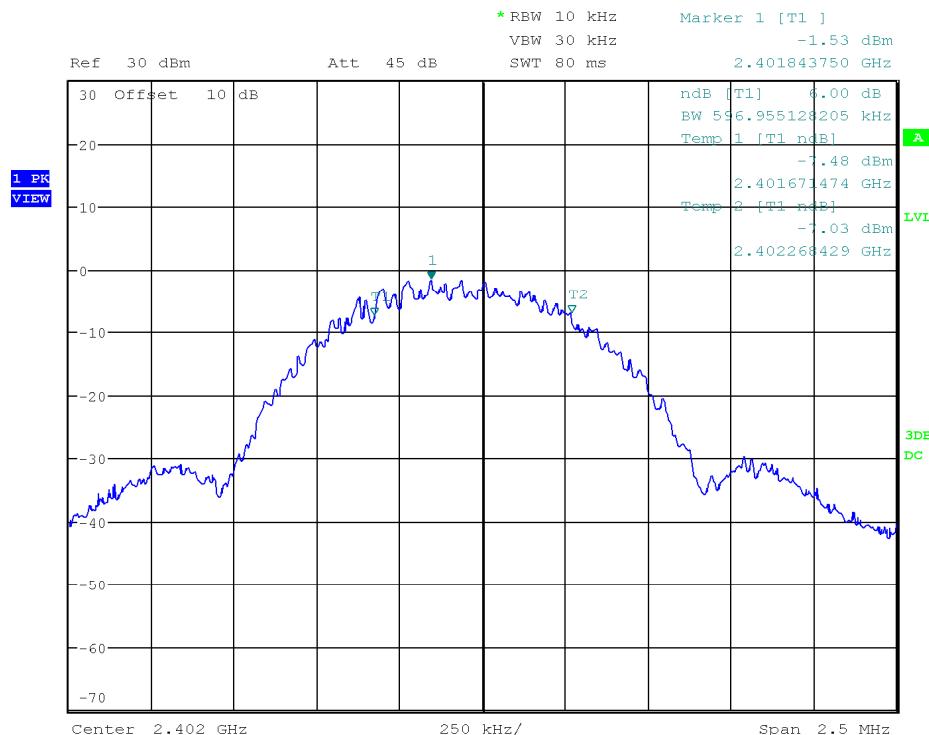


Date: 22.MAR.2019 14:56:59

**Graph 7 Test Results – 6dB Bandwidth Results – Low Channel ZX Wired Thermostat(2.4GHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

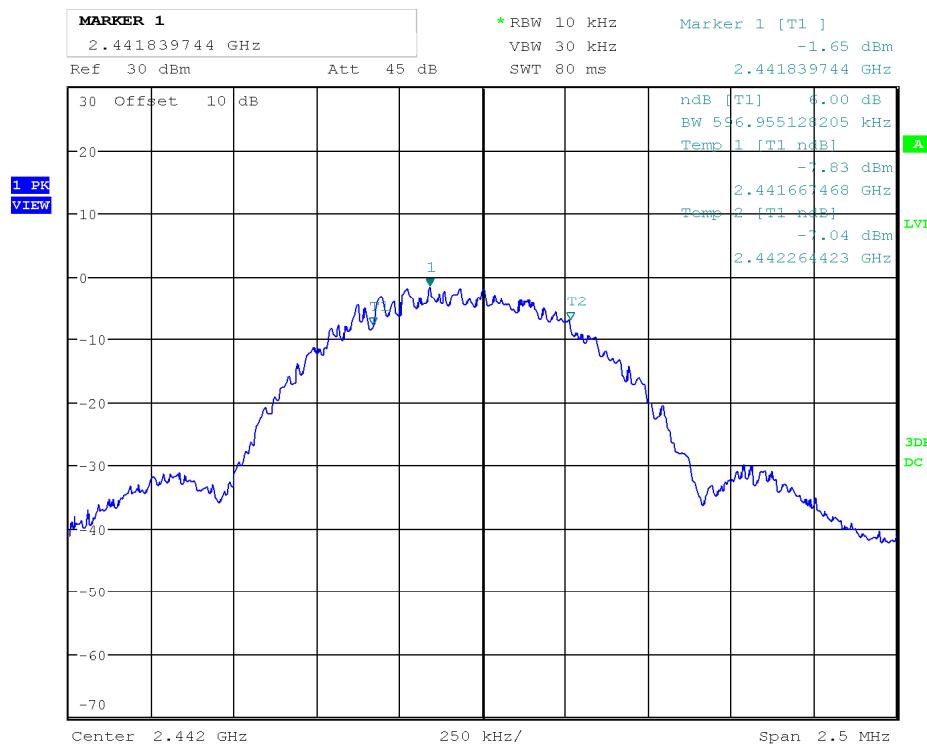


Date: 22.MAR.2019 15:38:38

### Graph 8 Test Results – 6dB Bandwidth Results – Mid Channel ZX Wired Thermostat(2.4GHz)

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

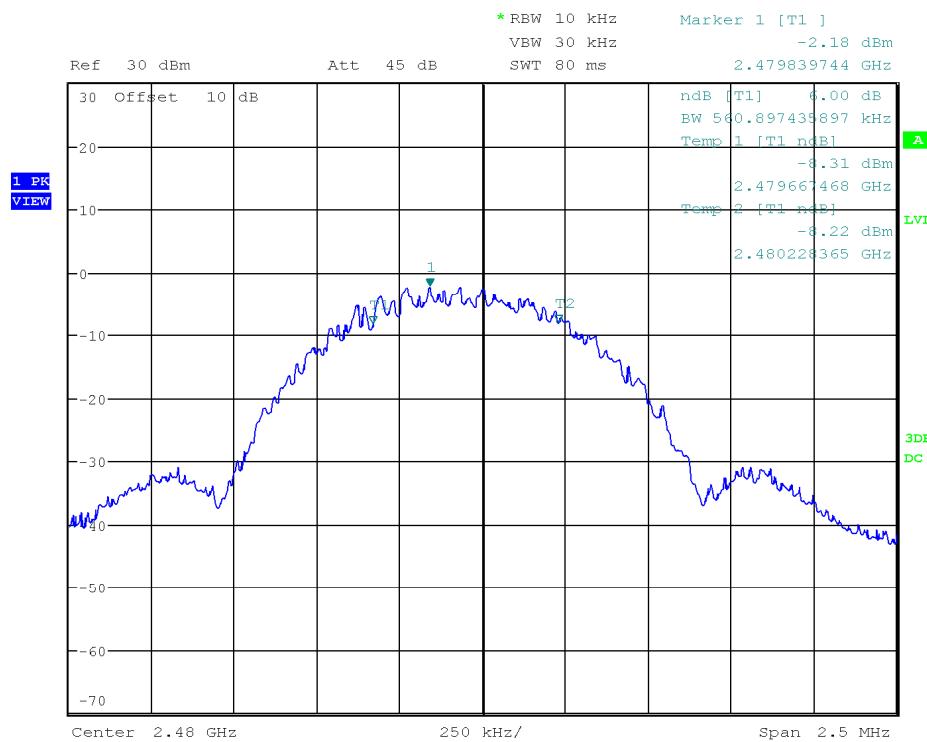

Date: 22.MAR.2019 16:11:21

### Graph 9 Test Results – 6dB Bandwidth Results – High Channel ZX Wired Thermostat(2.4GHz)

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.



## 7.5 Test Instruments

This test was carried out in Laval test location. Instrumentation used are depicted in Table 12.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

**Table 12: 6 dB OBW Test Equipment**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 33 of 100



## 8 Hopping Channel

### 8.1 Purpose & Methods

The Purpose & Methods of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information. The test method is a defined in ANSI C63.10.

### 8.2 Test Specifications

REFERENCE STANDARD	FCC Part 15.247(a)(1)(i) RSS 247 5.1 (c)
--------------------	---

#### SPECIFICATIONS

<b>Limits</b>	See Section 15.247(a)(1)
<b>Test Frequency (MHz):</b>	902.46 915 927.52
<b>RBW (kHz)</b>	200
<b>VBW (kHz)</b>	500
<b>EUT</b>	
<b>Identification</b>	ZX Wired Thermostat (900MHz)
<b>Voltage Input</b>	24Vdc
<b>Environmental</b>	Normal Conditions
<b>Test Date (YYYY-MM-DD)</b>	2019-03-22
<b>Temperature (°C)</b>	23.4 ± 1
<b>Humidity (%)</b>	36.3 ± 5
<b>Atmospheric Pressure kPa (For Info Only)</b>	109.7
<b>Tester(s)</b>	Abderrahmane Ferhat
<b>Client Witness</b>	No witness

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 34 of 100



### 8.3 Limits

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1). The test method is defined in ANSI C63.10.

Frequency Band	20 dB Bandwidth of the hopping channel	Hopping Number
902 - 928	≤250kHz	≥ 50 channels
	≥250 kHz	≥ 25 channels
2400 - 2483.5	≤250kHz	≥ 15 channels
	≥250 kHz	≥15 channels
5275 - 5850	≤250kHz	≥ 75 channels
	≥250 kHz	≥ 75 channels

### 8.4 Test Results

The EUT passed the requirements of the number of channels. The number of channels occupied by the EUT and 64 channels in the allocation band of 902 MHz to 928 MHz. The results are depicted in Table 13.


Channel	Range (MHz)	Number of Hopping Measured	Limits	Results
Middle Channel:	902 - 928	64	≥50 channels	Pass

**Table 13 – Hopping Channel Results**



## 8.5 Graphs

The graphs below show the number of occupied channels during the operation of the device. This is measured by a max hold on the spectrum analyser and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement. Max hold is performed for a duration of not less than 10 minutes, or as sufficient to capture the channels occupied.

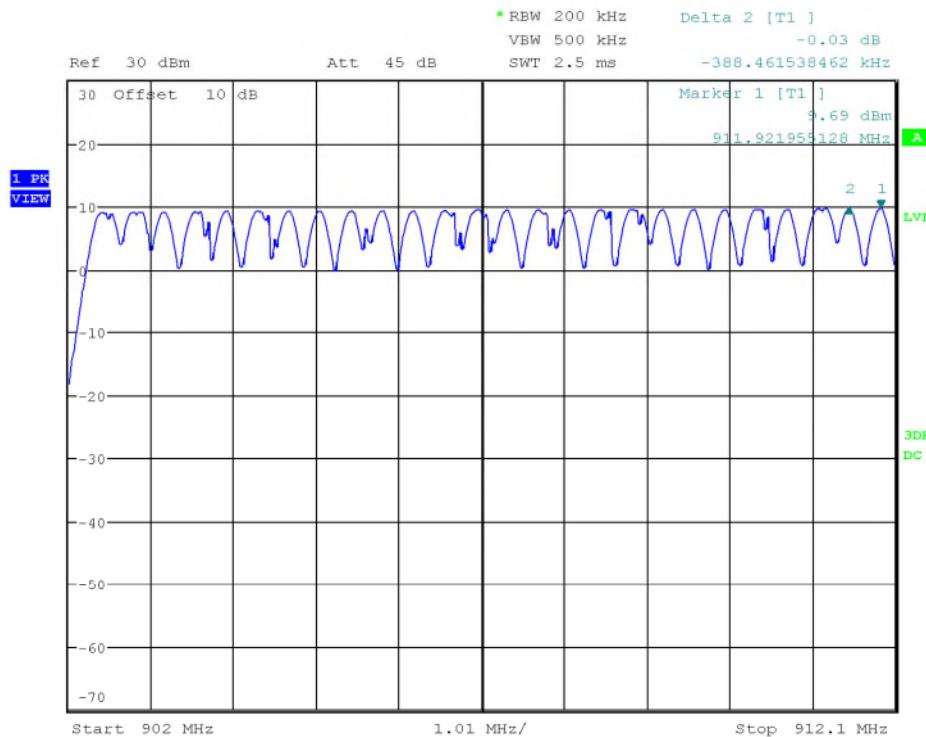

Date: 22.MAR.2019 10:42:11

**Graph 10: Hopping Channel – ZX Wired Thermostat (900MHz) – 902MHz – 912.1MHz**


COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 36 of 100



Product Service

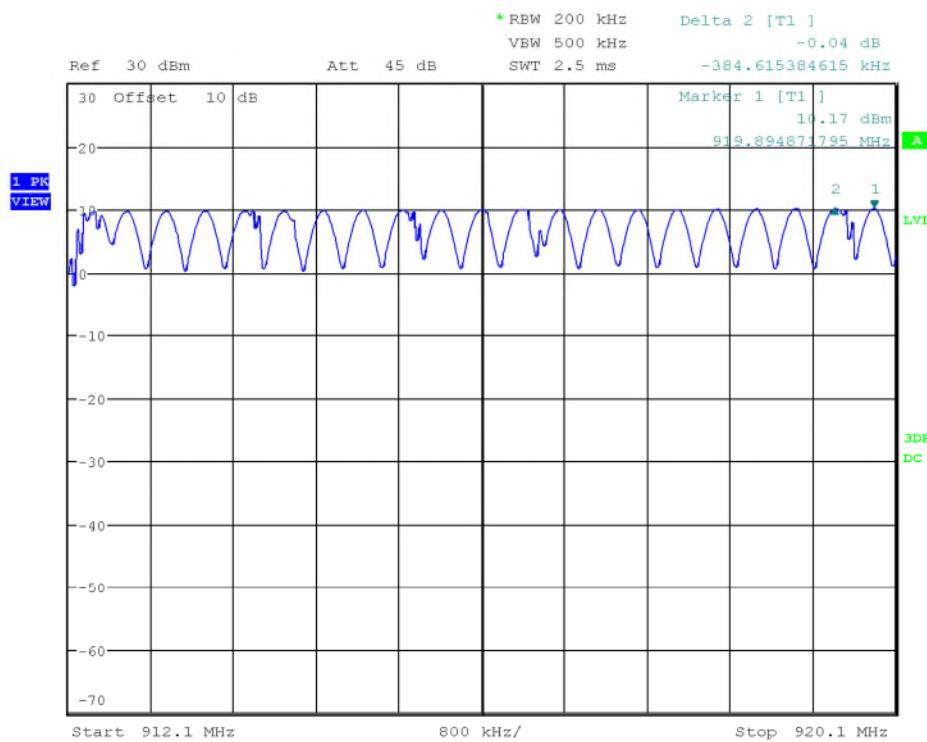


Date: 22.MAR.2019 10:53:25

**Graph 11: Hopping Channel – ZX Wired Thermostat (900MHz) – 912.1MHz – 920.1MHz**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 37 of 100

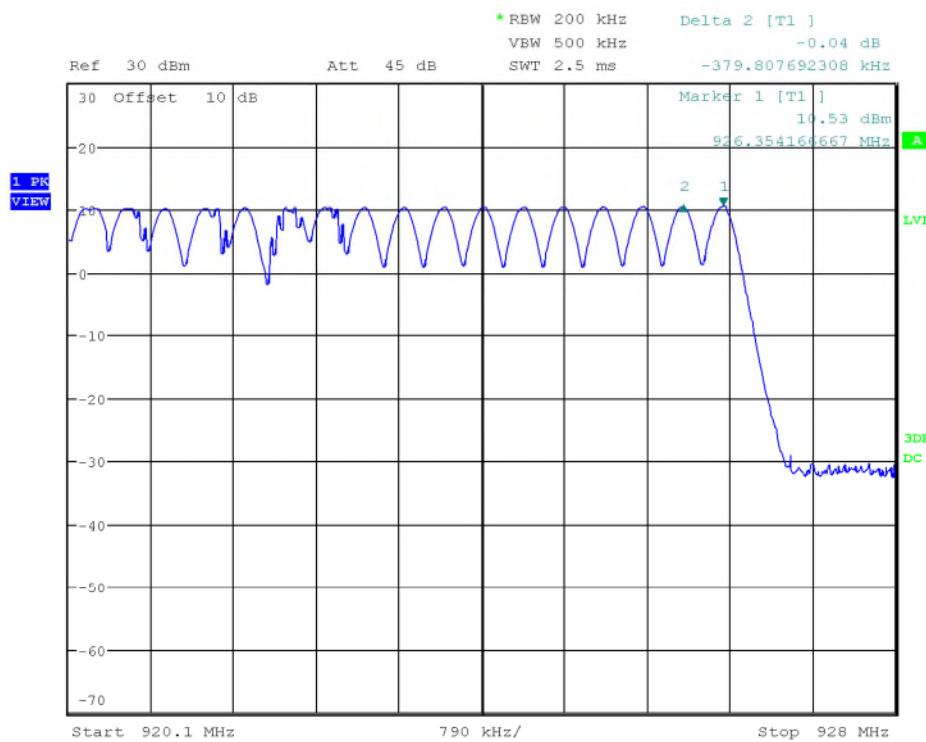

Date: 22.MAR.2019 11:00:21

**Graph 12: Hopping Channel – ZX Wired Thermostat (900MHz) – 920.1MHz – 928MHz**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.



## 8.6 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 14.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

**Table 14: Hopping Channel Test Equipment**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 39 of 100



## 9 Channel Separation

### 9.1 Purpose & Methods

The Purpose & Methods of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information. The test method is a defined in ANSI C63.10.

### 9.2 Test Specifications

<b>REFERENCE STANDARD</b>	FCC Part 15.247(a)(1). RSS 247 5.1 (2)
<b>SPECIFICATIONS</b>	
<b>Limit</b>	≥20 dB Bandwidth
<b>Frequency range (MHz)</b>	902.46 915 927.52
<b>RBW (kHz):</b>	100
<b>VBW (kHz)</b>	300
<b>EUT</b>	
<b>Identification</b>	ZX WIRED THERMOSTAT (900MHz)
<b>Voltage Input</b>	24 Vdc
<b>ENVIRONMENTAL &amp; TEST INFO</b>	
<b>Test Date (YYYY-MM-DD)</b>	2019-03-22
<b>Temperature (°C)</b>	23.4 ± 1
<b>Humidity (%)</b>	36.3 ± 5
<b>Atmospheric Pressure kPa (For Info Only)</b>	109.7
<b>Tester</b>	Abderrahmane Ferhat
<b>Client Witness</b>	No Witness



### 9.3 Limits

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1). The test method is defined in ANSI C63.10 as shown in the Table below

Frequency Band	20 dB Bandwidth of the hopping channel	Limits <Note 1>
902 - 928	≤250kHz	25kHz or 20dB BW
2400 - 2483.5	≤250kHz	25kHz or 20dB BW
	≤125mW	25 kHz or 2/3 of 20 dB BW <sup>1</sup>
5275 - 5850	≤250kHz	25kHz or 20dB BW
Note 1: The minimum channel separation is given by the greater of 25 kHz or 20 dB BW for unconditional operation. The 20 dB BW of the system was measured to be 184.63 kHz. Thus, a channel separation limit of 182.7kHz applies.		

### 9.4 Test Results

The results of the EUT are detailed in Table 15. Results are depicted in Table 15.


Channel	Range (MHz)	Channel Separation Measured <kHz>	Limits < kHz >	Results
Middle Channel:	902 - 915	378	≥182.7	Pass

**Table 15 – Channel Separation Results**



## 9.5 Graphs

The graphs shown below shows the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyser and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute, as the device is stepping through its hopping table.

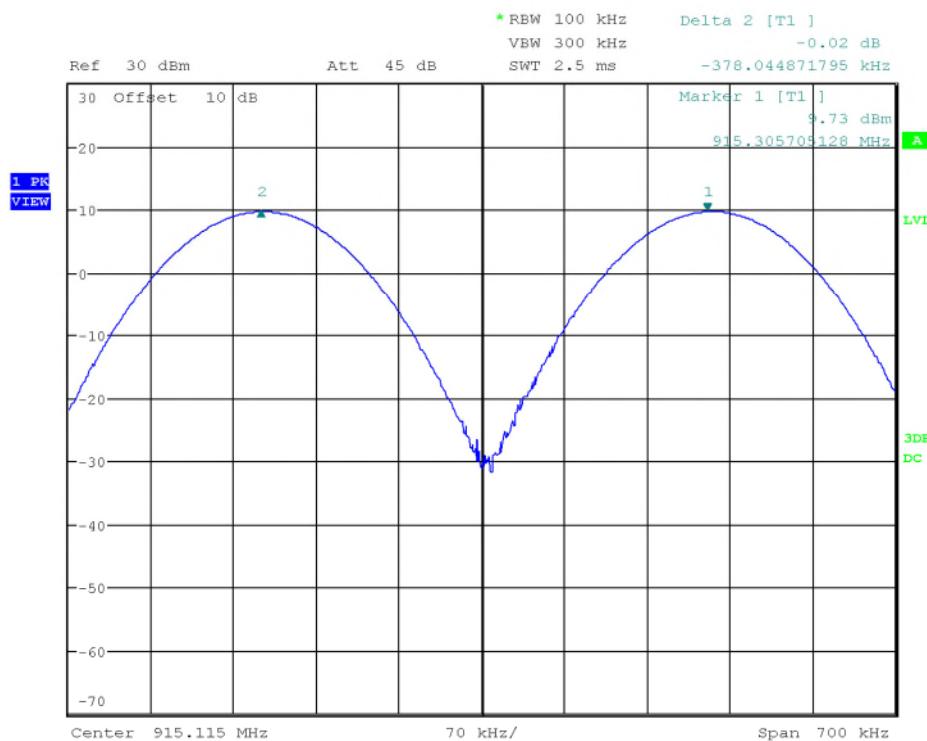

Date: 22.MAR.2019 10:08:04

**Graph 13: Channel Separation – ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.



## 9.6 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 16.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

**Table 16: Channel Separation Test Equipment**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 43 of 100



## 10 Time of Occupancy

### 10.1 Purpose & Methods

The purpose of this test is to ensure that the RF energy of frequency hopping systems is hopping at a minimum defined rate. This helps ensure sufficient time off to enable other frequency hopping devices to co-operate within this allocated band.

### 10.2 Test Specifications

<b>REFERENCE STANDARD</b>	FCC Part 15.247(a)(1). RSS 247 5.1 (2)
<b>SPECIFICATIONS</b>	
<b>Limit</b>	See FCC 15.247(a)(1)(i).
<b>Frequency range (MHz)</b>	902.46 915 927.52
<b>RBW (kHz):</b>	200
<b>VBW (kHz)</b>	500
<b>EUT</b>	
<b>Identification</b>	ZX WIRED THERMOSTAT (900MHz)
<b>Voltage Input</b>	24 Vdc
<b>ENVIRONMENTAL &amp; TEST INFO</b>	
<b>Test Date (YYYY-MM-DD)</b>	2019-03-22
<b>Temperature (°C)</b>	23.4 ± 1
<b>Humidity (%)</b>	36.3 ± 5
<b>Atmospheric Pressure kPa (For Info Only)</b>	109.7
<b>Tester</b>	Abderrahmane Ferhat
<b>Client Witness</b>	No Witness



### 10.3 Limits

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 10.4 Test Results

The EUT cycles through its pseudo-random generated list of hopping frequencies. There are 64 channels occupied in total. The average transmit time is 4.5 ms per channel and each channel is repeated approximately every 1s. Results are depicted in Table 17.

Channel	Range (MHz)	Average Transmit Time/ Channel (ms)	Number of Hops in 20s	Average Time of Occupancy (ms)	Limit (ms)	Results
Middle Channel: #34	902 - 915	4.5	20	90	≤400	Pass

**Table 17 – Time Occupancy Results**

COMMERCIAL-IN-CONFIDENCE


No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 45 of 100



## 10.5 Graphs

The graphs shown below shows the Time of Occupancy during the operation of the device. This is measured by a max hold on the spectrum analyser and the highest resolution bandwidth that is sufficiently low to exhibit the Time of Occupancy of the signal being measured. This measurement is a peak measurement.

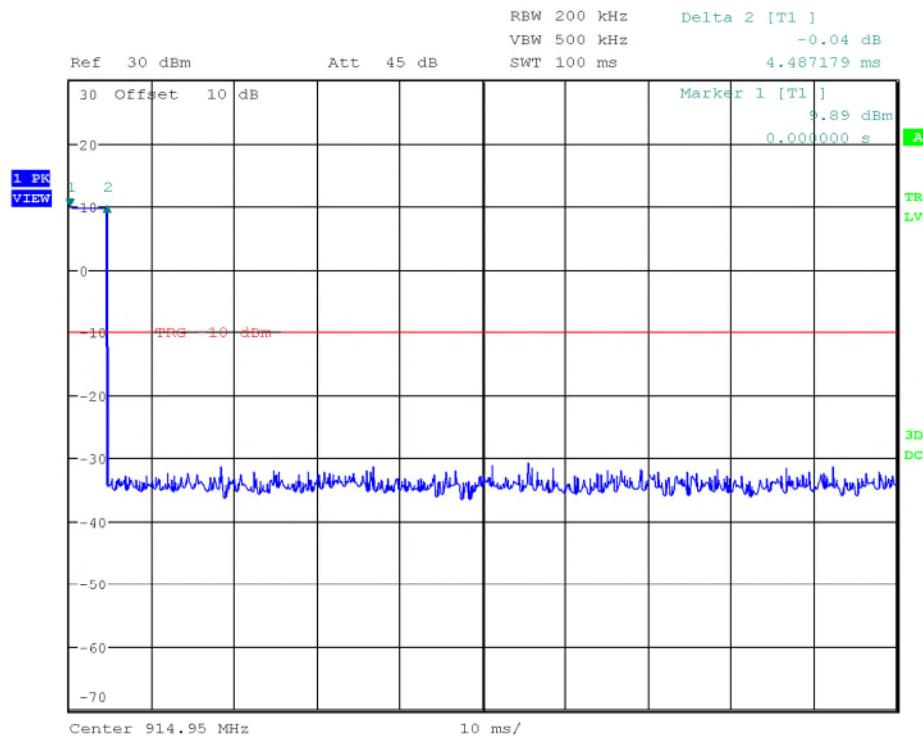

Date: 22.MAR.2019 11:25:57

**Graph 14: Time of Occupancy – ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.



## 10.6 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 18.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

**Table 18: Time of Occupancy Test Equipment**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 47 of 100



## 11 Maximum Peak Envelope Conducted Power – Digital Modulated

### 11.1 Purpose & Methods

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified. The test method is defined in ANSI C63.10.

**COMMERCIAL-IN-CONFIDENCE**

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 48 of 100



## 11.2 Test Specifications

REFERENCE STANDARD	FCC Part 15.247(b)(3) FCC Part 15.247(b)(2) RSS-247.5.4(d) ANSI C63.10, Clause 11.9.1
--------------------	--

### SPECIFICATIONS

Limit – Power (W)	<1	
Frequencies (MHz)	2402	902.46
	2442	915
	2480	927.52
RBW (MHz):	2	0.2
VBW (MHz)	10	0.5
Span (MHz)	10	1.5

### EUT

**Identification** ZX WIRED THERMOSTAT

**Voltage Input** 24 Vdc

### ENVIRONMENTAL

**Normal Conditions**

**Test Date (YYYY-MM-DD)** 2019-03-22

**Temperature (°C)** 23.4 ± 2

**Humidity (%)** 36.3± 5

**Atmospheric Pressure** 109.7

**kPa (For Info Only)**

**Tester** Abderrahmane Ferhat

**Client Witness** No Witness

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 49 of 100



### 11.3 Limits

The limits are defined in 15.247(b)(2) and 15.247(b)(3). For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

### 11.4 Tests Results

#### ZX Wired Thermostat (2.4GHz)

The Low Channel gave a maximum Peak Power of 8.79 dBm (7.56mW). Results of the peak power measurements of channels tested are depicted in Table 19.

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Peak Power (mW)	Limit (W)	Result
Low	2402	8.79	7.56	1	Pass
Middle	2442	8.61	7.26	1	Pass
High	2480	8.12	6.48	1	Pass

**Table 19 – Test Results Peak-Power Measurements ZX Wired Thermostat (2.4GHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 50 of 100

**ZX Wired Thermostat (900MHz)**

The High Channel gave a maximum Peak Power of 11.06 dBm (12.8mW). The peak power measurements of channels tested are depicted in Table 20.

Channel	Frequency (MHz)	Measured Peak Power (dBm)	Peak Power (mW)	Limit (mW)	Result
Low	902.46	09.73	9.4	1000	Pass
Middle	915	10.41	11.0	1000	Pass
High	927.52	11.06	12.8	1000	Pass


**Table 20 – Test Results Peak-Power Measurements ZX Wired Thermostat (900MHz)**

## 11.5 Graphs

The plots shown below show the Peak Power Output of the device during the antenna conducted measurements during transmit operation of the EUT. Note that no attenuator was used between the EUT and the Spectrum Analyzer.

COMMERCIAL-IN-CONFIDENCE


No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

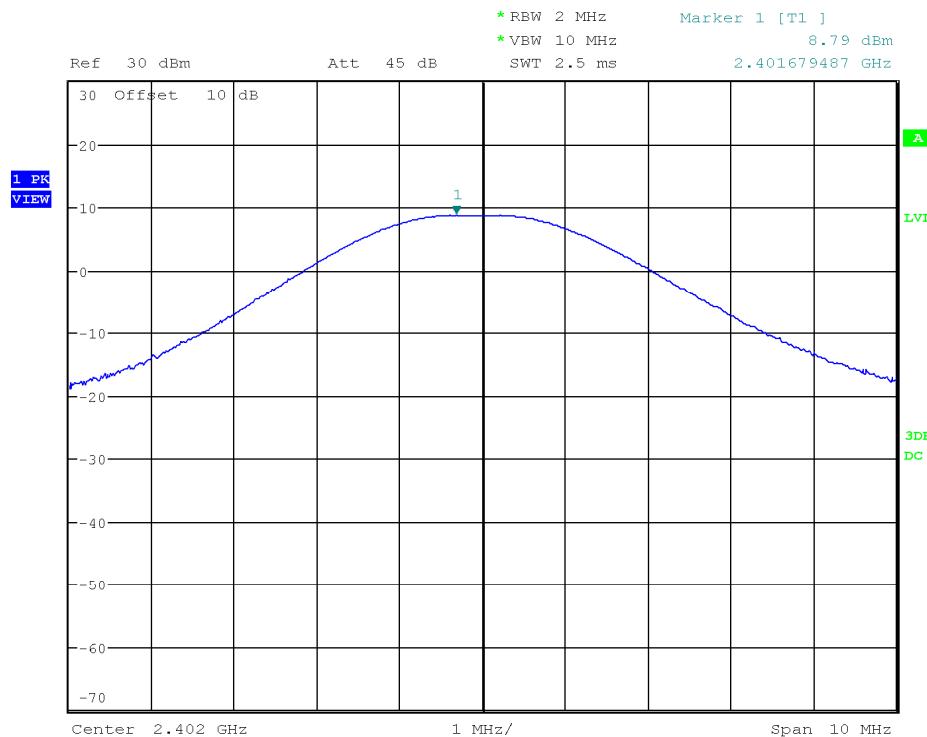**ZX Wired Thermostat (2.4GHz)**

Date: 22.MAR.2019 15:13:36

**Graph 15 Test Results – Conducted Peak Power Measurements – Low Channel****COMMERCIAL-IN-CONFIDENCE**No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 52 of 100

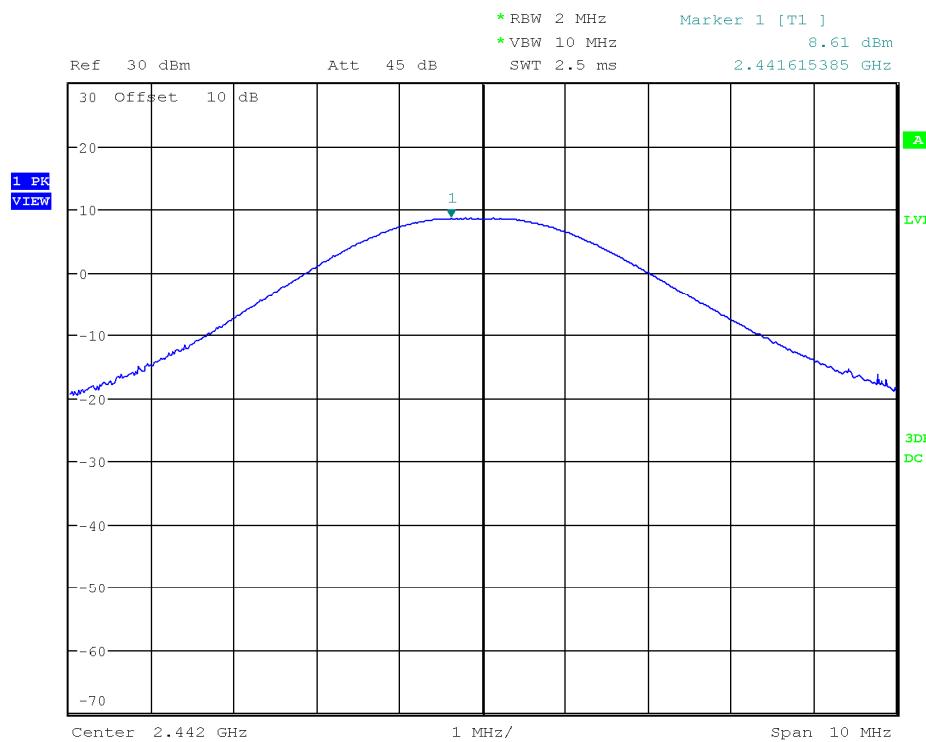


Date: 22.MAR.2019 15:44:37

**Graph 16 Test Results – Conducted Peak Power Measurements – Mid Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

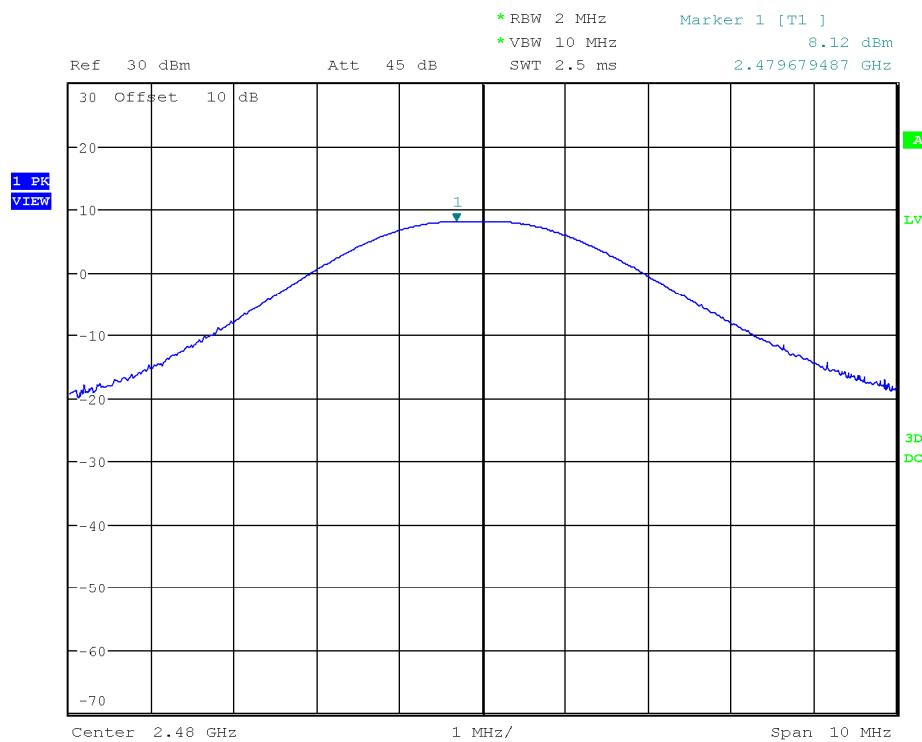


Date: 22.MAR.2019 16:03:59

**Graph 17 Test Results – Conducted Peak Power Measurements – High Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

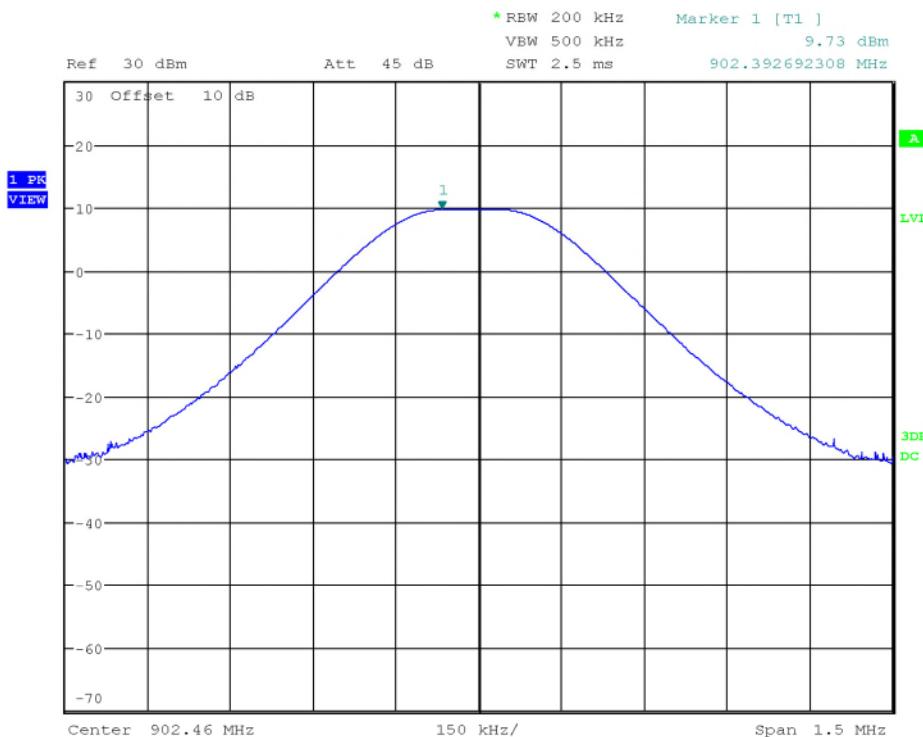
**ZX Wired Thermostat (900MHz)**

Date: 22.MAR.2019 12:57:21

**Graph 18 Test Results – Conducted Peak Power Measurements – Low Channel**


COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

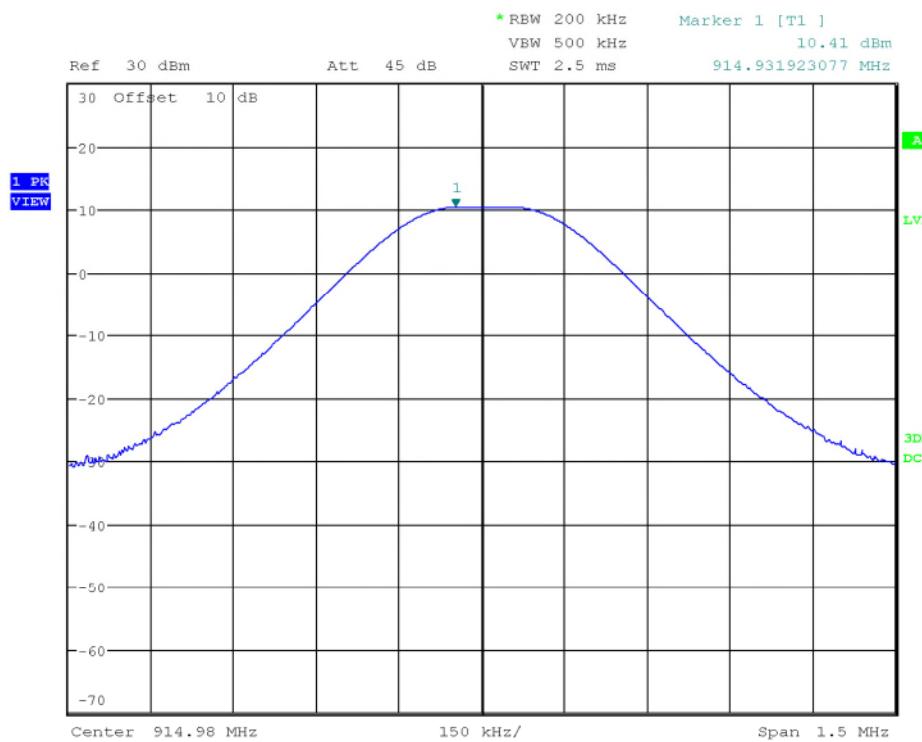

Date: 22.MAR.2019 13:21:37

**Graph 19 Test Results – Conducted Peak Power Measurements – Mid Channel****COMMERCIAL-IN-CONFIDENCE**No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

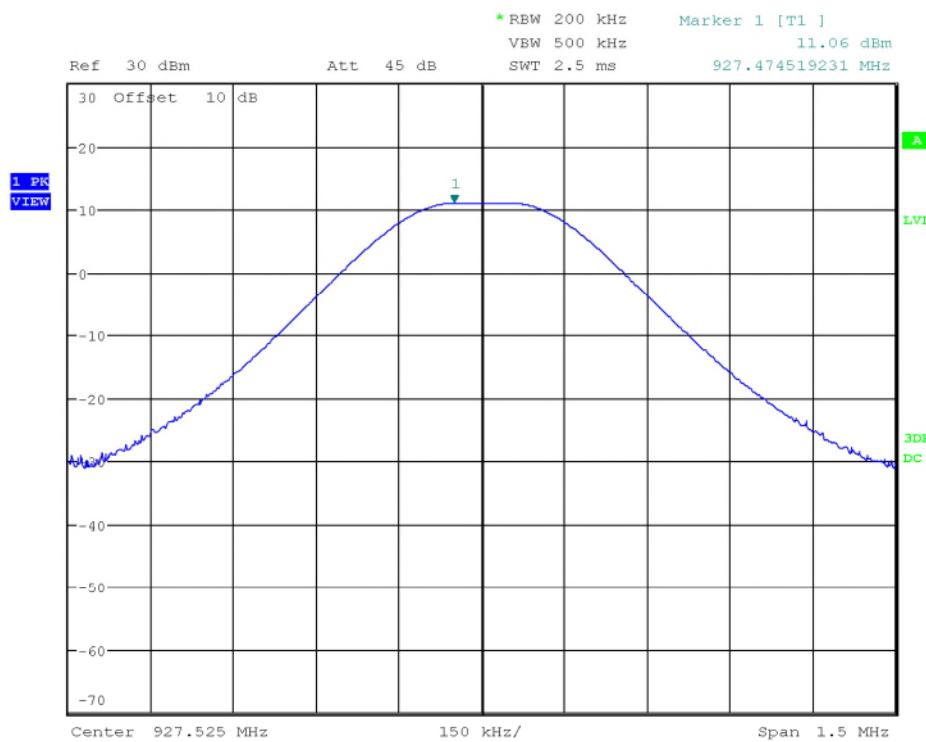

Date: 22.MAR.2019 13:40:56

**Graph 20 Test Results – Conducted Peak Power Measurements – High Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.



## 11.6 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 21.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

**Table 21: Conducted Peak Power Test Equipment**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 58 of 100



## 12 Power Spectral Density

### 12.1 Purpose & Methods

The Purpose & Methods of this test is to ensure that the maximum power spectral density to the radiating element does not exceed the limits specified. This ensures that the modulation is significantly wide enough, or low enough in power that it will allow for co-operation of other wireless devices operating within this frequency allocation. The method applied is the PKPSD described in ANSI C63.10-2013 in Clause 11.10.

### 12.2 Test Specifications

<b>REFERENCE STANDARD</b>	FCC Part 15.247(F) RSS-247 5.2(b) ANSI C63.10. Clause 11.10
<b>SPECIFICATIONS</b>	
<b>Limit (dBm)</b>	<8
<b>Frequencies (MHz)</b>	2402 2442 2480
<b>RBW (kHz):</b>	3
<b>VBW (kHz)</b>	10
<b>Span (MHz)</b>	2
<b>EUT</b>	
<b>Identification</b>	ZX Wired Thermostat
<b>Voltage Input</b>	24Vdc
<b>ENVIRONMENTAL &amp; TEST INFO</b>	
<b>Test Date (YYYY-MM-DD)</b>	2019-03-22
<b>Temperature (°C)</b>	23.4 ± 2
<b>Humidity (%)</b>	36.3 ± 5
<b>Atmospheric Pressure kPa (For Info Only)</b>	109.7
<b>Tester</b>	Abderrahmane Ferhat
<b>Client Witness</b>	No Witness

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 59 of 100



### 12.3 Limits

The limits are defined in 15.247(f)

The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 12.4 Test Results

#### ZX Wired Thermostat (2.4GHz)

The EUT was tested on: Low, medium, and high bands. The worst-case value is the Low Channel with -7.43 dBm as measured with a 3 kHz resolution bandwidth (peak power) on the higher channel #39. The results of the peak power of channels tested are depicted in Table 22.

Channel	Frequency (MHz)	Measured PSD (dBm)	Limit (dBm)	Results
Low	2402	-7.43	<8	Pass
Middle	2442	-7.56	<8	Pass
High	2480	-8.05	<8	Pass

**Table 22- Results – PKPSD**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.


Page 60 of 100



## 12.5 Graphs

The graphs shown below show the power spectral density of the device during the conducted measurement operation of the EUT. Low, middle, and high channel was investigated. No attenuator was used between the EUT and the Spectrum Analyzer.

### ZX Wired Thermostat (2.4GHz)

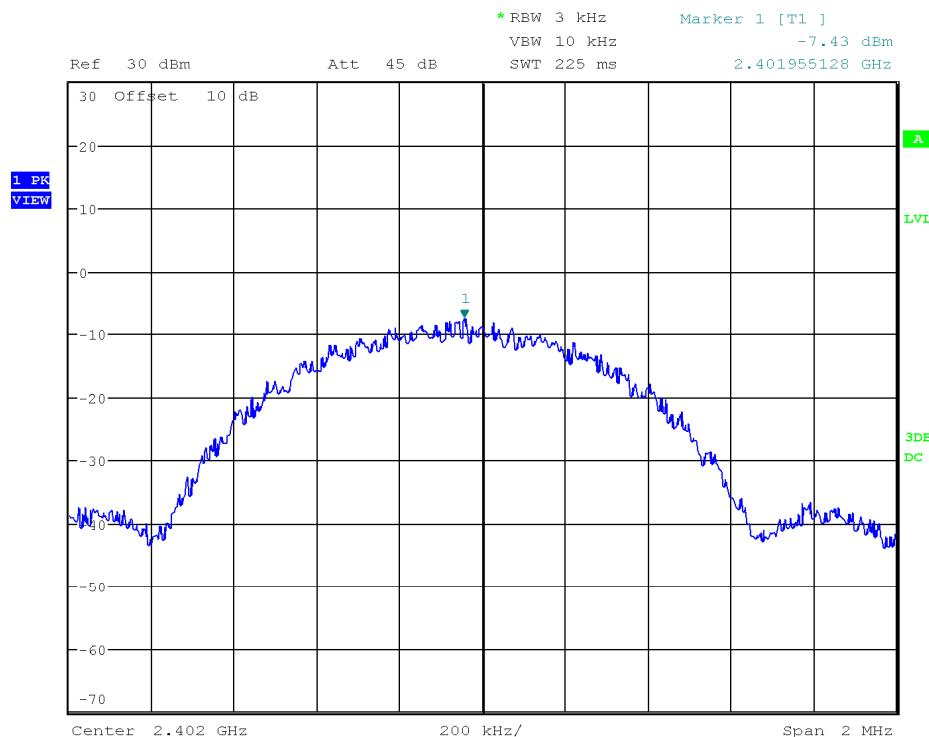

Date: 22.MAR.2019 15:03:16


### Graph 21 Test Results – PKPSD – Low Channel

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.



Product Service

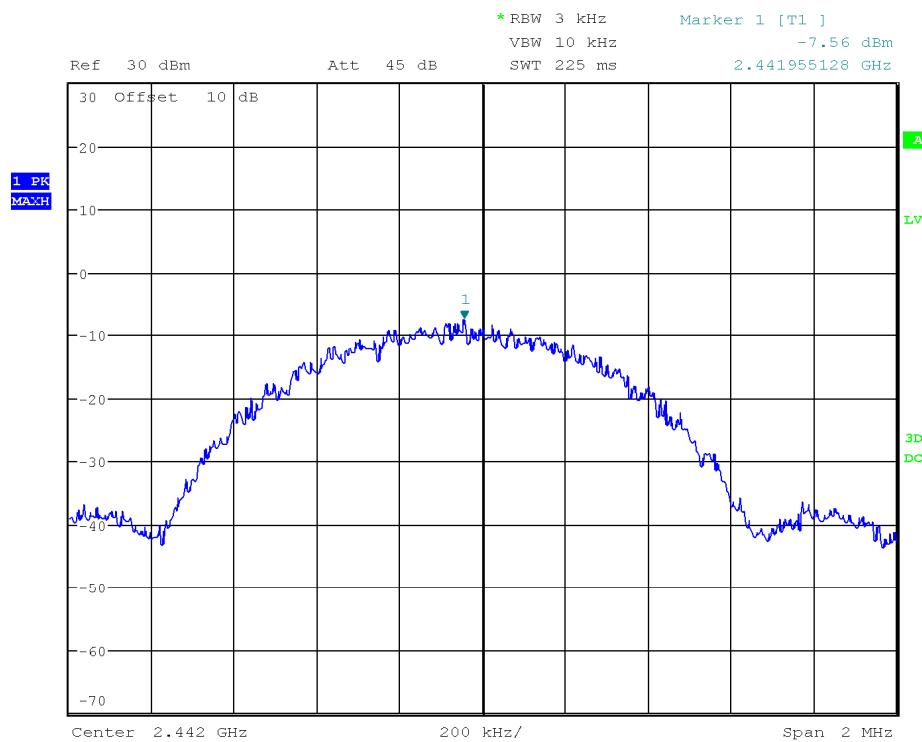


Date: 22.MAR.2019 15:43:10

**Graph 22 Test Results – PKPSD – Mid Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 62 of 100

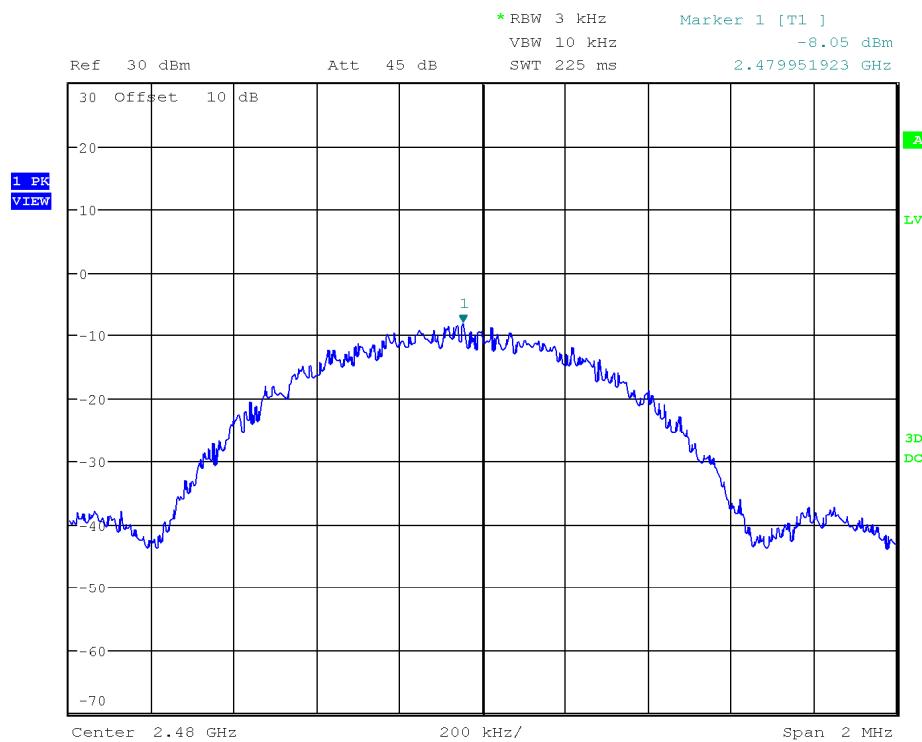

Date: 22.MAR.2019 16:09:28

**Graph 23 Test Results – PKPSD – High Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.



## 12.6 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 23.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

**Table 23 – Test Instrumentation – PKPS**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 64 of 100



## 13 Band Edge Spurious Emission (-20 dBc Requirement)

### 13.1 Purpose & Methods

The Purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element. The method applied is described in ANSI C63.10-2013 in Clause 11.11.1.

### 13.2 Test Specifications

<b>REFERENCE STANDARD</b>	FCC Part 15.247(d) RSS-247 5.5 ANSI C63.10 Clause 11.11.1
---------------------------	---

#### SPECIFICATIONS

<b>Limit (dBc)</b>	<20
--------------------	-----

<b>Frequencies (MHz)</b>	2402	902.46
	2442	915
	2483.5	927.52

#### EUT

<b>Identification</b>	ZX WIRED THERMOSTAT
-----------------------	---------------------

<b>Voltage Input</b>	24 Vdc
----------------------	--------

#### ENVIRONMENTAL & TEST INFO

<b>Test Date (YYYY-MM-DD)</b>	2019-03-22
-------------------------------	------------

<b>Temperature (°C)</b>	23.4 ± 2
-------------------------	----------

<b>Humidity (%)</b>	36.3 ± 5
---------------------	----------

<b>Atmospheric Pressure kPa (For Info Only)</b>	109.7
---	-------

<b>Tester</b>	Abderrahmane Ferhat
---------------	---------------------

<b>Client Witness</b>	No Witness
-----------------------	------------



### 13.3 Limits

The limits are defined in 15.247(d). In any 100 kHz band, the peak spurious harmonics emissions must be at least 20 dB below the fundamental. Band Edge is to be evaluated up to the 10th harmonic. This -20 dBc requirement also applies at the 'band edge' of 2.4 GHz and 2.4835 GHz.

### 13.4 Test Setup

The Setup for the Maximum Peak Power testing is identical to the 99% Bandwidth setup.

### 13.5 Test Results

#### ZX Wired Thermostat (2.4GHz)

The EUT was tested on: Low, medium, and high bands. The worst-case value is -28.88 dBm and on High Channel. The peak power of channels tested are depicted in Table 24.

Frequency Band (MHz)	Channel	Frequency (MHz)	Measured Spurious Conducted (dBm)	Results <Note 1>
2402 – 2480	Low	0.009-0.15	-39.27	Pass
	Low	0.15-30	-38.65	Pass
	Low	30-2400	-29.49	Pass
	Low	2400-2402	-32.01	Pass
	Middle	2402-2483.5	-30	Pass
	High	2483.5-25000	-28.88	Pass

Note 1. The highest level of the fundamental is 8.79 dBm based on RF output Power results (see [Table 19](#))

**Table 24- Results Band Edge – 2.4GHz Band**

**ZX WIRED THERMOSTAT (900MHz)**

The EUT was tested on: Low, medium, and high bands. The worst-case value is -34.65 dBm on Middle channel. The peak power of channels tested are depicted in Table 25.

Frequency Band (MHz)	Channel	Frequency (MHz)	Measured Spurious Conducted (dBm)	Results <Note 1>
902 – 907.6	Low	0.009-0.15	-49.94	Pass
	Low	0.15-30	-48.16	Pass
	Low	30-1000	-42.5	Pass
	Low	900-902.46	-33.73	Pass
	Middle	902 - 928	-34.65	Pass
	High	1000 - 10000	-38.55	Pass


Note 1. The highest level of the fundamental is 8.79 dBm based on RF output Power results (see [Table 20](#))

**Table 25- Results – Band Edge – 900GHz Band****13.6 Graphs**

The graphs shown below show the worst-case peak power output of the device during the antenna conducted measurement during transmit operation of the EUT. No attenuator was used between the EUT and the Spectrum Analyzer.

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

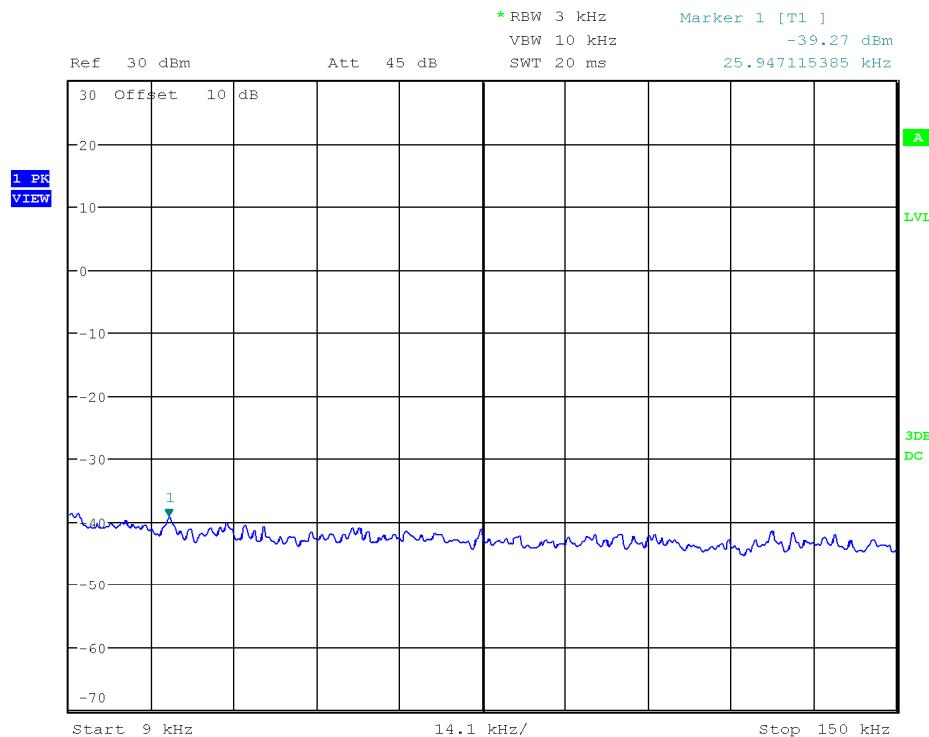**ZX Wired Thermostat (2.4GHz)**

Date: 22.MAR.2019 15:18:48


**Graph 24 Test Results – Low Band Edge – 9kHz to 150kHz – Low Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.



Product Service

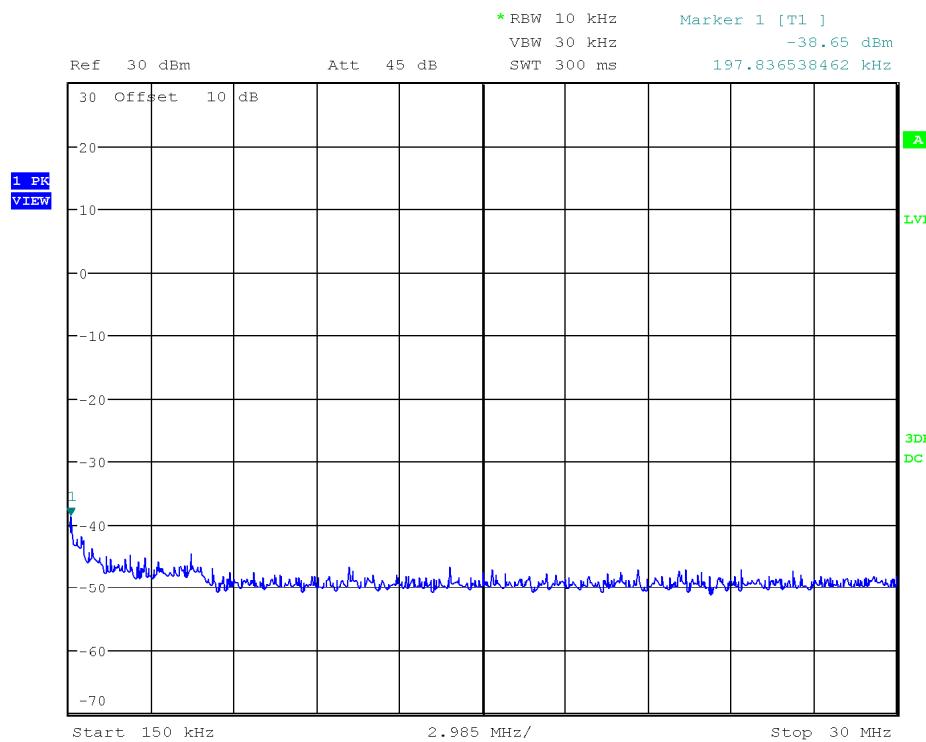

Date: 22.MAR.2019 15:16:56

### Graph 25 Test Results – Band Edge –150kHz to 30MHz – Low Channel


COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 69 of 100



Product Service

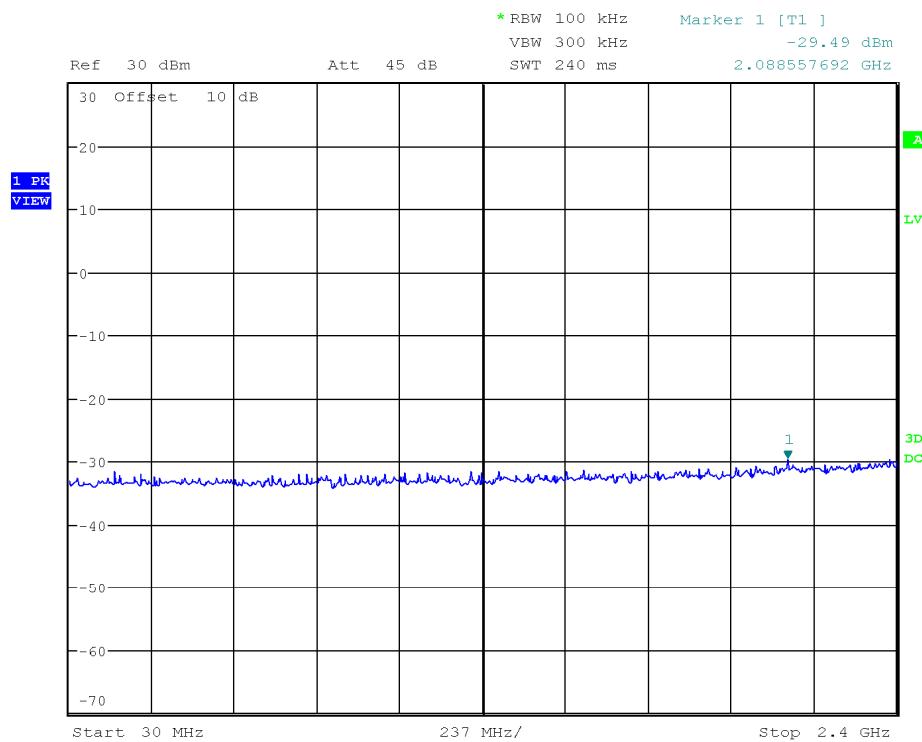


Date: 22.MAR.2019 15:26:02

### Graph 26 Test Results – Band Edge –30MHz to 2.4GHz– Low Channel

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 70 of 100

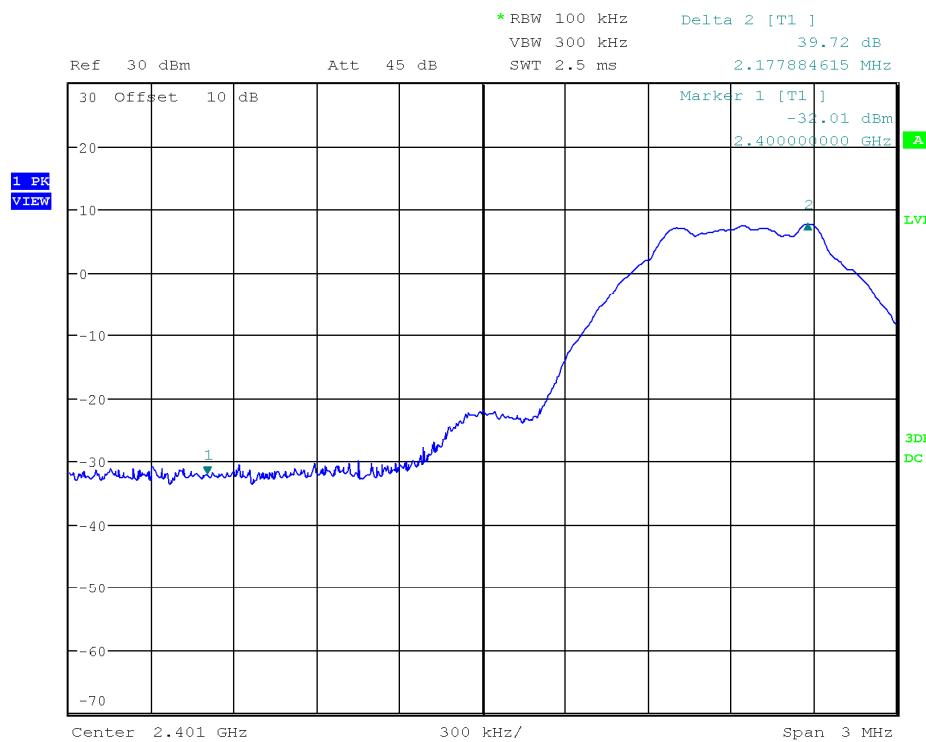

Date: 22.MAR.2019 15:28:12

## Graph 27 Test Results – Band Edge –2.4GHz to 2.402GHz– Mid Channel


COMMERCIAL-IN-CONFIDENCE

CONFIDENTIAL IN CONFIDENCE  
No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 71 of 100



Product Service

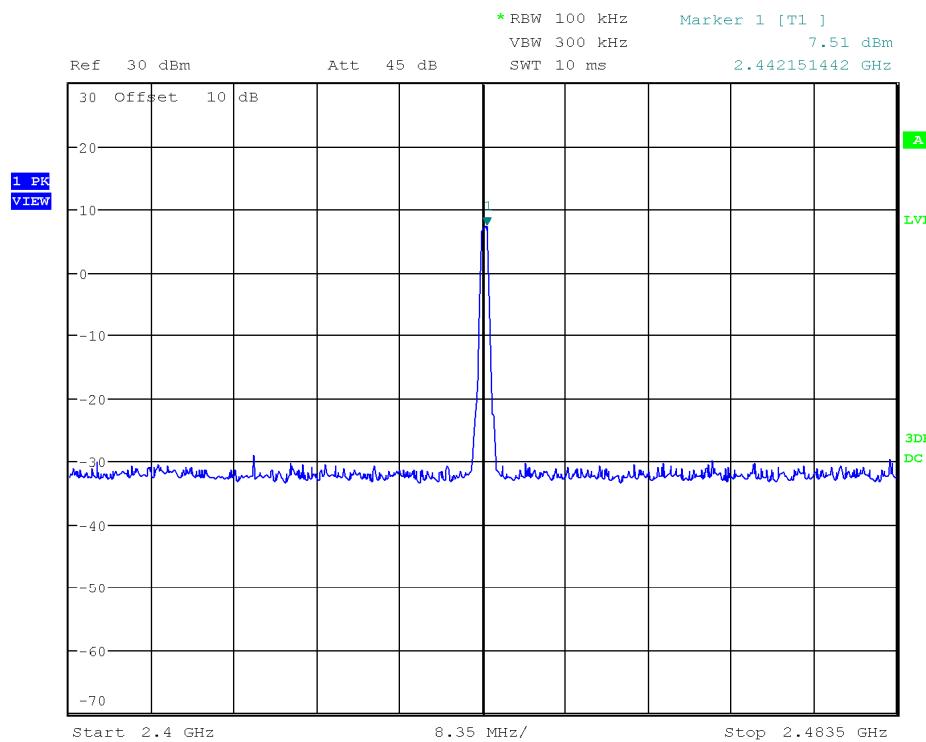


Date: 22.MAR.2019 15:32:01

**Graph 28 Test Results – Band Edge –2.402GHz to 2.4835GHz– Mid Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 72 of 100

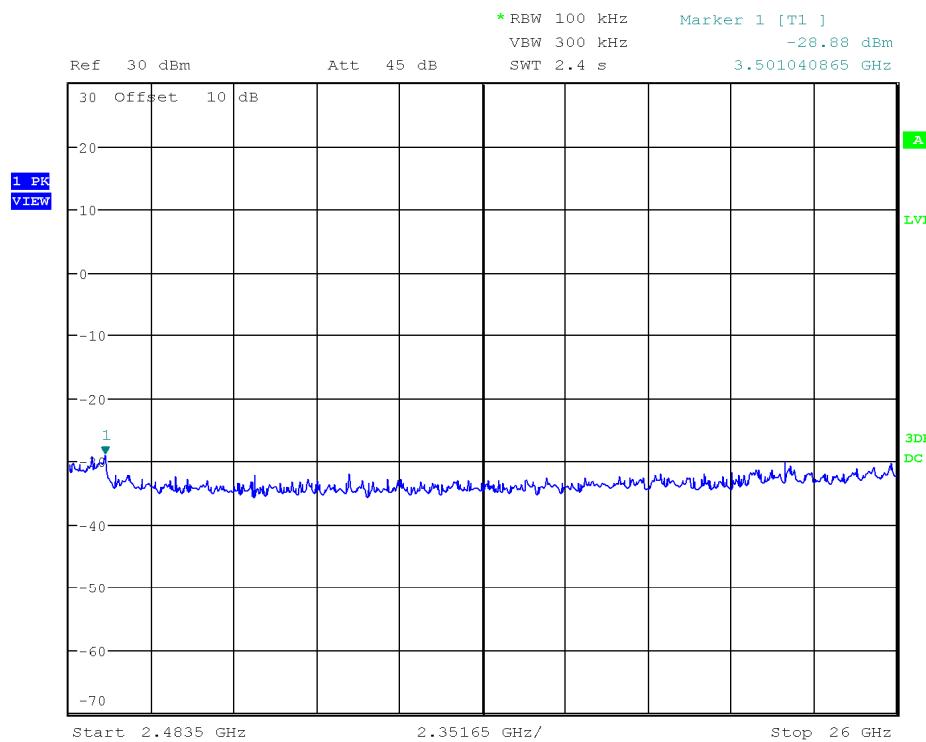


Date: 22.MAR.2019 16:05:39

### Graph 29 Test Results – Band Edge –2.4835GHz to 25GHz– High Channel

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

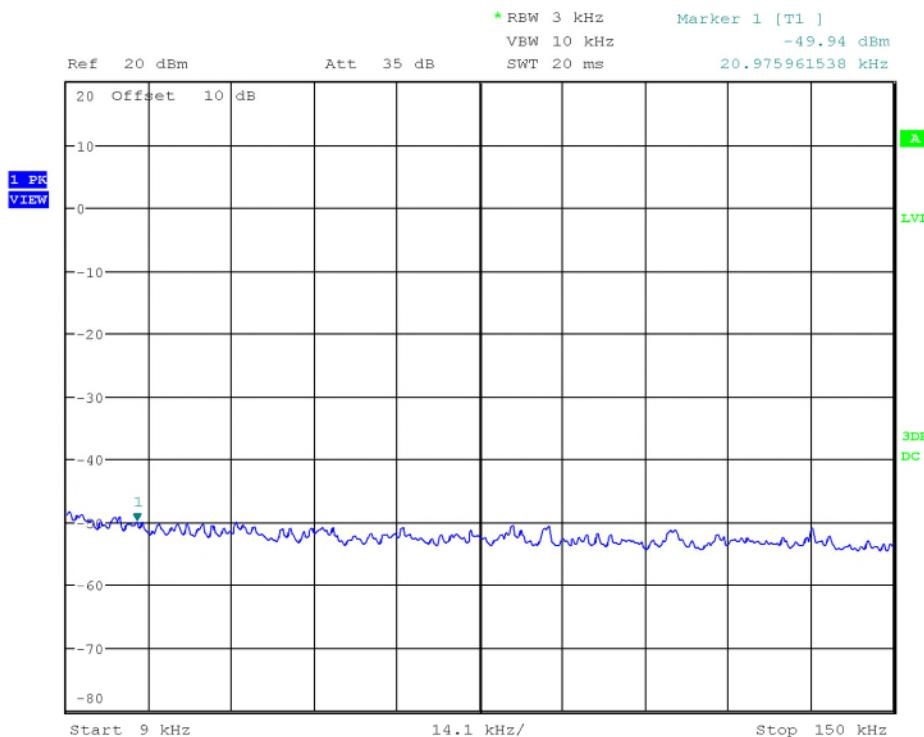**ZX Wired Thermostat (900MHz)**

Date: 22.MAR.2019 13:12:00


**Graph 30 Test Results – Band Edge – 9kHz to 150kHz – Low Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.



Product Service

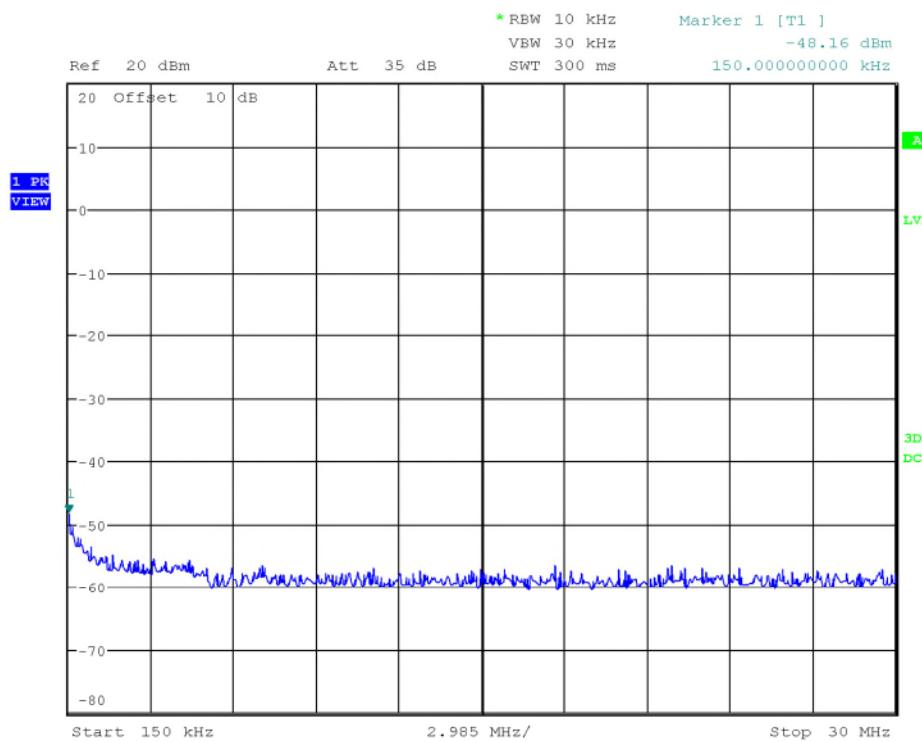

Date: 22.MAR.2019 13:13:28

**Graph 31 Test Results – Band Edge –150kHz to 30MHz – Low Channel**


COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 75 of 100



Product Service

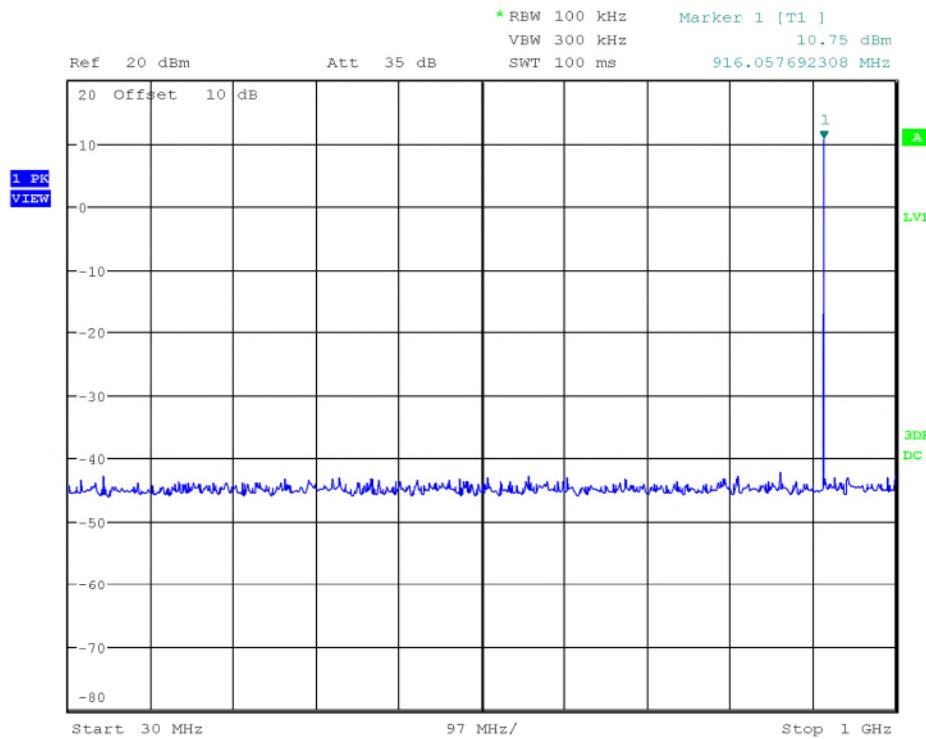


Date: 22.MAR.2019 13:15:23

**Graph 32 Test Results – Band Edge –30MHz to 1GHz – Low Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 76 of 100

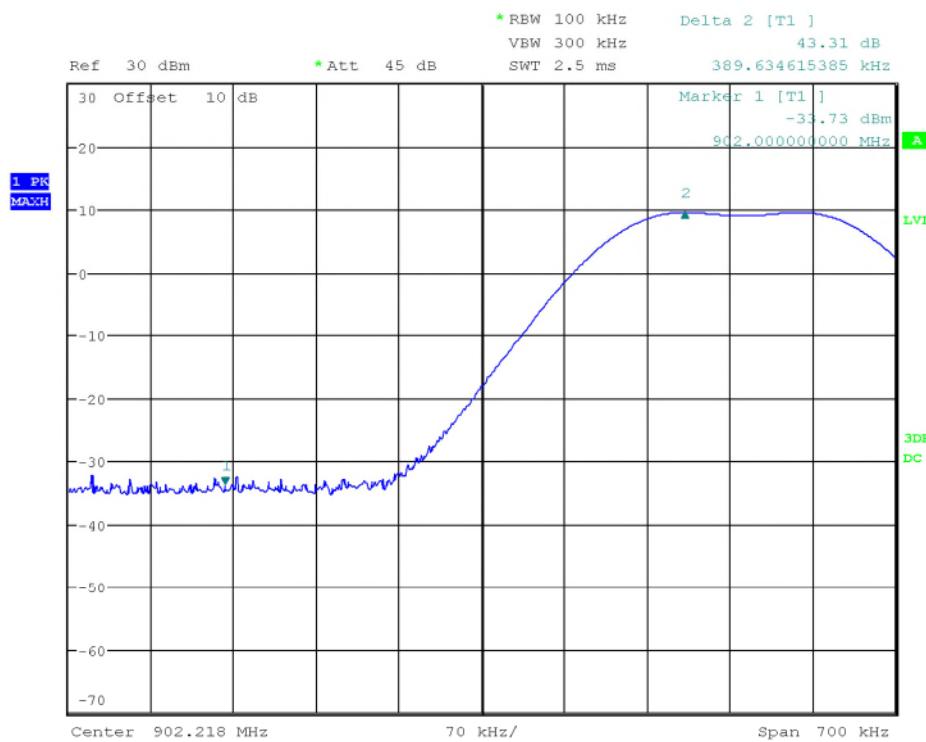


Date: 22.MAR.2019 13:42:43

### Graph 33 Test Results – Band Edge – 900MHz to 902.46 MHz– Mid Channel

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

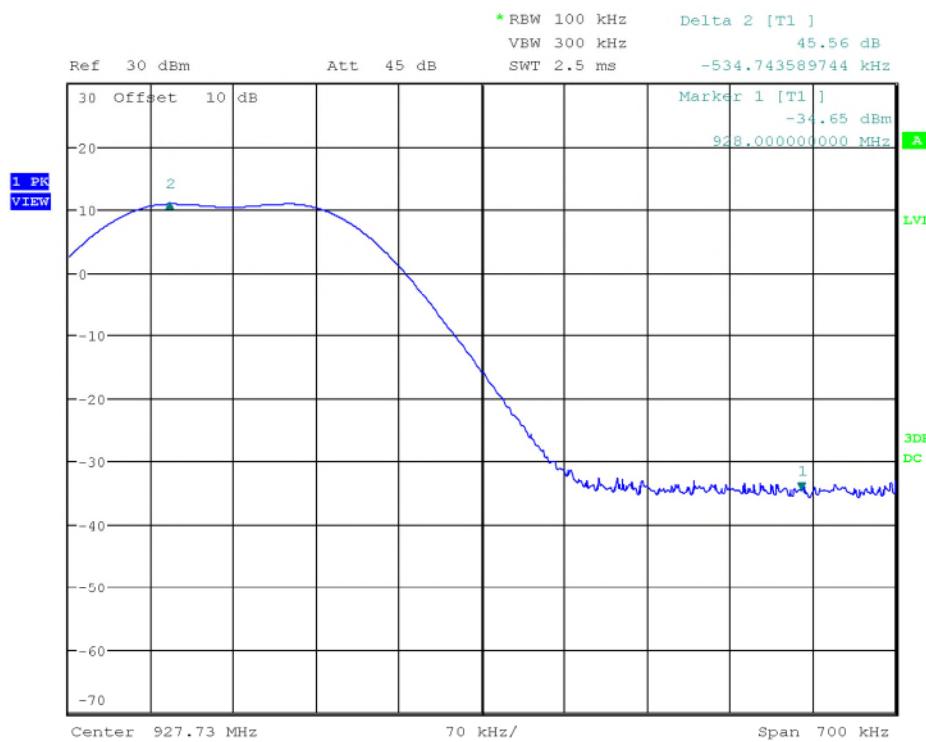

Date: 22.MAR.2019 13:39:08


**Graph 34 Test Results – Band Edge – 902 to 928MHz– Mid Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.



Product Service

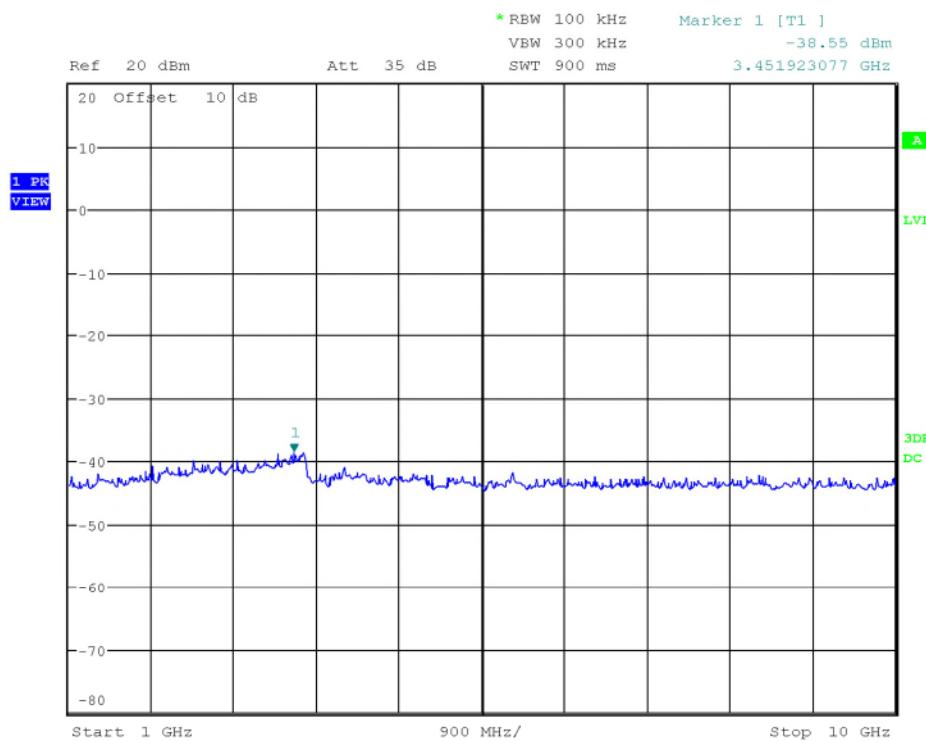

Date: 22.MAR.2019 13:45:38

**Graph 35 Test Results – Band Edge –1GHz to 10 GHz – High Channel**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

Page 79 of 100



### 13.7 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 26.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No: LAVE
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
Attenuator 10 dB	4779-10	Narda	NCR	NCR	4096

**Table 26 – Test Instrumentation – Band Edge**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 80 of 100



## 14 Tx Spurious Radiated Emissions

### 14.1 Purpose & Methods

The Purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference. The method is as defined in Section 12.1 of FCC KDB 558074 and ANSI C63.10.

All unintentional emissions must also meet the 'Spurious Conducted Emissions' requirements of -20 dBc or greater. See also '[Band Edge](#)' for further details. Limits are depicted in Table 27.

Frequency	Limit
0.009 MHz – 0.490 MHz	2400/F(kHz) uV/m at 300m <sup>(1)</sup>
0.490 MHz – 1.705 MHz	24000/F(kHz) uV/m at 30m <sup>(1)</sup>
1.705 MHz – 30 MHz	30 uV/m at 30m <sup>(1)</sup>
30 MHz – 88 MHz	100 uV/m (40.0 dBuV/m) at 3m <sup>(1)</sup>
88 MHz – 216 MHz	150 uV/m (43.5 dBuV/m) at 3m <sup>(1)</sup>
216 MHz – 960 MHz	200 uV/m (46.0 dBuV/m) at 3m <sup>(1)</sup>
Above 960 MHz	500 uV/m (54.0 dBuV/m) at 3m <sup>(1)</sup>
Above 1000 MHz	500 uV/m (54 dBuV/m) at 3m <sup>(2)</sup>
Above 1000 MHz	500 uV/m (74 dBuV/m) at 3m <sup>(3)</sup>

<sup>(1)</sup>Limit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1  
<sup>(2)</sup>Limit is with 1 MHz measurement bandwidth and using an Average detector  
<sup>(3)</sup>Limit is with 1 MHz measurement bandwidth and using a Peak detector

**Table 27 Limits – Tx Spurious**

Based on ANSI C63.4 Section 4.2, if the Peak detector measurements do not exceed the Quasi-Peak limits, where defined, then the EUT is deemed to have passed the requirements.



## 14.2 Test Specifications

**REFERENCE STANDARD** FCC Part 15.209(a)  
RSS-247 5.5  
ANSI C63.10 Clause 5.5

### SPECIFICATIONS

**Limit (dBuV/m)** [See table 28](#)

<b>Frequencies (MHz)</b>	2402	902.46
	2442	915
	2480	927.52

### EUT

**Identification** ZX WIRED THERMOSTAT

**Voltage Input** 24 Vdc

### ENVIRONMENTAL & TEST INFO

<b>Test Date (YYYY-MM-DD)</b>	2019-02-26	2019-03-13	2019-03-14
<b>Temperature (°C)</b>	243 ± 2	23.3 ± 2	23 ± 2
<b>Humidity (%)</b>	14 ± 5	24 ± 5	20 ± 5
<b>Atmospheric Pressure kPa (For Info Only)</b>	101.6	102.6	101
<b>Tester</b>	Abderrahmane Ferhat		
<b>Client Witness</b>	No Witness		

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 82 of 100



### 14.3 Limits

The limits, as defined in 15.247(d) for intentional radiated emissions, apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

### 14.4 Results

The EUT passed. Low, medium, and high bands were tested. The worst-case are only presented and final measurements are given in [Appendix A](#).

Channel	Frequency Range (MHz)	Frequency (MHz)	Polarization	Detector	Limit	Margin	Results <Note 2>
Low	0.009 – 0.015	-	-	-		Note 1	Pass
	0.015 – 30						Pass
	30 – 1000						Pass
	>1000						Pass
Mid	0.009 – 0.015	-	-	-		Note 1	Pass
	0.015 – 30						Pass
	30 – 1000	194.441	Vertical	Quasi-Peak			6
	>1000	Pass					
High	0.009 – 0.015	-	-	-		Note 1	Pass
	0.015 – 30						Pass
	30 – 1000			Quasi-Peak			Pass
	>1000			Average			Pass

See  
Table 27

Note 1: No significant emission, i.e., 10dB below the limit was noted

Note 2: For Worst cases final measurements please refer to [Appendix A](#): Table A5

**Table 28 – Test Results for Tx Spurious Emission – Worst Cases(2.4GHz)**



Channel	Frequency Range (MHz)	Frequency (MHz)	Polarization	Detector	Limit	Margin	Results <Note 2>
Low	0.009 – 0.015	-	-	-		Note 1	Pass
	0.015 – 30						Pass
	30 – 1000						Pass
	>1000						Pass
Mid	0.009 – 0.015	-	-	-	See Table 27	Note 1	Pass
	0.015 – 30						Pass
	30 – 1000	194.58	Vertical	Quasi-Peak		5.5	Pass
	>1000	2467.75	Vertical	Average		4.9	Pass
High	0.009 – 0.015	-	-	-		Note 1	Pass
	0.015 – 30						Pass
	30 – 1000			Quasi-Peak			Pass
	>1000			Average			Pass

Note 1: No significant emission, i.e., 10dB below the limit was measured.  
 Note 2: For Worst cases final measurements please refer to [Appendix A](#): Table A1 to Table A4.

**Table 29 – Test Results for Tx Spurious Emission – Worst Cases(900MHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.



## 14.5 Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector over a full 0-360°. This peaking process is done as a worst-case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10th harmonic (a minimum of 24.835 GHz).


Devices scanned may be scanned at alternate test distances and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz for example, for 1-meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.

Low, middle and high channels. However, the worst-case graphs are presented.

**COMMERCIAL-IN-CONFIDENCE**


No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 85 of 100

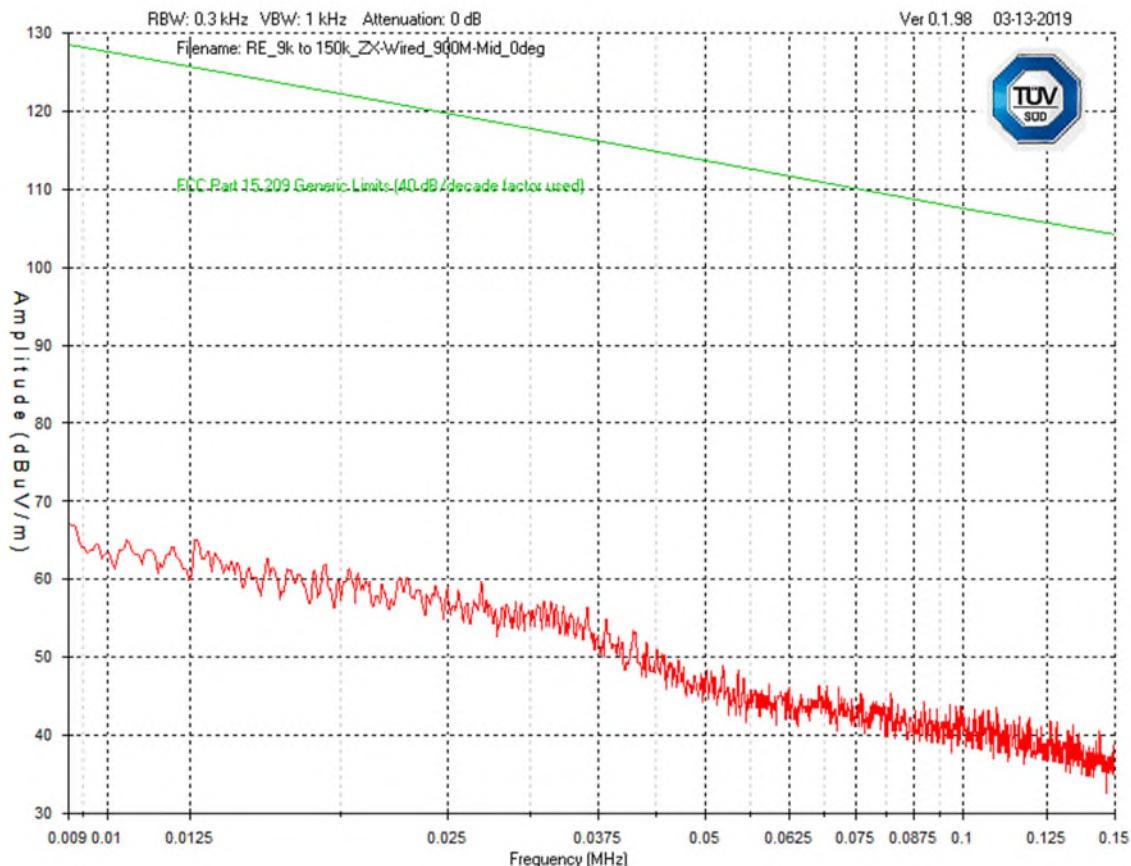**Frequency range from 9kHz to 150kHz****Graph 36 Test Results – Tx Spurious emission 9kHz – 150kHz: Mid Channel ZX Wired Thermostat (900MHz)**


COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

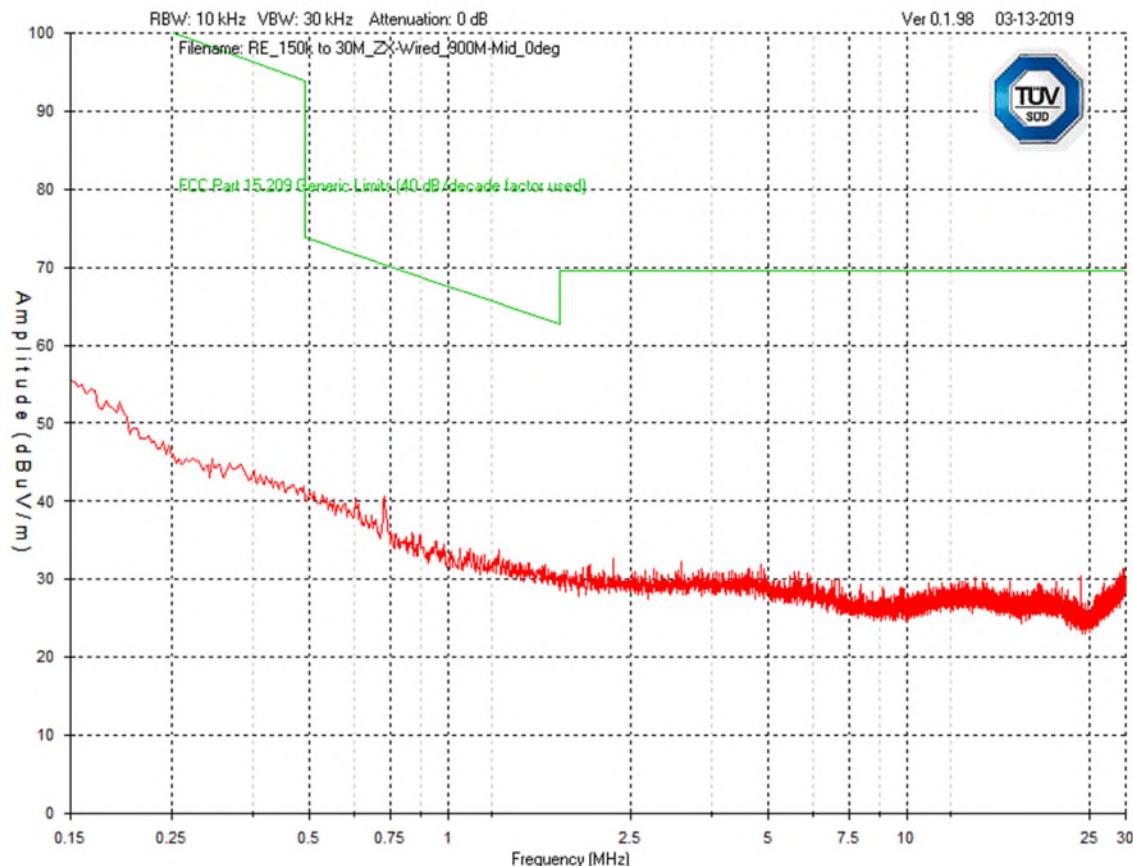**Frequency range from 150kHz to 30MHz****Graph 37 Test Results – Tx Spurious emission 150kHz – 30MHz: Mid Channel ZX Wired Thermostat (900MHz)**


COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

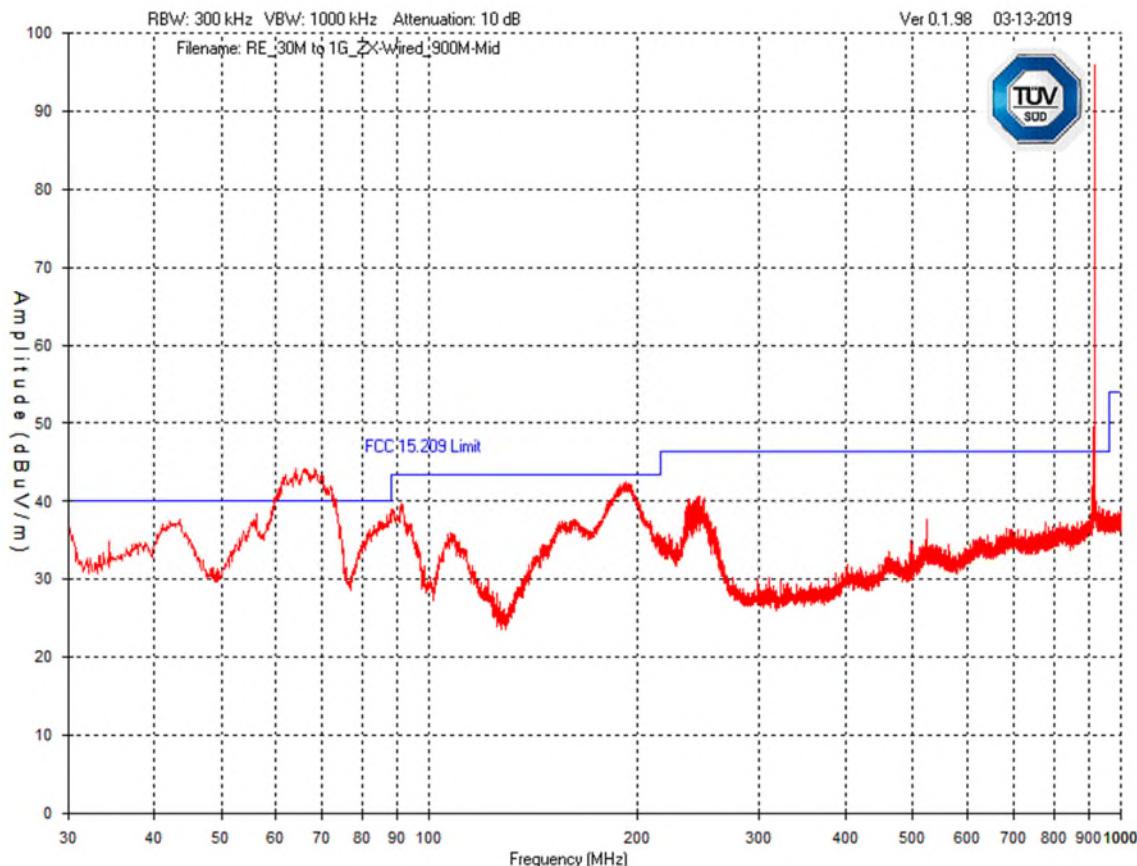
**Frequency Range from 30MHz to 1GHz – Worst case – Mid Channel****Graph 38 Test Results – Tx Spurious emission 30MHz – 1GHz (Vertical polarisation): Mid Channel ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

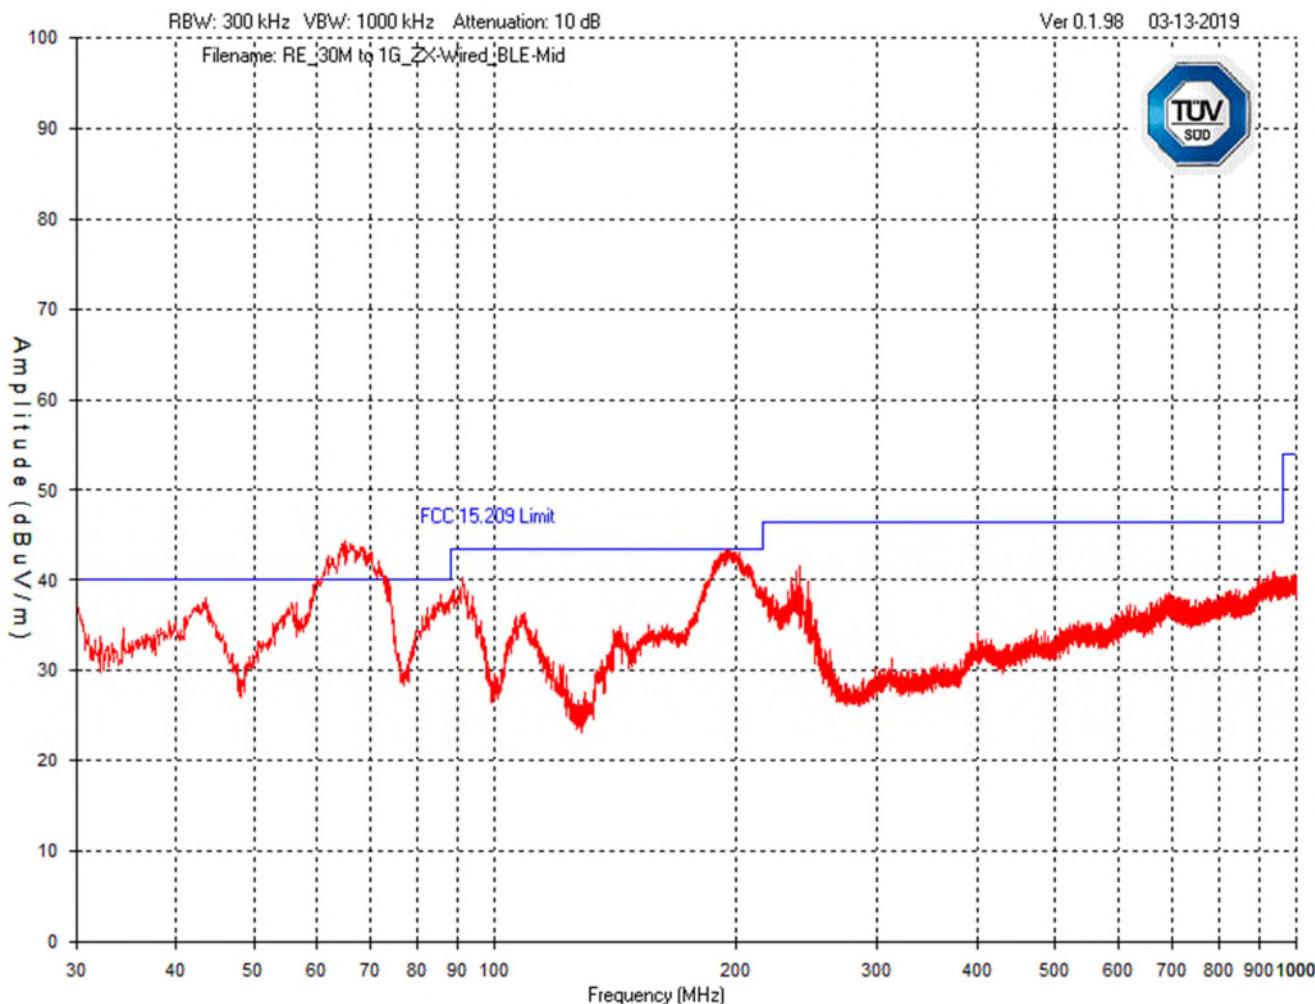

**Graph 39 Test Results – Tx Spurious emission 30MHz – 1GHz (Vertical polarisation): Mid Channel ZX Wired Thermostat (2.4GHz)**

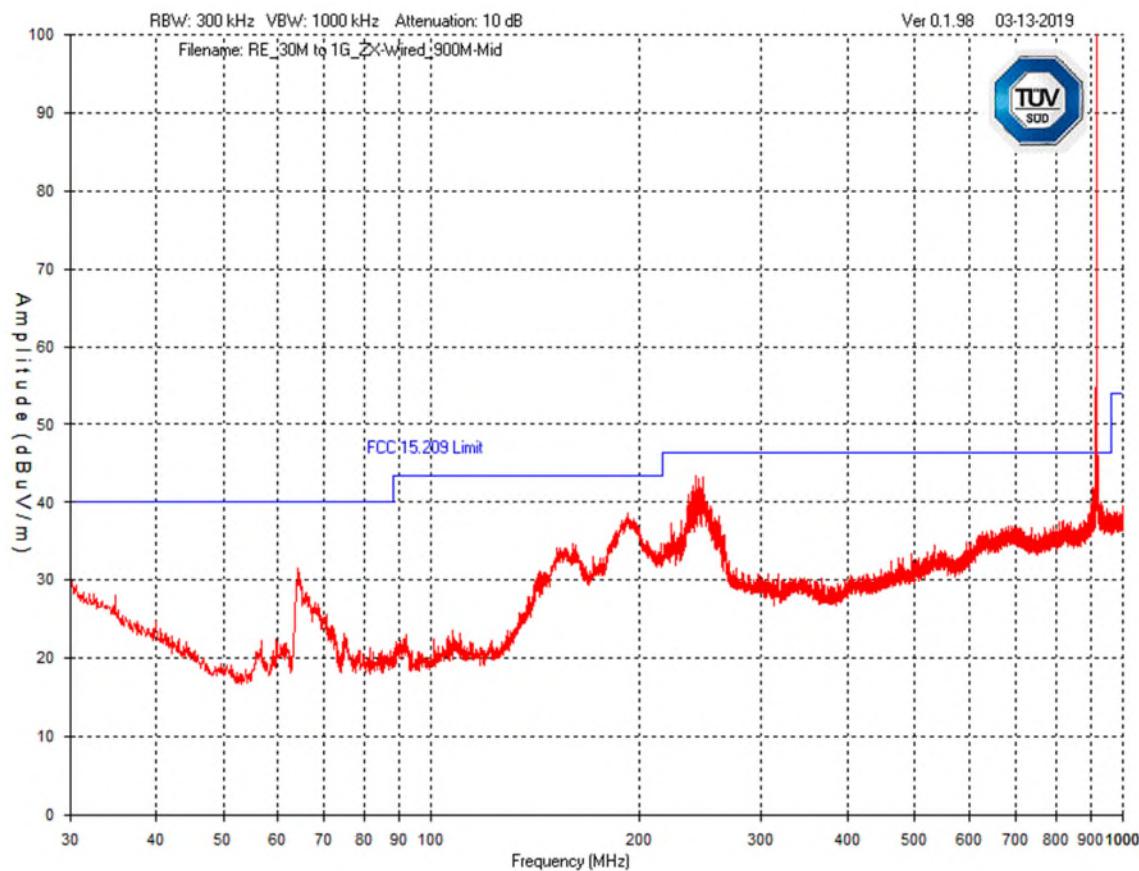


**Graph 40 Test Results – Tx Spurious emission 30MHz – 1GHz (Horizontal polarisation): Mid Channel ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 90 of 100

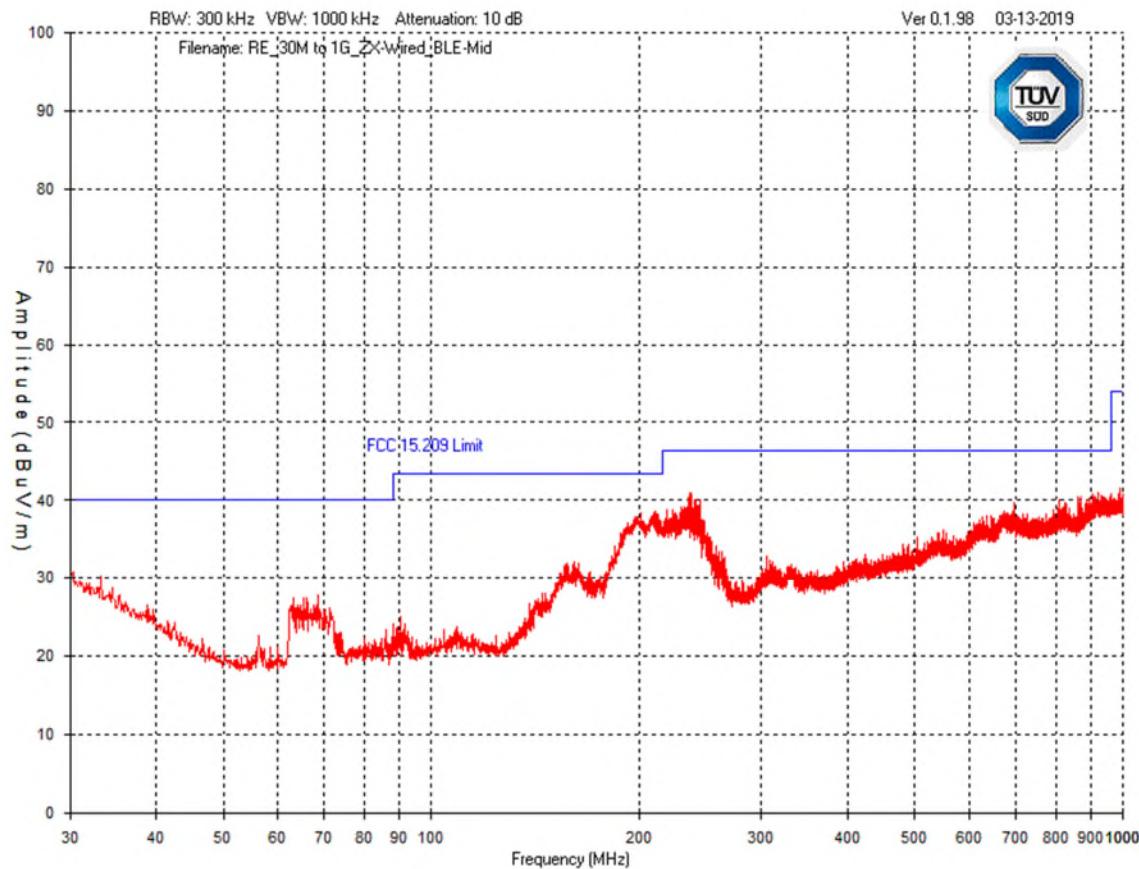


**Graph 41 Test Results – Tx Spurious emission 30MHz – 1GHz (Horizontal polarisation): Mid Channel ZX Wired Thermostat (2.4GHz)**

COMMERCIAL-IN-CONFIDENCE


No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 91 of 100

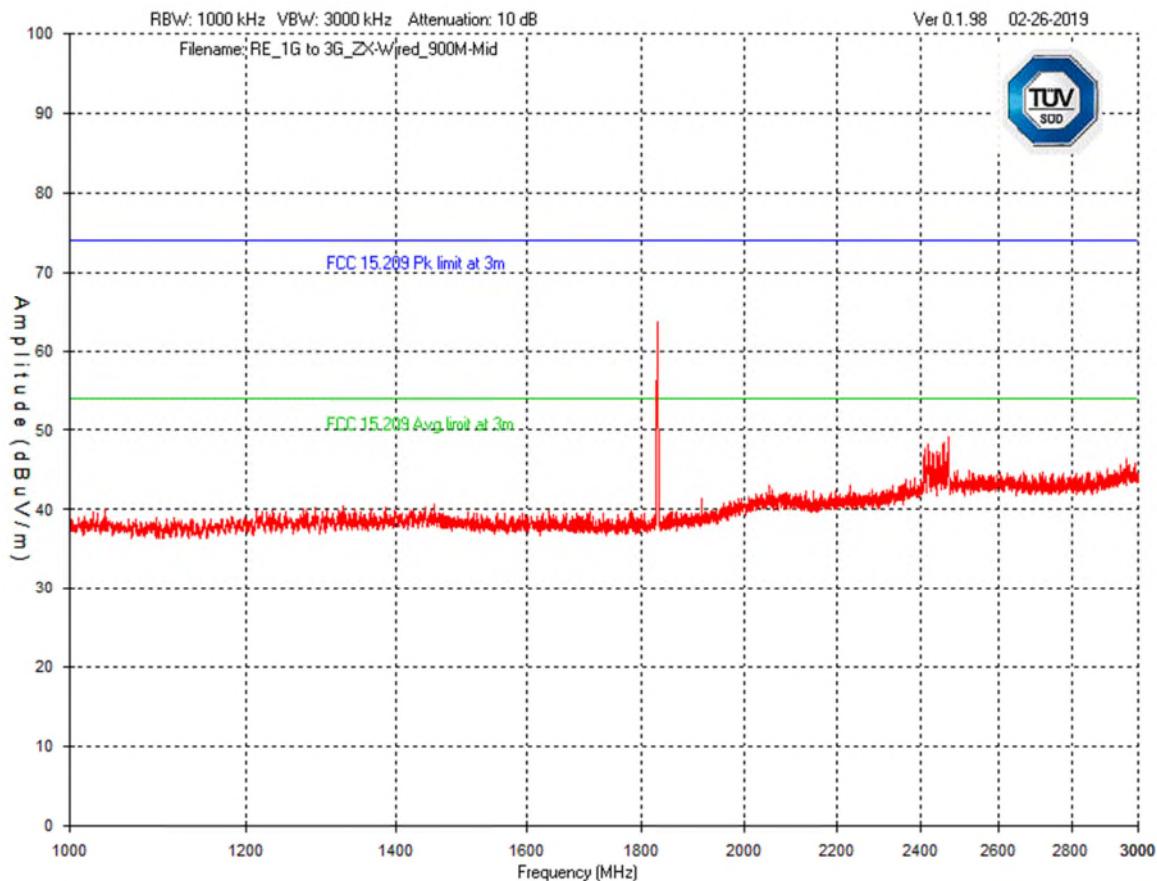**Frequency Range from 1GHz to 3GHz – Worst case – Mid Channel****Graph 42 Test Results – Tx Spurious emission 1GHz – 3GHz-(Vertical polarisation): Mid Channel ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE


No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

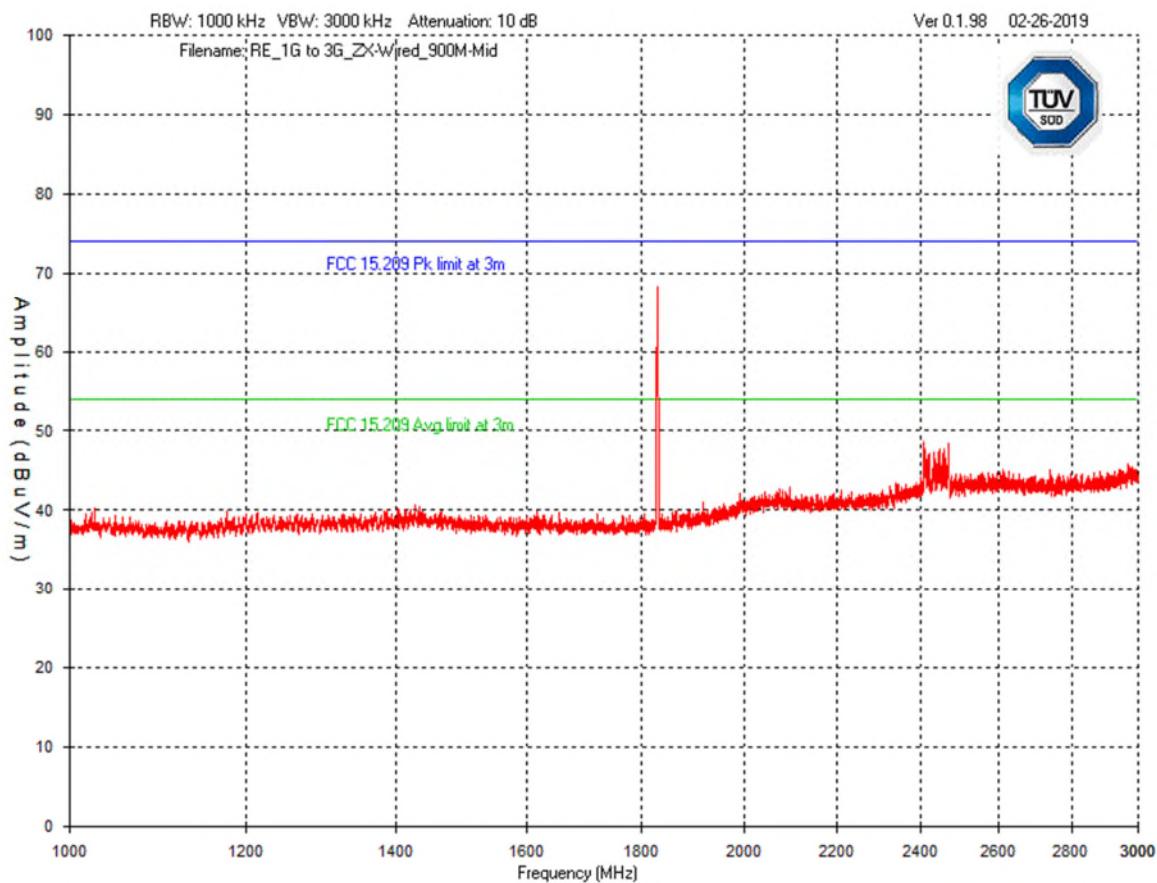

**Graph 43 Test Results – Tx Spurious emission 1GHz – 3GHz-(Horizontal polarisation): Mid Channel ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE


No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

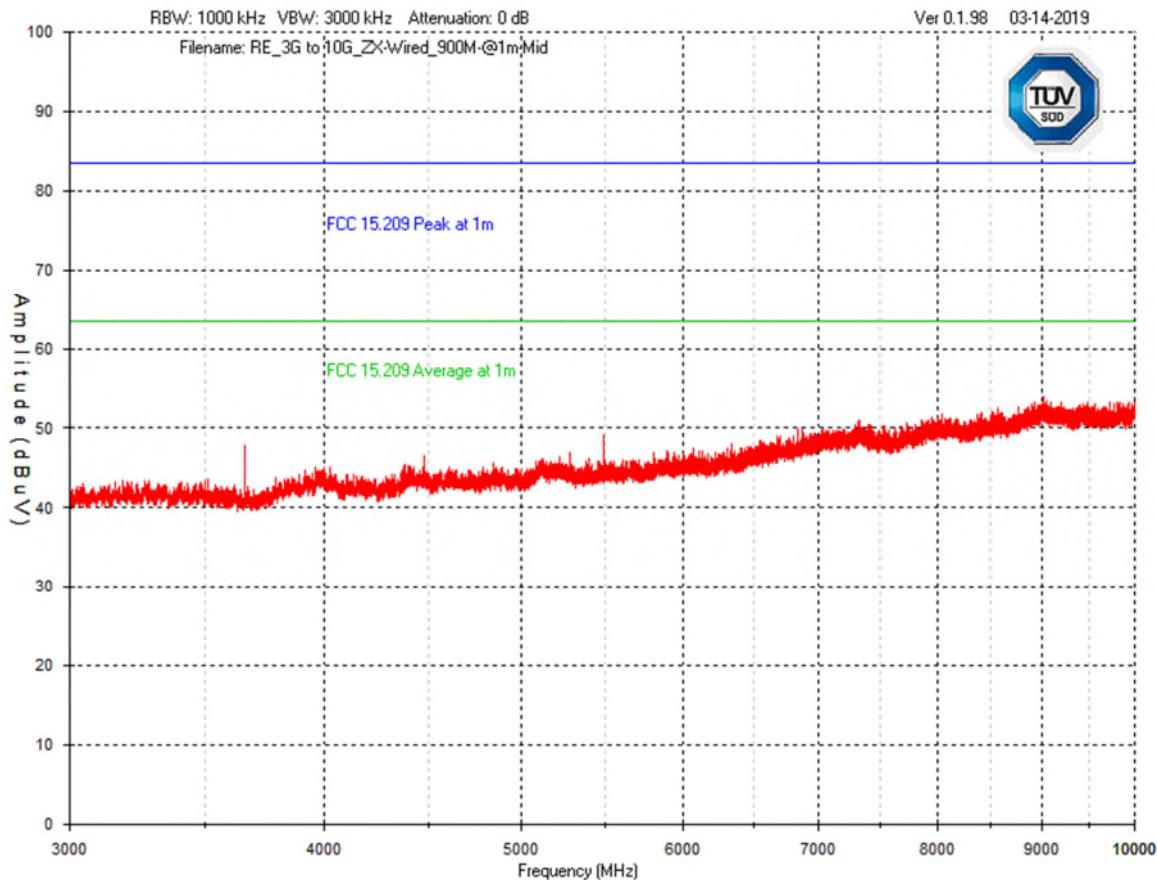**Frequency Range from 3GHz – 10GHz – Worst case – Mid Channel**

**Graph 44 Test Results – Tx Spurious emission 3GHz – 10GHz (Vertical polarisation): Mid Channel ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV  
SÜD.

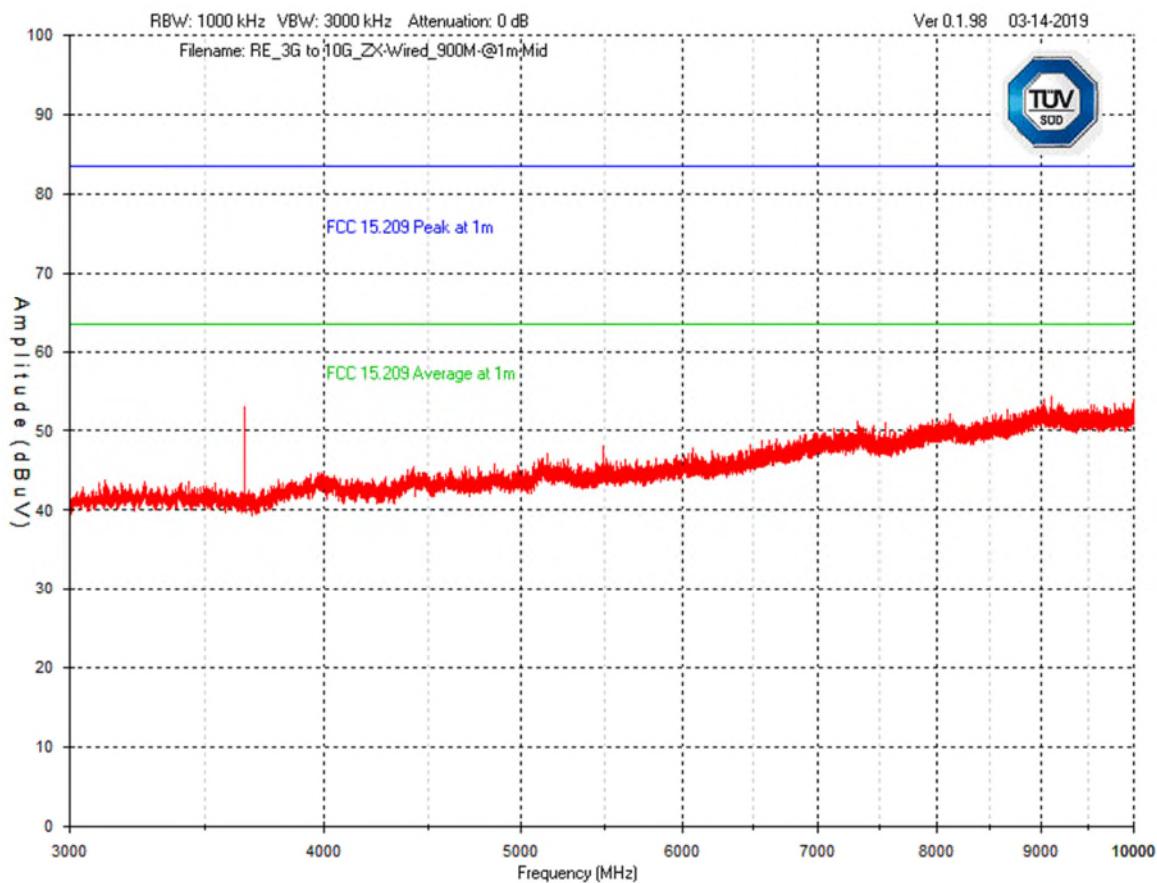

**Graph 45 Test Results – Tx Spurious emission 3GHz – 10GHz (Horizontal polarisation): Mid Channel ZX Wired Thermostat (900MHz)**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 95 of 100



## 14.6 Test Instruments

This test was carried out in Laval test location. Instrumentation used is depicted in Table 30.

Equipment	Model No.	Manufacturer	Calibration Period (months)	Calibration Due (YYY-MM-DD)	Asset No LAV0
Spectrum Analyzer	ESU-40	Rohde & Schwarz	24	2019-04-20	4092
BiLog Antenna	3142-E	ETS	24	2020-11-29	4002
Horn Antenna	ATH1G18G	AR	24	2019-04-25	4003
Biconical Antenna	EM-6913	Electro-Metrics	24	2019-05-02	4060
Log Periodic Antenna	LPA-25	Electro-Metrics	24	2019-04-20	4087
Loop Antenna	EM 6879	Electro-Metrics	24	2019-04-19	4040
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	4028
LNA pre-amp	LNA-1450	RF Bay Inc.	24	2019-07-22	4089
1-26.5GHz preamp	8449B	Agilent	24	2019-09-09	4006
RF Cable 10m	LMR-400-10M-50OHM-MN-MN	LexTec	NCR	NCR	4025
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	4026
Emission software	0.1.97	Global EMC	NCR	NCR	58

**Table 30 – Test Instrumentation – Tx Spurious Emission**

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. © TÜV SÜD.

Page 96 of 100



## APPENDIX A: Tx Spurious Emissions – Worst Cases

COMMERCIAL-IN-CONFIDENCE

No part of this document may be reproduced without the prior written approval of TÜV SÜD Canada. ©  
TÜV SÜD.

Page 97 of 100



Frequency (MHz)	Detector	Raw Reading	Antenna Factor (dB/m)	Atten Factor (dB)	Cable Factor (dB)	Pre-Amp (dB)	Level	FCC 15.209 Limit	FCC 15.209 Limit Margin
66.2172	QP	46.2	11.4	4	0.7	-33.4	28.9	40	11.1
194.58	QP	51.7	14.5	4	1.1	-33.3	38	43.5	5.5
43.3994	QP	38.3	13.6	4	0.6	-33	23.5	40	16.5
30.0971	QP	28.7	21.3	4	0.5	-32.4	22.1	40	17.9
91.2683	QP	41.4	11.3	4	0.8	-33.5	24	43.5	19.5
108.26	Peak	52.2	13.2	4	0.9	-33.5	36.8	43.5	6.7

**Table A.1 Tx Spurious Emission Mid Channel (900MHz) – 30MHz- 1GHz – Vertical Polarization-QP**

Frequency (MHz)	Detector	Raw Reading	Antenna Factor (dB/m)	Atten Factor (dB)	Cable Factor (dB)	Pre-Amp (dB)	Level	FCC 15.209 Limit	FCC 15.209 Limit Margin
198.063	QP	48.1	14.5	4	1.1	-33.3	34.4	43.5	9.1
241.963	QP	41.3	16.4	4	1.2	-33.3	29.6	46.4	16.8
237.594	QP	41	16.4	4	1.2	-33.3	29.3	46.4	17.1
64.3724	QP	34.4	11.3	4	0.7	-33.4	17	40	23
30.0971	Peak	36.4	21.3	4	0.5	-32.4	29.8	40	10.2
106.707	Peak	40.8	13.2	4	0.9	-33.5	25.4	43.5	18.1
914.943	Peak	97.8 <Note 1>	28.3	4	2.3	-32.3	100.1	46.4	-53.7 <Note 1>

Note 1. Transmitter Frequency excluded from the limits.

**Table A.2 Tx Spurious Emission Mid Channel (900MHz) – 30MHz – 1GHz – Horizontal Polarization- QP**



Frequency (MHz)	Detector	Raw Reading	Antenna Factor (dB/m)	Atten Factor (dB)	Cable Factor (dB)	Pre-Amp (dB)	Level	FCC 15.209 Limit	FCC 15.209 Limit Margin
1830	AVG	47.9 <Note 1>	24.9	3.3	0.2	-33.1	63.2	54	10.8
2467.75	Peak	49.3	28.4	4.2	0.3	-33.1	49.1	54	4.9
2416.56	Peak	48.8	28.2	4.1	0.3	-33.1	48.3	54	5.7
2407.98	Peak	48.2	28.2	4.1	0.3	-33.1	47.7	54	6.3
2584.73	Peak	43.4	29	4.3	0.4	-33.1	44	54	10
1000	Peak	42.8	23.5	2.4	3.1	-34.4	37.4	54	16.6

Note 1: A correction factor corresponding to  $FdB = 20 * \log(\text{duty cycle} = 10\%) = -20$  dB was applied to calculate the average value of second harmonics. Maximum duty cycle as declared by the manufacturer is 10%.

**Table A.3 Tx Spurious Emission Mid Channel(900MHz) –30MHz – 1GHz: Vertical Polarization - AVG**

Frequency (MHz)	Detector	Raw Reading	Antenna Factor (dB/m)	Atten Factor (dB)	Cable Factor (dB)	Pre-Amp (dB)	Level	FCC 15.209 Limit	FCC 15.209 Limit Margin
1830	AVG	52.5 <Note 1>	24.9	3.3	0.2	-33.1	67.8	54	6.2
2407.12	Peak	49.1	28.2	4.1	0.3	-33.1	48.6	54	5.4
2468.04	Peak	48.5	28.4	4.2	0.3	-33.1	48.3	54	5.7
2446.59	Peak	48	28.3	4.1	0.3	-33.1	47.6	54	6.4
2432	Peak	47.7	28.2	4.1	0.3	-33.1	47.2	54	6.8
1000	Peak	43.1	23.5	2.4	3.1	-34.4	37.7	54	16.3

Note 1: A correction factor corresponding to  $FdB = 20 * \log(\text{duty cycle} = 10\%) = -20$  dB was applied to calculate the average value of second harmonics. Maximum duty cycle as declared by the manufacturer is 10%.

**Table A.4 Tx Spurious Emission Mid Channel (900MHz) –30MHz – 1GHz: Horizontal Polarization - AVG**



Frequency (MHz)	Detector	Raw Reading	Antenna Factor (dB/m)	Atten Factor (dB)	Cable Factor (dB)	Pre-Amp (dB)	Level	FCC 15.209 Limit	FCC 15.209 Limit Margin
65.0521	QP	46.2	11.4	4	0.7	-33.4	28.9	40	11.1
194.441	QP	51.2	14.5	4	1.1	-33.3	37.5	43.5	6
43.4965	QP	38.3	13.6	4	0.6	-33	23.5	40	16.5
30.0971	QP	28.7	21.3	4	0.5	-32.4	22.1	40	17.9
91.2683	QP	41.4	11.3	4	0.8	-33.5	24	43.5	19.5
239.73	QP	38.1	16.5	4	1.2	-33.3	26.5	46.4	19.9

**Table A.5 Tx Spurious Emission Mid Channel (2.4GHz) –30MHz – 1GHz: Vertical Polarization**