



FCC PART 15.231 MEASUREMENT AND TEST REPORT

For

Todco Innovations Inc

11011 131 Street, Surrey, British Columbia, V3T 3P8, Canada

FCC ID: XFD-LT055

Report Type: Product Type:

Original Report The Immobilizer Remote

Test Engineer: Sula Huang

Report Number: RSZ09050801

Report Date: 2009-06-12

William Chen

Reviewed By: EMC Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F, the 3rd Phase of WanLi Industrial Building,

Sula Huarf

William . Chan .

ShiHua Road, FuTian Free Trade Zone

Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government. * This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*"

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)EUT PHOTOGRAPH	
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	5
SPECIAL ACCESSORIES	
EQUIPMENT MODIFICATIONS	
CONFIGURATION OF TEST SETUP	
BLOCK DIAGRAM OF TEST SETUPSUMMARY OF TEST RESULTS	
CFR47 §15.203 - ANTENNA REQUIREMENT	
STANDARD APPLICABLE	
CFR47 §15.205, §15.209 & §15.231 (B) - RADIATED EMISSIONS	8
MEASUREMENT UNCERTAINTY	8
EUT Setup	8
EMI TEST RECEIVER SETUP	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
CFR47 §15.231(C) - 20DB EMISSION BANDWIDTH	12
APPLICABLE STANDARD	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	12
TEST DATA	12
CFR47 §15,231(A) - DEACTIVATION TESTING	14
APPLICABLE STANDARD	14
EUT Setup	
TEST EQUIPMENT LIST AND DETAILS	
TEST DATA	15
CFR47 §15.231- DUTY CYCLE	
LIMIT	
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	
Test Data	16

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Todco Innovations Inc's* product, model: *LT055 (FCC ID:XFD-LT055)* or the "EUT" as referred to in this report is a *The Immobilizer Remote* which measures approximately: 5.0 cm L x 3.2 cm W x 1.0 cm H, rated input voltage: DC 3V Battery \times 2. The EUT's frequency of fundamental is $433.92 \text{MHz} (\pm 100 \text{kHz})$.

* All measurement and test data in this report was gathered from production sample serial number: 0905012(Assigned by BACL, Shenzhen). The EUT was received on 2009-05-08.

EUT Photograph



Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4-2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.231 rules.

Related Submittal(s)/Grant(s)

No Related Submittals

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at http://ts.nist.gov/Standards/scopes/2007070.htm

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Special Accessories

The special accessories were provided by Bay Area Compliance Laboratories Corp. (Shenzhen).


Equipment Modifications

No modifications were made to the unit tested.

Configuration of Test Setup



Block Diagram of Test Setup

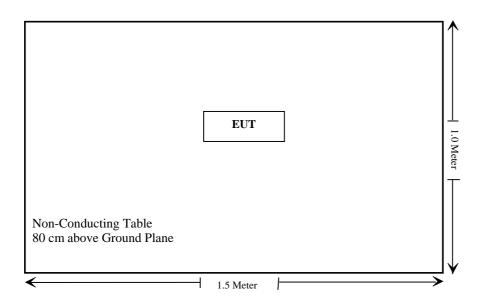

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band	Compliant
§15.209	General Requirement	Compliant
§15.207 (a)	Conducted Emissions	N/A*
§15.231 (b)	Radiated Emissions	Compliant
§15.231 (c)	20dB Band Width Testing	Compliant
§15.231 (a)(1)	Deactivation Testing	Compliant
§15.231(a)	Duty Cycle	Compliant

Note: N/A, EUT is battery operation.

CFR47 §15.203 - ANTENNA REQUIREMENT

Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The antenna of the EUT is a printed antenna on PCB. The maximum gain is 0 dBi. The EUT use permanently attached antenna.

Result: Compliant.

Please refer to the EUT Internal photos.


CFR47 §15.205, §15.209 & §15.231 (b) - RADIATED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is±4.0 dB.

EUT Setup

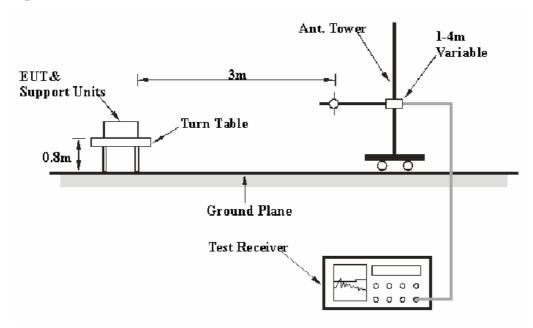

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2003. The specification used was the FCC 15 § 15.209 and 15.231.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	VBW
30 – 1000 MHz	100 kHz	300 kHz
1000 MHz –5 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2008-08-02	2009-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	2010-03-11
НР	Amplifier	8449B	3008A00277	2008-09-12	2009-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2008-09-25	2009-09-25

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Peak and Average detection mode.

Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,370 *	125 to 375 *
174-260	3,750	375
260-470	3,750 to 12, 500*	375 to 1,250*
Above 470	12,500	1,250

^{*} Linear interpolations for frequency ranges 130 - 174 MHz and 260 - 470 MHz.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8dB means the emission is 5.8dB below the limit. The equation for margin calculation is as follows:

Margin = Limit –Corrected Amplitude

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Sula Huang on 2009-05-25 to 2009-06-12.

Test Mode: Transmitting

D	Meter	D 4 4	D: /:		st Ante	nna	Cable	Duty	Pre-	Cord.	FCC	C Part 15.2	231
Frequency (MHz)	Reading (dBuV/m)	(PK/AV)	Direction Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Loss (dB)	LOSS Factor	Amp. Gain (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remarks
	30 – 1000 MHz												
433.92	63.06	PK	78	1.41	V	14.5	1.73	0	25.96	53.33	100.8	47.47	Fund.
433.92	61.94	PK	154	1.05	Н	14.5	1.73	0	25.96	52.21	100.8	48.59	Fund.
867.84	44.80	PK	108	1.20	V	19.9	3.86	0	25.64	42.92	80.8	37.88	Harmonic
867.84	42.07	PK	11	3.37	Н	19.9	3.86	0	25.64	40.19	80.8	40.61	Harmonic
						Above 1	GHz						
1301.76	50.97	PK	190	1.5	Н	26.0	4.34	0	34.8	46.51	74	27.49	Harmonic
1301.76	49.84	PK	360	1.8	V	26.0	4.34	0	34.8	45.38	74	28.62	Harmonic
1735.68	53.01	PK	28	2.0	Н	29.0	4.90	0	34.4	52.51	80.8	28.29	Harmonic
1735.68	53.41	PK	337	2.0	V	29.0	4.90	0	34.4	52.91	8.08	27.89	Harmonic

Field Strength Emission (Average)									
Frequency	Peak Measurement Antenna Duty Cycle		Corrected	FCC Par	FCC Part 15.231				
(MHz)	@ 3m (dBmV/m)	Polar (H/V)	Correction Amp. (dBmV/m)		Limit (dBmV/m)	Margin (dB)	Comment		
30 – 1000 MHz									
433.92	53.33	V	-4.32	49.01	80.8	31.79	Fund.		
433.92	52.21	Н	-4.32	47.89	80.8	32.91	Fund.		
867.84	42.92	V	-4.32	38.60	60.8	22.20	Harmonic		
867.84	40.19	Н	-4.32	35.87	60.8	24.93	Harmonic		
			Above 1	GHz					
1301.76	46.51	Н	-4.32	42.19	74.0	31.81	Harmonic		
1301.76	45.38	V	-4.32	41.06	54.0	12.94	Harmonic		
1735.68	52.51	Н	-4.32	48.19	60.8	12.61	Harmonic		
1735.68	52.91	V	-4.32	48.59	60.8	12.21	Harmonic		

Note: *Calculate Average value based on Duty Cycle correction factor:

Duty Cycle Factor = 20*log (Ton /Tp) =20*log (51.92/85.4)=-4.32 dB

Average Reading = Peak Reading + Duty Cycle Factor

CFR47 §15.231(c) - 20dB EMISSION BANDWIDTH

Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06
НР	Amplifier	8447E	1937A01046	2008-11-15	2009-11-15
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2009-04-12	2010-04-12

^{*} **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Sula Huang on 2009-05-31.


Test Mode: Transmitting

Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Emission Bandwidth (kHz)	Part 15.231 Limit (MHz)	Result
433.92	43.8	1.0848	Pass

Note: 20 dB Bandwidth Limit = 0.25% * center frequency = 0.25% * 433.92MHz = 1.0848 MHz

20 dB Emission Bandwidth

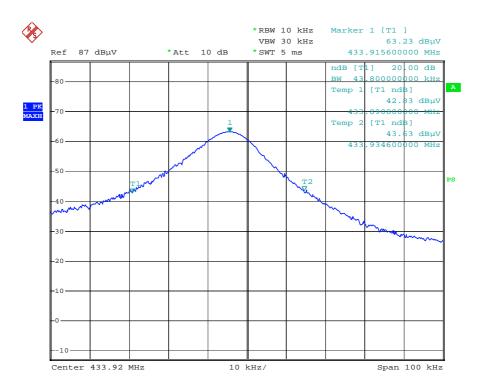

 $20 \, \mathrm{dB}$ bandwidth


Date: 31.MAY.2009 23:21:41

CFR47 §15.231(a) - DEACTIVATION TESTING

Applicable Standard

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

EUT Setup

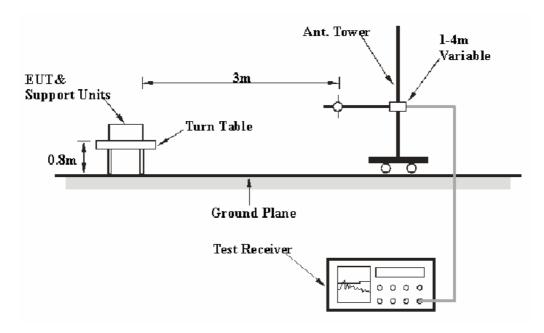

The deactivation test was performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4 - 2003. The specification used was the FCC 15.231(a) limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06
НР	Amplifier	8447E	1937A01046	2008-11-15	2009-11-15
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2009-04-12	2010-04-12

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Data

Environmental Conditions


Temperature:	25 ° C	
Relative Humidity:	56 %	
ATM Pressure:	103.2 kPa	

The testing was performed by Sula Huang on 2009-05-23.

Test Mode: Transmitting

Test Result: Compliant.

Please refer to following plot

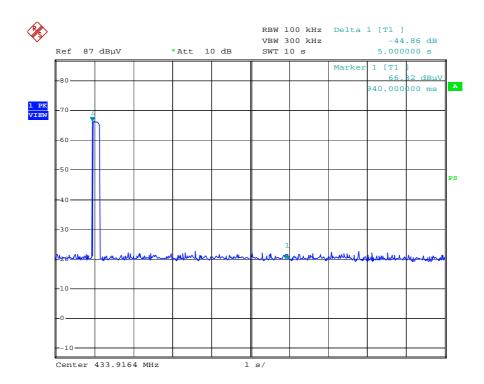

Deactivation time

Date: 23.MAY.2009 23:09:38

CFR47 §15.231- DUTY CYCLE

Limit

Nil (No dedicated limit specified in the Rules).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2008-10-16	2009-10-16

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer=operating frequency.
- 4. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Span=0Hz.
- 5. Repeat above procedures until all frequency measured was complete.

Test Data

Environmental Conditions

Temperature:	25 ° C	
Relative Humidity:	56 %	
ATM Pressure:	103.2 kPa	

The testing was performed by Sola Huang on 2009-06-12.

Test Mode: Transmitting


Test Result:

$$Ton=N_1Ton_1+N_2Ton_2$$


Duty Cycle Factor =
$$20*\log (Ton/Tp) = 20*\log (51.92/85.4) = -4.32 dB$$

Please refer to following plot


Duty-Cycle

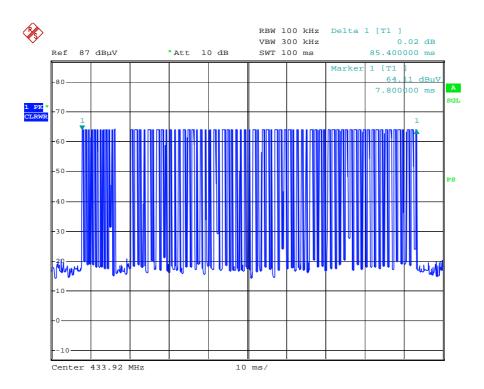

Date: 4.JUN.2009 19:05:25

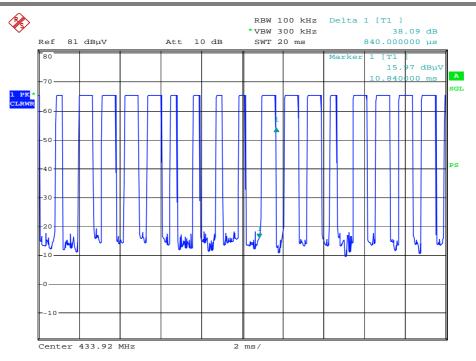

Date: 12.JUN.2009 11:59:59

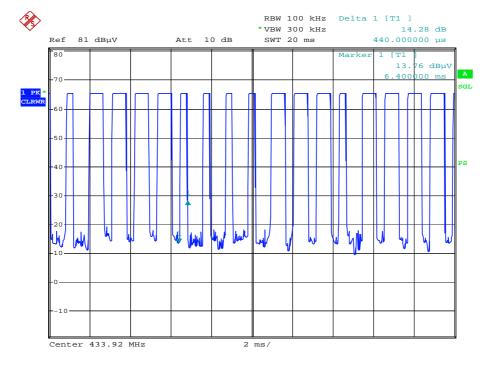

Date: 12.JUN.2009 12:01:16

***** END OF REPORT *****