



# TEST REPORT

**Applicant:** ooma, Inc.

Address: 525 Almanor Ave, Suite 200, Sunnyvale, CA 94085, United States

**FCC ID:** XFT-TELO106

**Product Name:** Telo Air 2, Telo

**Standard(s):** FCC PART 15D  
ANSI C63.17-2013

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR231062962-00A

**Date Of Issue:** 2023/12/22

**Reviewed By:** Calvin Chen

A handwritten signature of 'Calvin Chen'.

Title: RF Engineer

**Approved By:** Sun Zhong

A handwritten signature of 'Sun Zhong'.

Title: Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## CONTENTS

|   |           |
|---|-----------|
| <b>DOCUMENT REVISION HISTORY .....</b>                              | <b>5</b>  |
| <b>1. GENERAL INFORMATION .....</b>                                 | <b>6</b>  |
| <b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b> | <b>6</b>  |
| <b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>                   | <b>7</b>  |
| 1.2.1 EUT Operation Condition:.....                                 | 7         |
| 1.2.2 Support Equipment List and Details .....                      | 7         |
| 1.2.3 Support Cable List and Details .....                          | 7         |
| 1.2.4 Block Diagram of Test Setup.....                              | 8         |
| <b>1.3 MEASUREMENT UNCERTAINTY .....</b>                            | <b>9</b>  |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                             | <b>10</b> |
| <b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>                    | <b>11</b> |
| <b>3.1 CONDUCTED EMISSIONS.....</b>                                 | <b>11</b> |
| 3.1.1 Applicable Standard.....                                      | 11        |
| 3.1.2 EUT Setup.....  | 11        |
| 3.1.3 EMI Test Receiver Setup .....                                 | 11        |
| 3.1.4 Test Procedure .....  | 12        |
| 3.1.5 Corrected Amplitude & Margin Calculation.....                 | 12        |
| <b>3.2 RADIATED SPURIOUS EMISSIONS.....</b>                         | <b>13</b> |
| 3.2.1 Applicable Standard.....                                      | 13        |
| 3.2.2 EUT Setup.....  | 13        |
| 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....             | 14        |
| 3.2.4 Test Procedure .....  | 15        |
| 3.2.5 Corrected Amplitude & Margin Calculation.....                 | 15        |
| <b>3.3 EMISSION BANDWIDTH: .....</b>                                | <b>16</b> |
| 3.2.1 Applicable Standard.....                                      | 16        |
| 3.3.2 EUT Setup.....  | 16        |
| 3.3.3 Test Procedure .....  | 16        |
| <b>3.4 PEAK TRANSMIT POWER: .....</b>                               | <b>17</b> |
| 3.4.1 Applicable Standard.....                                      | 17        |
| 3.4.2 EUT Setup.....  | 17        |
| 3.4.3 Test Procedure .....  | 17        |
| <b>3.5 POWER SPECTRAL DENSITY: .....</b>                            | <b>18</b> |
| 3.5.1 Applicable Standard.....                                      | 18        |
| 3.5.2 EUT Setup.....  | 18        |
| 3.5.3 Test Procedure .....  | 18        |
| <b>3.6 EMISSION INSIDE AND OUTSIDE THE SUB-BAND: .....</b>          | <b>20</b> |
| 3.6.1 Applicable Standard.....                                      | 20        |
| 3.6.2 EUT Setup.....  | 20        |
| 3.6.3 Test Procedure .....  | 20        |
| <b>3.7 FREQUENCY STABILITY: .....</b>                               | <b>22</b> |
| 3.7.1 Applicable Standard.....                                      | 22        |
| 3.7.2 EUT Setup.....  | 22        |

|  |           |
|--|-----------|
| 3.7.3 Test Procedure .....                                 | 22        |
| <b>3.8 SPECIFIC REQUIREMENTS FOR UPCS DEVICE: .....</b>    | <b>23</b> |
| 3.8.1 Applicable Standard.....                             | 23        |
| 3.8.2 EUT Setup.....                                       | 25        |
| 3.8.3 Test Procedure .....                                 | 25        |
| <b>4. Test DATA AND RESULTS .....</b>                      | <b>27</b> |
| <b>4.1 CONDUCTED EMISSIONS.....</b>                        | <b>27</b> |
| <b>4.2 RADIATED EMISSIONS: .....</b>                       | <b>30</b> |
| <b>4.3 EMISSION BANDWIDTH: .....</b>                       | <b>48</b> |
| <b>4.4 PEAK TRANSMIT POWER: .....</b>                      | <b>50</b> |
| <b>4.5 POWER SPECTRAL DENSITY: .....</b>                   | <b>53</b> |
| <b>4.6 EMISSION INSIDE AND OUTSIDE THE SUB-BAND: .....</b> | <b>57</b> |
| <b>4.7 FREQUENCY STABILITY: .....</b>                      | <b>65</b> |
| <b>4.8 SPECIFIC REQUIREMENTS FOR UPCS DEVICE:.....</b>     | <b>66</b> |
| <b>5. RF EXPOSURE EVALUATION .....</b>                     | <b>72</b> |
| <b>5.1 APPLICABLE STANDARD.....</b>                        | <b>72</b> |
| <b>5.2 MEASUREMENT RESULT .....</b>                        | <b>72</b> |
| <b>6. EUT PHOTOGRAPHS .....</b>                            | <b>74</b> |
| <b>7. TEST SETUP PHOTOGRAPHS .....</b>                     | <b>75</b> |

## DOCUMENT REVISION HISTORY

| Revision Number | Report Number   | Description of Revision              | Date of Revision |
|-----------------|-----------------|--------------------------------------|------------------|
| 1.0             | CR230309652-00A | Original Report                      | 2023/12/7        |
| 2.0             | CR230309652-00A | Add transmission simultaneously data | 2023/12/22       |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|   |  |
|---|--|
| <b>EUT Name:</b>                              | Telo Air 2   |
| <b>EUT Model:</b>                             | TELOAIR106   |
| <b>Multiple EUT Model:</b>                    | Telo   |
| <b>Multiple Model:</b>                        | TELO106: (An Azurewave Wifi module is not installed in the unit)                                 |
| <b>Operation Frequency:</b>                   | 1921.536-1928.448 MHz  |
| <b>Maximum Peak Output Power (Conducted):</b> | 19.84dBm   |
| <b>Modulation Type:</b>                       | GFSK   |
| <b>Rated Input Voltage:</b>                   | 5Vdc from adapter  |
| <b>Serial Number:</b>                         | 2CSP-3(For Conducted Emissions Test and Radiated Emission Test)<br>2CSP-1(For RF Conducted Test) |
| <b>EUT Received Date:</b>                     | 2023/10/30   |
| <b>EUT Received Status:</b>                   | Good   |

Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.

### Antenna Information Detail▲:

| Antenna | Antenna Type | input impedance (Ohm) | Frequency Range | Antenna Gain |
|---------|--------------|-----------------------|-----------------|--------------|
| ANT0    | PCB          | 50                    | 1920-1930MHz    | 3.5dBi       |
| ANT1    | PCB          | 50                    | 1920-1930MHz    | 3.5dBi       |

The Method of §15.203 Compliance:

- Antenna was permanently attached to the unit.
- Antenna use a unique type of connector to attach to the EUT.
- Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### Accessory Information:

| Accessory Description | Manufacturer | Model          |
|-----------------------|--------------|----------------|
| Adapter               | Unknown      | AD018A050300UV |

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

|  |   |
|--|---|
| <b>EUT Operation Mode:</b>   | The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The device has EUT have two antennas and cannot transmit simultaneously, pre-scan output power of the two antennas, the worst case ANT0 was select to test except Radiated Emission. |
| <b>Equipment Modifications:</b>  | No  |
| <b>EUT Exercise Software:</b>  | No  |
| The engineering mode was provided by manufacturer. The maximum power was configured default, that was provided by the manufacturer▲: |   |

### 1.2.2 Support Equipment List and Details


| Manufacturer | Description                        | Model          | Serial Number    |
|--------------|------------------------------------|----------------|------------------|
| Ooma         | Adapter                            | AD018A050300UV | Unknown          |
| Kingston     | USB Disk                           | DTI/2GB        | CH 031308        |
| AT&T         | Telephone                          | 210            | Y071120017332306 |
| Unknown      | Antenna                            | Unknown        | Unknown          |
| R&S          | Digital Radio communication Tester | CMD 60M        | 846956/010       |

### 1.2.3 Support Cable List and Details


| Cable Description   | Shielding Type | Ferrite Core | Length (m) | From Port | To        |
|---------------------|----------------|--------------|------------|-----------|-----------|
| Power Cable         | No             | No           | 1.2        | Adapter   | EUT       |
| RJ45 Loopback Cable | No             | No           | 1.2        | EUT       | EUT       |
| Telephone Cable     | No             | No           | 1          | EUT       | Telephone |
| Antenna Cable       | No             | No           | 2          | Antenna   | CMD 60M   |

### 1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

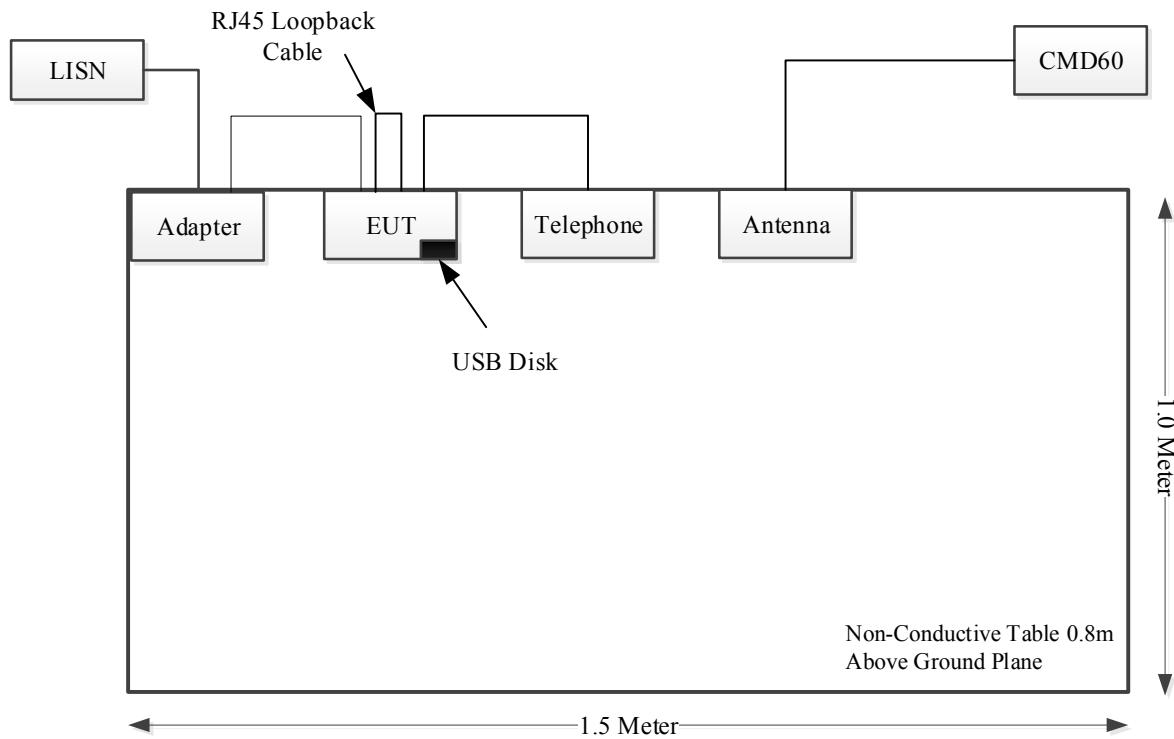

Radiated Spurious Emissions:

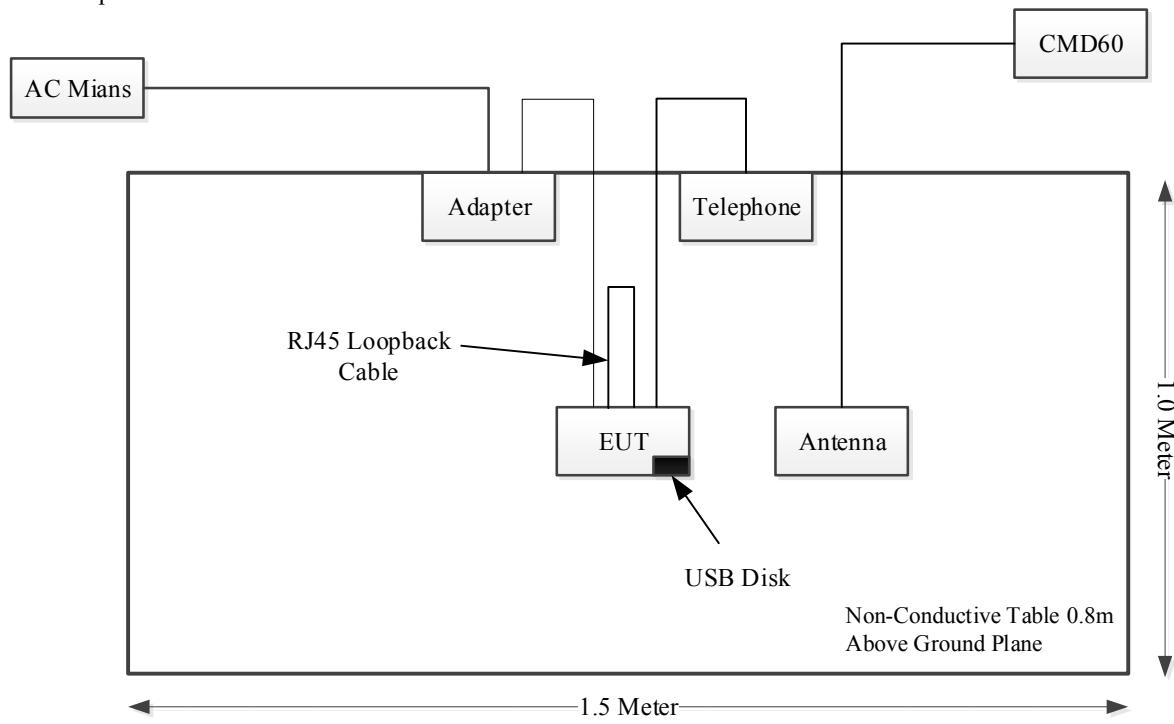

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty  |
|-----------------------------------|--|
| Occupied Channel Bandwidth        | ±5 %   |
| RF output power, conducted        | ±0.61dB  |
| Power Spectral Density, conducted | ±0.61 dB   |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Unwanted Emissions, conducted     | ±1.26 dB   |
| Temperature                       | ±1 °C  |
| Humidity                          | ±5%  |
| DC and low frequency voltages     | ±0.4%  |
| Duty Cycle                        | 1%   |
| AC Power Lines Conducted Emission | 2.8 dB (150 kHz to 30 MHz)   |

## 2. SUMMARY OF TEST RESULTS

| Standard(s) Section                | Test Items                               | Result    |
|------------------------------------|--|-----------|
| FCC § 15.315, § 15.207             | Conducted Emission                       | Compliant |
| FCC § 15.209                       | Radiated Spurious Emissions              | Compliant |
| FCC § 15.323 (a)                   | Emission Bandwidth                       | Compliant |
| FCC § 15.319 (c)                   | Peak Transmit Power                      | Compliant |
| FCC § 15.319 (d)                   | Power Spectral Density                   | Compliant |
| FCC § 15.323 (d)                   | Emission Inside and Outside the sub-band | Compliant |
| FCC § 15.323 (f)                   | Frequency Stability                      | Compliant |
| FCC § 15.323 (c)(e) & § 15.319 (f) | Specific Requirements for UPSCS          | Compliant |
| FCC § 15.317, § 15.203             | Antenna Requirement                      | Compliant |
| FCC § 15.319 (i) & 1.1307          | RF Exposure Evaluation                   | Compliant |

### 3. REQUIREMENTS AND TEST PROCEDURES


#### 3.1 Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.315

An unlicensed PCS device that is designed to be connected to the public utility (AC) power line must meet the limits specified in §15.207.

##### 3.1.2 EUT Setup

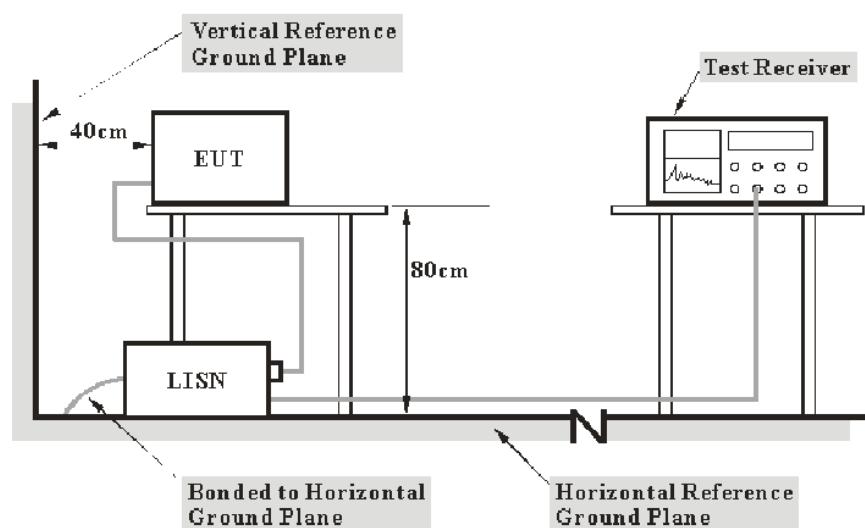

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.315, FCC 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

##### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

### 3.2 Radiated Spurious Emissions

#### 3.2.1 Applicable Standard

FCC §15.209


(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009–0.490     | 2400/F(kHz)                       | 300                           |
| 0.490–1.705     | 24000/F(kHz)                      | 30                            |
| 1.705–30.0      | 30                                | 30                            |
| 30–88           | 100 **                            | 3                             |
| 88–216          | 150 **                            | 3                             |
| 216–960         | 200 **                            | 3                             |
| Above 960       | 500                               | 3                             |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

#### 3.2.2 EUT Setup

30MHz~1GHz:

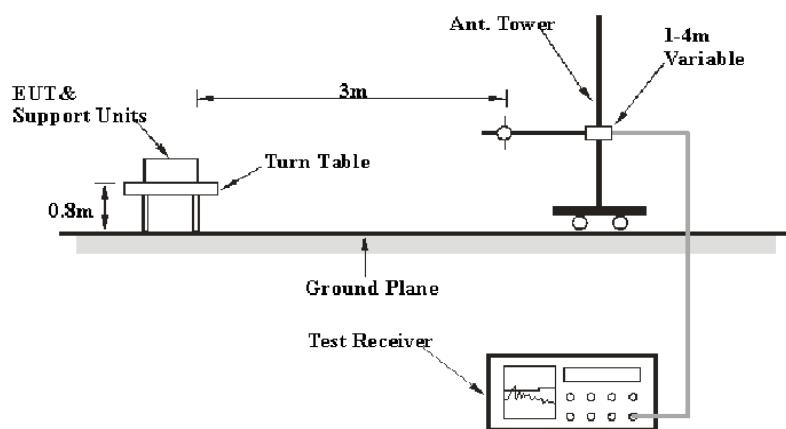

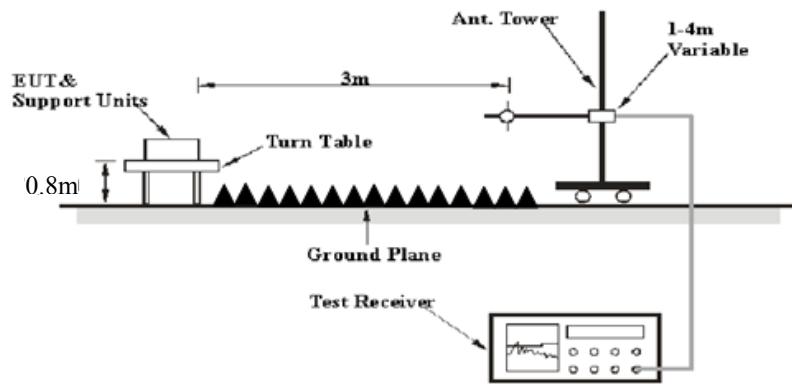**Above 1GHz:**

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 20 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | /       | QP          |
|                   | /       | /         | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK          |
|                   | 1MHz    | 10 Hz     | /       | AV          |

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


### 3.3 Emission Bandwidth:

#### 3.2.1 Applicable Standard

FCC §15.323 (a)

Operation shall be contained within the 1920–1930 MHz band. The emission bandwidth shall be less than 2.5 MHz and greater than 50 kHz.

#### 3.3.2 EUT Setup

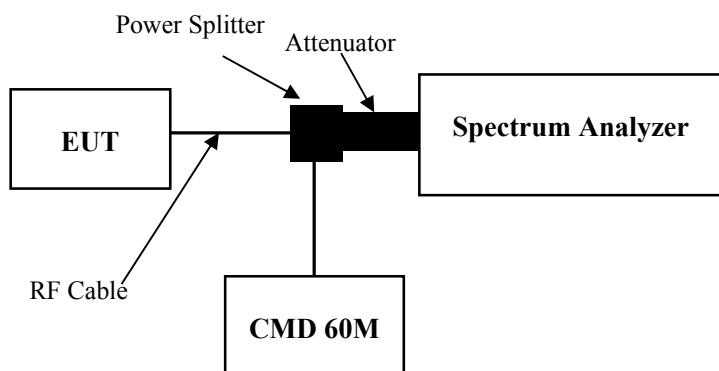

#### 3.3.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.3

**Table 3—Spectrum analyzer settings for measurement of emissions bandwidth *B***

|                  |   |
|------------------|---|
| RBW              | Approximately 1% of the emission bandwidth (a rough estimate may be obtained from peak power level measurement, or use manufacturer's declared value) |
| Video bandwidth  | $\geq 3 \times$ the RBW   |
| Center frequency | Nominal center frequency of channel   |
| Span             | $\geq 2 \times$ the expected emission bandwidth   |
| Sweep time       | Coupled to frequency span and RBW   |
| Amplitude scale  | Log   |
| Detection        | Peak detection with maximum hold enabled  |

Record the maximum level of the modulated carrier. Find the two furthest frequencies above and below the frequency of the maximum level of the modulated carrier where the signal level is 26 dB below the peak level of the carrier. The difference in frequency between these two frequencies is the emission bandwidth.

If after measuring the emission bandwidth, it is found that the RBW used was not approximately 1% of the emission bandwidth, then adjust the RBW and repeat the procedure until the correct RBW is used. If the spectrum analyzer has fixed values of RBW, the one that is the nearest to 1% of the emission bandwidth is acceptable, provided it is no less than 0.5% of the emission bandwidth and no greater than 2% of the emission bandwidth.


### 3.4 Peak Transmit Power:

#### 3.4.1 Applicable Standard

FCC §15.319 (c)

Peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

#### 3.4.2 EUT Setup

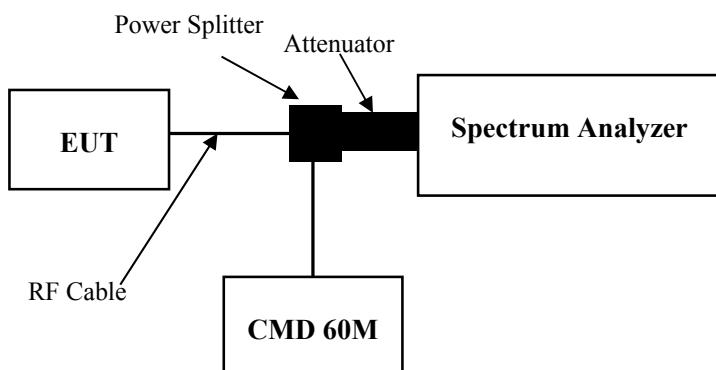

#### 3.4.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.2

The resolution bandwidth (RBW) setting for this test must be adjusted by repeating this test and using increasing values of the RBW until there are negligible changes (within  $\pm 0.5$  dB) in the measured values of the maximum power.

**Table 2—Spectrum analyzer settings for determining the peak power**

|                  |   |
|------------------|---|
| RBW              | $\geq$ Emission bandwidth   |
| Video bandwidth  | $\geq$ RBW  |
| Span             | Zero  |
| Center frequency | Nominal center frequency of transmit carrier  |
| Amplitude scale  | Log (linear may be used if analyzer has sufficient linear dynamic range and accuracy) |
| Detection        | Peak detection  |
| Trigger          | Video   |
| Sweep rate       | Sufficiently rapid to permit the transmit pulse to be resolved accurately             |


### 3.5 Power Spectral Density:

#### 3.5.1 Applicable Standard

FCC §15.319 (d)

Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

#### 3.5.2 EUT Setup

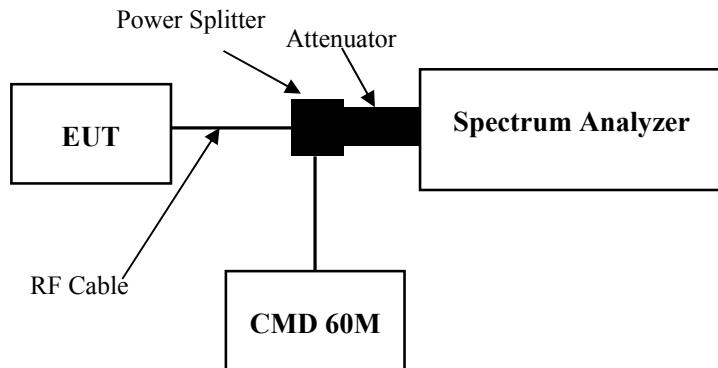

#### 3.5.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.5

The EUT transmit data sequence and mode of operation shall be representative of that encountered in normal operation, so that transient effects associated with transmission bursts or data content are captured by the PSD measurement.


**Table 4—Spectrum analyzer settings for finding of the maximum of  $PSD_{EUT}$**

|                  |  |
|------------------|--|
| RBW              | 3 kHz  |
| Video bandwidth  | $\geq 3 \times RBW$  |
| Span             | Zero span at frequency with the maximum level (frequency determined in 6.1.3 if the same type of signal (continuous versus burst) was used in 6.1.3)   |
| Center frequency | Spectral peak as determined in 6.1.3   |
| Sweep time       | For burst signals, sufficient to include essentially all of the maximum length burst at the output of a 3 kHz filter (e.g., maximum input burst duration plus 600 $\mu$ s). For continuous signals, 20 ms. |
| Amplitude scale  | Log power  |
| Detection        | Sample detection and averaged for a minimum of 100 sweeps  |
| Trigger          | External or internal   |

For burst-type signals, arrange to measure the wideband burst duration of each burst analyzed and compute the mean duration.

Determine the level that is 20 dB below the first peak. Record the power-averaged waveform between the 20 dB threshold levels around the first peak with at least 30 000 samples per second as shown in Figure 4. Multiple wideband bursts may produce the waveform between  $-20$  dB peaks; these must be included in the determination of the average burst length. If there is no level that is 20 dB below the peak, then analyze the complete sweep and include all of the wideband waveform that occurs during the sweep time in the computation of average burst length.

Sum the values of the sample points (in linear units of power) and divide by the sample frequency to obtain the total pulse energy in the 3 kHz bandwidth, then divide by the average duration of the wideband input pulse to obtain the average pulse power.

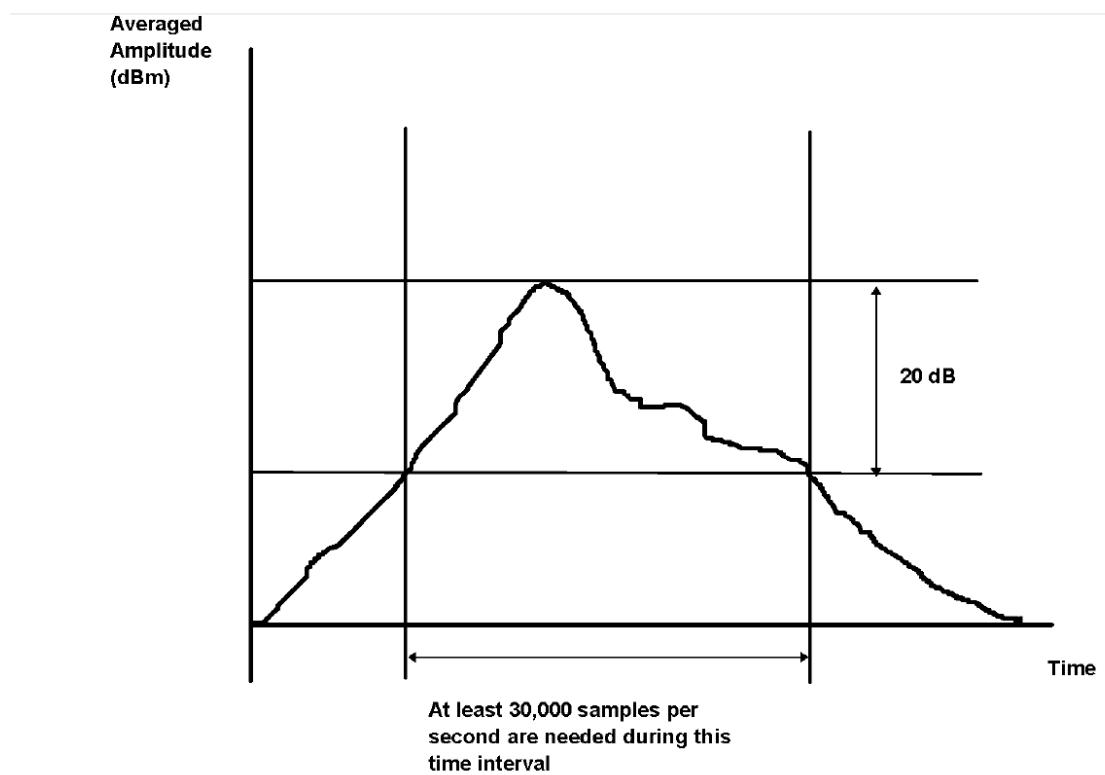

**Figure 4—Computed average transient method: Sampling of the averaged power waveform measured with 3 kHz RBW**


### 3.6 Emission Inside and Outside the Sub-band:

#### 3.6.1 Applicable Standard

FCC §15.323 (d)

Emissions outside the band shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the band and 1.25 MHz above or below the band; 50 dB between 1.25 and 2.5 MHz above or below the band; and 60 dB at 2.5 MHz or greater above or below the band. Emissions inside the band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the band edge the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. B" is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

#### 3.6.2 EUT Setup

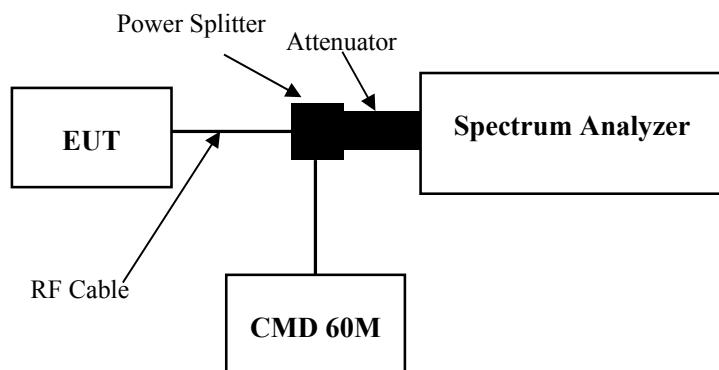

#### 3.6.3 Test Procedure

According to ANSI C63.17-2013 Section 6.1.6

##### In-band emission:

In the region between 1B and 2B from the center of the RF carrier, the measured emission level (measured with 1% of emission bandwidth) shall not exceed 30 dB below the permitted peak power for the EUT.

In the region between 2B and 3B from the center of the RF carrier, the measured emission level shall not exceed 50 dB below the permitted peak power for the EUT.

**Table 5—Spectrum analyzer settings for measuring in-band emissions**

|                  |   |
|------------------|---|
| RBW              | Approximately 1% of the emission bandwidth ( $B$ )  |
| Video bandwidth  | $3 \times$ RBW  |
| Sweep time       | The sweep time shall be sufficiently slow that the swept frequency rate shall not exceed one RBW per three transmit bursts. |
| Number of sweeps | Sufficient to stabilize the trace   |
| Amplitude scale  | Log   |
| Detection        | Peak detection and max hold enabled   |
| Span             | Approximately equal to $3.5 B$  |

In the region between  $3B$  and the UPCS band edge, as measured from the center of the RF carrier, the measured emission level shall not exceed 60 dB below the permitted peak power for the EUT.

#### **Out-band emission:**

Out-of-band tests shall be performed with the RF carrier set to the lowest and highest carriers defined by the EUT. The spectrum analyzer settings for in-band unwanted emissions in 6.1.6.1 also apply to out-of-band emissions. The EUT shall pass the tests of item a), item b), and either item c) or item d), as follows:

- a) In the region between the band edges and 1.25 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed  $-9.5$  dBm.
- b) In the region between 1.25 and 2.5 MHz below and above the lower and the upper band edges, respectively, the measured emission level shall not exceed  $-29.5$  dBm.
- c) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed  $-39.5$  dBm.
- d) In the region at 2.5 MHz or greater below and above the lower and upper band edges, respectively, the measured emission level shall not exceed the limits of 47CFR15.209. Measurement shall be made as a radiated test.

UPCS devices, in general, include digital circuitry not directly associated with the radio transmitter and are subject to the requirements for unintentional radiators as described in 47CFR15.109, for both in-band and out-of-band emissions. These emissions shall be measured with the EUT operating in receive and transmit modes. For the transmit mode, do not measure within 3.75 MHz or  $3B$ , whichever is the largest, of the edges of the band. Emissions that are directly caused by digital circuits in the transmit path do not have to meet 47CFR15.109 limits, but shall meet those limits as mentioned in the preceding list.


### 3.7 Frequency Stability:

#### 3.7.1 Applicable Standard

FCC §15.323(f)

The frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of  $-20^{\circ}$  to  $+50^{\circ}$  C at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of  $20^{\circ}$  C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

#### 3.7.2 EUT Setup

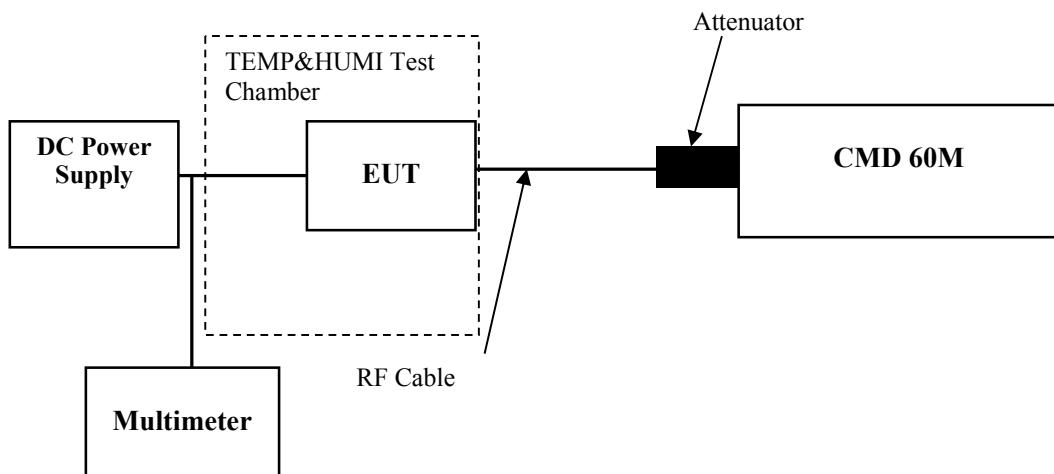

#### 3.7.3 Test Procedure

According to ANSI C63.17-2013 Section 6.2.1.2

This test does not apply to an EUT that is capable only of operating from a battery. For a mains-powered EUT, the mean value of the carrier frequency shall be measured at the power supply voltage extremes of row 1 of Table 7.

**Table 7—Test parameters for carrier-frequency stability testing**

| Temperature                                 | Supply voltage                          |
|---|---|
| $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$  | 85% to 115% of declared nominal voltage |
| $-20^{\circ}\text{C} \pm 2^{\circ}\text{C}$ | All declared nominal(s)                 |
| $+50^{\circ}\text{C} \pm 2^{\circ}\text{C}$ | All declared nominal(s)                 |

During test, the equipment shall be placed in the boxes and set the temperature to the specified requirement until the thermal balance has been reached.

### 3.8 Specific Requirements For UPCS Device:

#### 3.8.1 Applicable Standard

##### FCC §15.319(f)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. The provisions in this section are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

##### FCC §15.323(c)

Devices must incorporate a mechanism for monitoring the time and spectrum windows that its transmission is intended to occupy. The following criteria must be met:

- (1) Immediately prior to initiating transmission, devices must monitor the combined time and spectrum windows in which they intend to transmit for a period of at least 10 milliseconds for systems designed to use a 10 milliseconds or shorter frame period or at least 20 milliseconds for systems designed to use a 20 milliseconds frame period.
- (2) The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.
- (3) If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.
- (4) Once access to specific combined time and spectrum windows is obtained an acknowledgment from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.
- (5) If access to spectrum is not available as determined by the above, and a minimum of 20 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level may be accessed. A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 milliseconds frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value. The power measurement resolution for this comparison must be accurate to within 6 dB. No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.
- (6) If the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.
- (7) The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than  $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be  $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds but shall not be required to be less than 35 microseconds.

(8) The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

(9) Devices that have a power output lower than the maximum permitted under this subpart may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

(10) An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

(11) An initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within 1.25 MHz of the center frequency of channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in the intended transmit window by the initiating device may commence.

(12) The provisions of (c)(10) or (c)(11) of this section shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.


ANSI C63.17 2013 §6.2 Frequency and time stability and §7.Monitoring tests and §8.Time and spectrum window access procedure.

#### FCC §15.323(e)

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in this band shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions.

Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

### 3.8.2 EUT Setup

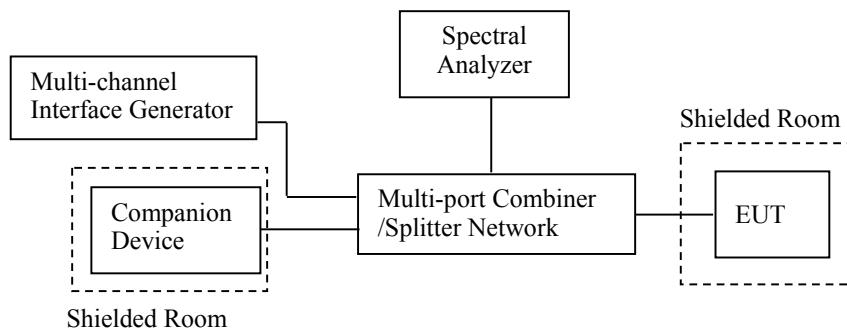

### 3.8.3 Test Procedure

#### 1) Monitoring Time

According to ANSI C63.17- 2013 Section 7.3.3

#### 2) Lower Monitoring Threshold

According to ANSI C63.17- 2013 Section 7.3.1

#### 3) Maximum Transmit Period

According to ANSI C63.17- 2013 Section 8.2.2

#### 4) System Acknowledgement

According to ANSI C63.17- 2013 Section 8.1, 8.2

#### 5) Least Interfered Channel (LIC)

According to ANSI C63.17- 2013 Section 7.3.2, 7.3.3

#### 6) Random waiting

According to ANSI C63.17- 2013 Section 8.1.2 or 8.1.3

#### 7) Monitoring Bandwidth and Reaction Time

According to ANSI C63.17- 2013 Section 7.4, 7.5

#### 8) Monitoring Antenna

According to ANSI C63.17- 2013 Section 4

#### 9) Monitoring threshold relaxation

According to ANSI C63.17- 2013 Section 4

#### 10) Duplex Connections

According to ANSI C63.17- 2013 Section 8.3

**11) Alternative monitoring interval**

According to ANSI C63.17- 2013 Section 8.4

**12) Frame Repetition Stability Frame Period and Jitter**

According to ANSI C63.17- 2013 Section 6.2.2, 6.2.3

## 4. Test DATA AND RESULTS

### 4.1 Conducted Emissions

|                |             |              |  |
|----------------|-------------|--------------|--|
| Serial Number: | 2CSP-3      | Test Date:   | 2023/11/2  |
| Test Site:     | CE          | Test Mode:   | Transmitting (tested at maximum output power mode ANT0 high channel) |
| Tester:        | David Huang | Test Result: | Pass   |

#### Environmental Conditions:


|                   |      |                        |    |                     |       |
|-------------------|------|------------------------|----|---------------------|-------|
| Temperature: (°C) | 25.9 | Relative Humidity: (%) | 54 | ATM Pressure: (kPa) | 100.9 |
|-------------------|------|------------------------|----|---------------------|-------|

#### Test Equipment List and Details:

| Manufacturer | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------|---------------|------------------|----------------------|
| R&S          | LISN              | ENV216  | 101134        | 2023/03/31       | 2024/03/30           |
| R&S          | EMI Test Receiver | ESR3    | 102726        | 2023/03/31       | 2024/03/30           |
| MICRO-COAX   | Coaxial Cable     | UTIFLEX | C-0200-01     | 2023/08/06       | 2024/08/05           |
| Audix        | Test Software     | E3      | 190306 (V9)   | N/A              | N/A                  |


\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: CR231062962-RF  
Tester: David Huang  
Port: Line  
Note: Transmitting

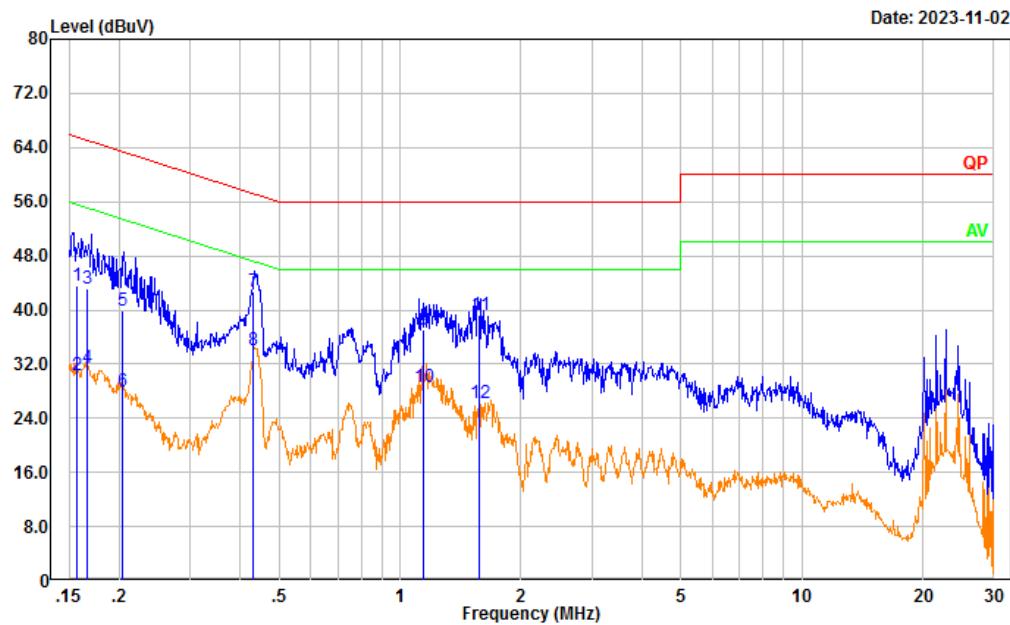

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Detector |
|-----|-----------------|----------------------|-------------|---------------------|--------------------|-------------|----------|
| 1   | 0.157           | 33.99                | 9.61        | 43.60               | 65.63              | 22.03       | QP       |
| 2   | 0.157           | 20.81                | 9.61        | 30.42               | 55.63              | 25.21       | Average  |
| 3   | 0.167           | 33.51                | 9.61        | 43.12               | 65.13              | 22.01       | QP       |
| 4   | 0.167           | 21.88                | 9.61        | 31.49               | 55.13              | 23.64       | Average  |
| 5   | 0.204           | 30.19                | 9.61        | 39.80               | 63.47              | 23.67       | QP       |
| 6   | 0.204           | 18.39                | 9.61        | 28.00               | 53.47              | 25.47       | Average  |
| 7   | 0.432           | 33.07                | 9.61        | 42.68               | 57.20              | 14.52       | QP       |
| 8   | 0.432           | 24.38                | 9.61        | 33.99               | 47.20              | 13.21       | Average  |
| 9   | 1.146           | 27.45                | 9.62        | 37.07               | 56.00              | 18.93       | QP       |
| 10  | 1.146           | 19.10                | 9.62        | 28.72               | 46.00              | 17.28       | Average  |
| 11  | 1.577           | 29.61                | 9.63        | 39.24               | 56.00              | 16.76       | QP       |
| 12  | 1.577           | 16.64                | 9.63        | 26.27               | 46.00              | 19.73       | Average  |

Project No.: CR231062962-RF  
Tester: David Huang  
Port: neutral  
Note: Transmitting

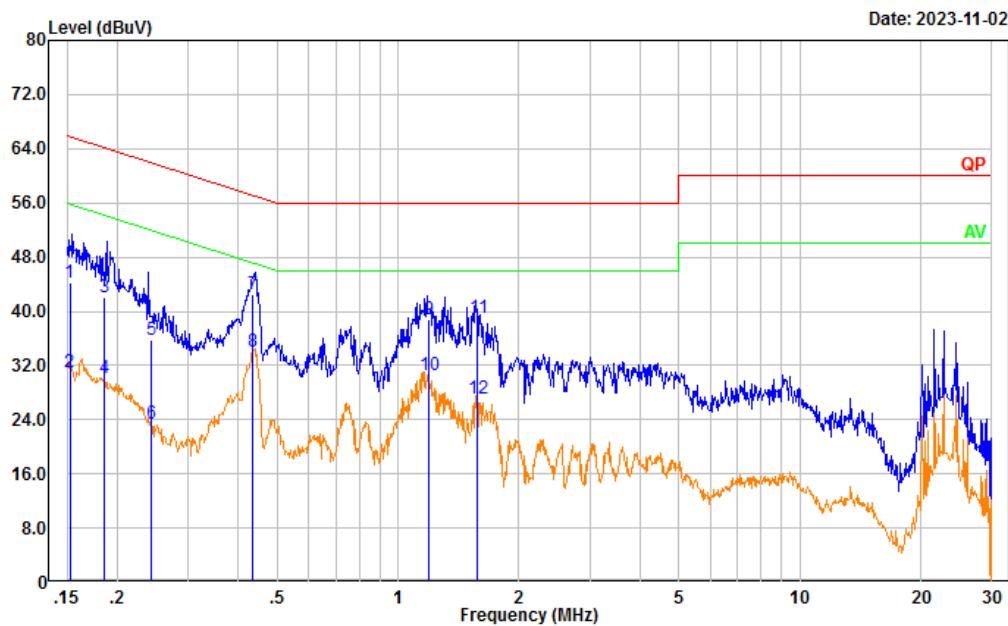

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB) | Result (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Detector |
|-----|-----------------|----------------------|-------------|---------------------|--------------------|-------------|----------|
| 1   | 0.152           | 34.57                | 9.61        | 44.18               | 65.87              | 21.69       | QP       |
| 2   | 0.152           | 21.47                | 9.61        | 31.08               | 55.87              | 24.79       | Average  |
| 3   | 0.186           | 32.50                | 9.61        | 42.11               | 64.22              | 22.11       | QP       |
| 4   | 0.186           | 20.63                | 9.61        | 30.24               | 54.22              | 23.98       | Average  |
| 5   | 0.243           | 26.20                | 9.61        | 35.81               | 62.00              | 26.19       | QP       |
| 6   | 0.243           | 13.75                | 9.61        | 23.36               | 52.00              | 28.64       | Average  |
| 7   | 0.435           | 32.95                | 9.61        | 42.56               | 57.16              | 14.60       | QP       |
| 8   | 0.435           | 24.50                | 9.61        | 34.11               | 47.16              | 13.05       | Average  |
| 9   | 1.194           | 29.12                | 9.62        | 38.74               | 56.00              | 17.26       | QP       |
| 10  | 1.194           | 21.03                | 9.62        | 30.65               | 46.00              | 15.35       | Average  |
| 11  | 1.576           | 29.32                | 9.63        | 38.95               | 56.00              | 17.05       | QP       |
| 12  | 1.576           | 17.57                | 9.63        | 27.20               | 46.00              | 18.80       | Average  |

#### 4.2 Radiated Emissions:

|                |                      |              |                       |
|----------------|----------------------|--------------|-----------------------|
| Serial Number: | 2CSP-3               | Test Date:   | 2023/11/15~2023/12/22 |
| Test Site:     | 966-1, 966-2         | Test Mode:   | Transmitting          |
| Tester:        | Jeff Luo ,Mack Huang | Test Result: | Pass                  |

#### Environmental Conditions:

|                   |         |                        |       |                     |             |
|-------------------|---------|------------------------|-------|---------------------|-------------|
| Temperature: (°C) | 25.4~26 | Relative Humidity: (%) | 53~57 | ATM Pressure: (kPa) | 100.5~102.6 |
|-------------------|---------|------------------------|-------|---------------------|-------------|

#### Test Equipment List and Details:

| Manufacturer    | Description                     | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|---------------------------------|-----------------------|---------------|------------------|----------------------|
| Sunol Sciences  | Antenna                         | JB6                   | A082520-6     | 2023/9/18        | 2026/9/17            |
| R&S             | EMI Test Receiver               | ESR3                  | 102724        | 2023/3/31        | 2024/3/30            |
| TIMES MICROWAVE | Coaxial Cable                   | LMR-600-UltraFlex     | C-0470-02     | 2023/7/16        | 2024/7/15            |
| TIMES MICROWAVE | Coaxial Cable                   | LMR-600-UltraFlex     | C-0780-01     | 2023/7/16        | 2024/7/15            |
| Sonoma          | Amplifier                       | 310N                  | 186165        | 2023/7/16        | 2024/7/15            |
| Audix           | Test Software                   | E3                    | 201021 (V9)   | N/A              | N/A                  |
| AH              | Double Ridge Guide Horn Antenna | SAS-571               | 1394          | 2023/2/22        | 2026/2/21            |
| R&S             | Spectrum Analyzer               | FSV40                 | 101591        | 2023/3/31        | 2024/3/30            |
| MICRO-COAX      | Coaxial Cable                   | UFA210A-1-1200-70U300 | 217423-008    | 2023/8/6         | 2024/8/5             |
| MICRO-COAX      | Coaxial Cable                   | UFA210A-1-2362-300300 | 235780-001    | 2023/8/6         | 2024/8/5             |
| Mini            | Pre-amplifier                   | ZVA-183-S+            | 5969001149    | 2023/11/8        | 2024/11/9            |
| PASTERNACK      | Horn Antenna                    | PE9852/2F-20          | 112002        | 2021/2/5         | 2024/2/4             |
| Quinstar        | Preamplifier                    | QLW-18405536-JO       | 15964001005   | 2023/9/15        | 2024/9/14            |
| MICRO-COAX      | Coaxial Cable                   | UFB142A-1-2362-200200 | 235772-001    | 2023/8/6         | 2024/8/5             |


\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

**1) 30MHz-1GHz**


ANT0 Low Channel:

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: horizontal  
Note:

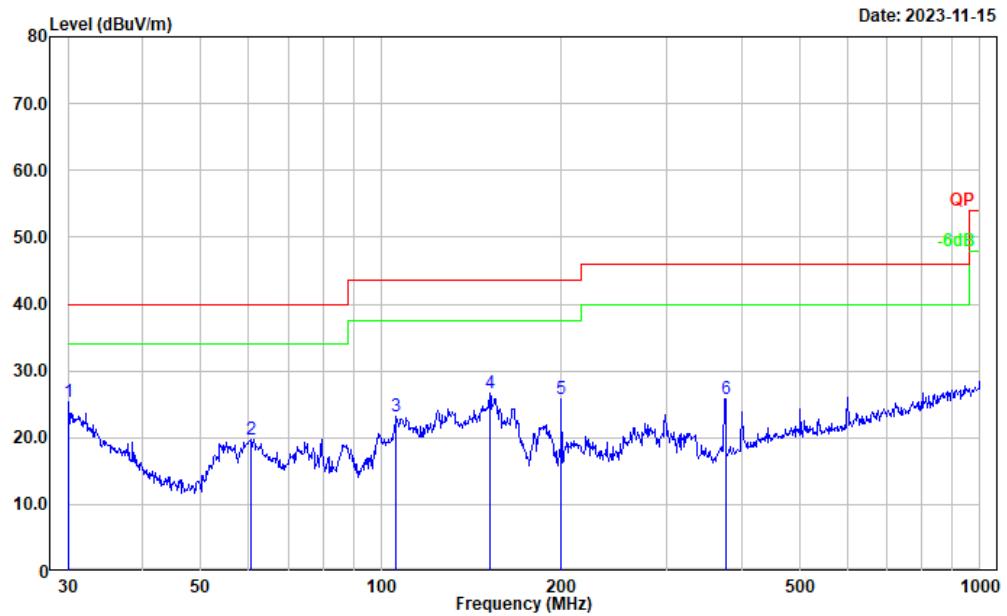

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 30.000          | 29.12                | -3.80         | 25.32                 | 40.00                | 14.68       | Peak     |
| 2   | 60.492          | 37.13                | -17.30        | 19.83                 | 40.00                | 20.17       | Peak     |
| 3   | 105.642         | 36.42                | -13.23        | 23.19                 | 43.50                | 20.31       | Peak     |
| 4   | 152.130         | 38.50                | -11.92        | 26.58                 | 43.50                | 16.92       | Peak     |
| 5   | 199.986         | 38.08                | -12.21        | 25.87                 | 43.50                | 17.63       | Peak     |
| 6   | 375.939         | 35.17                | -9.29         | 25.88                 | 46.00                | 20.12       | Peak     |


Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: vertical  
Note:

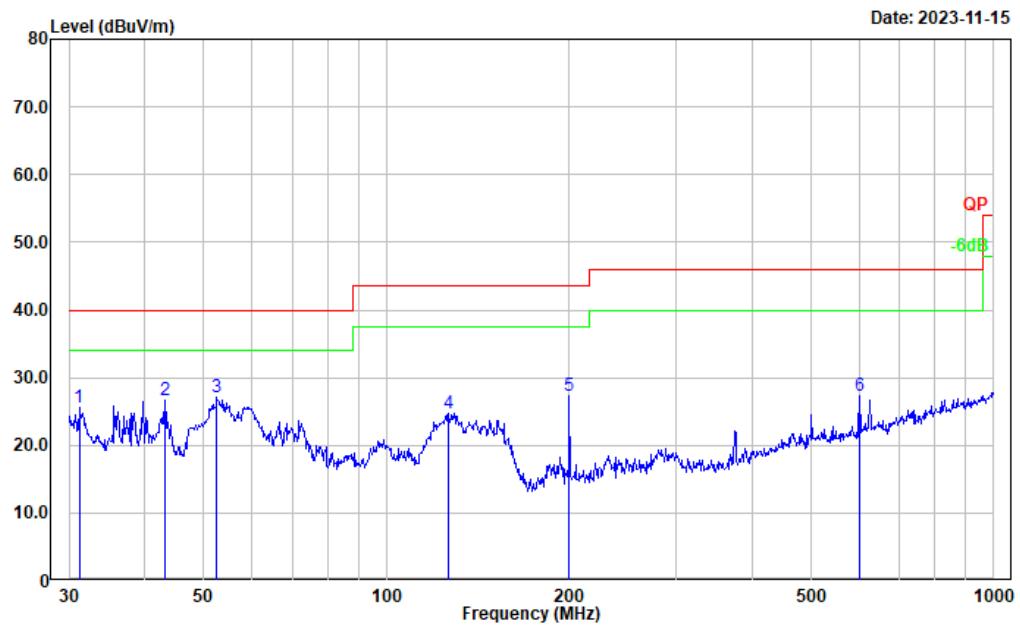

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 31.180          | 30.35                | -4.69         | 25.66                 | 40.00                | 14.34       | Peak     |
| 2   | 43.202          | 39.99                | -13.22        | 26.77                 | 40.00                | 13.23       | Peak     |
| 3   | 52.575          | 44.28                | -17.12        | 27.16                 | 40.00                | 12.84       | Peak     |
| 4   | 126.772         | 36.06                | -11.35        | 24.71                 | 43.50                | 18.79       | Peak     |
| 5   | 199.986         | 39.63                | -12.21        | 27.42                 | 43.50                | 16.08       | Peak     |
| 6   | 601.427         | 32.34                | -5.03         | 27.31                 | 46.00                | 18.69       | Peak     |


## ANT0 Middle Channel:

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: horizontal  
Note:

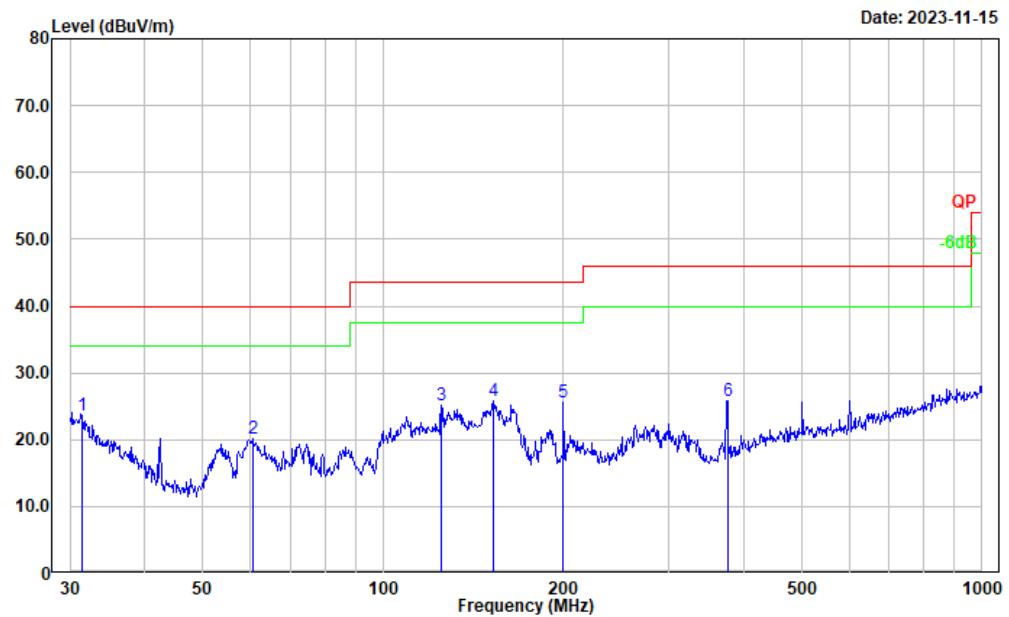

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 31.510          | 28.65                | -4.93         | 23.72                 | 40.00                | 16.28       | Peak     |
| 2   | 60.492          | 37.56                | -17.30        | 20.26                 | 40.00                | 19.74       | Peak     |
| 3   | 125.007         | 36.43                | -11.31        | 25.12                 | 43.50                | 18.38       | Peak     |
| 4   | 153.200         | 37.78                | -11.93        | 25.85                 | 43.50                | 17.65       | Peak     |
| 5   | 199.986         | 37.82                | -12.21        | 25.61                 | 43.50                | 17.89       | Peak     |
| 6   | 375.939         | 35.15                | -9.29         | 25.86                 | 46.00                | 20.14       | Peak     |


Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: vertical  
Note:

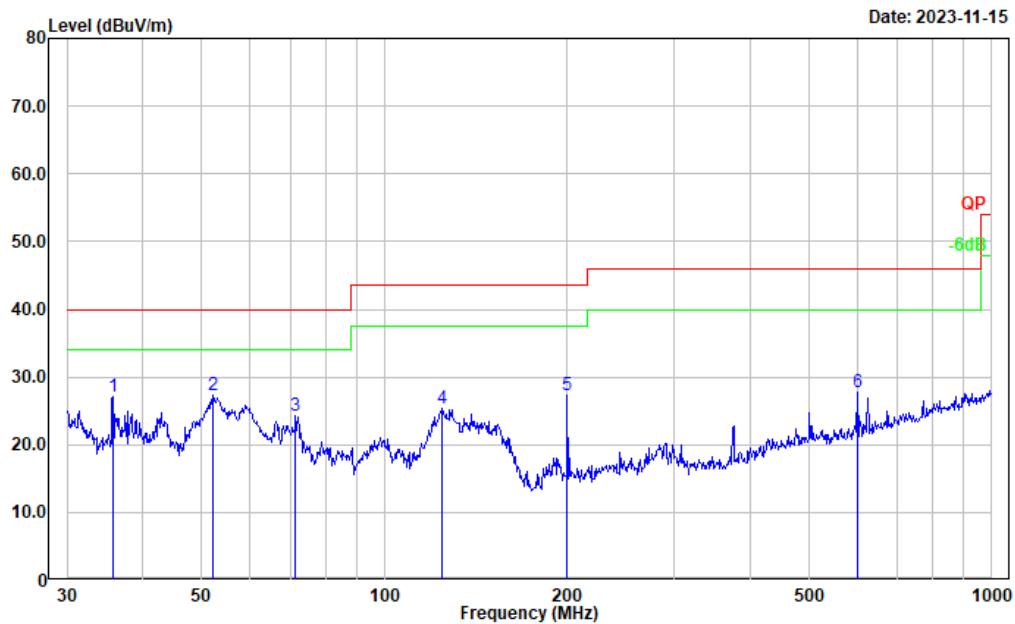

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 35.749          | 35.21                | -8.20         | 27.01                 | 40.00                | 12.99       | Peak     |
| 2   | 52.208          | 44.44                | -17.11        | 27.33                 | 40.00                | 12.67       | Peak     |
| 3   | 71.330          | 41.03                | -16.70        | 24.33                 | 40.00                | 15.67       | Peak     |
| 4   | 124.569         | 36.62                | -11.35        | 25.27                 | 43.50                | 18.23       | Peak     |
| 5   | 199.986         | 39.43                | -12.21        | 27.22                 | 43.50                | 16.28       | Peak     |
| 6   | 601.427         | 32.83                | -5.03         | 27.80                 | 46.00                | 18.20       | Peak     |


## ANT0 High Channel:

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: horizontal  
Note:

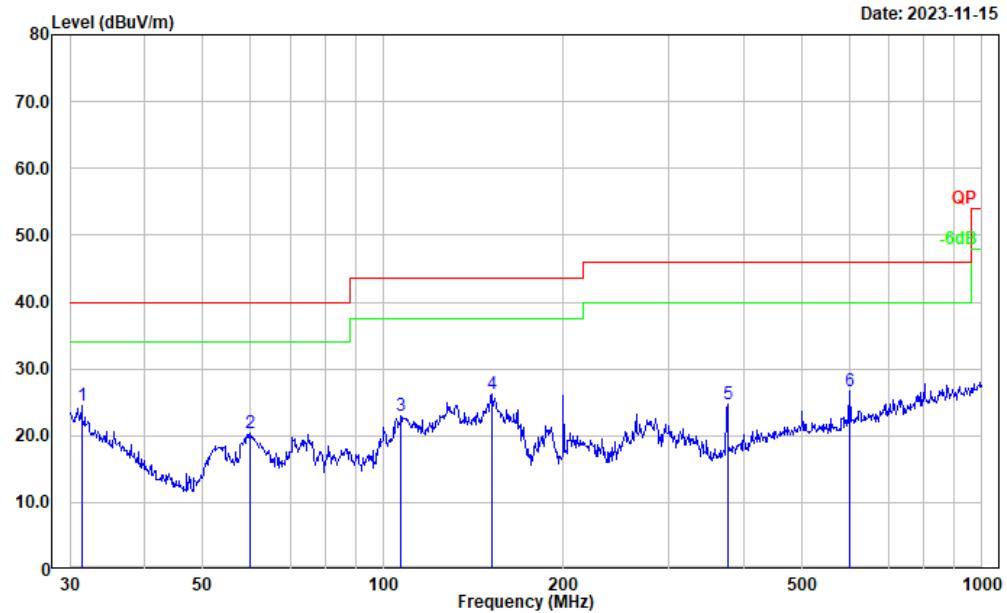

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 31.399          | 29.40                | -4.86         | 24.54                 | 40.00                | 15.46       | Peak     |
| 2   | 60.069          | 37.71                | -17.31        | 20.40                 | 40.00                | 19.60       | Peak     |
| 3   | 107.134         | 35.89                | -12.87        | 23.02                 | 43.50                | 20.48       | Peak     |
| 4   | 152.130         | 38.21                | -11.92        | 26.29                 | 43.50                | 17.21       | Peak     |
| 5   | 375.939         | 33.93                | -9.29         | 24.64                 | 46.00                | 21.36       | Peak     |
| 6   | 601.427         | 31.75                | -5.03         | 26.72                 | 46.00                | 19.28       | Peak     |


Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: vertical  
Note:

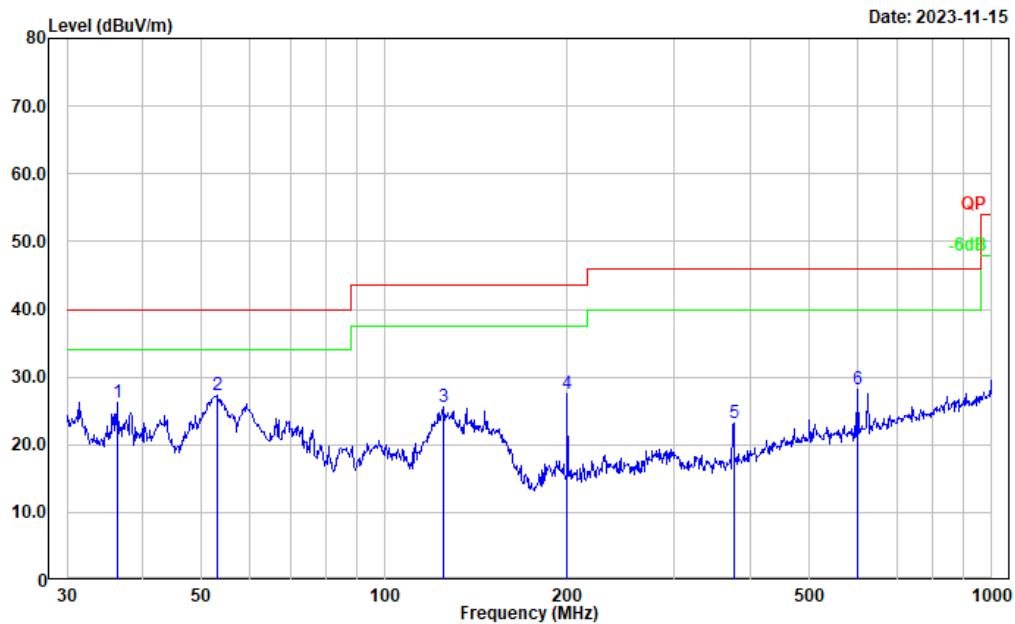

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 36.254          | 34.91                | -8.58         | 26.33                 | 40.00                | 13.67       | Peak     |
| 2   | 53.131          | 44.46                | -17.13        | 27.33                 | 40.00                | 12.67       | Peak     |
| 3   | 125.007         | 36.99                | -11.31        | 25.68                 | 43.50                | 17.82       | Peak     |
| 4   | 199.986         | 39.74                | -12.21        | 27.53                 | 43.50                | 15.97       | Peak     |
| 5   | 375.939         | 32.57                | -9.29         | 23.28                 | 46.00                | 22.72       | Peak     |
| 6   | 601.427         | 33.24                | -5.03         | 28.21                 | 46.00                | 17.79       | Peak     |


## ANT1 Low Channel:

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: horizontal  
Note:

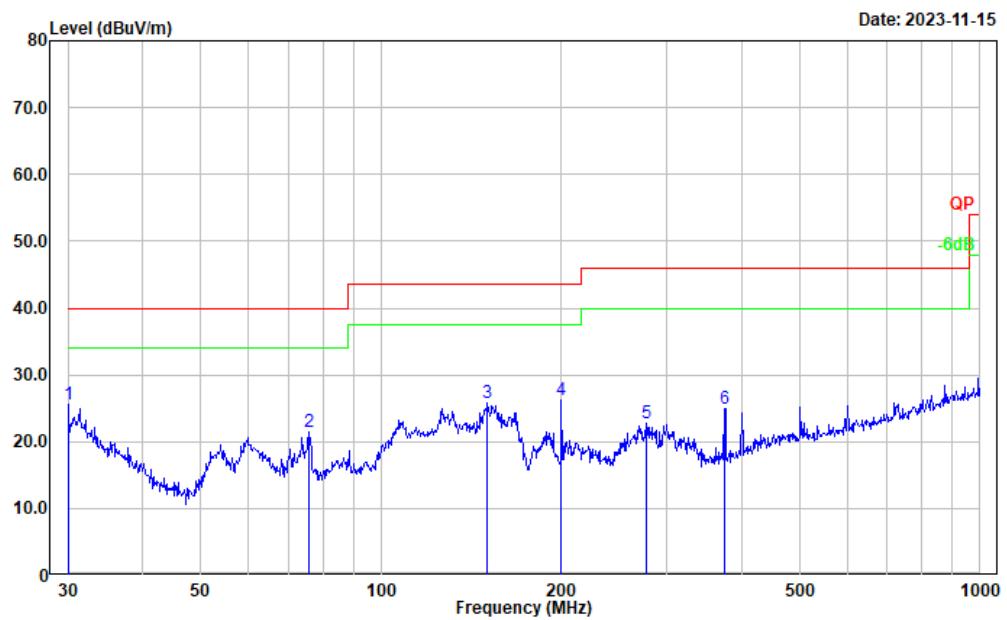

| No.   | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-------|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| <hr/> |                 |                      |               |                       |                      |             |          |
| 1     | 30.000          | 29.34                | -3.80         | 25.54                 | 40.00                | 14.46       | Peak     |
| 2     | 75.977          | 38.57                | -17.06        | 21.51                 | 40.00                | 18.49       | Peak     |
| 3     | 150.538         | 37.79                | -11.93        | 25.86                 | 43.50                | 17.64       | Peak     |
| 4     | 199.986         | 38.51                | -12.21        | 26.30                 | 43.50                | 17.20       | Peak     |
| 5     | 277.094         | 34.62                | -11.85        | 22.77                 | 46.00                | 23.23       | Peak     |
| 6     | 374.623         | 34.24                | -9.34         | 24.90                 | 46.00                | 21.10       | Peak     |


Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: vertical  
Note:

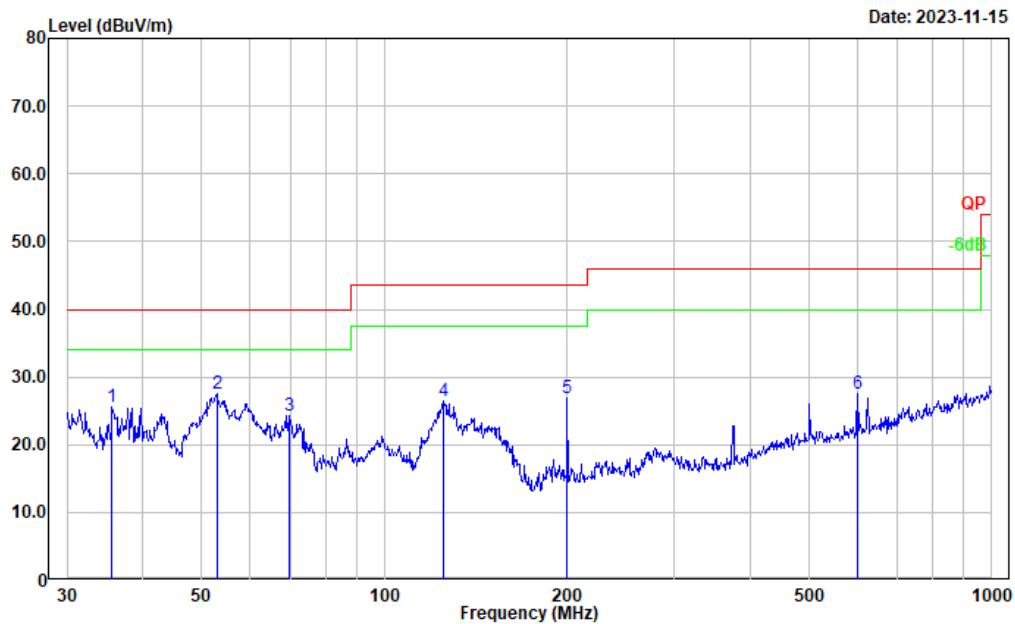

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 35.624          | 33.68                | -8.10         | 25.58                 | 40.00                | 14.42       | Peak     |
| 2   | 52.945          | 44.59                | -17.13        | 27.46                 | 40.00                | 12.54       | Peak     |
| 3   | 69.600          | 40.99                | -16.61        | 24.38                 | 40.00                | 15.62       | Peak     |
| 4   | 125.007         | 37.70                | -11.31        | 26.39                 | 43.50                | 17.11       | Peak     |
| 5   | 199.986         | 39.11                | -12.21        | 26.90                 | 43.50                | 16.60       | Peak     |
| 6   | 601.427         | 32.64                | -5.03         | 27.61                 | 46.00                | 18.39       | Peak     |


## ANT1 Middle Channel:

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: horizontal  
Note:

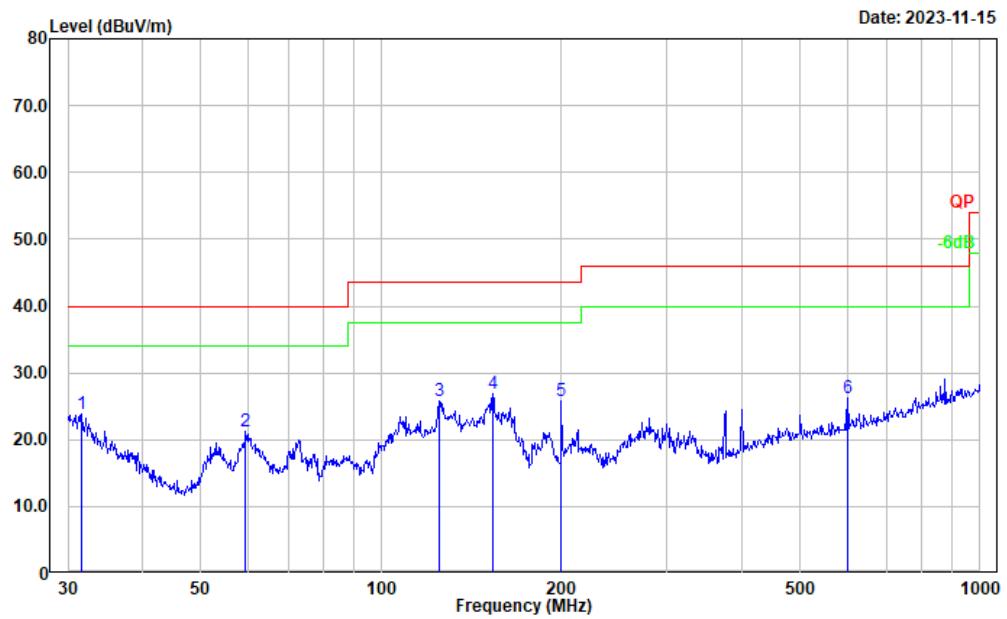

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 31.620          | 28.88                | -5.02         | 23.86                 | 40.00                | 16.14       | Peak     |
| 2   | 59.441          | 38.45                | -17.31        | 21.14                 | 40.00                | 18.86       | Peak     |
| 3   | 125.007         | 37.05                | -11.31        | 25.74                 | 43.50                | 17.76       | Peak     |
| 4   | 153.739         | 38.73                | -11.91        | 26.82                 | 43.50                | 16.68       | Peak     |
| 5   | 199.986         | 37.97                | -12.21        | 25.76                 | 43.50                | 17.74       | Peak     |
| 6   | 601.427         | 31.29                | -5.03         | 26.26                 | 46.00                | 19.74       | Peak     |


Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: vertical  
Note:

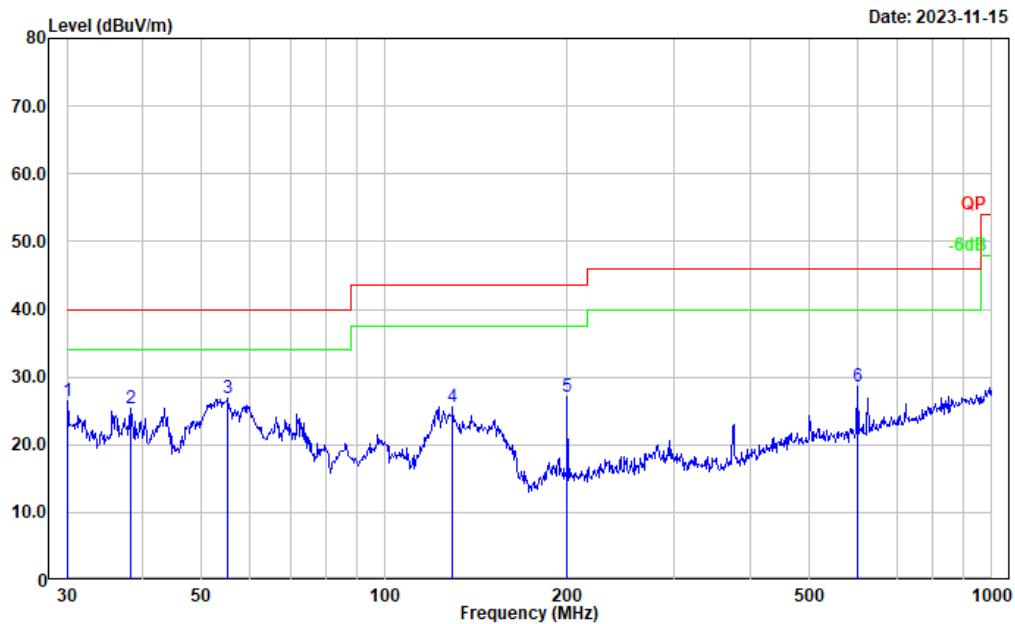

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 30.105          | 30.26                | -3.88         | 26.38                 | 40.00                | 13.62       | Peak     |
| 2   | 38.212          | 35.45                | -10.02        | 25.43                 | 40.00                | 14.57       | Peak     |
| 3   | 55.221          | 44.00                | -17.19        | 26.81                 | 40.00                | 13.19       | Peak     |
| 4   | 129.468         | 36.94                | -11.28        | 25.66                 | 43.50                | 17.84       | Peak     |
| 5   | 199.986         | 39.25                | -12.21        | 27.04                 | 43.50                | 16.46       | Peak     |
| 6   | 601.427         | 33.70                | -5.03         | 28.67                 | 46.00                | 17.33       | Peak     |


## ANT1 High Channel:

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: horizontal  
Note:

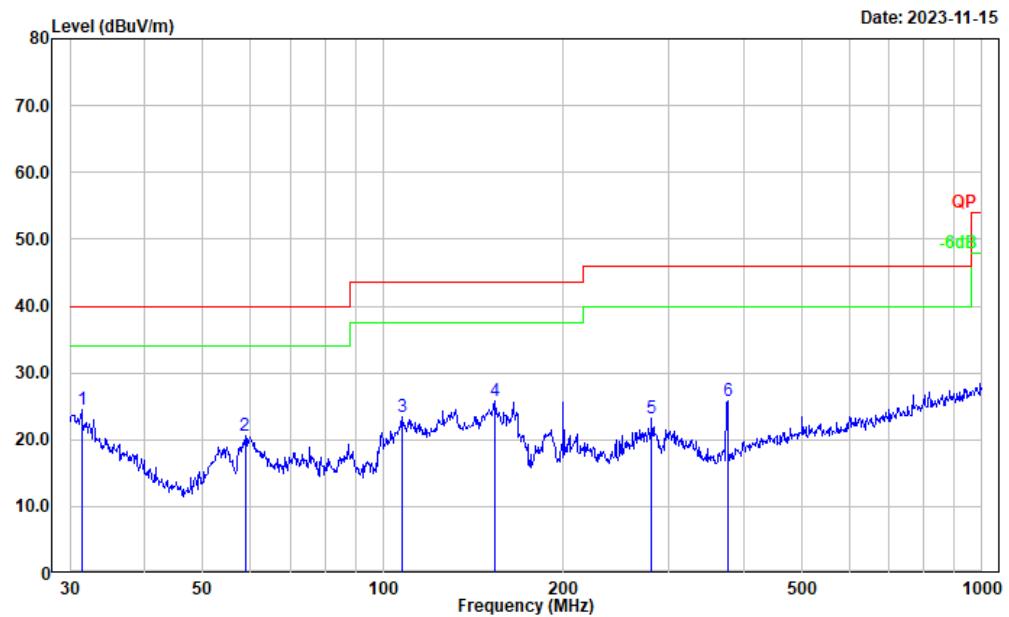

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 31.399          | 29.40                | -4.86         | 24.54                 | 40.00                | 15.46       | Peak     |
| 2   | 58.819          | 37.86                | -17.29        | 20.57                 | 40.00                | 19.43       | Peak     |
| 3   | 107.510         | 36.13                | -12.80        | 23.33                 | 43.50                | 20.17       | Peak     |
| 4   | 153.739         | 37.78                | -11.91        | 25.87                 | 43.50                | 17.63       | Peak     |
| 5   | 281.008         | 34.89                | -11.64        | 23.25                 | 46.00                | 22.75       | Peak     |
| 6   | 375.939         | 35.16                | -9.29         | 25.87                 | 46.00                | 20.13       | Peak     |

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: vertical  
Note:

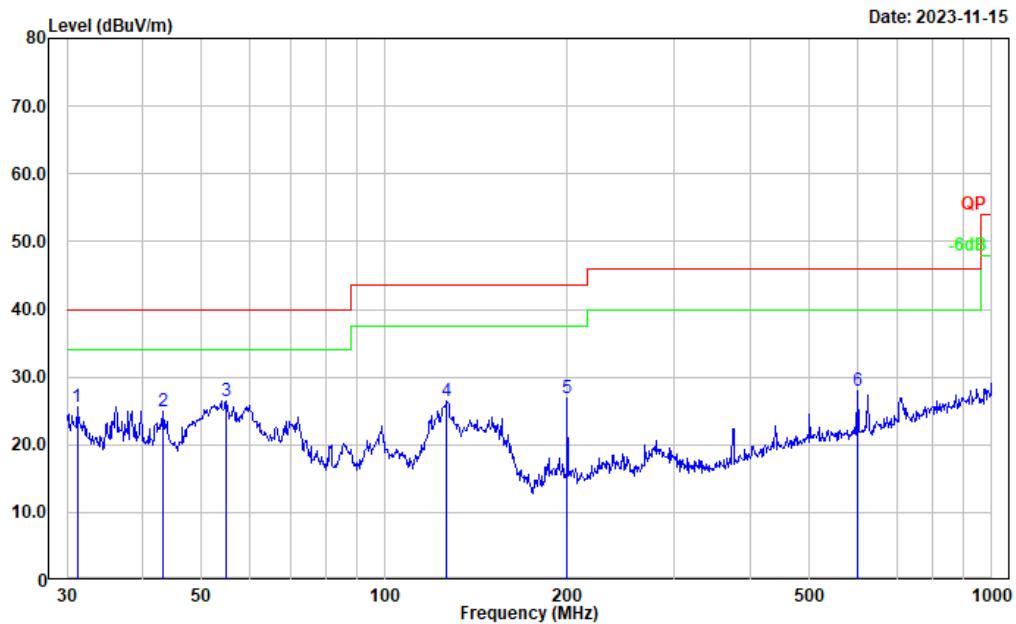


| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 31.180          | 30.29                | -4.69         | 25.60                 | 40.00                | 14.40       | Peak     |
| 2   | 43.202          | 38.20                | -13.22        | 24.98                 | 40.00                | 15.02       | Peak     |
| 3   | 54.835          | 43.62                | -17.18        | 26.44                 | 40.00                | 13.56       | Peak     |
| 4   | 126.772         | 37.70                | -11.35        | 26.35                 | 43.50                | 17.15       | Peak     |
| 5   | 199.986         | 39.13                | -12.21        | 26.92                 | 43.50                | 16.58       | Peak     |
| 6   | 601.427         | 33.05                | -5.03         | 28.02                 | 46.00                | 17.98       | Peak     |

**Transmission simultaneously:**


DECT ANT0 High Channel + Wi-Fi 802.11g Low Channel was the worst

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: horizontal  
Note:

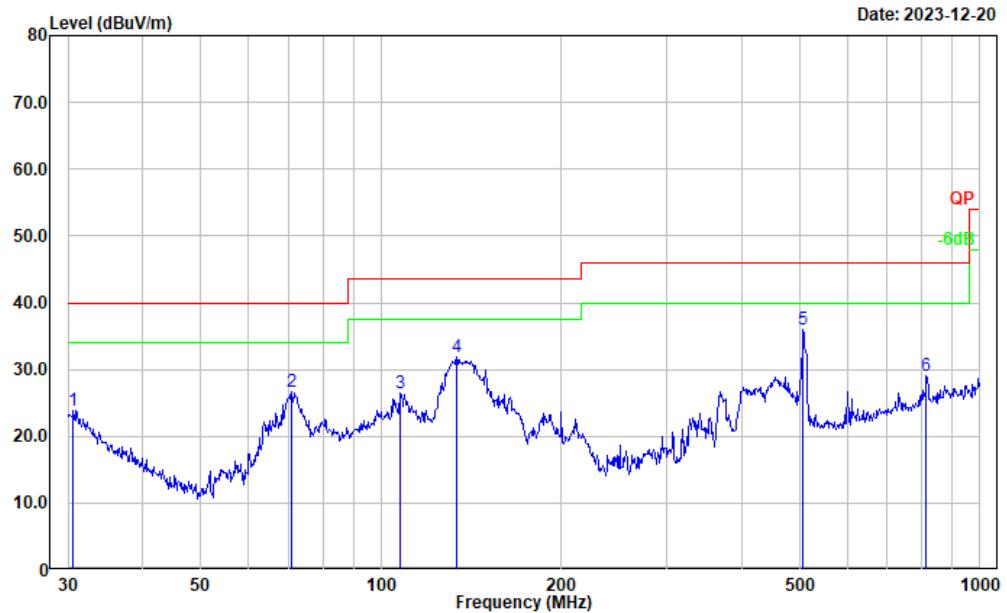

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 30.638          | 28.23                | -4.28         | 23.95                 | 40.00                | 16.05       | Peak     |
| 2   | 70.832          | 43.36                | -16.64        | 26.72                 | 40.00                | 13.28       | Peak     |
| 3   | 107.888         | 39.14                | -12.72        | 26.42                 | 43.50                | 17.08       | Peak     |
| 4   | 133.619         | 43.34                | -11.51        | 31.83                 | 43.50                | 11.67       | Peak     |
| 5   | 506.479         | 41.99                | -5.91         | 36.08                 | 46.00                | 9.92        | Peak     |
| 6   | 813.112         | 30.94                | -1.88         | 29.06                 | 46.00                | 16.94       | Peak     |

Project No.: CR231062962-RF  
Tester: Jeff Luo  
Polarization: vertical  
Note:

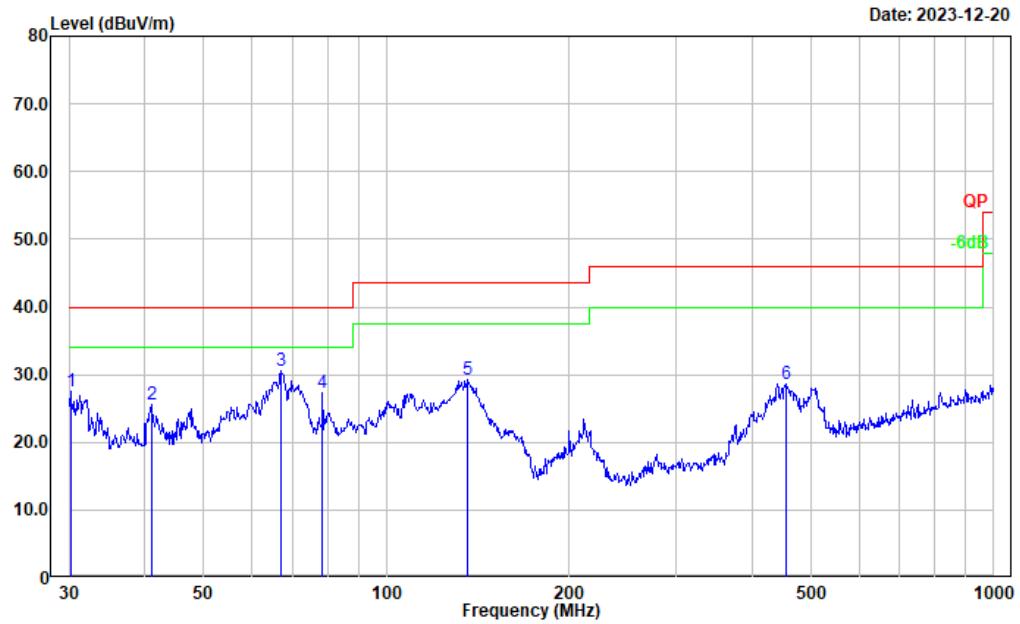

| No. | Frequency (MHz) | Reading (dB $\mu$ V) | Factor (dB/m) | Result (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------|-----------------------|----------------------|-------------|----------|
| 1   | 30.211          | 31.48                | -3.96         | 27.52                 | 40.00                | 12.48       | Peak     |
| 2   | 40.988          | 37.49                | -11.98        | 25.51                 | 40.00                | 14.49       | Peak     |
| 3   | 66.967          | 47.46                | -16.80        | 30.66                 | 40.00                | 9.34        | Peak     |
| 4   | 78.413          | 44.65                | -17.32        | 27.33                 | 40.00                | 12.67       | Peak     |
| 5   | 135.982         | 40.83                | -11.59        | 29.24                 | 43.50                | 14.26       | Peak     |
| 6   | 454.310         | 35.49                | -6.80         | 28.69                 | 46.00                | 17.31       | Peak     |

**1) 1-20GHz****ANT 0:****Peak Field Strength**

| Frequency<br>(MHz)           | Receiver                |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|------------------------------|-------------------------|----------|----------------|------------------|--------------------------|-------------------------|----------------|
|                              | Reading<br>(dB $\mu$ V) | Detector |                |                  |                          |                         |                |
| Low Channel: 1921.536 MHz    |                         |          |                |                  |                          |                         |                |
| 3843.072                     | 35.14                   | PK       | H              | 7.77             | 42.91                    | 74.00                   | 31.09          |
| 3843.072                     | 34.88                   | PK       | V              | 7.77             | 42.65                    | 74.00                   | 31.35          |
| Middle Channel: 1924.992 MHz |                         |          |                |                  |                          |                         |                |
| 3849.984                     | 37.78                   | PK       | H              | 7.77             | 45.55                    | 74.00                   | 28.45          |
| 3849.984                     | 35.11                   | PK       | V              | 7.77             | 42.88                    | 74.00                   | 31.12          |
| High Channel: 1928.448 MHz   |                         |          |                |                  |                          |                         |                |
| 3856.896                     | 35.20                   | PK       | H              | 7.77             | 42.97                    | 74.00                   | 31.03          |
| 3856.896                     | 34.35                   | PK       | V              | 7.77             | 42.12                    | 74.00                   | 31.88          |

**Average Field Strength**

| Frequency<br>(MHz)           | Peak<br>(dB $\mu$ V/m) | Polar (H/V) | Duty Cycle<br>Factor<br>(dB) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|------------------------------|------------------------|-------------|------------------------------|--------------------------|-------------------------|----------------|
| Low Channel: 1921.536 MHz    |                        |             |                              |                          |                         |                |
| 3843.072                     | 42.91                  | H           | -28.52                       | 14.39                    | 54.00                   | 39.61          |
| 3843.072                     | 42.65                  | V           | -28.52                       | 14.13                    | 54.00                   | 39.87          |
| Middle Channel: 1924.992 MHz |                        |             |                              |                          |                         |                |
| 3849.984                     | 45.55                  | H           | -28.52                       | 17.03                    | 54.00                   | 36.97          |
| 3849.984                     | 42.88                  | V           | -28.52                       | 14.36                    | 54.00                   | 39.64          |
| High Channel: 1928.448 MHz   |                        |             |                              |                          |                         |                |
| 3856.896                     | 42.97                  | H           | -28.52                       | 14.45                    | 54.00                   | 39.55          |
| 3856.896                     | 42.12                  | V           | -28.52                       | 13.60                    | 54.00                   | 40.40          |

Note: Average level= Peak level+ Duty Cycle Factor

**ANT 1:**  
**Peak Field Strength**

| Frequency<br>(MHz) | Receiver                |          | Polar (H/V) | Factor<br>(dB/m) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|----------|-------------|------------------|--------------------------|-------------------------|----------------|
|                    | Reading<br>(dB $\mu$ V) | Detector |             |                  |                          |                         |                |
| Low Channel:       |                         |          |             | 1921.536         | MHz                      |                         |                |
| 3843.072           | 35.46                   | PK       | H           | 7.77             | 43.23                    | 74.00                   | 30.77          |
| 3843.072           | 35.20                   | PK       | V           | 7.77             | 42.97                    | 74.00                   | 31.03          |
| Middle Channel:    |                         |          |             | 1924.992         | MHz                      |                         |                |
| 3849.984           | 36.01                   | PK       | H           | 7.77             | 43.78                    | 74.00                   | 30.22          |
| 3849.984           | 35.41                   | PK       | V           | 7.77             | 43.18                    | 74.00                   | 30.82          |
| High Channel:      |                         |          |             | 1928.448         | MHz                      |                         |                |
| 3856.896           | 35.11                   | PK       | H           | 7.77             | 42.88                    | 74.00                   | 31.12          |
| 3856.896           | 34.69                   | PK       | V           | 7.77             | 42.46                    | 74.00                   | 31.54          |

**Average Field Strength**

| Frequency<br>(MHz) | Peak<br>(dB $\mu$ V/m) | Polar (H/V) | Duty Cycle<br>Factor<br>(dB) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------------|-------------|------------------------------|--------------------------|-------------------------|----------------|
| Low Channel:       |                        |             |                              | 1921.536                 | MHz                     |                |
| 3843.072           | 43.23                  | H           | -28.52                       | 14.71                    | 54.00                   | 39.29          |
| 3843.072           | 42.97                  | V           | -28.52                       | 14.45                    | 54.00                   | 39.55          |
| Middle Channel:    |                        |             |                              | 1924.992                 | MHz                     |                |
| 3849.984           | 43.78                  | H           | -28.52                       | 15.26                    | 54.00                   | 38.74          |
| 3849.984           | 43.18                  | V           | -28.52                       | 14.66                    | 54.00                   | 39.34          |
| High Channel:      |                        |             |                              | 1928.448                 | MHz                     |                |
| 3856.896           | 42.88                  | H           | -28.52                       | 14.36                    | 54.00                   | 39.64          |
| 3856.896           | 42.46                  | V           | -28.52                       | 13.94                    | 54.00                   | 40.06          |

Note: Average level= Peak level+ Duty Cycle Factor

Duty cycle:  
Ton1 = 0.375ms  
Tp = 10ms

Duty cycle = Ton/Tp = 0.375/10=0.0375  
Duty Cycle Corrected Factor = 20lg(Duty cycle) = 20lg0.0375= -28.52

**Transmission simultaneously:**

ANT0 Middle Channel + Wi-Fi 802.11g Low Channel was the worst:

| Frequency<br>(MHz) | Receiver                |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|----------|----------------|------------------|--------------------------|-------------------------|----------------|
|                    | Reading<br>(dB $\mu$ V) | Detector |                |                  |                          |                         |                |
| 3849.984           | 36.93                   | PK       | H              | 7.77             | 44.70                    | 74.00                   | 29.30          |
| 3849.984           | 35.12                   | PK       | V              | 7.77             | 42.89                    | 74.00                   | 31.11          |
| 4874.000           | 33.59                   | PK       | H              | 11.45            | 45.04                    | 74.00                   | 28.96          |
| 4874.000           | 20.16                   | AV       | H              | 11.45            | 31.61                    | 54.00                   | 22.39          |
| 4874.000           | 40.20                   | PK       | V              | 11.45            | 51.65                    | 74.00                   | 22.35          |
| 4874.000           | 27.78                   | AV       | V              | 11.45            | 39.23                    | 54.00                   | 14.77          |

**DECT Average Field Strength**

| Frequency<br>(MHz) | Peak<br>(dB $\mu$ V/m) | Polar<br>(H/V) | Duty<br>Cycle<br>Factor<br>(dB) | Result<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|------------------------|----------------|---------------------------------|--------------------------|-------------------------|----------------|
| 3849.984           | 44.70                  | H              | -28.52                          | 16.18                    | 54.00                   | 37.82          |
| 3849.984           | 42.89                  | V              | -28.52                          | 14.37                    | 54.00                   | 39.63          |

Note: Average level = Peak level + Duty Cycle Factor

Duty cycle:

Ton1 = 0.375ms

Tp = 10ms

Duty cycle = Ton/Tp = 0.375/10 = 0.0375

Duty Cycle Corrected Factor = 20lg(Duty cycle) = 20lg0.0375 = -28.52

#### 4.3 Emission Bandwidth:

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2CSP-1    | Test Date:   | 2023/11/9    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |

#### Environmental Conditions:

|                   |      |                        |    |                     |       |
|-------------------|------|------------------------|----|---------------------|-------|
| Temperature: (°C) | 25.3 | Relative Humidity: (%) | 59 | ATM Pressure: (kPa) | 100.9 |
|-------------------|------|------------------------|----|---------------------|-------|


#### Test Equipment List and Details:

| Manufacturer | Description                        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                  | FSU26         | 100147        | 2023/3/31        | 2024/3/30            |
| zhuoxiang    | Coaxial Cable                      | SMA-178       | 211001        | Each time        | N/A                  |
| YINSAIGE     | Coaxial Cable                      | SS402         | SJ0100001     | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator                 | 2W-SMA-JK-18G | 21060301      | Each time        | N/A                  |
| Unknown      | Coaxial tee connector              | Unknown       | 2204004       | Each time        | N/A                  |
| R&S          | Digital Radio communication Tester | CMD 60M       | 846956/010    | 2023/3/31        | 2024/3/30            |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

| Test Channel | Test Frequency (MHz) | 99% Emission Bandwidth (MHz) | 26 dB Emission Bandwidth (MHz) | Limit (MHz)      |
|--------------|----------------------|------------------------------|--------------------------------|------------------|
| Lowest       | 1921.536             | 1.245                        | 1.457                          | 50 kHz ~ 2.5 MHz |
| Middle       | 1924.992             | 1.250                        | 1.461                          | 50 kHz ~ 2.5 MHz |
| Highest      | 1928.448             | 1.250                        | 1.418                          | 50 kHz ~ 2.5 MHz |

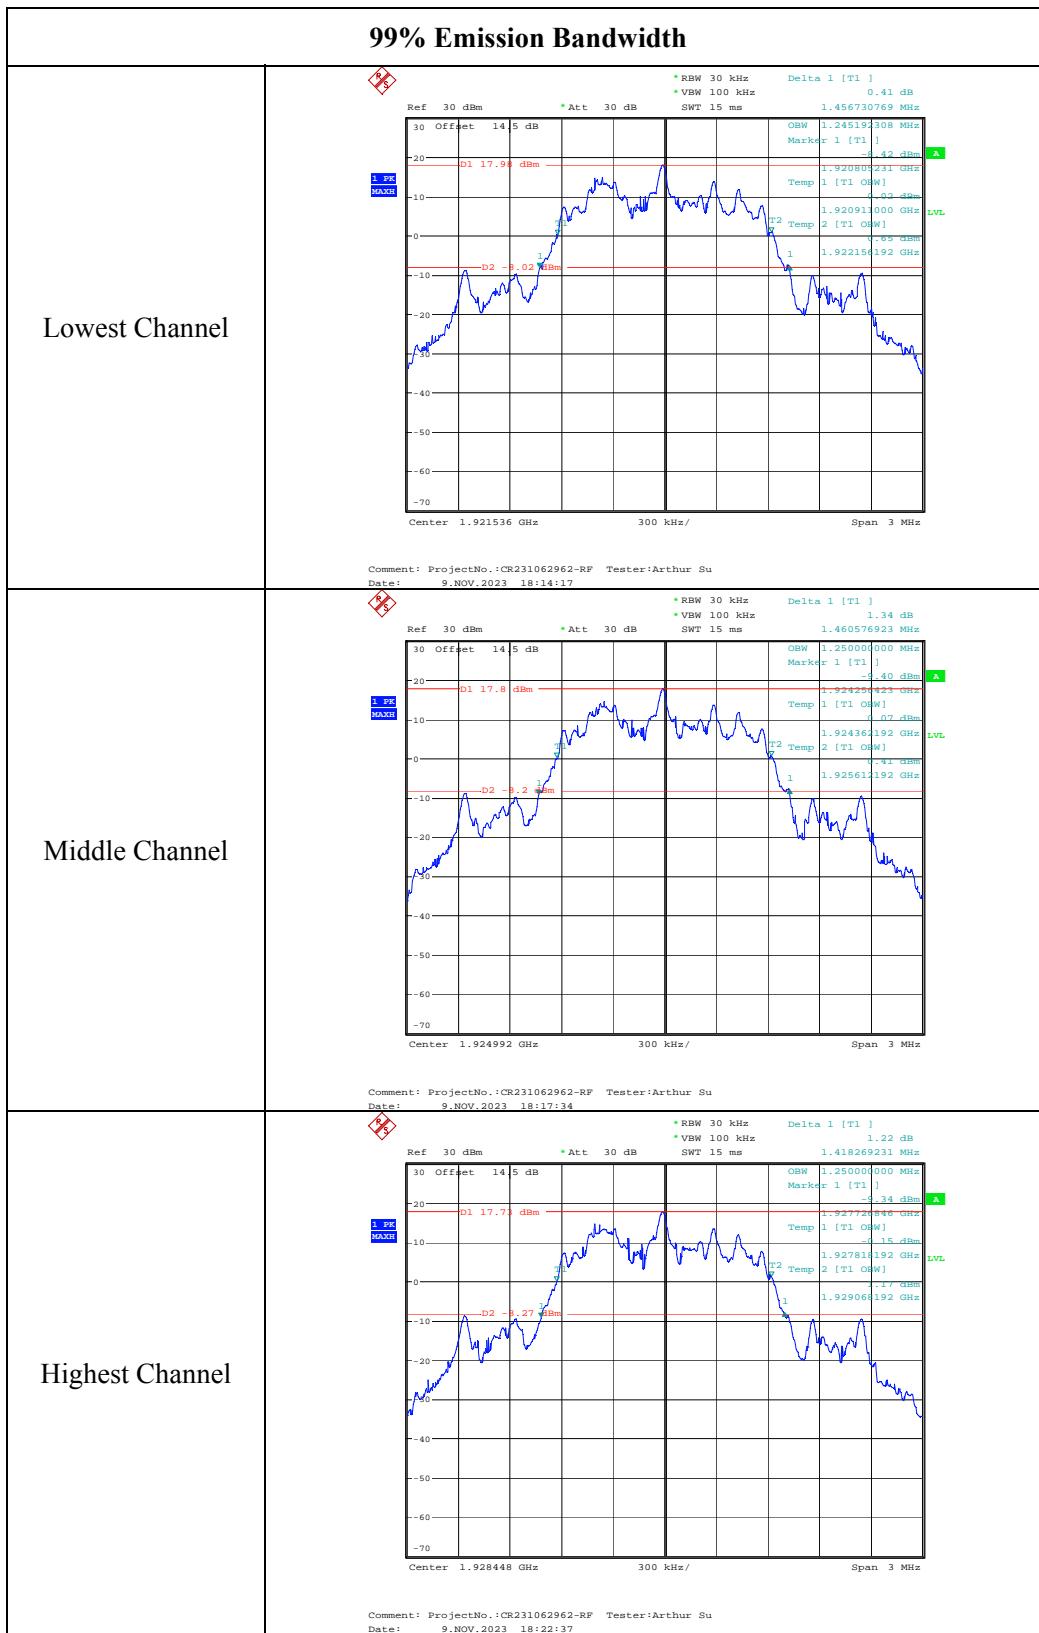

#### 4.4 Peak Transmit Power:

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2CSP-1    | Test Date:   | 2023/11/9    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |

#### Environmental Conditions:

|                   |      |                        |    |                     |       |
|-------------------|------|------------------------|----|---------------------|-------|
| Temperature: (°C) | 25.3 | Relative Humidity: (%) | 59 | ATM Pressure: (kPa) | 100.9 |
|-------------------|------|------------------------|----|---------------------|-------|

#### Test Equipment List and Details:

| Manufacturer | Description                        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                  | FSU26         | 100147        | 2023/3/31        | 2024/3/30            |
| zhuoxiang    | Coaxial Cable                      | SMA-178       | 211001        | Each time        | N/A                  |
| YINSAIGE     | Coaxial Cable                      | SS402         | SJ0100001     | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator                 | 2W-SMA-JK-18G | 21060301      | Each time        | N/A                  |
| Unknown      | Coaxial tee connector              | Unknown       | 2204004       | Each time        | N/A                  |
| R&S          | Digital Radio communication Tester | CMD 60M       | 846956/010    | 2023/3/31        | 2024/3/30            |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


#### Test Data:

| Test Channel | Frequency (MHz) | Peak Transmit Power (dBm) | FCC Limit (dBm) | IC Limit (dBm) |
|--------------|-----------------|---------------------------|-----------------|----------------|
| ANT0         |                 |                           |                 |                |
| Lowest       | 1921.536        | 19.62                     | 20.82           | 20.48          |
| Middle       | 1924.992        | 19.73                     | 20.82           | 20.48          |
| Highest      | 1928.448        | 19.84                     | 20.76           | 20.48          |
| ANT1         |                 |                           |                 |                |
| Lowest       | 1921.536        | 19.59                     | 20.82           | 20.48          |
| Middle       | 1924.992        | 19.68                     | 20.82           | 20.48          |
| Highest      | 1928.448        | 19.61                     | 20.76           | 20.48          |


Note:

For FCC: Peak Transmit Power Limit =  $100(EBW)^{1/2} \mu W$

## ANT 0:

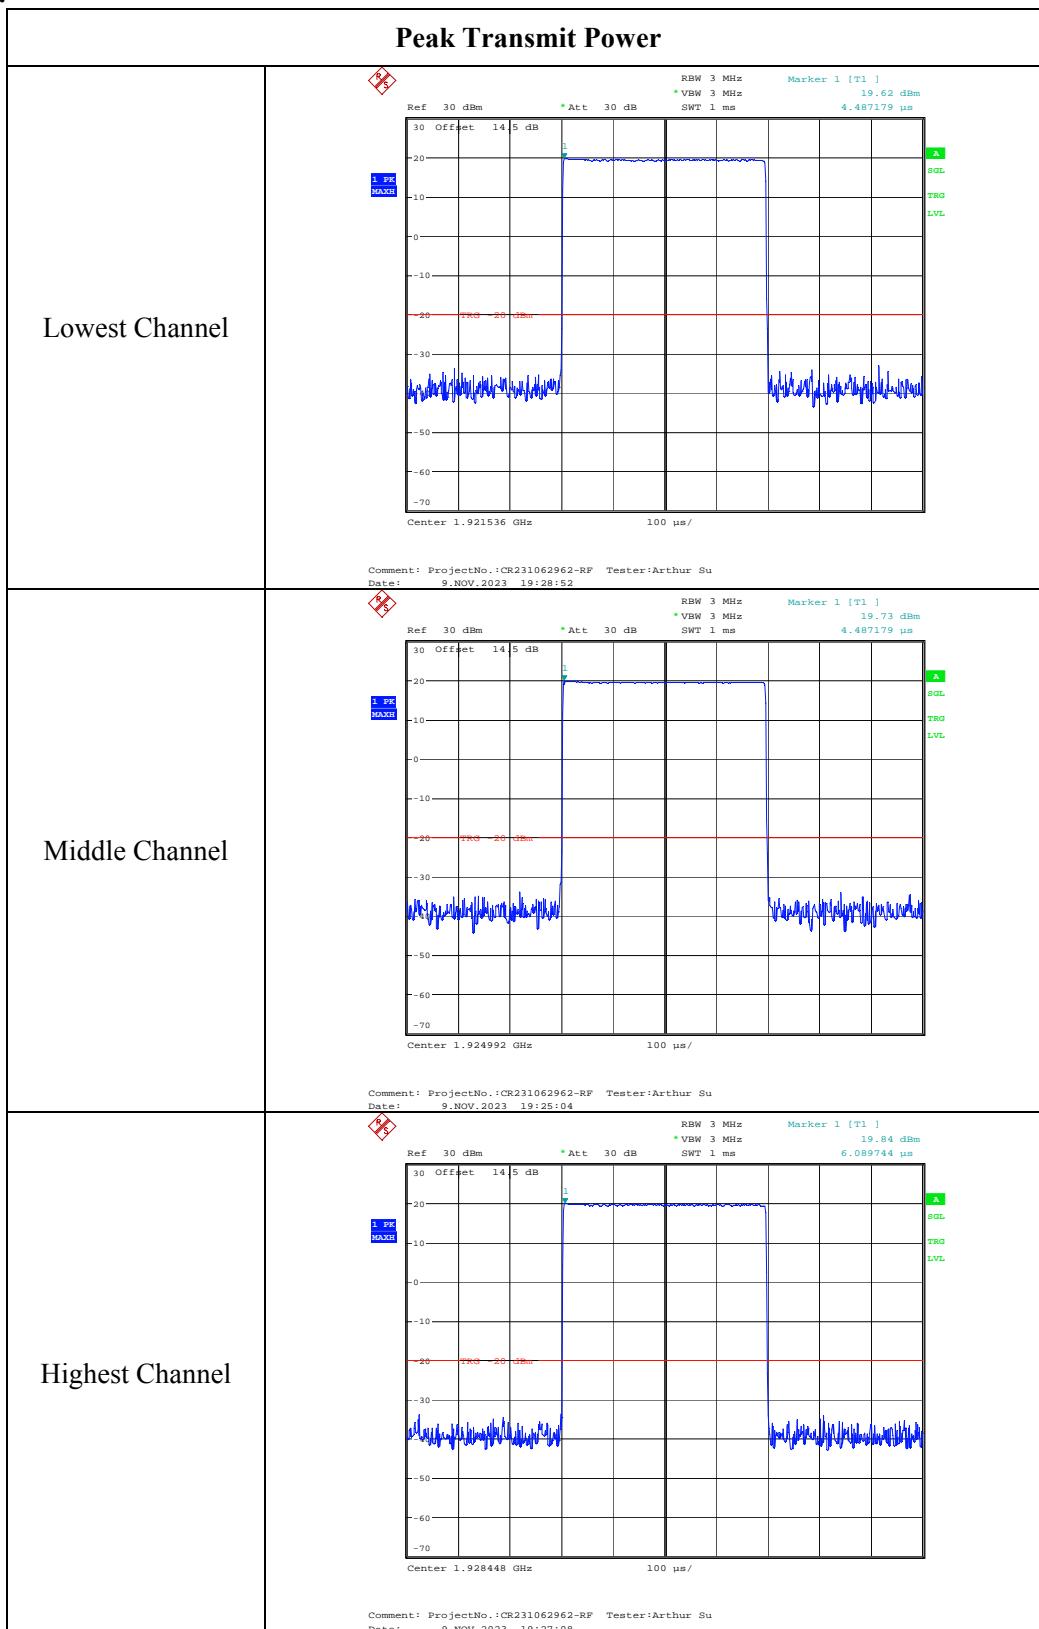

## ANT 1:

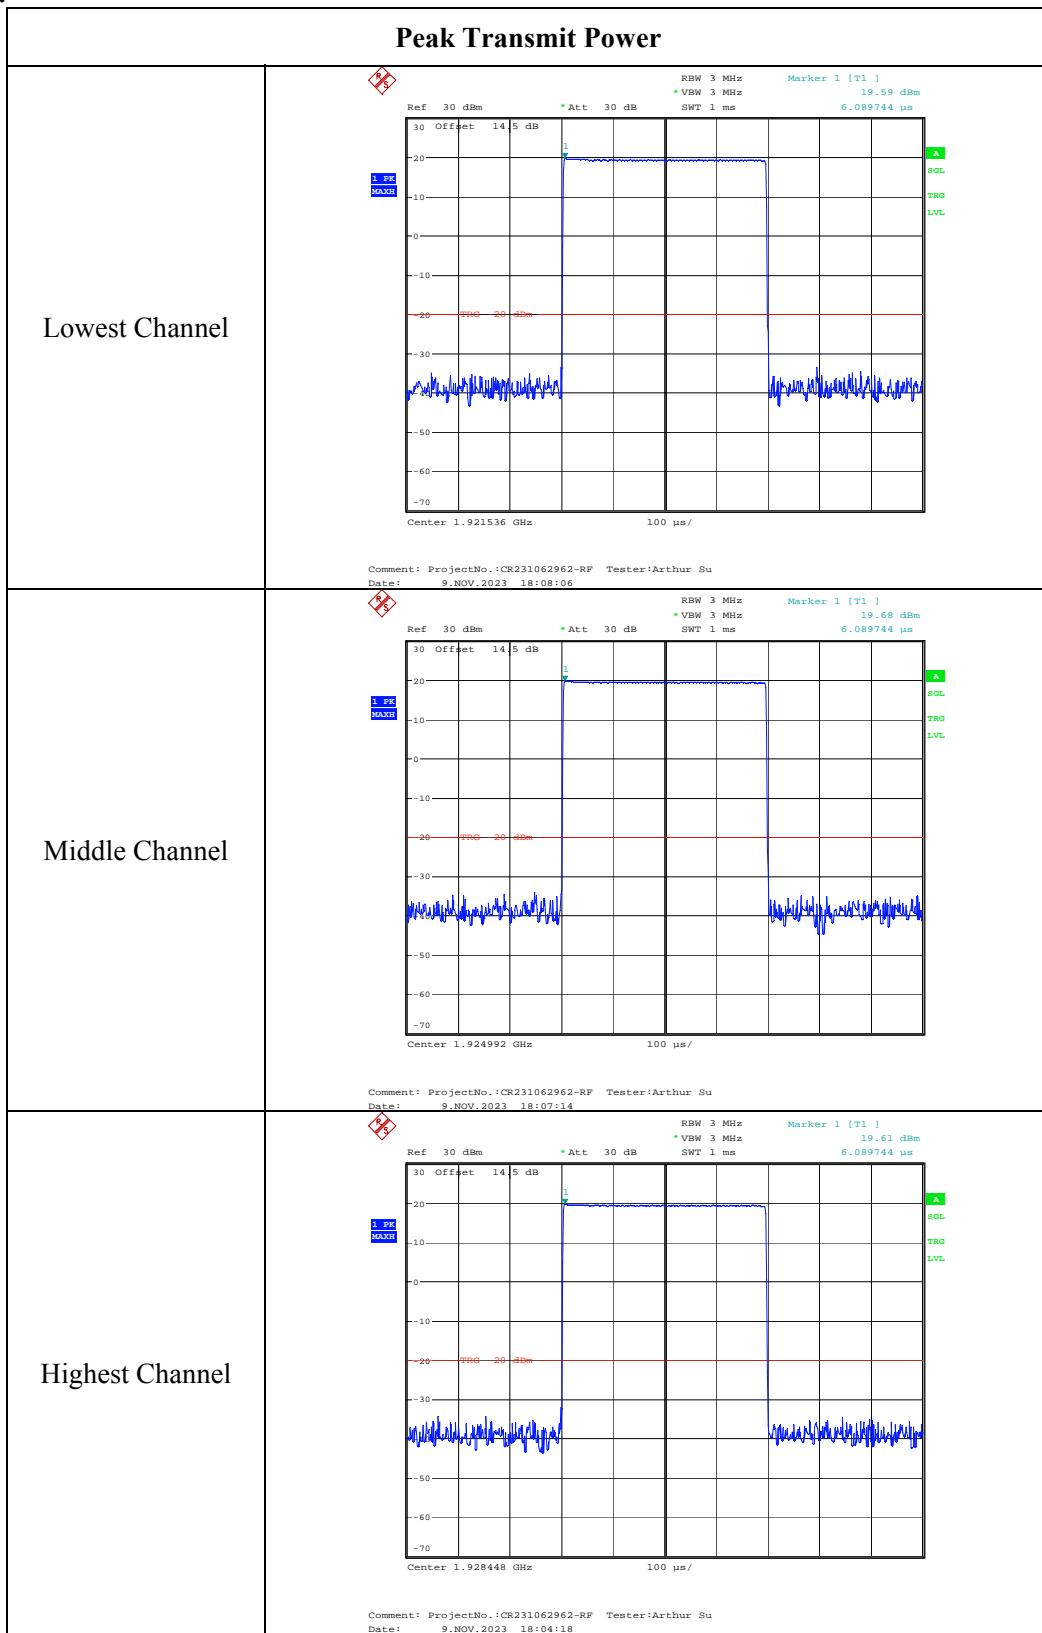

#### 4.5 Power Spectral Density:

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2CSP-1    | Test Date:   | 2023/11/9    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |

#### Environmental Conditions:

|                   |      |                        |    |                     |       |
|-------------------|------|------------------------|----|---------------------|-------|
| Temperature: (°C) | 25.3 | Relative Humidity: (%) | 59 | ATM Pressure: (kPa) | 100.9 |
|-------------------|------|------------------------|----|---------------------|-------|


#### Test Equipment List and Details:


| Manufacturer | Description                        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                  | FSU26         | 100147        | 2023/3/31        | 2024/3/30            |
| zhuoxiang    | Coaxial Cable                      | SMA-178       | 211001        | Each time        | N/A                  |
| YINSAIGE     | Coaxial Cable                      | SS402         | SJ0100001     | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator                 | 2W-SMA-JK-18G | 21060301      | Each time        | N/A                  |
| Unknown      | Coaxial tee connector              | Unknown       | 2204004       | Each time        | N/A                  |
| R&S          | Digital Radio communication Tester | CMD 60M       | 846956/010    | 2023/3/31        | 2024/3/30            |


\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

| Test Channel | Test Frequency (MHz) | Power Spectral Density |         | Limit (mW/3kHz) |
|--------------|----------------------|------------------------|---------|-----------------|
|              |                      | dBm/3kHz               | mW/3kHz |                 |
| Lowest       | 1921.536             | -6.45                  | 0.226   | 3               |
| Middle       | 1924.992             | -3.01                  | 0.500   | 3               |
| Highest      | 1928.448             | -5.79                  | 0.264   | 3               |

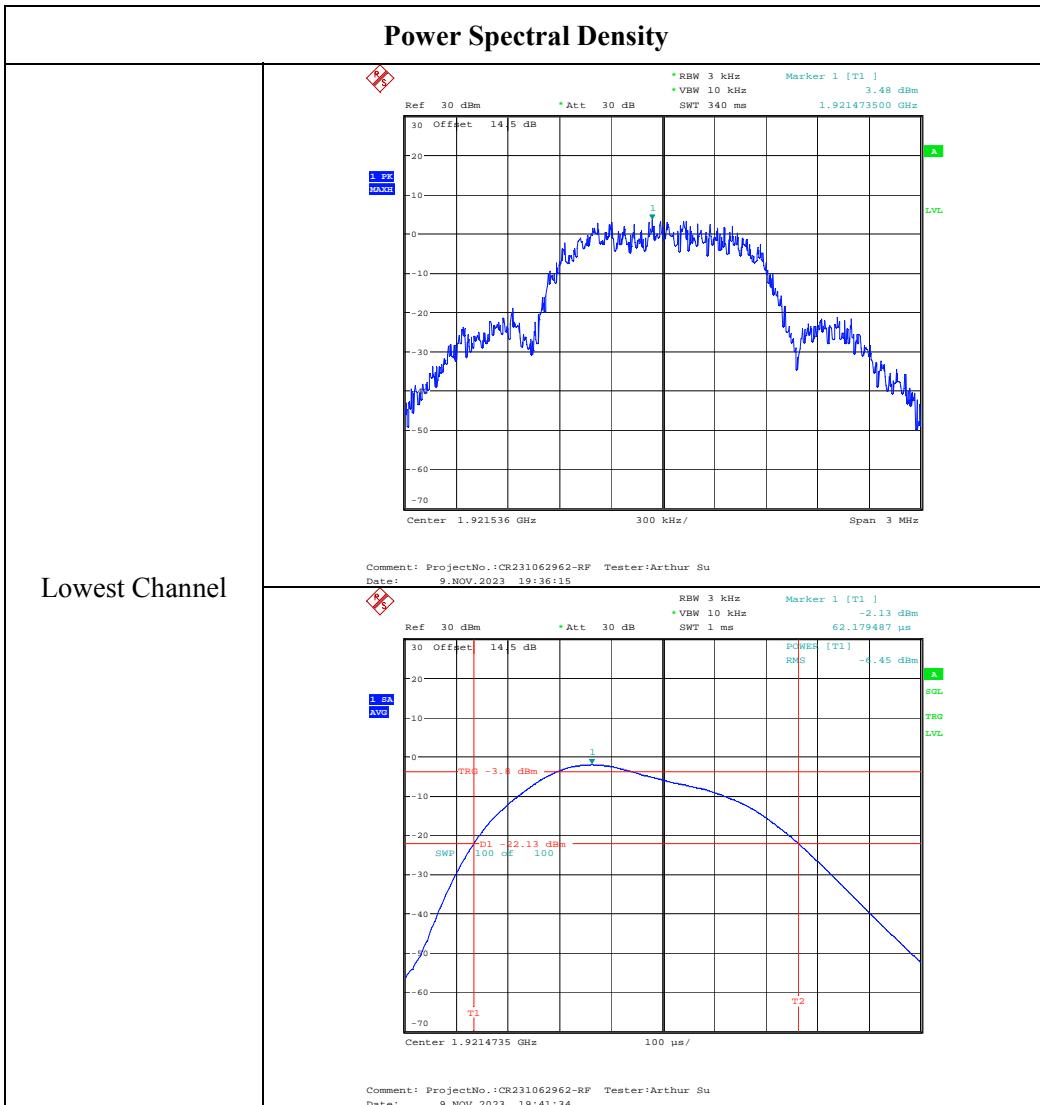

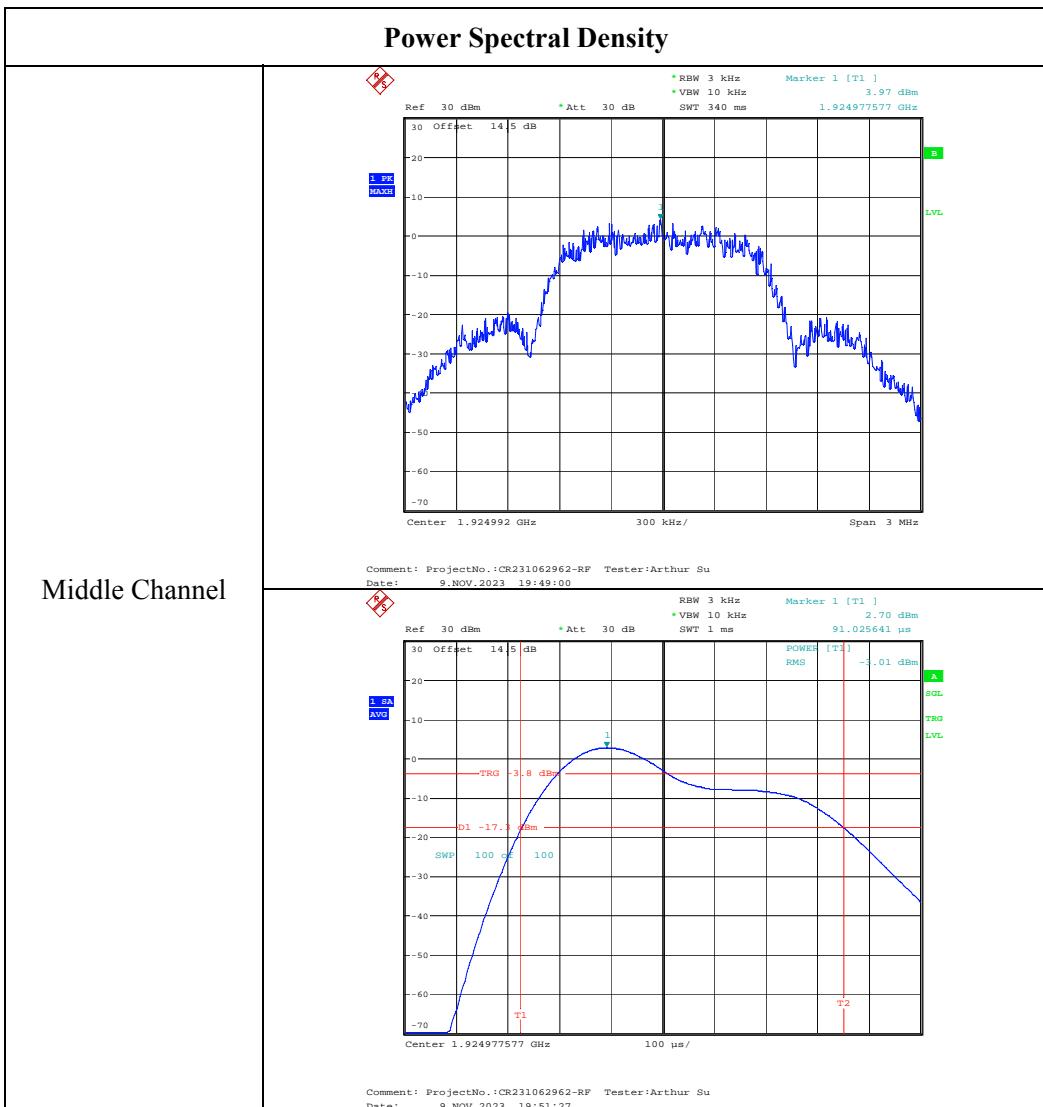

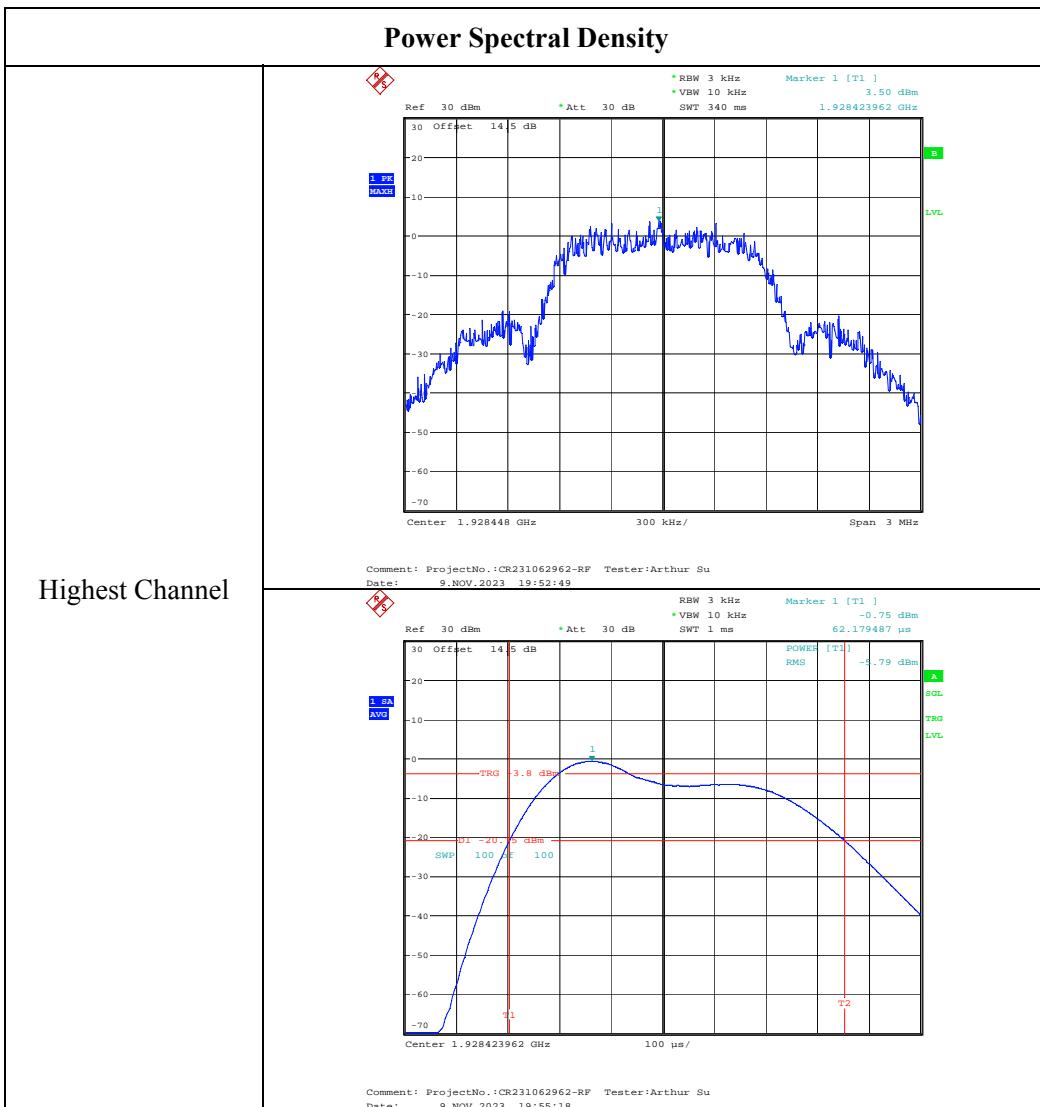

#### 4.6 Emission Inside and Outside the Sub-band:

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2CSP-1    | Test Date:   | 2023/11/9    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | Pass         |


#### Environmental Conditions:

|                   |      |                        |    |                     |       |
|-------------------|------|------------------------|----|---------------------|-------|
| Temperature: (°C) | 25.3 | Relative Humidity: (%) | 59 | ATM Pressure: (kPa) | 100.9 |
|-------------------|------|------------------------|----|---------------------|-------|




#### Test Equipment List and Details:


| Manufacturer | Description                        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                  | FSU26         | 100147        | 2023/3/31        | 2024/3/30            |
| zhuoxiang    | Coaxial Cable                      | SMA-178       | 211001        | Each time        | N/A                  |
| YINSAIGE     | Coaxial Cable                      | SS402         | SJ0100001     | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator                 | 2W-SMA-JK-18G | 21060301      | Each time        | N/A                  |
| Unknown      | Coaxial tee connector              | Unknown       | 2204004       | Each time        | N/A                  |
| R&S          | Digital Radio communication Tester | CMD 60M       | 846956/010    | 2023/3/31        | 2024/3/30            |
| R&S          | Spectrum Analyzer                  | FSU26         | 200256        | 2023/3/31        | 2024/3/30            |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

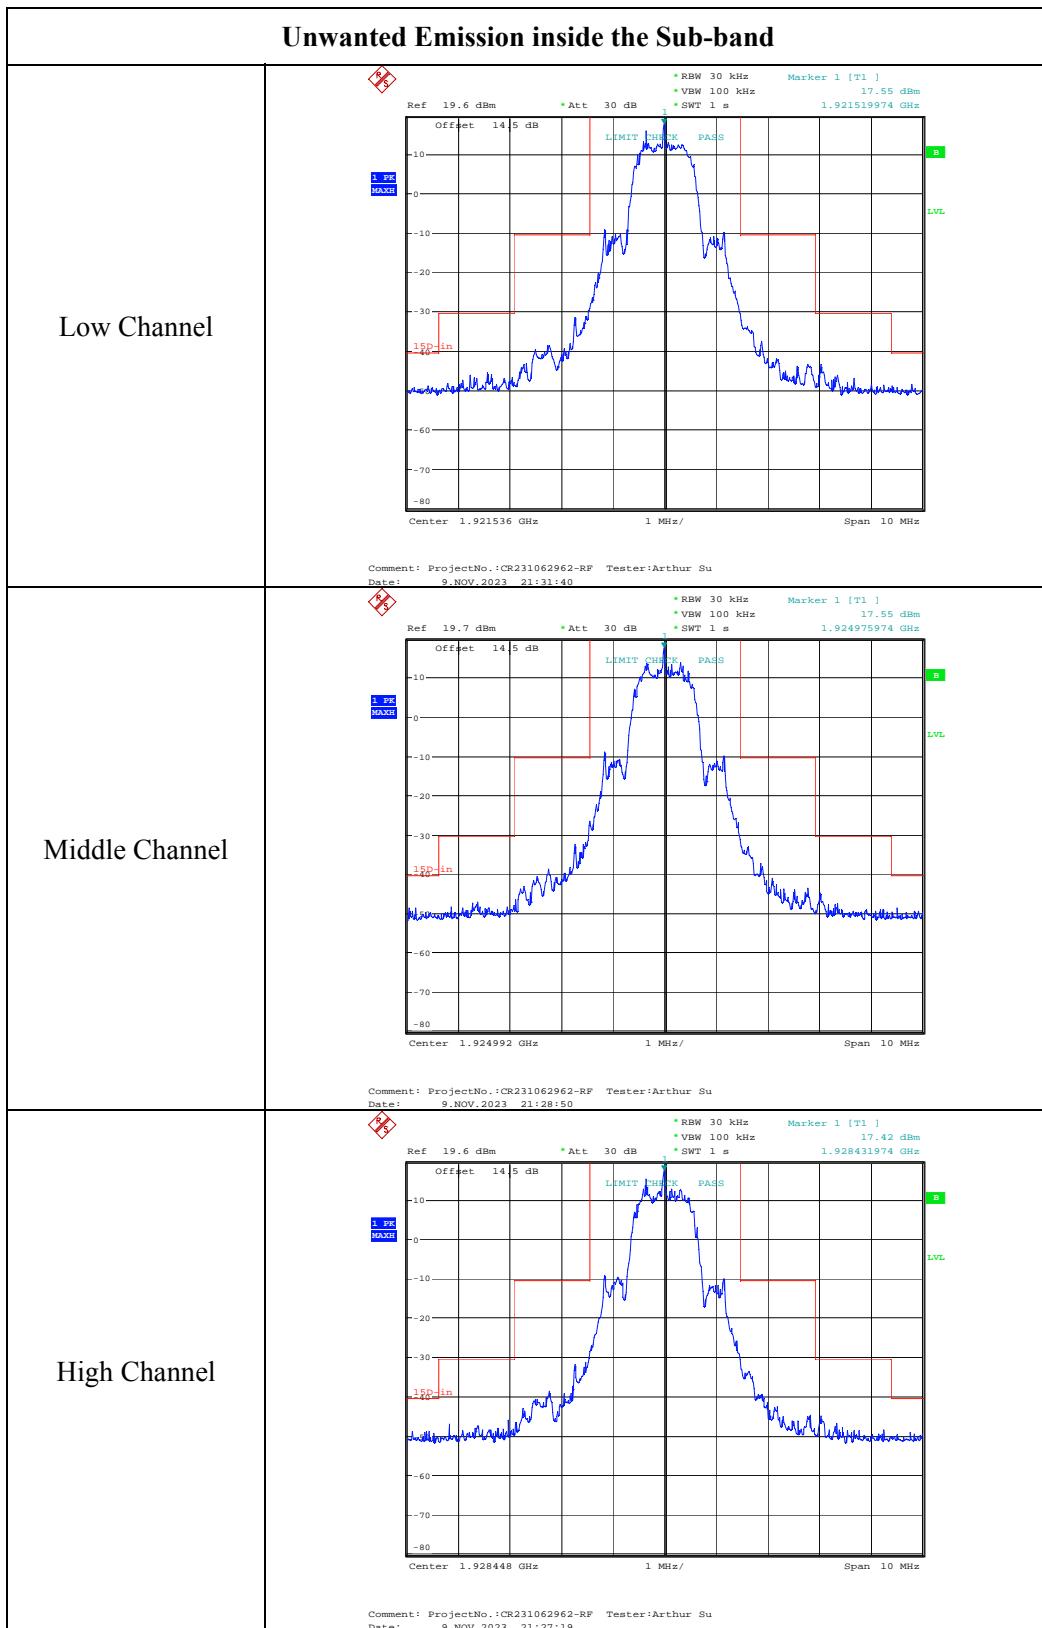



### Low Channel (Unwanted Emission outside the Sub-band)

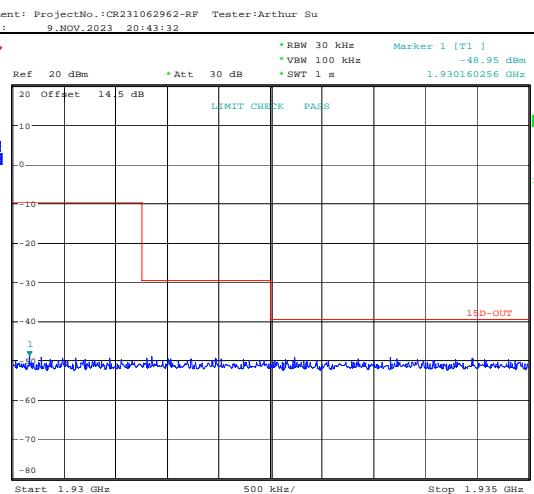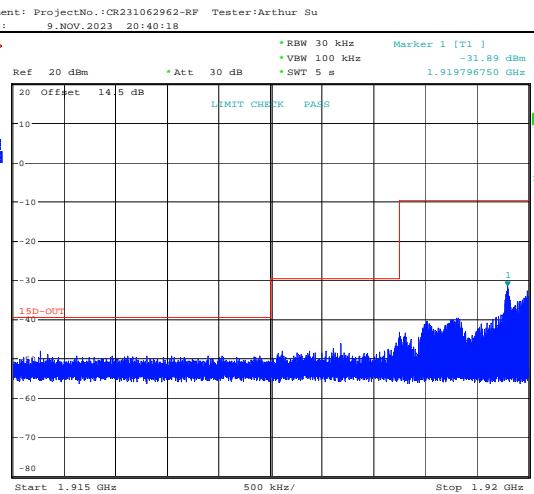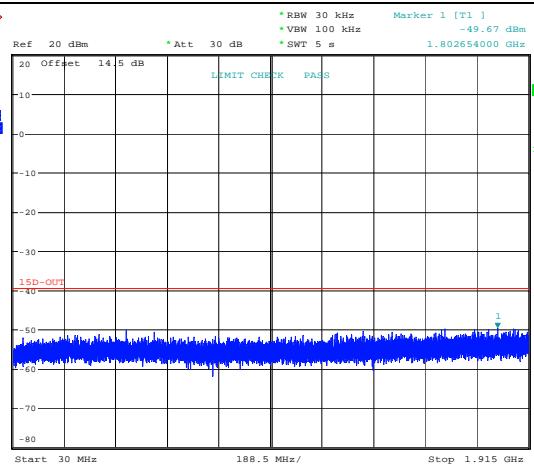

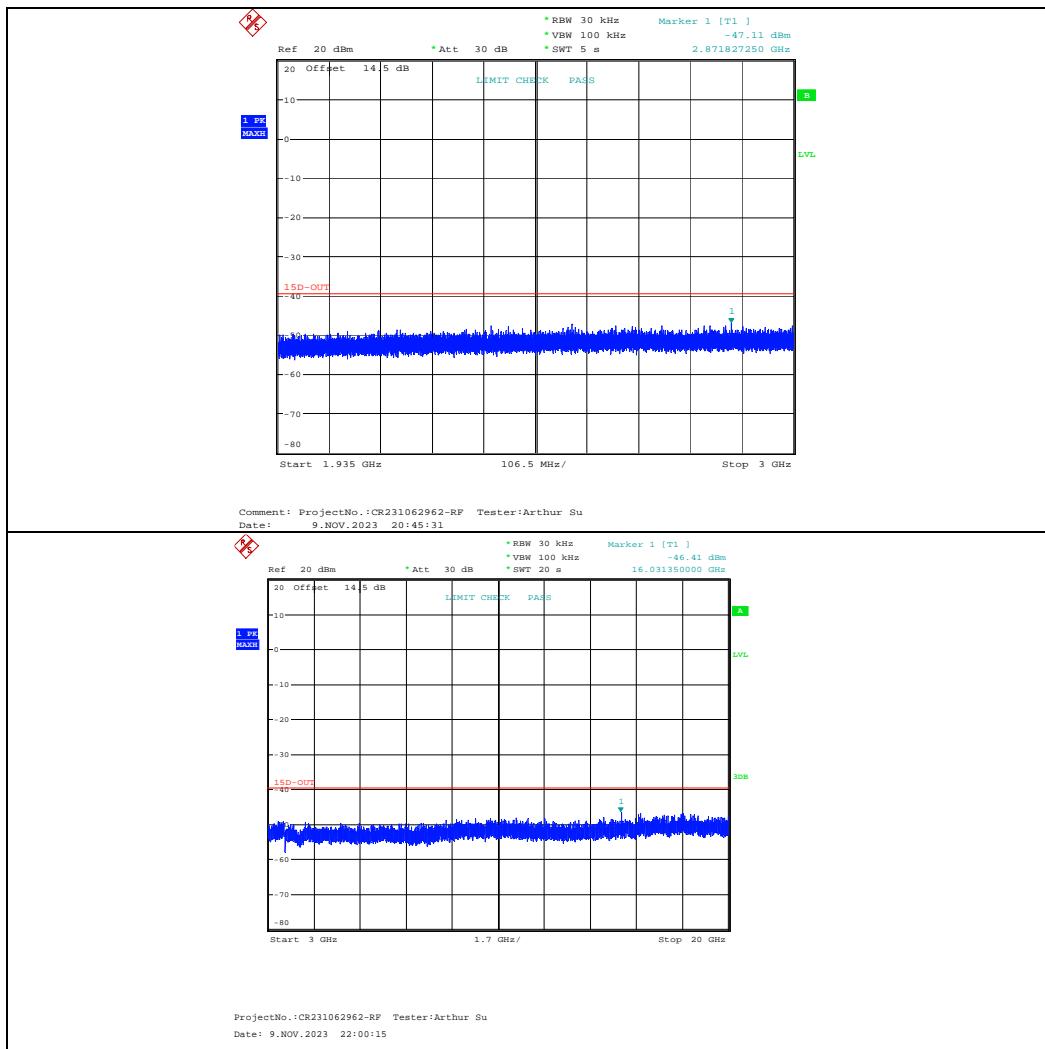


### Middle Channel (Unwanted Emission outside the Sub-band)

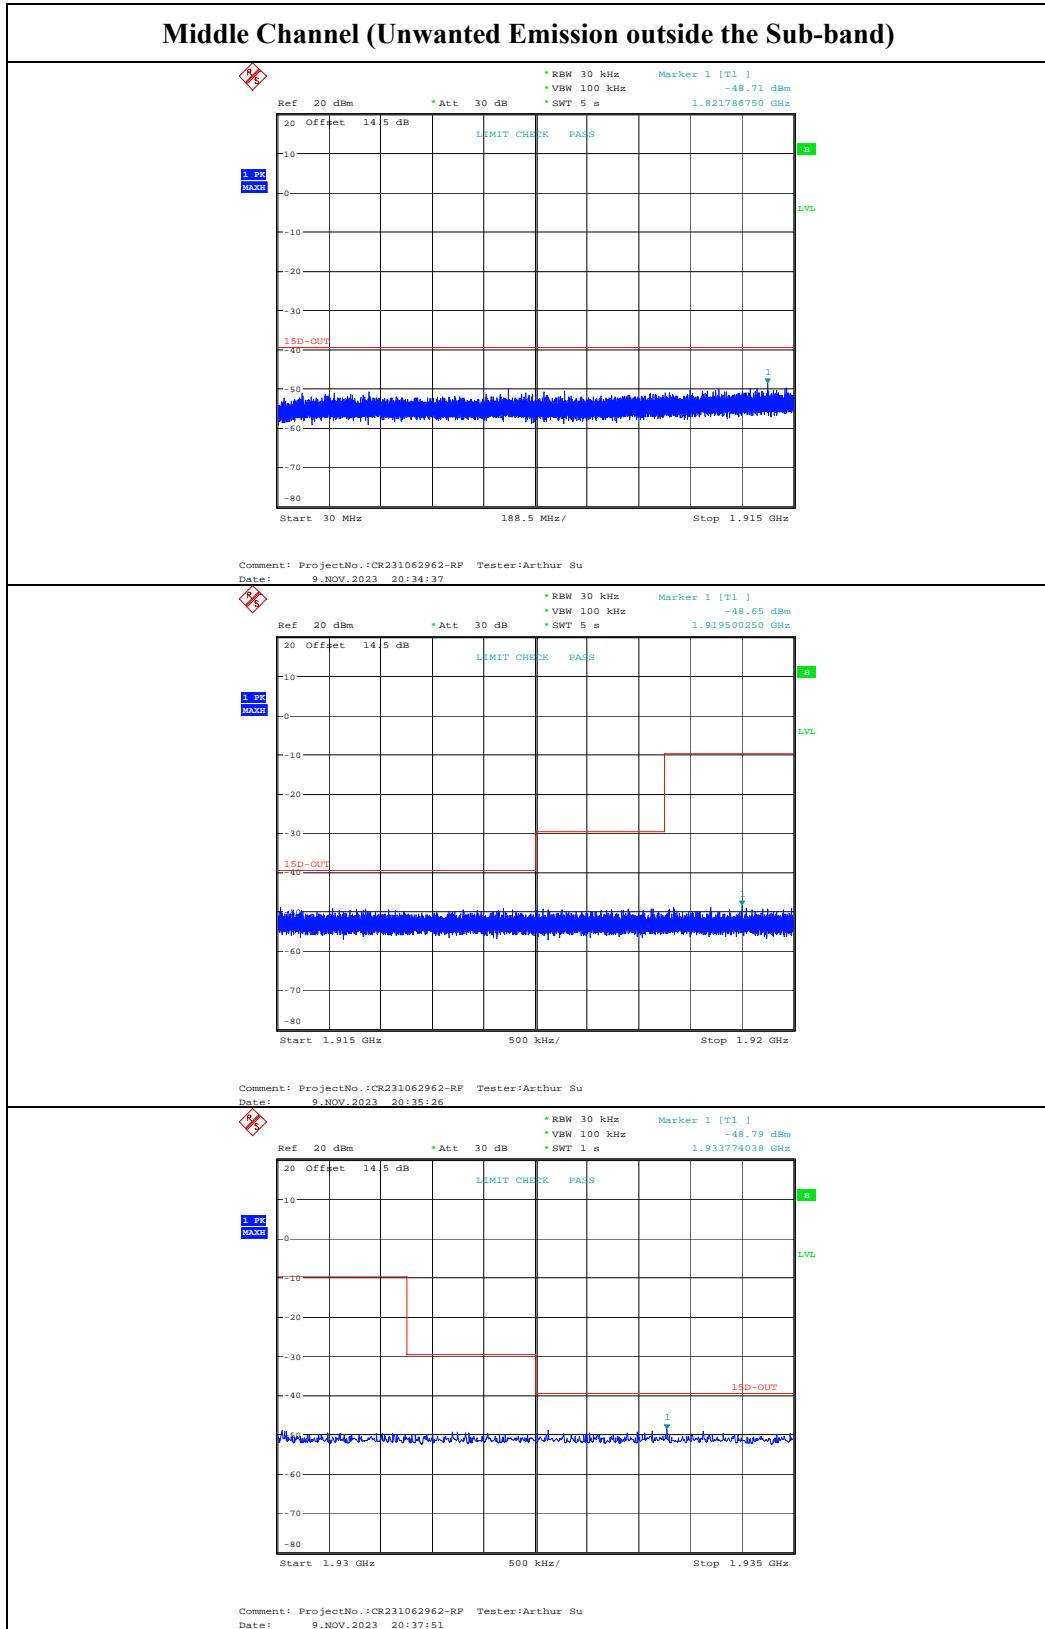

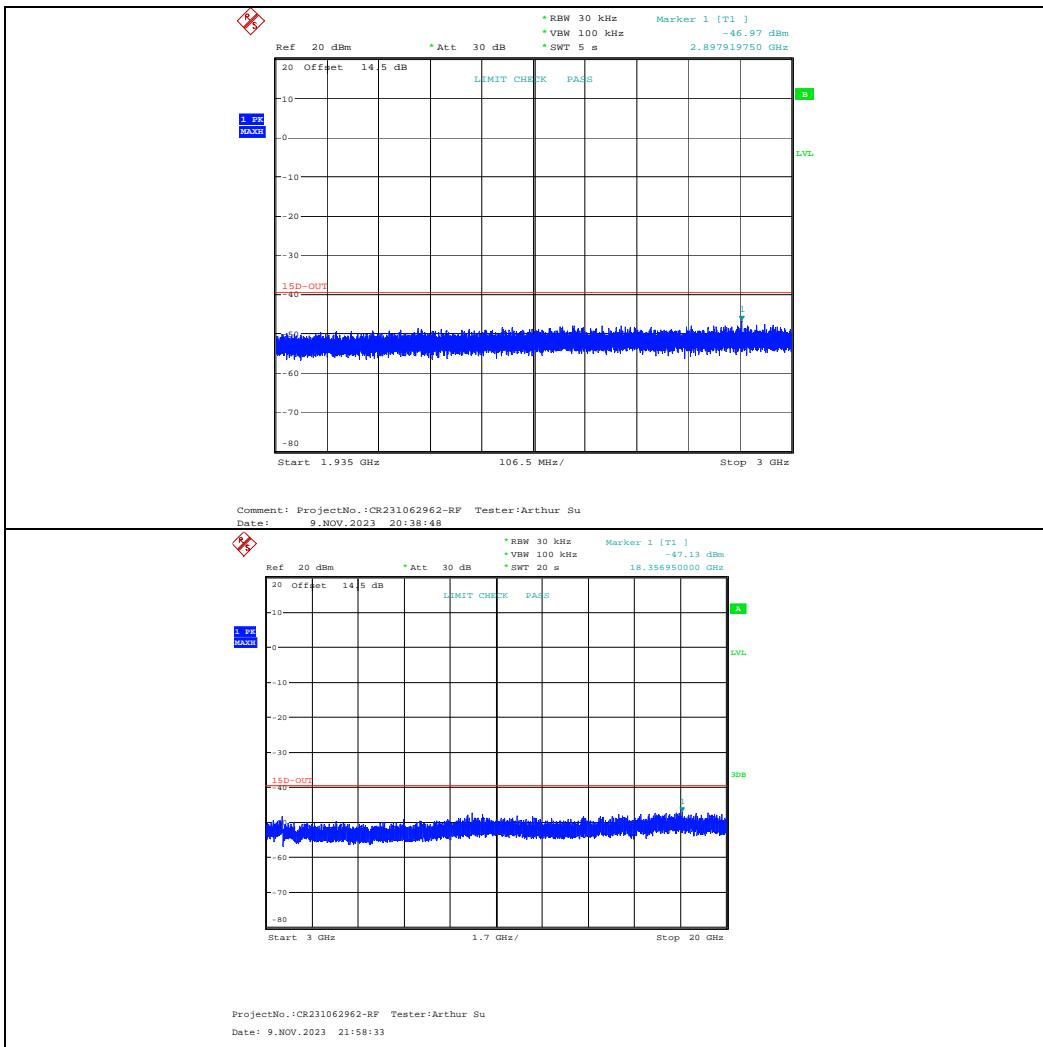

### High Channel (Unwanted Emission outside the Sub-band)

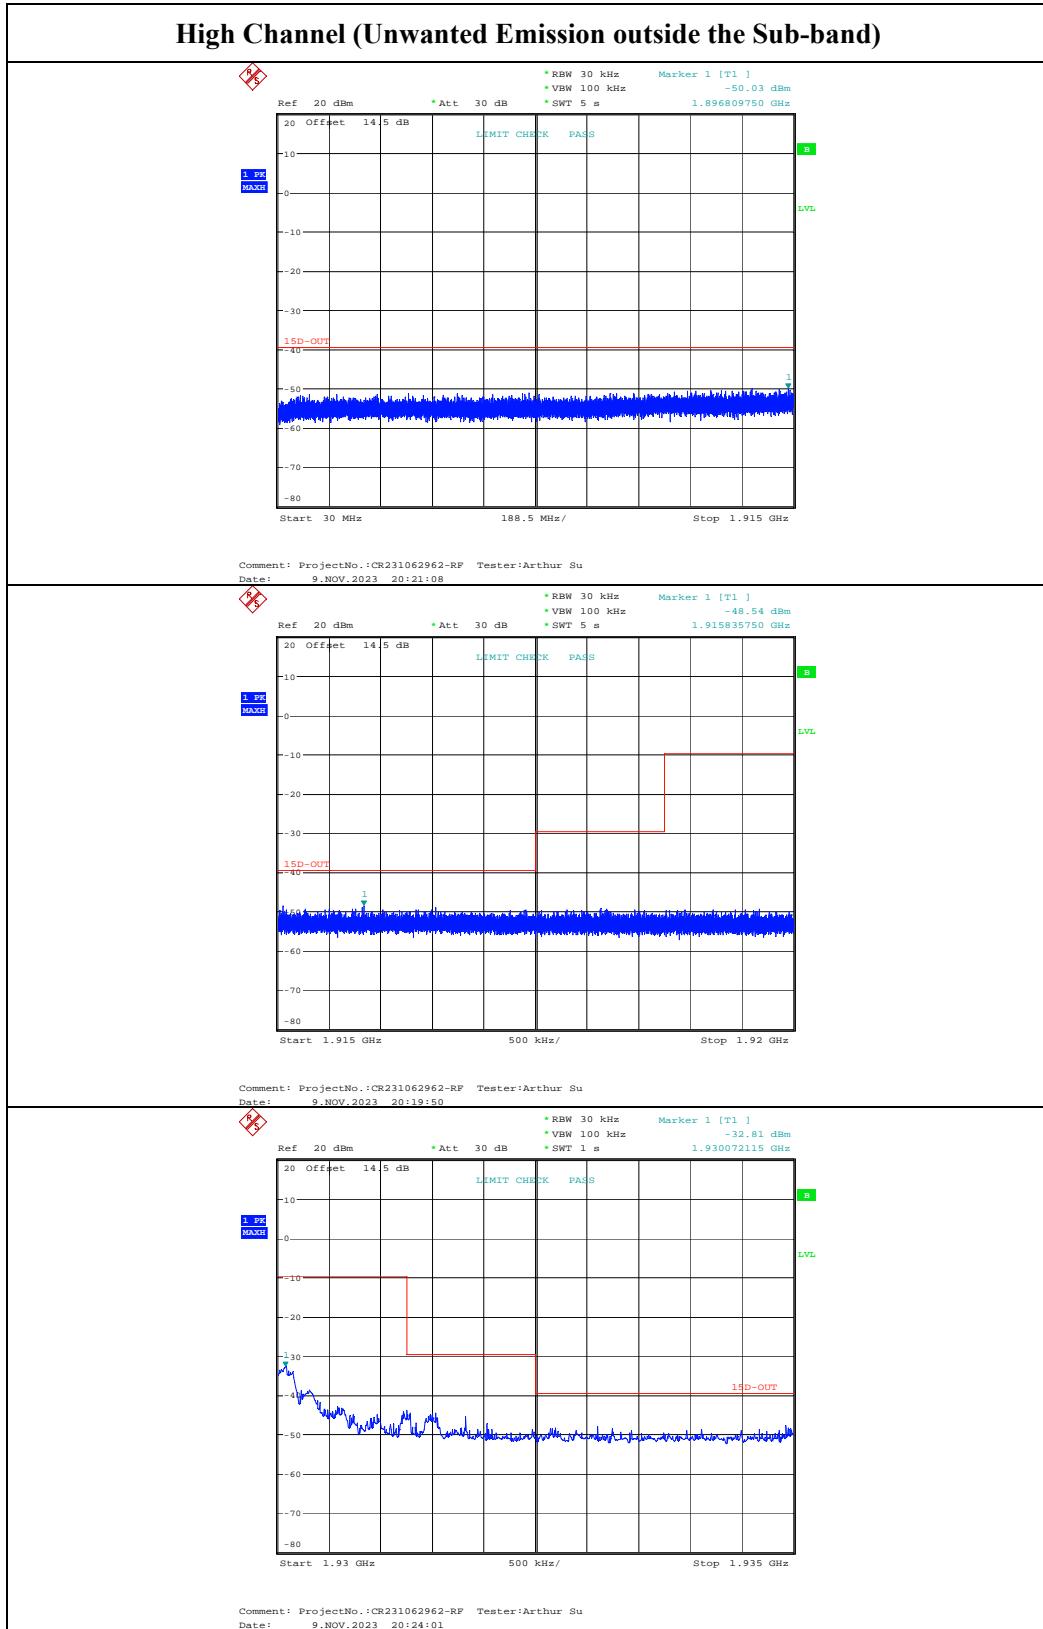



#### 4.7 Frequency Stability:

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2CSP-1    | Test Date:   | 2023/11/9    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | pass         |

#### Environmental Conditions:

|                   |      |                        |    |                     |       |
|-------------------|------|------------------------|----|---------------------|-------|
| Temperature: (°C) | 25.3 | Relative Humidity: (%) | 59 | ATM Pressure: (kPa) | 100.9 |
|-------------------|------|------------------------|----|---------------------|-------|

#### Test Equipment List and Details:

| Manufacturer | Description                        | Model         | Serial Number   | Calibration Date | Calibration Due Date |
|--------------|------------------------------------|---------------|-----------------|------------------|----------------------|
| zhuoxiang    | Coaxial Cable                      | SMA-178       | 211001          | Each time        | N/A                  |
| YINSAIGE     | Coaxial Cable                      | SS402         | SJ0100001       | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator                 | 2W-SMA-JK-18G | 21060301        | Each time        | N/A                  |
| R&S          | Digital Radio communication Tester | CMD 60M       | 846956/010      | 2023/3/31        | 2024/3/30            |
| BACL         | TEMP&HUMI Test Chamber             | BTH-150-40    | 30174           | 2023/3/31        | 2024/3/30            |
| UNI-T        | Multimeter                         | UT39A+        | C210582554      | 2023/9/28        | 2024/9/27            |
| ZHAOXIN      | DC Power Supply                    | RXN-6010D     | 21R6010D0912386 | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

| Temperature (°C) | Voltage (V <sub>AC</sub> ) | Test Frequency (MHz) | Measured Frequency Offset (kHz) | Measured Frequency Offset (ppm) | Limit (ppm) |
|------------------|----------------------------|----------------------|---------------------------------|---------------------------------|-------------|
| -20              | 120                        | 1924.992             | 4                               | 2.08                            | ±10         |
| 20               | 102                        | 1924.992             | 7                               | 3.64                            | ±10         |
|                  | 138                        | 1924.992             | 8                               | 4.16                            | ±10         |
| 50               | 120                        | 1924.992             | 3                               | 1.56                            | ±10         |

#### 4.8 Specific Requirements for UPCS Device:

|                |           |              |              |
|----------------|-----------|--------------|--------------|
| Serial Number: | 2CSP-1    | Test Date:   | 2023/11/9    |
| Test Site:     | RF        | Test Mode:   | Transmitting |
| Tester:        | Arthur Su | Test Result: | pass         |

#### Environmental Conditions:

|                   |      |                        |    |                     |       |
|-------------------|------|------------------------|----|---------------------|-------|
| Temperature: (°C) | 25.3 | Relative Humidity: (%) | 59 | ATM Pressure: (kPa) | 100.9 |
|-------------------|------|------------------------|----|---------------------|-------|

#### Test Equipment List and Details:

| Manufacturer | Description                        | Model         | Serial Number | Calibration Date | Calibration Due Date |
|--------------|------------------------------------|---------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                  | FSU26         | 100147        | 2023/3/31        | 2024/3/30            |
| zhuoxiang    | Coaxial Cable                      | SMA-178       | 211001        | Each time        | N/A                  |
| YINSAIGE     | Coaxial Cable                      | SS402         | SJ0100001     | Each time        | N/A                  |
| eastsheep    | Coaxial Attenuator                 | 2W-SMA-JK-18G | 21060301      | Each time        | N/A                  |
| Unknown      | Coaxial tee connector              | Unknown       | 2204004       | Each time        | N/A                  |
| R&S          | Digital Radio communication Tester | CMD 60M       | 846956/010    | 2023/3/31        | 2024/3/30            |
| Agilent      | MXG Vector Signal Generator        | N5182B        | MY51350144    | 2023/3/31        | 2024/3/30            |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

##### 1) Automatic Discontinuation of Transmission

###### Test result:

The following tests were performed after a connection had been established with handset unit.

| Test condition              | Reaction of EUT       | Pass/Fail |
|-----------------------------|-----------------------|-----------|
| Adapter removed from EUT    | Connection break down | Pass      |
| Battery remove from Handset | Connection break down | Pass      |

## 2) Monitoring Time

### Test result:

This requirement is covered by the results of Least Interfered Channel (LIC).

| Interference (Refer to ANSI C63.17 clause 7.3.3)   | Reaction of EUT        | Results |
|--|------------------------|---------|
| a) Apply the interference on $f_1$ at level $T_L+U_M+20$ dB and no interference on $f_2$ . Initiate transmission and verify the transmission only on $f_2$ . Then terminate it.  | EUT transmits on $f_2$ | Pass    |
| b) Apply the interference on $f_2$ at level $T_L+U_M+20$ dB and immediately remove all interference from $f_1$ . The EUT should immediately attempt transmission on $f_1$ (but at least 20 ms after the interference on $f_2$ is applied), verify the transmission only on $f_1$ . | EUT transmission $f_1$ | Pass    |

## 3) Lower Monitoring Threshold

### Test result:

Not applicable because the EUT has more 40 defined duplex system access channels and meet the provision of the Least Interfered Channel (LIC).

## 4) Maximum Transmit Period

### Test result:

| Repetition of Access Criteria | Measured Maximum Transmission Time (Second) | Limit (Second) | Results |
|-------------------------------|---|----------------|---------|
| First                         | 18655                                       | 28,800         | Pass    |
| Second                        | 18655                                       | 28,800         | Pass    |

## 5) System Acknowledgement

### Test result:

| Test  | Time taken (second) | Limit (second) | Result |
|---|---------------------|----------------|--------|
| Initial Connection acknowledgement                | 0.35                | 1              | Pass   |
| Change of access criteria for control information | N/A                 | 30             | N/A    |
| Transmission cease time                           | 4.04                | 30             | Pass   |

Note: N/A=Not Applicable

## 6) Least Interfered Channel (LIC)

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold:  $T_L = -174 + 10 \log_{10} B + M_L + P_{MAX} - P_{EUT}$  (dBm)

Where: B=Emission bandwidth (Hz)

$M_L$  = dB the threshold may exceed thermal noise (30 for  $T_L$ )

$P_{MAX} = 5 \log_{10} B - 10$  (dBm)

$P_{EUT}$  = Transmitted power (dBm)

### Calculated thresholds:

| Monitor Threshold | B(MHz) | $M_L$ (dB) | $P_{MAX}$ (dBm) | $P_{EUT}$ (dBm) | Threshold (dBm) |
|-------------------|--------|------------|-----------------|-----------------|-----------------|
| Lower threshold   | 1.461  | 30         | 20.82           | 19.84           | -81.37          |

Note: 1. The upper threshold is applicable as the EUT utilizes more than 20 duplex system channels

### Test result:

#### LIC procedure test:

| Interference (Refer to ANSI C63.17 clause 7.3.3)  | Reaction of EUT        | Results |
|---|------------------------|---------|
| a) Apply the interference on $f_1$ at level $T_L + U_M + 7$ dB and the interference on $f_2$ at level $T_L + U_M$ . Initiate transmission and verify the transmission only on $f_2$ . Repeat 5 times.       | EUT transmits on $f_2$ | Pass    |
| b) Apply the interference on $f_1$ at level $T_L + U_M$ and the interference on $f_2$ at level $T_L + U_M + 7$ dB. Initiate transmission and verify the transmission only on $f_1$ . Repeat 5 times.        | EUT transmits on $f_1$ | Pass    |
| c) Apply the interference on $f_1$ at level $T_L + U_M + 1$ dB the interference on $f_2$ at level $T_L + U_M - 6$ dB. Initiate transmission and verify the transmission only on $f_2$ . Repeat 5 times.     | EUT transmits on $f_2$ | Pass    |
| d) Apply the interference on $f_1$ at level $T_L + U_M - 6$ dB and the interference on $f_2$ at level $T_L + U_M + 1$ dB. Initiate transmission and verify the transmission only on $f_1$ . Repeat 5 times. | EUT transmits on $f_1$ | Pass    |

#### Selected channel confirmation:

| Interference (Refer to ANSI C63.17 clause 7.3.4)   | Reaction of EUT        | Results |
|--|------------------------|---------|
| a) Apply the interference on $f_1$ at level $T_U + U_M$ and no interference on $f_2$ . Initiate transmission and verify the transmission only on $f_2$ . Then terminate it.  | EUT transmits on $f_2$ | Pass    |
| b) Apply the interference on $f_2$ at level $T_L + U_M$ and immediately remove all interference from $f_1$ . The EUT should immediately attempt transmission on $f_1$ (but at least 20 ms after the interference on $f_2$ is applied), verify the transmission only on $f_1$ . | EUT transmission $f_1$ | Pass    |

**7) Random waiting**

Note: This is Not Applicable

**8) Monitoring Bandwidth and Reaction Time****Test result:****Monitoring Bandwidth:**

The antenna of the EUT used for monitoring is the same interior antenna that used for transmission, so the monitoring system bandwidth is equal to the emission bandwidth of the intended transmission

**Reaction Time Test:**

| No. | Interference Pulse width (μs) | Reaction of EUT | Observing time (μs) | Result |
|-----|-------------------------------|-----------------|---------------------|--------|
| 1   | 50μs with level $T_L+U_M$     | No transmission | 25.33               | Pass   |
| 2   | 35μs with level $T_L+U_M+6dB$ | No transmission | 21.34               | Pass   |

**9) Monitoring Antenna****Test result:**

The antenna of the EUT used for transmission is the same interior antenna that used for monitoring.

**10) Monitoring threshold relaxation****Test result:**

This requirement is covered by the results of Least Interfered Channel (LIC).

## 11) Duplex Connections

### Test result:

| Interference (Refer to ANSI C63.17 § 8.3& § 8.3.2)   | Reaction of EUT  | Results |
|--|--|---------|
| a) Only a single carrier $f_1$ for EUT TDMA systems and on $f_1$ and $f_2$ and corresponding duplex carriers for FDMA systems. | EUT can transmit                                       | Pass    |
| b) All Tx windows with level TL+UM except one & Rx windows with level TL+UM+7dB except one, which are not the duplex mate.     | Connected on the target Rx window and its duplex mate. | Pass    |
| c) All Tx windows with level TL+UM+7dB except one & Rx windows with level TL+UM except one, which are not duplex mate.         | Connected on the target Tx window and its duplex mate. | Pass    |
| d) All Tx & Rx windows with level TU+UM, except one for Tx window & one for Rx window, which are not duplex mate.              | No connection possible                                 | Pass    |

## 12) Alternative monitoring interval

### Test result:

| Interference (Refer to ANSI C63.17 § 8.4)   | Reaction of EUT              | Results |
|---|------------------------------|---------|
| a) Only a single carrier $f_1$ for EUT TDMA systems and on $f_1$ and $f_2$ and corresponding duplex carriers for FDMA systems.  | EUT can transmit             | Pass    |
| b) Apply interference with same parameters as EUT transmissions on all Tx windows with level TL+UM on the enabled carrier(s) and no interference on the Rx windows on the enabled carriers. | No connection is established | Pass    |

**13) Fair Access****Test result:**

The manufacturer declares that this device does not use any mechanisms as provided by FCC §15.323(c)(10) or (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other device.

**14) Frame Repetition Stability Frame Period and Jitter****Test result:**

Frame Period and Jitter:

| Max. pos. Jitter<br>( $\mu$ s) | Max. neg.<br>Jitter<br>( $\mu$ s) | Frame<br>period<br>(ms) | Limit                |                      |
|--------------------------------|-----------------------------------|-------------------------|----------------------|----------------------|
|                                |                                   |                         | Frame Period<br>(ms) | Jitter<br>( $\mu$ s) |
| 0.05                           | -0.09                             | 11.33                   | 20 or 10/X           | 25                   |

Note: X is a positive whole number.

## 5. RF EXPOSURE EVALUATION

### 5.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least  $\lambda/2\pi$ , where  $\lambda$  is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of  $\lambda/4$  or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

| RF Source frequency (MHz) | Threshold ERP (watts) |
|---------------------------|-----------------------|
| 0.3-1.34                  | $1,920 R^2$ .         |
| 1.34-30                   | $3,450 R^2/f^2$ .     |
| 30-300                    | $3.83 R^2$ .          |
| 300-1,500                 | $0.0128 R^2 f$ .      |
| 1,500-100,000             | $19.2 R^2$ .          |

### 5.2 Measurement Result

| Mode | Frequency (MHz) | $\lambda/2\pi$ (mm) | Distance (mm) | Exemption ERP |       | Maximum Conducted Power including Tune-up Tolerance (dBm) | Antenna Gain (dBi) | ERP   |       | MPE-Based Exemption |
|------|-----------------|---------------------|---------------|---------------|-------|---|--------------------|-------|-------|---------------------|
|      |                 |                     |               | (mW)          | (dBm) |   |                    | (dBm) | (mW)  |                     |
| DECT | 1920-1930       | 24.87               | 200           | 768           | 28.85 | 21.0  | 0                  | 18.85 | 76.74 | Compliant           |
| BT   | 2402-2480       | 19.80               | 200           | 768           | 28.85 | 6.5   | 0                  | 4.35  | 2.72  | Compliant           |

Note:

The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.  
The DECT and BT can transmit simultaneously.

$$\sum_{i=1}^a \frac{P_i}{P_{\text{th},i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{\text{th},j}} + \sum_{k=1}^c \frac{\text{Evaluated}_k}{\text{Exposure Limit}_k}$$

=ERP<sub>DECT</sub> / Limit + ERP<sub>BT</sub> / Limit

=76.74/768 + 2.72/768

=0.103

< 1.0

**Result: The device compliant the MPE-Based Exemption at 20cm distances.**

## **6. EUT PHOTOGRAPHS**

---

Please refer to the attachment CR231062962-EXP EUT EXTERNAL PHOTOGRAPHS and CR231062962-INP EUT INTERNAL PHOTOGRAPHS

## **7. TEST SETUP PHOTOGRAPHS**

Please refer to the attachment CR231062962-00A-TSP TEST SETUP PHOTOGRAPHS.

**===== END OF REPORT =====**