



# TEST REPORT

**Report No.** ..... : CTC2025317601  
**FCC ID** ..... : XGB-250508BA  
**IC** ..... : 3879A-RACKD3A  
**Applicant** ..... : Voyetra Turtle Beach, Inc.  
Address ..... : 44 South Broadway, 4th Floor WHITE PLAINS, NEW YORK  
10601 USA  
Manufacturer ..... : Voyetra Turtle Beach, Inc.  
Address ..... : 44 South Broadway, 4th Floor WHITE PLAINS, NEW YORK  
10601 USA  
**Product Name** ..... : VelocityOne RACE KD3  
Trade Mark ..... : TURTLE BEACH  
Model/Type reference ..... : VelocityOne RACE KD3  
Listed Model(s) ..... : /  
**Standard** ..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247  
RSS-247 Issue 3  
Test Report Form No ..... : CTC-TR-058\_A2  
Master TRF ..... : Dated 2025-05-12  
Date of receipt of test sample ..... : May 13, 2025  
Date of testing ..... : May 13, 2025 ~ May 27, 2025  
Date of issue ..... : Jun. 16, 2025  
**Result** ..... : **PASS**

Compiled by:

(Printed name+signature) Alicia Liu

Supervised by:

(Printed name+signature) Eric Zhang

Approved by:

(Printed name+signature) Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents**

	<b>Page</b>
<b>1. TEST SUMMARY .....</b>	<b>3</b>
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION .....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY .....	5
1.5. MEASUREMENT UNCERTAINTY.....	6
1.6. ENVIRONMENTAL CONDITIONS.....	6
<b>2. GENERAL INFORMATION .....</b>	<b>7</b>
2.1. CLIENT INFORMATION .....	7
2.2. GENERAL DESCRIPTION OF EUT .....	7
2.3. ACCESSORY EQUIPMENT INFORMATION .....	8
2.4. OPERATION STATE .....	9
2.5. MEASUREMENT INSTRUMENTS LIST .....	10
<b>3. TEST ITEM AND RESULTS .....</b>	<b>11</b>
3.1. CONDUCTED EMISSION.....	11
3.2. RADIATED EMISSION.....	14
3.3. BAND EDGE EMISSIONS (RADIATED) .....	22
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED).....	27
3.5. DTS BANDWIDTH.....	35
3.6. PEAK OUTPUT POWER .....	38
3.7. POWER SPECTRAL DENSITY .....	39
3.8. DUTY CYCLE .....	41
3.9. ANTENNA REQUIREMENT.....	44



## 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

## RSS-247 Issue 3: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2025317601	Jun. 16, 2025	Original



### 1.3. Test Description

FCC Part 15 Subpart C (15.247)				
Test Item	Standard Section		Result	Test Engineer
	FCC	ISED		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Marrow
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Marrow
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Marrow
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS 247 5.5	Pass	Marrow
6dB Bandwidth	15.247(a)(2)	RSS 247 5.2 (a)	Pass	Marrow
Occupied Bandwidth	/	RSS-GEN 6.7	Pass	Marrow
Conducted Max Output Power	15.247(b)(3)	RSS 247 5.4 (d)	Pass	Marrow
Power Spectral Density	15.247(e)	RSS 247 5.2 (b)	Pass	Marrow
Transmitter Radiated Spurious	15.209&15.247(d)	RSS 247 5.5&RSS-Gen 8.9	Pass	Marrow

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



## 1.4. Test Facility

### Address of the report laboratory

#### CTC Laboratories, Inc.

Address: Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	±0.0196%	(1)
Maximum Conducted Output Power	±0.686 dB	(1)
Maximum Power Spectral Density Level	±0.743 dB	(1)
Band-edge Compliance	±1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Voyetra Turtle Beach, Inc.
Address:	44 South Broadway, 4th Floor WHITE PLAINS, NEW YORK 10601 USA
Manufacturer:	Voyetra Turtle Beach, Inc.
Address:	44 South Broadway, 4th Floor WHITE PLAINS, NEW YORK 10601 USA
Factory:	Voyetra Turtle Beach, Inc.
Address:	44 South Broadway, 4th Floor WHITE PLAINS, NEW YORK 10601 USA

### 2.2. General Description of EUT

Product Name:	VelocityOne RACE KD3
Trade Mark:	TURTLE BEACH
Model/Type reference:	VelocityOne RACE KD3
Listed Model(s):	/
Model Difference:	/
Sample ID:	CTC250509-006-S004
Power Supply:	DC24.0V 3.0A from AC/DC Adapter
Hardware Version:	A3
Software Version:	V0.23
<b>Bluetooth 4.2 / BLE</b>	
Modulation:	GFSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	40
Channel Separation:	2MHz
Antenna Type:	FPC layout antenna
Antenna Gain:	2.52dBi

---

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



## 2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
AC ADAPTOR	CW2403000RE	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	No	100cm
SMA-JJ	Unshielded	NO	80cm
Test Software Information			
Name	Version	/	/
JS1120-3	V3.3.38	/	/
RFTest_0901_boxed	/	/	/

---

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhу Subdistrict, Longhua District, Shenzhen, Guangdong, China      Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT BLE, 40 channels are provided to the EUT. Channels 00/19/39 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit. The base firmware of this product supports both BLE and 2.4G customization. The BLE and 2.4G customization functions are implemented on the same chip, sharing the same working frequency band and channels. During the RF transmission test, the same frequency setting software is used. Therefore, for this test, we chose to conduct the test using either BLE or 2.4G customization.
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



## 2.5. Measurement Instruments List

RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 12,2025
2	Test Software	Tonscend	JS1120-3	V3.3.38	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Dec. 07, 2025
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-648	Dec. 07, 2025
3	Spectrum Analyzer	R&S	FSV40-N	101654	Dec. 12,2025
4	Pre-Amplifier	SONOMA	310	186194	Dec. 12, 2025
5	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 12, 2025
6	Test Receiver	R&S	ESCI7	100967	Dec. 12, 2025
7	3m chamber 2	Frankonia	EE025	/	Oct. 23, 2025
8	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2025
2	LISN	R&S	ENV216	101113	Dec. 12, 2025
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2025
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2025
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2025
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


##### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

##### Test Configuration

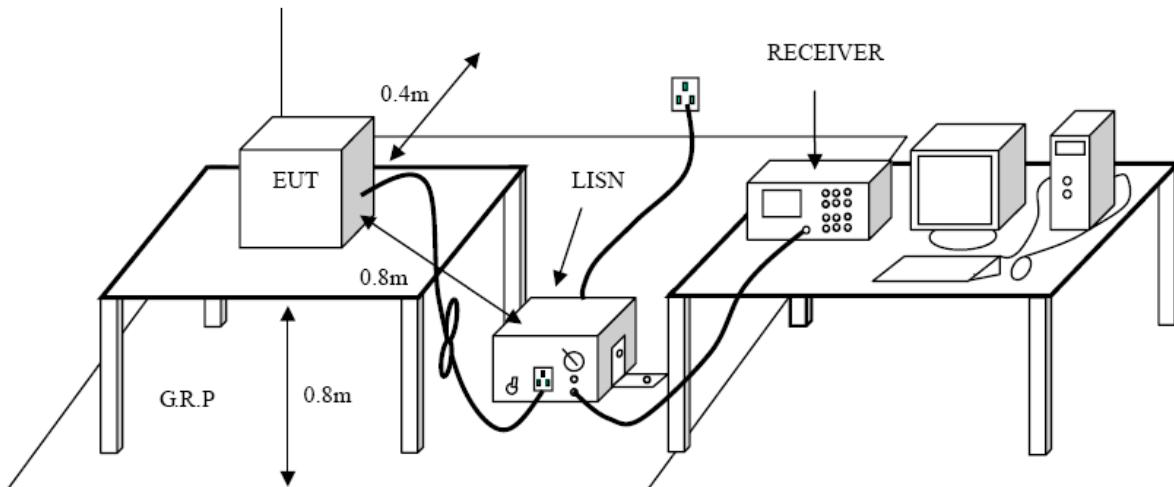

##### Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50  $\mu$ H coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

##### Test Mode

Please refer to the clause 2.4.

CTC Laboratories, Inc.


Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



## Test Result

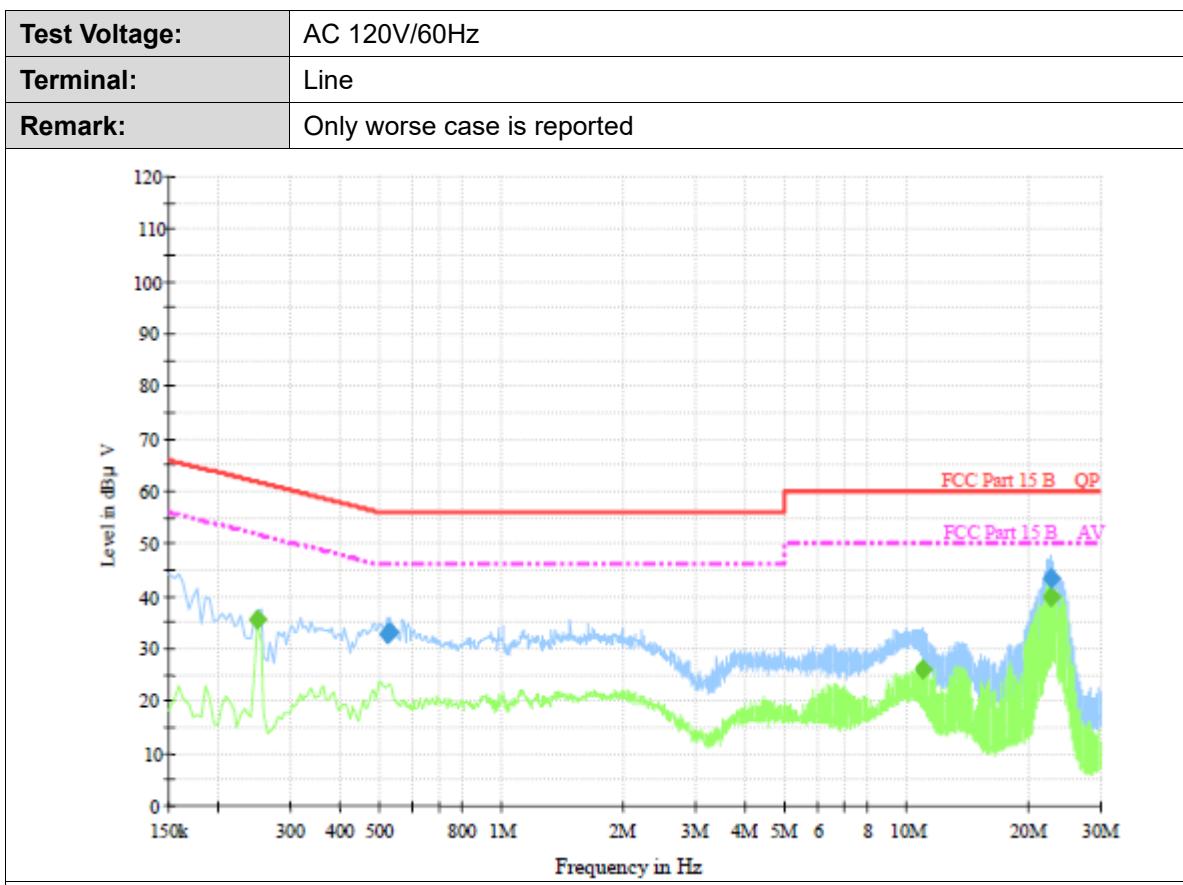

### Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.519000	32.8	1000.00	9.000	On	L1	9.4	23.2	56.0	
0.528000	33.1	1000.00	9.000	On	L1	9.4	22.9	56.0	
22.510500	43.4	1000.00	9.000	On	L1	9.7	16.6	60.0	

### Final Measurement Detector 2

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.249000	35.3	1000.00	9.000	On	L1	9.5	16.5	51.8	
10.864500	26.0	1000.00	9.000	On	L1	9.6	24.0	50.0	
22.510500	39.9	1000.00	9.000	On	L1	9.7	10.1	50.0	

Emission Level = Read Level + Correct Factor



<b>Test Voltage:</b>	AC 120V/60Hz								
<b>Terminal:</b>	Neutral								
<b>Remark:</b>	Only worse case is reported								
<b>Final Measurement Detector 1</b>									
Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.154500	39.3	1000.00	9.000	On	N	9.4	26.5	65.8	
0.537000	32.8	1000.00	9.000	On	N	9.5	23.2	56.0	
22.479000	46.7	1000.00	9.000	On	N	9.6	13.3	60.0	
<b>Final Measurement Detector 2</b>									
Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.249000	35.0	1000.00	9.000	On	N	9.4	16.8	51.8	
9.663000	26.2	1000.00	9.000	On	N	9.6	23.8	50.0	
22.659000	43.3	1000.00	9.000	On	N	9.6	6.7	50.0	
Emission Level = Read Level + Correct Factor									

### 3.2. Radiated Emission

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dB $\mu$ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54



Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB $\mu$ V/m)=20log Emission Level ( $\mu$ V/m).

#### Test Configuration

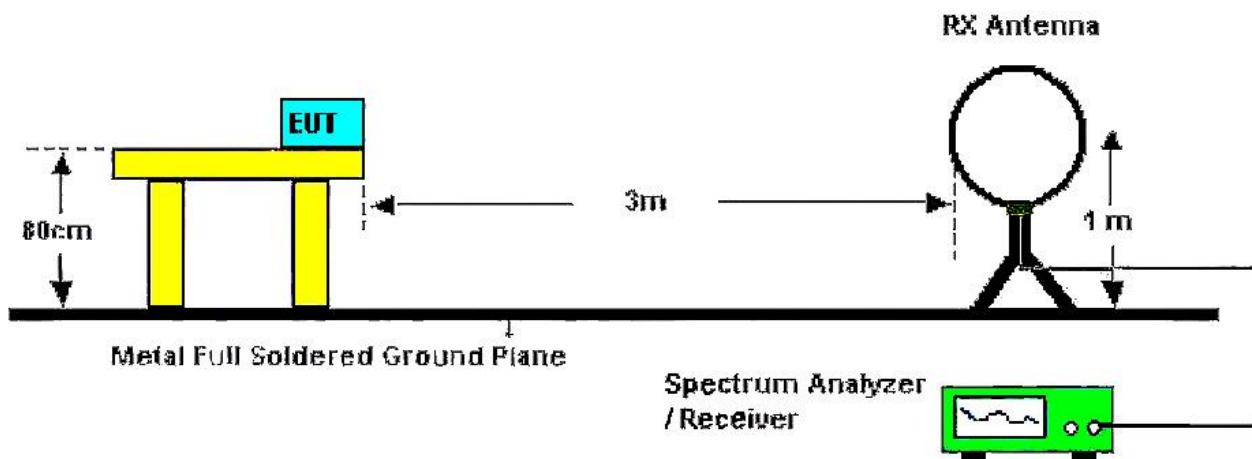

Below 30MHz Test Setup

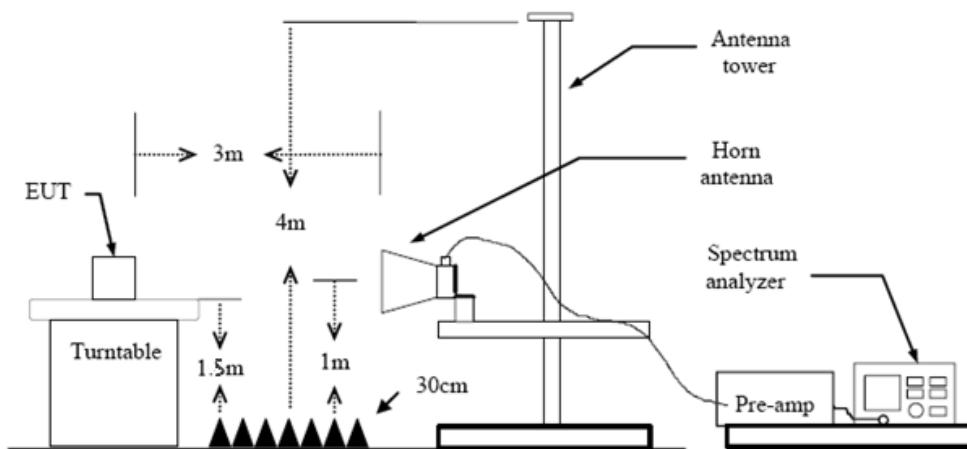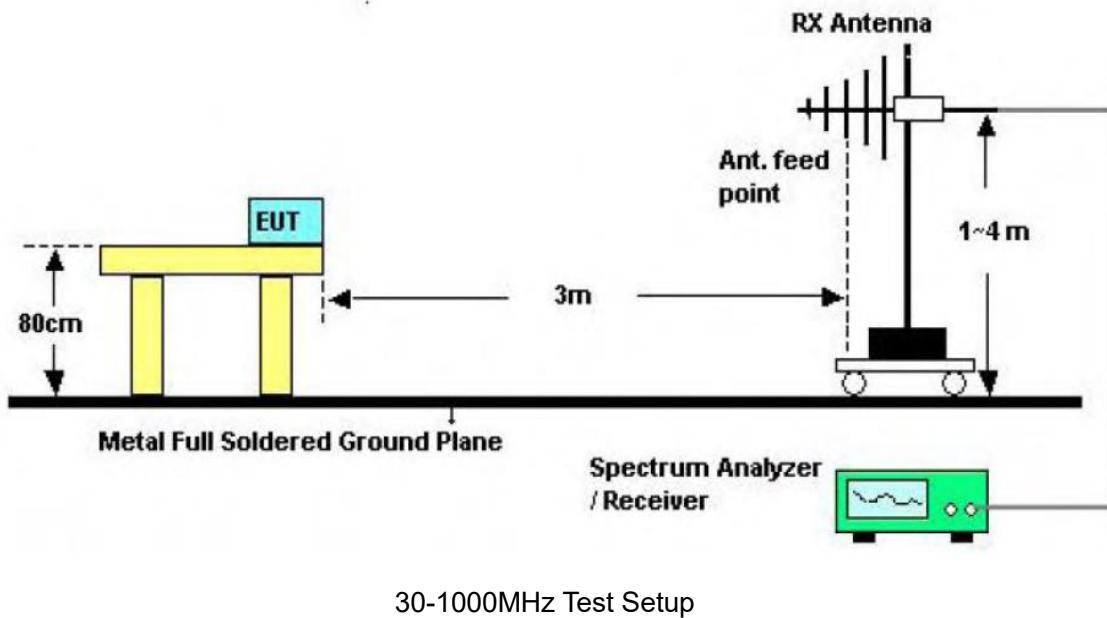

### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) 9k – 150kHz: RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
  - (3) 0.15M – 30MHz: RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
  - (4) 30M - 1 GHz: RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China      Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**


#### **9 kHz~30 MHz**

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

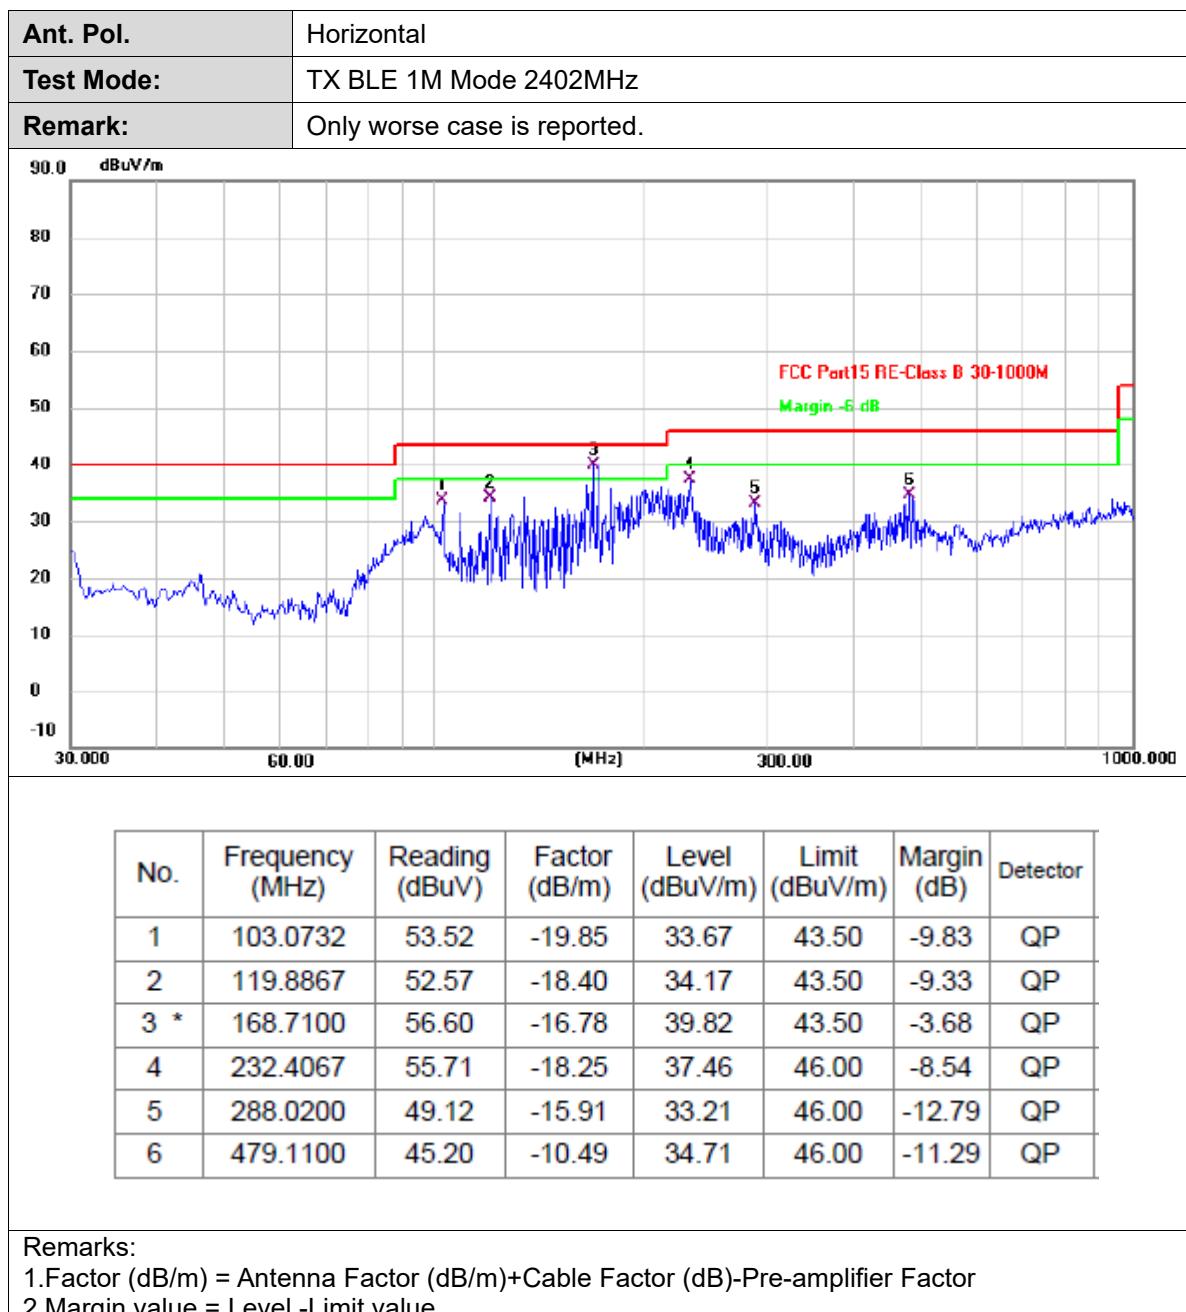


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

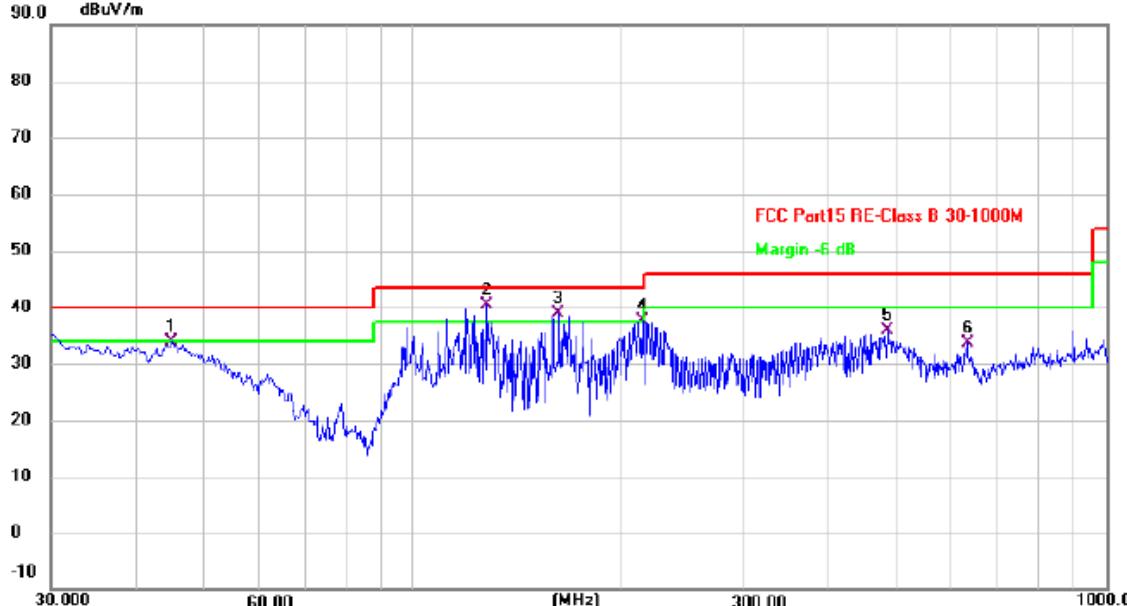

Ant. Pol.	Vertical																																																								
Test Mode:	TX BLE 1M Mode 2402MHz																																																								
Remark:	Only worse case is reported.																																																								
																																																									
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>44.8733</td><td>50.12</td><td>-16.12</td><td>34.00</td><td>40.00</td><td>-6.00</td><td>QP</td></tr><tr><td>2 *</td><td>127.9700</td><td>58.09</td><td>-17.64</td><td>40.45</td><td>43.50</td><td>-3.05</td><td>QP</td></tr><tr><td>3 !</td><td>162.2433</td><td>55.02</td><td>-16.26</td><td>38.76</td><td>43.50</td><td>-4.74</td><td>QP</td></tr><tr><td>4 !</td><td>214.3000</td><td>56.31</td><td>-18.71</td><td>37.60</td><td>43.50</td><td>-5.90</td><td>QP</td></tr><tr><td>5</td><td>483.6367</td><td>46.31</td><td>-10.46</td><td>35.85</td><td>46.00</td><td>-10.15</td><td>QP</td></tr><tr><td>6</td><td>630.7533</td><td>40.77</td><td>-7.13</td><td>33.64</td><td>46.00</td><td>-12.36</td><td>QP</td></tr></tbody></table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	44.8733	50.12	-16.12	34.00	40.00	-6.00	QP	2 *	127.9700	58.09	-17.64	40.45	43.50	-3.05	QP	3 !	162.2433	55.02	-16.26	38.76	43.50	-4.74	QP	4 !	214.3000	56.31	-18.71	37.60	43.50	-5.90	QP	5	483.6367	46.31	-10.46	35.85	46.00	-10.15	QP	6	630.7533	40.77	-7.13	33.64	46.00	-12.36	QP
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																		
1	44.8733	50.12	-16.12	34.00	40.00	-6.00	QP																																																		
2 *	127.9700	58.09	-17.64	40.45	43.50	-3.05	QP																																																		
3 !	162.2433	55.02	-16.26	38.76	43.50	-4.74	QP																																																		
4 !	214.3000	56.31	-18.71	37.60	43.50	-5.90	QP																																																		
5	483.6367	46.31	-10.46	35.85	46.00	-10.15	QP																																																		
6	630.7533	40.77	-7.13	33.64	46.00	-12.36	QP																																																		
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																																									



Above 1GHz

Ant. Pol.	Horizontal						
Test Mode:	TX BLE 1M Mode 2402MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.508	42.10	1.84	43.94	74.00	-30.06	peak
2 *	4804.258	29.04	1.84	30.88	54.00	-23.12	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical						
Test Mode:	TX BLE 1M Mode 2402MHz						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.						

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4803.928	34.81	1.84	36.65	54.00	-17.35	AVG
2	4804.087	43.82	1.84	45.66	74.00	-28.34	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX BLE 1M Mode 2440MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4879.766	40.04	1.96	42.00	74.00	-32.00	peak
2 *	4880.323	26.50	1.96	28.46	54.00	-25.54	AVG

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX BLE 1M Mode 2440MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4879.763	26.35	1.96	28.31	54.00	-25.69	AVG
2	4879.866	41.99	1.96	43.95	74.00	-30.05	peak

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



<b>Ant. Pol.</b>	Horizontal						
<b>Test Mode:</b>	TX BLE 1M Mode 2480MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
<b>No.</b>	<b>Frequency (MHz)</b>	<b>Reading (dBuV)</b>	<b>Factor (dB/m)</b>	<b>Level (dBuV/m)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Detector</b>
1 *	4959.776	25.72	2.08	27.80	54.00	-26.20	AVG
2	4960.344	41.00	2.08	43.08	74.00	-30.92	peak

<b>Ant. Pol.</b>	Vertical						
<b>Test Mode:</b>	TX GFSK Mode 2480MHz						
<b>Remark:</b>	No report for the emission which more than 20 dB below the prescribed limit.						
<b>No.</b>	<b>Frequency (MHz)</b>	<b>Reading (dBuV)</b>	<b>Factor (dB/m)</b>	<b>Level (dBuV/m)</b>	<b>Limit (dBuV/m)</b>	<b>Margin (dB)</b>	<b>Detector</b>
1	4959.736	40.36	2.08	42.44	74.00	-31.56	peak
2 *	4959.889	25.62	2.08	27.70	54.00	-26.30	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value


### 3.3. Band Edge Emissions (Radiated)

#### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dB $\mu$ V/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

#### Test Configuration

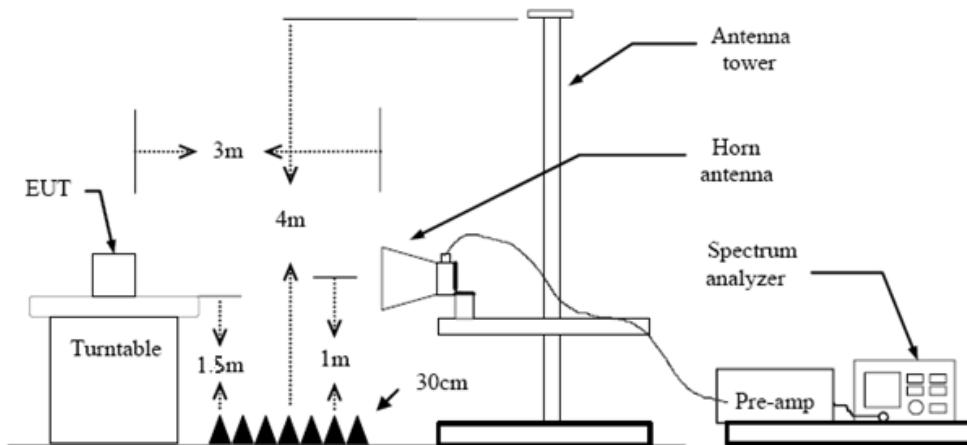

#### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

#### Test Mode

Please refer to the clause 2.4.



## Test Result

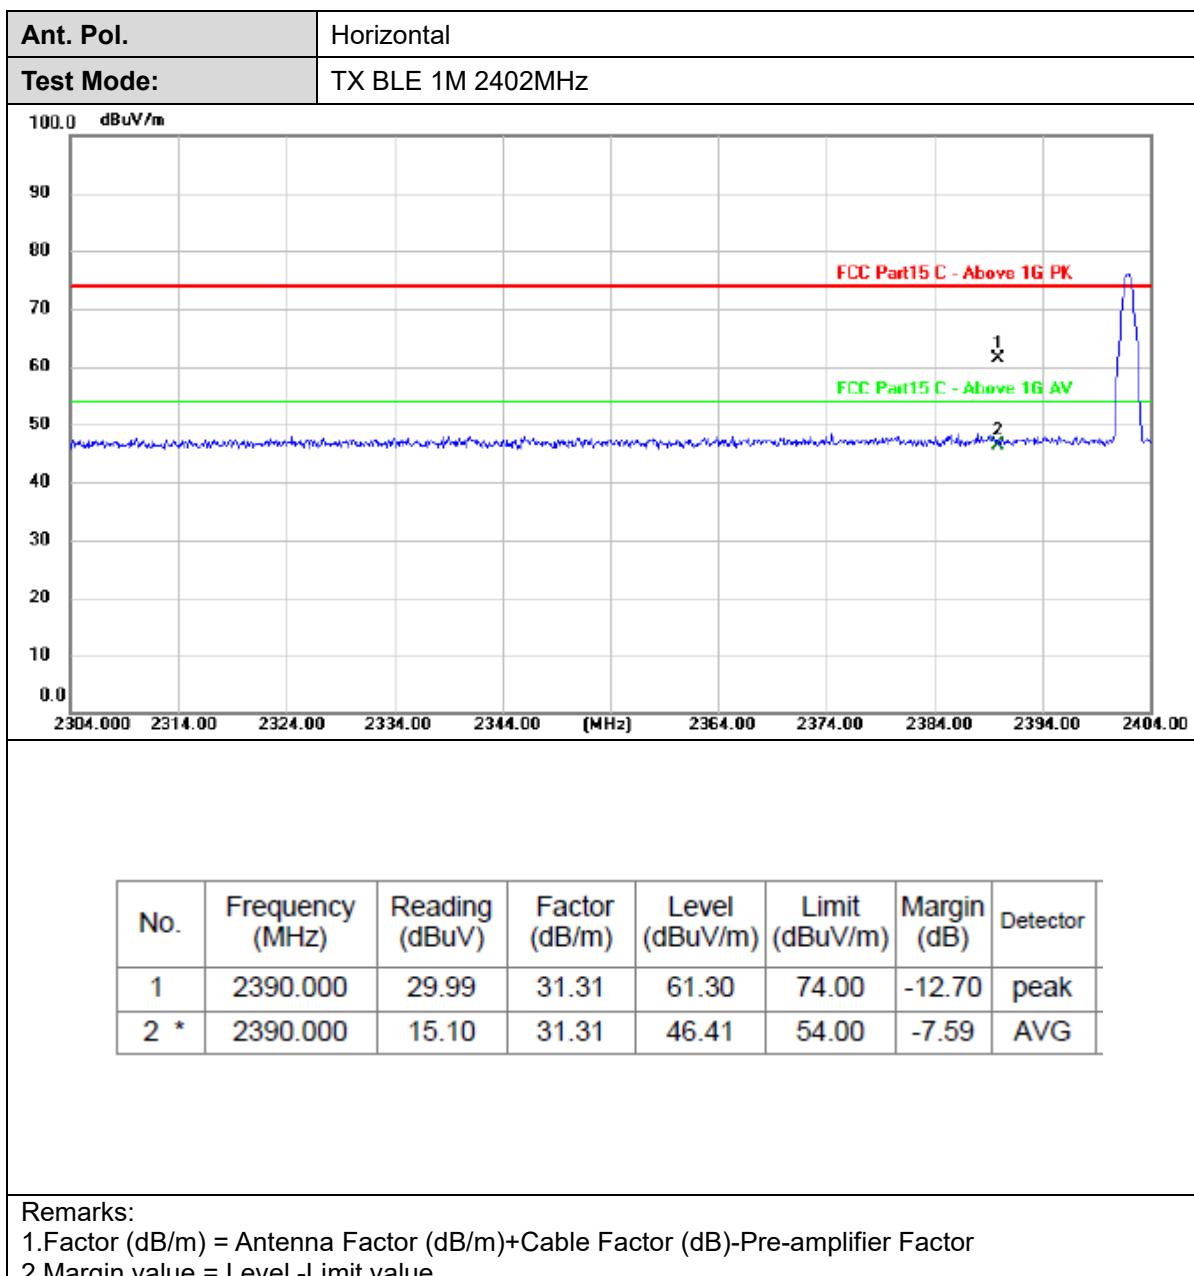


---

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China      Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)


TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

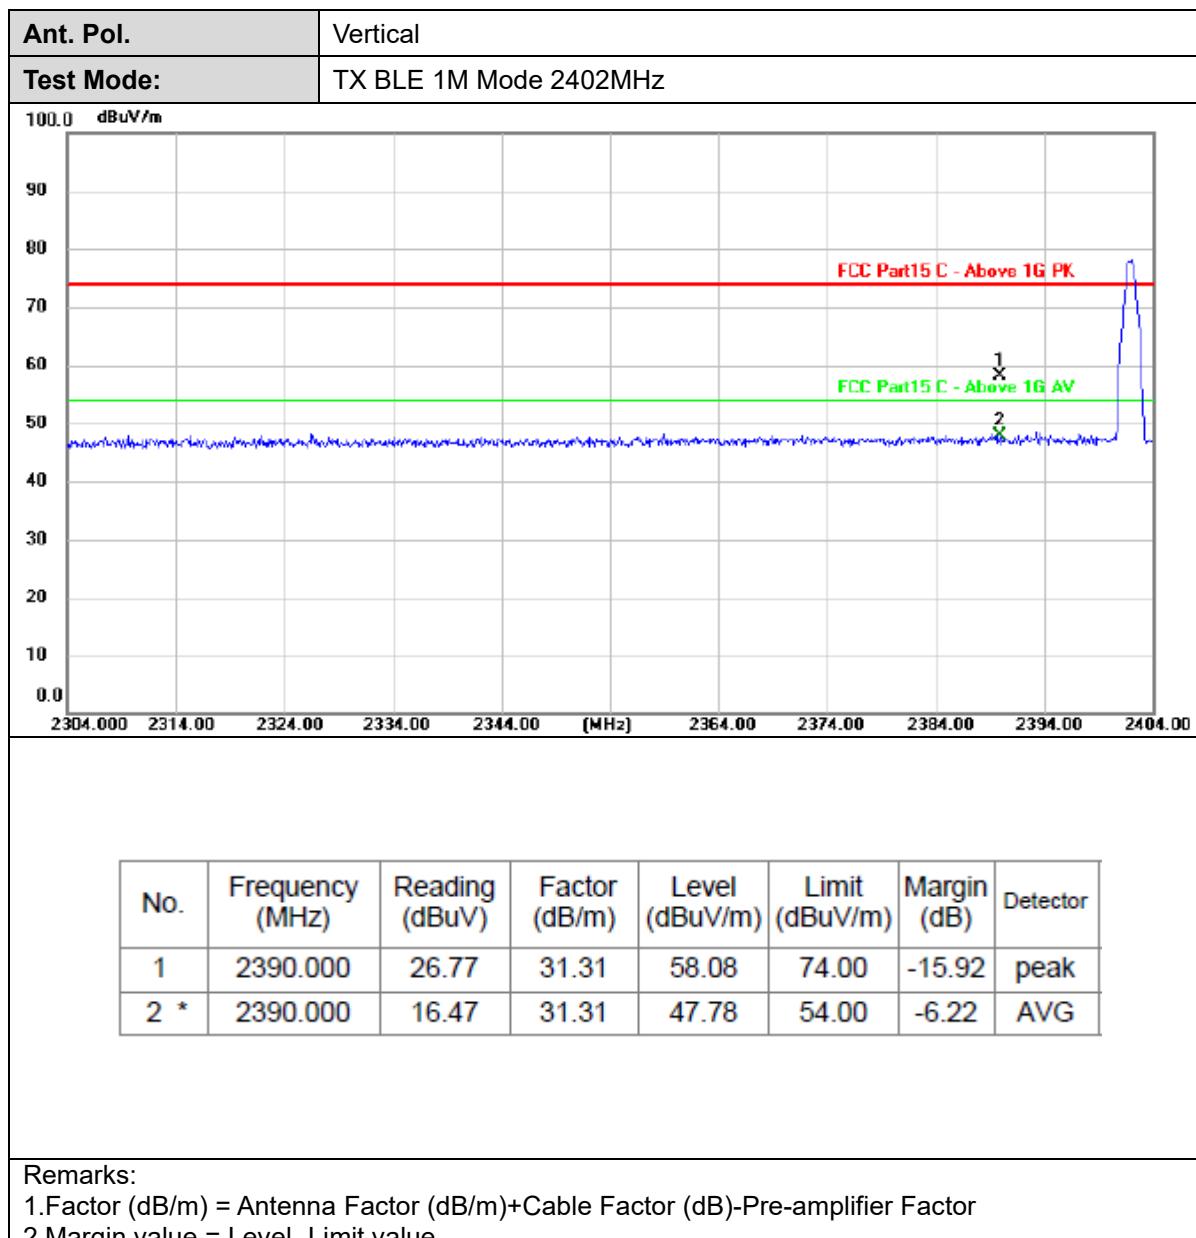

## CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China      Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

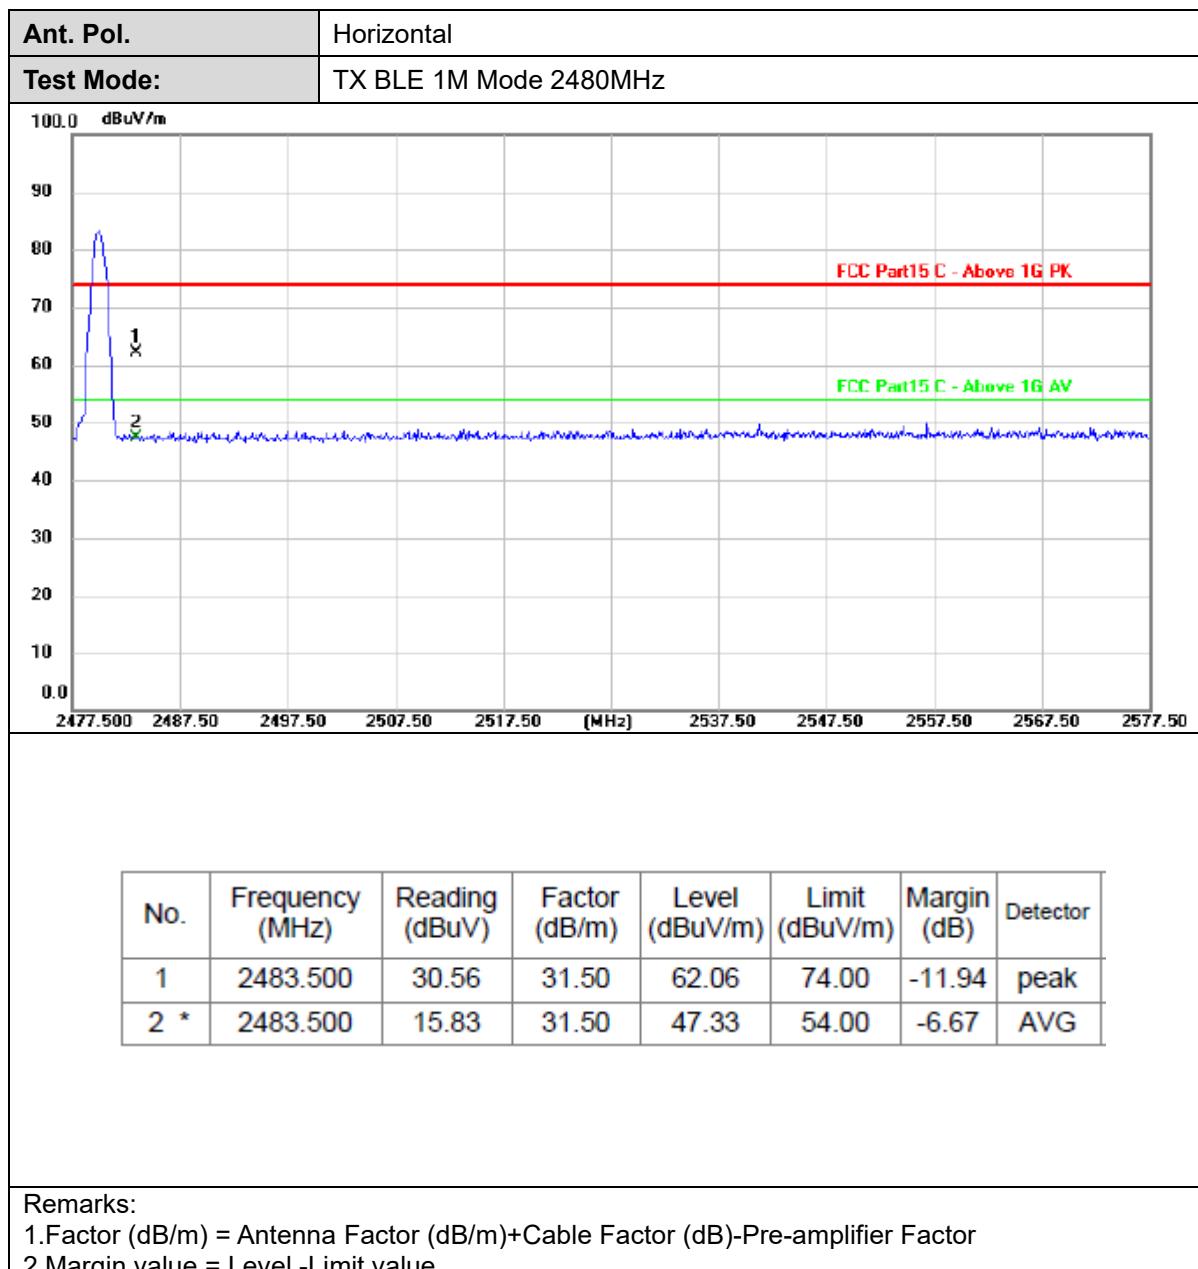


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China      Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

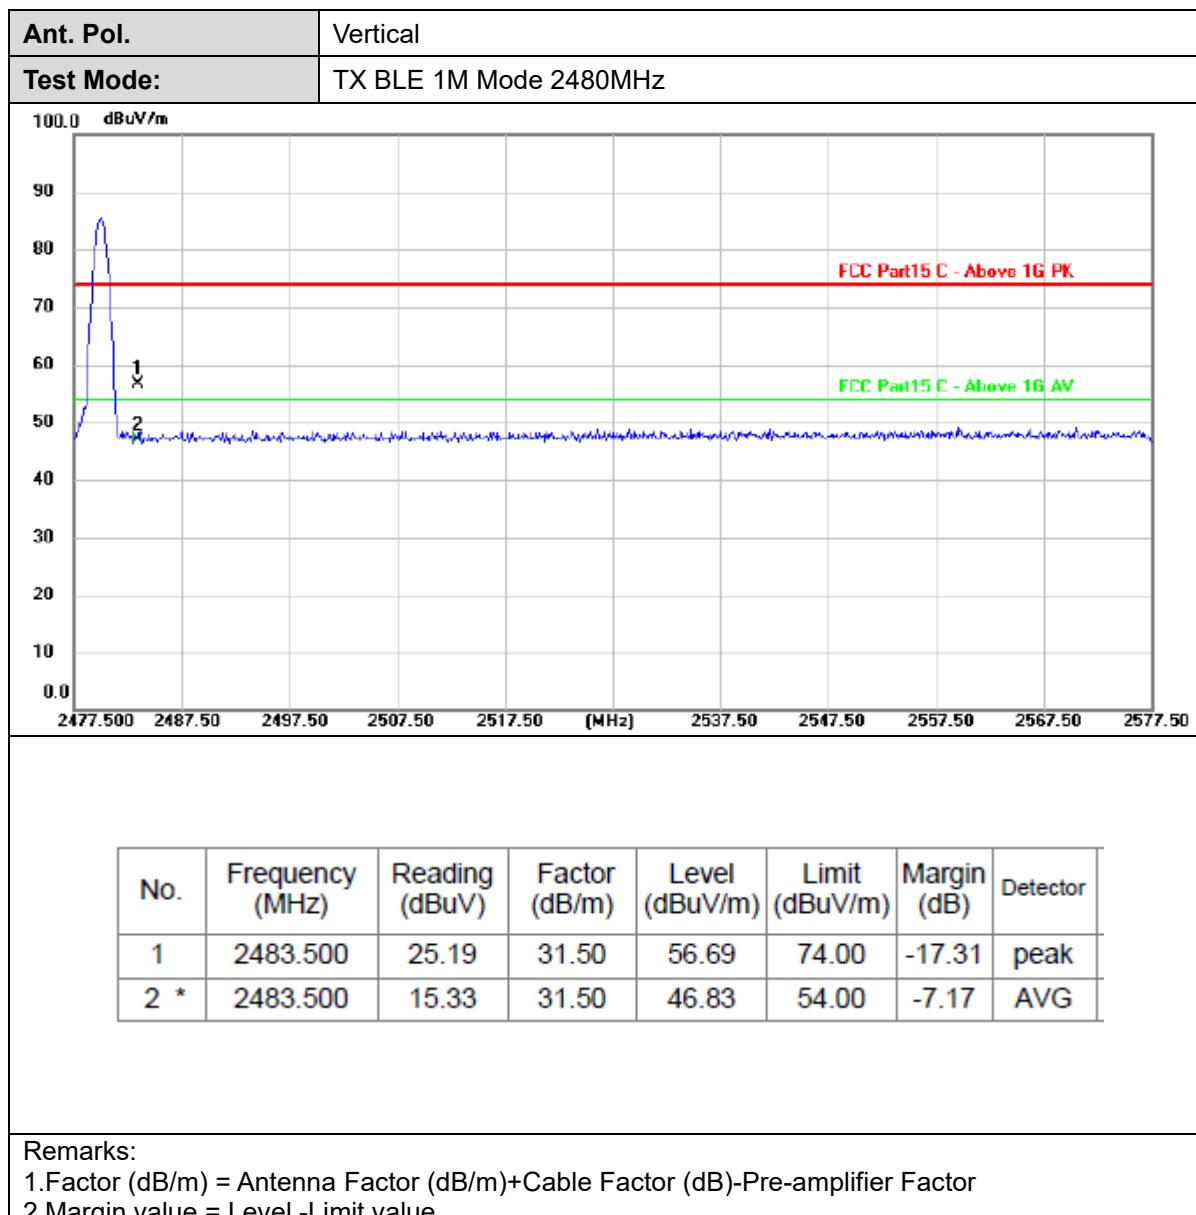

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China      Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)




### 3.4. Band Edge and Spurious Emissions (Conducted)

#### Limit

##### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

#### Test Configuration

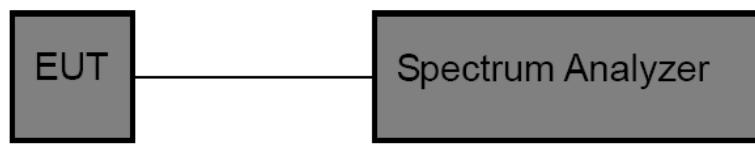

#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.4.

#### Test Result

##### Band Edge Conducted Test

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.69	-48.23	$\leq$ -20.69	PASS
		High	2480	-0.07	-48.05	$\leq$ -20.07	PASS

##### Conducted Spurious Emissions Test


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-0.27	-0.27	---	PASS
			30~1000	-0.27	-56.64	$\leq$ -30.27	PASS
			1000~26500	-0.27	-37.87	$\leq$ -30.27	PASS
	2440	2440	Reference	-0.79	-0.79	---	PASS
			30~1000	-0.79	-56.11	$\leq$ -30.79	PASS
			1000~26500	-0.79	-40.07	$\leq$ -30.79	PASS
	2480	2480	Reference	0.04	0.04	---	PASS
			30~1000	0.04	-55.83	$\leq$ -29.96	PASS
			1000~26500	0.04	-40.95	$\leq$ -29.96	PASS

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)



Band Edge Conducted Test plot as follows:

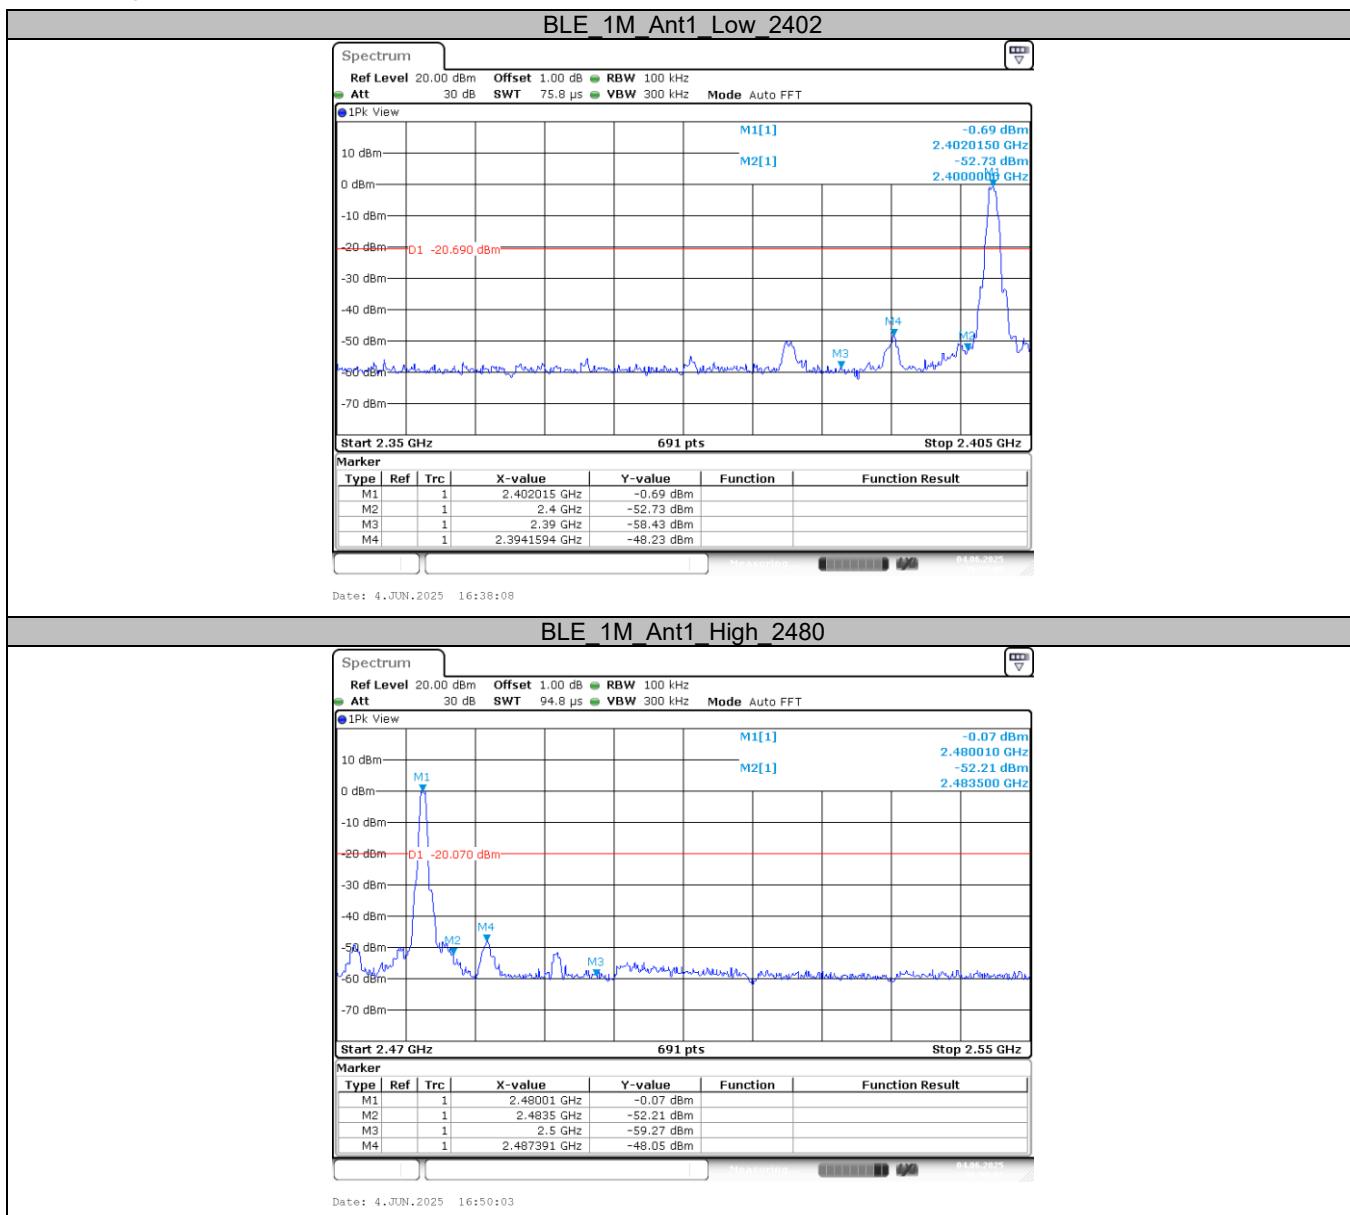

CTC Laboratories, Inc.


Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



## Conducted Spurious Emissions Test plot as follows

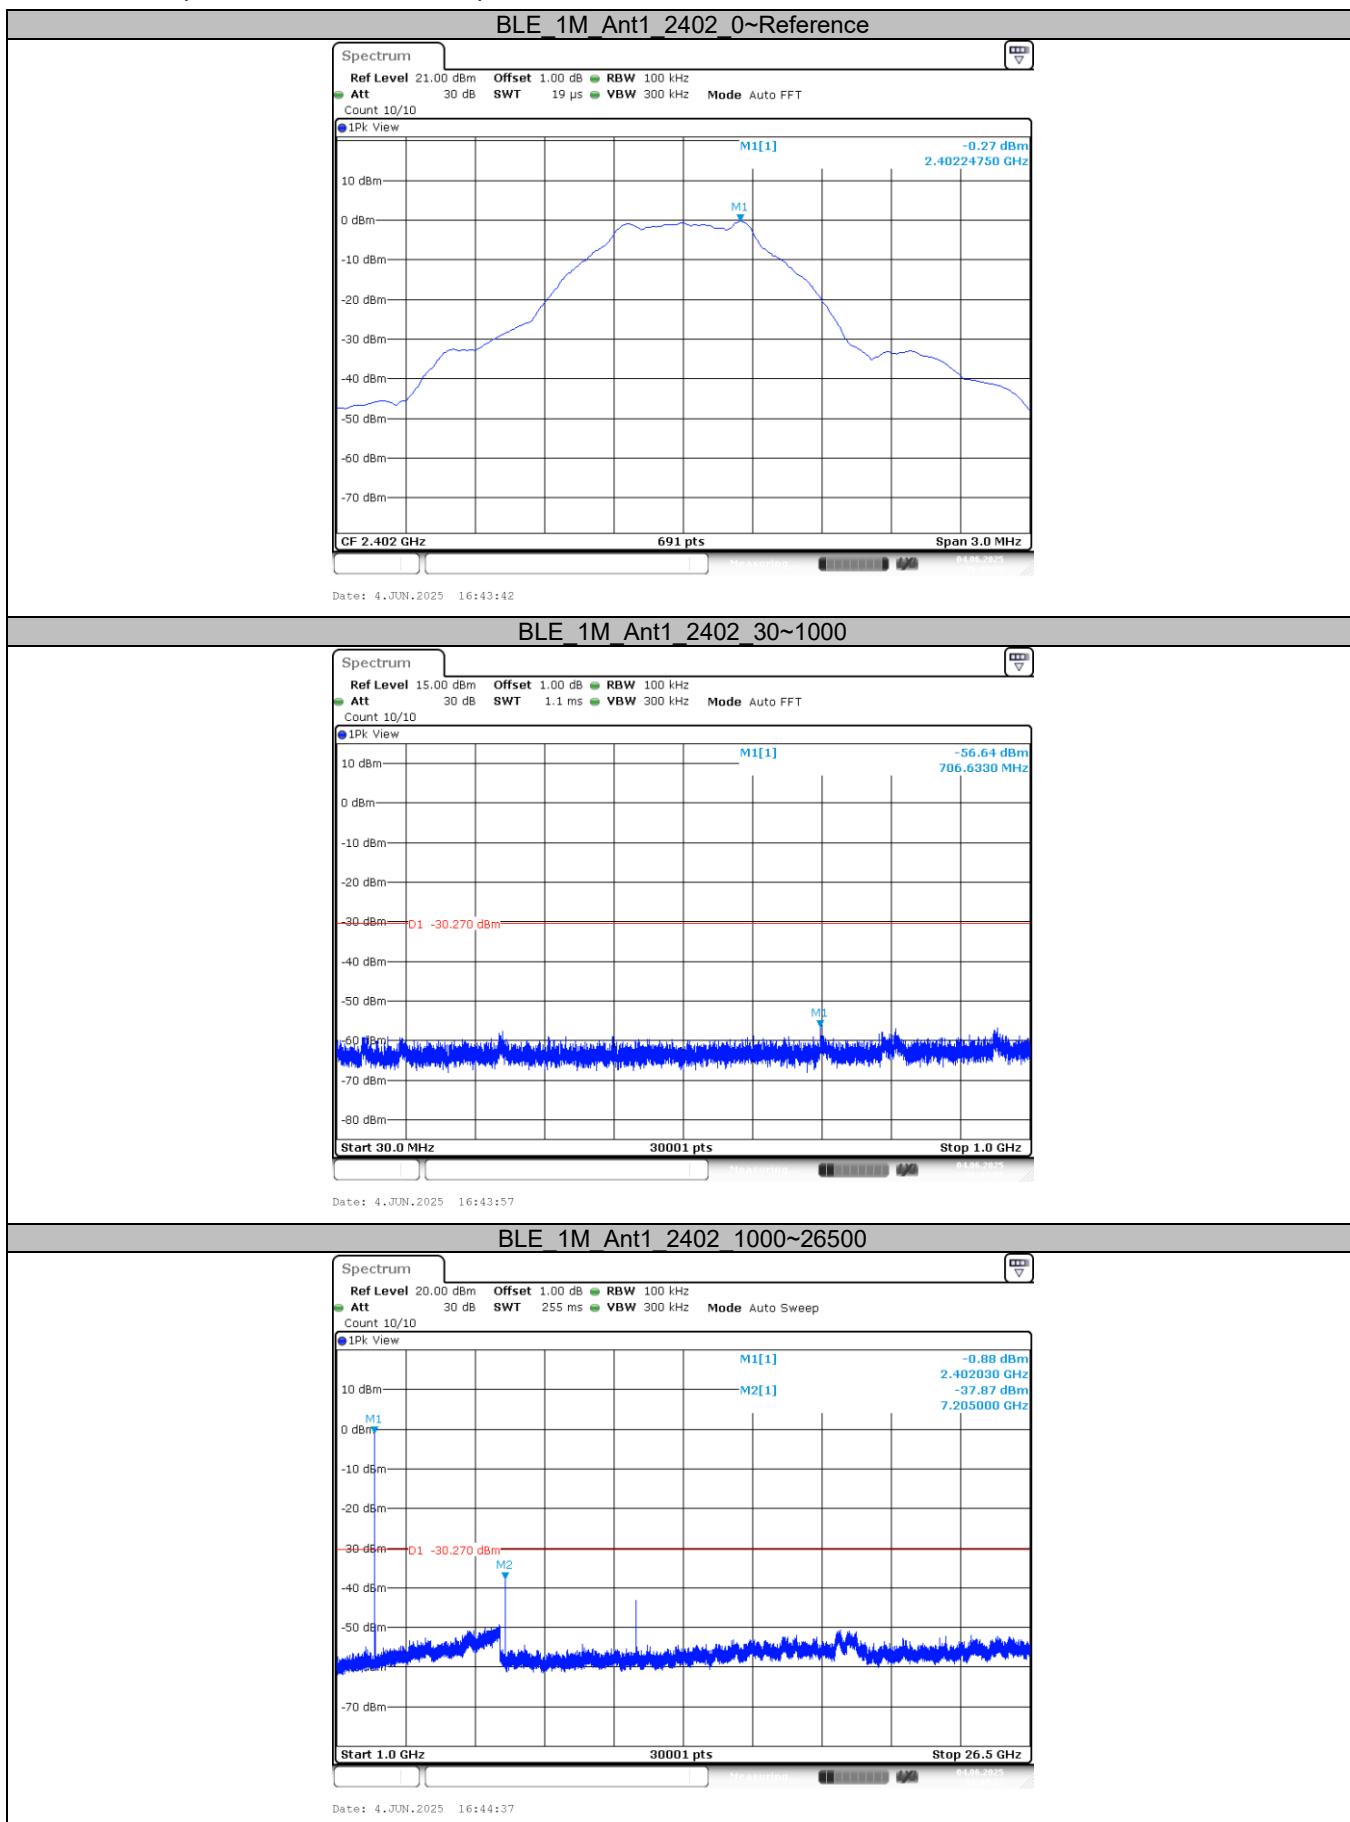


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

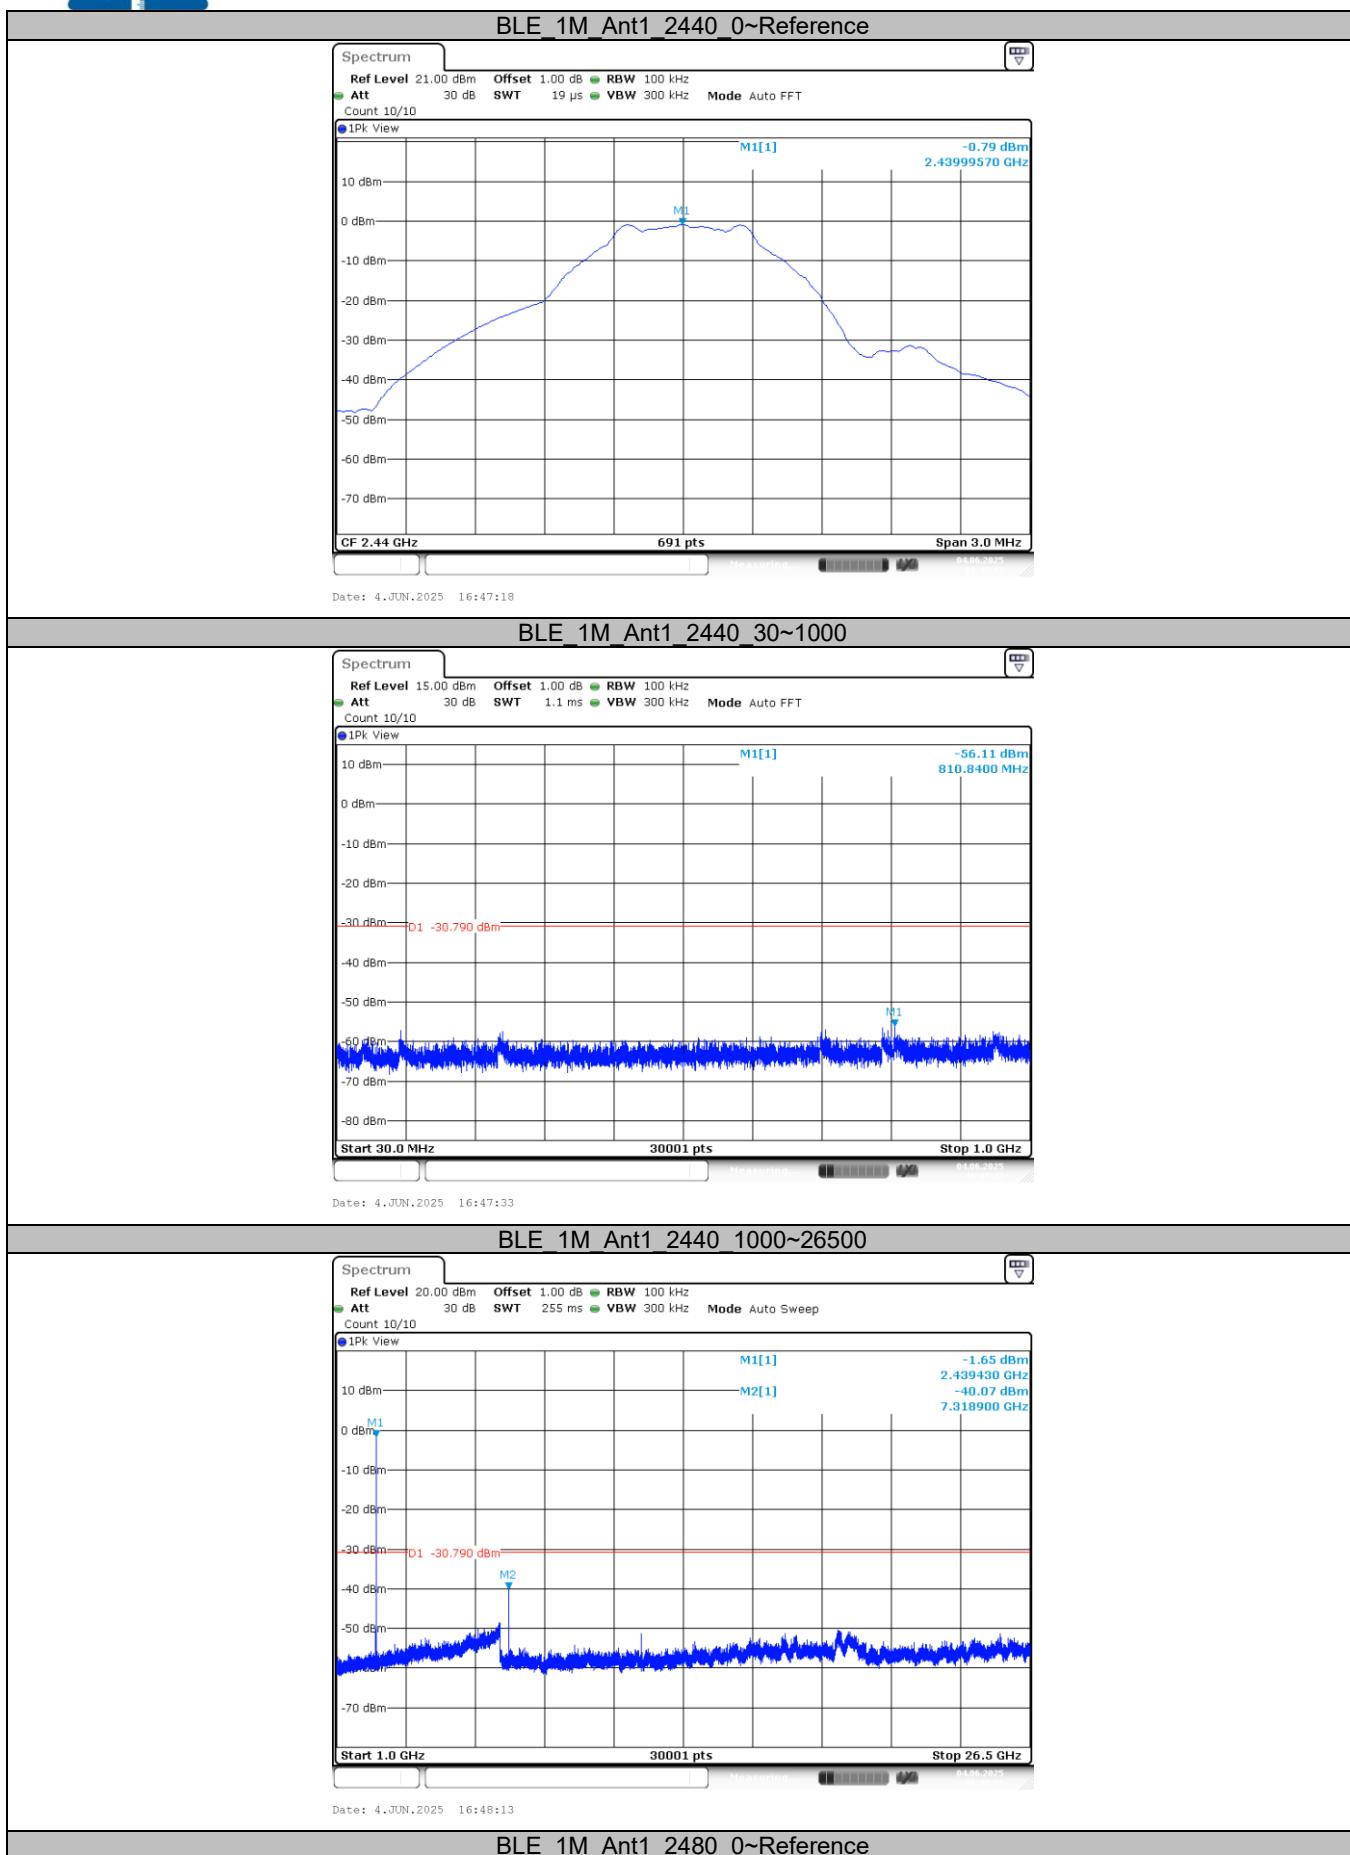


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

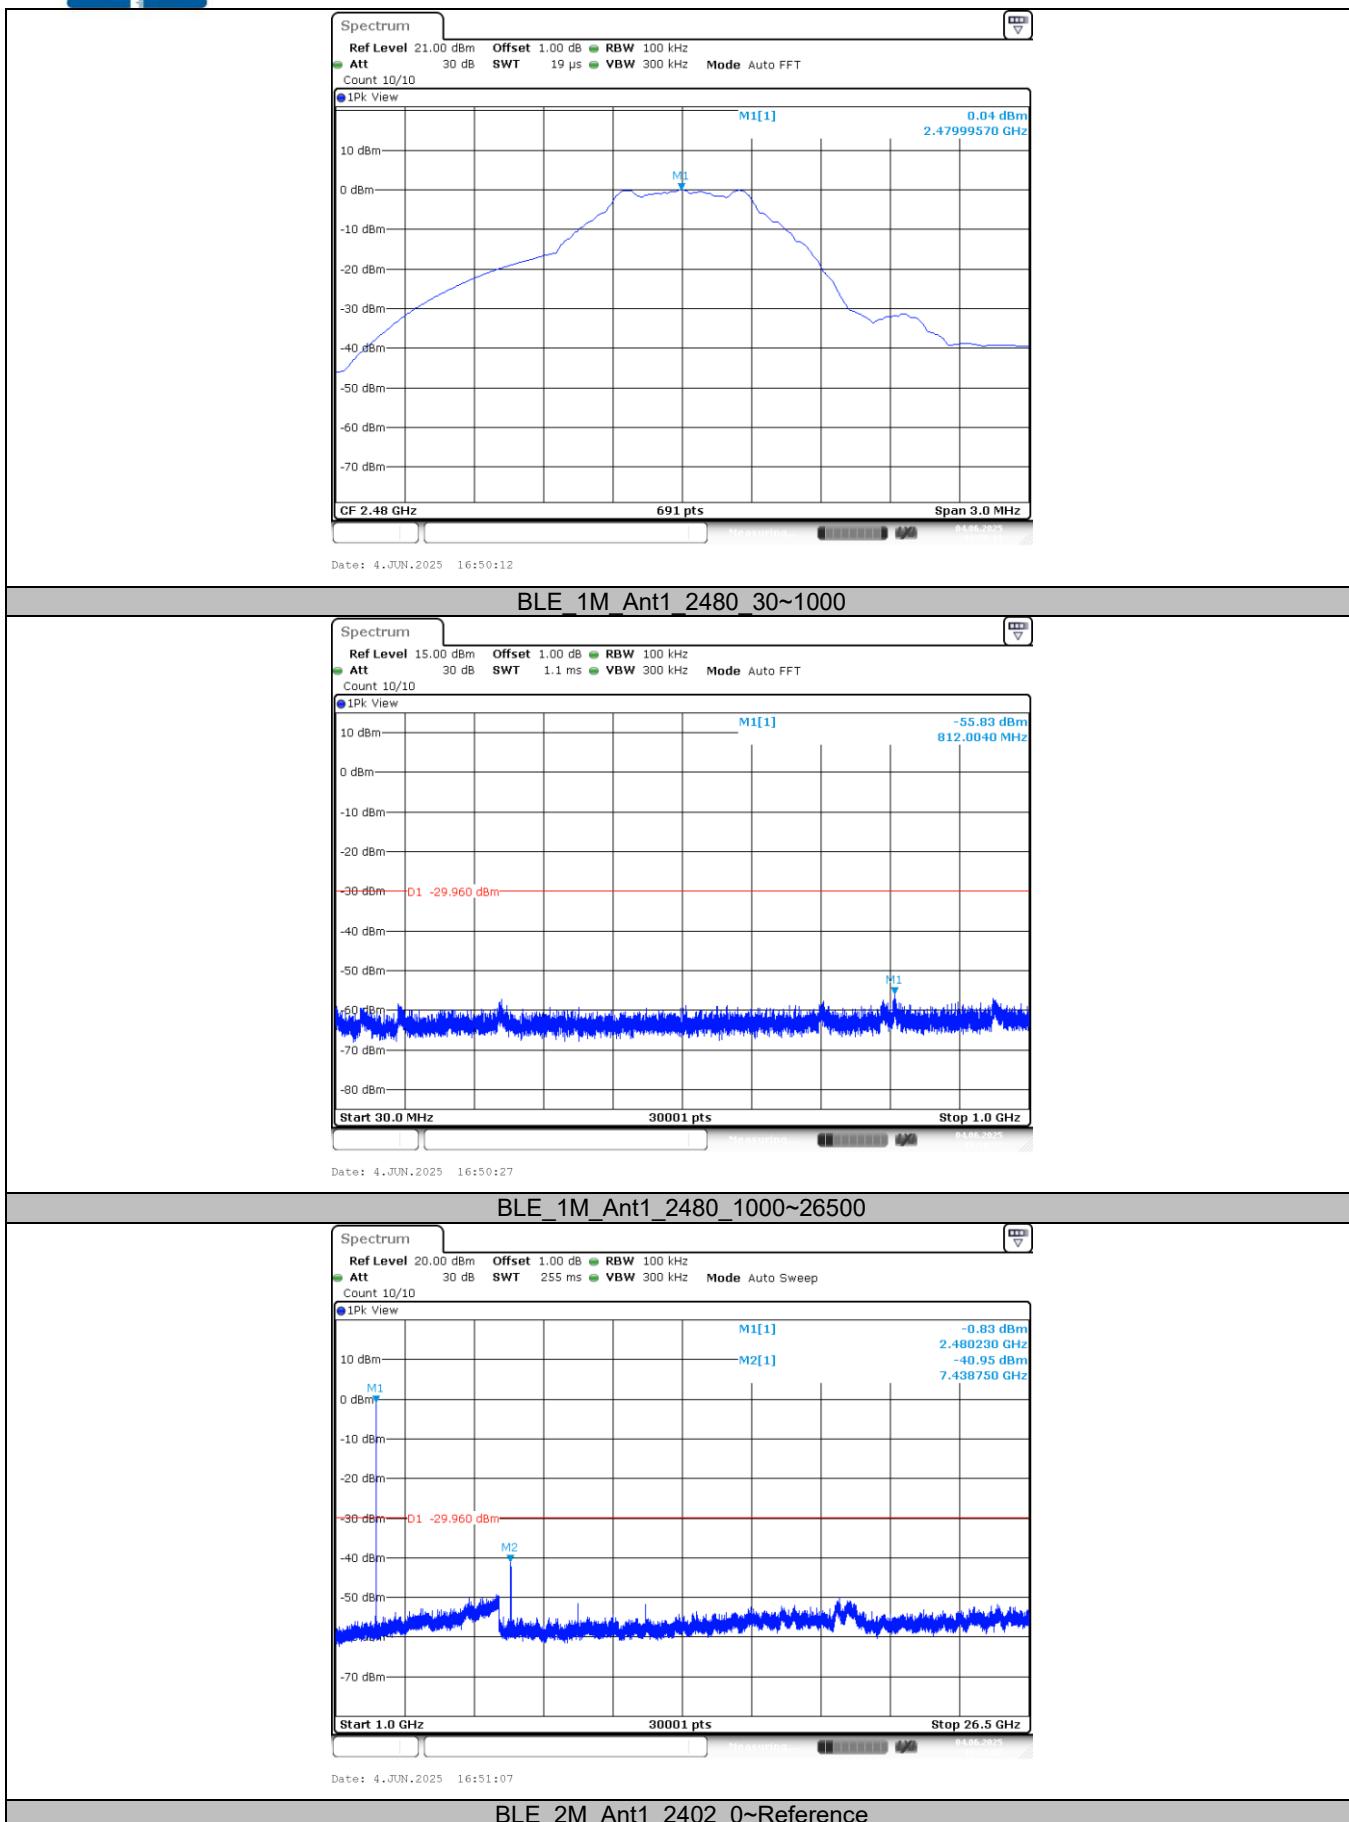


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

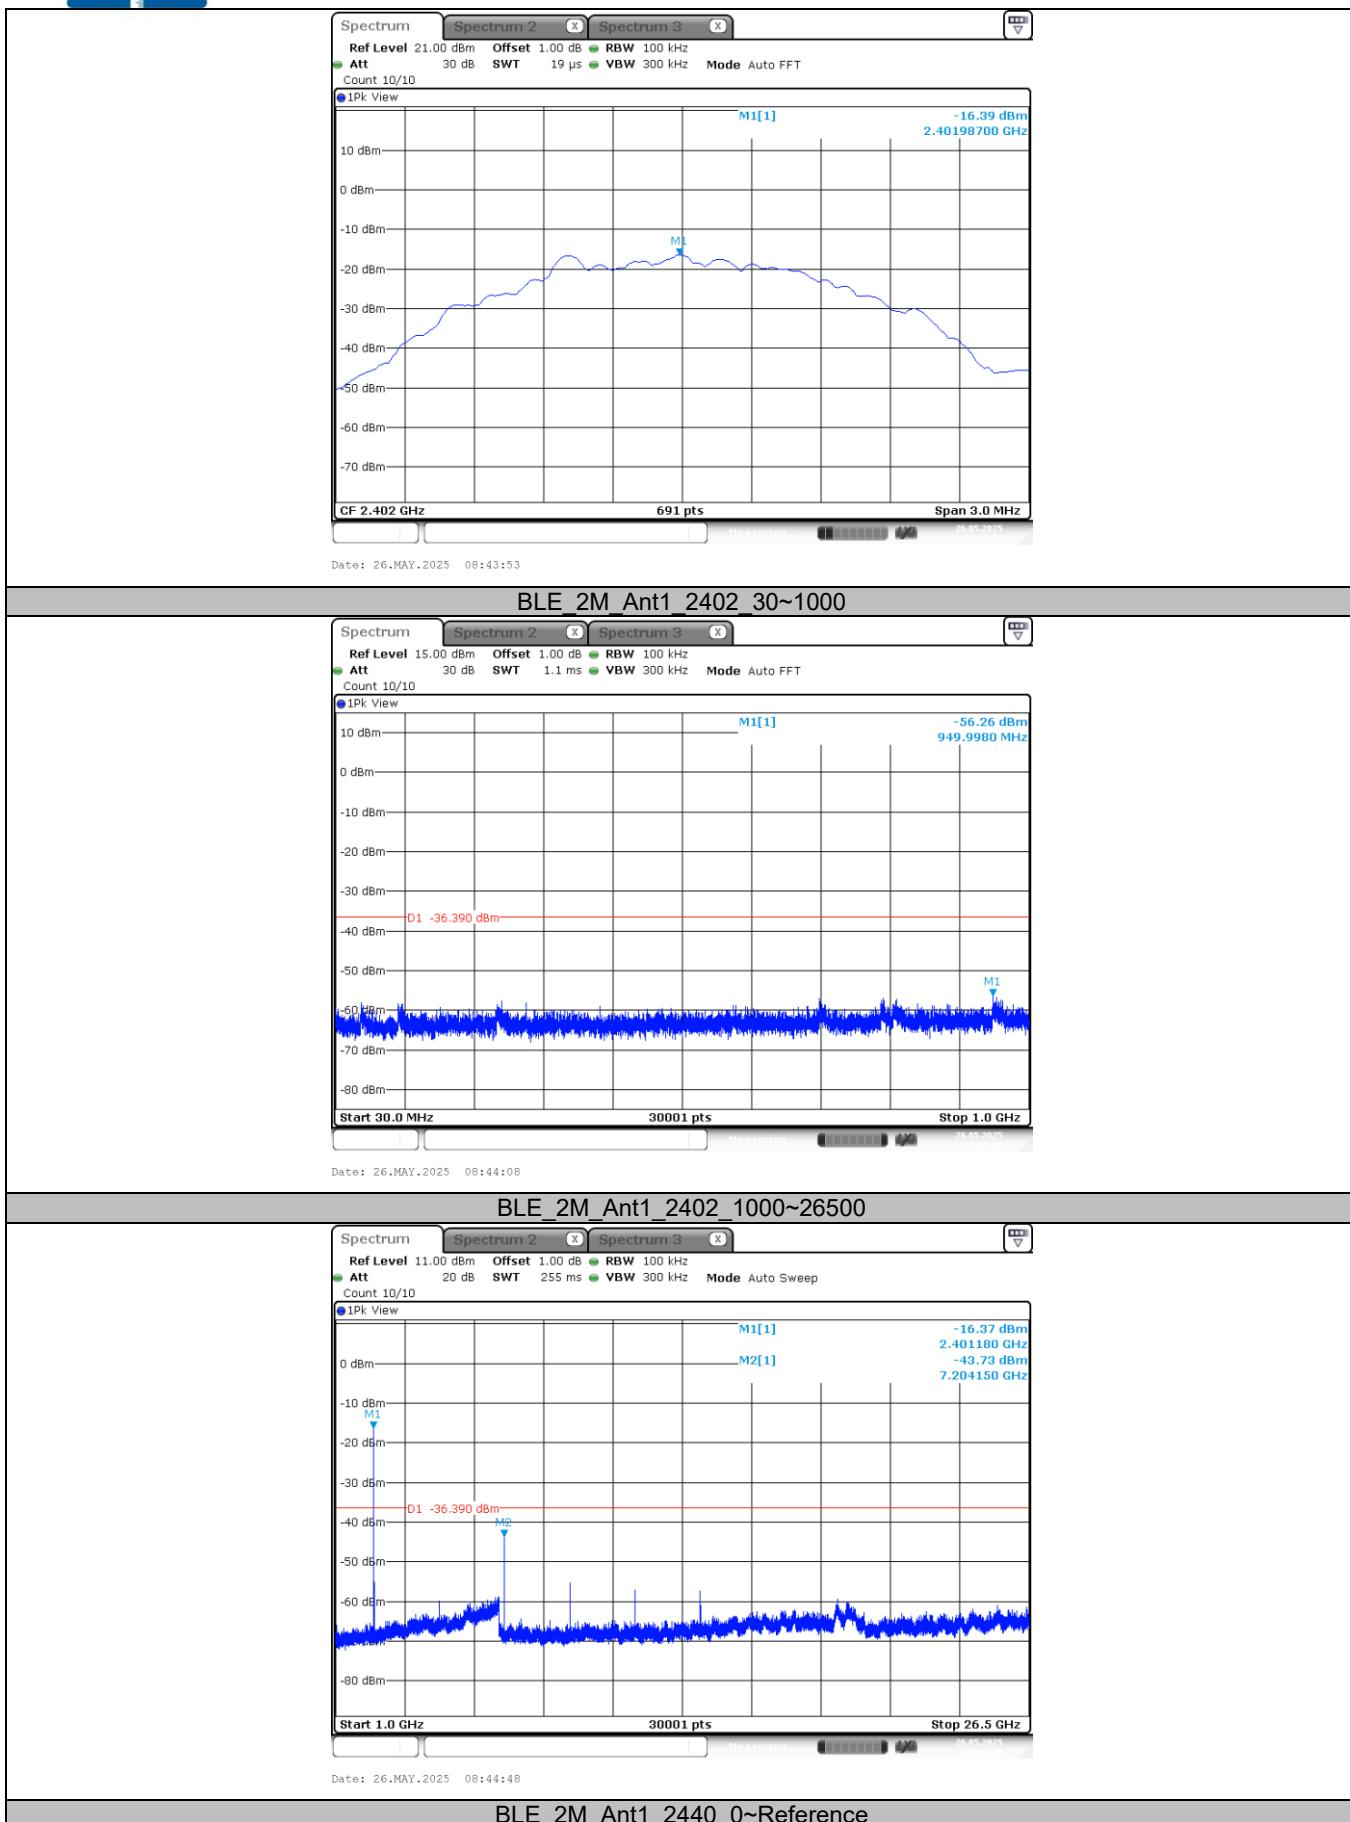


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

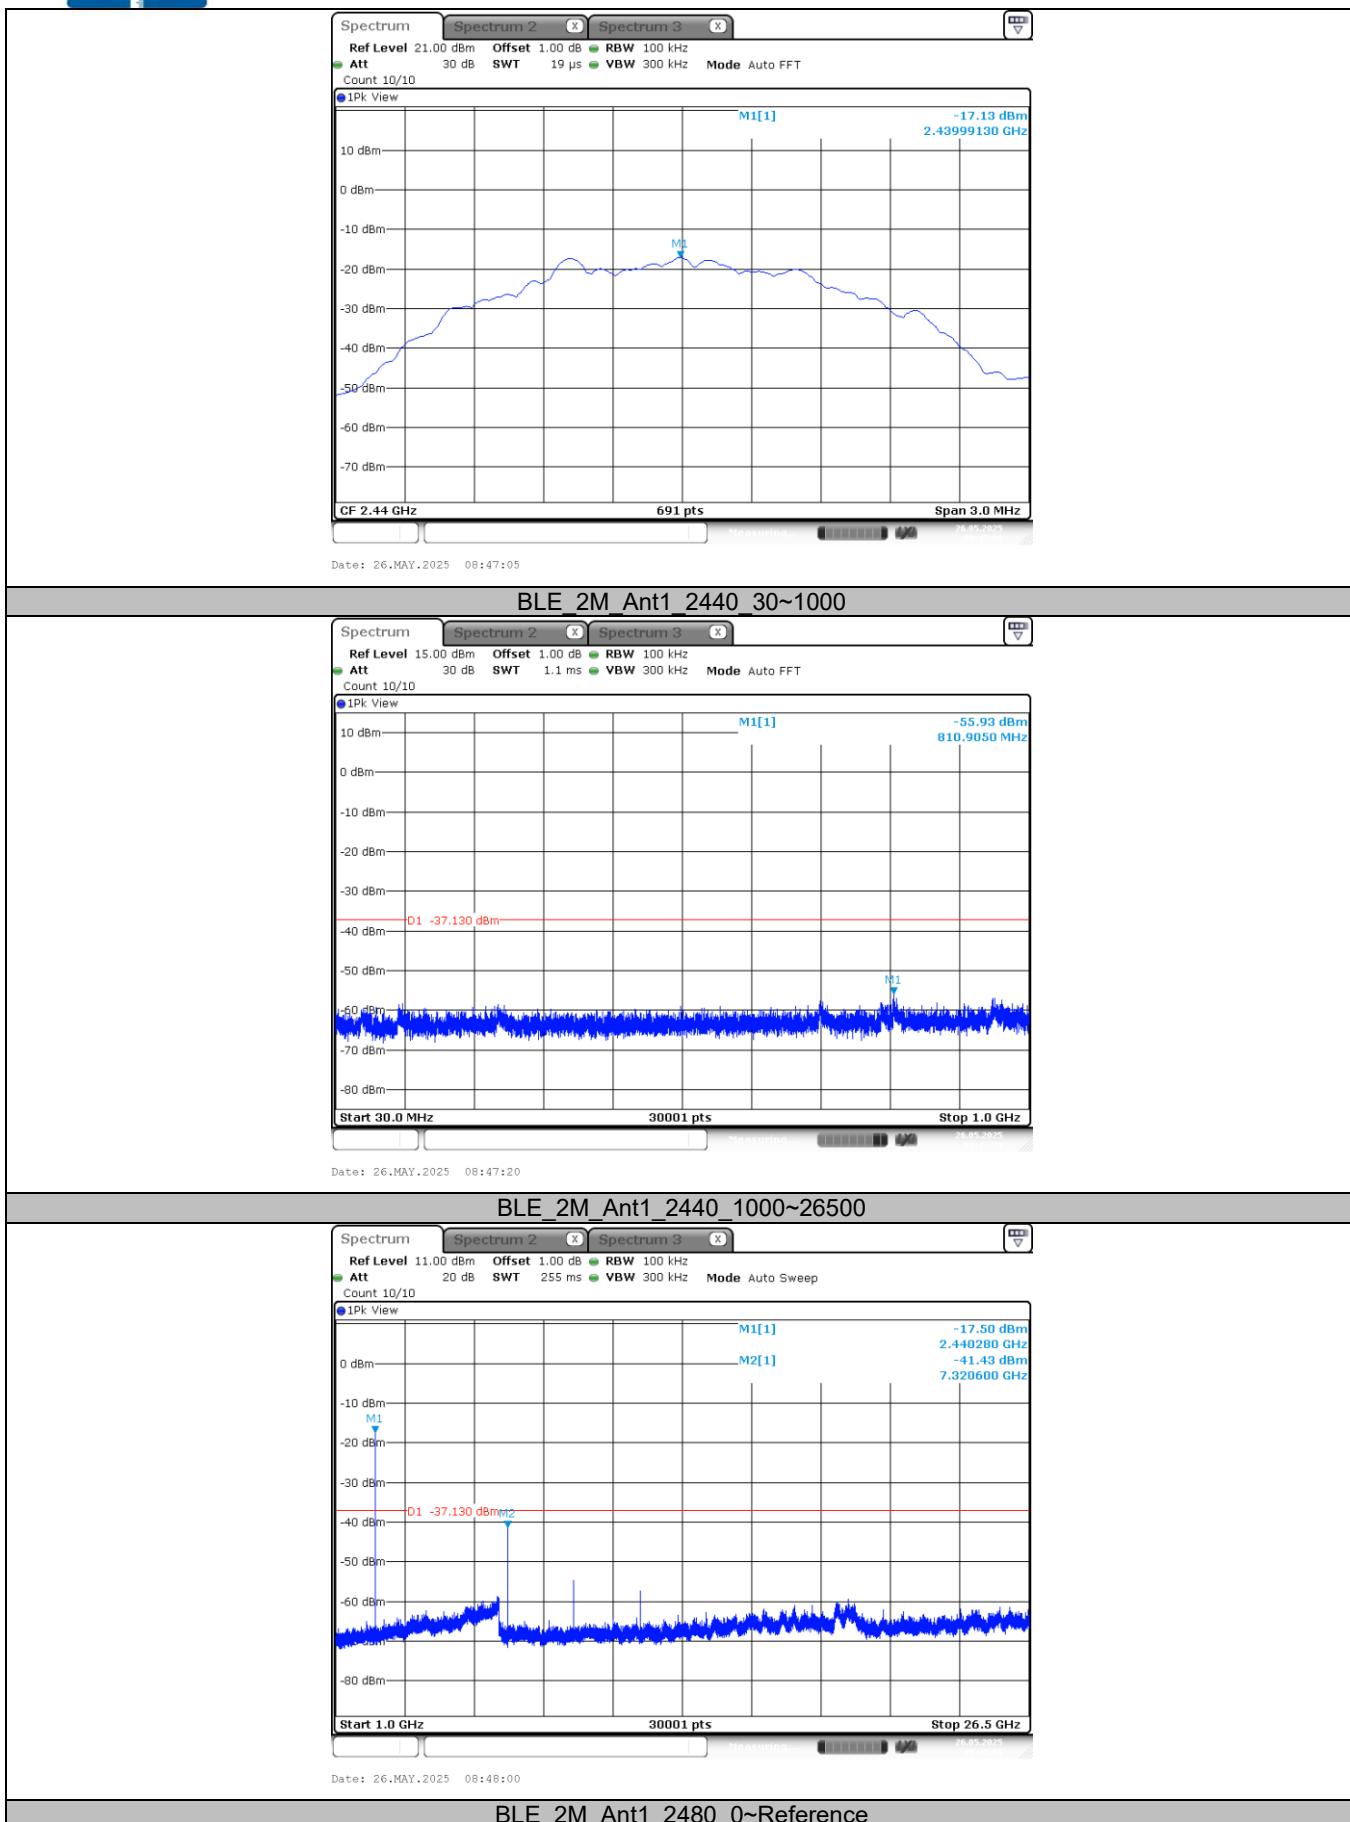


---

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)

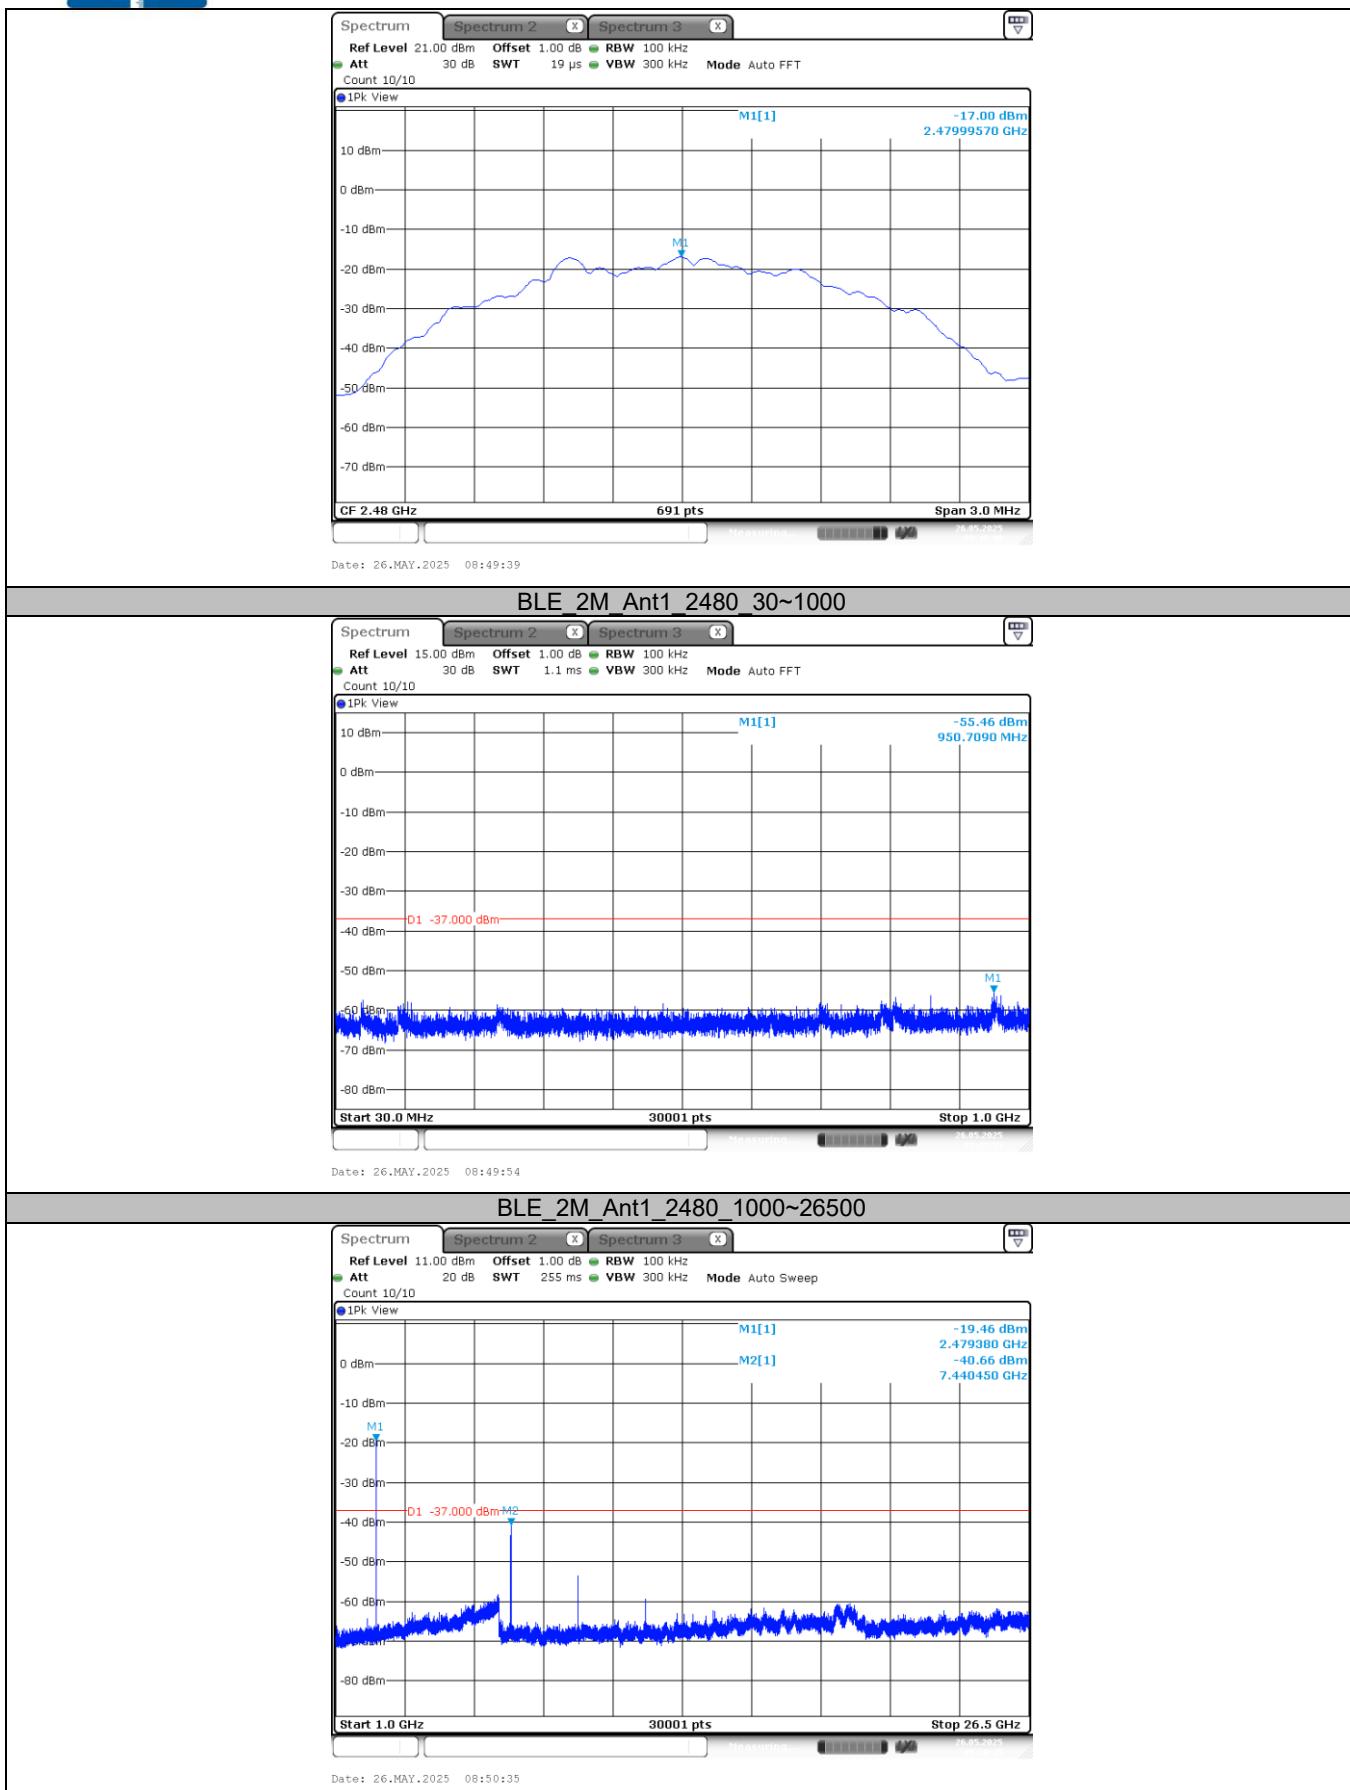

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)




### 3.5. DTS Bandwidth

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2) / RSS-247 5.2 a:

Test Item	Limit	Frequency Range (MHz)
DTS Bandwidth	$\geq 500$ kHz (6dB bandwidth)	2400~2483.5

#### Test Configuration

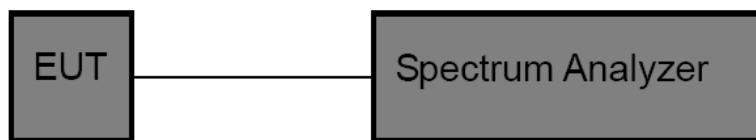

#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. DTS Spectrum Setting:
  - (1) Set RBW = 100 kHz.
  - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.OCB Spectrum Setting:
  - (1) Set RBW = 1% ~ 5% occupied bandwidth.
  - (2) Set the video bandwidth (VBW)  $\geq 3$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.


NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

#### Test Mode

Please refer to the clause 2.4.


#### Test Result

Mode	Channel	99% Bandwidth (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
BLE 1M	0	1.019	0.68	$\geq 0.5$	PASS
	19	1.039	0.67		PASS
	39	1.055	0.68		PASS

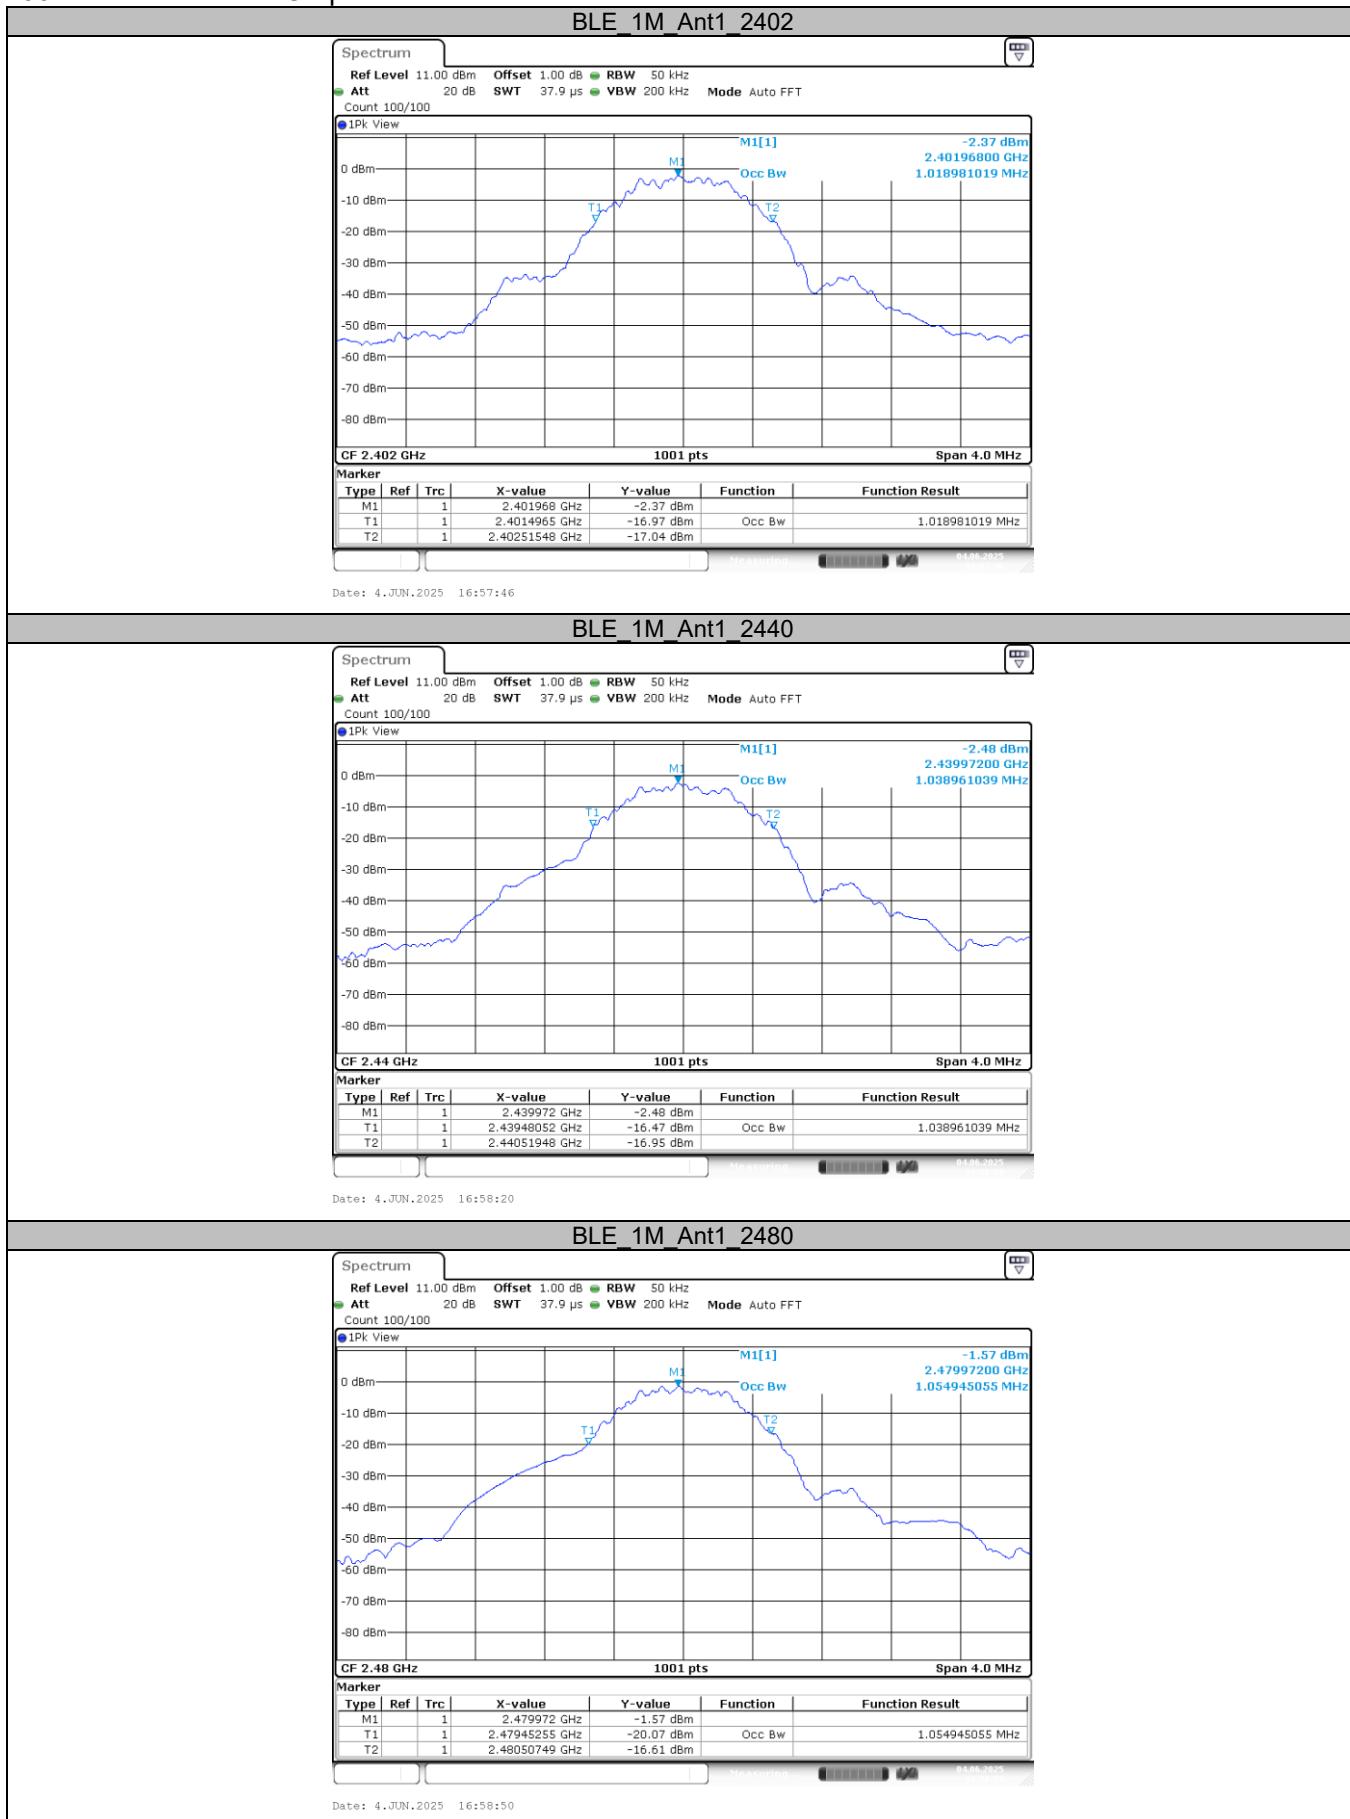



## DTS Bandwidth Test Graphs:

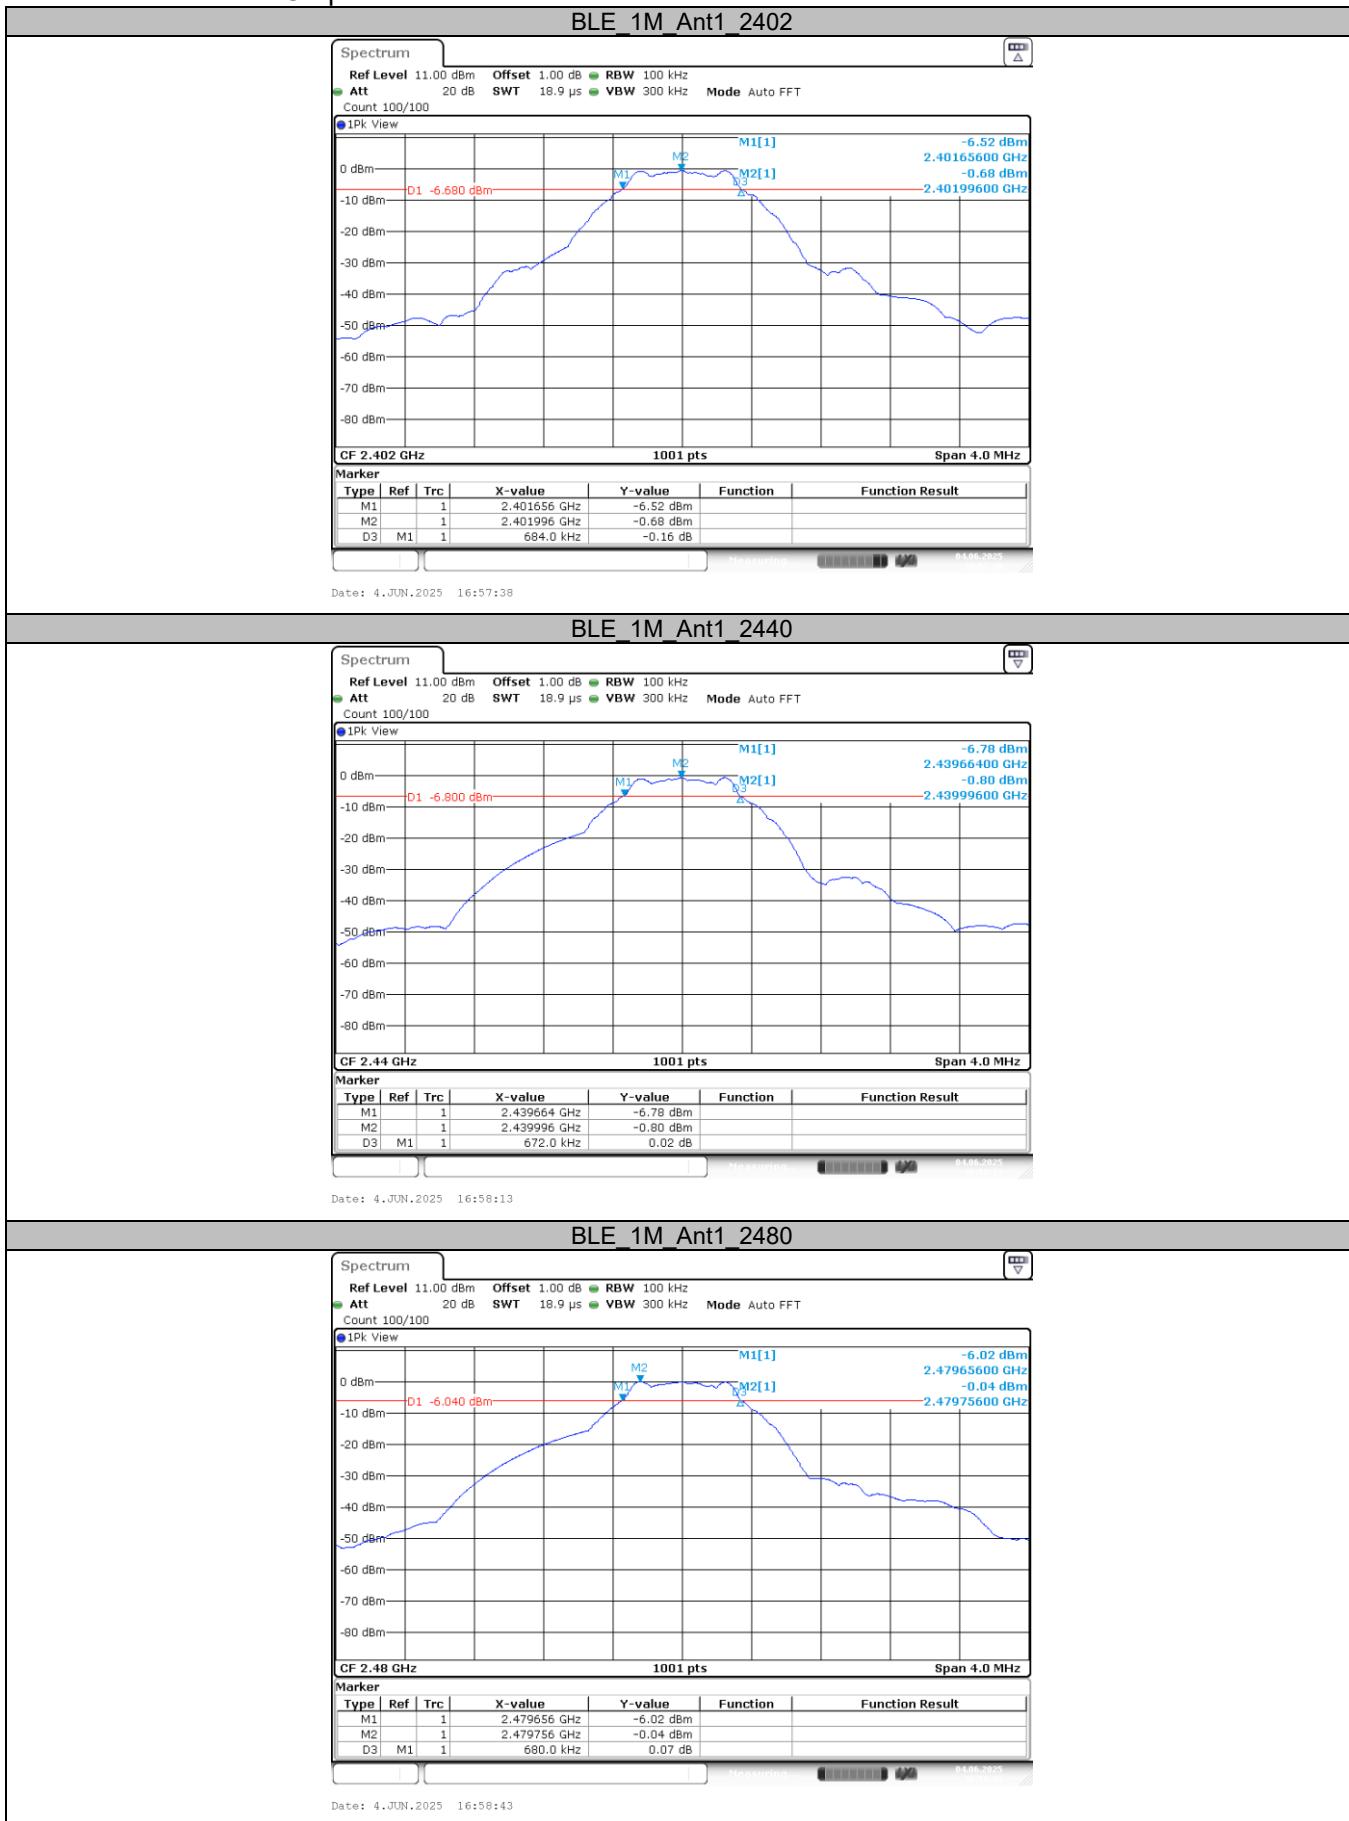

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)




## 3.6. Peak Output Power

### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3) / RSS-247 5.4 d

Section	Test Item	Limit	Frequency Range (MHz)
FCC CFR 47 Part15.247 (b)(3)	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5
ISED RSS-247 5.4 d	Maximum Conducted Output Power	1 Watt or 30dBm	2400~2483.5
	EIRP	4 Watt or 36dBm	2400~2483.5

### Test Configuration

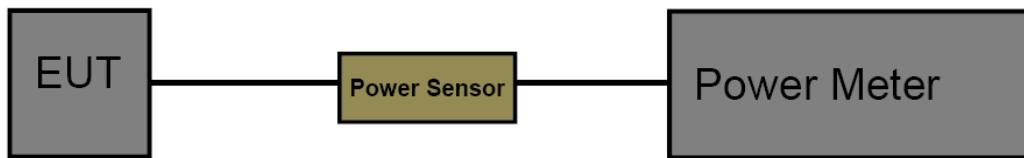

### Test Procedure

1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.  
Record the measurement data.

### Test Mode

Please refer to the clause 2.4.

### Test Result

Mode	Channel	Peak Output Power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm)	FCC Limit (dBm)	ISED Limt(dBm)	Result
BLE 1M	0	0.00	1.26	1.26	≤30	≤36	PASS
	19	0.12	1.26	1.38			PASS
	39	0.74	1.26	2.00			PASS




## 3.7. Power Spectral Density

### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e) / RSS-247 5.2 b

Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	8 dBm (in any 3 kHz)	2400~2483.5

### Test Configuration

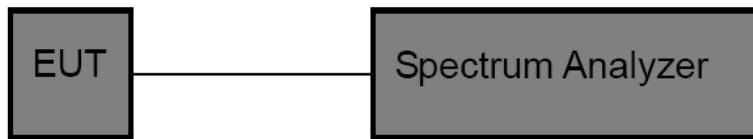

### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
Set analyzer center frequency to DTS channel center frequency.  
Set the span to 1.5 times the DTS bandwidth.  
Set the RBW to: 3 kHz.  
Set the VBW to: 10 kHz.  
Detector: peak.  
Sweep time: auto.

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

### Test Mode


Please refer to the clause 2.4.

### Test Result

Mode	Channel	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
BLE 1M	0	-14.67	≤8	PASS
	19	-14.93	≤8	PASS
	39	-14.05	≤8	PASS



Test plot as follows:

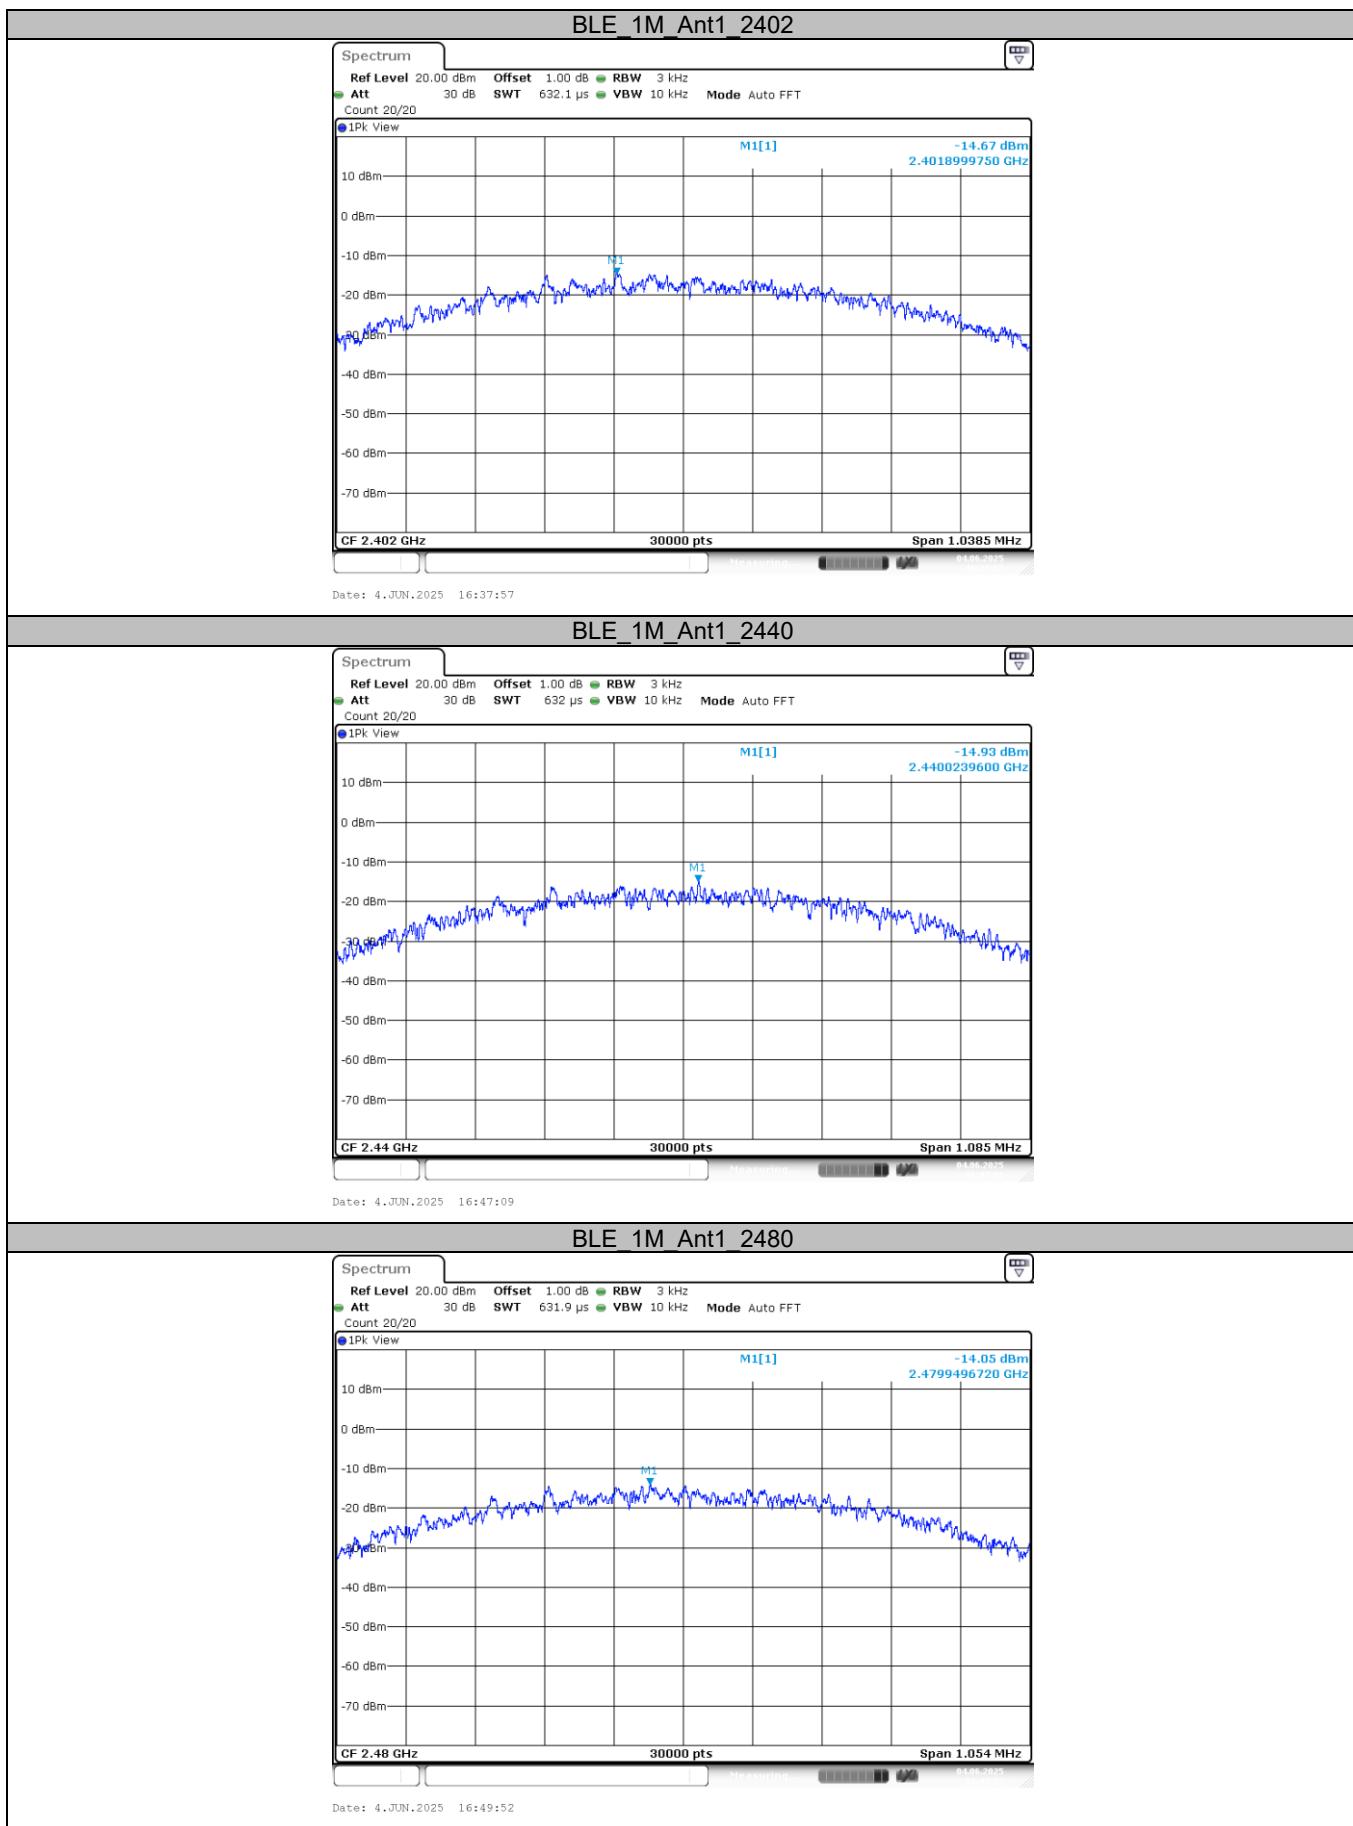

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)




## 3.8. Duty Cycle

### Limit

None, for report purposes only.

### Test Configuration

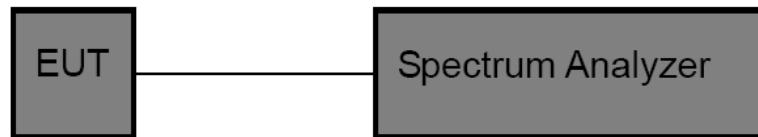

### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
Set analyzer center frequency to test channel center frequency.  
Set the span to 0Hz.  
Set the RBW to 10MHz.  
Set the VBW to 10MHz.  
Detector: Peak.  
Sweep time: Auto.  
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

### Test Mode

Please refer to the clause 2.4.

### Test Result



Test Mode	Frequency (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
BLE 1M	0	0.40	1.15	34.78	2.88	3
	19	0.40	1.15	34.78	2.88	3
	39	0.40	1.15	34.78	2.88	3

---

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhу Subdistrict, Longhua District, Shenzhen, Guangdong, China      Tel.: (86)755-27521059      Fax: (86)755-27521011      [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



Test plot as follows:



CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-058\_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [yz.cncaq.com](http://yz.cncaq.com)



## 3.9. Antenna Requirement

### Requirement

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Test Result

The directional gain of the antenna is less than 6dBi, please refer to the EUT internal photographs antenna photo.

### **RSS-Gen Issue 5 Section 6.8**

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power(e.i.r.p.) limits specified in the applicable standard (RSS) for licence-exempt apparatus.

### Result

PASS.

The EUT has 1 antenna: a FPC Antenna for BLE.

Note:  Antenna use a permanently attached antenna which is not replaceable.

Not using a standard antenna jack or electrical connector for antenna replacement.

The antenna has to be professionally installed (please provide method of installation).

Which in accordance to RSS-Gen 6.8, please refer to the internal photos.

\*\*\*\*\*THE END OF REPORT\*\*\*\*\*