

Prüfbericht-Nr.: <i>Test report no.:</i>	60394664 001	Auftrags-Nr.: <i>Order no.:</i>	238487035	Seite 1 von 28 Page 1 of 28
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	27-May-2020	
Auftraggeber: <i>Client:</i>	Voyetra Turtle Beach, Inc. 100 Summit Lake Drive, Suite 100, Valhalla, New York, 10595, United States			
Prüfgegenstand: <i>Test item:</i>	Wireless 7.1 Stereo Headset			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	Elo 7.1 Air TX			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (BLE)			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	28-May-2020			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A002835684-011 A002835684-016			
Prüfzeitraum: <i>Testing period:</i>	03-Jun-2020 – 13-Jul-2020			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
überprüft von: <i>reviewed by:</i>	genehmigt von <i>authorized by:</i>			
Datum: 16-Jul-2020 <i>Date:</i>	 Jack H.C. Chang	Datum: 16-Jul-2020 <i>Date:</i>	 Ryan W.T. Chen	
Stellung / Position:	Project Manager	Stellung / Position:	Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass
6.1	FCC KDB 447498 D01 v06	RF Exposure Compliance	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	14
4.6 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1 Antenna Requirement	15
5.1.2 Peak Output Power	16
5.1.3 6dB Bandwidth and 99% Occupied Bandwidth.....	18
5.1.4 Power Spectral Density.....	19
5.1.5 Conducted Spurious Emissions and Frequency Band Edges measured in 100kHz Bandwidth.....	20
5.1.6 Radiated Spurious Emissions and Band Edges	21
5.2 MAINS EMISSION	26
5.2.1 Mains Conducted Emission.....	26
6. SAFETY HUMAN EXPOSURE.....	28

6.1	RF EXPOSURE COMPLIANCE	28
6.1.1	SAR Test Exclusion Thresholds.....	28

APPENDIX A - TEST RESULT OF CONDUCTED

**APPENDIX B - TEST RESULT OF RADIATED SPURIOUS EMISSIONS & MAINS CONDUCTED
EMISSION**

APPENDIX C - PHOTO DOCUMENTATION_TEST SETUP PHOTO

APPENDIX D - PHOTO DOCUMENTATION_EUT PHOTO

Prüfbericht - Nr.: 60394664 001
*Test Report No.***Seite 5 von 28**
*Page 5 of 28***HISTORY OF THIS TEST REPORT**

Report No.	Description	Date Issued
60394664 001	Original Release	16-Jul-2020

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

(File Name: 60394664 001 Appendix A)

Appendix B - Test Result of Radiated Spurious Emissions & Mains Conducted Emission

(File Name: 60394664 001 Appendix B)

Appendix C - Photo Documentation_Test Setup Photo

(File Name: 60394664 001 Appendix C)

Appendix D - Photo Documentation_EUT Photo

(File Name: 60394664 001 Appendix D)

Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 447498 D01 General RF Exposure Guidance v06

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
(Conducted Test & Radiated Spurious Emissions)
FCC Registration No.: 226631
ISED Registration No.: 25563



2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Wireless 7.1 Stereo Headset. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Wireless 7.1 Stereo Headset
Type Identification	Elo 7.1 Air TX
FCC ID	XGB-TB15143

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel number	40
Data Rate	1Mbps, 2Mbps
Operation Voltage	5Vdc
Modulation	GFSK
Maximum Output Power (mW)	1.92
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	4/4
2440	0/4
2480	0/4

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	TestCommonUT.exe
---------------	------------------

The samples were used as follows:

A002835684-011 for conducted

A002835684-016 for radiated

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **X-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Above 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Below 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2480	1

Mains Conducted Emission

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2480	1

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22-26 °C	50-65 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	22-26 °C	50-65 %	Eagle Tsai
Radiated Spurious Emissions below 1 GHz	22-26 °C	50-65 %	Eagle Tsai
Mains Conducted Emission	22-26 °C	50-65 %	Simon Tsai

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT

N/A

Support Unit


Item No.	Description	Manufacturer	Model No.	S/N	Spec.
1	Notebook	Lenovo	TP00048A	SL10R25257	-
2	Adapter	Lenovo	ADLX45YDC3D	SA10R16864	-
A	Power Cable	-	-	-	Length: 175cm

4.5 Countermeasures to Achieve EMC Compliance


The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.6 Test Setup Diagram

<Radiated Spurious Emissions Tx mode >

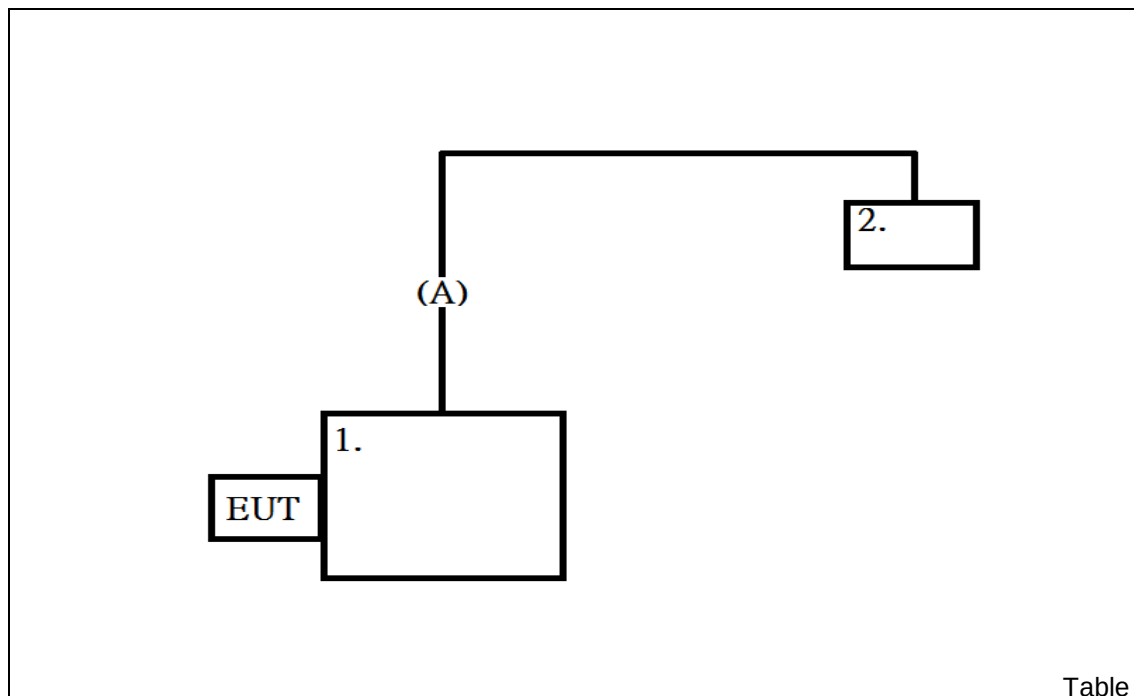

<Mains Conducted Emission mode >



5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only


According to the manufacturer declaration, the EUT has an antenna with a directional gain of 1.4 dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Power Meter	Anritsu	ML2495A	1901008	2020/4/6	2021/4/5
Power Sensor	Anritsu	MA2411B	1725269	2020/4/7	2021/4/6

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	2.83	1.92	30
Middle Channel	2440	-0.66	1.90	30
High Channel	2480	-0.75	0.84	30

<2Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	2.82	1.91	30
Middle Channel	2440	2.79	1.90	30
High Channel	2480	2.74	1.88	30

Average Power
<1Mbps>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	2.79	1.90
Middle Channel	2440	-0.76	1.88
High Channel	2480	-0.83	0.83

<2Mbps>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	2.79	1.90
Middle Channel	2440	2.75	1.88
High Channel	2480	2.71	1.87

5.1.3 6dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.

5.1.5 Conducted Spurious Emissions and Frequency Band Edges measured in 100kHz Bandwidth


Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site

Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV40	101512	2020/2/18	2021/2/16

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber


Test Setup

<Radiated Emissions below 30 MHz>

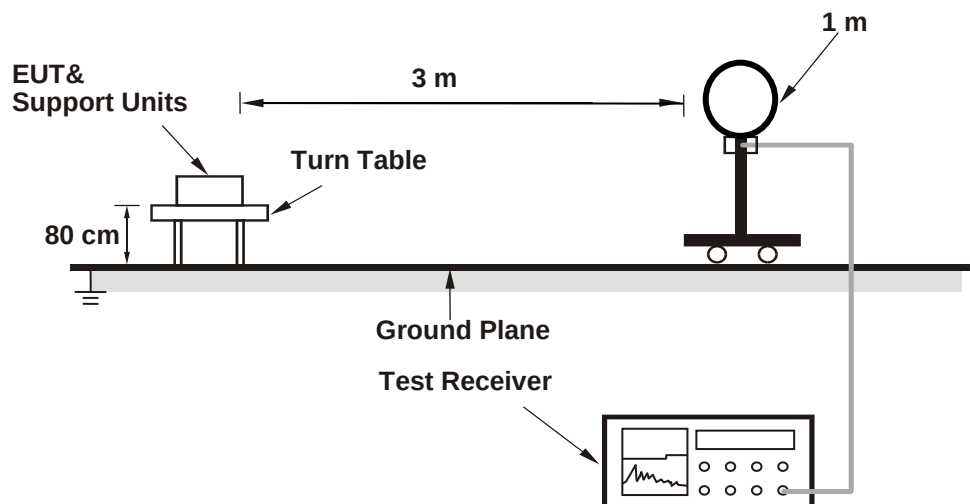

<Radiated Emissions 30 MHz to 1 GHz>

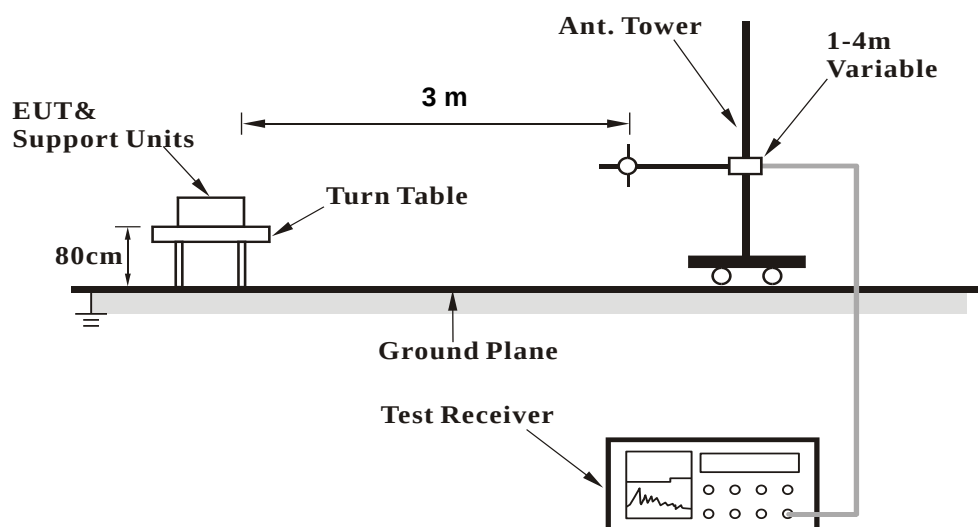
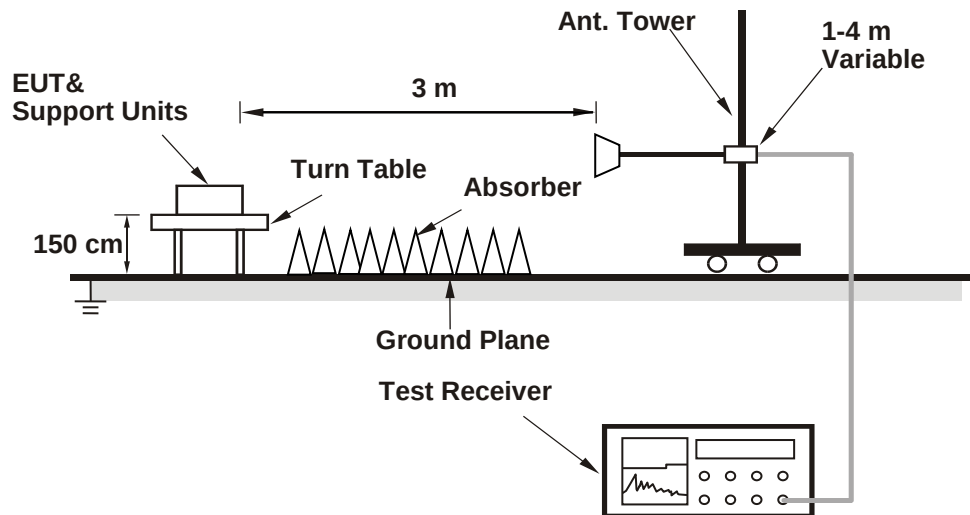
<Radiated Emissions above 1 GHz>


For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101508	2020/3/16	2021/3/15
Receiver	R&S	ESR7	102108	2020/3/16	2021/3/15
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2020/2/14	2021/2/12
Horn Antenna	ETS-Lindgren	3117	00218930	2019/12/6	2020/12/4
LF-AMP	Agilent	8447D	2944A10772	2020/2/11	2021/2/9
HF-AMP + AC source	EMCI	EMC051845SE	980633	2020/2/17	2021/2/15
HF-AMP + AC source	EMCI	EMC184045SE	980657	2020/2/17	2021/2/15
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2020/4/10	2021/4/9
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2020/3/25	2021/3/24
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2020/4/22	2021/4/21
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2020/4/22	2021/4/21

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: 60394664 001
Test Report No.

Seite 25 von 28
Page 25 of 28

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

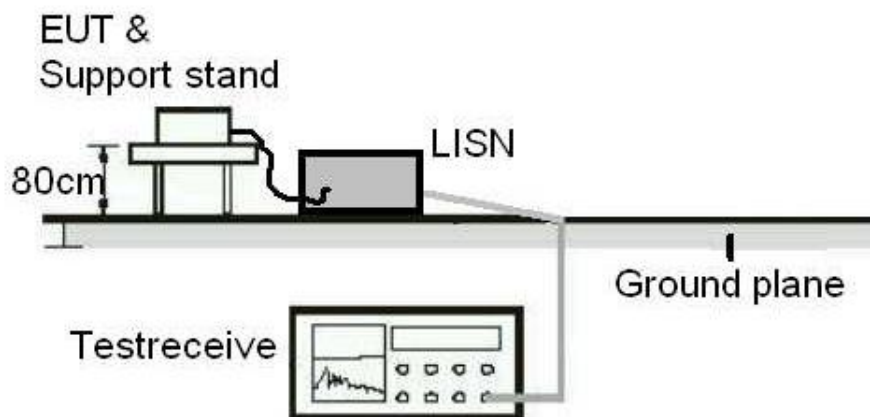

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	SCHHWARZBECK	NSLK 8127	8127-00976	2019/10/2	2020/9/30
EMI Test Receiver	R&S	ESR7	102108	2020/4/22	2021/4/21
10dB attenuation	SCHHWARZBECK	VTSD 9561 F-N	660	2020/2/24	2021/2/23
Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A	N/A

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.

6. Safety Human Exposure

6.1 RF Exposure Compliance

6.1.1 SAR Test Exclusion Thresholds

Results

Since the maximum output power of the transmitter is $1.92 \text{ mW} < 10 \text{ mW}$ (Distance: 5 mm), hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498 D01: Mobile Portable RF Exposure.


Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	737.26	> 500	Pass
Middle Channel	2440	725.27	> 500	Pass
High Channel	2480	728.27	> 500	Pass


Low Channel

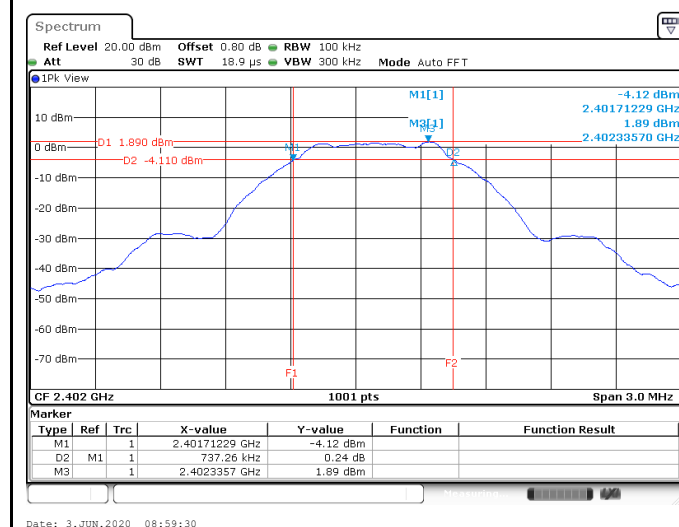

Middle Channel

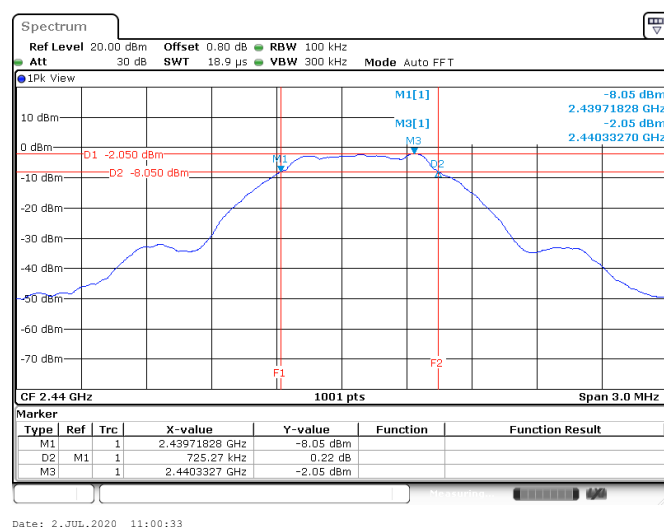


High Channel

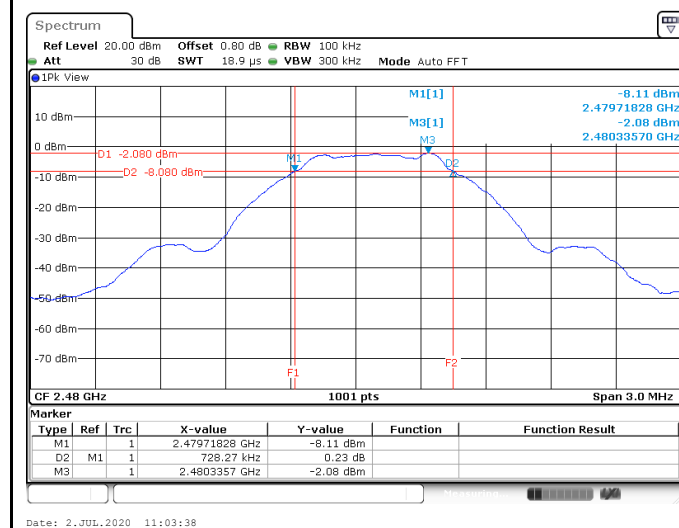

BLE_2M


Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	1388.61	> 500	Pass
Middle Channel	2440	1393.61	> 500	Pass
High Channel	2480	1393.61	> 500	Pass

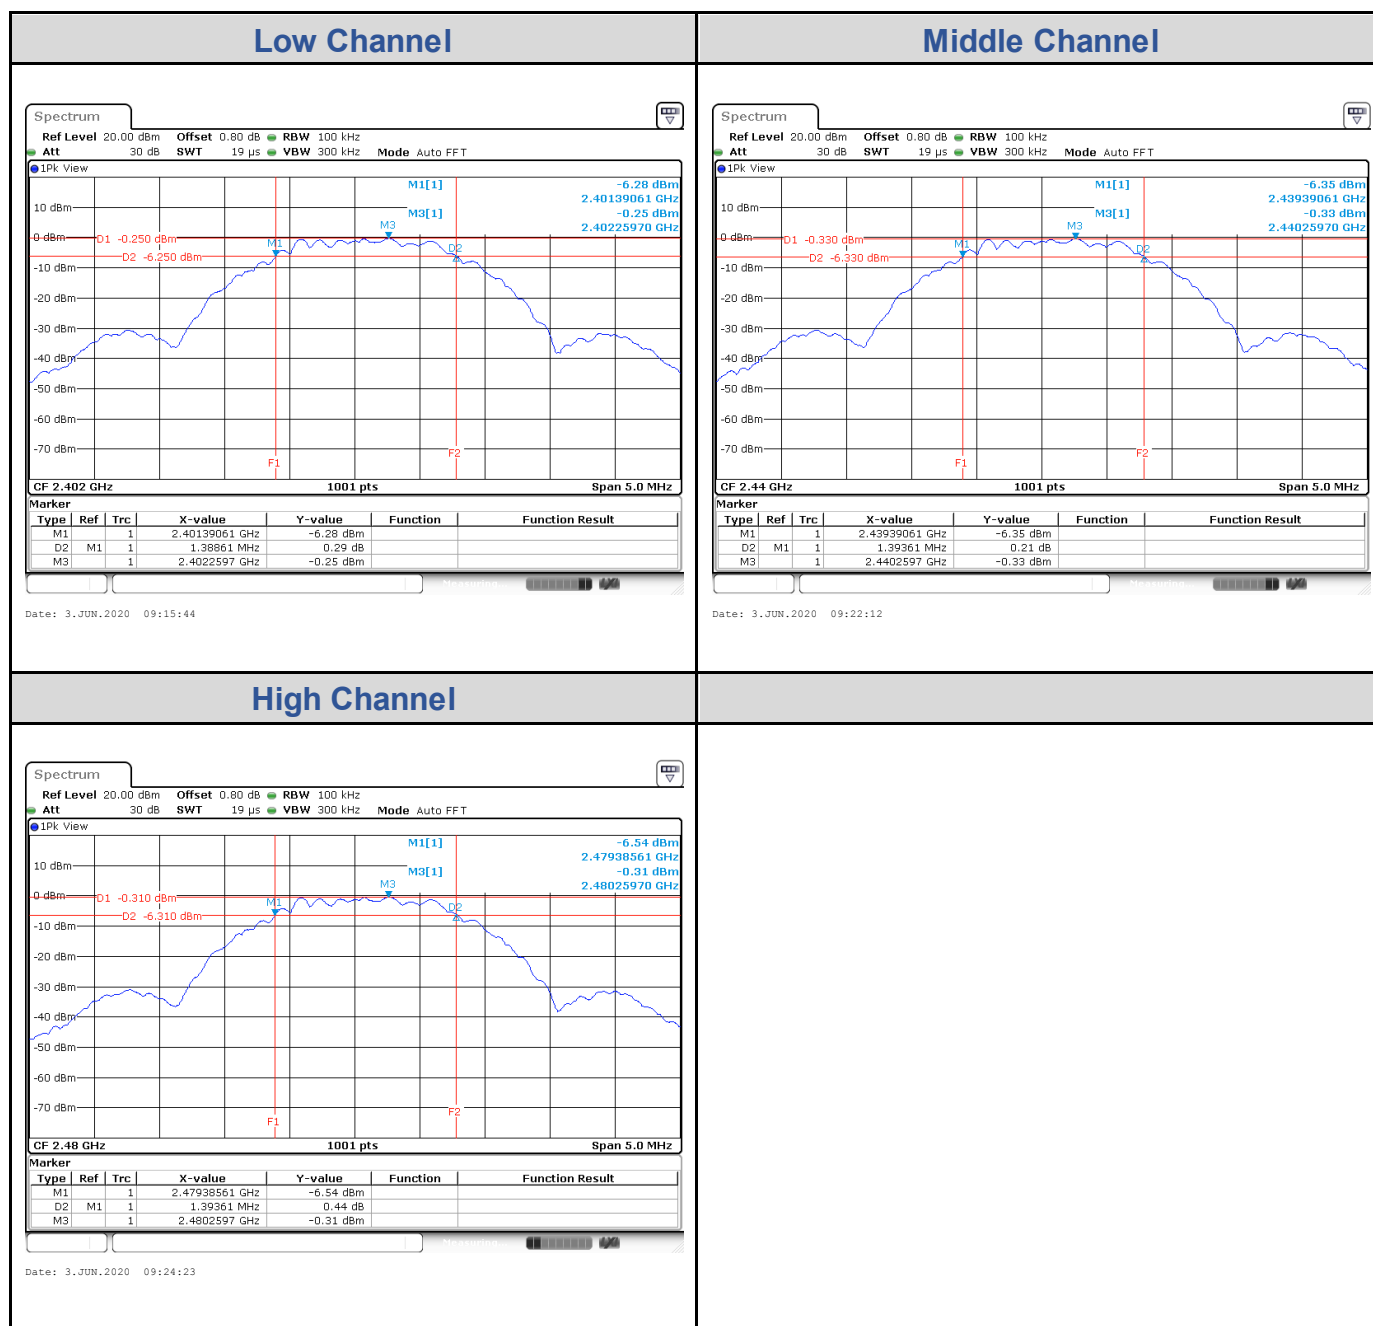

Test Result of 99% Occupied Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.037
Middle Channel	2440	1.031
High Channel	2480	1.033

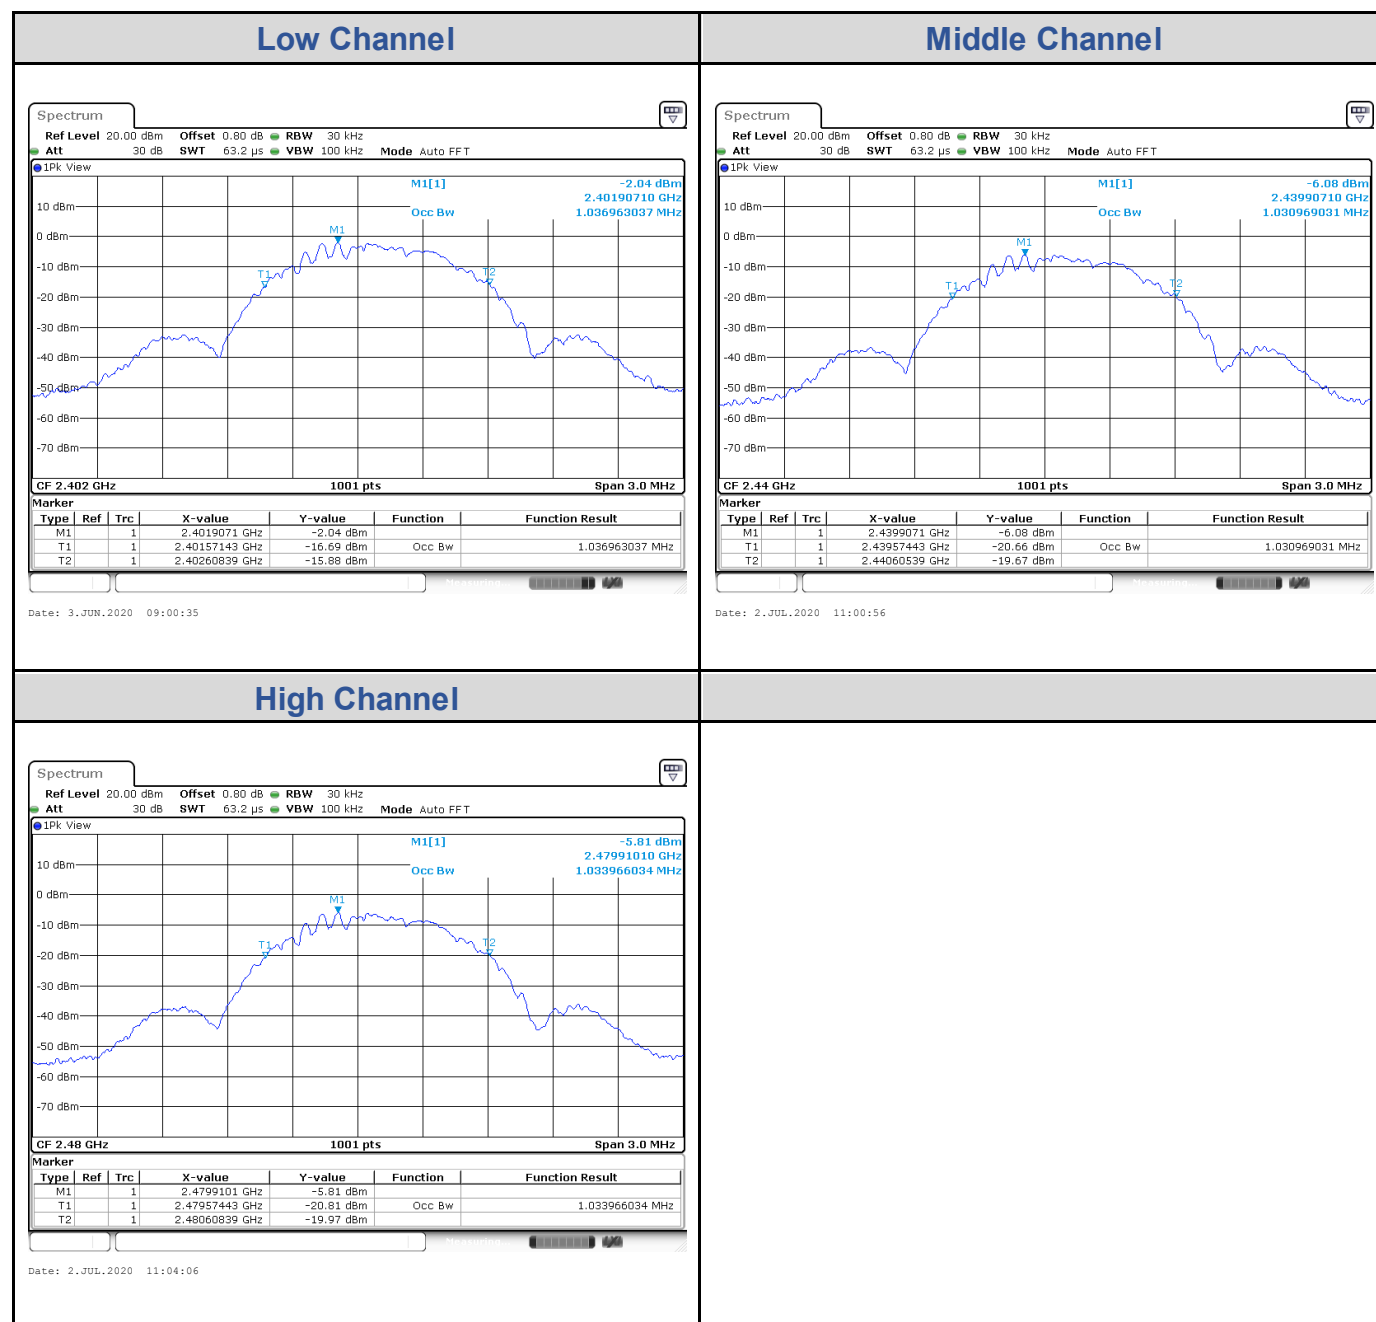

BLE_2M


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	2.043
Middle Channel	2440	2.048
High Channel	2480	2.048

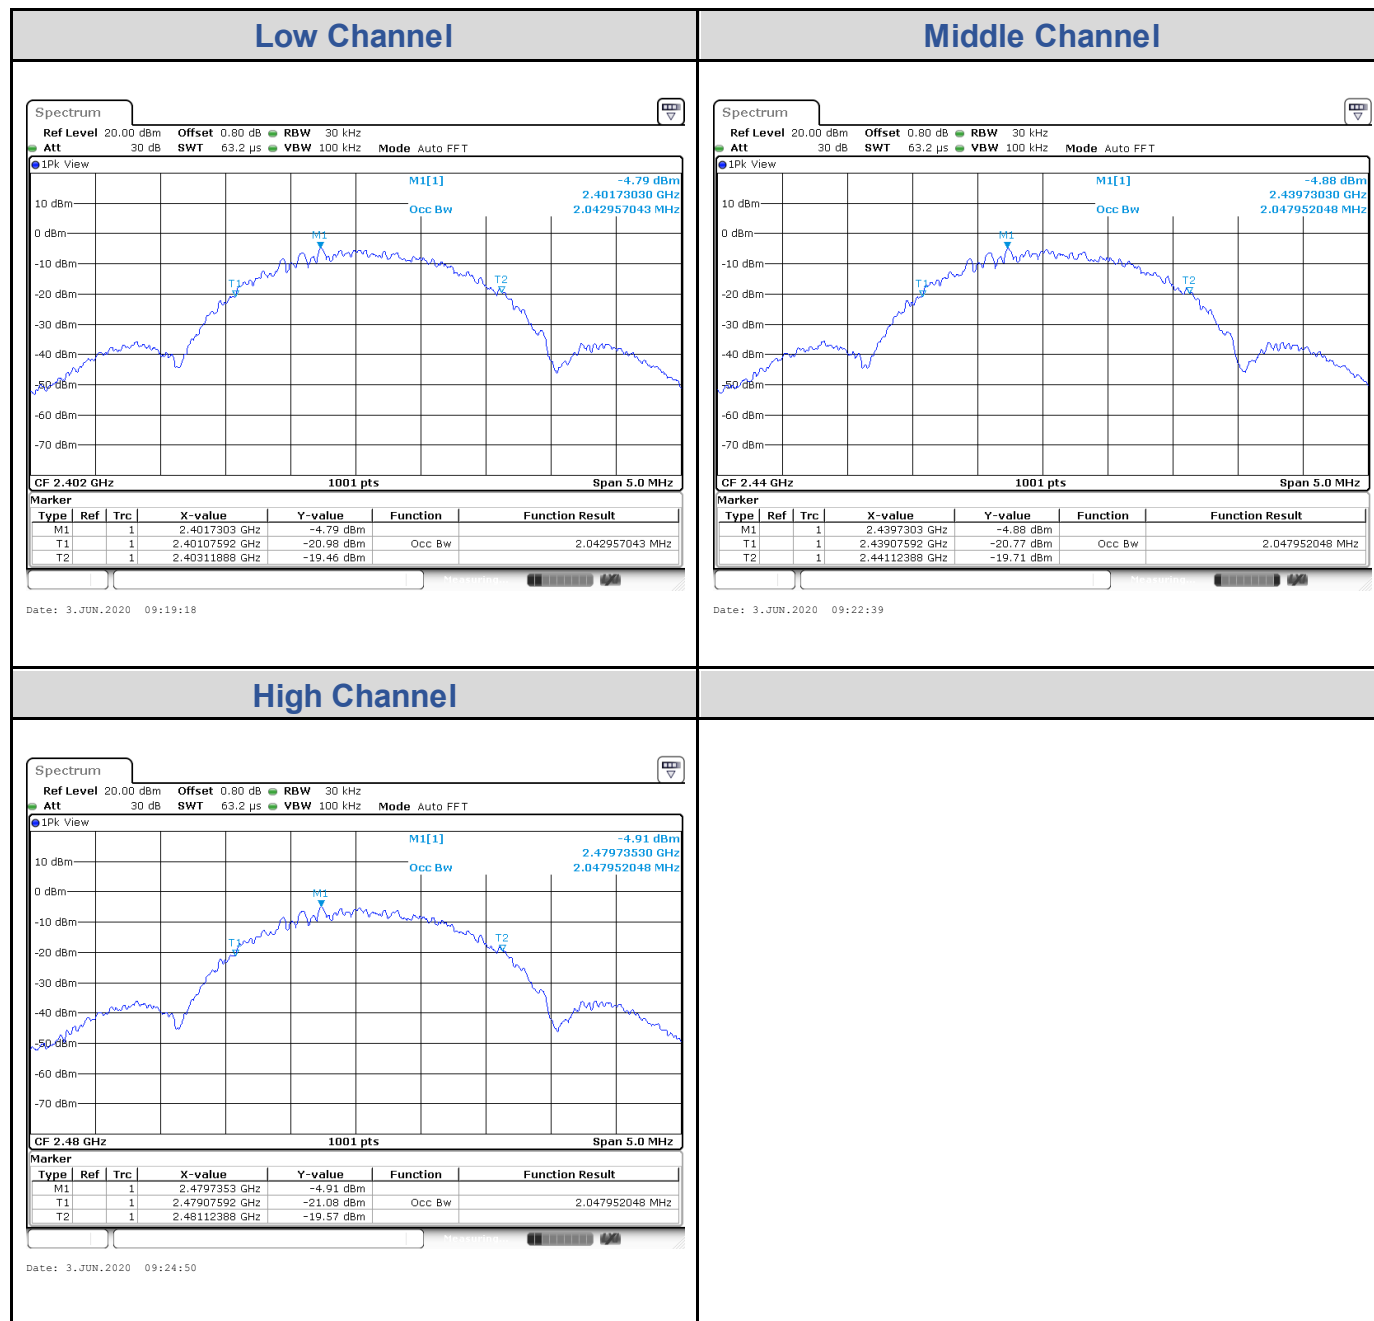Low Channel
Middle Channel


Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-13.64	8	Pass
Middle Channel	2440	-17.40	8	Pass
High Channel	2480	-17.19	8	Pass

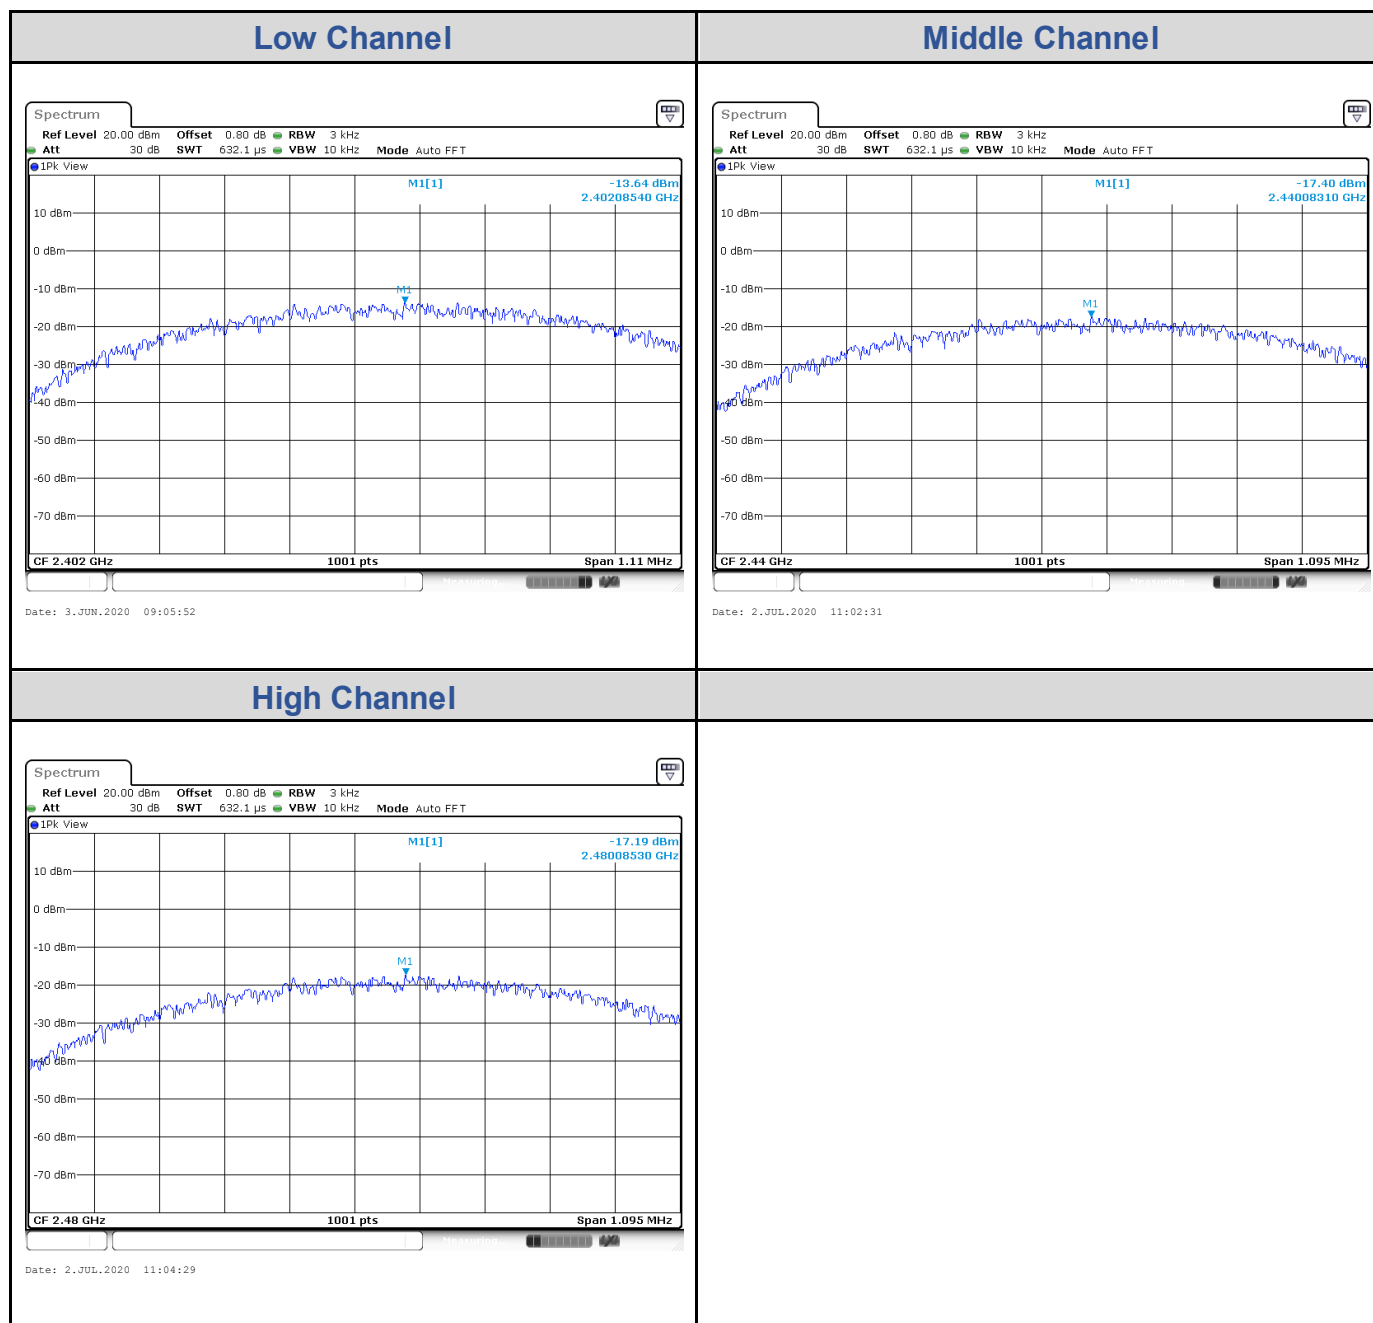


BLE_2M




Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-18.39	8	Pass
Middle Channel	2440	-18.52	8	Pass
High Channel	2480	-18.38	8	Pass

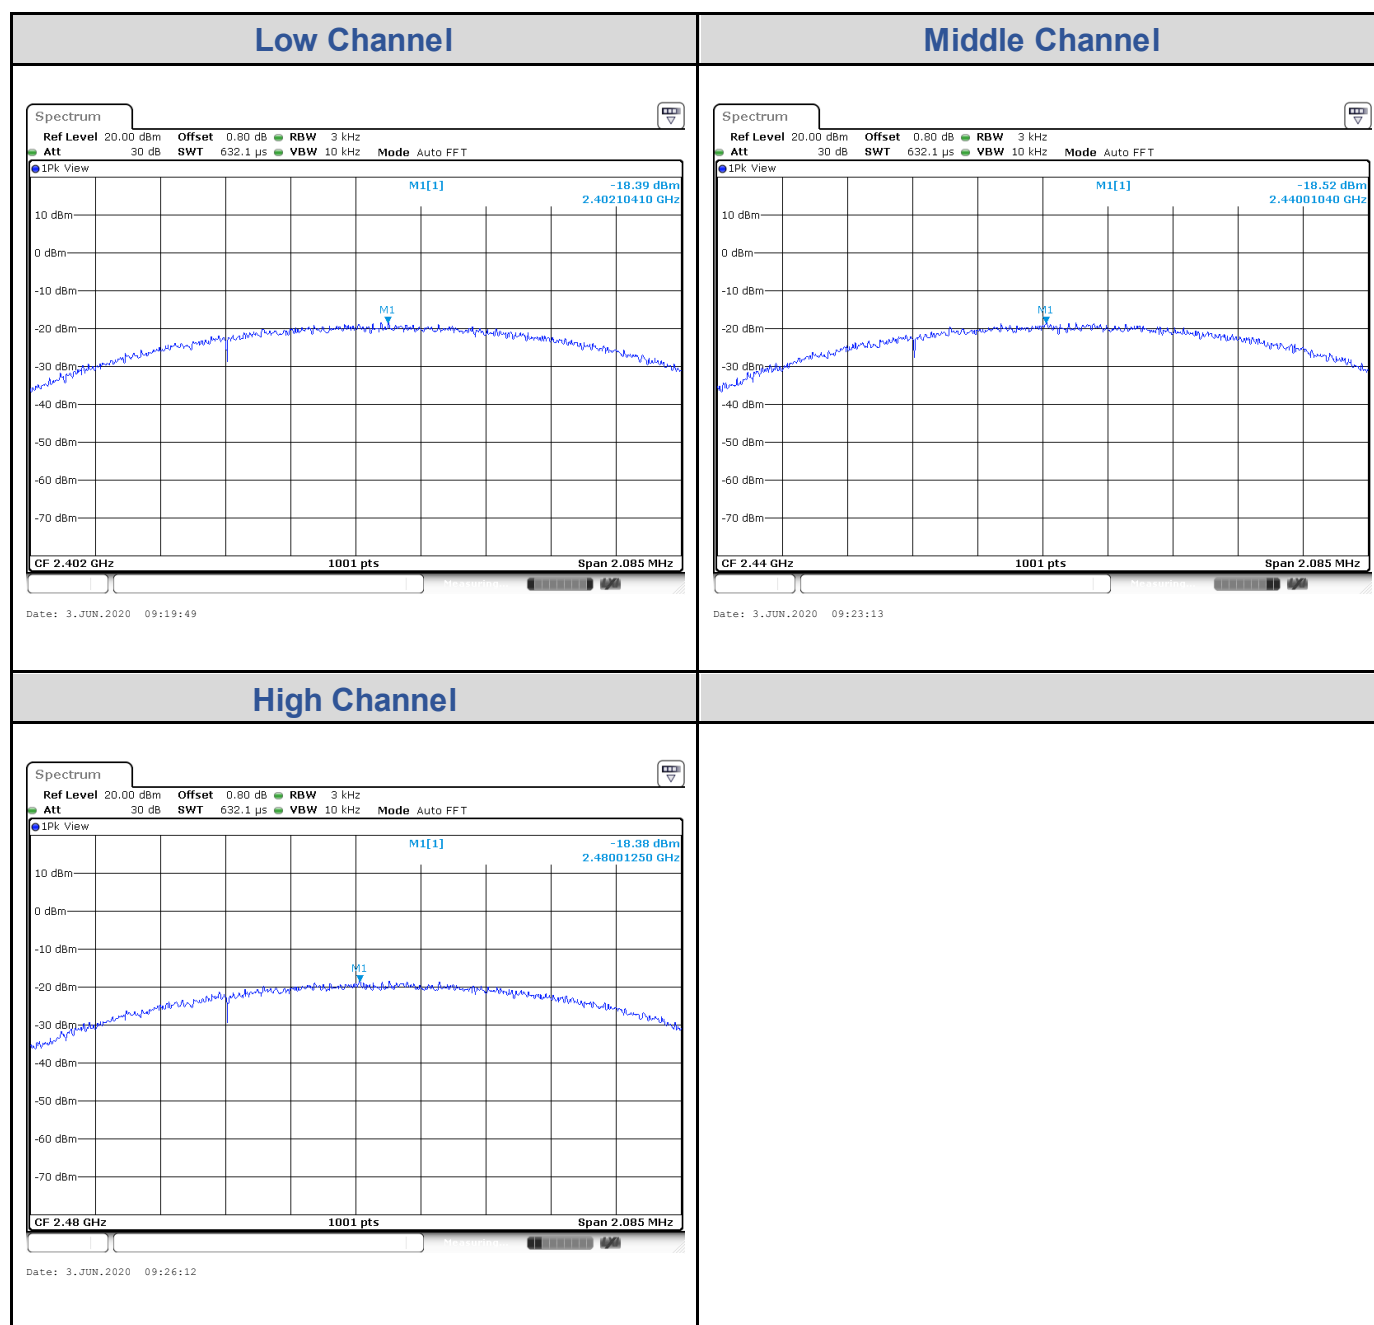

Test Result of Conducted Spurious Emissions, Tx Mode


BLE_1M

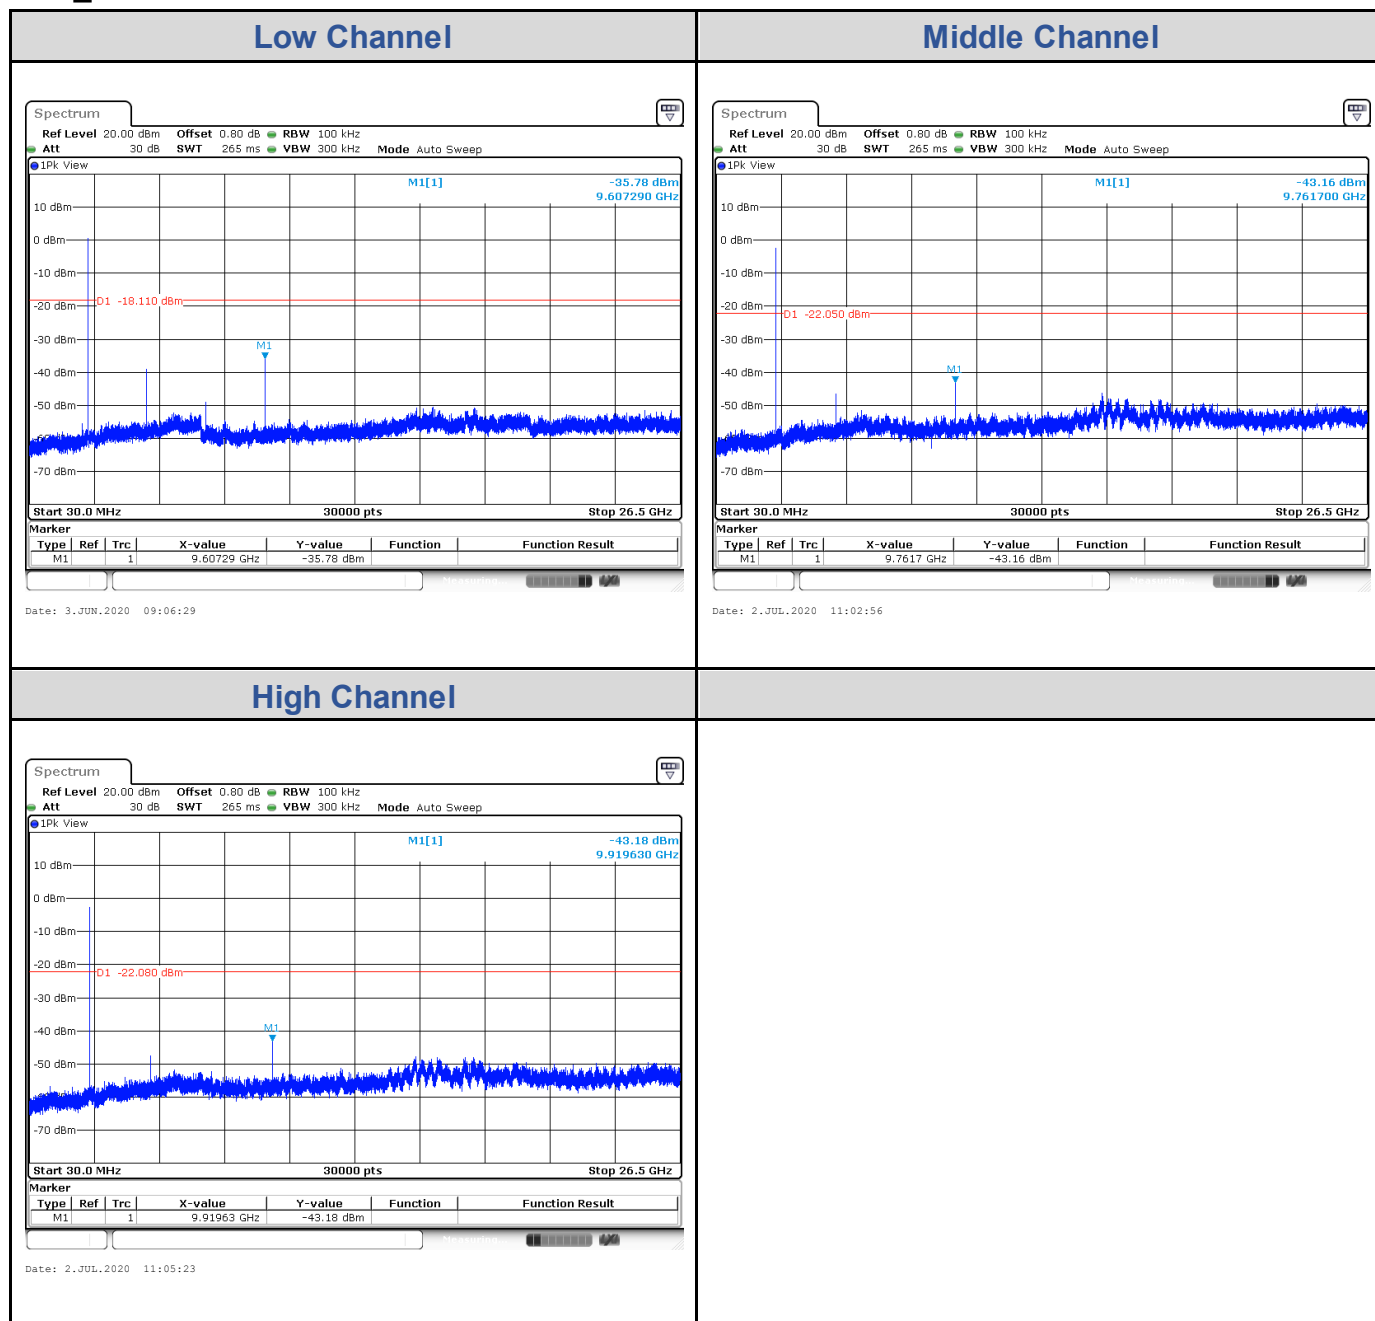

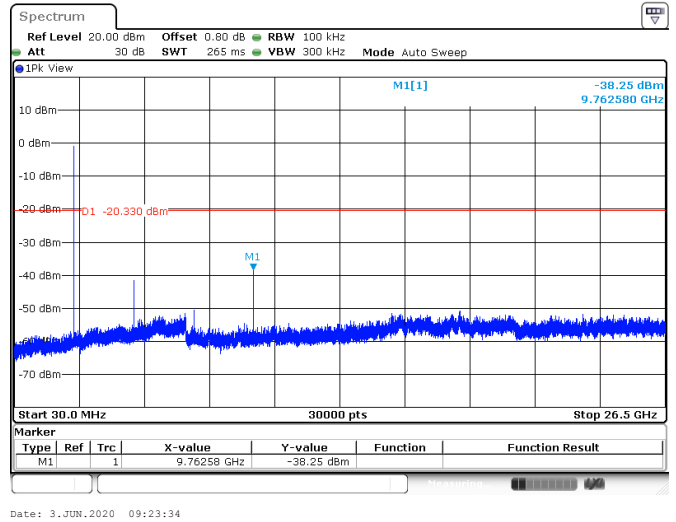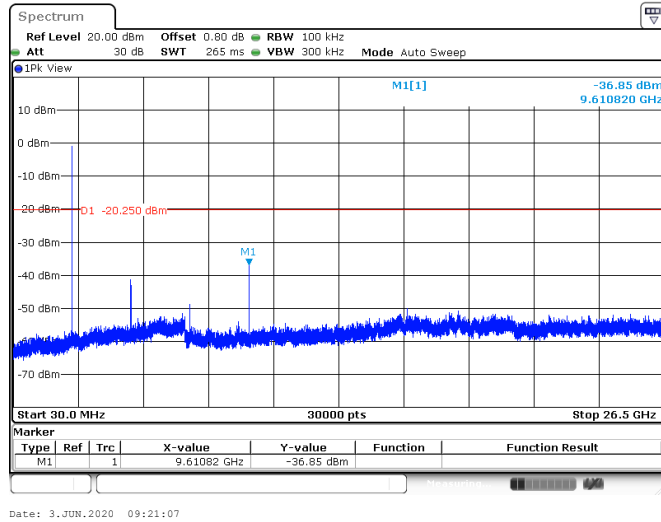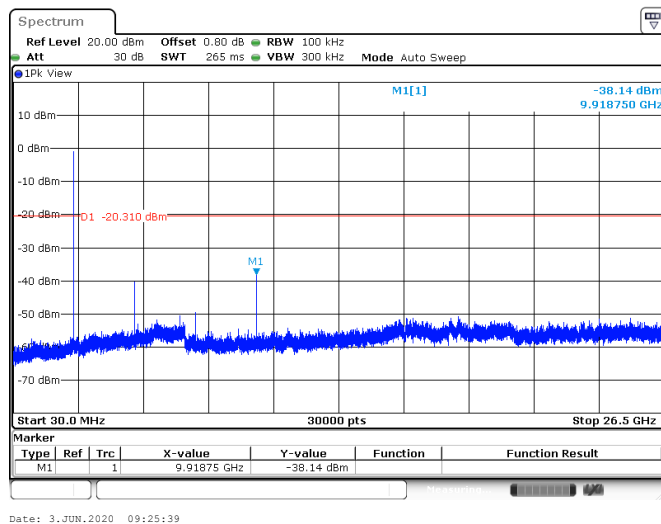
BLE_2M
Low Channel
Middle Channel

High Channel


Test Result of Conducted Band Edge, Tx Mode

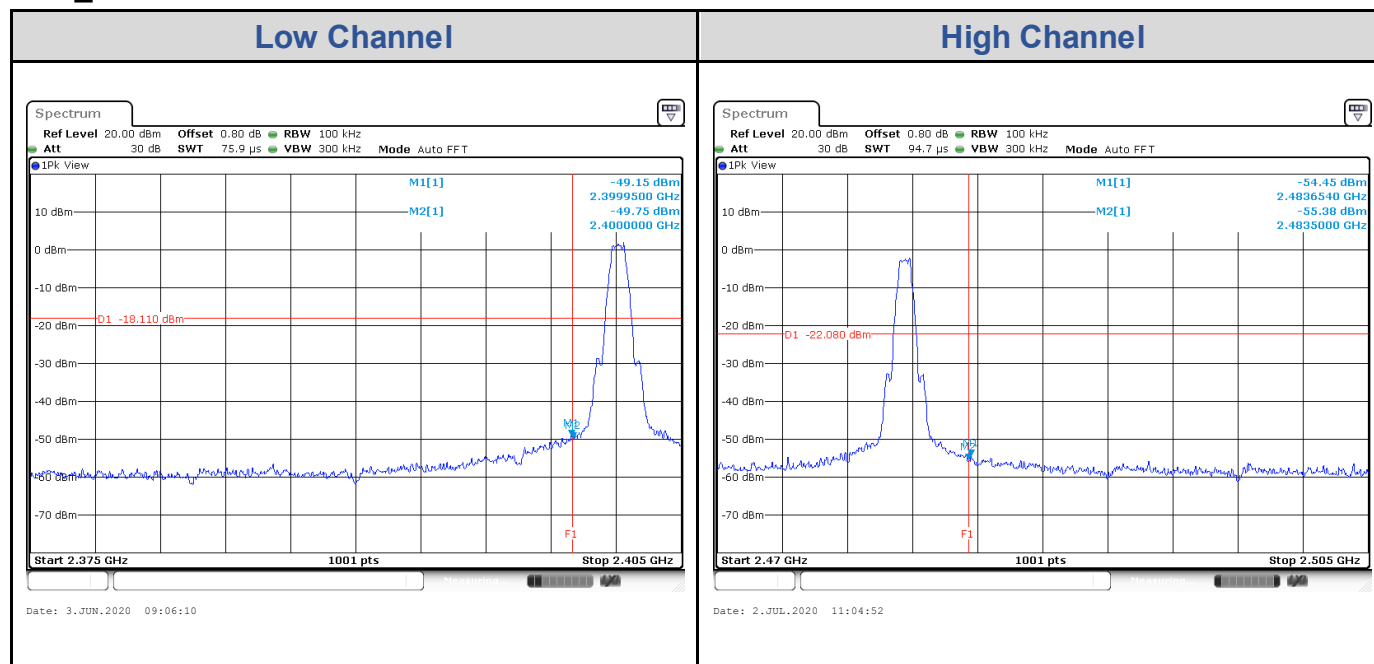BLE_1M

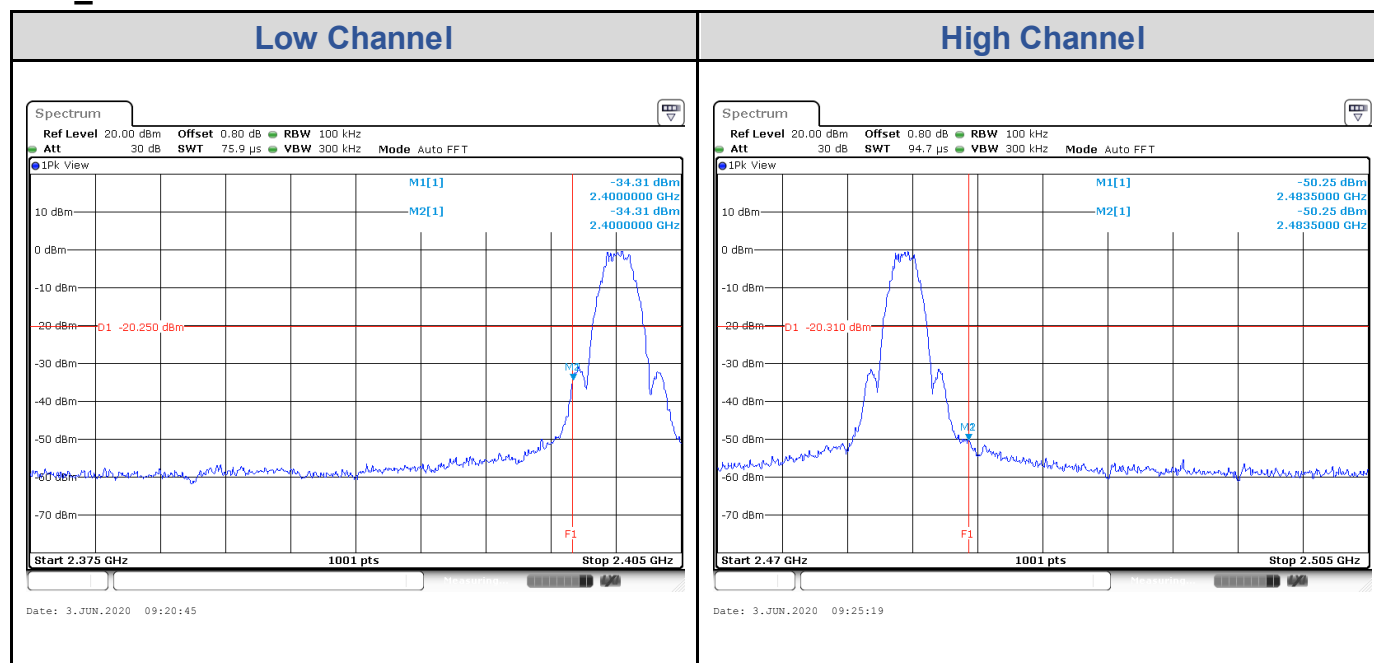

BLE_2M



Appendix B: Test Results of Radiated Spurious Emissions & Mains

Conducted Emission Test


Band Edges, 2.31GHz ~ 2.9GHz

BLE_1M

Low Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

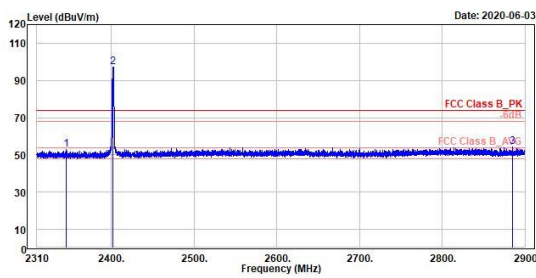


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2345.11	52.99	15.73	37.17	74.00	-21.10	312	342	Peak	Horizontal		
2 *	2402.00	97.03	59.68	37.15	74.00	23.03	312	342	Peak	Horizontal		
3	2885.25	54.39	16.33	38.06	74.00	-19.61	312	342	Peak	Horizontal		

Low Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
 No. 438-18, Sec 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

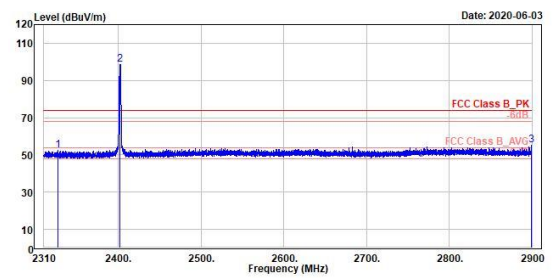


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2326.93	52.64	15.49	37.15	74.00	-21.36	282	103	Peak	Vertical		
2 *	2402.00	98.58	61.43	37.15	74.00	24.58	282	103	Peak	Vertical		
3	2899.65	55.02	16.97	38.05	74.00	-18.98	282	103	Peak	Vertical		

BLE_1M

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

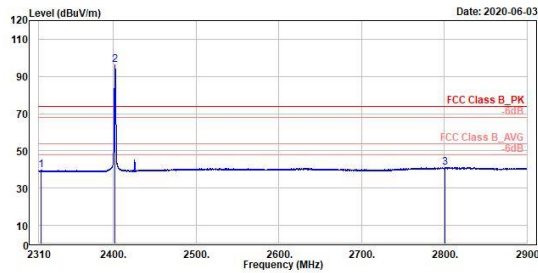


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2312.54	39.73	2.60	37.13	54.00	-14.27	312	342	Average	Horizontal		
2 *	2402.00	96.09	58.94	37.15	54.00	42.09	312	342	Average	Horizontal		
3	2800.88	41.25	3.12	38.13	54.00	-12.75	312	342	Average	Horizontal		

Low Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

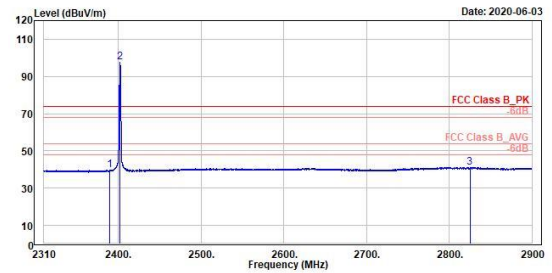


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2389.83	39.59	2.45	37.14	54.00	-14.41	282	103	Average	Vertical		
2 *	2402.00	97.63	60.48	37.15	54.00	43.63	282	103	Average	Vertical		
3	2825.13	41.17	3.06	38.11	54.00	-12.83	282	103	Average	Vertical		

BLE_1M

High Channel (Horizontal) Peak

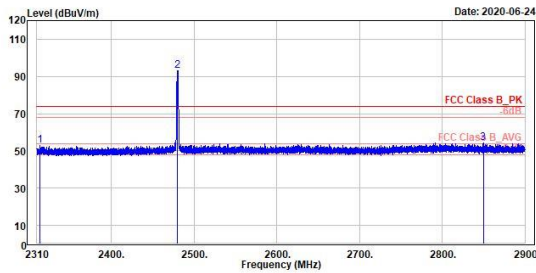

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2313.67	52.77	15.64	37.13	74.00	-21.23	118	200	Peak	Horizontal		
2 *	2480.00	93.00	55.44	37.56	74.00	19.00	118	200	Peak	Horizontal		
3	2849.75	54.44	16.35	38.09	74.00	-19.56	118	200	Peak	Horizontal		

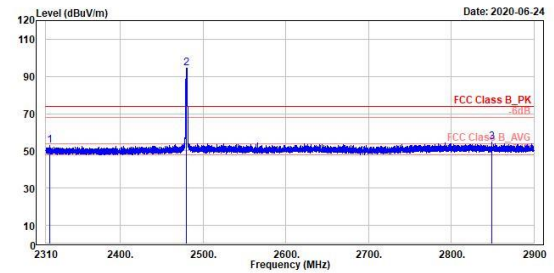


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2314.82	52.83	15.70	37.13	74.00	-21.17	324	108	Peak	Vertical		
2 *	2480.00	94.29	56.73	37.56	74.00	20.29	324	108	Peak	Vertical		
3	2849.90	54.87	16.78	38.09	74.00	-19.13	324	108	Peak	Vertical		

BLE_1M

High Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

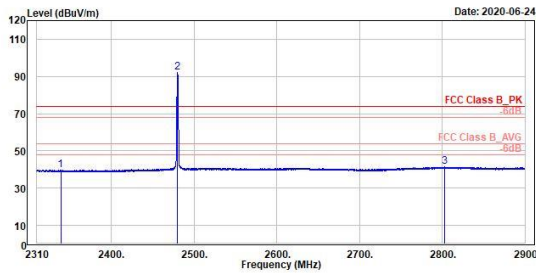


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2338.75	39.78	2.62	37.16	54.00	-14.22	118	200	Average	Horizontal		
2 *	2480.00	92.02	54.46	37.56	54.00	38.02	118	200	Average	Horizontal		
3	2893.11	41.38	3.26	38.12	54.00	-12.62	118	200	Average	Horizontal		

High Channel (Vertical) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

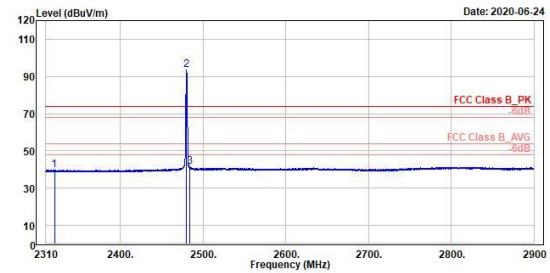


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2320.29	39.77	2.63	37.14	54.00	-14.23	324	108	Average	Vertical		
2 *	2480.00	93.35	55.79	37.56	54.00	39.35	324	108	Average	Vertical		
3	2483.76	41.43	3.85	37.58	54.00	-12.57	324	108	Average	Vertical		

BLE_2M

Low Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

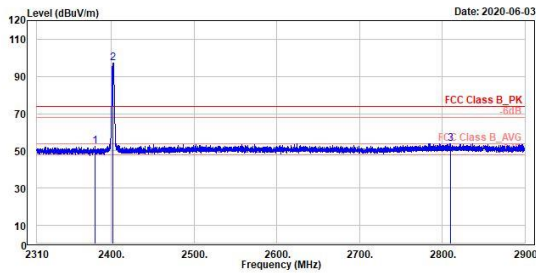

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2380.74	52.42	15.27	37.15	74.00	-21.58	312	343	Peak	Horizontal		
2 *	2402.00	97.12	59.97	37.15	74.00	23.12	312	343	Peak	Horizontal		
3	2810.14	54.01	15.89	38.12	74.00	-19.99	312	343	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

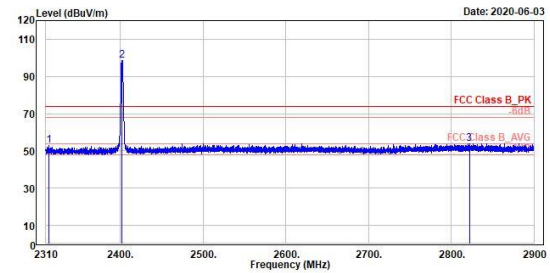


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2314.07	52.80	15.67	37.13	74.00	-21.20	281	103	Peak	Vertical		
2 *	2402.00	98.69	61.54	37.15	74.00	24.69	281	103	Peak	Vertical		
3	2822.06	53.94	15.83	38.11	74.00	-20.06	281	103	Peak	Vertical		

BLE_2M

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

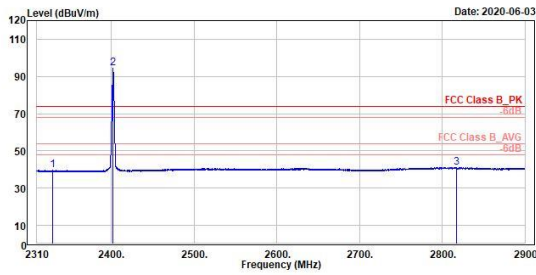


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2328.64	39.56	2.41	37.15	54.00	-14.44	312	343	Average	Horizontal		
2 *	2402.00	94.41	57.26	37.15	54.00	40.41	312	343	Average	Horizontal		
3	2817.16	41.11	2.99	38.12	54.00	-12.89	312	343	Average	Horizontal		

Low Channel (Vertical) Average





TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

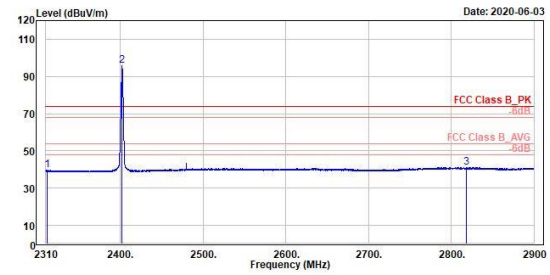


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2311.12	39.61	2.48	37.13	54.00	-14.39	281	103	Average	Vertical		
2 *	2402.00	95.96	58.81	37.15	54.00	41.96	281	103	Average	Vertical		
3	2818.23	41.08	2.97	38.11	54.00	-12.92	281	103	Average	Vertical		

BLE_2M
High Channel (Horizontal) Peak

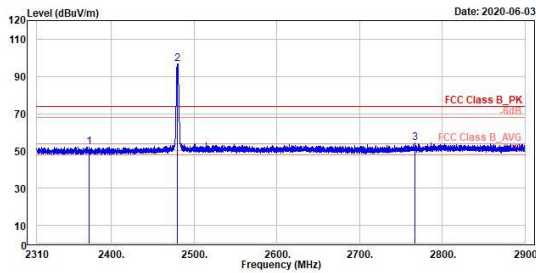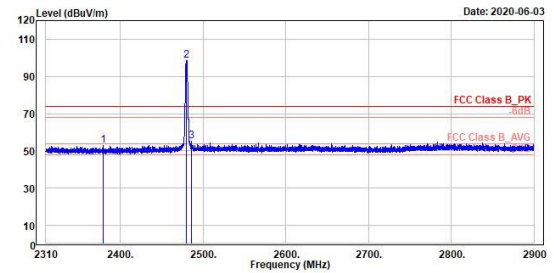
 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


BLE_2M

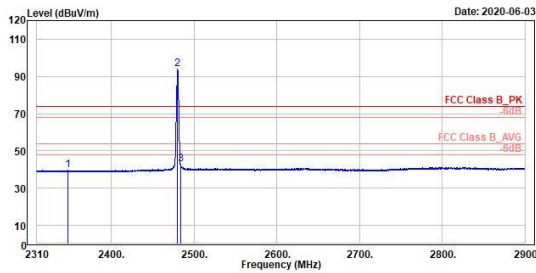High Channel (Horizontal) Average

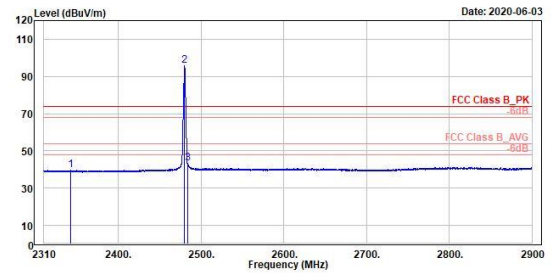

High Channel (Vertical) Average



Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE_2M

High Channel 9kHz~150kHz

High Channel 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

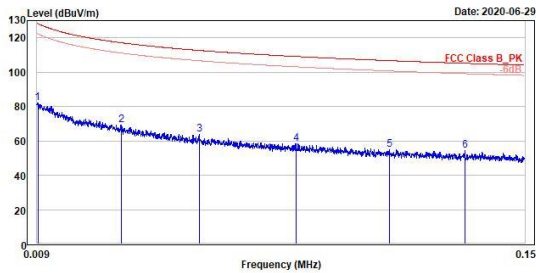

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.01	82.28	2.62	79.66	128.26	-45.98	100	120 QP	vertical	
2	0.03	69.37	-0.27	69.64	117.18	-47.73	100	153 QP	vertical	
3	0.06	63.59	-0.63	64.22	112.65	-49.06	100	38 QP	vertical	
4	0.08	58.48	-2.46	60.94	109.13	-50.65	100	234 QP	vertical	
5	0.11	55.01	-3.61	58.62	106.70	-51.69	100	120 QP	vertical	
6	0.13	54.29	-3.07	57.36	105.14	-50.85	100	176 QP	vertical	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

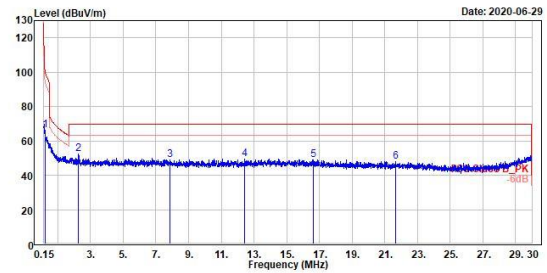

	Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.23	66.22	13.78	52.44	100.23	-34.01	100	114 QP	vertical	
2	2.28	52.29	13.73	38.56	69.50	-17.21	100	148 QP	vertical	
3	7.88	48.96	10.85	38.11	69.50	-20.54	100	310 QP	vertical	
4	12.42	49.23	11.88	37.35	69.50	-20.27	100	193 QP	vertical	
5	16.64	49.01	11.74	37.27	69.50	-20.49	100	2 QP	vertical	
6	21.05	47.98	12.04	35.94	69.50	-21.52	100	148 QP	vertical	


Spurious Emissions, Tx Mode, 30MHz ~ 1GHz

BLE_2M

High Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

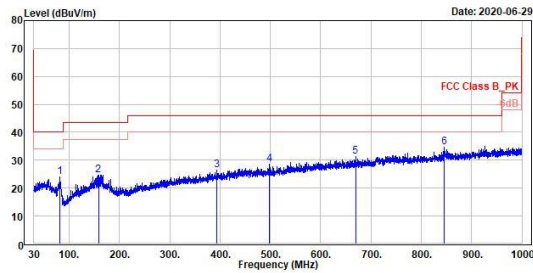

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	80.83	23.95	34.94	-10.99	40.00	-16.05	400	88	QP	horizontal		
2	158.23	24.78	30.84	-6.06	43.50	-18.72	200	204	QP	horizontal		
3	394.33	26.48	29.72	-3.24	46.00	-19.52	300	361	QP	horizontal		
4	498.12	28.60	30.49	-1.89	46.00	-17.40	200	192	QP	horizontal		
5	669.42	31.28	30.37	0.91	46.00	-14.72	300	359	QP	horizontal		
6	845.58	34.78	31.35	3.43	46.00	-11.22	400	249	QP	horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

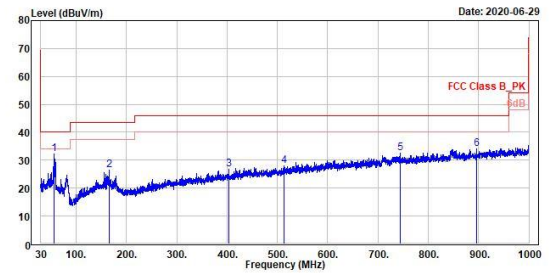

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	56.58	32.33	30.70	-6.37	40.00	-7.67	100	175	QP	vertical		
2	165.22	26.56	32.46	-5.90	43.50	-16.94	100	102	QP	vertical		
3	404.03	26.74	29.83	-3.09	46.00	-19.26	200	204	QP	vertical		
4	513.25	27.98	29.61	-1.63	46.00	-18.02	200	129	QP	vertical		
5	744.11	32.58	30.30	2.28	46.00	-13.42	400	248	QP	vertical		
6	895.63	34.17	30.18	3.99	46.00	-11.83	200	250	QP	vertical		


Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

BLE_1M

Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

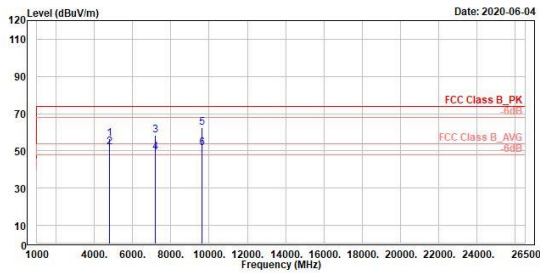


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1 4894.00	56.41	65.85	-9.44	74.00	-17.59	100	257	Peak	horizontal		
2 4894.00	51.80	61.24	-9.44	54.00	-2.20	100	257	Average	horizontal		
3 7206.00	58.28	65.10	-6.82	74.00	-15.72	104	247	Peak	horizontal		
4 7206.00	49.25	56.07	-6.82	54.00	-4.75	104	247	Average	horizontal		
5 9608.00	62.48	66.72	-4.24	74.00	-11.52	100	218	Peak	horizontal		
6 9608.00	51.41	55.65	-4.24	54.00	-2.59	100	218	Average	horizontal		

Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

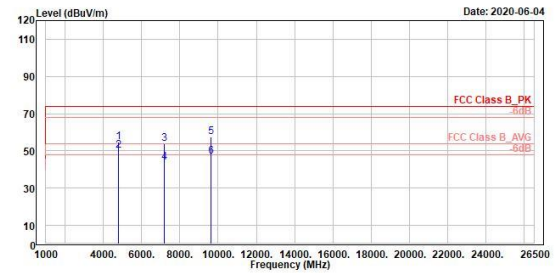


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1 4894.00	54.95	64.39	-9.44	74.00	-19.05	257	166	Peak	vertical		
2 4894.00	50.25	59.69	-9.44	54.00	-3.75	257	166	Average	vertical		
3 7206.00	53.75	60.57	-6.82	74.00	-20.25	100	68	Peak	vertical		
4 7206.00	43.97	50.79	-6.82	54.00	-10.03	100	68	Average	vertical		
5 9608.00	57.67	61.91	-4.24	74.00	-16.33	100	152	Peak	vertical		
6 9608.00	46.79	51.03	-4.24	54.00	-7.21	100	152	Average	vertical		

BLE_1M

Middle Channel (Horizontal)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

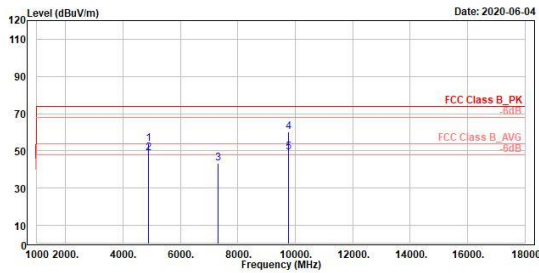

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4880.00	53.72	63.03	-9.31	74.00	-20.28	323	269	Peak	horizontal		
2	4880.00	48.86	58.17	-9.31	54.00	-5.14	323	269	Average	horizontal		
3	7320.00	43.54	50.24	-6.70	74.00	-30.46	100	246	Peak	horizontal		
4	9760.00	60.01	63.88	-3.87	74.00	-13.99	103	317	Peak	horizontal		
5	9760.00	49.24	53.11	-3.87	54.00	-4.76	103	317	Average	horizontal		



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

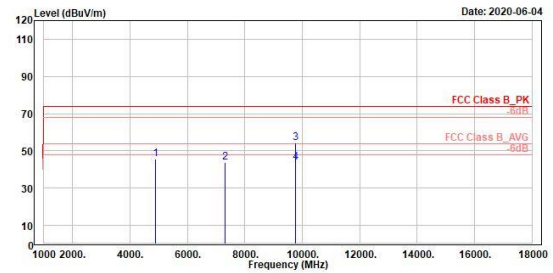


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4880.00	45.75	55.06	-9.31	74.00	-28.25	400	183	Peak	vertical		
2	7320.00	43.58	50.28	-6.70	74.00	-30.42	300	43	Peak	vertical		
3	9760.00	54.44	58.31	-3.87	74.00	-19.56	100	64	Peak	vertical		
4	9760.00	43.74	47.61	-3.87	54.00	-10.26	100	64	Average	vertical		

BLE_1M

High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

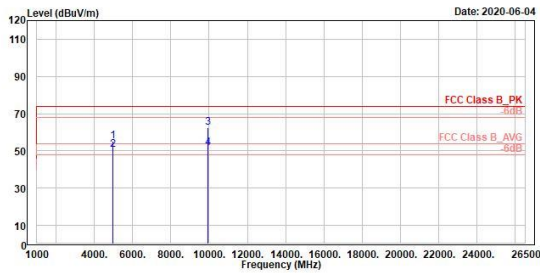


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	55.23	64.36	-9.13	74.00	-18.77	181	253	Peak	horizontal	
2	4960.00	50.56	59.69	-9.13	54.00	-3.44	181	253	Average	horizontal	
3	9920.00	62.55	66.19	-3.64	74.00	-11.45	182	385	Peak	horizontal	
4	9920.00	51.46	55.10	-3.64	54.00	-2.54	182	385	Average	horizontal	

High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

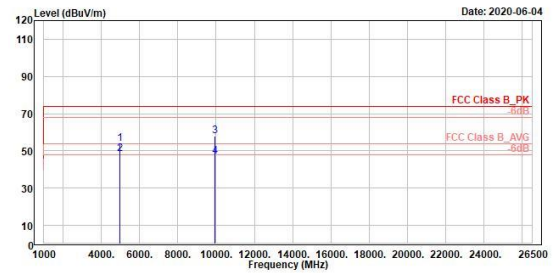


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	53.93	63.06	-9.13	74.00	-20.87	272	182	Peak	vertical	
2	4960.00	48.28	57.41	-9.13	54.00	-5.72	272	182	Average	vertical	
3	9920.00	57.87	61.51	-3.64	74.00	-16.13	182	63	Peak	vertical	
4	9920.00	46.99	50.63	-3.64	54.00	-7.01	182	63	Average	vertical	

BLE_2M

Low Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

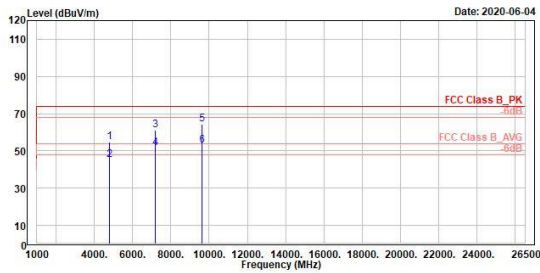


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4894.00	54.77	64.21	-9.44	74.00	-19.23	228	268	Peak	horizontal		
2	4894.00	45.06	54.50	-9.44	54.00	-8.94	228	268	Average	horizontal		
3	7206.00	61.25	68.07	-6.82	74.00	-12.75	100	297	Peak	horizontal		
4	7206.00	51.51	58.33	-6.82	54.00	-2.49	100	297	Average	horizontal		
5	9608.00	64.18	68.42	-4.24	74.00	-9.82	100	215	Peak	horizontal		
6	9608.00	53.02	57.26	-4.24	54.00	-0.98	100	215	Average	horizontal		

Low Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

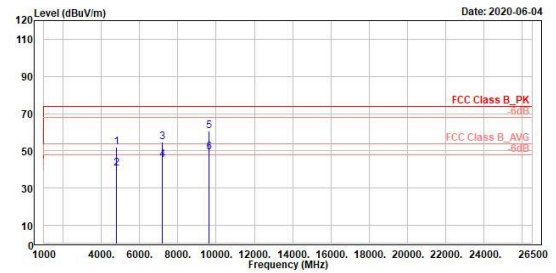


	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4894.00	51.84	61.28	-9.44	74.00	-22.16	327	65	Peak	vertical		
2	4894.00	40.48	49.92	-9.44	54.00	-13.52	327	65	Average	vertical		
3	7206.00	54.97	61.79	-6.82	74.00	-19.03	308	106	Peak	vertical		
4	7206.00	44.94	51.76	-6.82	54.00	-9.06	308	106	Average	vertical		
5	9608.00	60.65	64.89	-4.24	74.00	-13.35	378	355	Peak	vertical		
6	9608.00	49.42	53.66	-4.24	54.00	-4.58	378	355	Average	vertical		

BLE_2M

Middle Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

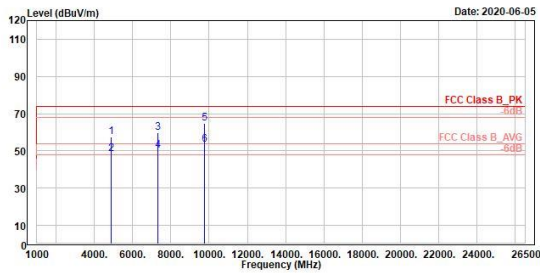


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4880.00	57.67	66.98	-9.31	74.00	-16.33	100	262	Peak	horizontal	
2	4880.00	48.14	57.45	-9.31	54.00	-5.86	100	262	Average	horizontal	
3	7320.00	59.97	66.67	-6.70	74.00	-14.03	100	297	Peak	horizontal	
4	7320.00	50.32	57.02	-6.70	54.00	-3.68	100	297	Average	horizontal	
5	9760.00	64.71	68.58	-3.87	74.00	-9.29	100	338	Peak	horizontal	
6	9760.00	53.33	57.20	-3.87	54.00	-0.67	100	338	Average	horizontal	

Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

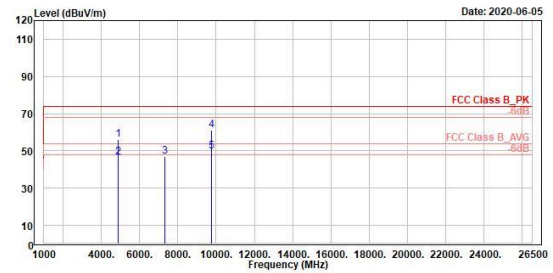


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4880.00	56.21	65.52	-9.31	74.00	-17.79	394	171	Peak	vertical	
2	4880.00	46.70	56.01	-9.31	54.00	-7.30	394	171	Average	vertical	
3	7320.00	46.99	53.69	-6.70	74.00	-27.01	400	49	Peak	vertical	
4	9760.00	60.92	64.79	-3.87	74.00	-13.08	354	357	Peak	vertical	
5	9760.00	49.83	53.70	-3.87	54.00	-4.17	354	357	Average	vertical	

BLE_2M

High Channel (Horizontal)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

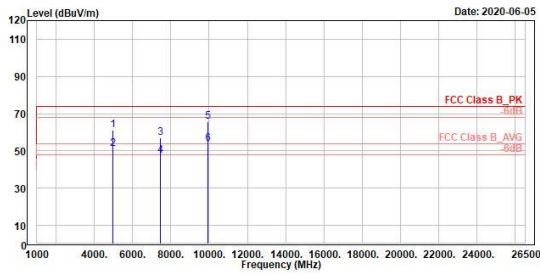


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	61.05	70.18	-9.13	74.00	-12.95	242	261	Peak	horizontal		
2	4960.00	51.22	60.35	-9.13	54.00	-2.78	242	261	Average	horizontal		
3	7440.00	57.05	63.75	-6.70	74.00	-16.95	102	298	Peak	horizontal		
4	7440.00	47.23	53.93	-6.70	54.00	-6.77	102	298	Average	horizontal		
5	9920.00	65.88	69.52	-3.64	74.00	-8.12	100	340	Peak	horizontal		
6	9920.00	53.70	57.34	-3.64	54.00	-0.30	100	340	Average	horizontal		

High Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

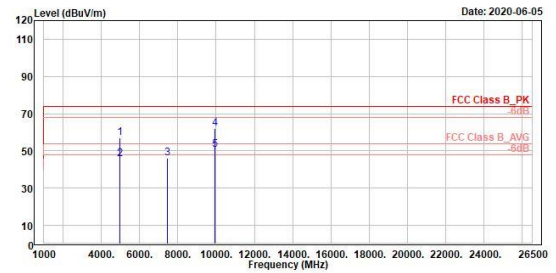

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	4960.00	57.16	66.29	-9.13	74.00	-16.84	387	10	Peak	vertical		
2	4960.00	45.45	54.58	-9.13	54.00	-8.55	387	10	Average	vertical		
3	7440.00	45.95	52.65	-6.70	74.00	-28.05	400	52	Peak	vertical		
4	7440.00	42.08	48.78	-6.70	54.00	-11.92	110	48	Peak	vertical		
5	9920.00	62.08	65.72	-3.64	74.00	-11.92	110	48	Average	vertical		

Mains Conducted Emission, 150kHz ~ 30MHz


Worst Band

(Line)

(Neutral)




TUV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

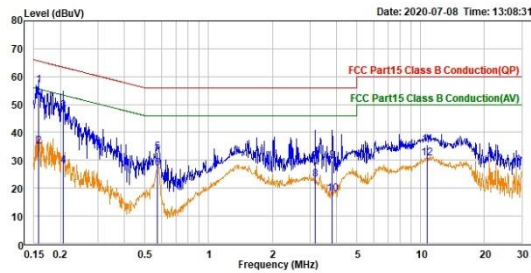

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Poi/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.158	46.85	10.11	56.96	65.59	-8.63	QP	line1
2	0.158	24.90	10.11	35.01	55.59	-20.58	Average	line1
3	0.206	37.56	10.11	47.67	63.35	-15.68	QP	line1
4	0.206	17.73	10.11	27.84	53.35	-25.51	Average	line1
5	0.573	22.82	10.12	32.94	56.00	-23.06	QP	line1
6	0.573	16.95	10.12	27.07	46.00	-18.93	Average	line1
7	3.184	19.17	10.20	29.37	56.00	-26.63	QP	line1
8	3.184	12.87	10.20	23.07	46.00	-22.93	Average	line1
9	3.829	19.51	10.21	29.72	56.00	-26.28	QP	line1
10	3.829	7.84	10.21	18.05	46.00	-27.95	Average	line1
11	10.691	25.29	10.38	35.67	60.00	-24.33	QP	line1
12	10.691	20.21	10.38	30.59	50.00	-19.41	Average	line1



TUV Rheinland Taiwan Ltd(New Taipei City Branch).
No. 458-19, Sec. 2, Fenliao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

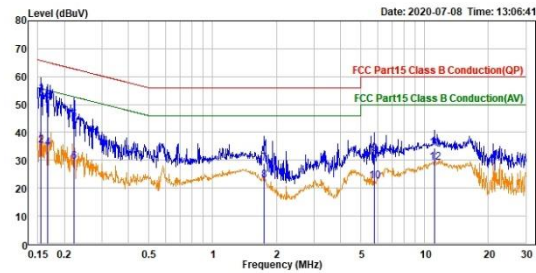

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Poi/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.155	43.59	10.11	53.70	65.71	-12.01	QP	neutral
2	0.155	25.21	10.11	35.32	55.71	-20.39	Average	neutral
3	0.167	41.44	10.11	51.55	65.13	-13.58	QP	neutral
4	0.167	24.32	10.11	34.43	55.13	-20.70	Average	neutral
5	0.222	34.19	10.11	44.30	62.73	-18.43	QP	neutral
6	0.222	19.52	10.11	29.63	52.73	-23.10	Average	neutral
7	1.751	18.82	10.16	28.98	56.00	-27.02	QP	neutral
8	1.751	12.70	10.16	22.86	46.00	-23.14	Average	neutral
9	5.791	21.88	10.26	32.14	60.00	-27.86	QP	neutral
10	5.791	12.28	10.26	22.54	50.00	-27.46	Average	neutral
11	11.126	23.67	10.39	34.06	60.00	-25.74	QP	neutral
12	11.126	18.79	10.39	29.18	50.00	-20.82	Average	neutral