

Test of Ear Force PX4 RX Wireless Audio Headset

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: COMM56-U6 Rev A



TEST REPORT
FROM
MiCOM Labs

Test of Ear Force PX4 RX Wireless Audio Headset

to
To FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: COMM56-U6 Rev A

Note: this report contains data with regard to the 5,150 to 5,250 MHz band for Turtle Beach, Ear Force PX4 RX Wireless Audio Headset. 2.4 GHz test data are reported in MiCOM Labs test report COMM56-U4

This report supersedes None

Applicant: Voyetra Turtle Beach Inc
100 Summit Lake Drive, Suite 100
Valhalla
New York, 10595, USA

Product Function: Wireless Audio Headset

Copy No: pdf Issue Date: 22nd November 2013

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court,
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 3 of 67

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF CONTENTS

| | |
|--|-----------|
| ACCREDITATION, LISTINGS & RECOGNITION..... | 5 |
| TESTING ACCREDITATION | 5 |
| RECOGNITION | 6 |
| PRODUCT CERTIFICATION | 7 |
| 1. TEST RESULT SUMMARY..... | 9 |
| COMPLIANCE STATEMENT..... | 10 |
| 2. REFERENCES AND MEASUREMENT UNCERTAINTY | 11 |
| 2.1. Normative References..... | 11 |
| 2.2. Test and Uncertainty Procedures..... | 12 |
| 3. PRODUCT DETAILS AND TEST CONFIGURATIONS..... | 13 |
| 3.1. Technical Details..... | 13 |
| 3.2. Scope of Test Program | 14 |
| 3.3. Equipment Model(s) and Serial Number(s) | 18 |
| 3.4. Antenna Details | 18 |
| 3.5. Cabling and I/O Ports | 18 |
| 3.6. Test Configurations | 19 |
| 3.7. Equipment Modifications | 20 |
| 3.8. Deviations from the Test Standard..... | 20 |
| 3.9. Subcontracted Testing or Third Party Data..... | 20 |
| 4. TESTING EQUIPMENT CONFIGURATION(S)..... | 21 |
| 4.1. Conducted RF Emission Test Set-up | 21 |
| 4.2. Radiated Spurious Emission Test Set-up > 1 GHz | 22 |
| 4.3. Digital Emissions Test Set-up (0.03 – 1 GHz)..... | 23 |
| 4.4. ac Wireline Emission Test Set-up | 24 |
| 5. TEST SUMMARY..... | 25 |
| 6. TEST RESULTS | 27 |
| 6.1. Device Characteristics..... | 27 |
| 6.1.1. <i>Conducted Testing</i> | 27 |
| 6.1.2. <i>Radiated Emission Testing</i> | 41 |
| 6.1.3. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> | 53 |
| 7. PHOTOGRAPHS | 55 |
| 7.1. Conducted Test Setup | 55 |
| 7.2. Radiated Test Setup < 1 GHz | 56 |
| 7.3. Radiated Test Setup > 1 GHz | 57 |
| 8. TEST EQUIPMENT DETAILS..... | 58 |
| APPENDIX | 59 |
| A. SUPPORTING INFORMATION..... | 59 |
| A.1. CONDUCTED TEST PLOTS | 59 |
| A.1.1. <i>26 dB & 99% Bandwidth</i> | 60 |
| A.1.2. <i>Peak Power Spectral Density</i> | 63 |
| A.1.3. <i>Peak Excursion Ratio</i> | 66 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 5 of 67

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 27th day of March 2012.

President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to February 28, 2014
Revised November 11, 2013



For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 6 of 67

RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

| Country | Recognition Body | Status | Phase | Identification No. |
|-----------|--|--------|------------|---|
| USA | Federal Communications Commission (FCC) | TCB | - | US0159 Listing #: 102167 |
| Canada | Industry Canada (IC) | FCB | APEC MRA 2 | US0159 Listing #: 4143A-2 4143A-3 |
| Japan | MIC (Ministry of Internal Affairs and Communication) | CAB | APEC MRA 2 | RCB 210 |
| | VCCI | -- | -- | A-0012 |
| Europe | European Commission | NB | EU MRA | NB 2280 |
| Australia | Australian Communications and Media Authority (ACMA) | CAB | APEC MRA 1 | US0159 |
| Hong Kong | Office of the Telecommunication Authority (OFTA) | CAB | APEC MRA 1 | |
| Korea | Ministry of Information and Communication Radio Research Laboratory (RRL) | CAB | APEC MRA 1 | |
| Singapore | Infocomm Development Authority (IDA) | CAB | APEC MRA 1 | |
| Taiwan | National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI) | CAB | APEC MRA 1 | |
| Vietnam | Ministry of Communication (MIC) | CAB | APEC MRA 1 | |

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 7 of 67

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

"World Class Accreditation"

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996
General requirements for bodies operating product certification systems. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 27th day of March 2012.


Peter Ahuja
President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to February 28, 2014
Revised November 11, 2013



For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation

United States of America – Telecommunication Certification Body (TCB)

TCB Identifier – US0159

Industry Canada – Certification Body

CAB Identifier – US0159

Europe – Notified Body

Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB)

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 8 of 67

DOCUMENT HISTORY

| Document History | | |
|------------------|--------------------------------|------------------|
| Revision | Date | Comments |
| Draft | | |
| Rev A | 22 nd November 2013 | Initial release. |
| | | |
| | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 9 of 67

1. TEST RESULT SUMMARY

| | | | |
|---------------|--|------------|---|
| Applicant: | Voyetra Turtle Beach Inc 100 Summit Lake Drive, Suite 100 Valhalla New York, 10595, USA | Tested By: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566, USA |
| EUT: | Wireless Audio Headset | Tel: | +1 925 462 0304 |
| Model: | Ear Force PX4 RX (TB300-3276-01) | Fax: | +1 925 462 0306 |
| S/N: | 001 | | |
| Test Date(s): | 4th to 6th November '13 | Website: | www.micomlabs.com |

| STANDARD(S) | TEST RESULTS |
|-------------------------------------|--------------------|
| FCC 47 CFR Part 15.407 & IC RSS-210 | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:




Graeme Grieve
Quality Manager MiCOM Labs,


Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 10 of 67

COMPLIANCE STATEMENT

| | | | |
|------------|---|--------------------|--|
| Applicant: | Voyetra Turtle Beach Inc 100 Summit Lake Drive, Suite 100 Valhalla, New York, 10595, USA | Tested By: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566 USA |
| Product: | Wireless Audio Headset | Telephone: Fax: | +1 925 462 0304 +1 925 462 0306 |
| Model No.: | Ear Force PX4 RX (TB300-3276-01) | Website: | www.micomlabs.com |

STANDARD(S)

FCC 47 CFR Part 15.407 & IC RSS-210

MiCOM Labs attests that the above noted model(s) meet the requirements set forth in the above standard(s) based on testing of samples as noted in the Test Result Summary and the manufacturer's declaration of similarity.

Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. None.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

| Ref. | Publication | Year | Title |
|--------|--------------------------------|----------------------------|--|
| (i) | FCC 47 CFR Part 15.407 | 2012 | Code of Federal Regulations |
| (ii) | FCC 06-96 | June 2006 | Memorandum Opinion and Order |
| (iii) | FCC OET KDB 662911 | 4 th April 2011 | Emissions Testing of Transmitters with Multiple Outputs in the Same Band |
| (iv) | Industry Canada RSS-210 | 2010 | Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment |
| (v) | Industry Canada RSS-Gen | 2010 | General Requirements and Information for the Certification of Radiocommunication Equipment |
| (vi) | ANSI C63.4 | 2009 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| (vii) | CISPR 22/ EN 55022 | 2008 2006+A1:2007 | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment |
| (viii) | M 3003 | Edition 2 Jan. 2007 | Expression of Uncertainty and Confidence in Measurements |
| (ix) | LAB34 | Edition 1 Aug 2002 | The expression of uncertainty in EMC Testing |
| (x) | ETSI TR 100 028 | 2001 | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics |
| (xi) | A2LA | July 2012 | Reference to A2LA Accreditation Status – A2LA Advertising Policy |
| (xii) | FCC Public Notice – DA 02-2138 | 2002 | Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 12 of 67

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 13 of 67

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

| Details | Description |
|---|---|
| Purpose: | Test of the Ear Force PX4 RX Wireless Audio Headset in the frequency range 5,150 to 5,250 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations. |
| Applicant: | Voyetra Turtle Beach Inc 100 Summit Lake Drive, Suite 100 Valhalla New York, 10595, USA |
| Manufacturer: | As applicant |
| Laboratory performing the tests: | MiCOM Labs, Inc. 575 Boulder Court, Pleasanton, California 94566 USA |
| Test report reference number: | COMM56-U6 Rev A |
| Date EUT received: | 29th October 2013 |
| Standard(s) applied: | FCC 47 CFR Part 15.407 & IC RSS-210 |
| Dates of test (from - to): | 4th to 6th November '13 |
| No of Units Tested: | Two |
| Type of Equipment: | Wireless Audio Headset |
| Applicants Trade Name: | Ear Force |
| Model(s): | Ear Force PX4 RX (TB300-3276-01) |
| Location for use: | Indoor only |
| Declared Frequency Range(s): | 5,150 – 5,250 MHz |
| Hardware Rev | PP |
| Software Rev | None |
| Type of Modulation: | Per 802.11 – OFDM |
| Declared Nominal Output Power: (Average Power) | 802.11a: Legacy + 8.34 dBm |
| EUT Modes of Operation: | Legacy 802.11a |
| Transmit/Receive Operation: | Time Division Duplex |
| System Beam Forming: | EUT has no capability for antenna beam forming |
| Rated Input Voltage and Current: | Nominal: 3.7 V, Charger (USB) supply: 5V +/- 10% |
| Operating Temperature Range: | Declared range 0o to +50°C at 95% humidity non condensing |
| ITU Emission Designator: | 802.11a 16M8D1D |
| Equipment Dimensions: | 9 x 6 x 3.5 inches |
| Weight: | 7 oz |
| Primary function of equipment: | Wireless Audio Headset |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program

Ear Force PX4 RX Wireless Audio Headset RF Testing

The scope of the test program was to test the Ear Force PX4 RX Wireless Audio Headset, in the frequency range 5,150 to 5,250 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications.

Ear Force PX4 RX Wireless Audio Headset



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Ear Force PX4 RX Wireless Audio Headset- Back




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Ear Force PX4 RX Wireless Audio Headset- WiFi PCB Board -



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Ear Force PX4 RX Wireless Audio Headset – Battery -

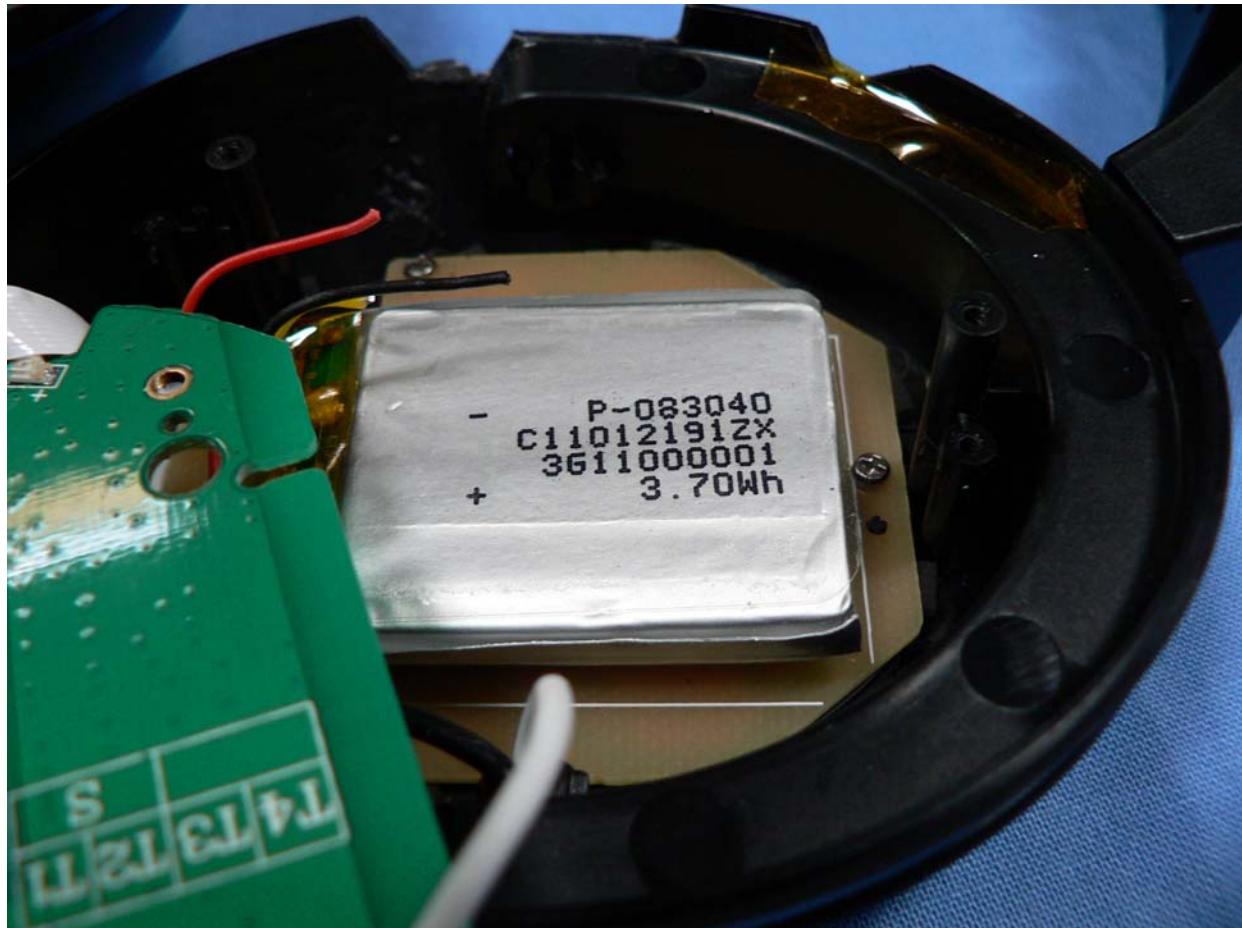

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.3. Equipment Model(s) and Serial Number(s)

| Type (EUT/Support) | Equipment Description (Including Brand Name) | Mfr | Model No. | Serial No. |
|--------------------|--|-------------------------|---------------------|------------|
| EUT | Wireless Audio Headset | Voyetra Turtle Beach | Ear Force PX4 RX | 001 |
| Support | Laptop PC | Dell | Latitude | None |

3.4. Antenna Details

| Antenna Type | Manufacturer | Model Number | Antenna Gain (dBi) | |
|-------------------------------|--------------|------------------|--------------------|-------|
| | | | 2.4 GHz | 5 GHz |
| Integral Folded F (Bluetooth) | Turtle Beach | PCB | 2.8 | -- |
| Chip (Wi-Fi) | Fractus | FR05-S1-NO-1-004 | -1.5 | -- |
| Chip (Wi-Fi) | Fractus | FR05-S1-NO-1-004 | -- | 3.3 |

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 1 x USB (charge only)
2. 1 x 2.5 mm Analog Audio Input

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

| Operational Mode(s) (802.11) | Variant | Data Rates with Highest Power | Frequencies (MHz) |
|---|----------------|--|------------------------------|
| a | Legacy | 6 MBit/s | 5,180/5,200/5,240 |

Spurious Emission and Band-Edge Test Strategy

Bands 5,150 – 5,250

| |
|------------|
| 11a |
| SE 5180 |
| SE 5200 |
| SE 5240 |
| BE 5350 |

KEY:-

SE – Spurious Emissions

BE – Band-Edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 20 of 67

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4. TESTING EQUIPMENT CONFIGURATION(S)


4.1. Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 26 dB and 99% Bandwidth
2. Section 6.1.1.2. Maximum Conducted Output Power
3. Section 6.1.1.3. Peak Power Spectral Density
4. Section 6.1.1.4. Peak Excursion Ratio

Conducted Test Set-Up Pictorial Representation

Test Measurement set up

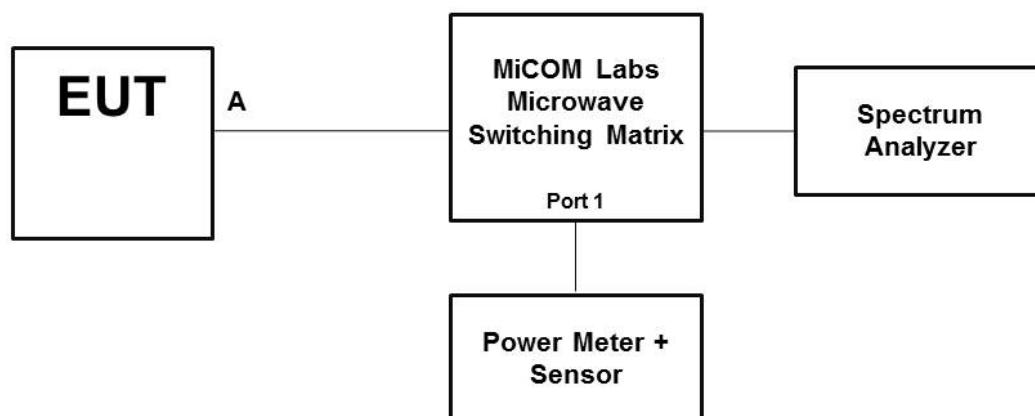


Conducted Test Measurement Setup

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.2. Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

Radiated Emission Measurement Setup – Above 1 GHz

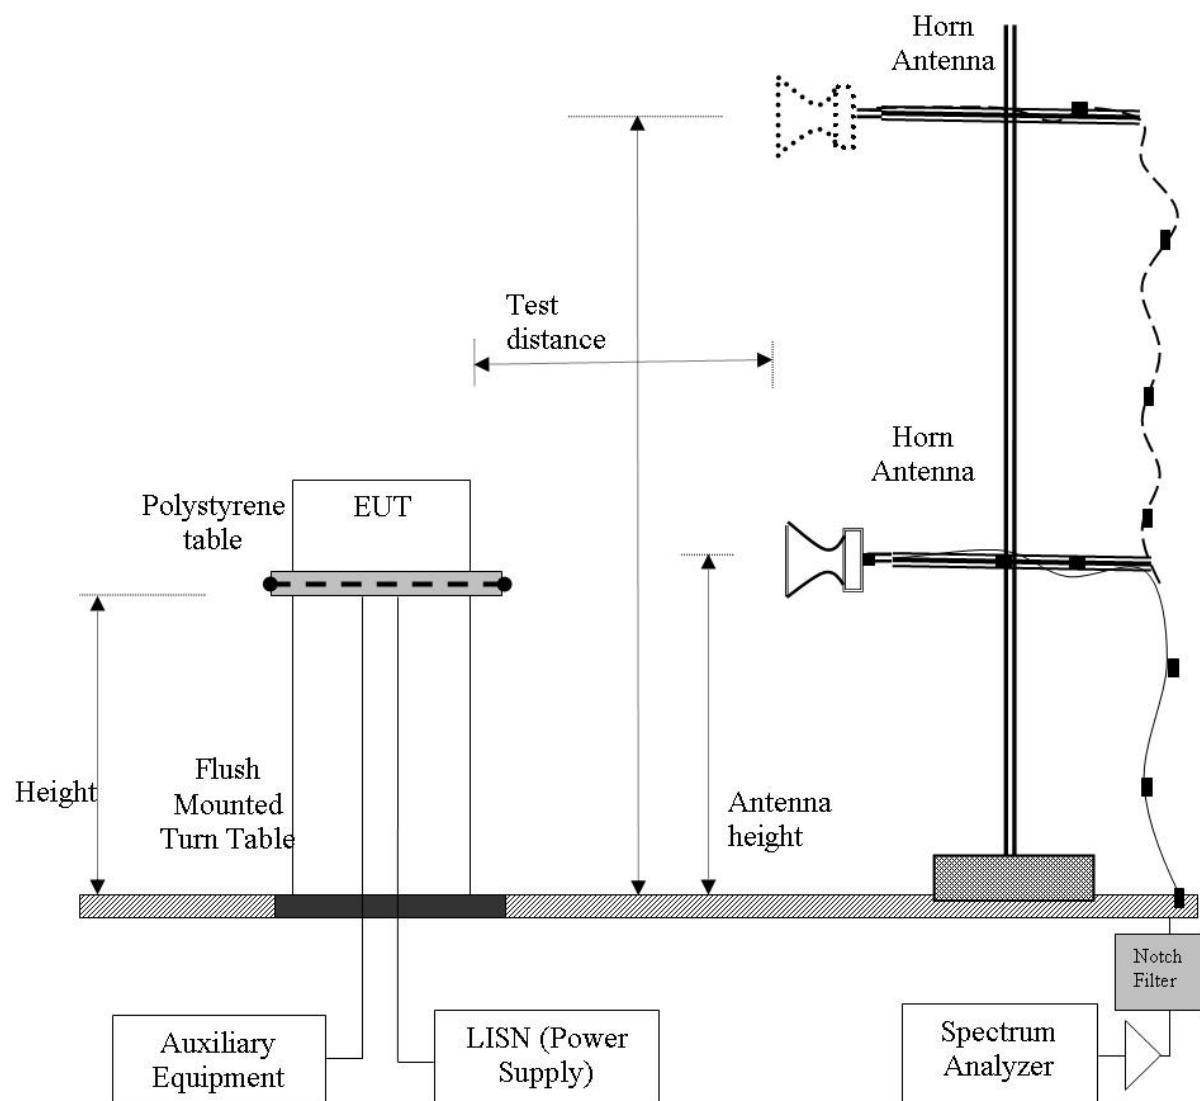


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.3. Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.4. Digital Emissions

Digital Emission Measurement Setup – Below 1 GHz

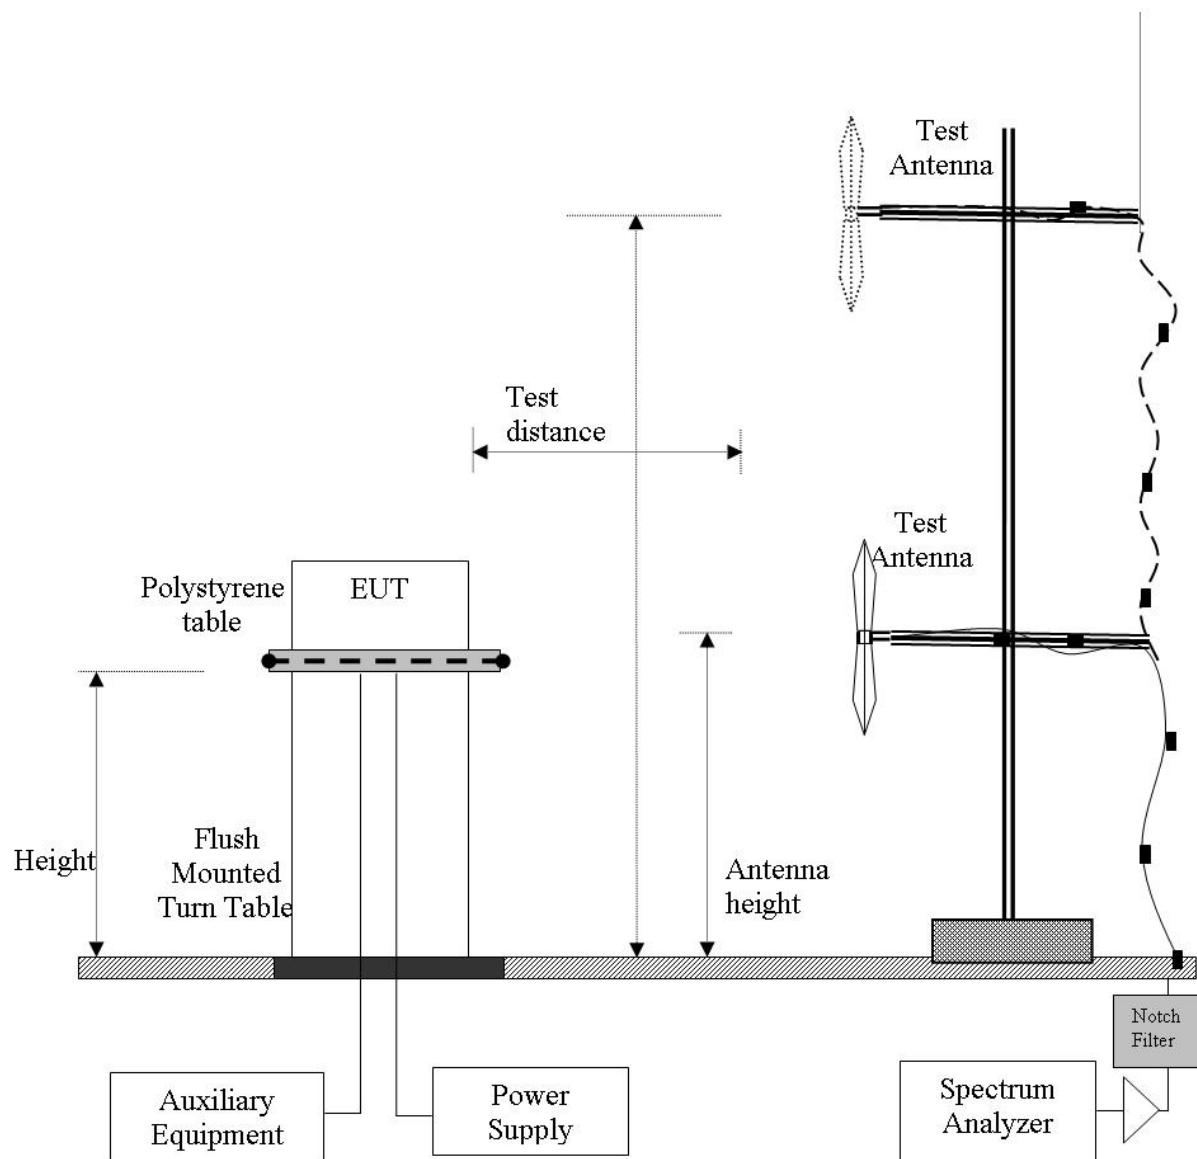


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

4.4. ac Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.3 ac Wireline Conducted Emissions

Conducted Test Set-Up Pictorial Representation

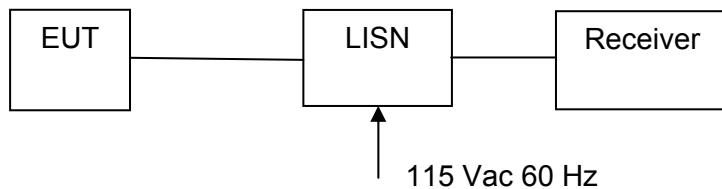

Measurement set up for ac Wireline Conducted Emissions Test



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 25 of 67

5. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

| Section(s) | Test Items | Description | Condition | Result | Test Report Section |
|--|--------------------------------|--|-----------------------|----------|---------------------|
| 15.407(a) A9.2(2) 4.4 | 26dB and 99% Emission BW | Emission bandwidth measurement | Conducted | Complies | 6.1.1.1 A.1.1 |
| 15.407(a) A9.2(2) 4.6 | Maximum Conducted Output Power | Power Measurement | Conducted | Complies | 6.1.1.2 |
| 15.407(a) A9.2(2) | Peak Power Spectral Density | PPSD | Conducted | Complies | 6.1.1.3 A.1.2 |
| 15.407(a)(6) | Peak Excursion Ratio | <13dB in any 1MHz bandwidth | Conducted | Complies | 6.1.1.4 A.1.3 |
| 15.407(g) 15.31 2.1 4.5 | Frequency Stability | Limits: contained within band of operation at all times. | Applicant declaration | Complies | 6.1.1.5 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 26 of 67

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

| Section(s) | Test Items | Description | Condition | Result | Test Report Section |
|---|---|------------------------------|-----------|-------------------------------|---------------------|
| 15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7 | Radiated Emissions | | Radiated | | 6.1.2 |
| | Transmitter Radiated Spurious Emissions | Emissions above 1 GHz | | Complies | |
| | Radiated Band Edge | Band edge results | | Complies | |
| 15.407(b)(6) 15.205(a) 15.209(a) 2.2 | Radiated Emissions | Emissions <1 GHz (30M-1 GHz) | | Complies | 6.1.2.1 |
| 15.407(b)(6) 15.207 7.2.2 | AC Wireline Conducted Emissions 150 kHz–30 MHz | Conducted Emissions | Conducted | N/A EUT is Battery Powered | 6.1.3 |

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 27 of 67

6. TEST RESULTS

6.1. Device Characteristics

6.1.1. Conducted Testing

6.1.1.1. 26 dB and 99 % Bandwidth

| Conducted Test Conditions for 26 dB and 99% Bandwidth | | | | | | |
|---|---|----------------------------|-------------|--|--|--|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 | | | |
| Test Heading: | 26 dB and 99 % Bandwidth | Rel. Humidity (%): | 32 - 45 | | | |
| Standard Section(s): | 15.407 (a) | Pressure (mBars): | 999 - 1001 | | | |
| Reference Document(s): | KDB 789033 - D01 DTS General UNII Test Procedures v01 | | | | | |
| Test Procedure for 26 dB and 99% Bandwidth Measurement | | | | | | |
| The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency. KDB 789033 Section 5.1 Emission Bandwidth was used in order to prove compliance. The Resolution Bandwidth was set to approximately 1% of the emission bandwidth. | | | | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 28 of 67

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

| Equipment Configuration for 26 dB & 99% Occupied Bandwidth | | | | | | |
|--|----------------|--|--|-------------------------------|----------------|--|
| Variant: | 802.11a | | | Duty Cycle (%): | 100 | |
| Data Rate: | 6 MBits/s | | | Antenna Gain (dBi): | Not Applicable | |
| Modulation: | OFDM | | | Beam Forming Gain (Y): | Not Applicable | |
| TPC: | Not Applicable | | | Tested By: | JMH | |
| Engineering Test Notes: | | | | | | |

| Test Measurement Results | | | | | | |
|--------------------------|--------------------------------|---|---|---|-----------------------|--------|
| Test Frequency | Measured 26 dB Bandwidth (MHz) | | | | 26 dB Bandwidth (MHz) | |
| | Port(s) | | | | | |
| MHz | a | b | c | d | Highest | Lowest |
| 5180.0 | 37.375 | | | | 37.375 | 37.375 |
| 5200.0 | 37.174 | | | | 37.174 | 37.174 |
| 5240.0 | 36.974 | | | | 36.974 | 36.974 |

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | 99% Bandwidth (MHz) | |
|----------------|------------------------------|---|---|---|---------------------|--------|
| | Port(s) | | | | | |
| MHz | a | b | c | d | Highest | Lowest |
| 5180.0 | 19.940 | | | | 19.940 | 19.940 |
| 5200.0 | 19.539 | | | | 19.539 | 19.539 |
| 5240.0 | 19.439 | | | | 19.439 | 19.439 |

| Traceability to Industry Recognized Test Methodologies | | | | | | |
|--|----------------------------------|--|--|--|--|--|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK | | | | | |
| Measurement Uncertainty: | ±2.81 dB | | | | | |

Click on the links above to see the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 29 of 67

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2

Band 5150–5250 MHz

Note: LE-LAN devices are restricted to indoor operation only in the band 5150–5250 MHz.

Power limits

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Out-of-band emission limits

Emissions outside the band 5150–5250 MHz shall not exceed -27 dBm/MHz e.i.r.p.

Band 5250–5350 MHz

Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Out-of-band emission limits

Emissions outside the band 5250–5350 MHz shall not exceed -27 dBm/MHz e.i.r.p

Traceability

| Test Equipment Used |
|--|
| 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 30 of 67

6.1.1.2. Maximum Conducted Output Power

| Conducted Test Conditions for Maximum Conducted Output Power | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Maximum Conducted Output Power | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | KDB 789033 - D01 DTS General UNII Test Procedures v01 | | |

Test Procedure for Maximum Conducted Output Power Measurement

Method PM (Measurement using an RF average power meter). Section C(4) of KDB 789033 defines a methodology using an average wideband power meter. Measurements were made while the EUT was operating in a continuous transmission mode (100% duty cycle) at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result. All operational modes and frequency bands were measured independently and the resultant Σ calculated. For multiple outputs, the measurements were made simultaneously on each output port and summed in a linear fashion. This technique was used in order to prove compliance.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 31 of 67

Maximum Transmit (Conducted) Power, FCC Limits and Industry Canada Limits

Bands 5150 – 5250 MHz

FCC Limits

Conducted Power Limit lesser of: 50 mW or $4 \text{ dBm} + 10 \log (B) \text{ dBm}$. B is the 26 dB emission bandwidth in MHz.

| Mode | Frequency Range (MHz) | Minimum 26 dB Bandwidth (MHz) | $4 + 10 \log (B) \text{ (dBm)}$ | Limit (dBm) |
|------|-----------------------|-------------------------------|---------------------------------|-------------|
| a | 5150 – 5250 | 34.870 | +19.70 | +17 |

Industry Canada Limits

EIRP Limit 5150 – 5250 MHz: Lesser of 200 mW (+23 dBm) or $10 + 10 \log (B) \text{ dBm}$. B is the 99% emission bandwidth in MHz.

| Mode | Frequency Range (MHz) | Minimum 99 % Bandwidth (MHz) | $10 + 10 \log (B) \text{ (dBm)}$ | EIRP Limit (dBm) |
|------|-----------------------|------------------------------|----------------------------------|------------------|
| a | 5150 – 5250 | 17.535 | +22.43 | +23 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 32 of 67

Measurement Results for Maximum Conducted Output Power

| Equipment Configuration for Peak Transmit Power | | | |
|---|----------------|-------------------------------|------|
| Variant: | 802.11a | Duty Cycle (%): | 100 |
| Data Rate: | 6 MBits/s | Antenna Gain (dBi): | 3.30 |
| Modulation: | OFDM | Beam Forming Gain (Y): | N/A |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

| Test Measurement Results | | | | | | | | |
|--------------------------|---------------------------------------|---|---|---|------------------------|-------------------------|-------|-------------------|
| Test Frequency | Measured Conducted Output Power (dBm) | | | | Calculated Total Power | Minimum 26 dB Bandwidth | Limit | Margin |
| | Port(s) | | | | | | | EUT Power Setting |
| MHz | a | b | c | d | Σ Port(s) dBm | MHz | dBm | dBm |
| 5180.0 | 8.34 | | | | 8.34 | 37.375 | 19.70 | -11.36 |
| 5200.0 | 7.99 | | | | 7.99 | 37.174 | 19.70 | -11.71 |
| 5240.0 | 7.73 | | | | 7.73 | 36.974 | 19.70 | -11.97 |

| Traceability to Industry Recognized Test Methodologies | | | | | | | | |
|--|---------------------------------|--|--|--|--|--|--|--|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER | | | | | | | |
| Measurement Uncertainty: | ± 1.33 dB | | | | | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 33 of 67

Specification Limits

FCC, Part 15 §15.407 (a)(1), (a)(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 and 5470-5725 MHz GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2

Band 5150–5250 MHz

Note: LE-LAN devices are restricted to indoor operation only in the band 5150–5250 MHz.

Power limits

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Out-of-band emission limits

Emissions outside the band 5150–5250 MHz shall not exceed -27 dBm/MHz e.i.r.p.

Band 5250–5350 MHz

Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Out-of-band emission limits

Emissions outside the band 5250–5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

Traceability

| Test Equipment Used |
|--|
| 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 34 of 67

6.1.1.3. Peak Power Spectral Density

| Conducted Test Conditions for Power Spectral Density | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Power Spectral Density | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | KDB 789033 - D01 DTS General UNII Test Procedures v01 | | |

Test Procedure for Power Spectral Density

The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D01 Multiple Transmitter Output v01.)

Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs. Consistency is maintained for any device with N transmitter outputs to be certain the individual outputs are all aligned with the same span and same number of points. In this instance, the linear power spectrum value within the first spectral bin of output 0 is summed with that in the first spectral bin of output 1, and the first spectral bin of output 2, and so on up to the Nth output to obtain the true value for the first frequency bin of the summed spectrum. The summed spectrum value for each frequency bin is computed in this fashion. These summed spectral values were calculated on a computer, and the results read back into the spectrum analyzer as a data file to produce a representative plot of total spectral power density.

Calculated Power = $A + 10 \log (1/x)$ dBm

A = Total Power Spectral Density $[10 \log_{10} (10a/10 + 10b/10 + 10c/10 + 10d/10)]$

x = Duty Cycle

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 35 of 67

Equipment Configuration for Peak Power Spectral Density

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 100.0 |
| Data Rate: | 6 MBits/s | Antenna Gain (dBi): | 3.30 |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Power Spectral Density | | | | Amplitude Summation | Limit | Margin |
|-----------------------|--|----------|----------|----------|----------------------------|----------------|---------------|
| | Port(s) (dBm/MHz) | | | | | | |
| MHz | a | b | c | d | dBm/MHz | dBm/MHz | dB |
| 5180.0 | -2.744 | | | | -2.744 | 4.0 | -6.744 |
| 5200.0 | -3.502 | | | | -3.502 | 4.0 | -7.502 |
| 5240.0 | -3.755 | | | | -3.755 | 4.0 | -7.755 |

Traceability to Industry Recognized Test Methodologies

| | |
|---------------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Click on the links above to see the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 36 of 67

Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

5150 – 5250 MHz

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

5250 – 5350 MHz & 5470 – 5725 MHz

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2

Band 5150–5250 MHz

Note: LE-LAN devices are restricted to indoor operation only in the band 5150–5250 MHz.

Power limits

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Out-of-band emission limits

Emissions outside the band 5150–5250 MHz shall not exceed -27 dBm/MHz e.i.r.p.

Band 5250–5350 MHz

Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Out-of-band emission limits

Emissions outside the band 5250–5350 MHz shall not exceed -27 dBm/MHz e.i.r.p

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 37 of 67

6.1.1.4. Peak Excursion Ratio

| Conducted Test Conditions for Peak Excursion Ratio | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Peak Excursion Ratio | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (a)(6) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | KDB 789033 - D01 DTS General UNII Test Procedures v01 | | |

Test Procedure for Peak Excursion Ratio

Compliance with the peak excursion requirement is demonstrated by confirming the ratio of the maximum of the peak-hold spectrum to the maximum of the average spectrum during continuous transmission. Section F) of KDB 789033 was used in order to prove compliance. This is a conducted measurement using a spectrum analyzer using dual traces. Peak Excursion Ratio is the difference in amplitude (dB) between both traces; The following identifies two spectrum traces on the same plot. Trace 1 is the max hold Peak detector, and Trace 2 is the recalled trace data from Peak Power Spectral Density measurements. Each frequency and operational mode is recalled in order to prove compliance.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 38 of 67

Equipment Configuration for Peak Excursion Ratio

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.11a | Duty Cycle (%): | 100 |
| Data Rate: | 6 MBits/s | Antenna Gain (dBi): | Not Applicable |
| Modulation: | OFDM | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured Peak Excursion (dB) | | | | Ratio (dB) | | Limit | Lowest Margin |
|-----------------------|-------------------------------------|----------|----------|----------|-------------------|---------------|--------------|----------------------|
| | Port(s) | | | | Highest | Lowest | | |
| MHz | a | b | c | d | | | dB | MHz |
| 5180.0 | 8.61 | | | | 8.61 | 8.61 | 13.0 | -4.39 |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Click on the links above to see the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 39 of 67

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 40 of 67

6.1.1.5. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.250 GHz translates to a maximum frequency shift of ± 105 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 105 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 41 of 67

6.1.2. Radiated Emission Testing

FCC, Part 15 Subpart E §15.407(b), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.2

Test Procedure

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode. Depending on the frequency band spanned a notch filter and/or waveguide filter was used to remove the fundamental frequency.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$\mathbf{FS = R + AF + CORR - FO}$$

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

$$\mathbf{CORR = Correction\ Factor = CL - AG + NFL}$$

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$\mathbf{FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\ dB\mu V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\mathbf{Level\ (dB\mu V/m) = 20 * Log\ (level\ (\mu V/m))}$$

$$\mathbf{40\ dB\mu V/m = 100\ \mu V/m}$$

$$\mathbf{48\ dB\mu V/m = 250\ \mu V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 42 of 67

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m):

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dB μ V/m

Note: The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB μ V/m) for out of band emissions. All out of band emissions are less than 68.23 dB μ V/m.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Radiated Spurious Emissions

15.407 (b). All emissions outside of the 5,150-5,350MHz, 5,470-5,725MHz band shall not exceed an EIRP of -27dBm/MHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.2 For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.9 Transmitter Unwanted Emissions.

RSS-Gen §6.1 Receiver Spurious Emission Standard.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 44 of 67

Table 1: FCC 15.209 Spurious Emissions Limits

| Frequency (MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) | Measurement Distance (meters) |
|-----------------|--------------------------------|----------------------------------|----------------------------------|
| 30-88 | 100 | 40.0 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |


Traceability:

| Test Equipment Used |
|--|
| 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Low Channel


| | | | |
|---------------|----------------------|----------------|------|
| Test Freq. | 5180 MHz | Engineer | JMH |
| Variant | 802.11a; 6 Mbs | Temp (°C) | 22 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum.(%) | 23 |
| Power Setting | SPW 0 | Press. (mBars) | 1002 |
| Antenna | Chip 3.3 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | PX4 RX Headset | | |
| Test Notes 2 | | | |

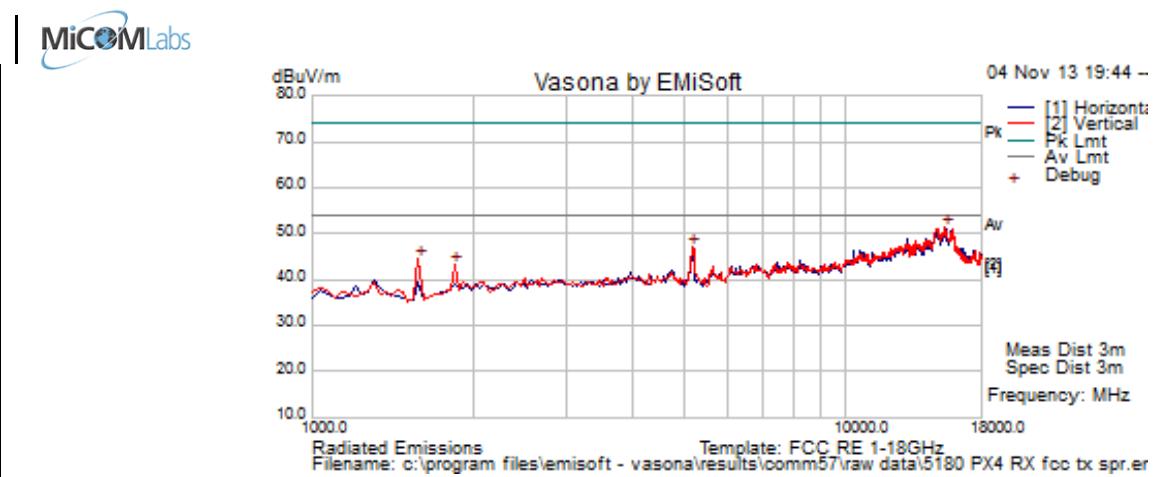

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 15376.754 | 43.9 | 8.2 | -0.7 | 51.3 | Peak [Scan] | V | | | | | | Noise |
| 5155.05 | 52.3 | 4.6 | -9.9 | 47.0 | Peak [Scan] | | | | | | | FUND |
| 1579.839 | 57.3 | 2.4 | -15.2 | 44.6 | Peak [Scan] | V | 98 | -1 | 54 | -9.42 | Pass | RB |
| 1851.772 | 53.0 | 2.7 | -12.4 | 43.2 | Peak [Scan] | V | | | | | | NRB |
| Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205 | | | | | | | | | | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

802.11a Restricted Band 4500 – 5150 MHz; 5150 MHz Band-edge

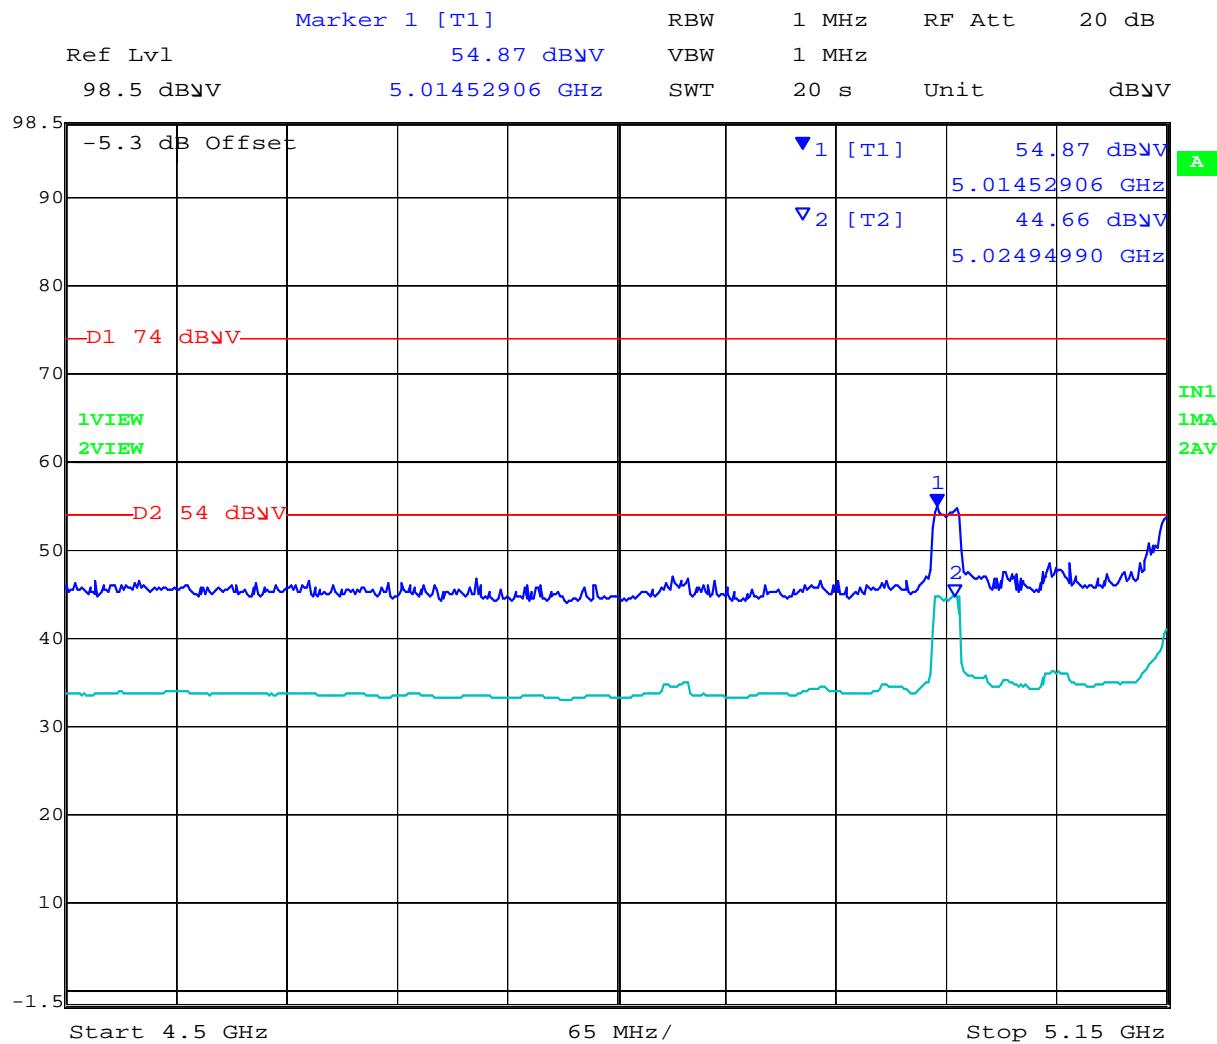


Date: 4.NOV.2013 20:29:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Mid Channel


| | | | |
|----------------------|----------------------|-----------------------|------|
| Test Freq. | 5200 MHz | Engineer | JMH |
| Variant | 802.11a; 6 Mbs | Temp (°C) | 25 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum.(%) | 32 |
| Power Setting | SPW 0 | Press. (mBars) | 1002 |
| Antenna | Chip 3.3 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | PX4 RX Headset | | |
| Test Notes 2 | | | |

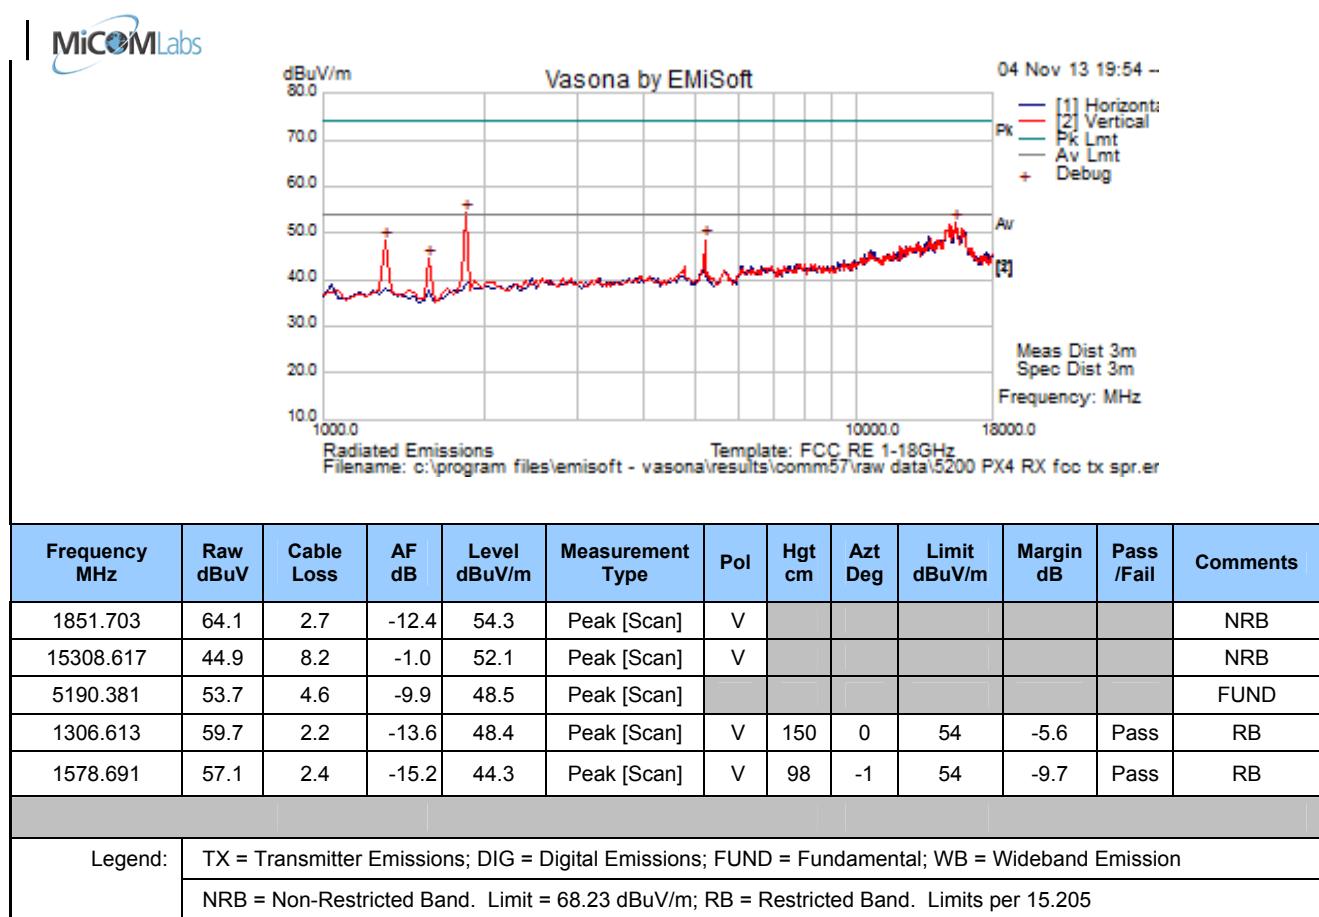

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

High Channel


| | | | |
|----------------------|----------------------|-----------------------|------|
| Test Freq. | 5240 MHz | Engineer | JMH |
| Variant | 802.11a; 6 Mbs | Temp (°C) | 22 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum. (%) | 23 |
| Power Setting | SPW 0 | Press. (mBars) | 1002 |
| Antenna | Chip 3.3 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | PX4 RX Headset | | |
| Test Notes 2 | | | |

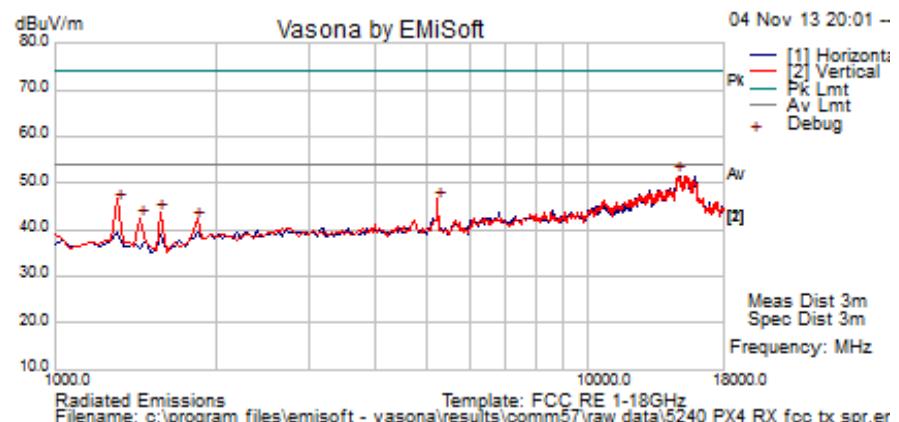

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---------------|----------|---|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 14763.527 | 46.0 | 8.2 | -2.5 | 51.6 | Peak [Scan] | V | | | | | | NRB |
| 5219.352 | 51.3 | 4.6 | -9.8 | 46.1 | Peak [Scan] | | | | | | | FUND |
| 1310.421 | 57.0 | 2.2 | -13.6 | 45.6 | Peak [Scan] | V | 100 | 0 | 54 | -8.4 | Pass | RB |
| 1579.247 | 56.5 | 2.4 | -15.2 | 43.7 | Peak [Scan] | V | 100 | 0 | 54 | -10.3 | Pass | RB |
| 1445.349 | 54.5 | 2.3 | -14.6 | 42.2 | Peak [Scan] | V | 100 | 0 | 54 | -11.8 | Pass | RB |
| 1844.790 | 51.8 | 2.6 | -12.4 | 42.0 | Peak [Scan] | V | | | | | | NRB |
| <hr/> | | | | | | | | | | | | |
| Legend: | | TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission | | | | | | | | | | |
| | | NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205 | | | | | | | | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

802.11a 5250 Restricted Band-edge 5350-5460 MHz

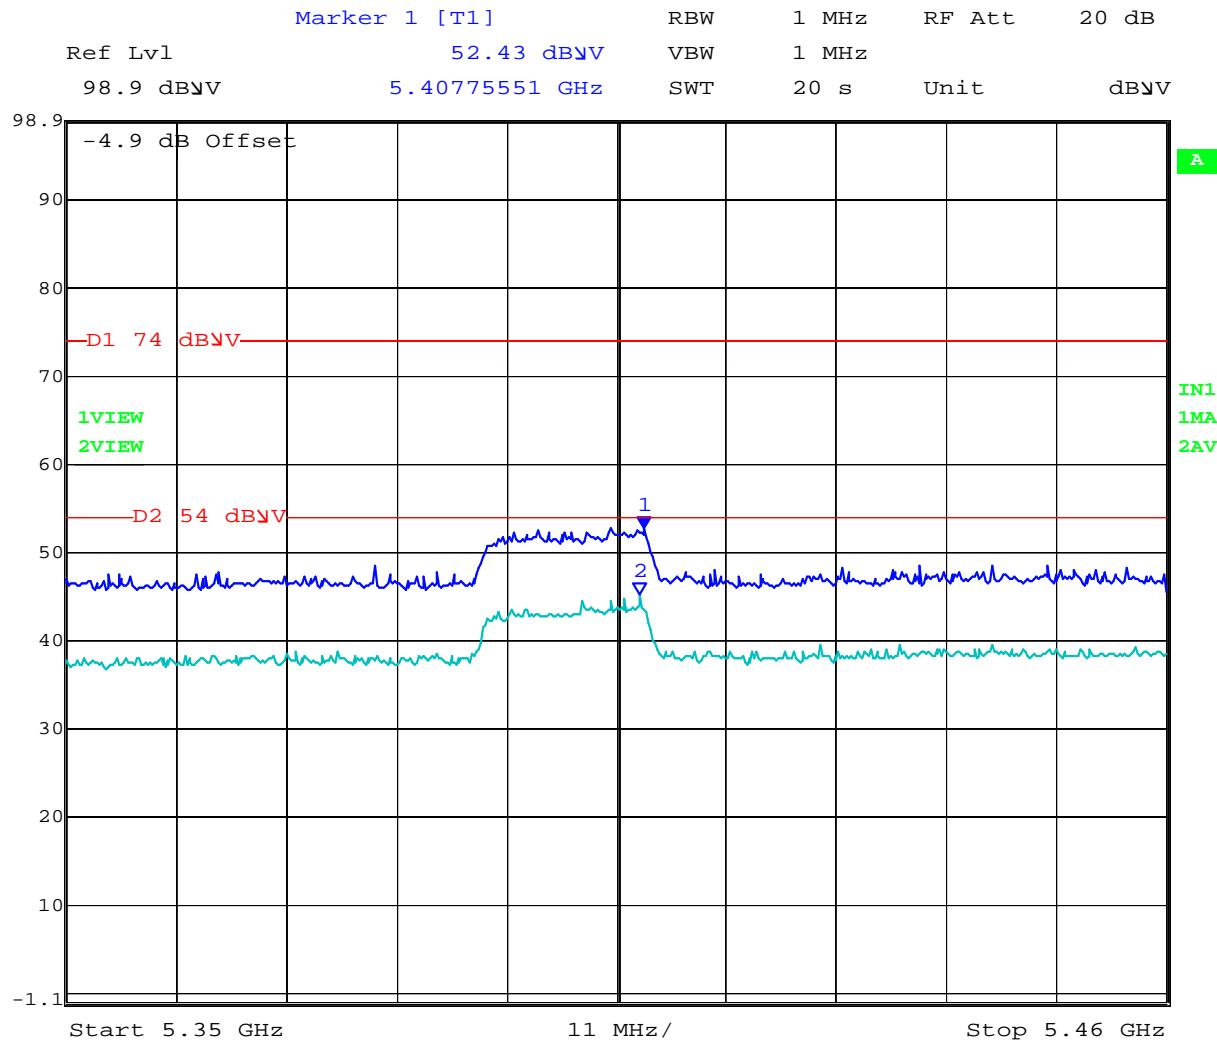

Date: 4.NOV.2013 20:34:19

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 50 of 67

6.1.2.1. Digital Emissions (0.03 - 1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209

Industry Canada RSS-Gen §7.2.5

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

| | | | |
|----------------------|--------------------------|-----------------------|------|
| Test Freq. | NA | Engineer | JMH |
| Variant | Digital Emissions | Temp (°C) | 20 |
| Freq. Range | 30 MHz - 1000 MHz | Rel. Hum. (%) | 37 |
| Power Setting | NA | Press. (mBars) | 1007 |
| Antenna | NA | | |
| Test Notes 1 | PX4 RX Headset WiFi mode | | |
| Test Notes 2 | | | |

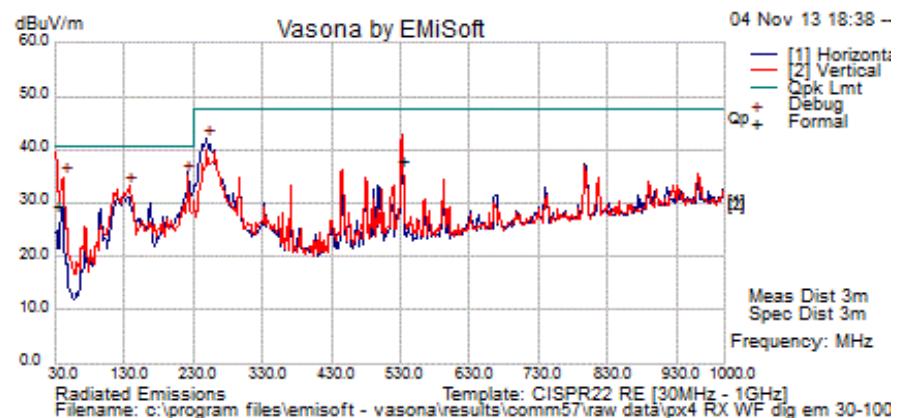Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 31.564 | 36.6 | 3.5 | -10.7 | 29.4 | Quasi Max | V | 130 | 184 | 40.5 | -11.1 | Pass | |
| 249.659 | 56 | 4.9 | -18.8 | 42 | Peak [Scan] | H | 100 | 0 | 47.5 | -5.5 | Pass | |
| 43.597 | 51 | 3.6 | -19.7 | 34.9 | Peak [Scan] | V | 100 | 0 | 40.5 | -5.6 | Pass | |
| 222.203 | 50 | 4.7 | -19.5 | 35.3 | Peak [Scan] | H | 98 | 201 | 40.5 | -5.2 | Pass | |
| 136.694 | 46.3 | 4.3 | -17.6 | 33.1 | Peak [Scan] | H | 98 | 201 | 40.5 | -7.5 | Pass | |
| 532.886 | 43.9 | 6 | -12.1 | 37.8 | Quasi Max | V | 113 | 34 | 47.5 | -9.7 | Pass | |

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency

NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 52 of 67

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and **Industry Canada RSS-Gen §7.2.5** Limit Matrix

| Frequency(MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) | Measurement Distance (meters) |
|----------------|--------------------------------|----------------------------------|----------------------------------|
| 30-88 | 100 | 40.0 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

Laboratory Measurement Uncertainty for Radiated Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | +5.6/ -4.5 dB |
|-------------------------|---------------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.1.3. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.4

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Not required - EUT is host powered only.

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.4

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The more stringent limit applies at the frequency range boundaries. The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network (LISN).

§15.207 (a) and RSS-Gen §7.2.4 Limit Matrix

The lower limit applies at the boundary between frequency ranges

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | ± 2.64 dB |
|-------------------------|---------------|


Traceability

| Method | Test Equipment Used |
|--|------------------------------------|
| Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions' | 0158, 0184, 0287, 0190, 0293, 0307 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7. PHOTOGRAPHS

7.1. Conducted Test Setup

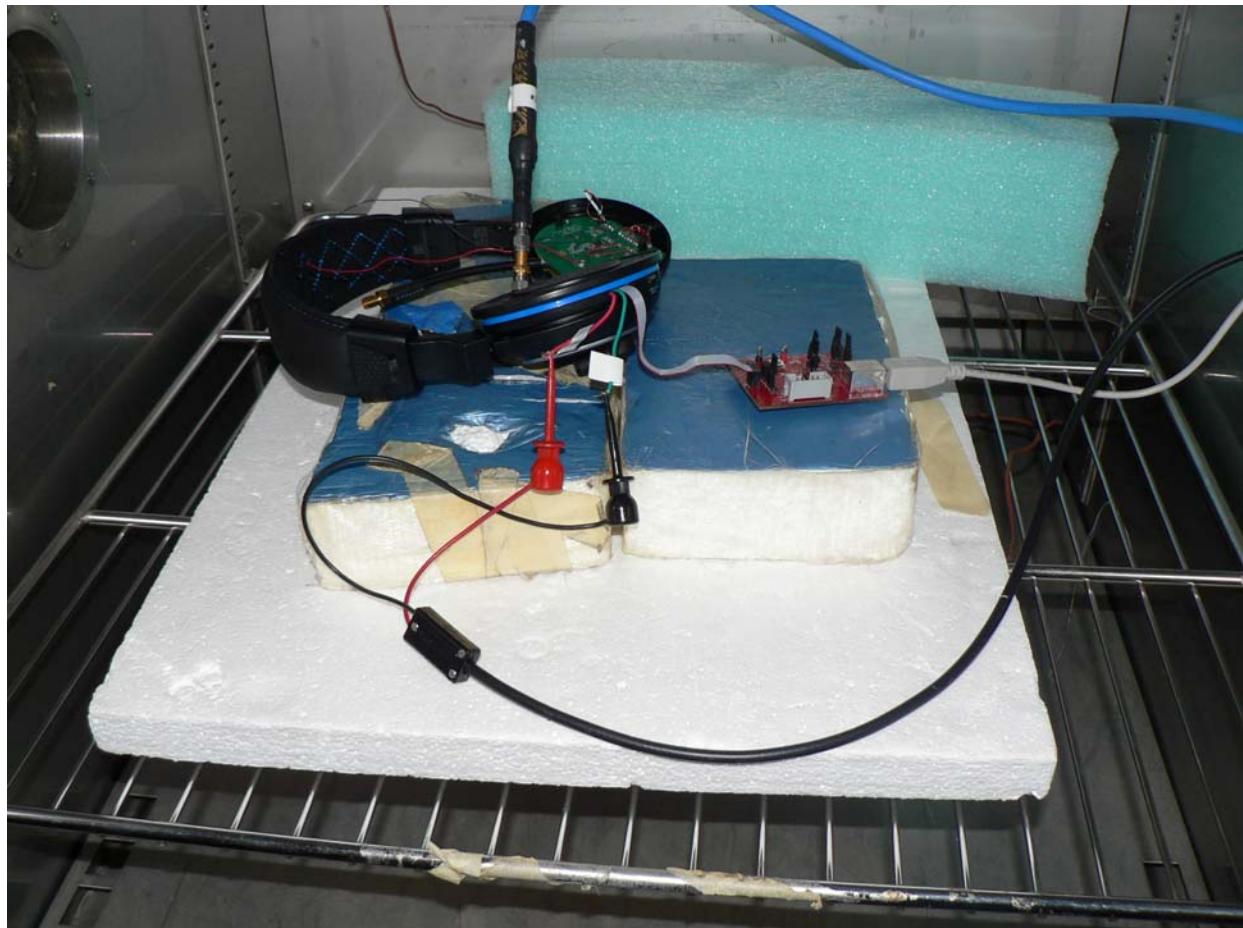

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.2. Radiated Test Setup < 1 GHz



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.3. Radiated Test Setup > 1 GHz



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 58 of 67

8. TEST EQUIPMENT DETAILS

| Asset # | Instrument | Manufacturer | Part # | Serial # | Calibration Due Date |
|----------------|----------------------------|----------------------|-----------------------|-----------------|-----------------------------|
| 0117 | Power Sensor | Hewlett Packard | 8487D | 3318A00371 | 18 th Oct 14 |
| 0223 | Power Meter | Hewlett Packard | EPM-442A | US37480256 | 18 th Oct 14 |
| 0376 | Power Sensor | Agilent | U2000A | MY51440005 | 28 th Oct 14 |
| 0390 | Power Sensor | Agilent | U2002A | MY50000103 | 17 th Oct 14 |
| 0158 | Barometer /Thermometer | Control Co. | 4196 | E2846 | 8 th Jan 14 |
| 0193 | EMI Receiver | Rhode & Schwartz | ESI 7 | 838496/007 | 2 nd Dec 13 |
| 0287 | EMI Receiver | Rhode & Schwartz | ESIB40 | 100201 | 31 st Jul 14 |
| 0338 | 30 - 3000 MHz Antenna | Sunol | JB3 | A052907 | 14 th Aug 14 |
| 0399 | 1-18 GHz Horn Antenna | EMCO | 3117 | 00154575 | 10 th Oct 14 |
| 0252 | SMA Cable | Megaphase | Sucoflex 104 | None | N/A |
| 0310 | 2m SMA Cable | Micro-Coax | UFA210A-0-0787-3G03G0 | 209089-001 | N/A |
| 0312 | 3m SMA Cable | Micro-Coax | UFA210A-1-1181-3G0300 | 209092-001 | N/A |
| 0314 | 30dB N-Type Attenuator | ARRA | N9444-30 | 1623 | N/A |
| 0359 | DFS Test System | Aeroflex | PXI-1042 | 300001/004 | 21 st Oct 14 |
| 0299 | DFS Test Software | Aeroflex | PXIModule | Version 7.1.0 | N/A |
| 0502 | EMC Test Software | EMISoft | Vasona | 5.0051 | N/A |
| 0503 | RF Conducted Test Software | National Instruments | Labview | Version 8.2 | N/A |
| 0398 | RF Conducted Test Software | MiCOM Labs ATS | -- | Version 1.8 | N/A |
| 0380 | RF Switch | MiCOM Labs | MIC001 | MIC001 | 20 th Dec 13 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 59 of 67

APPENDIX

A. SUPPORTING INFORMATION

A.1. CONDUCTED TEST PLOTS


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.1. 26 dB & 99% Bandwidth



26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

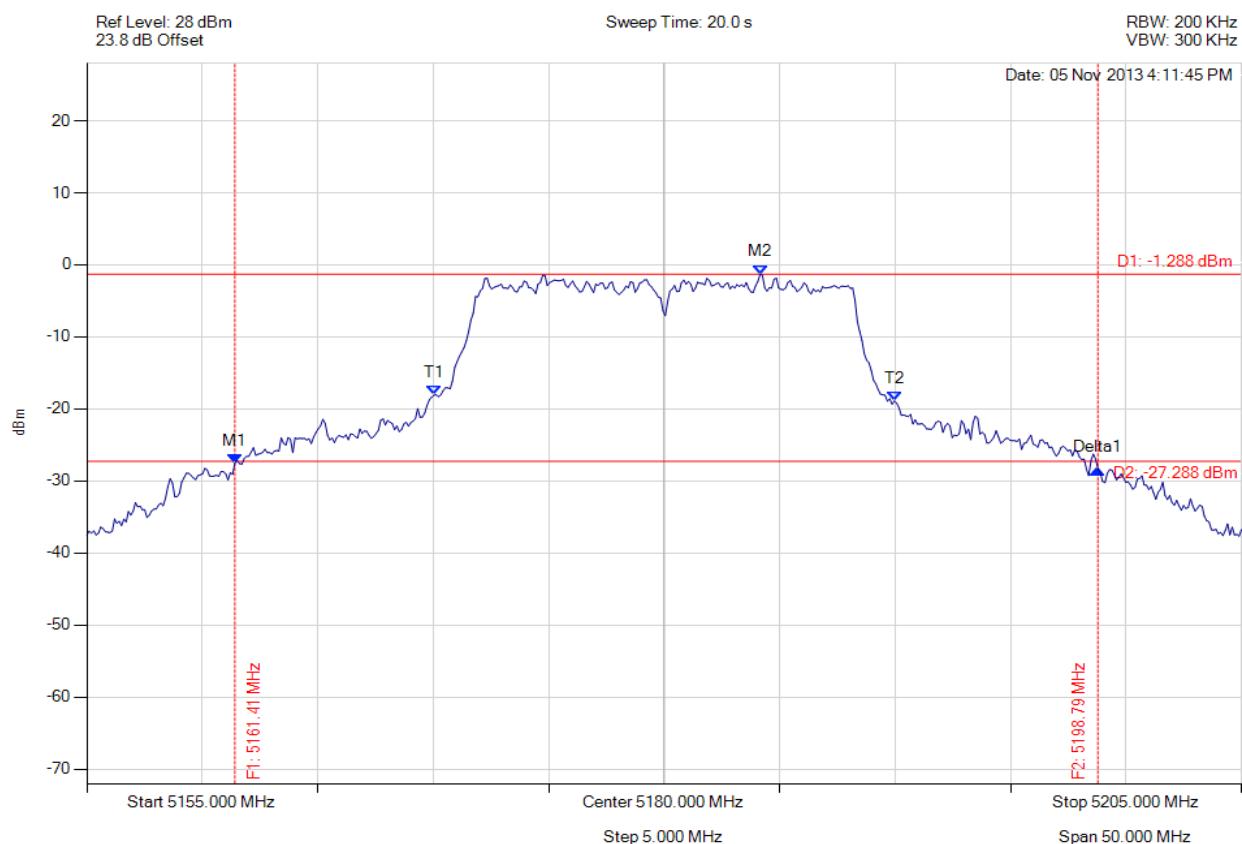


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5161.413 MHz : -27.511 dBm M2 : 5184.158 MHz : -1.288 dBm Delta1 : 37.375 MHz : -0.822 dB T1 : 5170.030 MHz : -18.091 dBm T2 : 5189.970 MHz : -18.902 dBm OBW : 19.940 MHz | Measured 26 dB Bandwidth: 37.375 MHz Measured 99% Bandwidth: 19.940 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

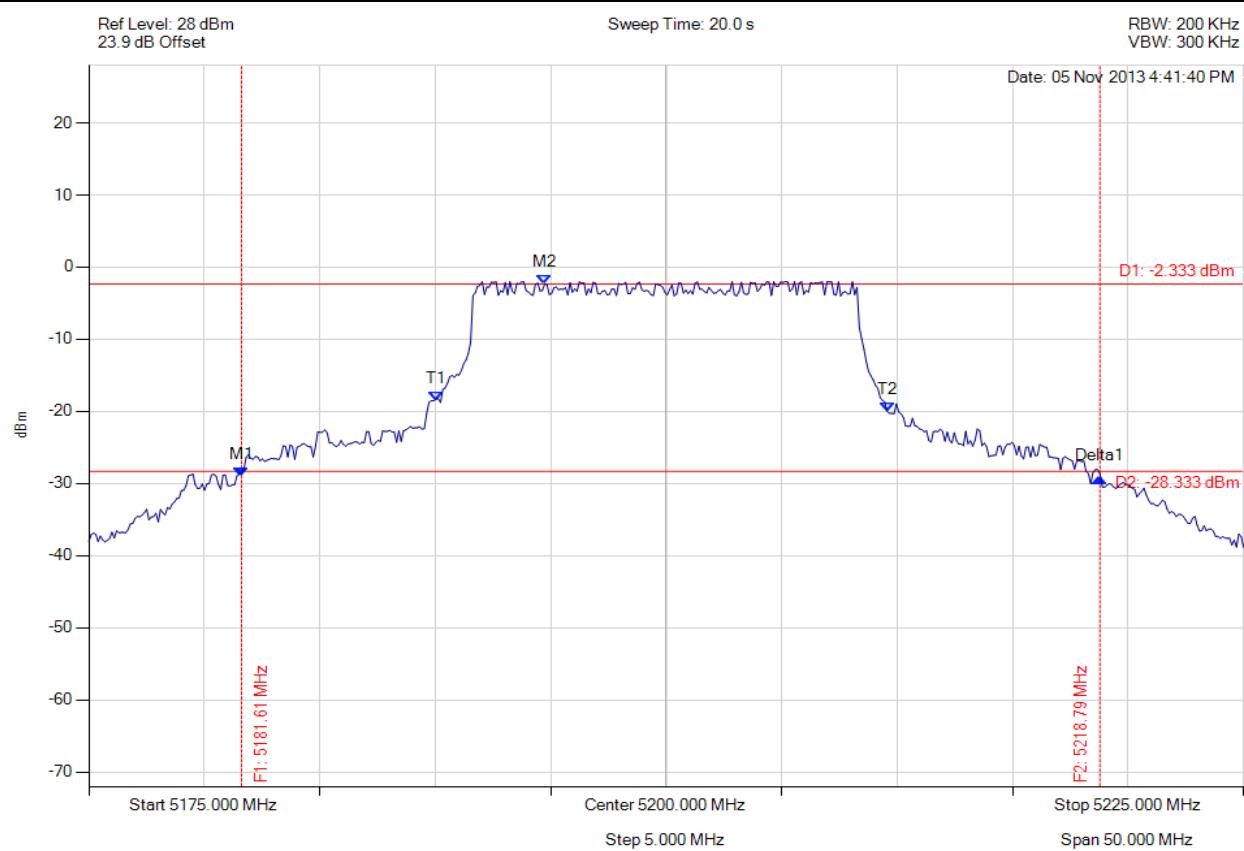


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5181.613 MHz : -29.101 dBm M2 : 5194.739 MHz : -2.333 dBm Delta1 : 37.174 MHz : -0.191 dB T1 : 5190.030 MHz : -18.605 dBm T2 : 5209.569 MHz : -20.000 dBm OBW : 19.539 MHz | Measured 26 dB Bandwidth: 37.174 MHz Measured 99% Bandwidth: 19.539 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

26 dB & 99% BANDWIDTH

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

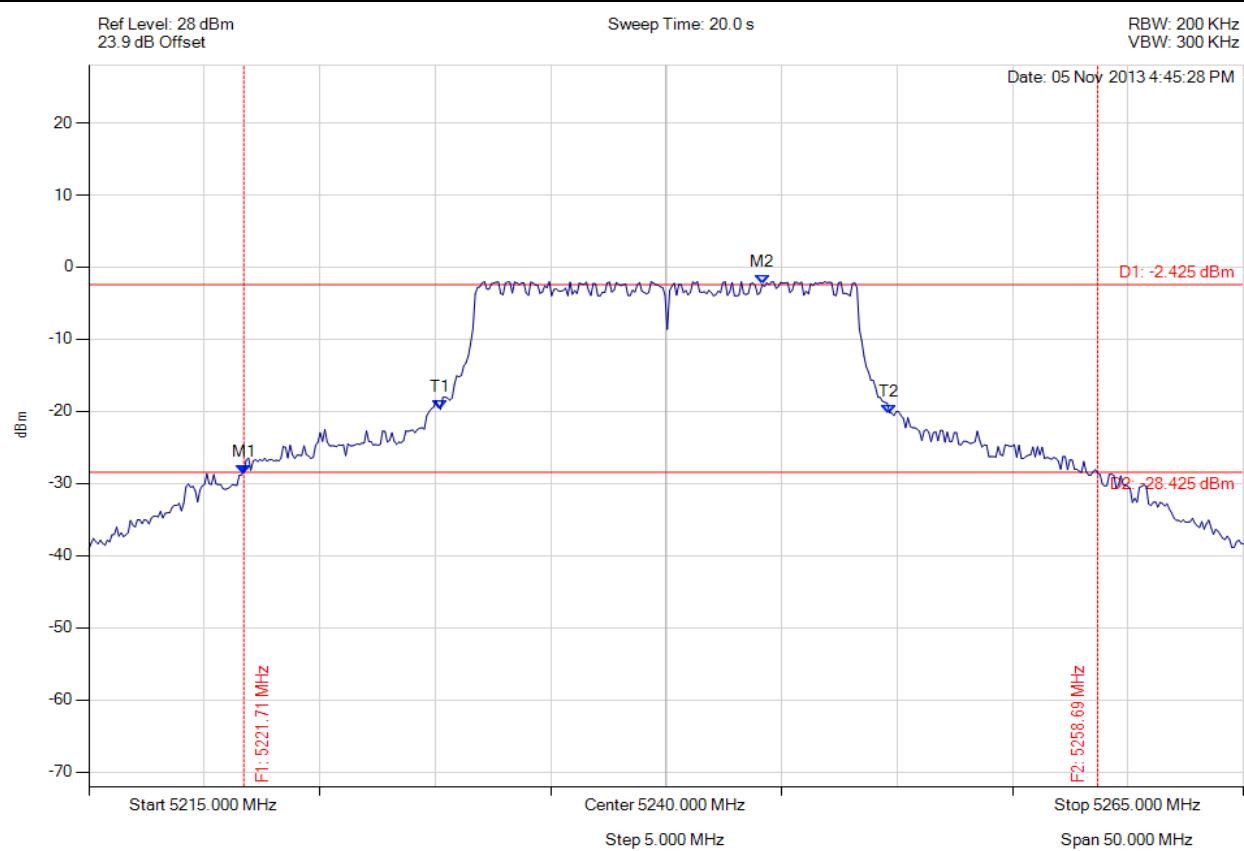

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5221.713 MHz : -28.680 dBm M2 : 5244.158 MHz : -2.425 dBm Delta1 : -36973948 Hz : -0.565 dB T1 : 5230.230 MHz : -19.714 dBm T2 : 5249.669 MHz : -20.332 dBm OBW : 19.439 MHz | Measured 26 dB Bandwidth: -36.974 MHz Measured 99% Bandwidth: 19.439 MHz |

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.2. Peak Power Spectral Density



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

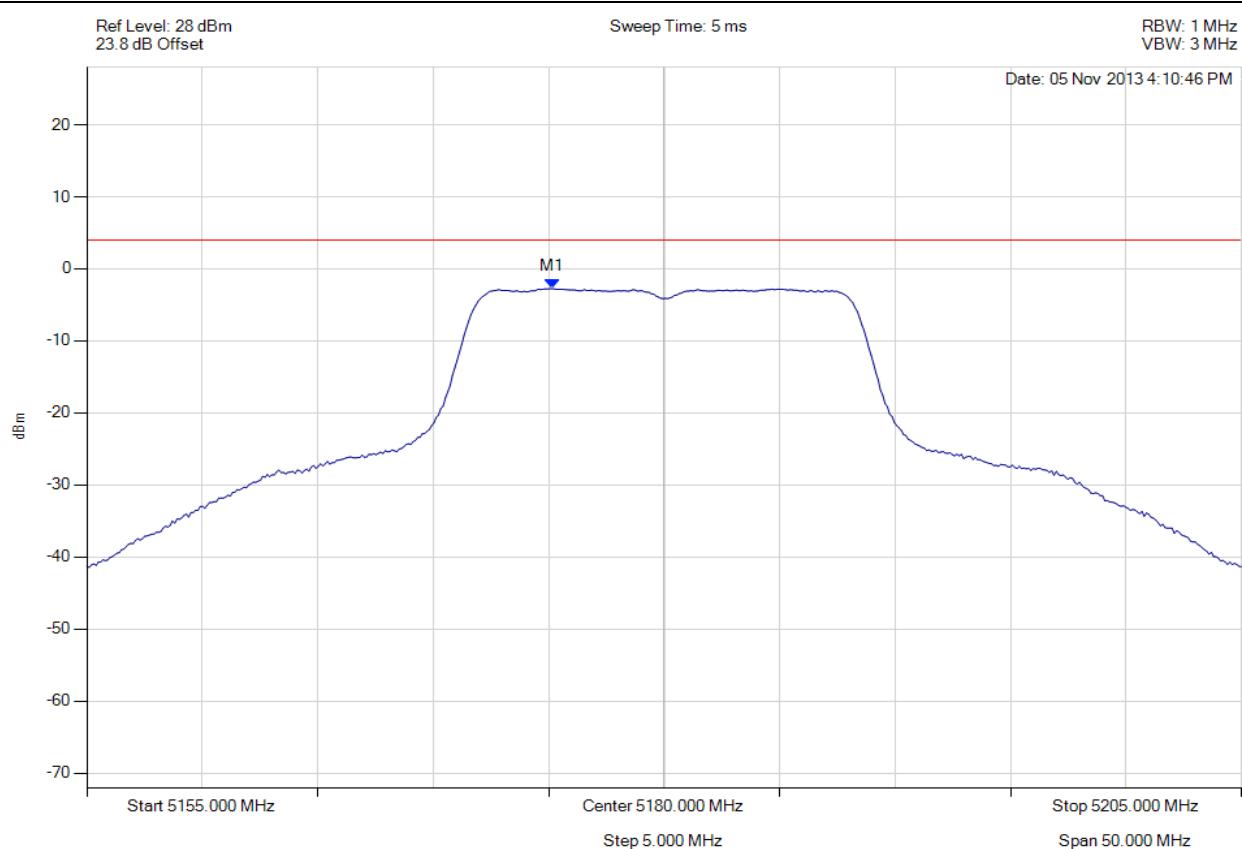


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|--|--------------------------------|---------------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5175.140 MHz : -2.744 dBm | Limit: ≤ 4.000 dBm Margin: 6.74 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5200.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

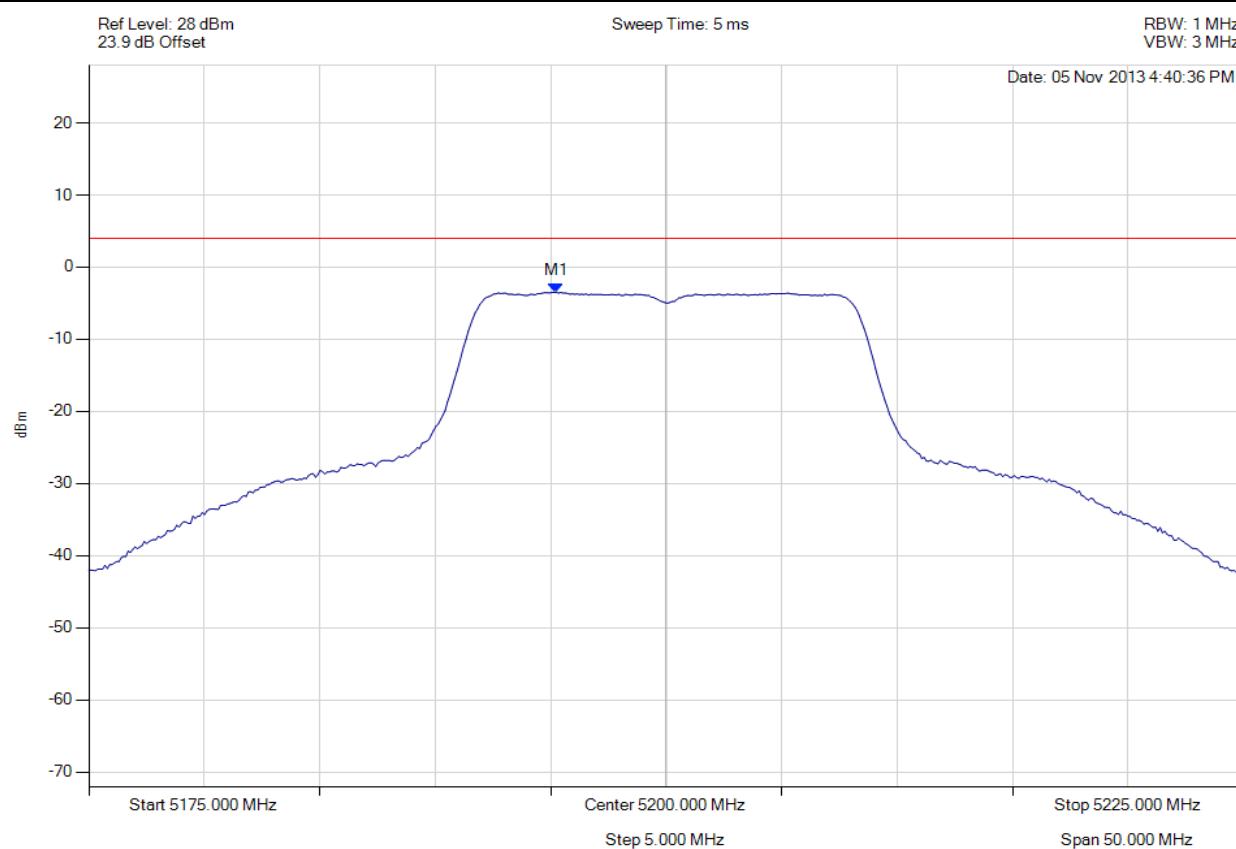

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|--|--------------------------------|---------------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5195.240 MHz : -3.502 dBm | Limit: ≤ 4.000 dBm Margin: 7.50 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Ear Force PX4 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: COMM56-U6 Rev A
Issue Date: 22nd November 2013
Page: 65 of 67



PEAK POWER SPECTRAL DENSITY

Variant: 802.11a, Channel: 5240.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

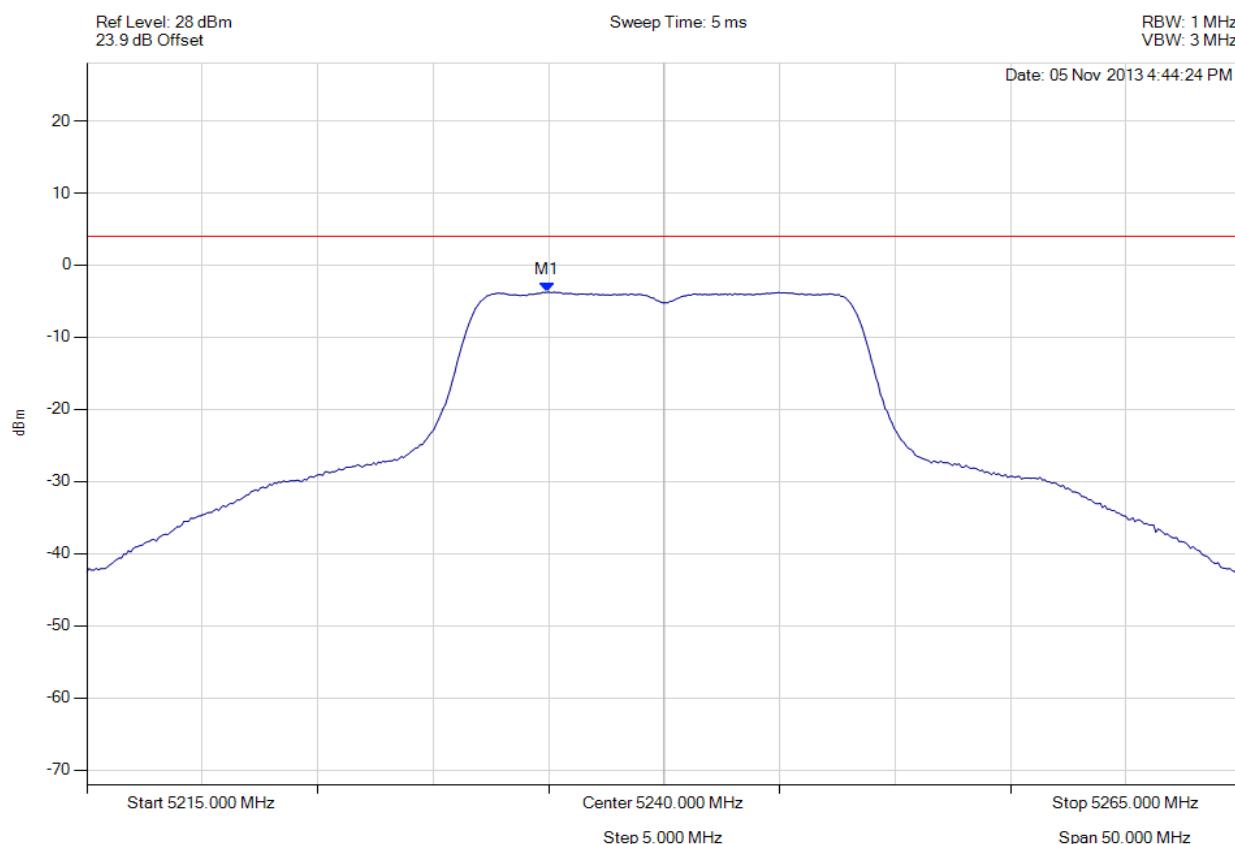

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|--|--------------------------------|---------------------------------------|
| Detector = RMS Sweep Count = 100 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 5234.940 MHz : -3.755 dBm | Limit: ≤ 4.000 dBm Margin: 7.75 dB |

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.3. Peak Excursion Ratio



PEAK EXCURSION RATIO

Variant: 802.11a, Channel: 5180.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

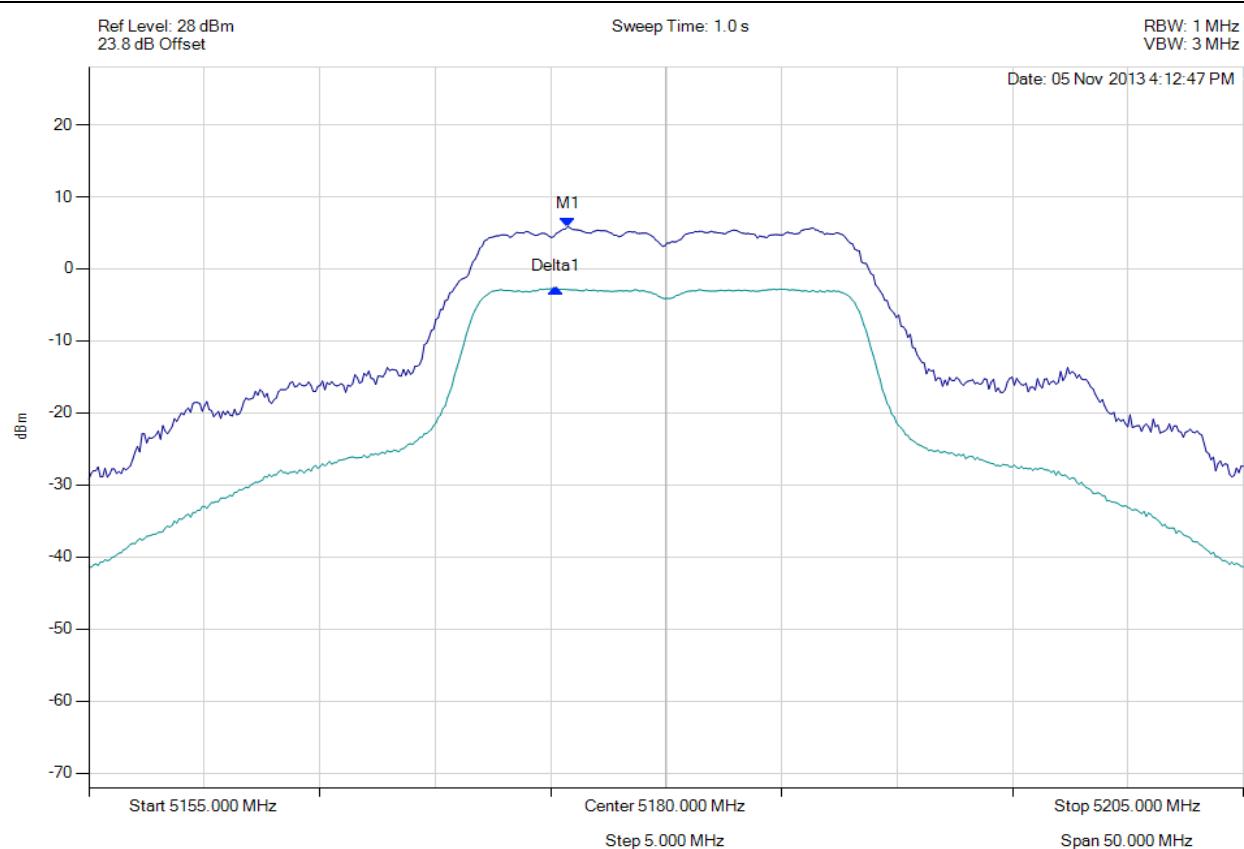

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|--|--|---|
| Sweep Count = 0 RF Atten (dB) = 20 TRACE 1: Detector = MAX PEAK Trace Mode = VIEW TRACE 2: Detector = RMS Trace Mode = VIEW | M1 : 5175.741 MHz : 5.877 dBm Delta1 : -541281 Hz : -8.610 dB | Measured Excursion Ratio: 8.61 dB Limit: 13.0 dB Margin: -4.39 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



575 Boulder Court,
Pleasanton,
CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com