

Test of
Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Test Report Serial No.: COMM71-U1 Rev A



TEST REPORT

FROM



Test of Ear Force i70 RX Wireless Audio Headset

to

To FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: COMM71-U1 Rev A

This report supersedes: None

Applicant: Voyetra Turtle Beach Inc
100 Summit Lake Drive, Suite 100
Valhalla
New York, 10595, USA

Product Function: Wireless Audio Headset

Copy No: pdf Issue Date: 27th February 2014

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.

575 Boulder Court,
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 3 of 129

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF CONTENTS

| | |
|---|-----------|
| 1 ACCREDITATION, LISTINGS & RECOGNITION | 6 |
| 1.1 ACCREDITATION - TESTING | 6 |
| 1.2 RECOGNITION | 7 |
| 1.3 PRODUCT CERTIFICATION | 8 |
| 2 DOCUMENT HISTORY | 9 |
| 3 TEST RESULT SUMMARY | 10 |
| 4 COMPLIANCE STATEMENT | 11 |
| 5 REFERENCES AND MEASUREMENT UNCERTAINTY | 12 |
| 5.1 Normative References | 12 |
| 5.2 Test and Uncertainty Procedures | 13 |
| 6 PRODUCT DETAILS AND TEST CONFIGURATIONS | 14 |
| 6.1 Technical Details | 14 |
| 6.2 Scope of Test Program | 15 |
| 6.3 Equipment Model(s) and Serial Number(s) | 20 |
| 6.4 Antenna Details | 20 |
| 6.5 Cabling and I/O Ports | 20 |
| 6.6 Types of Modulation Supported | 21 |
| 6.7 EUT Configurations | 21 |
| 6.8 Equipment Modifications | 21 |
| 6.9 Deviations from the Test Standard | 21 |
| 7 TEST EQUIPMENT CONFIGURATION(S) | 22 |
| 7.1 Conducted RF Emission Test Set-up | 22 |
| 7.2 Radiated Spurious Emission Test Set-up > 1 GHz | 23 |
| 7.3 Digital Emissions Test Set-up (0.03 – 1 GHz) | 24 |
| 7.4 AC Wireline Emission Test Set-up | 25 |
| 8 TEST SUMMARY | 26 |
| 9 TEST RESULTS | 28 |
| 9.1 Device Characteristics | 28 |
| 9.1.1 <i>Conducted Testing</i> | 28 |
| 9.1.2 <i>Radiated Emission Testing</i> | 59 |
| 9.1.3 <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> | 75 |
| 10 PHOTOGRAPHS | 77 |
| 10.1 Conducted Test Setup | 77 |
| 10.2 Radiated Emissions Test Setup < 1 GHz | 78 |
| 10.3 Radiated Emissions Test Setup > 1 GHz | 79 |
| 11 TEST EQUIPMENT | 80 |
| 12 APPENDIX | 81 |
| A. SUPPORTING INFORMATION | 81 |
| A.1. CONDUCTED TEST PLOTS | 81 |
| A.1.1. <i>6 dB & 99% Bandwidth</i> | 82 |
| A.1.2. <i>Channel Separation</i> | 94 |
| A.1.3. <i>Number of Hopping Frequencies</i> | 101 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 5 of 129

| | | |
|--------|---|-----|
| A.1.4. | <i>Dwell Time</i> | 103 |
| A.1.5. | <i>Peak Power Output</i> | 112 |
| A.1.6. | <i>Conducted Spurious Emissions</i> | 124 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 6 of 129

1 ACCREDITATION, LISTINGS & RECOGNITION

1.1 ACCREDITATION - TESTING

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 27th day of March 2012.

President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to March 31, 2014
Revised February 26, 2014



For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 7 of 129

1.2 RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

| Country | Recognition Body | Status | Phase | Identification No. |
|-----------|--|--------|------------|---|
| USA | Federal Communications Commission (FCC) | TCB | - | US0159 Listing #: 102167 |
| Canada | Industry Canada (IC) | FCB | APEC MRA 2 | US0159 Listing #: 4143A-2 4143A-3 |
| Japan | MIC (Ministry of Internal Affairs and Communication) | CAB | APEC MRA 2 | RCB 210 |
| | VCCI | -- | -- | A-0012 |
| Europe | European Commission | NB | EU MRA | NB 2280 |
| Australia | Australian Communications and Media Authority (ACMA) | CAB | APEC MRA 1 | US0159 |
| Hong Kong | Office of the Telecommunication Authority (OFTA) | CAB | APEC MRA 1 | |
| Korea | Ministry of Information and Communication Radio Research Laboratory (RRL) | CAB | APEC MRA 1 | |
| Singapore | Infocomm Development Authority (IDA) | CAB | APEC MRA 1 | |
| Taiwan | National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI) | CAB | APEC MRA 1 | |
| Vietnam | Ministry of Communication (MIC) | CAB | APEC MRA 1 | |

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 8 of 129

1.3 PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)

TCB Identifier – US0159

Industry Canada – Certification Body

CAB Identifier – US0159

Europe – Notified Body

Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB)

RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 9 of 129

2 DOCUMENT HISTORY

| Document History | | |
|------------------|--------------------------------|---|
| Revision | Date | Comments |
| Draft | | |
| Rev A | 27 th February 2014 | <p>Initial Release</p> <p>The Ear Force i70 RX Wireless Audio Headset is electrically identical to the Ear Force i60 RX Wireless Audio Headset with the addition of automatic noise cancellation (ANC) circuitry to the microphone for improved performance.</p> <p>The radio modules were tested for compliance to the requirements of the standard by MiCOM Labs and results reported in MiCOM Labs test report COMM38-U2. This report includes conducted RF data that was originally reported in MiCOM Labs test report COMM38-U2 with the addition of radiated emissions testing and spot checks on conducted results to verify continued compliance.</p> |
| | | |
| | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 10 of 129

3 TEST RESULT SUMMARY

| | | | |
|---------------|--|------------|---|
| Manufacturer: | Voyetra Turtle Beach Inc 100 Summit Lake Drive, Suite 100 Valhalla New York, 10595, USA | Tested By: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566, USA |
| EUT: | Wireless Audio Headset | Telephone: | +1 925 462 0304 |
| Model: | Ear Force i70 RX (TB300-7030-01) | Fax: | +1 925 462 0306 |
| S/N's: | NA | | |
| Test Date(s): | 18th - 20th December '13 | Website: | www.micomlabs.com |

| STANDARD(S) | TEST RESULTS |
|-------------------------------------|--------------------|
| FCC 47 CFR Part 15.247 & IC RSS-210 | EQUIPMENT COMPLIES |

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



TESTING CERT #2381.01


Graeme Grieve
Quality Manager MiCOM Labs,

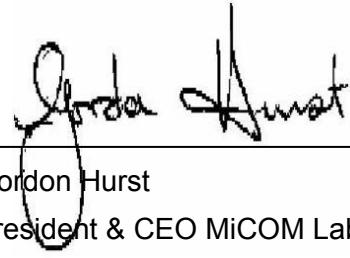
Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 11 of 129

4 COMPLIANCE STATEMENT

| | | | |
|------------|---|--------------------|--|
| Applicant: | Voyetra Turtle Beach Inc 100 Summit Lake Drive, Suite 100 Valhalla, New York, 10595, USA | Tested By: | MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566 USA |
| Product: | Wireless Audio Headset | Telephone: Fax: | +1 925 462 0304 +1 925 462 0306 |
| Model No.: | Ear Force i70 RX (TB300-7030-01) | Website: | www.micomlabs.com |

STANDARD(S)

FCC 47 CFR Part 15.247 & IC RSS-210

MiCOM Labs attests that the above noted models meet the requirements set forth in the above standard(s) based on testing of samples as noted in the Test Result Summary and the manufacturer's declaration of similarity.

Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. The different model numbers identified are declared as being electrically identical by the manufacturer.
2. The manufacturer declared that the only difference between the models is cosmetic; the different models are marketed under separate brands.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 12 of 129

5 REFERENCES AND MEASUREMENT UNCERTAINTY

5.1 Normative References

| REF. | PUBLICATION | YEAR | TITLE |
|-------|-------------------------------|----------------------------|--|
| i. | FCC 47 CFR Part 15, Subpart C | 2013 | Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators |
| ii. | RSS-210 Annex 8 | 2010 | Radio Standards Specification 210, Issue 8, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment |
| iii. | FCC OET KDB 662911 | 4 th April 2011 | Emissions Testing of Transmitters with Multiple Outputs in the Same Band |
| iv. | DA 00-705 | 2000 | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" released March 30, 2000 |
| v. | RSS-GEN | 2010 | Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment |
| vi. | FCC 47 CFR Pt 15, Subpart B | 2012 | 47 CFR Part 15, SubPart B; Unintentional Radiators |
| vii. | ICES-003 | 2004 | Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 4 |
| viii. | ANSI C63.4 | 2009 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ix. | CISPR 22/ EN 55022 | 2008 2006+A1:2007 | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment |
| x. | M 3003 | Edition 2 Jan. 2007 | Expression of Uncertainty and Confidence in Measurements |
| xi. | LAB34 | Edition 1 Aug 2002 | The expression of uncertainty in EMC Testing |
| xii. | ETSI TR 100 028 | 2001 | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics |
| xiii. | A2LA | July 2012 | Reference to A2LA Accreditation Status – A2LA Advertising Policy |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 13 of 129

5.2 Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 14 of 129

6 PRODUCT DETAILS AND TEST CONFIGURATIONS

6.1 Technical Details

| Details | Description |
|----------------------------------|---|
| Purpose: | Test of the Ear Force i70 RX Wireless Audio Headset to FCC Part 15.247 and Industry Canada RSS-210 regulations. |
| Applicant: | Voyetra Turtle Beach Inc 100 Summit Lake Drive, Suite 100 Valhalla New York, 10595, USA |
| Manufacturer: | As applicant. |
| Laboratory performing the tests: | MiCOM Labs, Inc. 575 Boulder Court, Pleasanton, California 94566 USA |
| Test report reference number: | COMM71-U1 Rev A |
| Date EUT received: | 18 th December 2013 |
| Standard(s) applied: | FCC 47 CFR Part 15.247 & IC RSS-210 |
| Dates of test (from - to): | 18th - 20th December '13 |
| No of Units Tested: | Two |
| Type of Equipment: | Wireless Audio Headset |
| Manufacturers Trade Name: | Ear Force |
| Model(s): | Ear Force i70 RX (TB300-7030-01) |
| Location for use: | Indoor |
| Declared Frequency Range(s): | 2400 - 2483.5 MHz |
| Hardware Rev | 1.0 |
| Software Rev | PP |
| Rated Input Voltage and Current: | 3.7 Vdc (Battery) |
| Operating Temperature Range: | Declared range 0° to +50°C at 95% humidity non condensing |
| Equipment Dimensions: | 9 x 6 x 3.5 inches |
| Weight: | 7 oz |
| Primary function of equipment: | Wireless Audio Headset |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 15 of 129

6.2 Scope of Test Program

Ear Force i70 RX Wireless Audio Headset RF Testing

The scope of the test program was to test the Ear Force i70 RX Wireless Audio Headset, in the frequency ranges 2400 - 2483.5 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications.

The Ear Force i70 RX Wireless Audio Headset is electrically identical to the Ear Force i60 RX Wireless Audio Headset with the addition of automatic noise cancellation (ANC) circuitry to the microphone for improved performance.

The radio modules were tested for compliance to the requirements of the standard by MiCOM Labs and results reported in MiCOM Labs test report COMM38-U2. This report includes conducted RF data that was originally reported in MiCOM Labs test report COMM38-U2 with the addition of radiated emissions testing and spot checks on conducted results to verify continued compliance.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Ear Force i70 RX Wireless Audio Headset




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Ear Force i70 RX Wireless Audio Headset – Bluetooth and Battery PCB




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Ear Force i70 RX Wireless Audio Headset – Bluetooth Chip

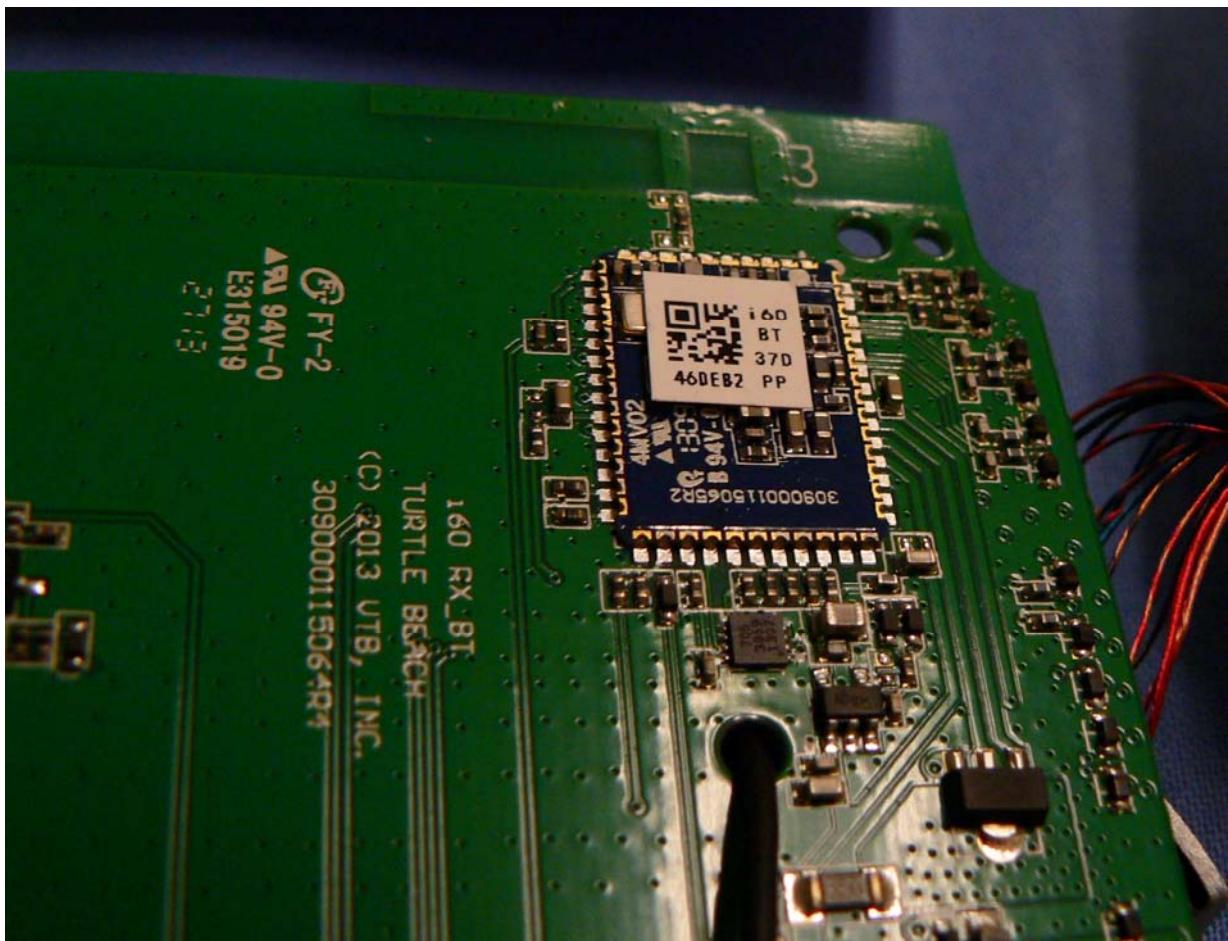

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Ear Force i70 RX Wireless Audio Headset – WiFi Board

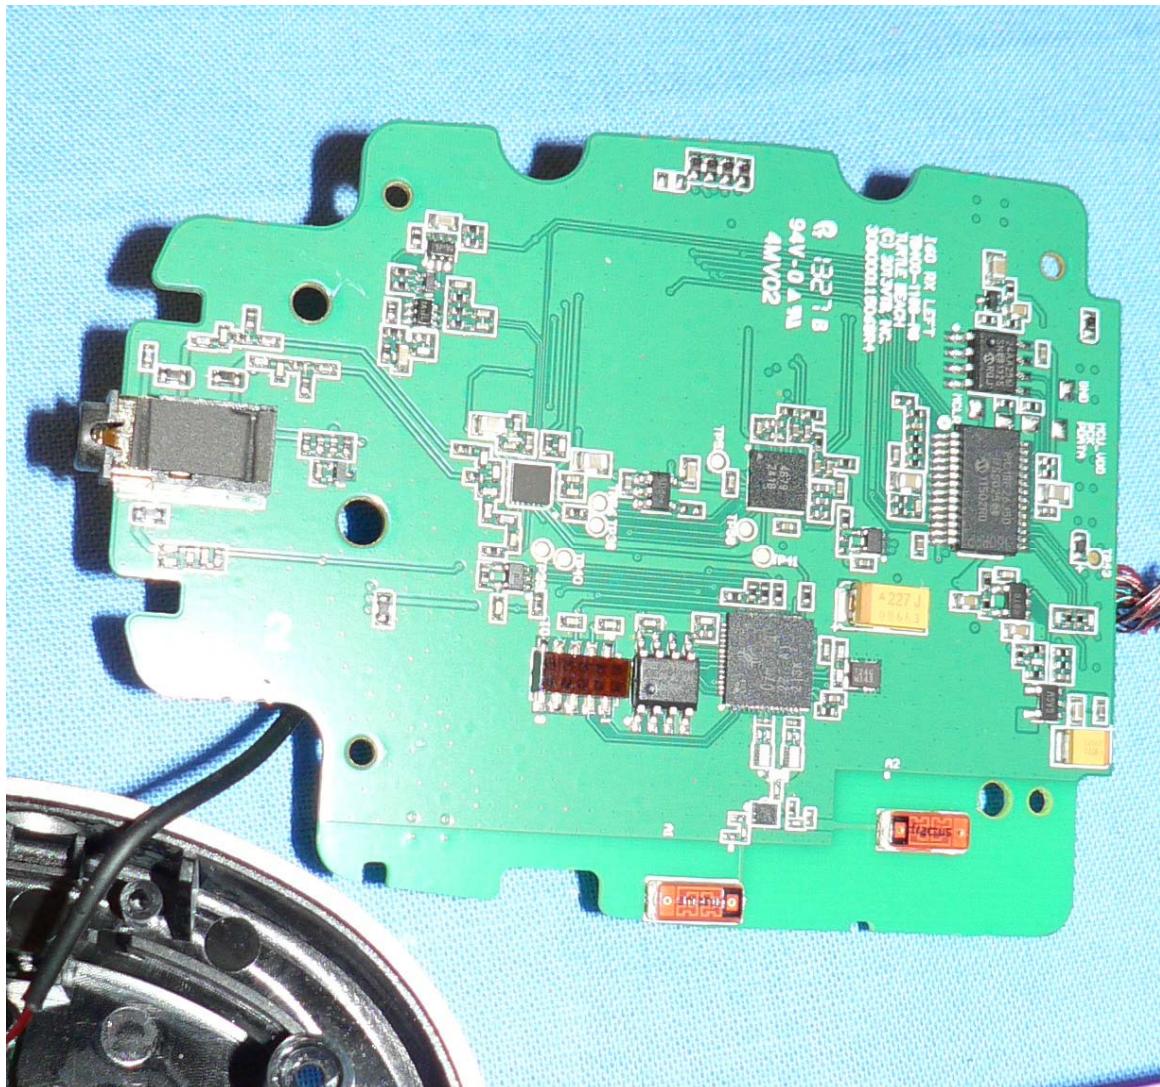

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3 Equipment Model(s) and Serial Number(s)

| Equipment Type | Equipment Description (Including Brand Name) | Mfr | Model No. | Serial No. |
|----------------|--|----------------------|------------------|------------|
| EUT | Wireless Audio Headset | Voyetra Turtle Beach | Ear Force i70 RX | NA |
| Support | Laptop PC | Apple | MacBook Air | None |

6.4 Antenna Details

| Antenna Type | Manufacturer | Model Number | Antenna Gain (dBi) | |
|-------------------------------|--------------|------------------|--------------------|-------|
| | | | 2.4 GHz | 5 GHz |
| On Board Folded F - Bluetooth | Turtle Beach | PCB | 2.8 | -- |
| Chip | Fractus | FR05-S1-NO-1-004 | -1.5 | -- |
| Chip | Fractus | FR05-S1-NO-1-004 | -- | 3.3 |

6.5 Cabling and I/O Ports

Number and type of I/O ports

1. 1 x USB (charge only)
2. 1 x 3.5 mm Analog Audio Input

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.6 Types of Modulation Supported

| Operational Mode(s) (802.15.2) | Packet type | Date Rate (Mbits/s) | Frequencies (MHz) |
|---|-------------|------------------------|-------------------------|
| FHSS: GFSK $\pi/4$ DQPSK 8DPSK | DH1 | 1, 2, 3 | 2,402 2,441 2,480 |
| | DH3 | 1, 2, 3 | |
| | DH5 | 1, 2, 3 | |

6.7 EUT Configurations

| Band (GHz) | Mode | Freq Band (MHz) | Freq Range (MHz) | Low Ch. | Mid Ch. | High Ch. | # Ch. | Ch. Spacing (MHz) |
|---------------|-----------|--------------------|------------------------|------------|------------|-------------|----------|-------------------------|
| 2.4 | Bluetooth | 2400-2483.5 | 2402-2480 | 2402 | 2441 | 2480 | 79 | 1 MHz |

6.8 Equipment Modifications

None.

6.9 Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

7 TEST EQUIPMENT CONFIGURATION(S)


7.1 Conducted RF Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.1.1. 20 dB Bandwidth
2. Section 6.1.1.2. Carrier Frequency Separation
3. Section 6.1.1.3. Number of Hopping Frequencies
4. Section 6.1.1.4. Time of Occupancy (Dwell Time)
5. Section 6.1.1.5 Channel Occupancy
6. Section 6.1.1.5 Peak Output Power
7. Section 6.1.1.7 Band-Edge
8. Section 6.1.1.8 Spurious RF Conducted – Transmitter
9. Section 6.1.1.9 Spurious RF Conducted - Receiver

Conducted Test Set-Up Pictorial Representation

Test Measurement set up

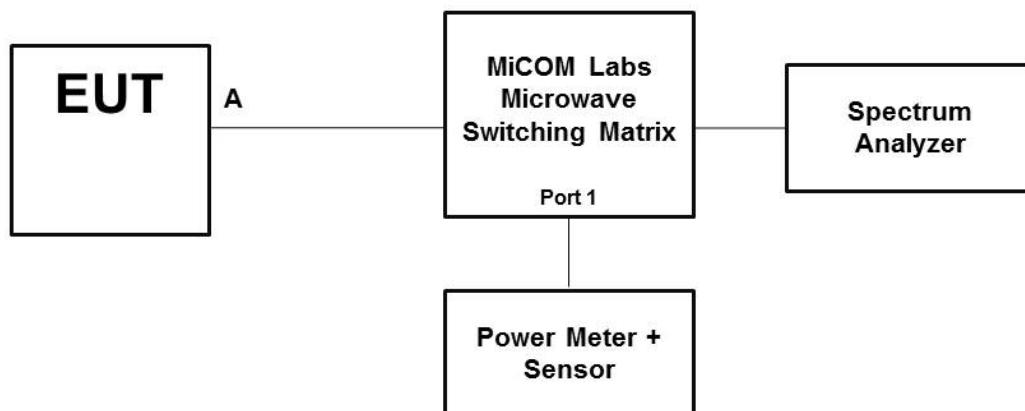


Conducted Test Measurement Setup

7.2 Radiated Spurious Emission Test Set-up > 1 GHz

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.1.

Radiated Emission Measurement Setup – Above 1 GHz

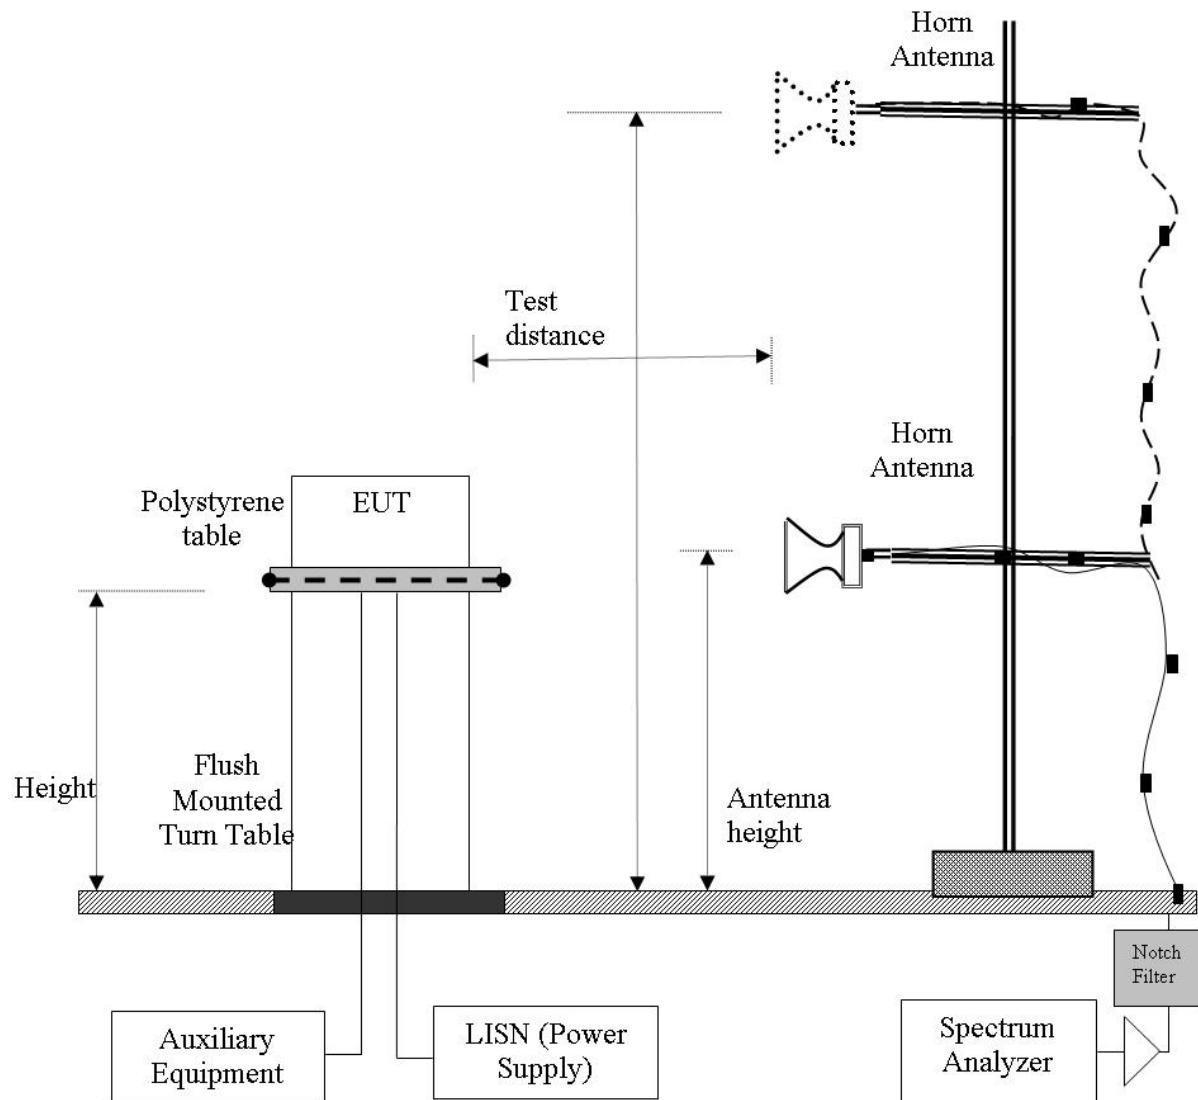


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.3 Digital Emissions Test Set-up (0.03 – 1 GHz)

The following tests were performed using the conducted test set-up shown in the diagram below.

1. Section 6.1.2.2.

Digital Emission Measurement Setup – Below 1 GHz

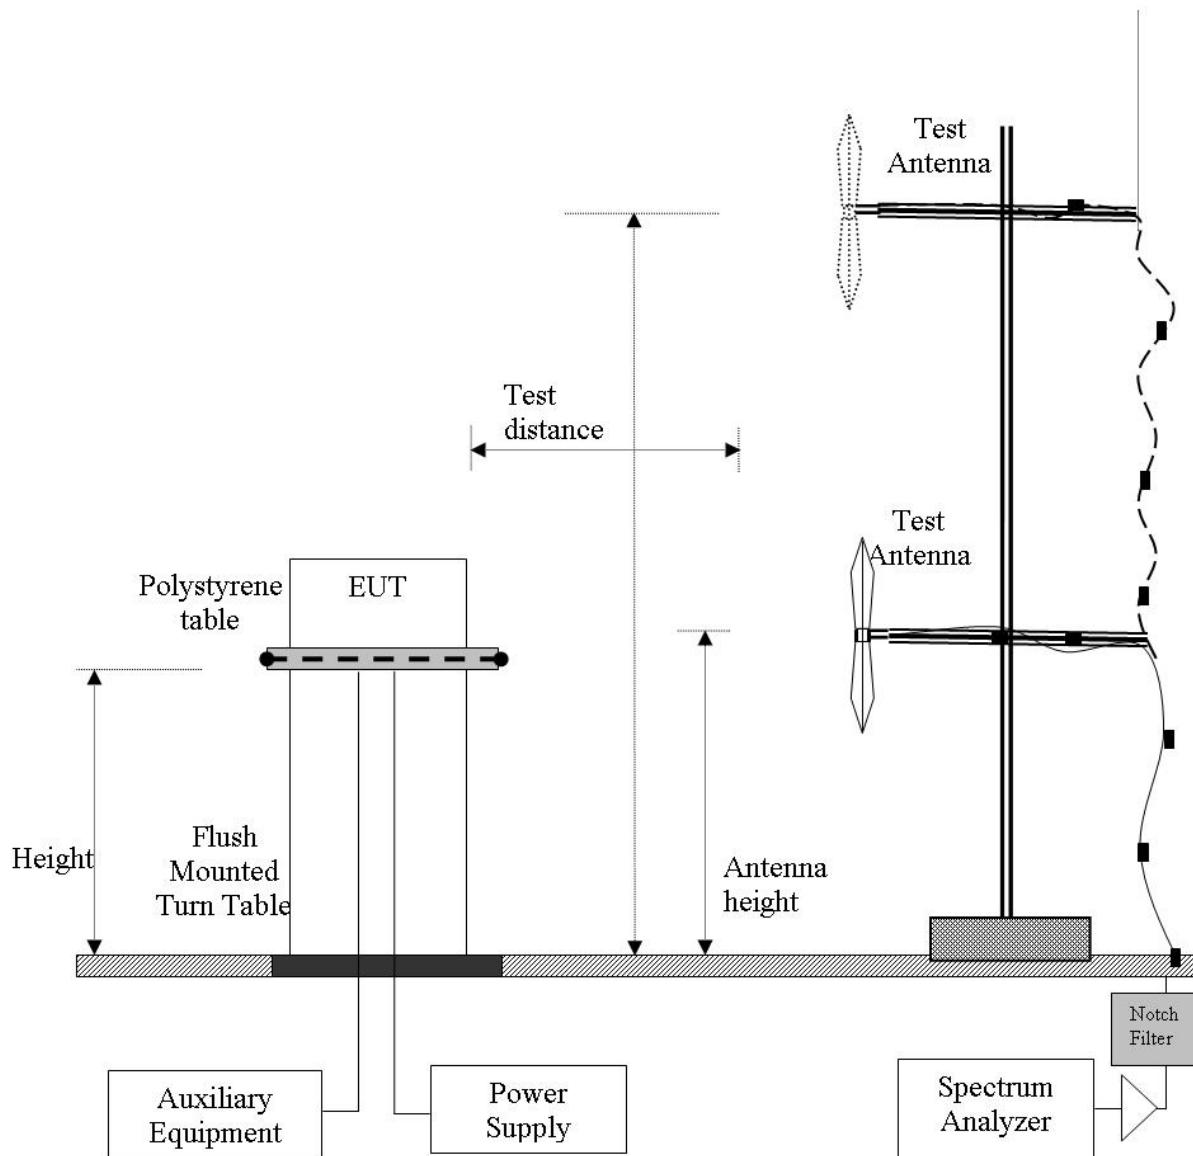


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.4 AC Wireline Emission Test Set-up

The following tests were performed using the conducted test set-up shown in the diagram below.

Not Required EUT not powered by AC.

1. Section 6.1.3 AC Wireline Conducted Emissions

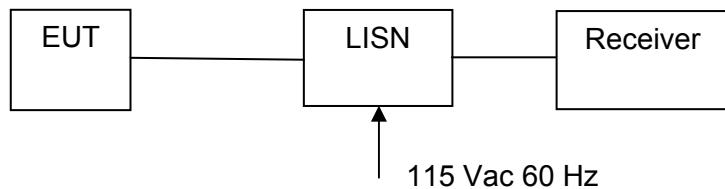

Measurement Setup for Conducted Emissions Test

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 26 of 129

8 TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Note: as this is an Enhanced Data Rate (EDR) Bluetooth Device.

| Section(s) | Test Items / Description | Condition | Result | Test Report Section |
|---|---------------------------------|-----------|----------|---------------------|
| 15.247(a)(1) A8.1(a) 4.4 | 20 dB Bandwidths | Conducted | Complies | 9.1.1.1 |
| 15.247(a)(1) A8.1(d) | Carrier Frequency Separation | Conducted | Complies | 9.1.1.2 |
| 15.247(a)(1) A8.1(d) | Number of Hopping Frequencies | Conducted | Complies | 9.1.1.3 |
| 15.247(a)(1)(iii) A8.1(d) | Time of Occupancy (Dwell Time) | Conducted | Complies | 9.1.1.4 |
| 15.247(a)(1)(iii) A8.1(d) | Channel Occupancy | Conducted | Complies | 9.1.1.5 |
| 15.247(b)(2) A8.4(2) | Peak Output Power | Conducted | Complies | 9.1.1.6 |
| 15.247(d) A8.5 | Spurious RF Conducted Emissions | Conducted | Complies | 9.1.1.7 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 27 of 129

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210**, and **Industry Canada RSS-Gen**.

| Section(s) | Test Items | Description | Condition | Result | Test Report Section |
|---|--|------------------------------|-----------|--------------------------|---------------------|
| 15.247(d) 15.205 / 15.209 A8.5 2.2 2.6 4.7 | Transmitter Radiated Spurious Emissions | Emissions above 1 GHz | Radiated | Complies | 9.1.2.1 |
| | Radiated Band Edge | Band-edge results | Radiated | Complies | |
| 15.205 / 15.209 2.2 | Radiated Spurious Emissions | Emissions <1 GHz (30M-1 GHz) | Radiated | Complies | 9.1.2.2 |
| 15.207 7.2.2 | AC Wireline Conducted Emissions 150 kHz–30 MHz | Conducted Emissions | Conducted | N/A EUT is DC powered | 9.1.3 |

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 6.8 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 28 of 129

9 TEST RESULTS

9.1 Device Characteristics

9.1.1 Conducted Testing

9.1.1.1 20 dB Bandwidth

| Conducted Test Conditions for 20 dB Bandwidth | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 18.0 - 27.5 |
| Test Heading: | 20 dB Bandwidth | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |
| Test Procedure for 20 dB Bandwidth Measurement The bandwidth at 20 dB was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate centre frequency. Although there are no limits for 20 dB bandwidth for frequency hopping systems in the 2400-2483.5 MHz band. The 20 dB bandwidth is required to calculate the carrier frequency separation limits. | | | |

The EUT was tested at the lowest and highest data rate available (1-3 Mbits/s) for each packet type DH1, DH5.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 29 of 129

DH1, 1 Mbs/sec

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.15 DH1 | Duty Cycle (%): | 100 |
| Data Rate: | DH1 | Antenna Gain (dBi): | Not Applicable |
| Modulation: | GFSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 20 dB Bandwidth (MHz) | | | | Maximum 20 dB Bandwidth (MHz) | | |
|-----------------------|---------------------------------------|----------|----------|----------|--------------------------------------|--|--|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | | | |
| 2402.0 | 0.842 | | | | 0.842 | | |
| 2441.0 | 0.836 | | | | 0.836 | | |
| 2480.0 | 0.836 | | | | 0.836 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 30 of 129

DH5, 1 Mbs/sec

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.15 DH5 | Duty Cycle (%): | 100 |
| Data Rate: | DH5 | Antenna Gain (dBi): | Not Applicable |
| Modulation: | GFSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 20 dB Bandwidth (MHz) | | | | Maximum 20 dB Bandwidth (MHz) | | |
|-----------------------|---------------------------------------|----------|----------|----------|--------------------------------------|--|--|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | | | |
| 2402.0 | 0.860 | | | | 0.860 | | |
| 2441.0 | 0.860 | | | | 0.860 | | |
| 2480.0 | 0.860 | | | | 0.860 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 31 of 129

3-DH1, 3 Mbs/sec

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802.15 3-DH1 | Duty Cycle (%): | 100 |
| Data Rate: | 3-DH1 | Antenna Gain (dBi): | Not Applicable |
| Modulation: | 8DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 20 dB Bandwidth (MHz) | | | | Maximum 20 dB Bandwidth (MHz) | | |
|-----------------------|---------------------------------------|----------|----------|----------|--------------------------------------|--|--|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | | | |
| 2402.0 | 1.154 | | | | 1.154 | | |
| 2441.0 | 1.142 | | | | 1.142 | | |
| 2480.0 | 1.142 | | | | 1.142 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 32 of 129

3-DH5, 3 Mbs/sec

Equipment Configuration for 6 dB & 99% Bandwidth

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802 | Duty Cycle (%): | 100 |
| Data Rate: | 3-DH5 | Antenna Gain (dBi): | Not Applicable |
| Modulation: | 8-DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Measured 99% Bandwidth (MHz) | | | | Maximum 20 dB Bandwidth (MHz) | | |
|-----------------------|-------------------------------------|----------|----------|----------|--------------------------------------|--|--|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | | | |
| 2402.0 | 1.154 | | | | 1.154 | | |
| 2441.0 | 1.160 | | | | 1.160 | | |
| 2480.0 | 1.160 | | | | 1.160 | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limits

§15.247 (a)

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals

RSS-210 §A8.1

a. The bandwidth of a frequency hopping channel is the -20 dB emission bandwidth, measured with the hopping stopped. The system radio frequency (RF) bandwidth is equal to the channel bandwidth multiplied by the number of channels in the hopset. The hopset shall be such that the near-term distribution of frequencies appears random, with sequential hops randomly distributed in both direction and magnitude of change in the hopset, while the long-term distribution appears evenly distributed.

b. Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400–2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 34 of 129

9.1.1.2 Carrier Frequency Separation

| Conducted Test Conditions for Carrier Frequency Separation | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 18.0 – 24.0 |
| Test Heading: | Carrier Frequency Separation | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(1) | Pressure (mBars): | 999 - 1004 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |

Test Procedure for Carrier Frequency Separation Measurement

The EUT must have its hopping function enabled.

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure carrier frequency separation. The Span was set wide enough to capture two adjacent peaks. The resolution bandwidth (RBW) was set to $\geq 1\%$ of the span, video bandwidth (VBW) \geq RBW, peak detector selected and max hold trace selected. After the trace is stabilized use marker delta function to determine the separation between adjacent channels.

The limit is $> 2/3$ of the 20 dB bandwidth.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 35 of 129

Equipment Configuration for Carrier Frequency Separation

| | | | |
|--------------------------------|-------------------------------------|-------------------------------|----------------|
| Variant: | 802.15.2 | Duty Cycle (%): | 100% |
| Data Rate: | 1-3 Mbit/s | Antenna Gain (dBi): | 2.8 |
| Modulation: | GFSK,π/4 DQPSK, 8DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | N/A | | |
| Engineering Test Notes: | all 3 supported modes were measured | | |

Test Measurement Results

| Centered on Channel | Center Frequency | Packet Type | Chan Separation | Maximum 20 dB Bandwidth | Limit | Result |
|---------------------|------------------|-------------|-----------------------|-------------------------|---------|--------|
| | | | MHz | MHz | MHz | |
| 39 | 2441 | DH1 | 1.022 | 0.842 | > 1 MHz | Pass |
| 39 | 2441 | DH3 | 1.034 | 0.845 | > 1 MHz | Pass |
| 39 | 2441 | DH5 | 1.046 | 0.859 | > 1 MHz | Pass |
| 39 | 2441 | 2-DH1 | 1.022 | 1.004 | > 1 MHz | Pass |
| 39 | 2441 | 2-DH5 | 1.016 | 1.002 | > 1 MHz | Pass |
| 39 | 2441 | 3-DH1 | 1.010 | 1.142 | > 1 MHz | Pass |
| 39 | 2441 | 3-DH5 | 1.016 | 1.160 | > 1 MHz | Pass |

Traceability to Industry Recognized Test Methodologies

Measurement Uncertainty: ±2.81 dB (Spectrum/Amplitude), ±0.86 ppm (Frequency)

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 36 of 129

Specification

Limits

§15.247 (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

RSS-210 §A8.1

b. Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400–2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Traceability

Test Equipment Used

0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 37 of 129

9.1.1.3 Number of Hopping Frequencies

| Conducted Test Conditions for Number of Hopping Frequencies | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 18.0 - 27.5 |
| Test Heading: | Carrier Hopping Frequencies | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a) | Pressure (mBars): | 999 - 1008 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |
| Test Procedure for Number of Hopping Frequencies The EUT must have its hopping function Enabled The transmitter output was connected to a spectrum analyzer and the span was set for the frequency of operation (Note 2 or more spans may be necessary for an accurate count). RBW \geq 1% of the span, VBW \geq RBW, Sweep = auto, detector function = peak, trace = max hold. Allow trace to stabilize. It may prove necessary to break the span up into sections to clearly show the hopping frequencies. | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 38 of 129

Equipment Configuration for Hopping Sequence

| | | | |
|--------------------------------|-----------------------|-------------------------------|----------------|
| Variant: | 802.15.2 | Duty Cycle (%): | 100% |
| Data Rate: | 1-3 Mbit/s | Antenna Gain (dBi): | 2.8 |
| Modulation: | GFSK,π/4 DQPSK, 8DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | N/A | | |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Number of Hopping Frequencies | | | | Limit | Result |
|-----------------------|--------------------------------------|----------|----------|----------|-------------------------------|---------------|
| | Port(s) | | | | | |
| MHz | a | b | c | d | No of Hopping Channels | |
| NA | 79 | -- | -- | -- | ≥ 20 | Pass |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|----------------------------------|
| Work Instruction: | WI-03 MEASURING RF SPECTRUM MASK |
| Measurement Uncertainty: | ±2.81 dB |
| | |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Number of Hopping Frequencies

§15.247(a)(1)(iii) Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

RSS-210 §A8.1 (d) Frequency hopping systems operating in the 2400–2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Traceability

| Method | Test Equipment Used |
|---------------|--|
| FCC DA 00-175 | 0078, 0134, 0158, 0184, 0193, 0287, 0250, 0252, 0310, 0312 |



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 40 of 129

9.1.1.4 Time of Occupancy (Dwell Time)

| Conducted Test Conditions for Time of Occupancy (Dwell Time) | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Time of Occupancy (Dwell Time) | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |

Test Procedure for Time of Occupancy (Dwell Time)

The EUT must have its hopping function Enabled

The transmitter output was connected to a spectrum analyzer and the span was set for the frequency of operation. RBW = 1 MHz, VBW \geq RBW, Sweep = as necessary to capture the entire dwell time period, detector function = peak, trace = max hold.

If possible use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 41 of 129

| Equipment Configuration for Time of Occupancy (Dwell Time) | | | |
|--|-----------------------|-------------------------------|----------------|
| Variant: | 802.15.2 | Duty Cycle (%): | 100% |
| Data Rate: | 1-3 Mbit/s | Antenna Gain (dBi): | 2.8 |
| Modulation: | GFSK,π/4 DQPSK, 8DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | N/A | | |
| Engineering Test Notes: | | | |

| Centered on Channel | Center Frequency MHz | Packet Type | Dwell Time (Single Channel) | Limit (Single Channel) | Result |
|---------------------|-------------------------|-------------|--------------------------------|---------------------------|--------|
| | | | mS | mS | |
| 0 | 2402 | DH1 | 0.385 | 400 | Pass |
| 0 | 2402 | DH3 | 1.62 | 400 | Pass |
| 0 | 2402 | DH5 | 2.895 | 400 | Pass |
| 0 | 2402 | 2-DH1 | 0.399 | 400 | Pass |
| 0 | 2402 | 2-DH3 | 1.623 | 400 | Pass |
| 0 | 2402 | 2-DH5 | 2.870 | 400 | Pass |
| 0 | 2402 | 3-DH1 | 0.389 | 400 | Pass |
| 0 | 2402 | 3-DH3 | 1.611 | 400 | Pass |
| 0 | 2402 | 3-DH5 | 2.830 | 400 | Pass |

| Traceability to Industry Recognized Test Methodologies |
|---|
| Measurement Uncertainty: ±2.81 dB (Spectrum/Amplitude), ±0.86 ppm (Frequency) |
| |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 42 of 129

Specification

Limits Channel Occupancy (Dwell Time)

§15.247(a)(1)(iii) Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

RSS-210 §A8.1 (d) Frequency hopping systems operating in the 2400–2483.5 MHz band shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Traceability

| Method | Test Equipment Used |
|---------------|--|
| FCC DA 00-175 | 0078, 0134, 0158, 0184, 0193, 0287, 0250, 0252, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 43 of 129

9.1.1.5 Channel Occupancy

| Conducted Test Conditions for Channel Occupancy | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Channel Occupancy | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |
| Test Procedure for Time of Occupancy (Dwell Time) The EUT must have its hopping function Enabled The transmitter output was connected to a spectrum analyzer and the span was set for the frequency of operation. RBW = 1 MHz, VBW ≥ RBW, Sweep = Dwell time x number of hopping frequencies, detector function = peak, trace = max hold. | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 44 of 129

Equipment Configuration for Channel Occupancy

| | | | |
|--------------------------------|--|-------------------------------|----------------|
| Variant: | 802.15.2 | Duty Cycle (%): | 100% |
| Data Rate: | 1-3 Mbit/s | Antenna Gain (dBi): | 2.8 |
| Modulation: | GFSK, $\pi/4$ DQPSK, 8DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | N/A | | |
| Engineering Test Notes: | DH5 Packet types give the highest Dwell time, varying packet length also varies occupancy time | | |

Test Measurement Results

| Centered on Channel | Center Frequency | Data Rate | Packet Length | Dwell Time (Single Channel) | Number of Hops | Channel Occupancy | Limit | Result |
|---------------------|------------------|-----------|---------------|-----------------------------|----------------|-------------------|-------|--------|
| | MHz | Mbs | | | | mS | | |
| 0 | 2402 | 1 | 0 | 0.399 | 348 | 138.85 | 400 | Pass |
| 0 | 2402 | 2 | 510 | 1.653 | 190 | 308.37 | 400 | Pass |
| 0 | 2402 | 3 | 1021 | 2.895 | 126 | 364.77 | 400 | Pass |

Channel Occupancy was performed using a sweep time of 32 seconds ($79 \times 0.4 = 31.6$ seconds).

All packet types were then checked with a sweep time of 1 second to verify the number of times the transmitter occupied Channel 0 (2402 MHz). Each packet type transmitted on channel 0 at the following rates:

DH5 packet length 0 = 11

DH5 packet length 510 = 6

DH5 packet length 1021 = 4

The number of hops = hops per one second \times 31.6 seconds

Finally the channel occupancy time = number of hops \times single channel dwell time

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 45 of 129

Specification Limits

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

RSS-210 §A8.4 (2) For frequency hopping systems operating in the band 2400-2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W. Except as provided in Section A8.4 (5), the e.i.r.p. shall not exceed 4 W..

Laboratory Measurement Uncertainty for Power Measurements

| | |
|-------------------------|----------|
| Measurement uncertainty | ±1.33 dB |
|-------------------------|----------|

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 46 of 129

9.1.1.6 Peak Output Power

| Conducted Test Conditions for Fundamental Emission Output Power | | | | | | |
|---|--|----------------------------|-------------|--|--|--|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 | | | |
| Test Heading: | Emission Output Power | Rel. Humidity (%): | 32 - 45 | | | |
| Standard Section(s): | 15.247 (a)(2) | Pressure (mBars): | 999 - 1004 | | | |
| Reference Document(s): | KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.2 Fundamental Emission Output Power KDB 662911 was implemented for In-band power measurements. The measure and sum technique was implemented in all cases. | | | | | |
| Test Procedure for Fundamental Emission Output Power Measurement The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth. | | | | | | |
| Supporting Information Calculated Power = $A + G + 10 \log (1/x) \text{ dBm}$ $A = \text{Total Power} [10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$, G = Antenna Gain, x = Duty Cycle | | | | | | |

| Equipment Configuration for Peak Output Power | | | | | |
|---|------------------|-------------------------------|----------------|--|--|
| Variant: | 802.15 DH1 & DH5 | Duty Cycle (%): | 100 | | |
| Data Rate: | DH1 | Antenna Gain (dB): | 2.80 | | |
| Modulation: | GFSK | Beam Forming Gain (Y): | Not Applicable | | |
| TPC: | Not Applicable | Tested By: | JMH | | |
| Engineering Test Notes: | | | | | |

| Test Measurement Results DH1 & DH5 | | | | | | | |
|------------------------------------|---------------------------------|---|---|---|----------------------------------|-------|--------|
| Test Frequency | DH1 Measured Output Power (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin |
| | Port(s) | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dBm |
| 2402.0 | 6.52 | | | | 6.52 | 30.00 | -23.48 |
| 2441.0 | 5.99 | | | | 5.99 | 30.00 | -24.01 |
| 2480.0 | 5.74 | | | | 5.74 | 30.00 | -24.26 |

| Test Frequency | DH5 Measured Output Power (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin |
|----------------|---------------------------------|---|---|---|----------------------------------|-------|--------|
| | Port(s) | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dBm |
| 2402.0 | 7.72 | | | | 7.72 | 30.00 | -22.28 |
| 2441.0 | 6.95 | | | | 6.95 | 30.00 | -23.05 |
| 2480.0 | 6.98 | | | | 6.98 | 30.00 | -23.02 |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 47 of 129

Equipment Configuration for Peak Output Power

| | | | |
|--------------------------------|----------------------|-------------------------------|----------------|
| Variant: | 802.15 3-DH1 & 3-DH5 | Duty Cycle (%): | 100 |
| Data Rate: | 3-DH1 & 3-DH5 | Antenna Gain (dBi): | 2.80 |
| Modulation: | 8DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | 3 DH1 Measured Output Power (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin | EUT Power Setting |
|-----------------------|--|----------|----------|----------|---|--------------|---------------|--------------------------|
| | Port(s) | | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dBm | |
| 2402.0 | 2.78 | | | | 2.78 | 30.00 | -27.22 | Max |
| 2441.0 | 2.37 | | | | 2.37 | 30.00 | -27.63 | Max |
| 2480.0 | 2.45 | | | | 2.45 | 30.00 | -27.55 | Max |

| Test Frequency | 3 DH5 Measured Output Power (dBm) | | | | Calculated Total Power Σ Port(s) | Limit | Margin | EUT Power Setting |
|-----------------------|--|----------|----------|----------|---|--------------|---------------|--------------------------|
| | Port(s) | | | | | | | |
| MHz | a | b | c | d | dBm | dBm | dBm | |
| 2402.0 | 4.76 | | | | 4.76 | 30.00 | -25.24 | Max |
| 2441.0 | 4.19 | | | | 4.19 | 30.00 | -25.81 | Max |
| 2480.0 | 4.64 | | | | 4.64 | 30.00 | -25.36 | Max |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---------------------------------|
| Work Instruction: | WI-01 MEASURING RF OUTPUT POWER |
| Measurement Uncertainty: | ±1.33 dB |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 48 of 129

Specification

Limits

§15.247 (b)(1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following.

(1) For frequency hopping systems in the 2400 – 2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 watts.

§ RSS-210 A8.4(2) For frequency hopping systems operating in the 2400-2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted power shall not exceed 0.125 W. Except as provided in Section A8.4 (5), the e.i.r.p. shall not exceed 4 W.

Frequency hopping systems operating in the band 2400 – 2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Traceability

| Method | Test Equipment Used |
|----------------|--|
| FCC DA 00-0705 | 0158, 0193, 0287, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 49 of 129

9.1.1.7 Conducted Spurious Emissions

| Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions | | | |
|---|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 24.0 - 27.5 |
| Test Heading: | Max Unwanted Emission Levels | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (d) | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | KDB 558074 - D01 DTS Measurement Guidance v01: Section 5.4 Maximum Unwanted Emission Levels | | |
| Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot. | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 50 of 129

Equipment Configuration for Transmitter Conducted Spurious Emissions

| | | | |
|--------------------------------|----------------|-------------------------------|----------------|
| Variant: | 802 | Duty Cycle (%): | 100 |
| Data Rate: | 3-DH5 | Antenna Gain (dBi): | Not Applicable |
| Modulation: | 8-DPSK | Beam Forming Gain (Y): | Not Applicable |
| TPC: | Not Applicable | Tested By: | JMH |
| Engineering Test Notes: | | | |

Test Measurement Results

| Test Frequency | Frequency Range | Transmitter Conducted Spurious Emissions (dBm) | | | | | | | |
|-----------------------|------------------------|---|--------------|---------------|--------------|---------------|--------------|---------------|--------------|
| | | Port a | | Port b | | Port c | | Port d | |
| MHz | MHz | SE | Limit | SE | Limit | SE | Limit | SE | Limit |
| 2402.0 | 30.0 - 26000.0 | -46.650 | -25.37 | | | | | | |
| 2441.0 | 30.0 - 26000.0 | -46.493 | -23.44 | | | | | | |
| 2480.0 | 30.0 - 26000.0 | -47.553 | -25.09 | | | | | | |

| Test Frequency | Band-Edge Frequency | Transmitter Conducted Band-Edge Emissions (dBm) | | | | | | | |
|-----------------------|----------------------------|--|--------------|---------------|--------------|---------------|--------------|---------------|--------------|
| | | Port a | | Port b | | Port c | | Port d | |
| MHz | MHz | BE | Limit | BE | Limit | BE | Limit | BE | Limit |
| 2402.0 | 2400.0 | -46.508 | -22.39 | | | | | | |
| 2480.0 | 2483.5 | -46.115 | -22.77 | | | | | | |

Traceability to Industry Recognized Test Methodologies

| | |
|--------------------------|---|
| Work Instruction: | WI-05 MEASUREMENT OF SPURIOUS EMISSIONS |
| Measurement Uncertainty: | =40 GHz ±2.37 dB, > 40 GHz ±4.6 dB |

Note: click the link in the above results matrix to view the plot

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 51 of 129

Specification

Limits Band-Edge

| Lower Limit Band-edge | Upper Limit Band-edge | Limit below highest level of desired power |
|--------------------------|--------------------------|---|
| 2,400 MHz | 2,483.5 MHz | ≥ 20 dB |
| 5725 MHz | 5850 MHz | |

§15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

| | |
|-------------------------|----------|
| Measurement uncertainty | ±2.37 dB |
|-------------------------|----------|

Traceability

| Method | Test Equipment Used |
|---|---|
| Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions' | 0088, 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117. |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 52 of 129

9.1.1.8 Pseudorandom Hopping Frequency Sequence

| Test Conditions for Pseudorandom Hopping Frequency Sequence | | | |
|---|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 18.0 - 27.5 |
| Test Heading: | Pseudorandom Hopping Sequence | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(1) | Pressure (mBars): | 999 - 1004 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |

Pseudorandom Frequency Hopping Sequence

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, in order to demonstrate that the sequence meets the requirement specified in the definition of a frequency hopping spread spectrum system, found in Section (a)(1).

Declaration from the Manufacturer

The hopping sequence is selected according to the Bluetooth standard. There are a total of 79 channels available in the 2.4 GHz band. The Bluetooth standard defines an algorithmic basis for determining the pseudorandom sequence to use.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 53 of 129

Specifications

§15.247 (a) (1)

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 54 of 129

9.1.1.9 Equal Hopping Frequency Use

| Test Conditions for Equal Hopping Frequency Use | | | |
|---|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 18.0 - 27.5 |
| Test Heading: | Equal Hopping Frequency Use | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(1) | Pressure (mBars): | 999 - 1004 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |

Equal Hopping Frequency Use

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event). See Section (a)(1).

Declaration from the Manufacturer

Bluetooth uses a packet based air interface with a fixed timing. Each packet goes out on a different channel in the sequence, so all frequencies in the hopping sequence get used equally.

Specifications

§15.247 (a) (1)

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 55 of 129

9.1.1.10 System Receiver Input Bandwidth

| Test Conditions for System Receiver Input Bandwidth | | | |
|---|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 18.0 - 27.5 |
| Test Heading: | System Receiver Input Bandwidth | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(1) | Pressure (mBars): | 999 - 1004 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |

System Receiver Input Bandwidth

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event). See Section (a)(1).

Declaration from the Manufacturer

Chipset by CSR BT is used in the design and complies with Bluetooth specifications. There are no external channel filters present, but filters are present in the chipset design in order to achieve the receiver sensitivity.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specifications

§15.247 (a) (1)

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

§ RSS-210 A8.1 (b) (b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 57 of 129

9.1.1.11 System Receiver Hopping Capability

| Test Conditions for System Receiver Hopping Capability | | | |
|--|--|----------------------------|-------------|
| Standard: | FCC CFR 47:15.247 | Ambient Temp. (°C): | 18.0 - 27.5 |
| Test Heading: | System Receiver Hopping Capability | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.247 (a)(1) | Pressure (mBars): | 999 - 1004 |
| Reference Document(s): | FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems | | |

System Receiver Hopping Capability

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals. See Section (a)(1).

Declaration from the Manufacturer

A slave device follows the master device's hopping sequence by quickly scanning through channels to find the master's transmission (this is called discovery). It then uses information in that packet and the same algorithmic process described in the standard to determine what the hopping sequence is that the master is using. The slave also synchronizes to the master's transmit packet timing so it knows when to hop.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specifications

§15.247 (a) (1)

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

§ RSS-210 A8.1 (b) (b) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals

9.1.2 Radiated Emission Testing

Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209
Industry Canada RSS-210 §A8.5,
Industry Canada RSS-Gen §4.10

Test Procedure

The worst case highest spectral density radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level} (\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

9.1.2.1 Test Results

| | | | |
|----------------------|---|-----------------------|-----|
| Test Freq. | 2402 MHz | Engineer | JMH |
| Variant | 802.15 | Temp (°C) | 25 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum.(%) | 33 |
| Power Setting | +4 dBm | Press. (mBars) | 998 |
| Antenna | 2.8 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | Results are for the i30 BT radio | | |
| Test Notes 2 | Target set to =+4 dBm, BDR GFSK DH1 Packet Type | | |

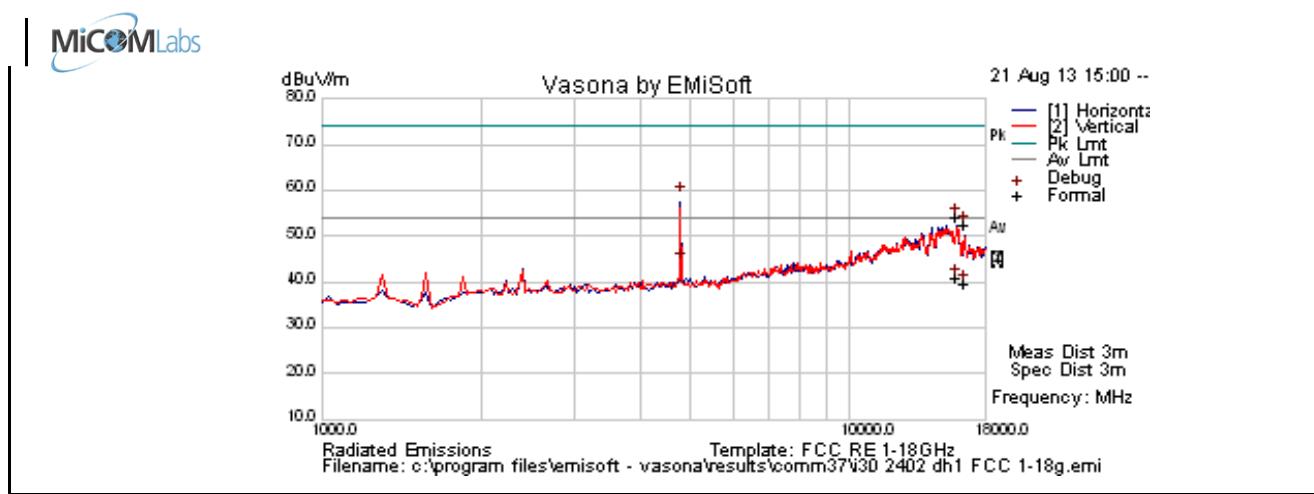


Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 4804.285 | 63.8 | 4.6 | -9.7 | 58.8 | Peak | H | 153 | 317 | 74.0 | -15.2 | Pass | RB |
| 4804.285 | 49.4 | 4.6 | -9.7 | 44.4 | Average | H | 153 | 317 | 54.0 | -9.6 | Pass | RB |
| 15920.802 | 32.0 | 9.0 | -0.1 | 41.0 | Average Max | H | 130 | 317 | 54 | -13.1 | Pass | RB |
| 15920.802 | 45.3 | 9.0 | -0.1 | 54.2 | Peak Max | H | 130 | 317 | 74 | -19.8 | Pass | RB |
| 16449.138 | 29.9 | 9.4 | 0.2 | 39.5 | Average Max | H | 141 | 347 | 54 | -14.5 | Pass | RB |
| 16449.138 | 42.7 | 9.4 | 0.2 | 52.3 | Peak Max | H | 141 | 347 | 74 | -21.7 | Pass | RB |

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

| | | | |
|----------------------|---|-----------------------|-----|
| Test Freq. | 2441 MHz | Engineer | JMH |
| Variant | 802.15 | Temp (°C) | 25 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum. (%) | 33 |
| Power Setting | +4 dBm | Press. (mBars) | 998 |
| Antenna | 2.8 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | Results are for the i30 BT radio | | |
| Test Notes 2 | Target set to =+4 dBm, BDR GFSK DH1 Packet Type | | |

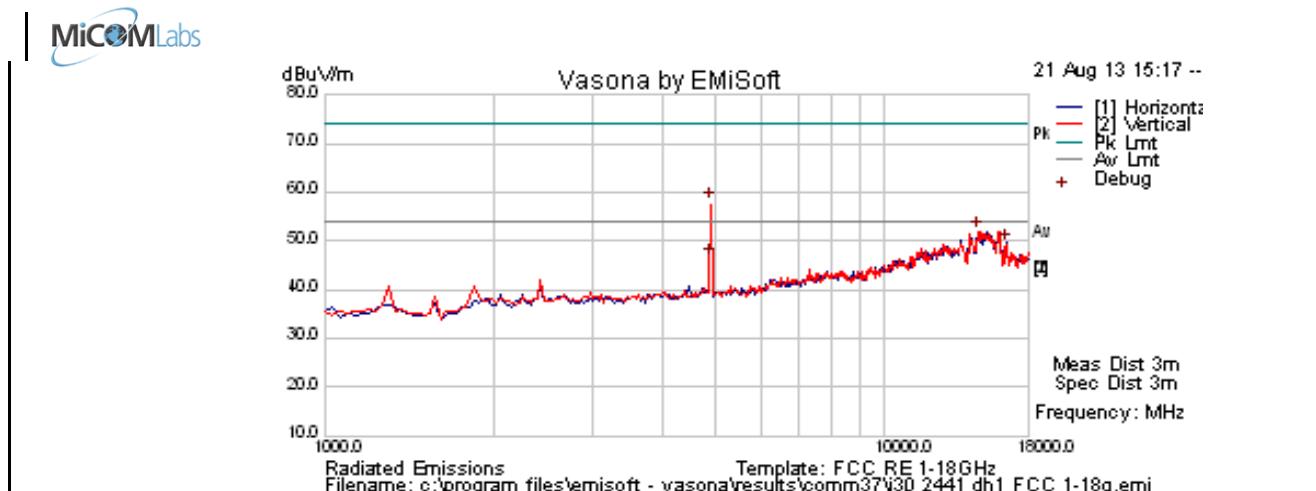


Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|--|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 4881.894 | 63.2 | 4.6 | -9.7 | 58.0 | Peak Max | V | 145 | 41 | 74.0 | -16.0 | Pass | RB |
| 4881.894 | 51.8 | 4.6 | -9.7 | 46.7 | Average Max | V | 145 | 41 | 54 | -7.3 | Pass | RB |
| 14661.323 | 46.2 | 8.4 | -2.6 | 52.0 | Peak [Scan] | V | | | | | | NRB |
| 16466.934 | 39.9 | 9.4 | 0.3 | 49.5 | Peak [Scan] | H | | | | | | NRB |
| Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak | | | | | | | | | | | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

| | | | |
|----------------------|---|-----------------------|-----|
| Test Freq. | 2480 MHz | Engineer | JMH |
| Variant | 802.15 | Temp (°C) | 25 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum.(%) | 33 |
| Power Setting | +4 dBm | Press. (mBars) | 998 |
| Antenna | 2.8 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | Results are for the i30 BT radio | | |
| Test Notes 2 | Target set to =+4 dBm, BDR GFSK DH1 Packet Type | | |

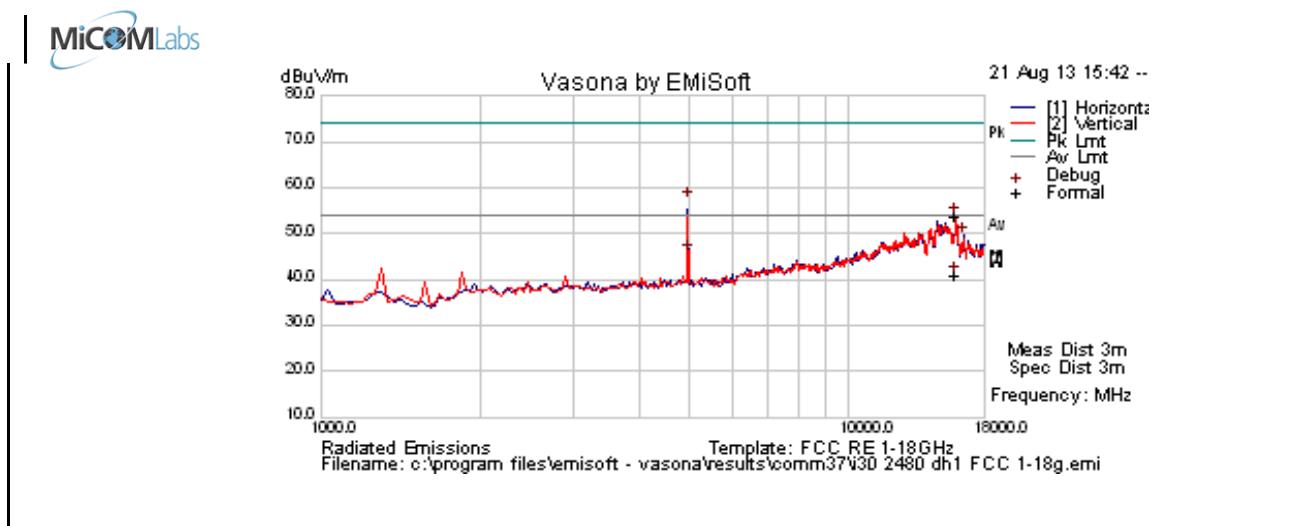

Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 4959.637 | 62.6 | 4.6 | -9.9 | 57.4 | Peak Max | H | 147 | 335 | 74 | -16.6 | Pass | RB |
| 4959.993713 | 50.8 | 4.6 | -9.9 | 45.5 | Average Max | H | 147 | 335 | 54 | -8.5 | Pass | RB |
| 15919.920 | 45.0 | 9.0 | -0.1 | 53.9 | Peak Max | V | 137 | 98 | 74 | -20.1 | Pass | RB |
| 15919.920 | 32.0 | 9.0 | -0.1 | 40.9 | Average Max | V | 137 | 98 | 54 | -13.1 | Pass | RB |
| 16466.104 | 39.9 | 9.4 | 0.3 | 49.6 | Peak [Scan] | | | | | | Pass | NRB |

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission


RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 63 of 129

| | | | |
|----------------------|--|-----------------------|-----|
| Test Freq. | 2402 MHz | Engineer | JMH |
| Variant | 802.15 | Temp (°C) | 25 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum.(%) | 33 |
| Power Setting | +4 dBm | Press. (mBars) | 998 |
| Antenna | 2.8 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | Results are for the i30 BT radio | | |
| Test Notes 2 | Target set to +4 dBm, EDR 8 DPSK 3-DH5 Packet Type | | |

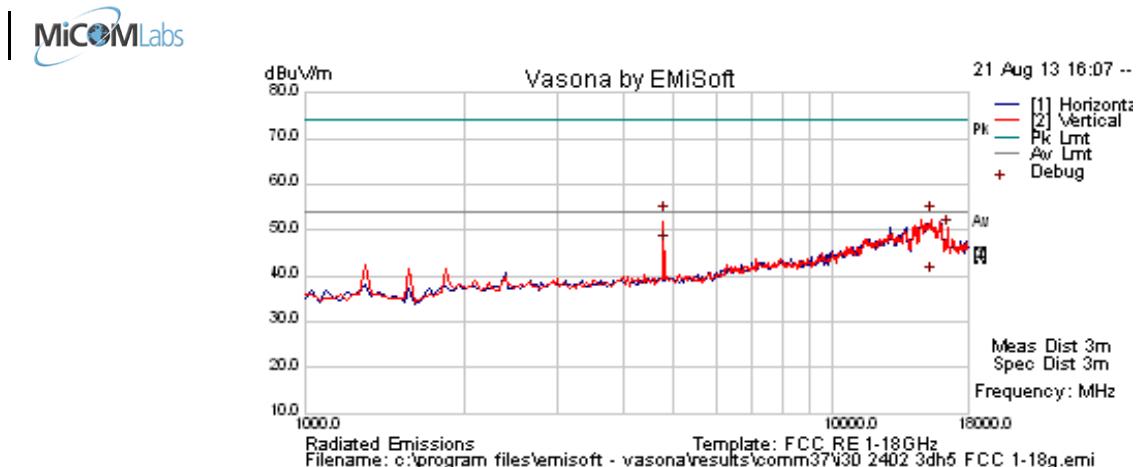


Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 4803.447 | 58.5 | 4.6 | -9.7 | 53.4 | Peak Max | H | 178 | 315 | 74.0 | -20.6 | Pass | RB |
| 4803.447 | 51.8 | 4.6 | -9.7 | 46.8 | Average Max | H | 178 | 315 | 54.0 | -7.2 | Pass | RB |
| 15373.708 | 32.2 | 8.7 | -0.7 | 40.2 | Average Max | V | 152 | 51 | 54 | -13.8 | Pass | RB |
| 15373.708 | 45.5 | 8.7 | -0.7 | 53.5 | Peak Max | V | 152 | 51 | 74 | -20.5 | Pass | RB |
| 16466.934 | 40.9 | 9.4 | 0.3 | 50.5 | Peak [Scan] | V | | | | | | NRB |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

DH5 2400 MHz Band Edge

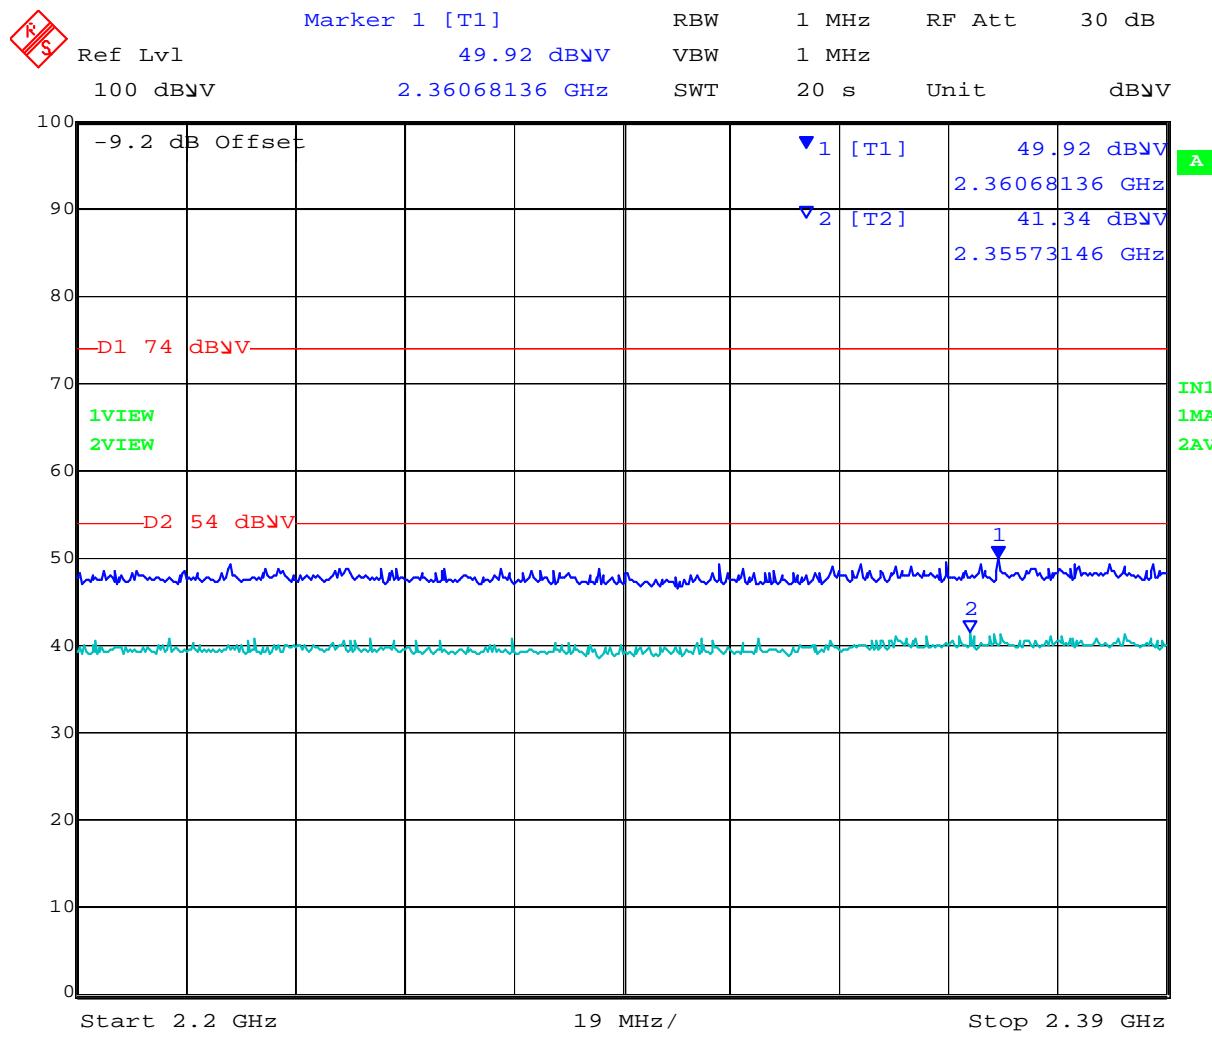


Date: 21.AUG.2013 17:03:57

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 65 of 129

| | | | |
|----------------------|--|-----------------------|-----|
| Test Freq. | 2441 | Engineer | JMH |
| Variant | 802.15 | Temp (°C) | 25 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum. (%) | 33 |
| Power Setting | +4 dBm | Press. (mBars) | 998 |
| Antenna | 2.8 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | Results are for the i30 BT radio | | |
| Test Notes 2 | Target set to +4 dBm, EDR 8 DPSK 3-DH5 Packet Type | | |

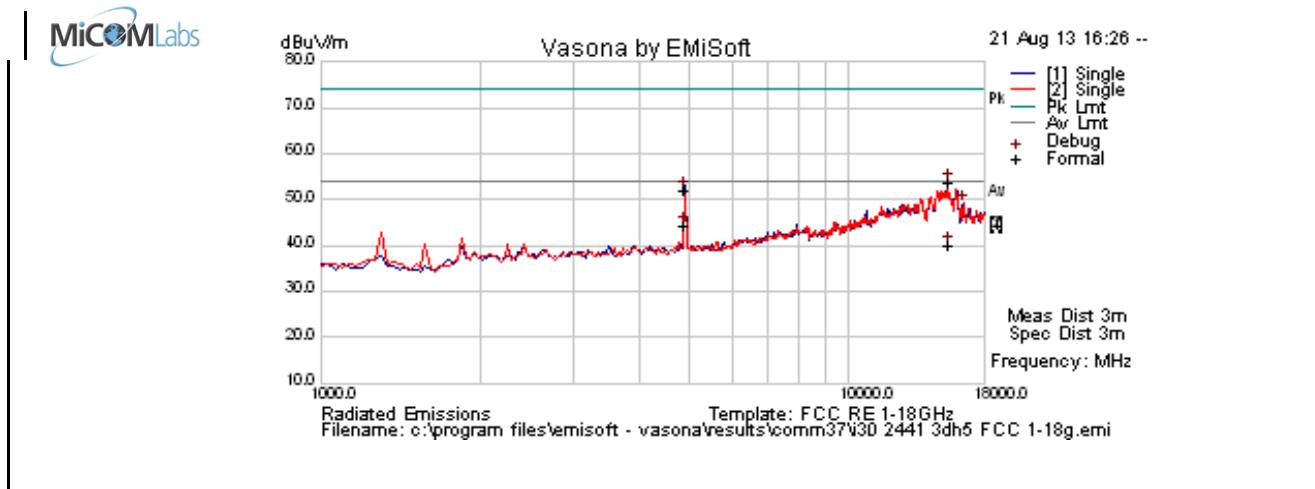


Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 4881.713 | 57.0 | 4.6 | -9.7 | 51.9 | Peak Max | H | 176 | 212 | 74.0 | -22.1 | Pass | RB |
| 4881.713 | 49.3 | 4.6 | -9.7 | 44.2 | Average Max | H | 176 | 212 | 54.0 | -9.8 | Pass | RB |
| 15404.610 | 32.0 | 8.8 | -0.6 | 40.2 | Average Max | V | 131 | 7 | 54 | -13.8 | Pass | RB |
| 15404.610 | 45.6 | 8.8 | -0.6 | 53.7 | Peak Max | V | 131 | 7 | 74 | -20.3 | Pass | RB |
| 16432.866 | 39.7 | 9.3 | 0.2 | 49.2 | Peak [Scan] | H | | | | | | NRB |

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

| | | | |
|----------------------|--|-----------------------|-----|
| Test Freq. | 2480 | Engineer | JMH |
| Variant | 802.15 | Temp (°C) | 25 |
| Freq. Range | 1000 MHz - 18000 MHz | Rel. Hum. (%) | 33 |
| Power Setting | +4 dBm | Press. (mBars) | 998 |
| Antenna | 2.8 dBi | Duty Cycle (%) | 100 |
| Test Notes 1 | Results are for the i30 BT radio | | |
| Test Notes 2 | Target set to +4 dBm, EDR 8 DPSK 3-DH5 Packet Type | | |

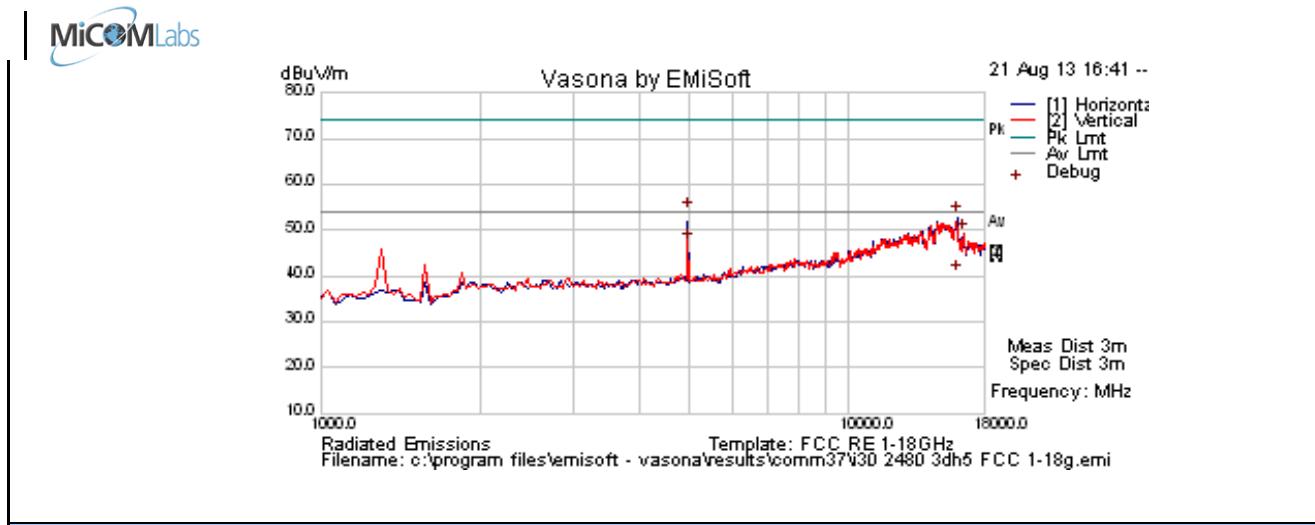

Formally measured emission peaks


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|----------|
| 4959.407056 | 59.4 | 4.6 | -9.9 | 54.1 | Peak Max | H | 138 | 328 | 74.0 | -19.9 | Pass | RB |
| 4959.407 | 52.6 | 4.6 | -9.9 | 47.4 | Average Max | H | 138 | 328 | 54 | -6.6 | Pass | RB |
| 15982.770 | 31.2 | 9.1 | 0.1 | 40.3 | Average Max | H | 147 | 87 | 54 | -13.7 | Pass | RB |
| 15982.770 | 44.1 | 9.1 | 0.1 | 53.3 | Peak Max | H | 147 | 87 | 74 | -20.7 | Pass | RB |
| 16466.934 | 39.8 | 9.4 | 0.3 | 49.4 | Peak [Scan] | V | | | | | | NRB |

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission

RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


DH5 2483.5 MHz Band Edge

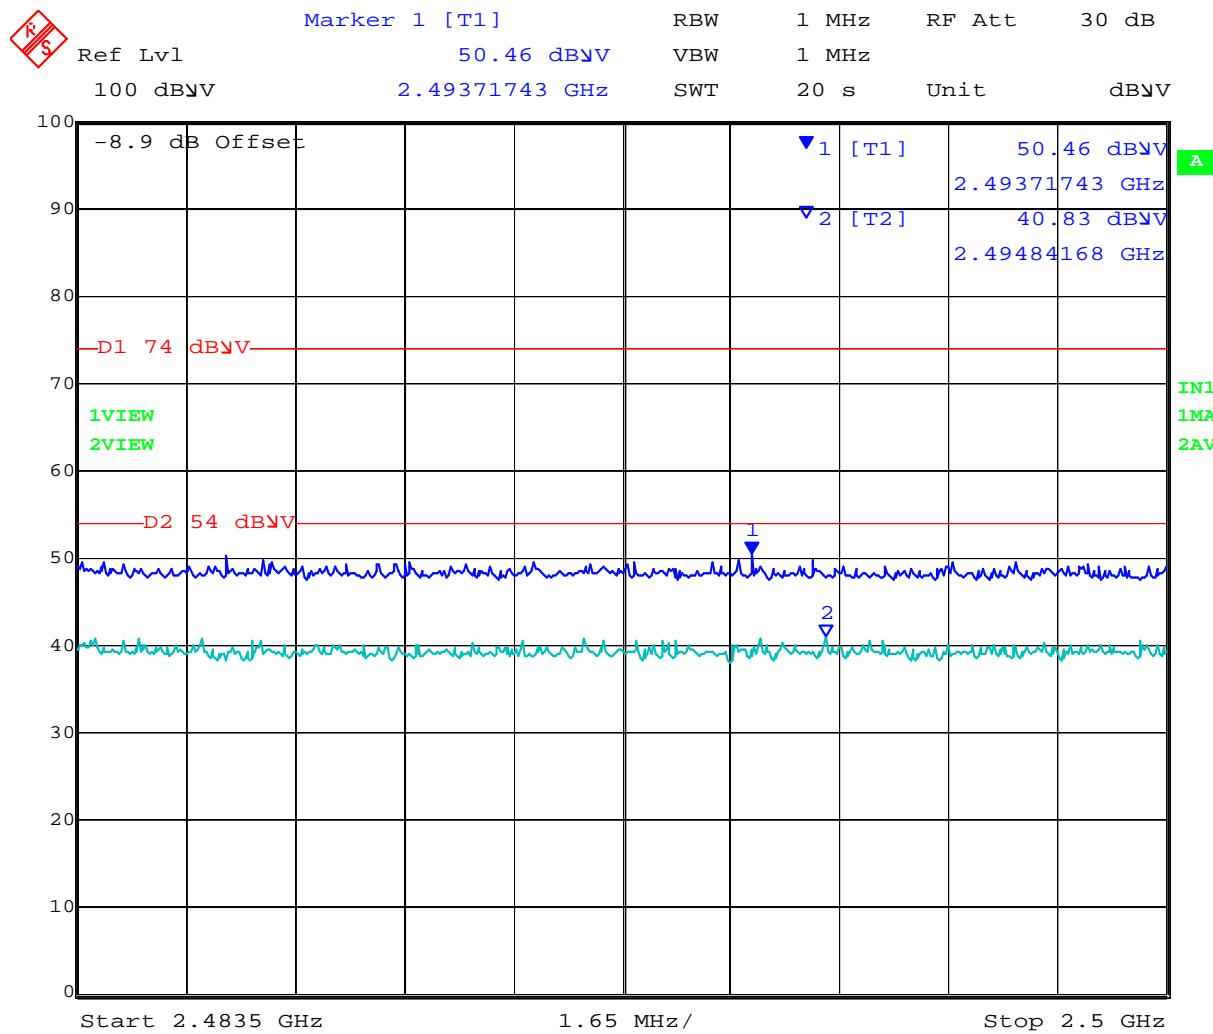

Date: 21.AUG.2013 16:56:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


Hopping Band Edge: 2390-2400

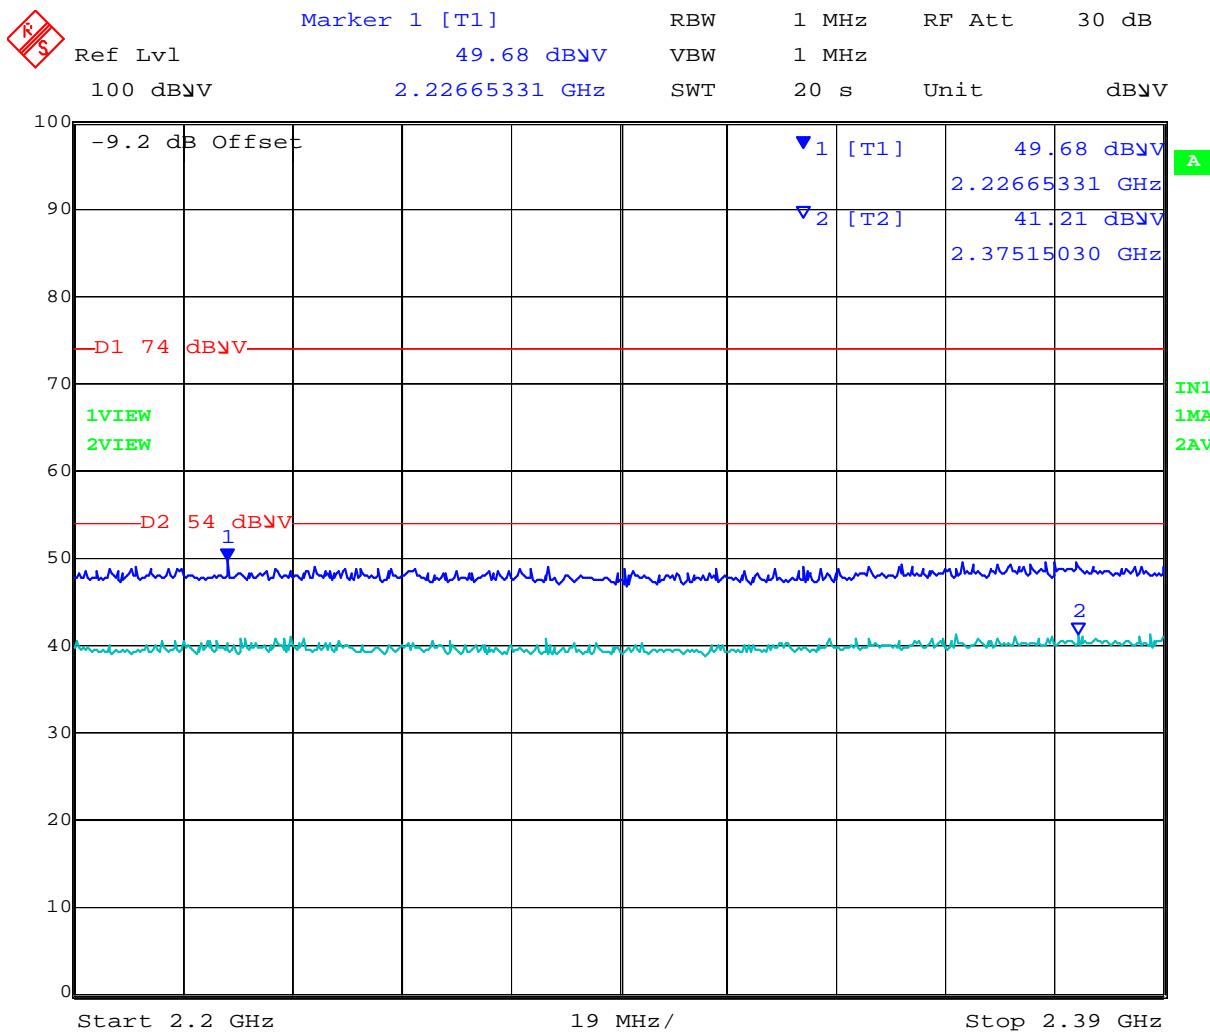

Date: 21.AUG.2013 17:10:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Hopping Band Edge: 2483.5-2500

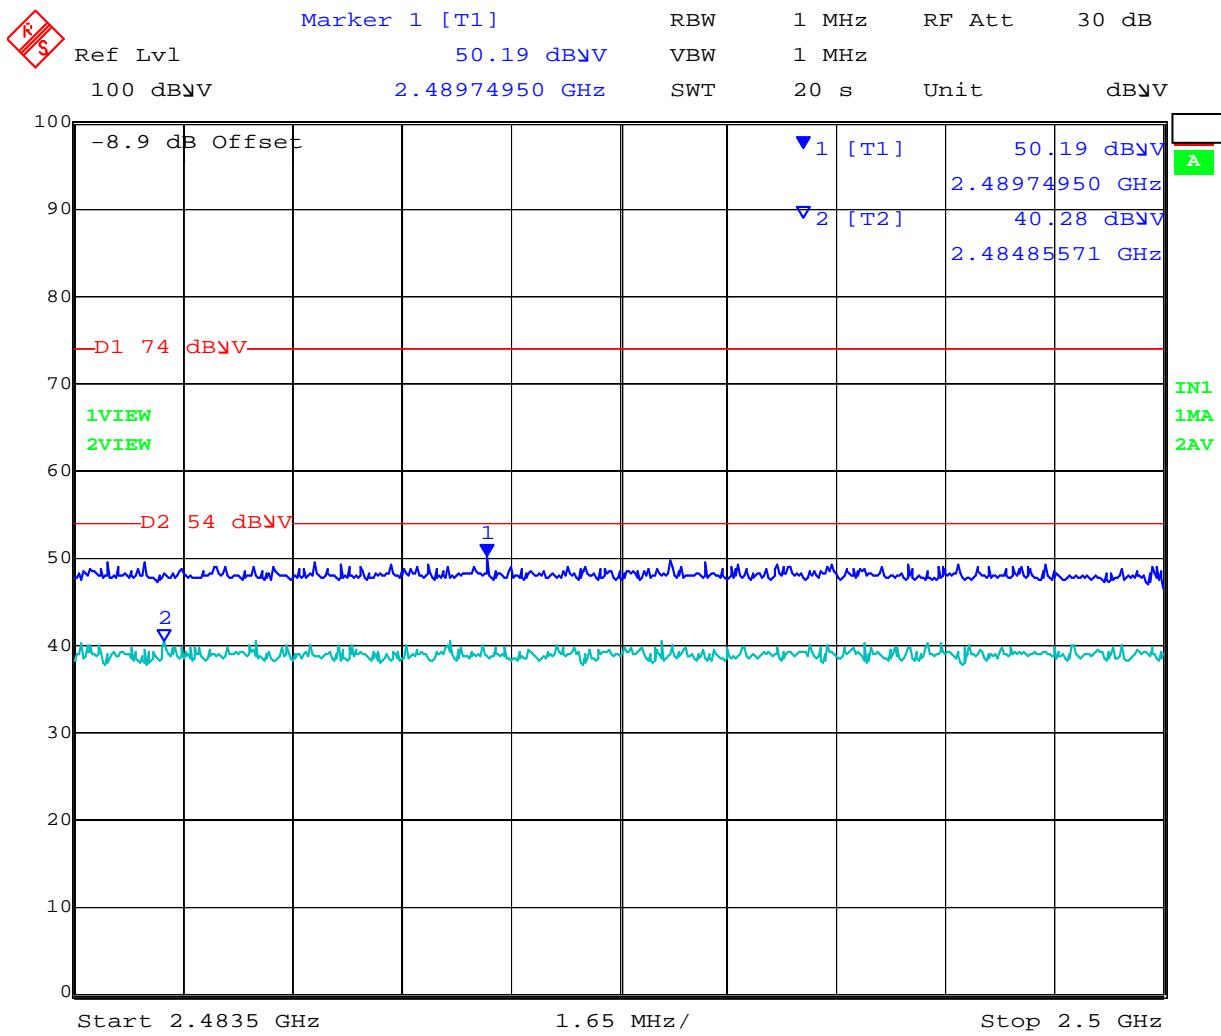

Date: 21.AUG.2013 17:13:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification Limits

FCC §15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

IC RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 71 of 129

§15.209 (a) Limit Matrix

| Frequency(MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) | Measurement Distance (meters) |
|----------------|--------------------------------|----------------------------------|----------------------------------|
| 30-88 | 100 | 40.0 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

Laboratory Measurement Uncertainty for Radiated Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | +5.6/ -4.5 dB |
|-------------------------|---------------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

9.1.2.2 Digital Emissions (0.03-1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-Gen §7.2.5

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$


Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

| | | | |
|----------------------|-------------------|-----------------------|------|
| Test Freq. | NA | Engineer | JMH |
| Variant | Digital Emissions | Temp (°C) | 13 |
| Freq. Range | 30 MHz - 1000 MHz | Rel. Hum.(%) | 43 |
| Power Setting | NA | Press. (mBars) | 1002 |
| Antenna | NA | | |
| Test Notes 1 | | | |
| Test Notes 2 | | | |

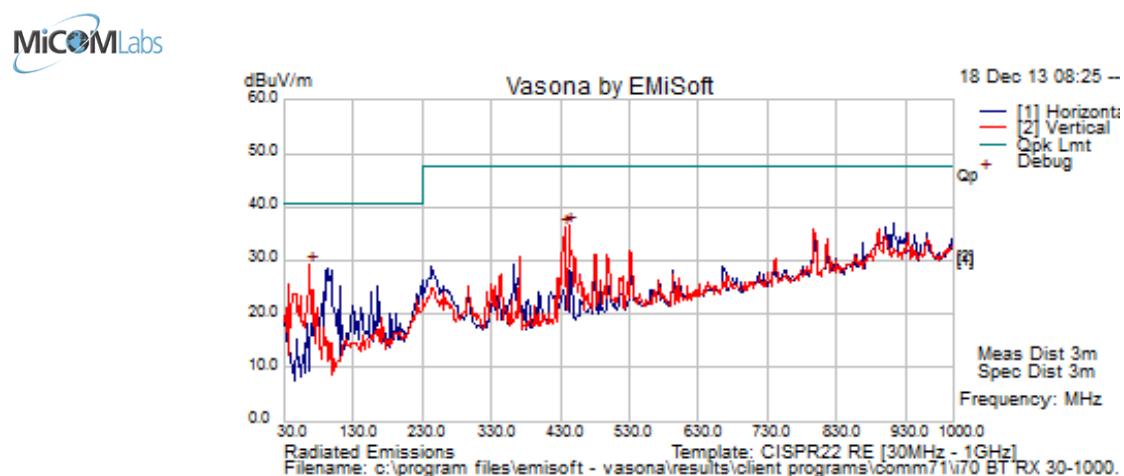

Formally measured emission peaks

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail | Comments |
|------------------|-------------|---------------|----------|-----------------|---------------------|-----|-----------|------------|-----------------|--------------|---------------|----------|
| 442.137 | 44.9 | 5.6 | -13.9 | 36.6 | Peak [Scan] | V | 100 | -1 | 47.5 | -10.9 | Pass | |
| 66.886 | 48.4 | 3.8 | -23.0 | 29.2 | Peak [Scan] | V | 100 | -1 | 40.5 | -11.3 | Pass | |
| 436.184 | 44.4 | 5.6 | -14.0 | 36.0 | Peak [Scan] | V | 100 | -1 | 47.5 | -11.5 | Pass | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and Industry Canada RSS-Gen §7.2.5 Limit Matrix

| Frequency(MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) | Measurement Distance (meters) |
|----------------|--------------------------------|----------------------------------|----------------------------------|
| 30-88 | 100 | 40.0 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

Laboratory Measurement Uncertainty for Radiated Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | +5.6/ -4.5 dB |
|-------------------------|---------------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

9.1.3 AC Wireline Conducted Emissions (150 kHz – 30 MHz)


Not required - EUT is powered by DC only.

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.4

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

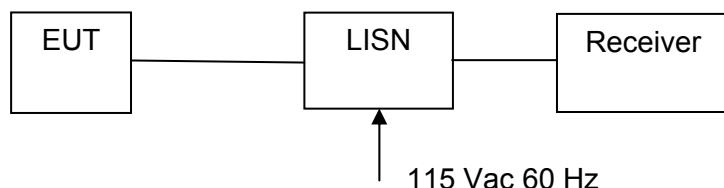

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Not required - EUT is powered by DC only.

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.4

Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The more stringent limit applies at the frequency range boundaries. The conducted emissions shall be measured with a 50 ohm/50 microhenry line impedance stabilization network (LISN).

§15.207 (a) and RSS-Gen §7.2.4 Limit Matrix

The lower limit applies at the boundary between frequency ranges

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | ± 2.64 dB |
|-------------------------|---------------|


Traceability

| Method | Test Equipment Used |
|--|------------------------------------|
| Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions' | 0158, 0184, 0287, 0190, 0293, 0307 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


10 PHOTOGRAPHS

10.1 Conducted Test Setup

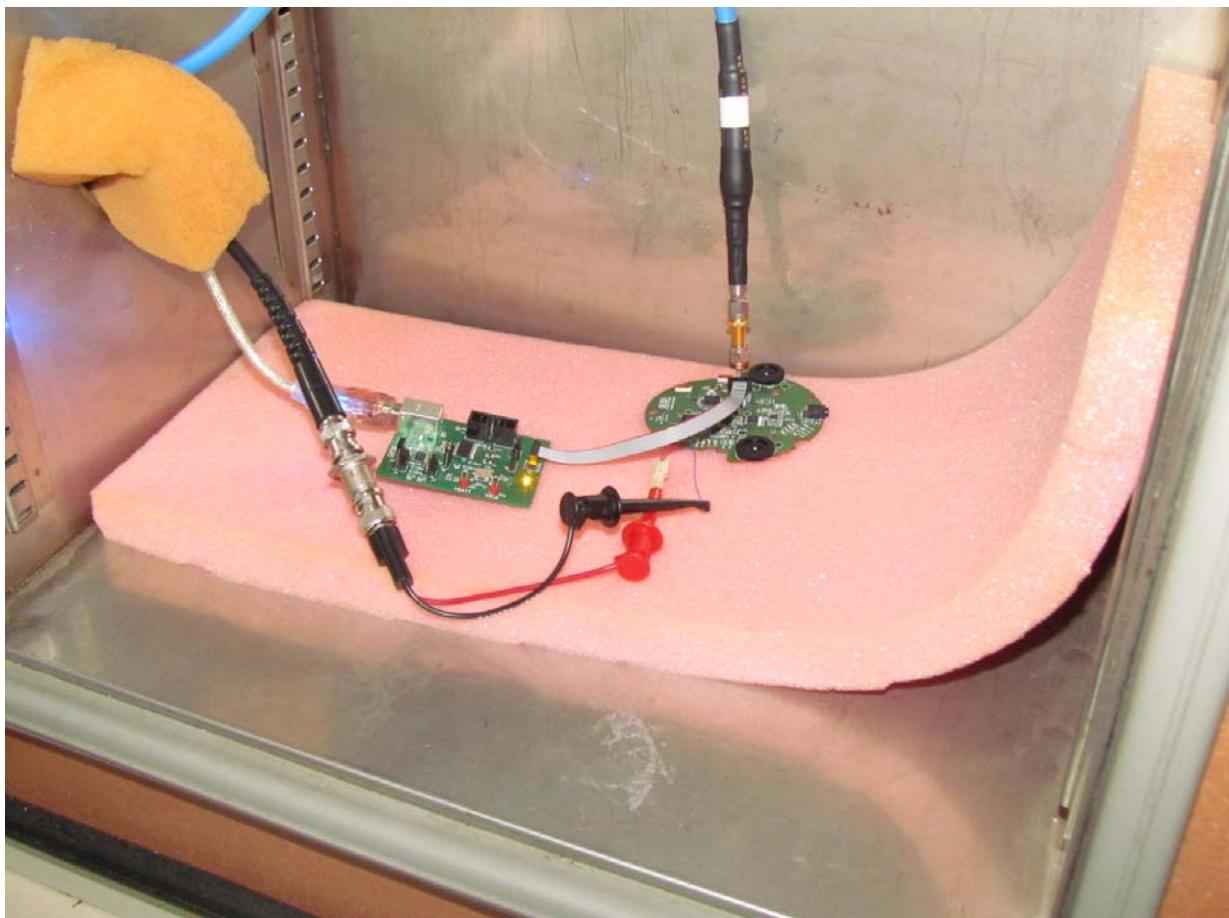


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

10.2 Radiated Emissions Test Setup < 1 GHz

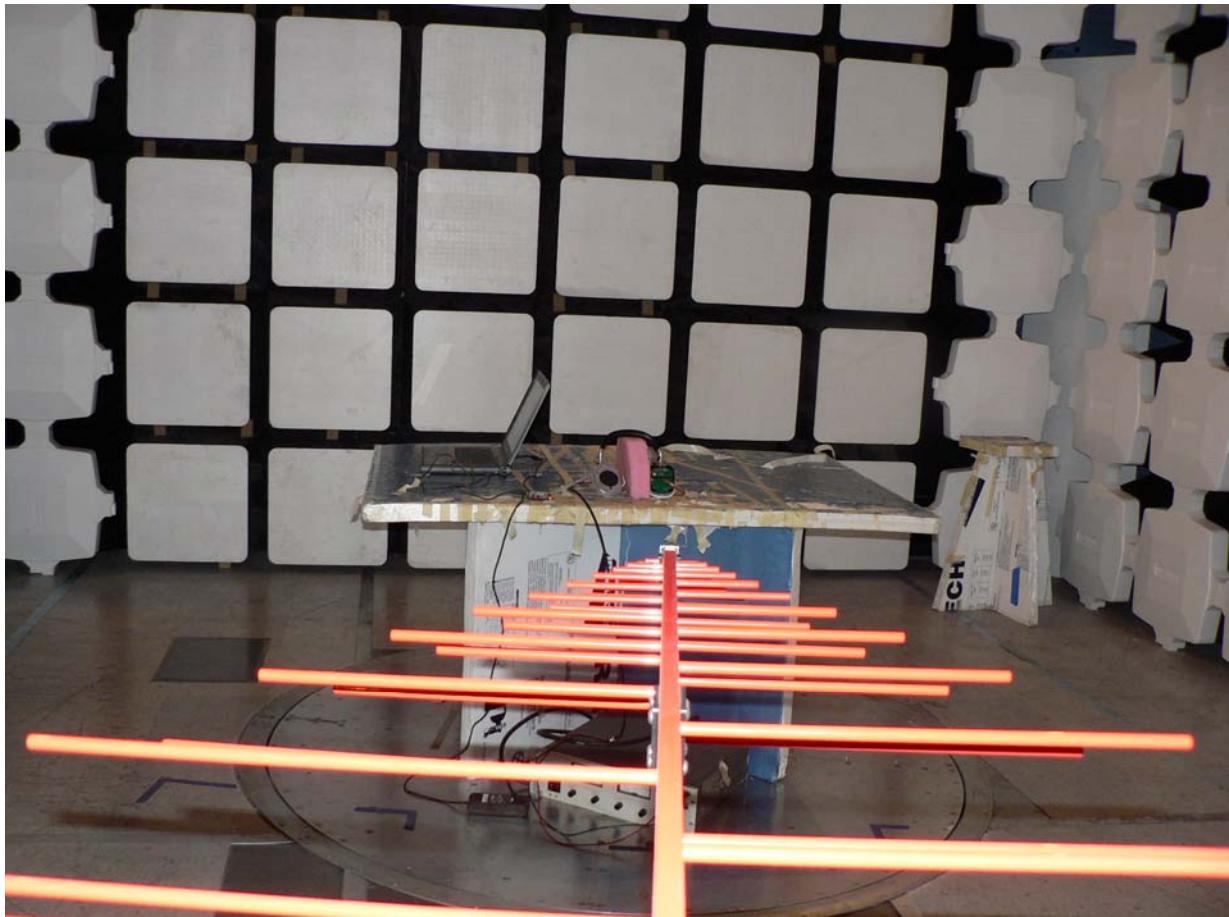

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

10.3 Radiated Emissions Test Setup > 1 GHz

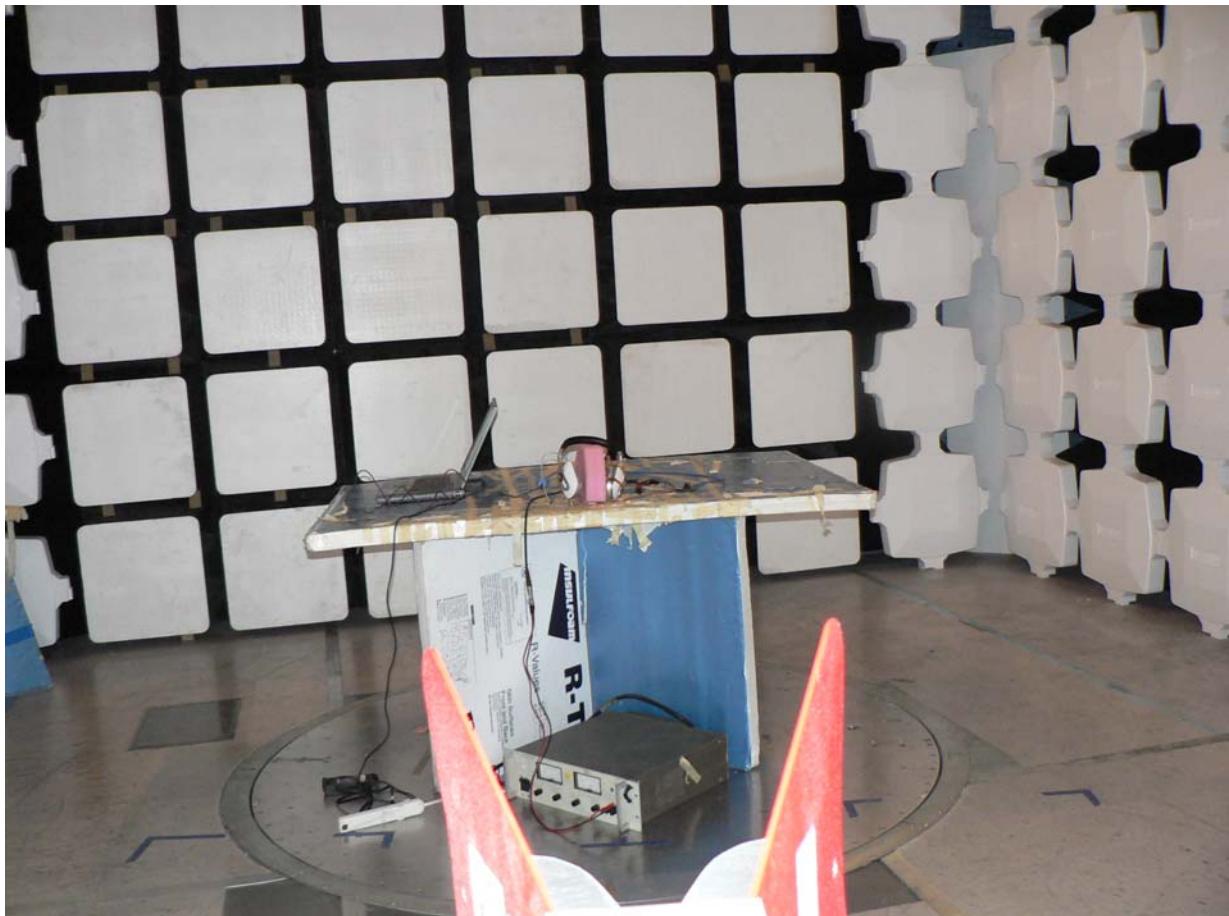

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 80 of 129

11 TEST EQUIPMENT

| Asset # | Instrument | Manufacturer | Part # | Serial # | Calibration Due Date |
|---------|-------------------------------|-------------------------|-----------------------|-------------|-------------------------|
| 0390 | Power Sensor | Agilent | U2000A | MY50000103 | 17 th Oct 14 |
| 0158 | Barometer/ Thermometer | Control Co. | 4196 | E2844 | 8th Jan '15 |
| 0287 | EMI Receiver | Rhode & Schwartz | ESIB40 | 100201 | 31 st Jul 14 |
| 0338 | 30 - 3000 MHz Antenna | Sunol | JB3 | A052907 | 14 th Aug 14 |
| 0399 | 1-18 GHz Horn Antenna | EMCO | 3117 | 00154575 | 10 th Oct 14 |
| 0252 | SMA Cable | Megaphase | Sucoflex 104 | None | N/A |
| 0293 | BNC Cable | Megaphase | 1689 1GVT4 | 15F50B001 | N/A |
| 0307 | BNC Cable | Megaphase | 1689 1GVT4 | 15F50B002 | N/A |
| 0310 | 2m SMA Cable | Micro-Coax | UFA210A-0-0787-3G03G0 | 209089-001 | N/A |
| 0312 | 3m SMA Cable | Micro-Coax | UFA210A-1-1181-3G0300 | 209092-001 | N/A |
| 0314 | 30dB N-Type Attenuator | ARRA | N9444-30 | 1623 | N/A |
| | EMC Test Software | EMISoft | Vasona | 5.0051 | N/A |
| | RF Conducted Test Software | National Instruments | Labview | Version 8.2 | N/A |
| | RF Conducted Test Software | MiCOM Labs ATS | | Version 1.5 | N/A |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 81 of 129

12 APPENDIX

A. SUPPORTING INFORMATION

A.1. CONDUCTED TEST PLOTS


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.1. 6 dB & 99% Bandwidth



6 dB & 20 dB BANDWIDTH

Variant: 802.15 DH1, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

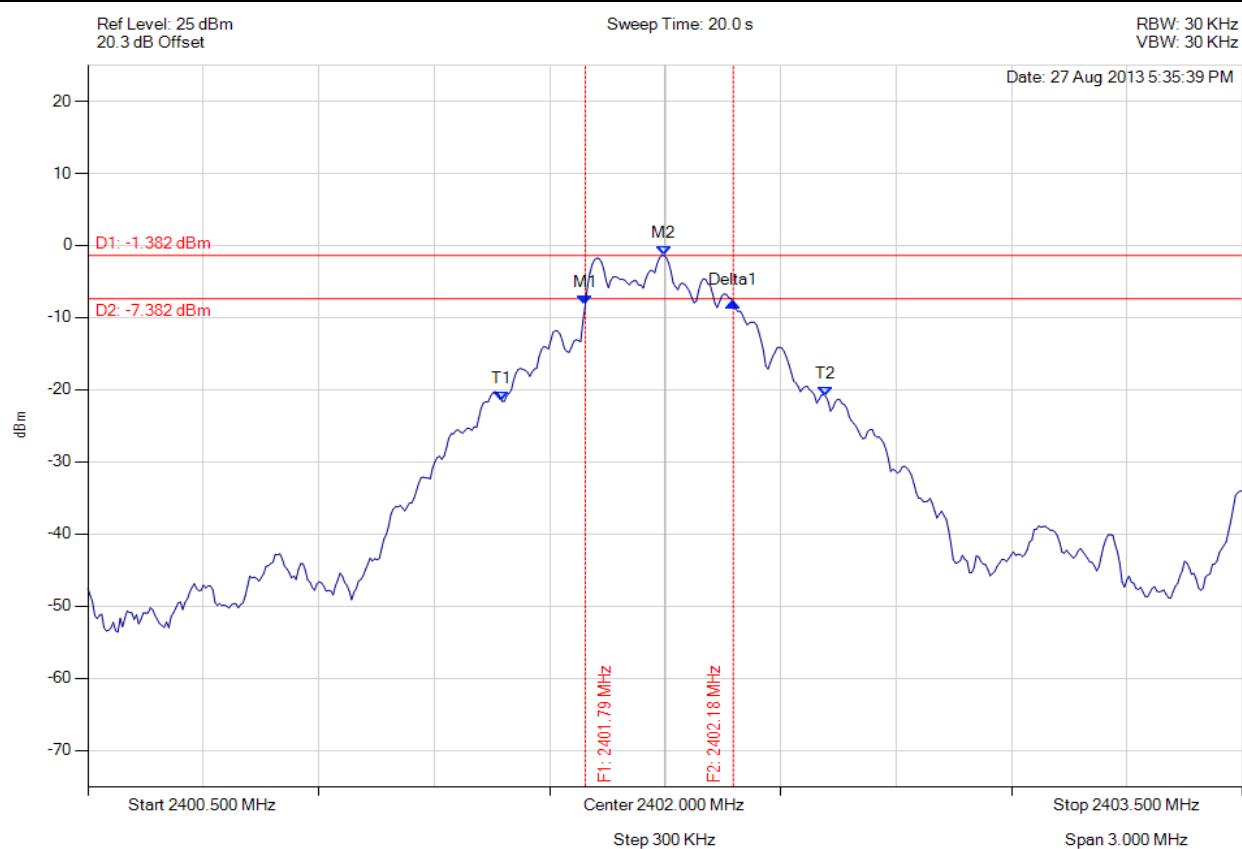


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.793 MHz : -8.233 dBm M2 : 2401.997 MHz : -1.382 dBm Delta1 : 385 KHz : 0.338 dB T1 : 2401.576 MHz : -21.605 dBm T2 : 2402.418 MHz : -20.959 dBm OBW : 842 KHz | Measured 6 dB Bandwidth: 0.385 MHz Limit: ≥ 500.0 kHz Margin: 0.11 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 DH1, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

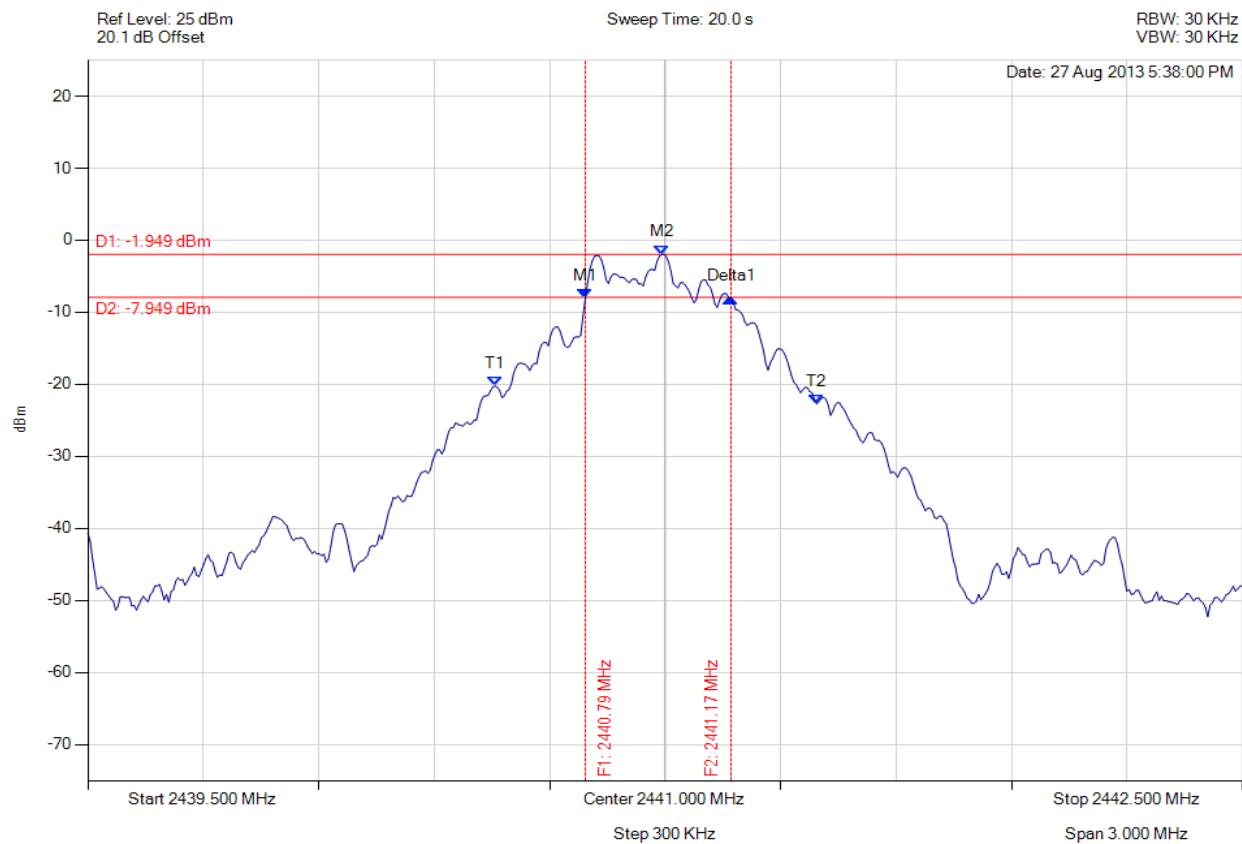


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.793 MHz : -8.103 dBm M2 : 2440.991 MHz : -1.949 dBm Delta1 : 379 KHz : 0.031 dB T1 : 2440.558 MHz : -20.228 dBm T2 : 2441.394 MHz : -22.730 dBm OBW : 836 KHz | Measured 6 dB Bandwidth: 0.379 MHz Limit: ≥500.0 kHz Margin: 0.12 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 DH1, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

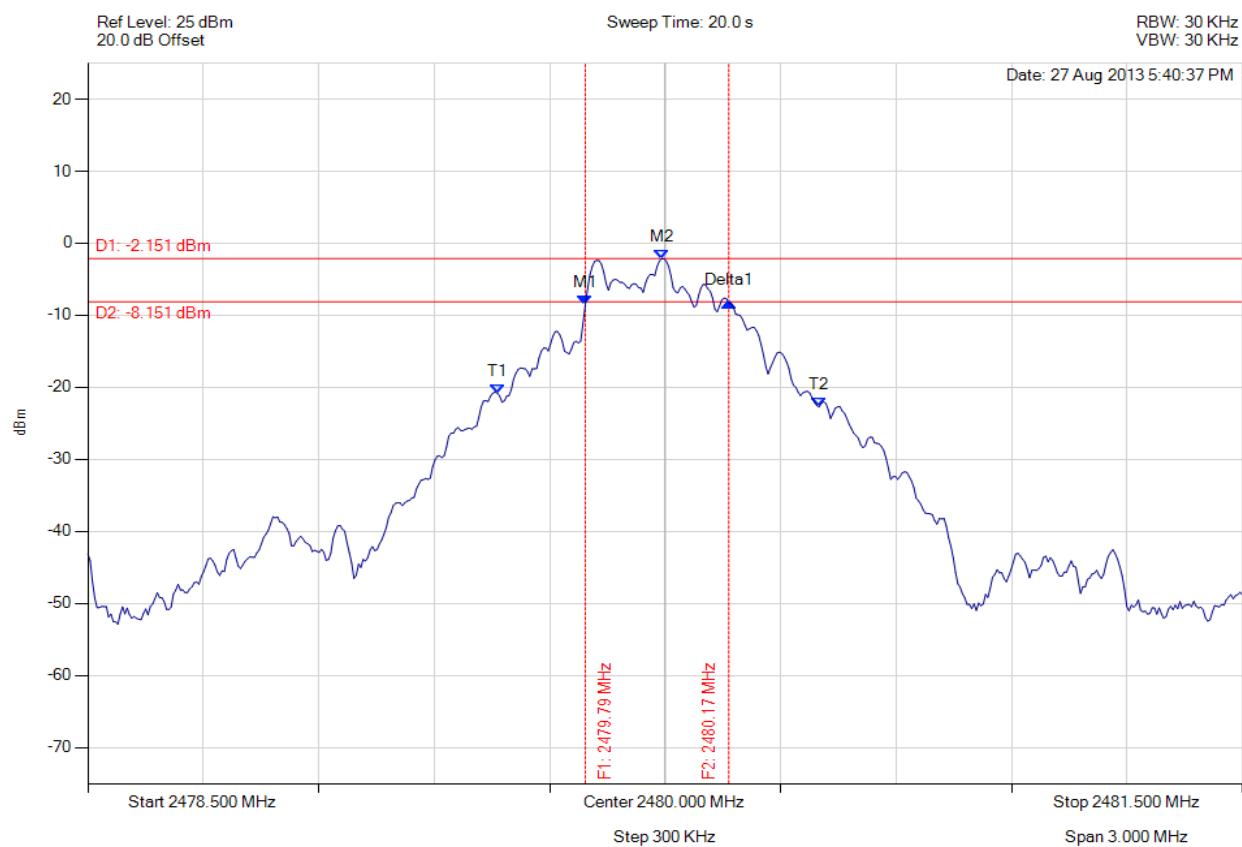


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.793 MHz : -8.555 dBm M2 : 2479.991 MHz : -2.151 dBm Delta1 : 373 KHz : 0.317 dB T1 : 2479.564 MHz : -20.812 dBm T2 : 2480.400 MHz : -22.736 dBm OBW : 836 KHz | Measured 6 dB Bandwidth: 0.373 MHz Limit: ≥ 500.0 kHz Margin: 0.13 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 DH5, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

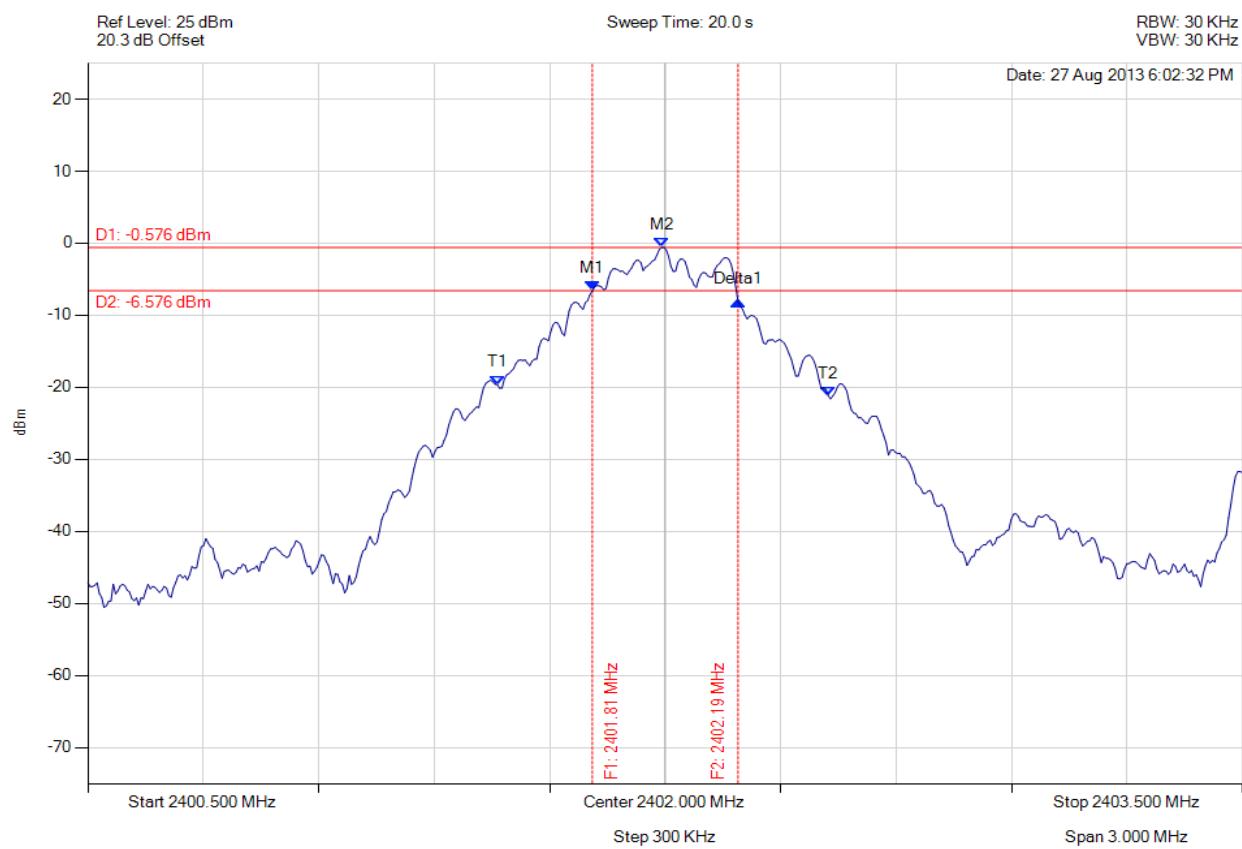


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.811 MHz : -6.608 dBm M2 : 2401.991 MHz : -0.576 dBm Delta1 : 379 KHz : -1.501 dB T1 : 2401.564 MHz : -19.637 dBm T2 : 2402.424 MHz : -21.174 dBm OBW : 860 KHz | Measured 6 dB Bandwidth: 0.379 MHz Limit: ≥ 500.0 kHz Margin: 0.12 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 DH5, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

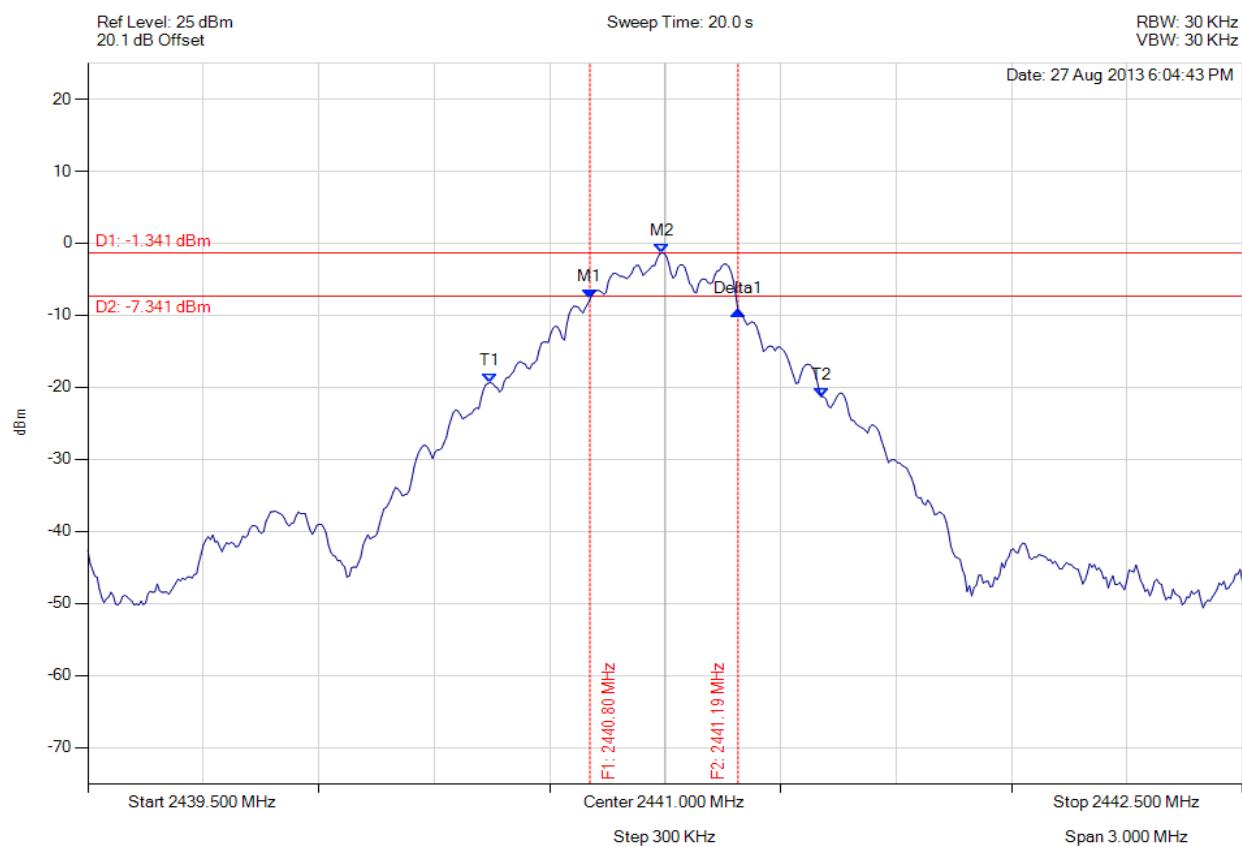


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.805 MHz : -7.764 dBm M2 : 2440.991 MHz : -1.341 dBm Delta1 : 385 KHz : -1.580 dB T1 : 2440.546 MHz : -19.342 dBm T2 : 2441.406 MHz : -21.312 dBm OBW : 860 KHz | Measured 6 dB Bandwidth: 0.385 MHz Limit: ≥ 500.0 kHz Margin: 0.11 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 DH5, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

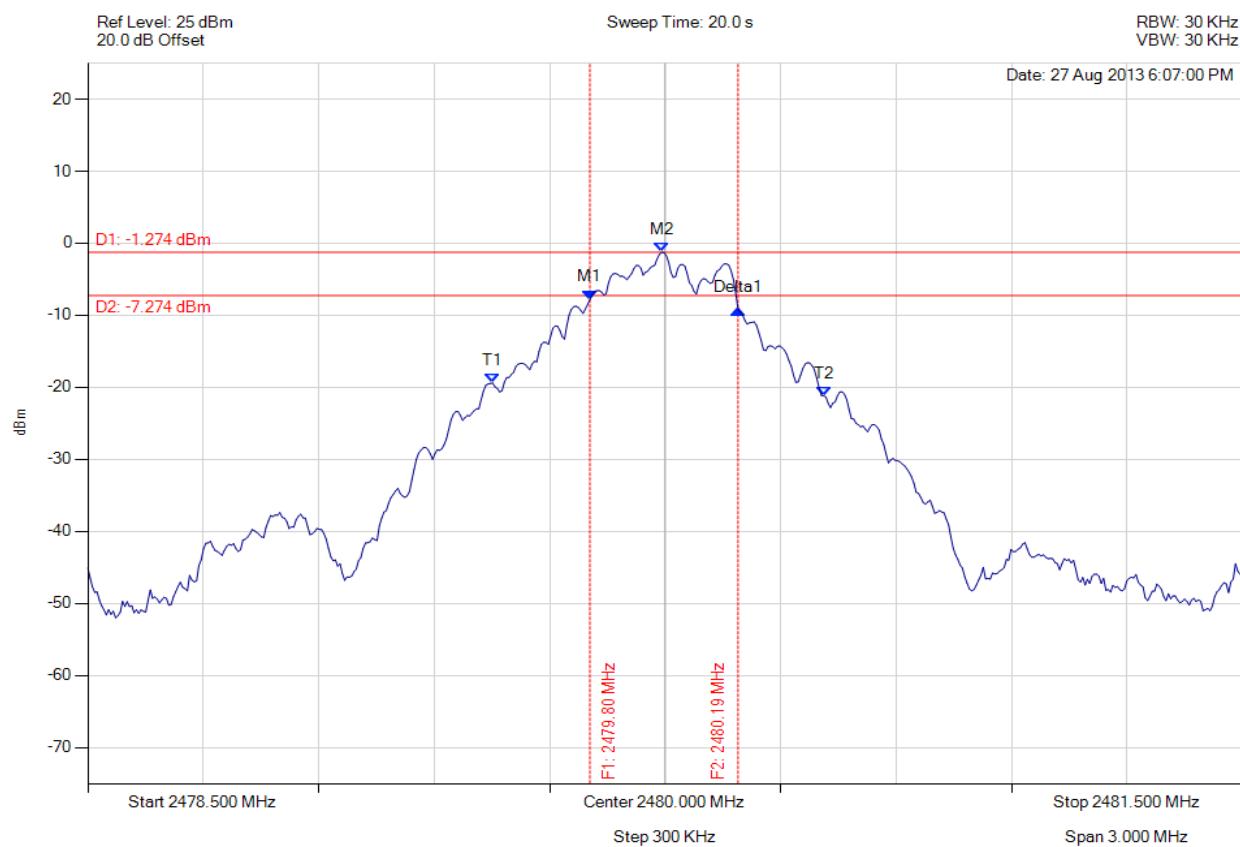


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.805 MHz : -7.788 dBm M2 : 2479.991 MHz : -1.274 dBm Delta1 : 385 KHz : -1.375 dB T1 : 2479.552 MHz : -19.419 dBm T2 : 2480.412 MHz : -21.174 dBm OBW : 860 KHz | Measured 6 dB Bandwidth: 0.385 MHz Limit: ≥ 500.0 kHz Margin: 0.11 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 3-DH1, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

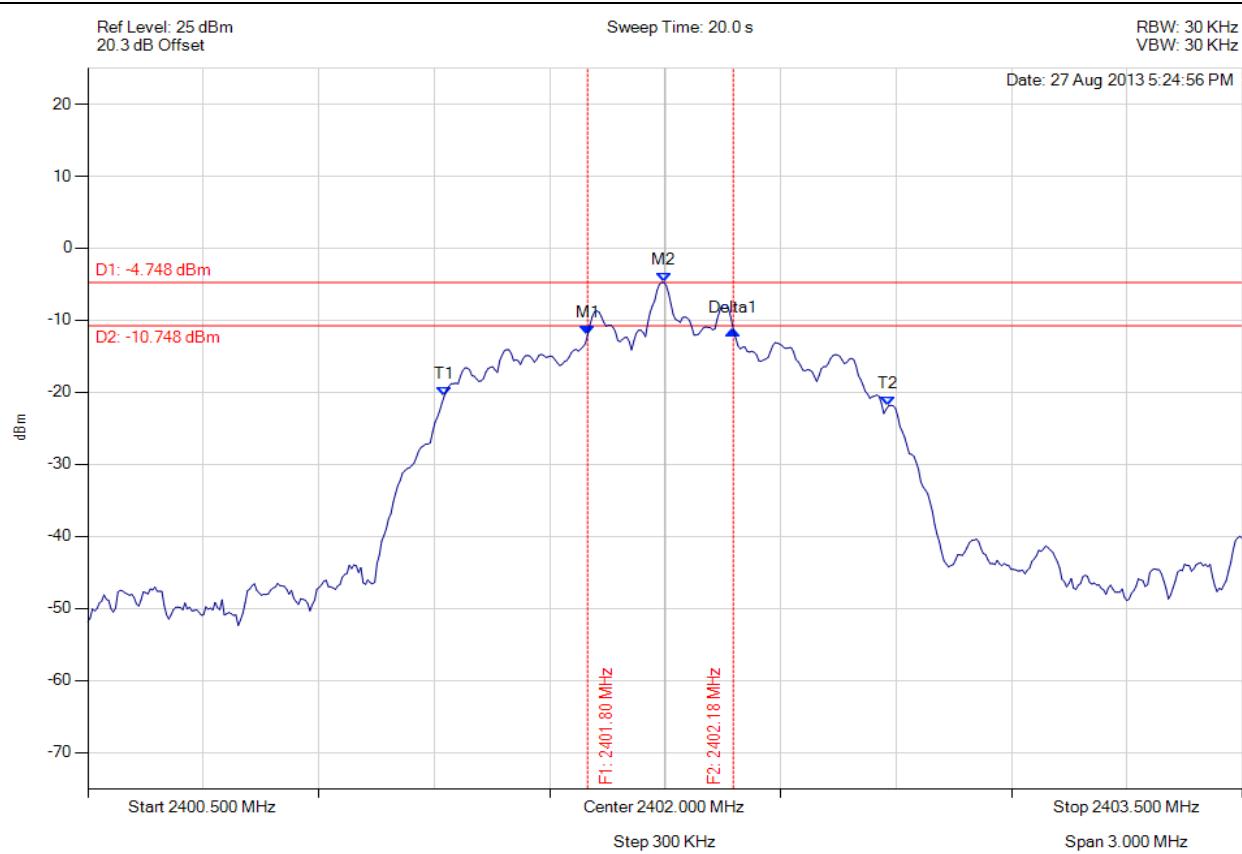


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.799 MHz : -12.026 dBm M2 : 2401.997 MHz : -4.748 dBm Delta1 : 379 KHz : 0.704 dB T1 : 2401.426 MHz : -20.590 dBm T2 : 2402.580 MHz : -21.898 dBm OBW : 1.154 MHz | Measured 6 dB Bandwidth: 0.379 MHz Limit: ≥ 500.0 kHz Margin: 0.12 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 3-DH1, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

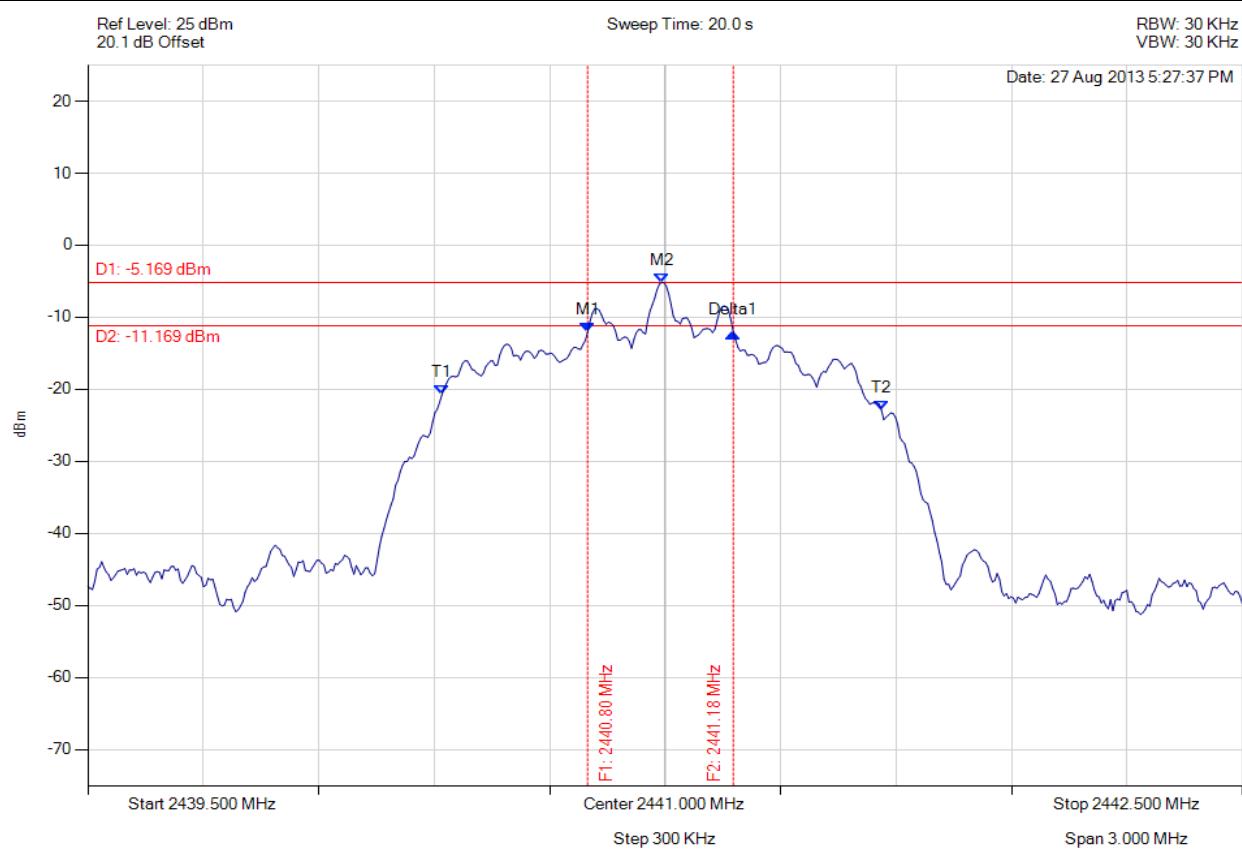


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.799 MHz : -12.059 dBm M2 : 2440.991 MHz : -5.169 dBm Delta1 : 379 KHz : -0.073 dB T1 : 2440.420 MHz : -20.776 dBm T2 : 2441.562 MHz : -22.909 dBm OBW : 1.142 MHz | Measured 6 dB Bandwidth: 0.379 MHz Limit: ≥500.0 kHz Margin: 0.12 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15 3-DH1, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

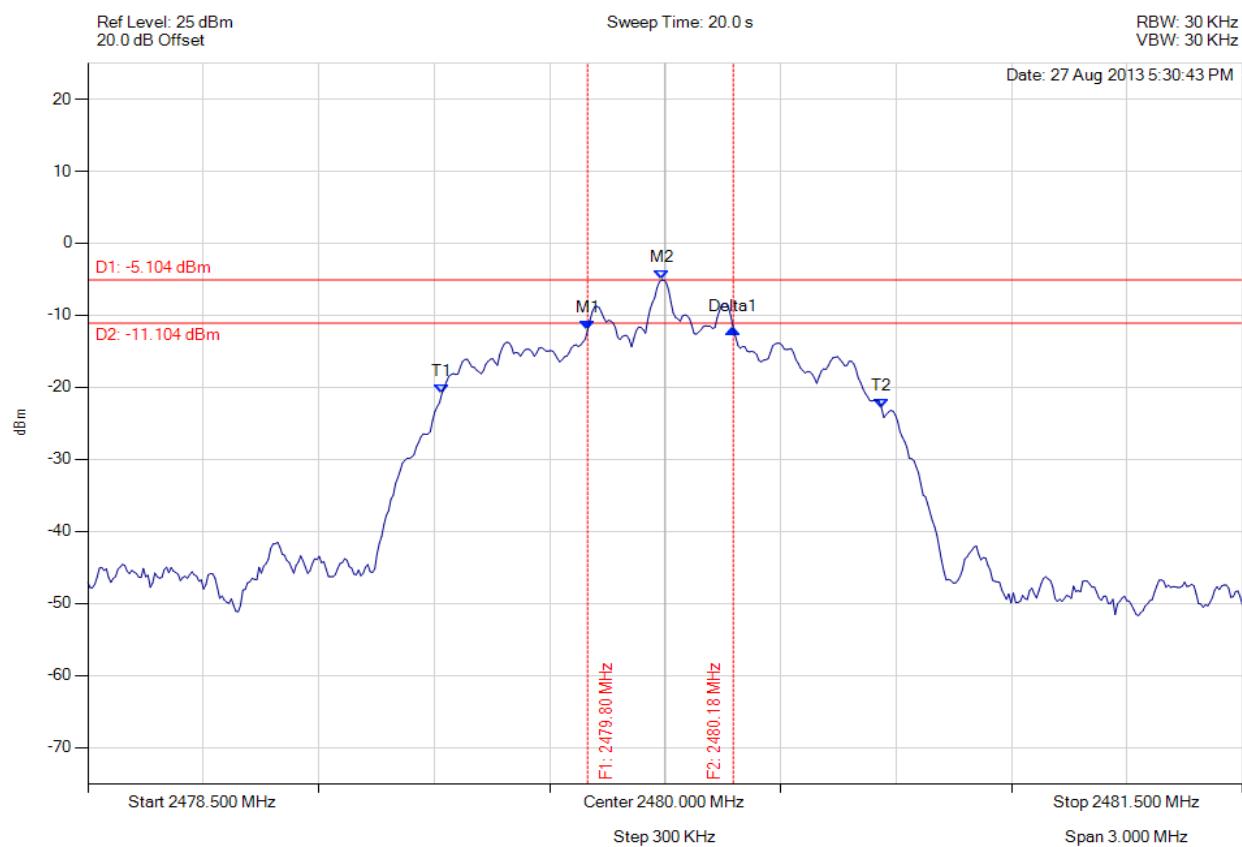


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.799 MHz : -12.041 dBm M2 : 2479.991 MHz : -5.104 dBm Delta1 : 379 KHz : 0.124 dB T1 : 2479.420 MHz : -20.877 dBm T2 : 2480.562 MHz : -22.856 dBm OBW : 1.142 MHz | Measured 6 dB Bandwidth: 0.379 MHz Limit: ≥ 500.0 kHz Margin: 0.12 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

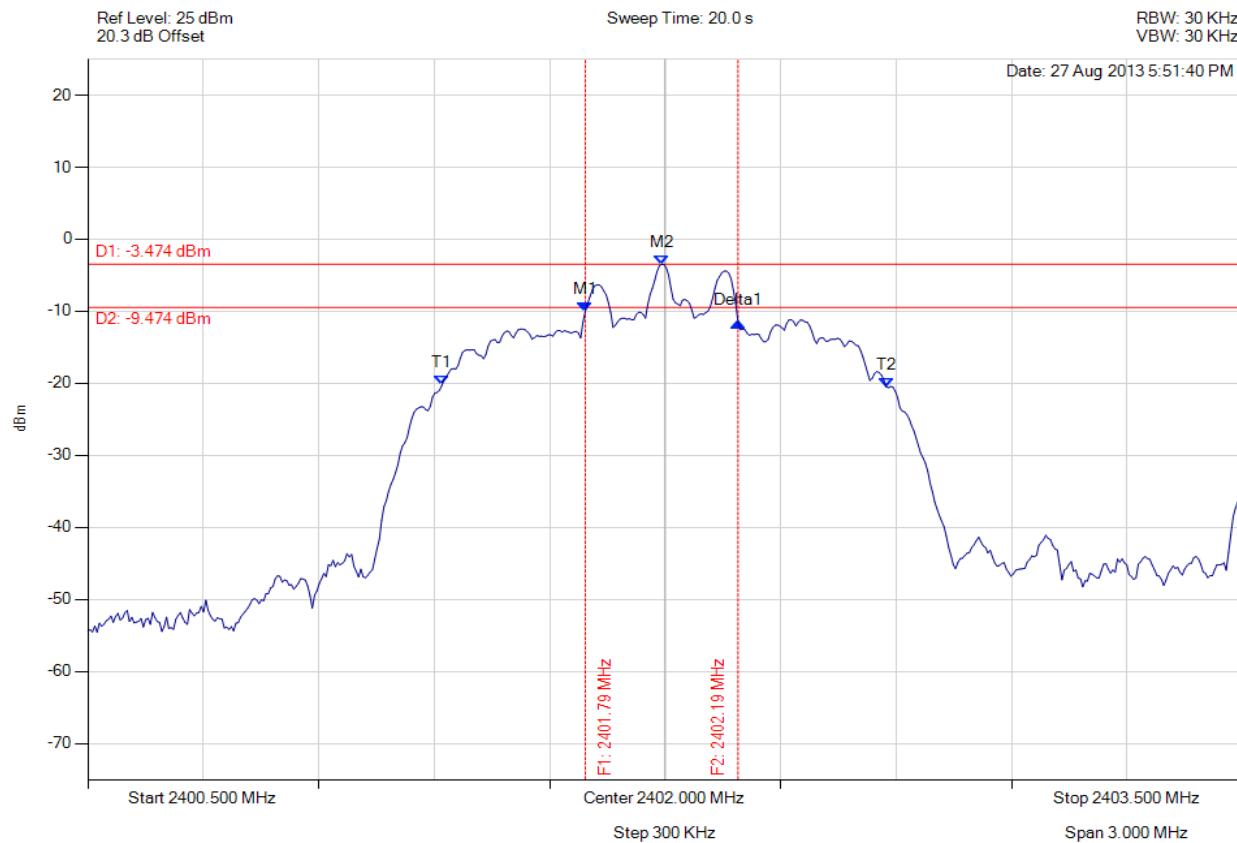


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.793 MHz : -9.991 dBm M2 : 2401.991 MHz : -3.474 dBm Delta1 : 397 KHz : -1.493 dB T1 : 2401.420 MHz : -20.289 dBm T2 : 2402.574 MHz : -20.493 dBm OBW : 1.154 MHz | Measured 6 dB Bandwidth: 0.397 MHz Limit: ≥ 500.0 kHz Margin: 0.10 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

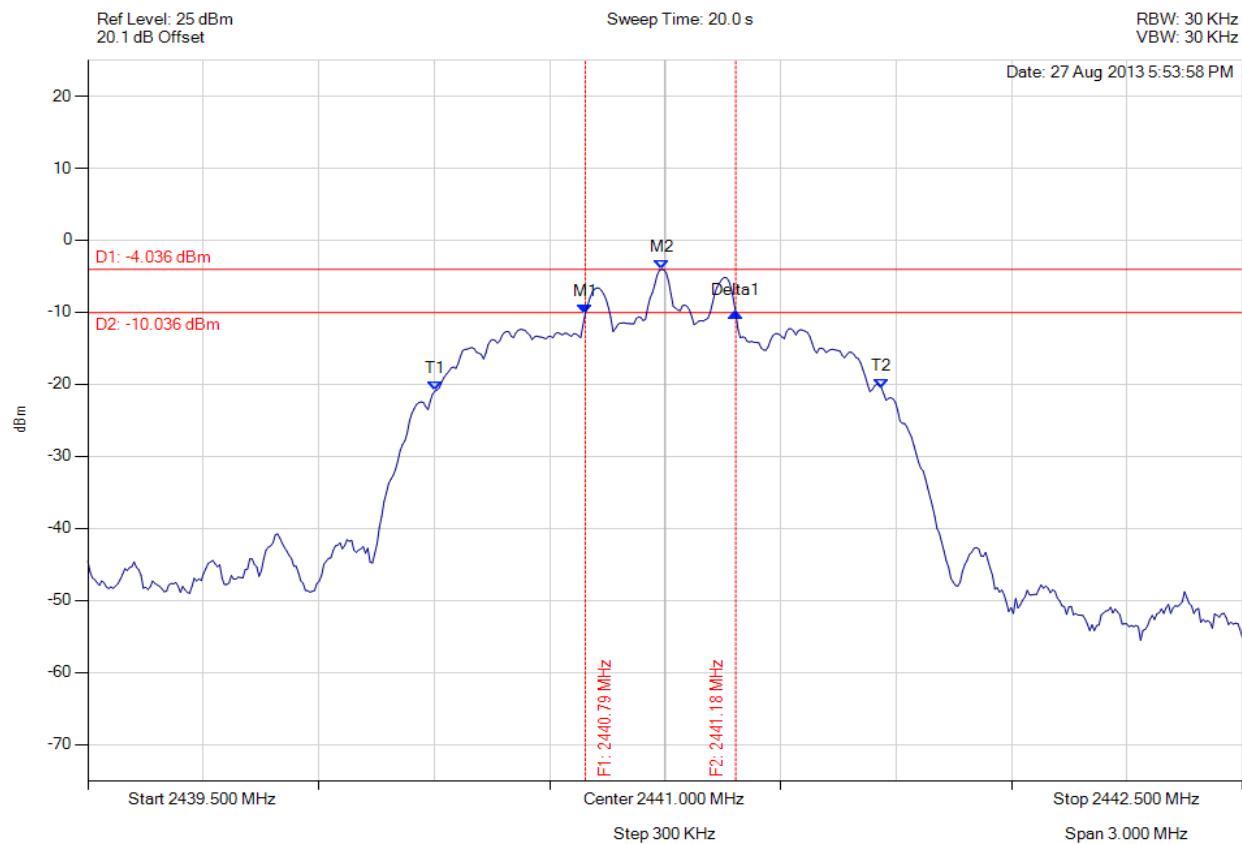


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.793 MHz : -10.157 dBm M2 : 2440.991 MHz : -4.036 dBm Delta1 : 391 KHz : 0.077 dB T1 : 2440.402 MHz : -20.938 dBm T2 : 2441.562 MHz : -20.501 dBm OBW : 1.160 MHz | Measured 6 dB Bandwidth: 0.391 MHz Limit: ≥ 500.0 kHz Margin: 0.11 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6 dB & 20 dB BANDWIDTH

Variant: 802.15, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

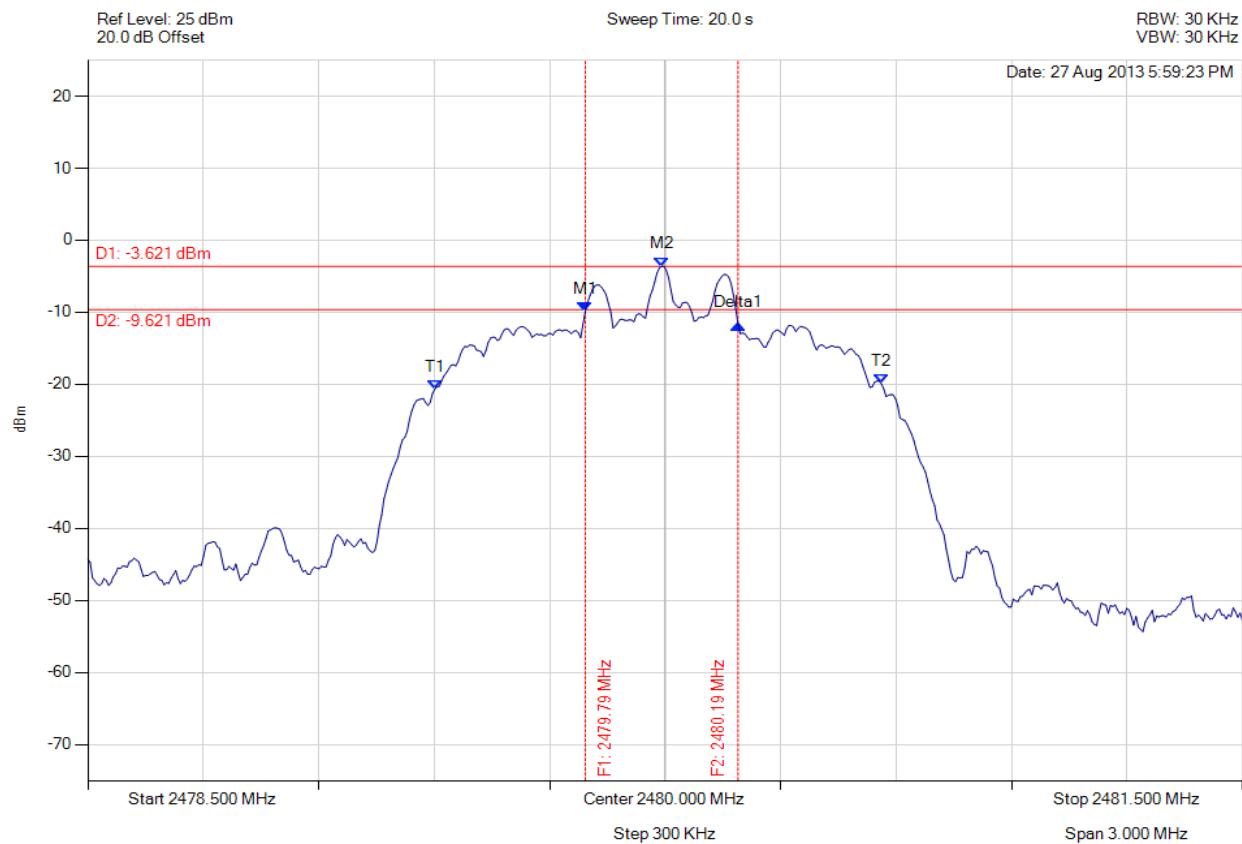

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|---|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.793 MHz : -9.852 dBm M2 : 2479.991 MHz : -3.621 dBm Delta1 : 397 KHz : -1.822 dB T1 : 2479.402 MHz : -20.662 dBm T2 : 2480.562 MHz : -19.950 dBm OBW : 1.160 MHz | Measured 6 dB Bandwidth: 0.397 MHz Limit: ≥ 500.0 kHz Margin: 0.10 MHz |

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.2. Channel Separation



Channel Separation DH1

Variant: 802.15 DH1, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

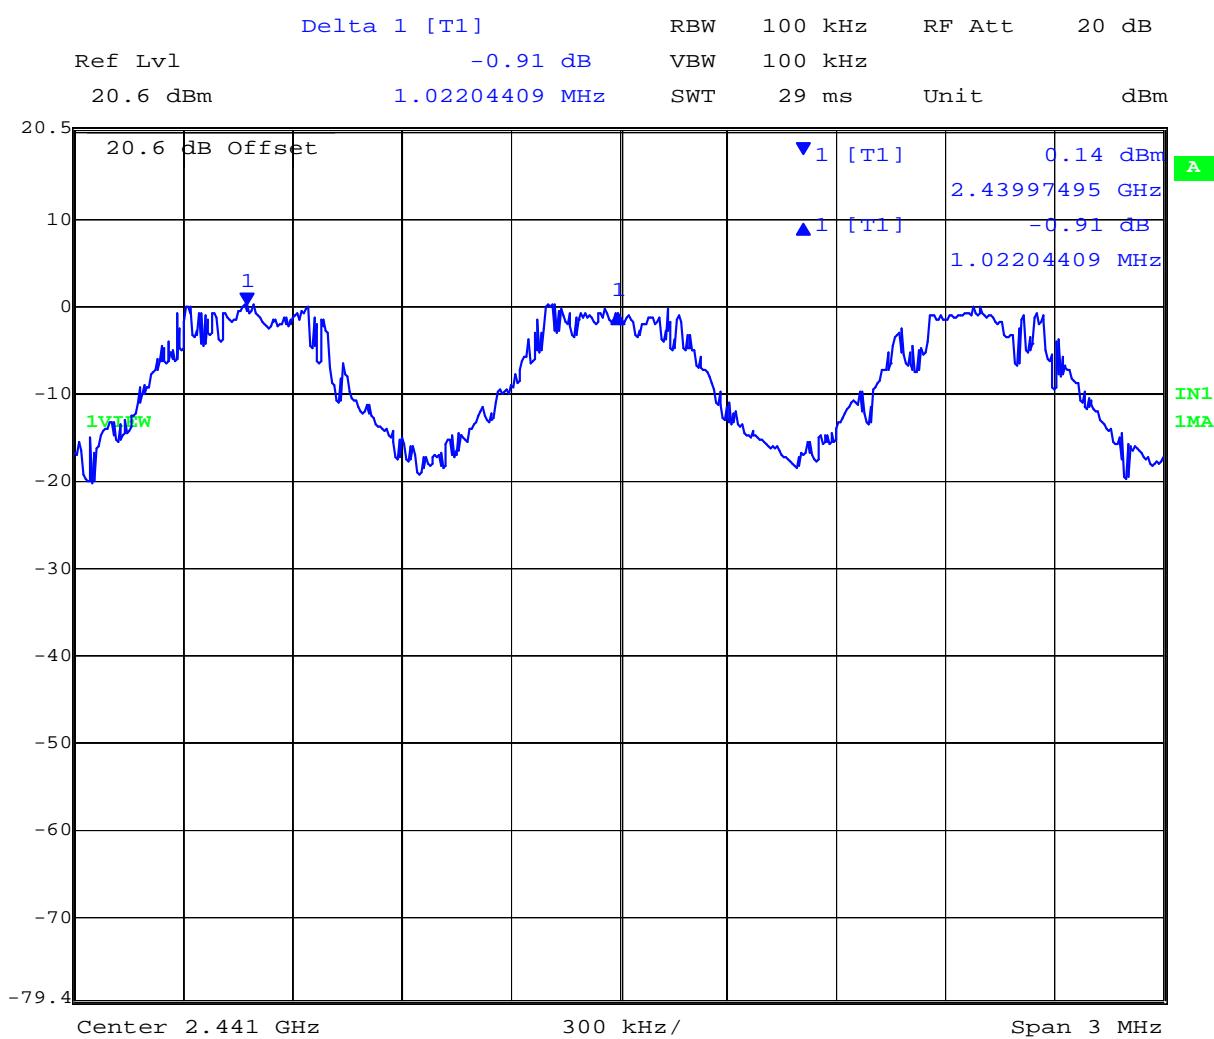


Date: 27.AUG.2013 19:07:50

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2441.00 MHz : 0.14 dBm | Channel Separation: 1.022 MHz Limit: > 1 MHz Margin: 0.022 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

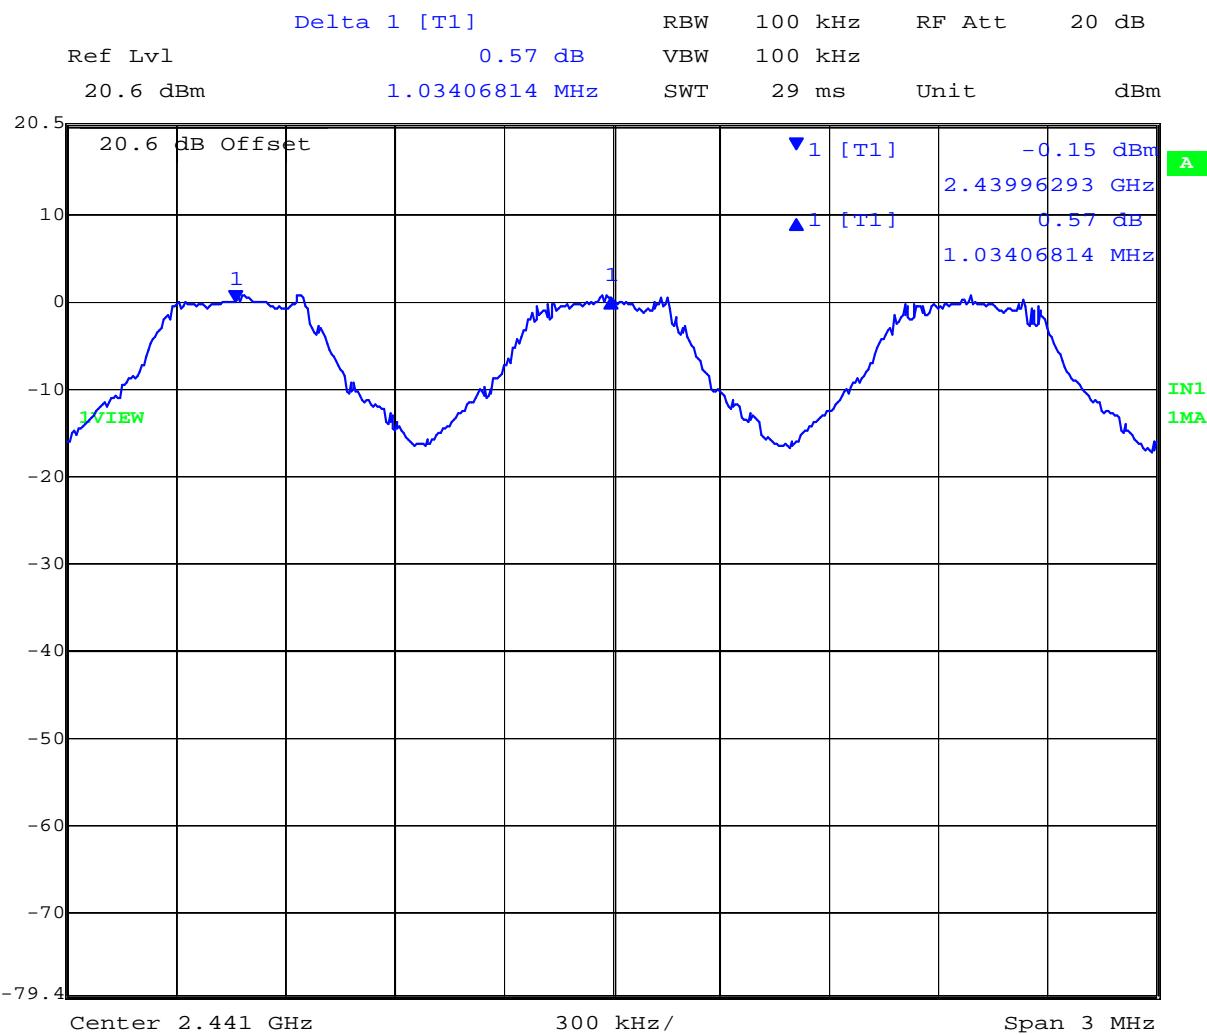


Date: 27.AUG.2013 19:11:06

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2441.00 MHz : -0.15 dBm | Channel Separation: 1.034 MHz Limit: > 1 MHz Margin: 0.034 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

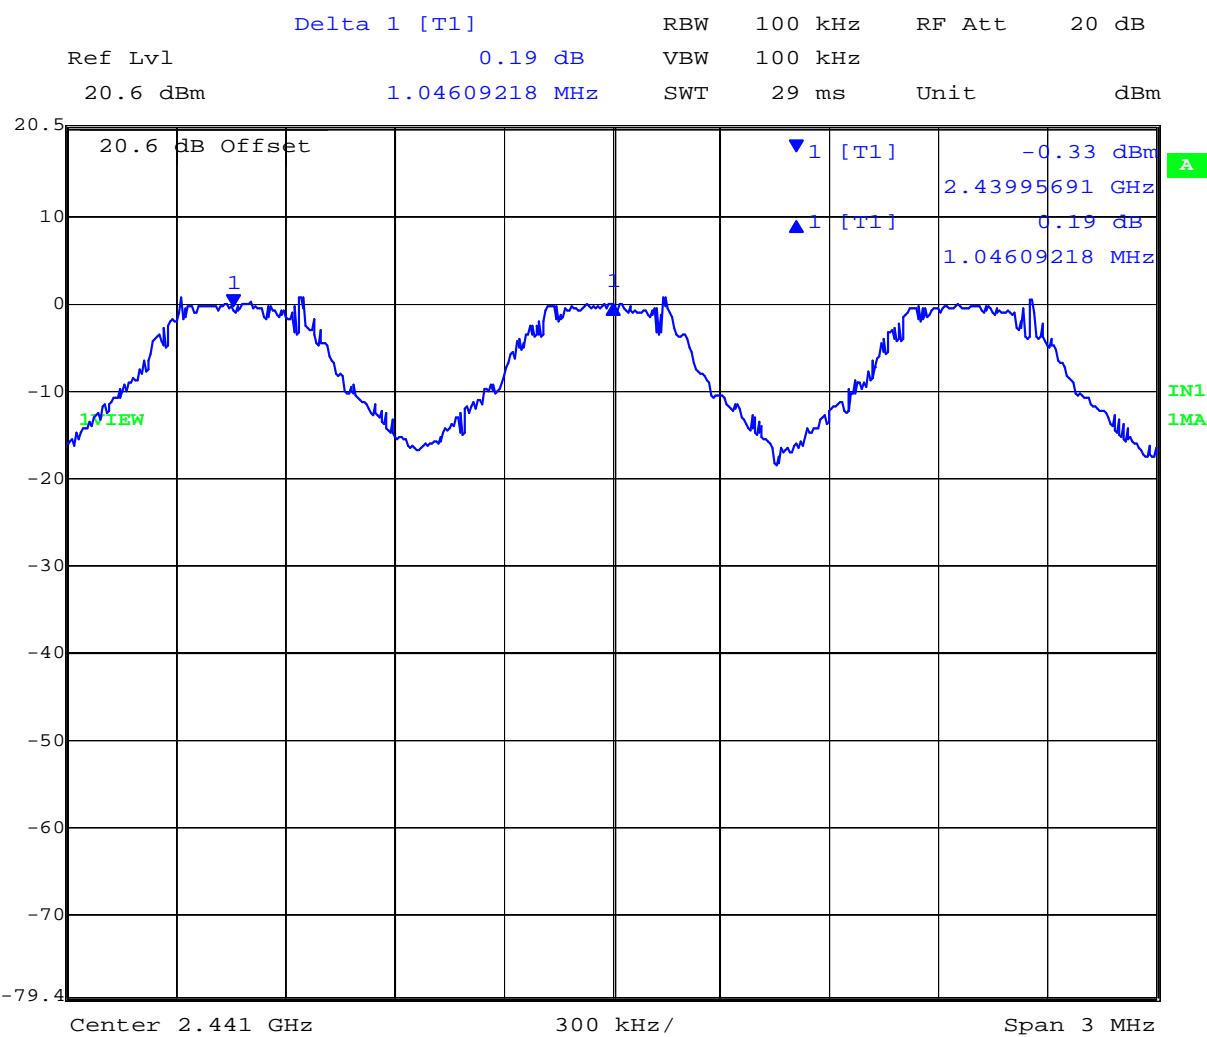


Date: 27.AUG.2013 19:13:01

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2441.00 MHz : -0.33 dBm | Channel Separation: 1.046 MHz Limit: > 1 MHz Margin: 0.046 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

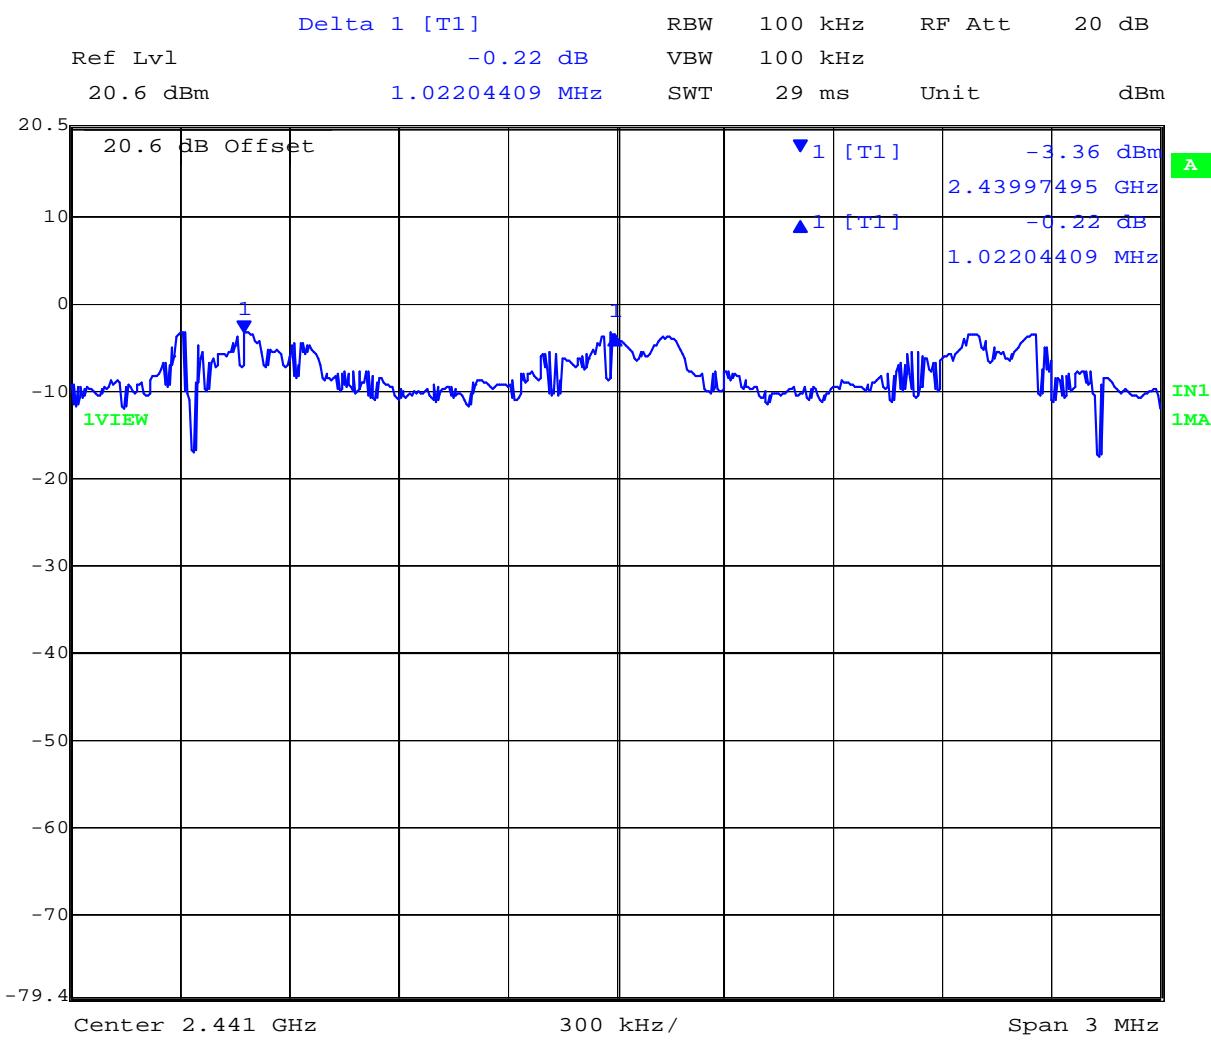


Date: 27.AUG.2013 19:15:52

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2441.00 MHz : -3.36 dBm | Channel Separation: 1.022 MHz Limit: > 1 MHz Margin: 0.022 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

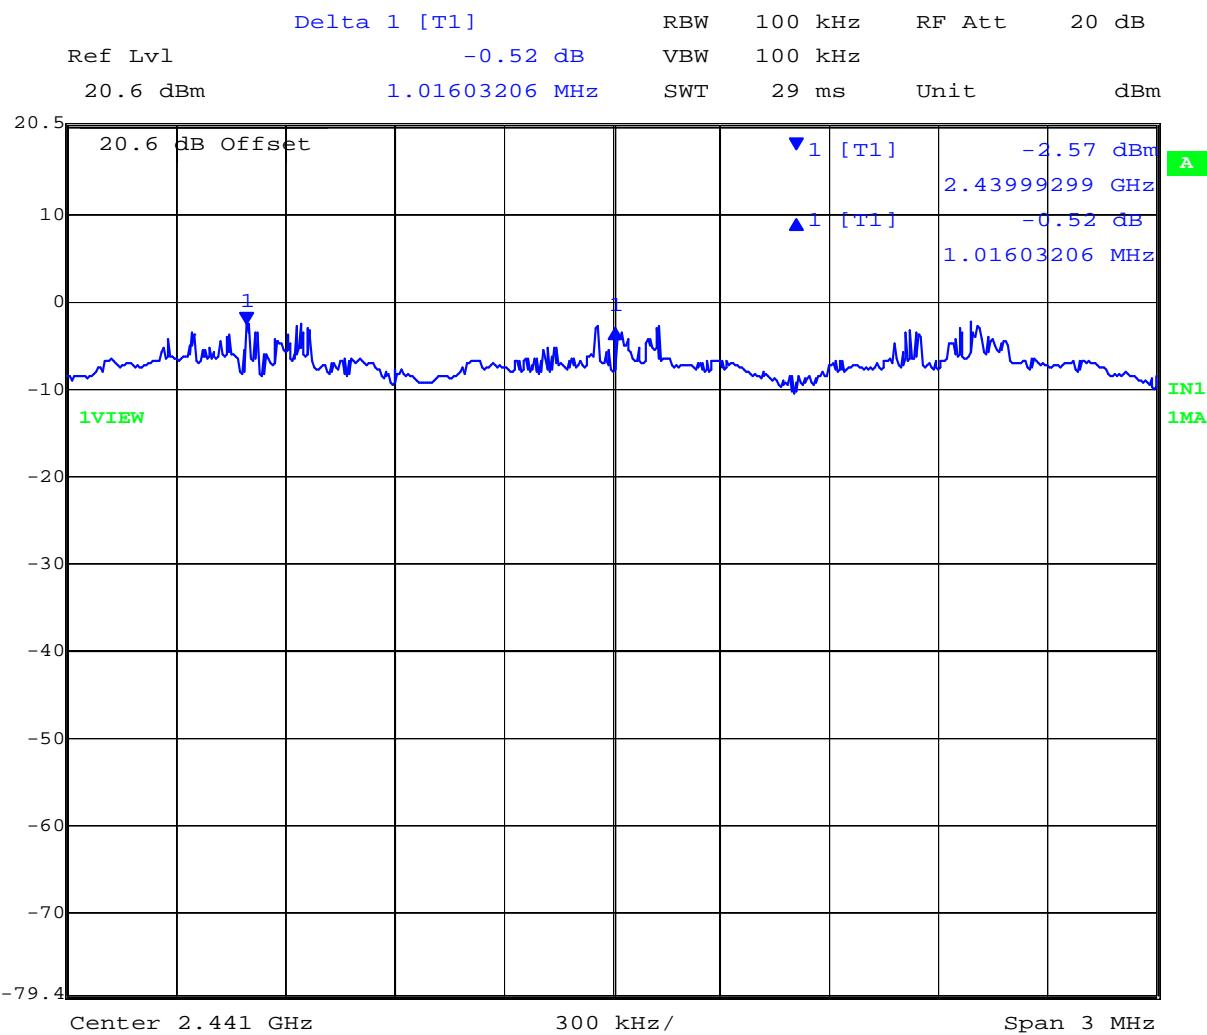


Date: 27.AUG.2013 19:18:10

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2441.00 MHz : -2.57 dBm | Channel Separation: 1.016 MHz Limit: > 1 MHz Margin: 0.016 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

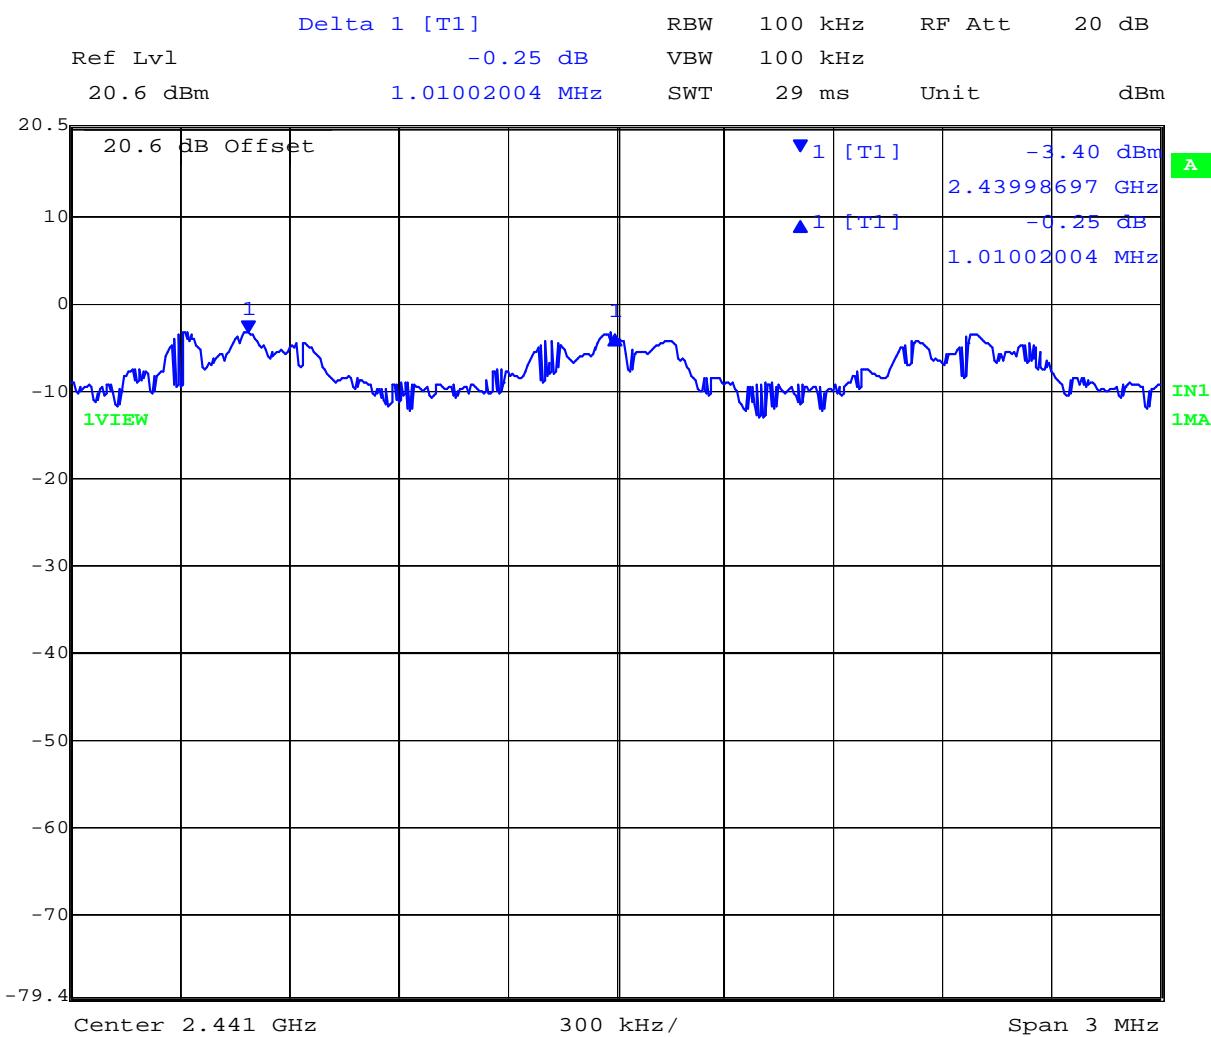


Date: 27.AUG.2013 19:21:06

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2441.00 MHz : -3.40 dBm | Channel Separation: 1.010 MHz Limit: > 1 MHz Margin: 0.010 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

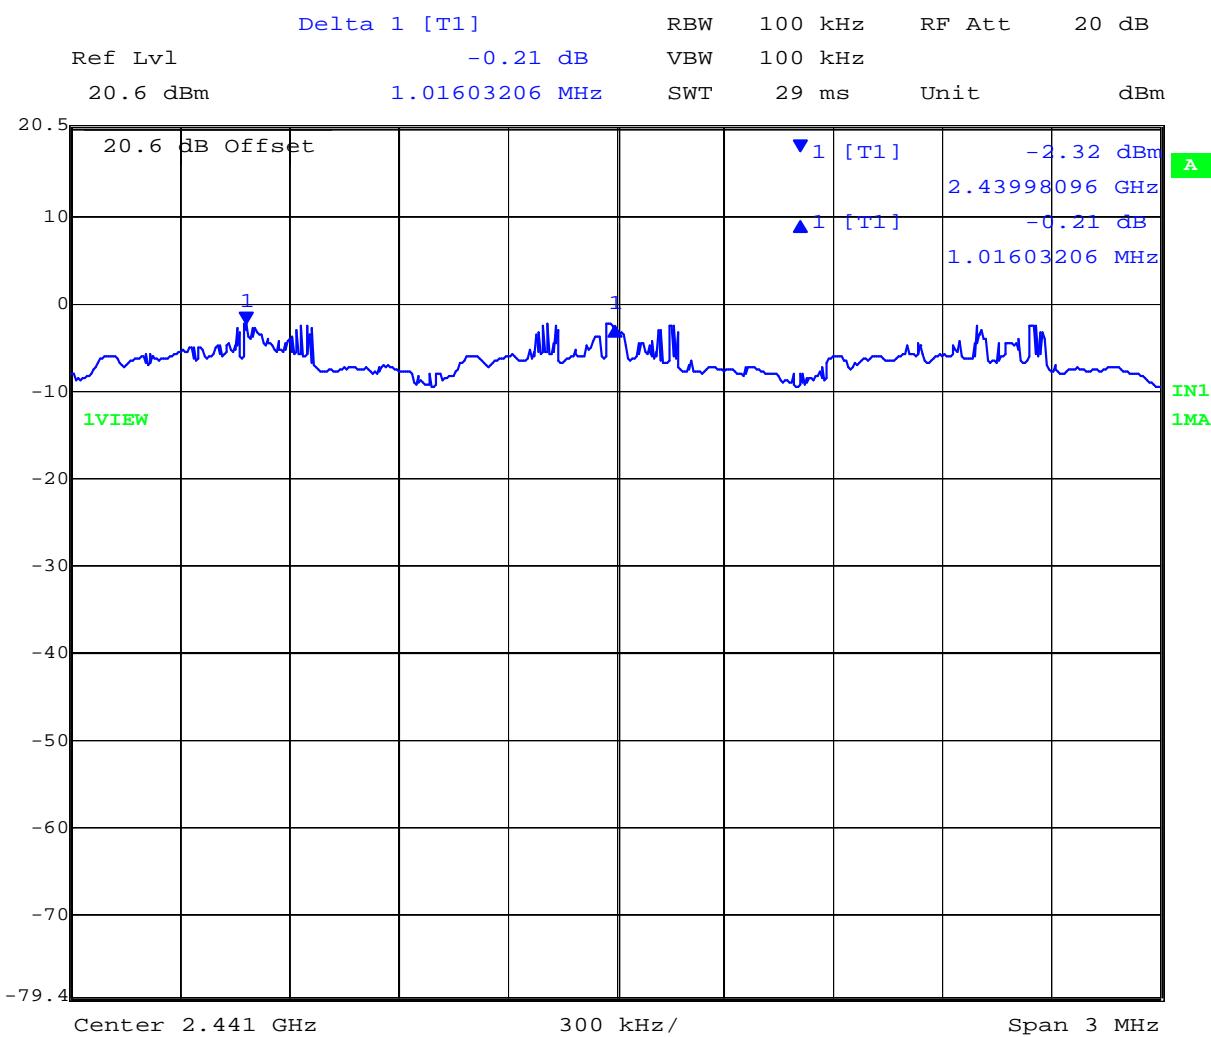


Date: 27.AUG.2013 19:24:19

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2441.00 MHz : -2.32 dBm | Channel Separation: 1.016 MHz Limit: > 1 MHz Margin: 0.016 MHz |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.3. Number of Hopping Frequencies

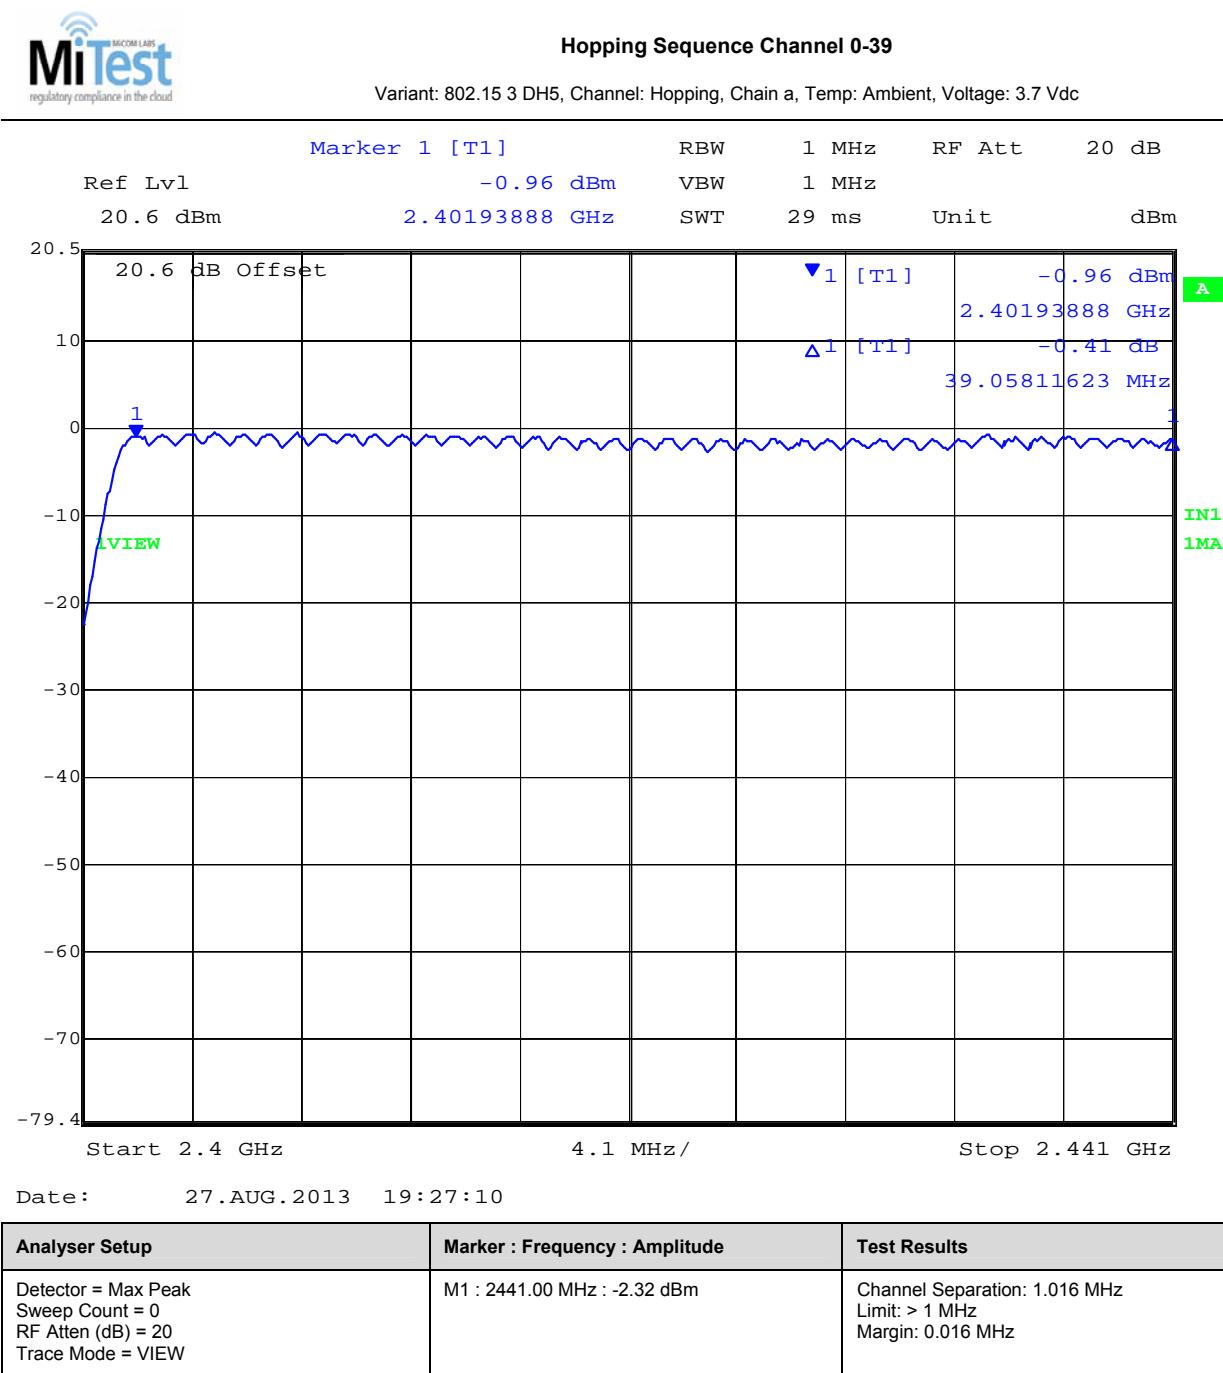

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Ear Force i70 RX Wireless Audio Headset
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: COMM71-U1 Rev A
Issue Date: 27th February 2014
Page: 102 of 129



Hopping Sequence Channel 40-78

Variant: 802.15 3 DH5, Channel: Hopping, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

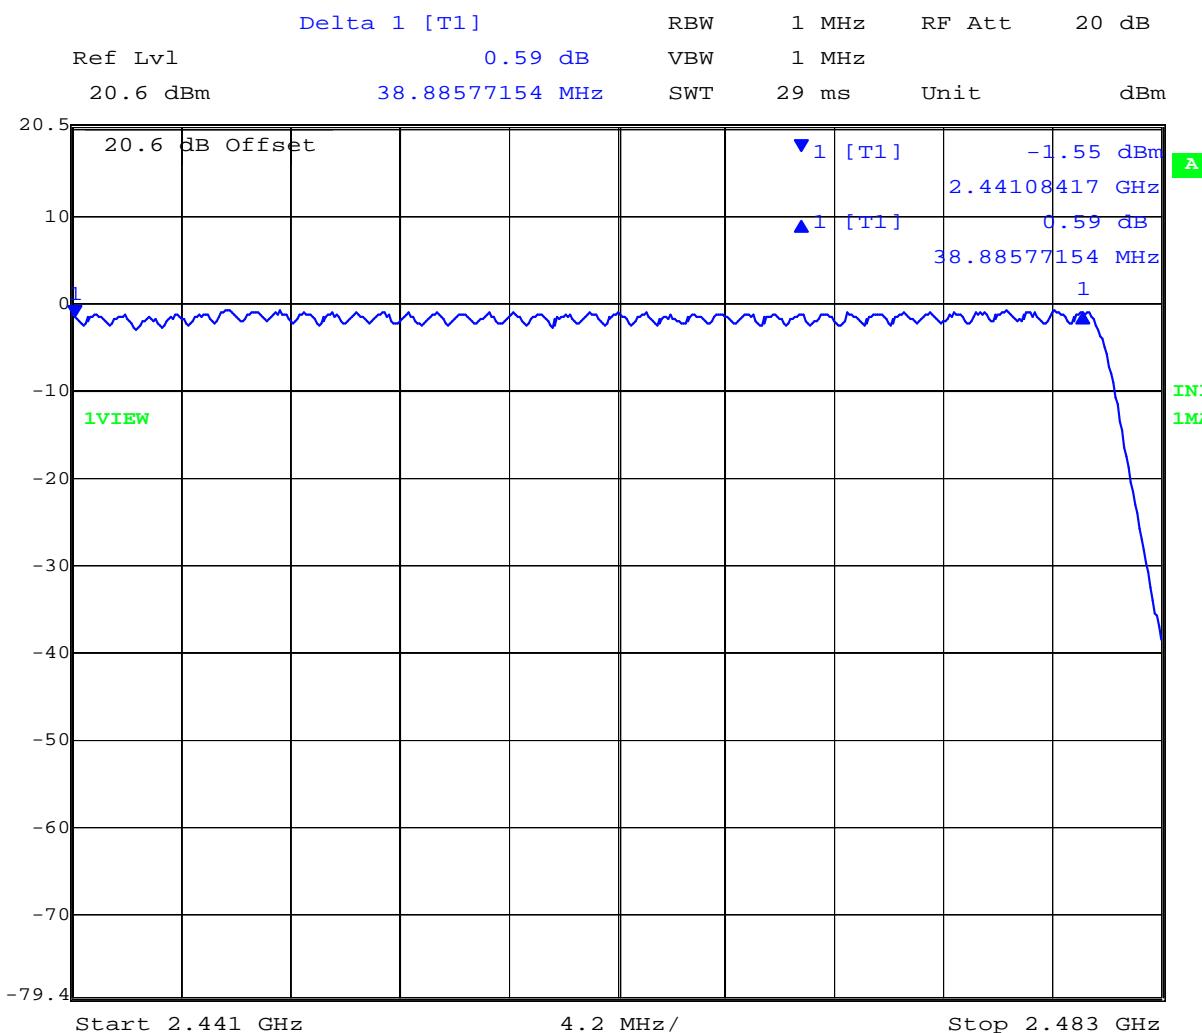


Date: 27.AUG.2013 19:29:29

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--------------|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | | |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


A.1.4. Dwell Time

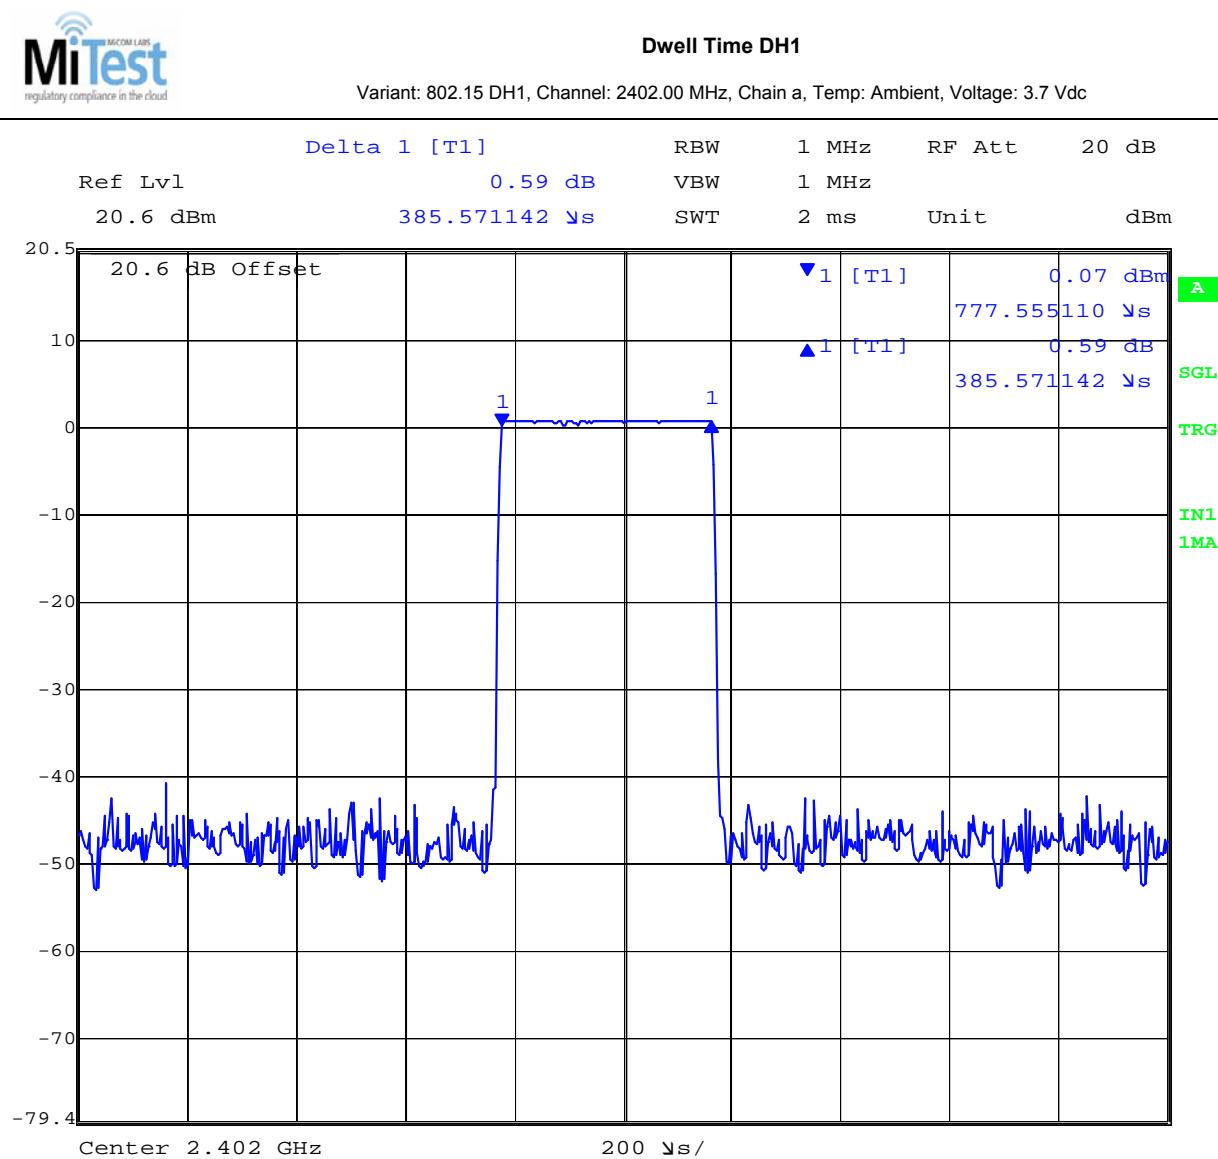

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|---|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : 0.07 dBm | Dwell Time: 0.3857 mS Limit: 400 mS Margin: 399.62 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

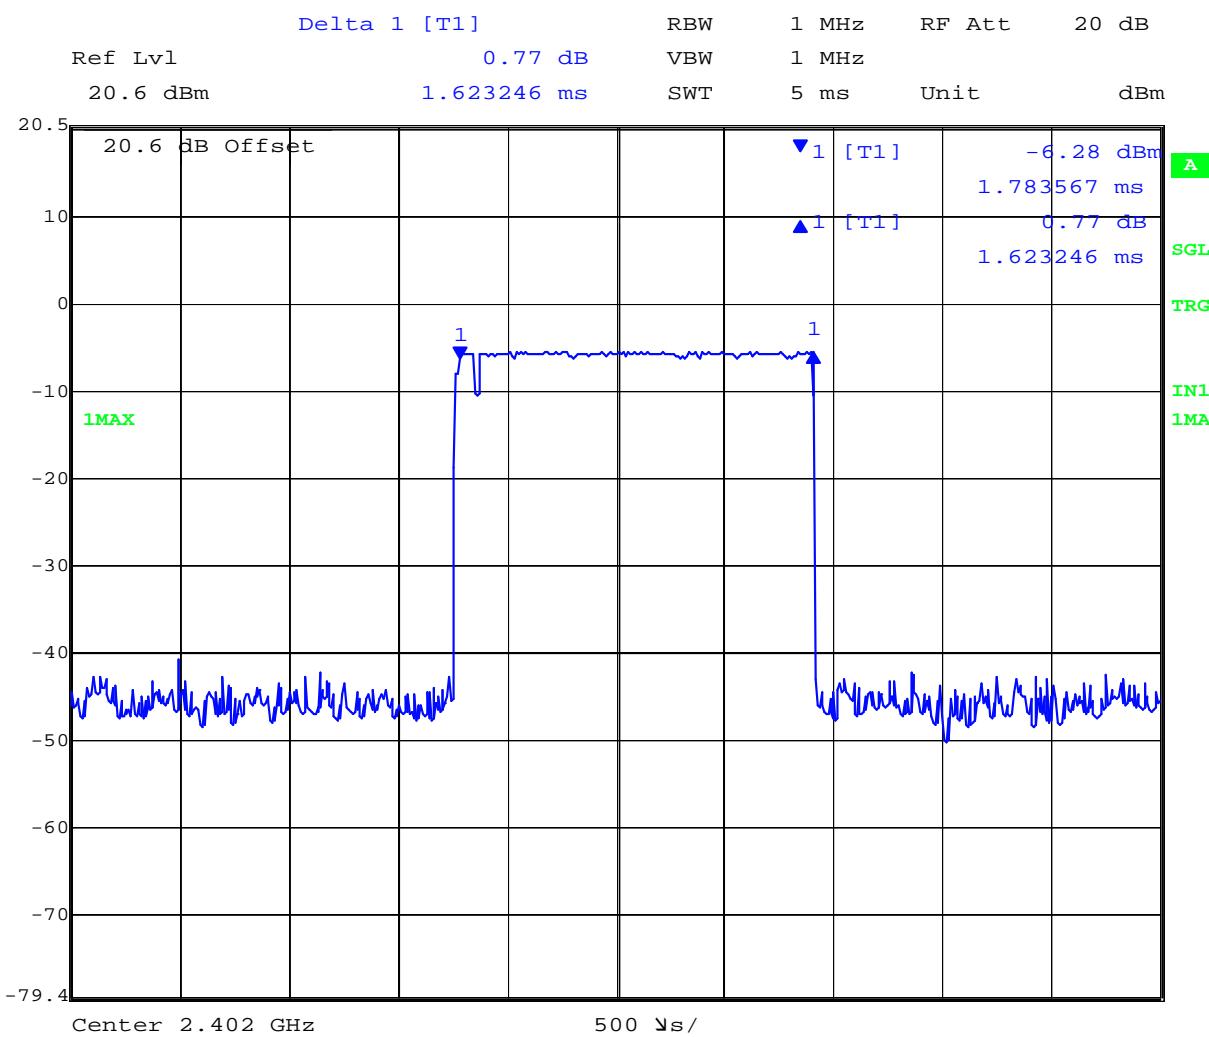


Date: 27.AUG.2013 18:33:14

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : -6.28 dBm | Dwell Time: 1.623 mS Limit: 400 mS Margin: 398.38 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

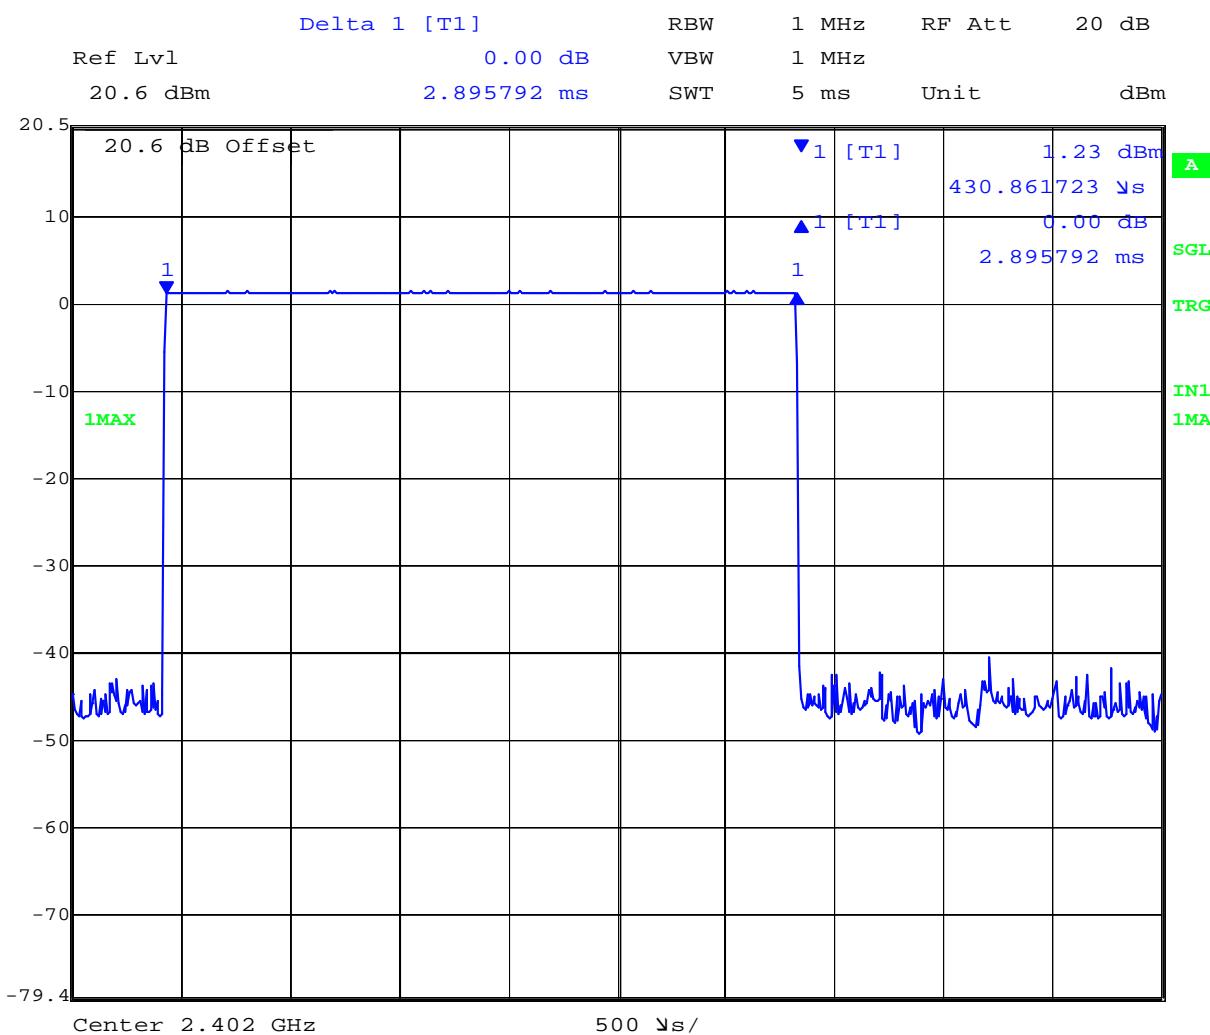


Date: 27.AUG.2013 18:39:49

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : 1.23 dBm | Dwell Time: 2.896 mS Limit: 400 mS Margin: 397.11 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

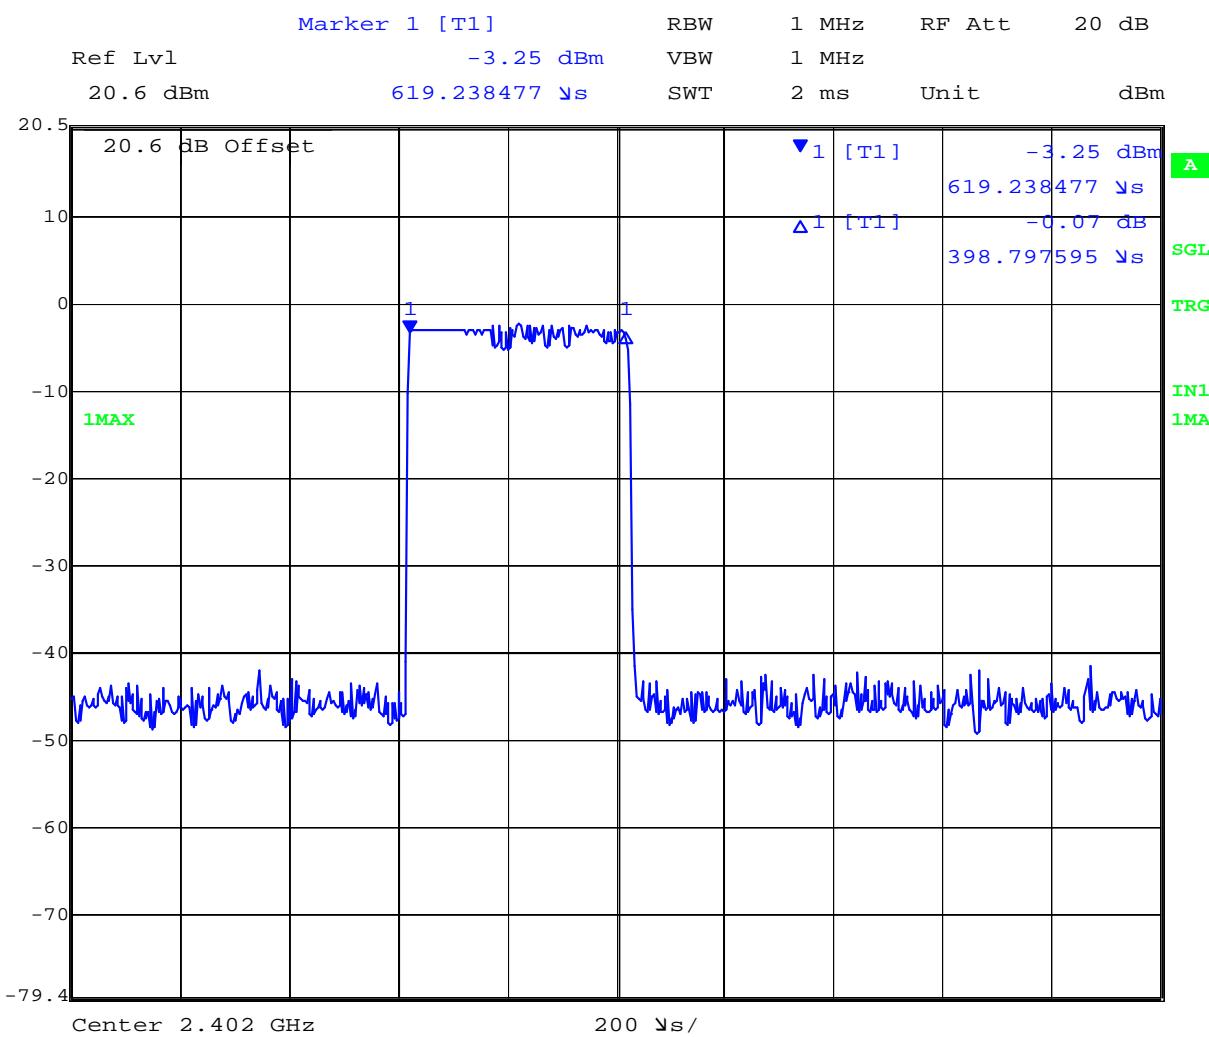


Date: 27.AUG.2013 18:42:13

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|---|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : -3.25 dBm | Dwell Time: 0.3987 mS Limit: 400 mS Margin: 399.60 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

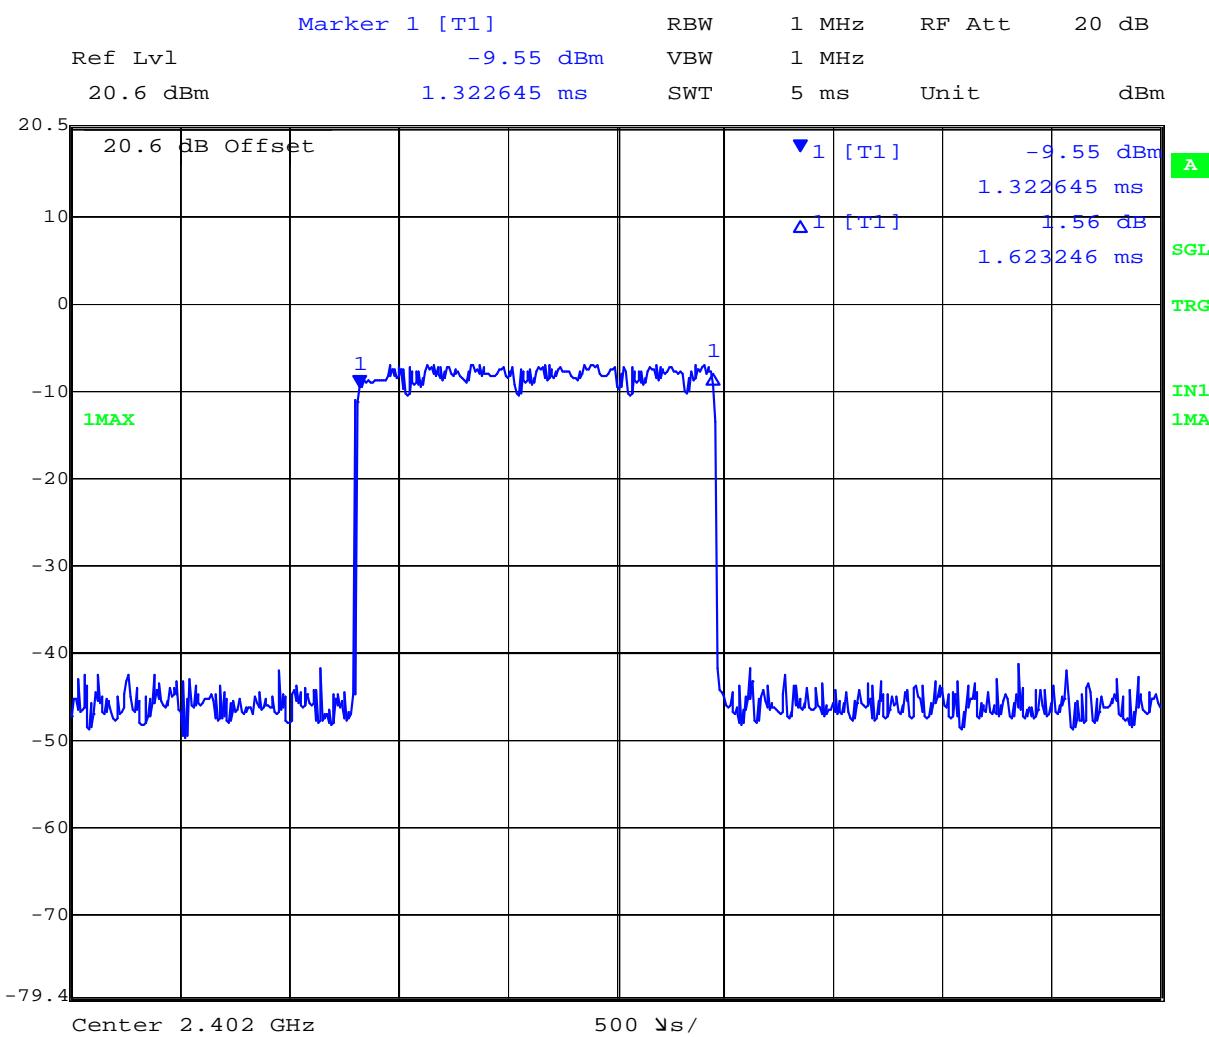


Date: 27.AUG.2013 18:54:29

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : -9.55 dBm | Dwell Time: 1.623 mS Limit: 400 mS Margin: 398.38 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

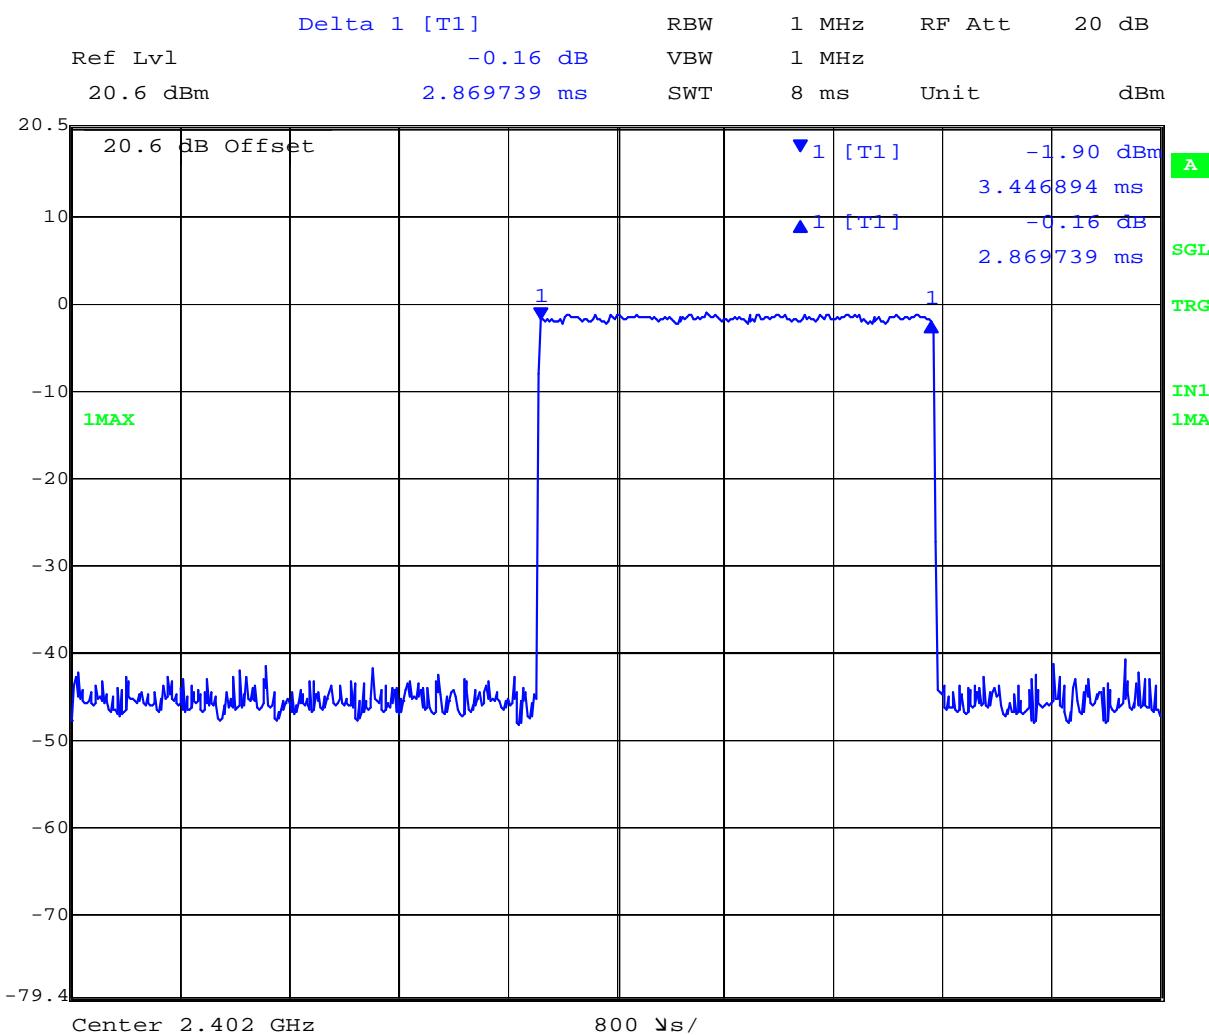


Date: 27.AUG.2013 18:51:28

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : -1.90 dBm | Dwell Time: 2.870 mS Limit: 400 mS Margin: 397.13 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

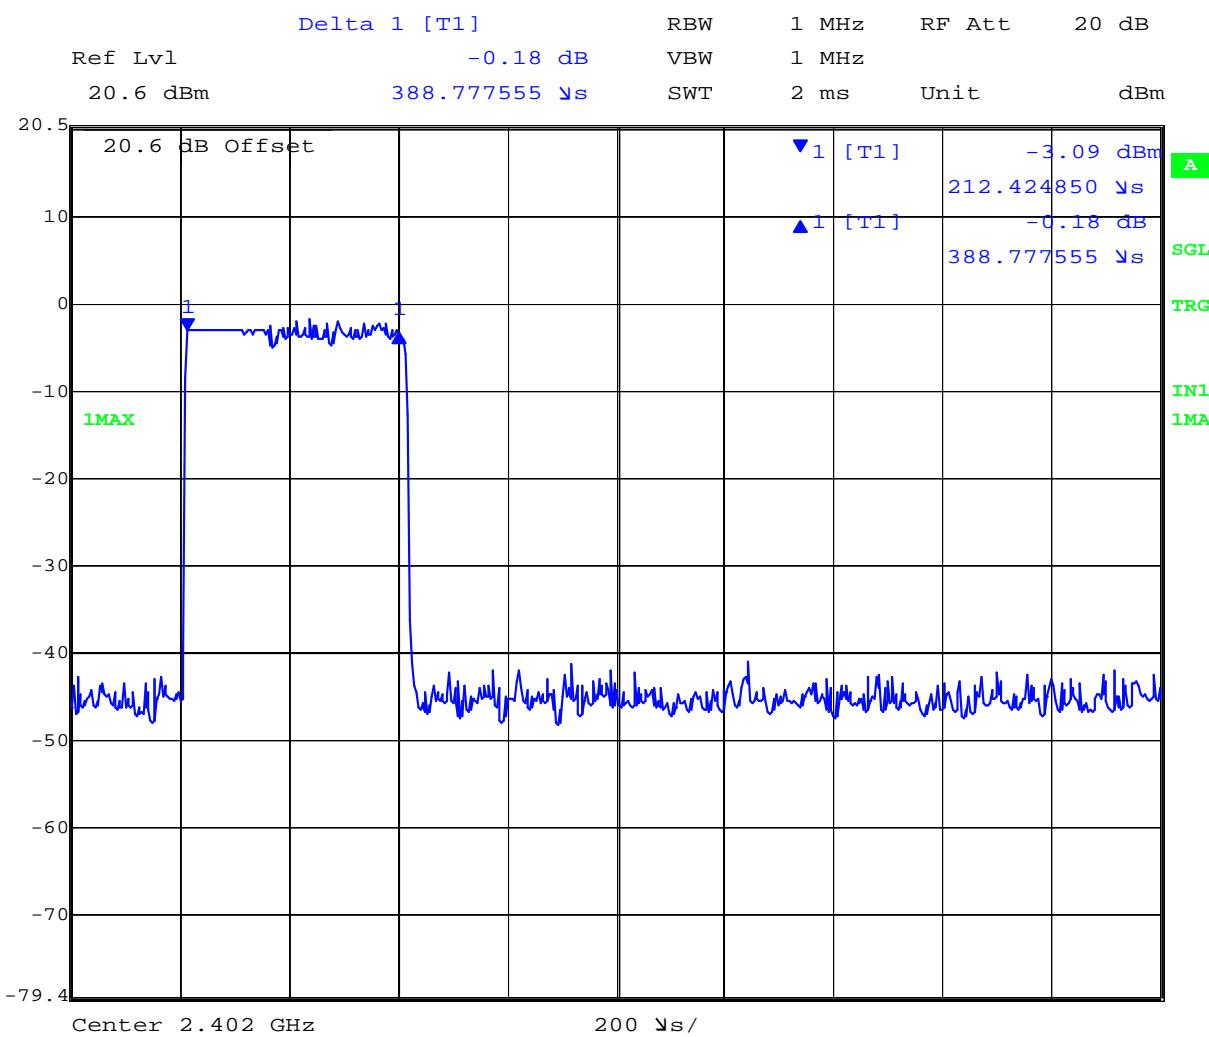


Date: 27.AUG.2013 18:56:35

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|---|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : -3.09 dBm | Dwell Time: 0.3887 mS Limit: 400 mS Margin: 399.61 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

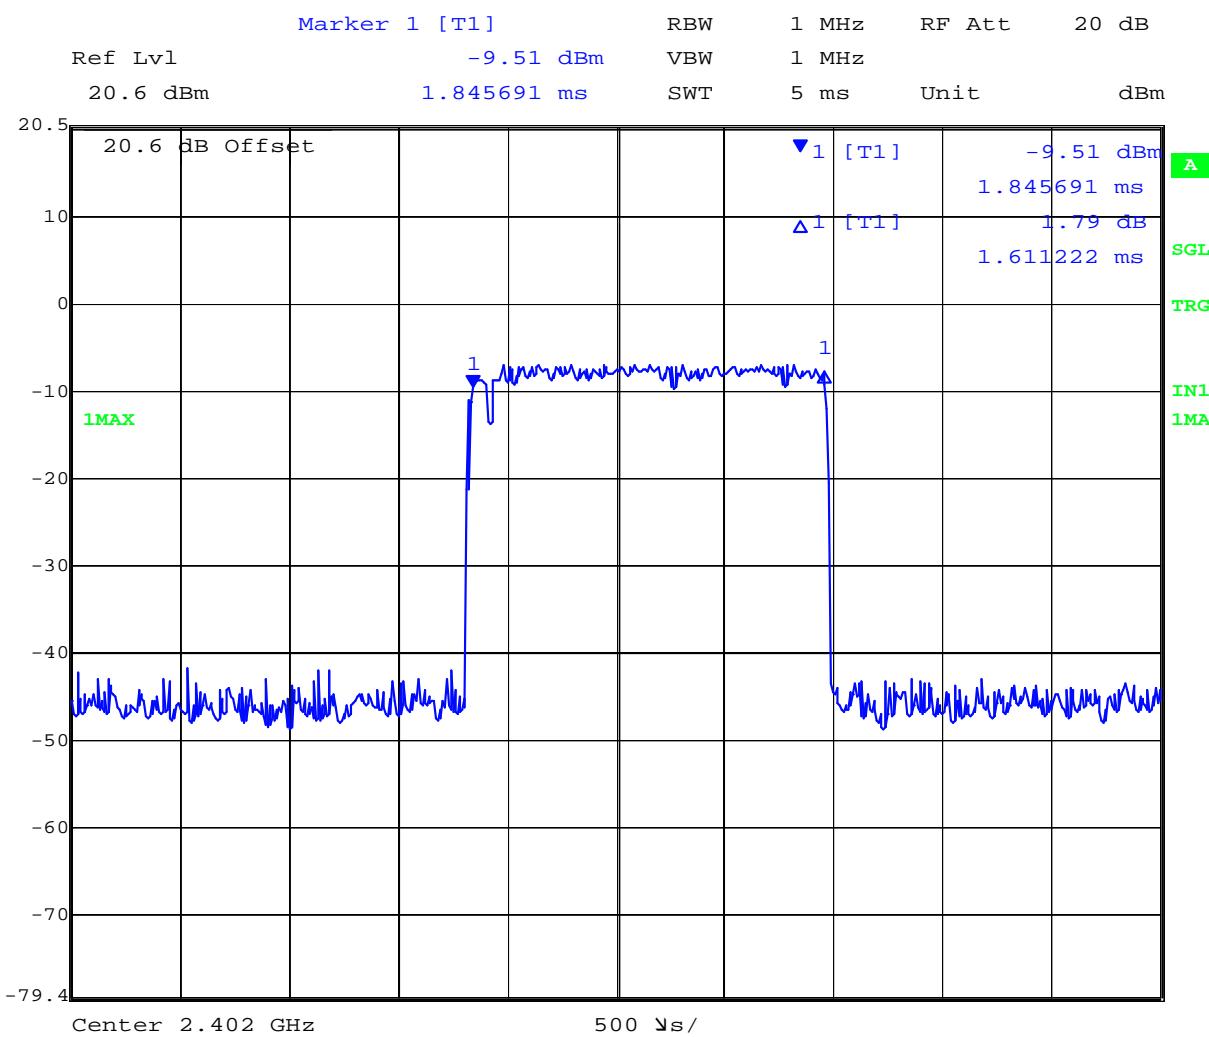


Date: 27.AUG.2013 18:59:09

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : -9.51 dBm | Dwell Time: 1.611 mS Limit: 400 mS Margin: 398.39 mS |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

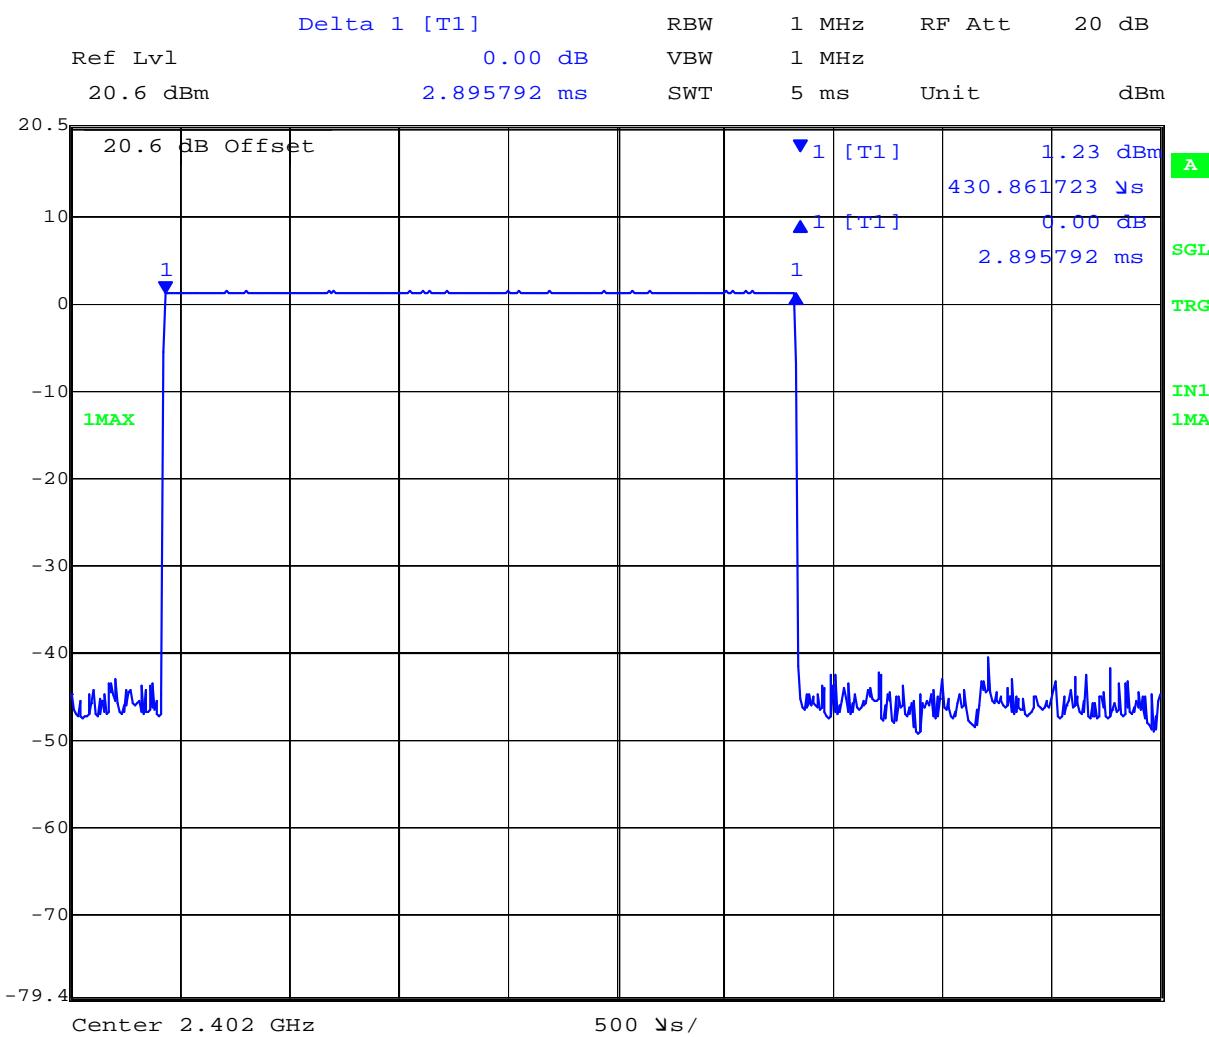

Date: 27.AUG.2013 18:39:49

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--------------------------------|--|
| Detector = Max Peak Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2402.00 MHz : 1.23 dBm | Dwell Time: 2.896 mS Limit: 400 mS Margin: 397.10 mS |

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.5. Peak Power Output



PEAK OUTPUT POWER

Variant: 802.15 DH1, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

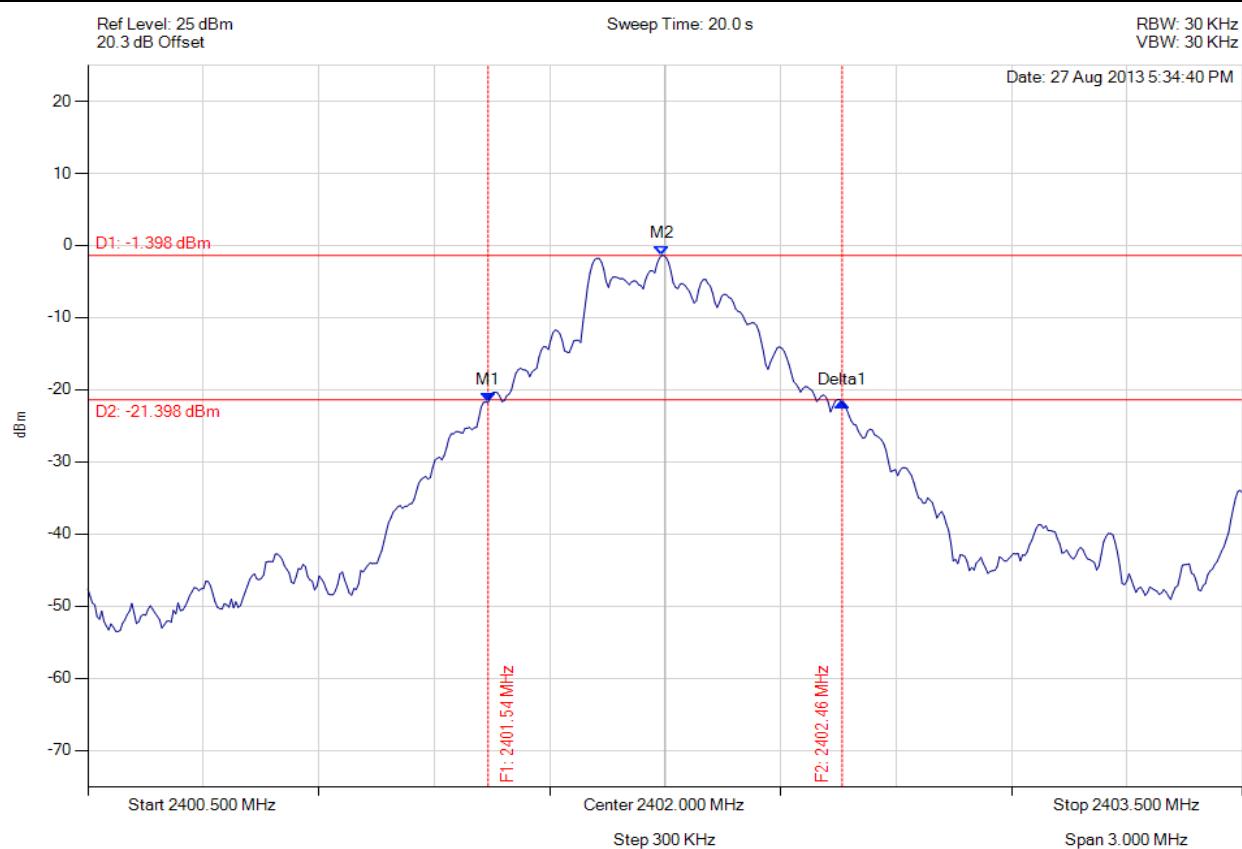


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.540 MHz : -21.754 dBm M2 : 2401.991 MHz : -1.398 dBm Delta1 : 920 KHz : -0.016 dB | Channel Power: 6.52 dBm Limit: 30.00 dBm Margin: -23.48 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15 DH1, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

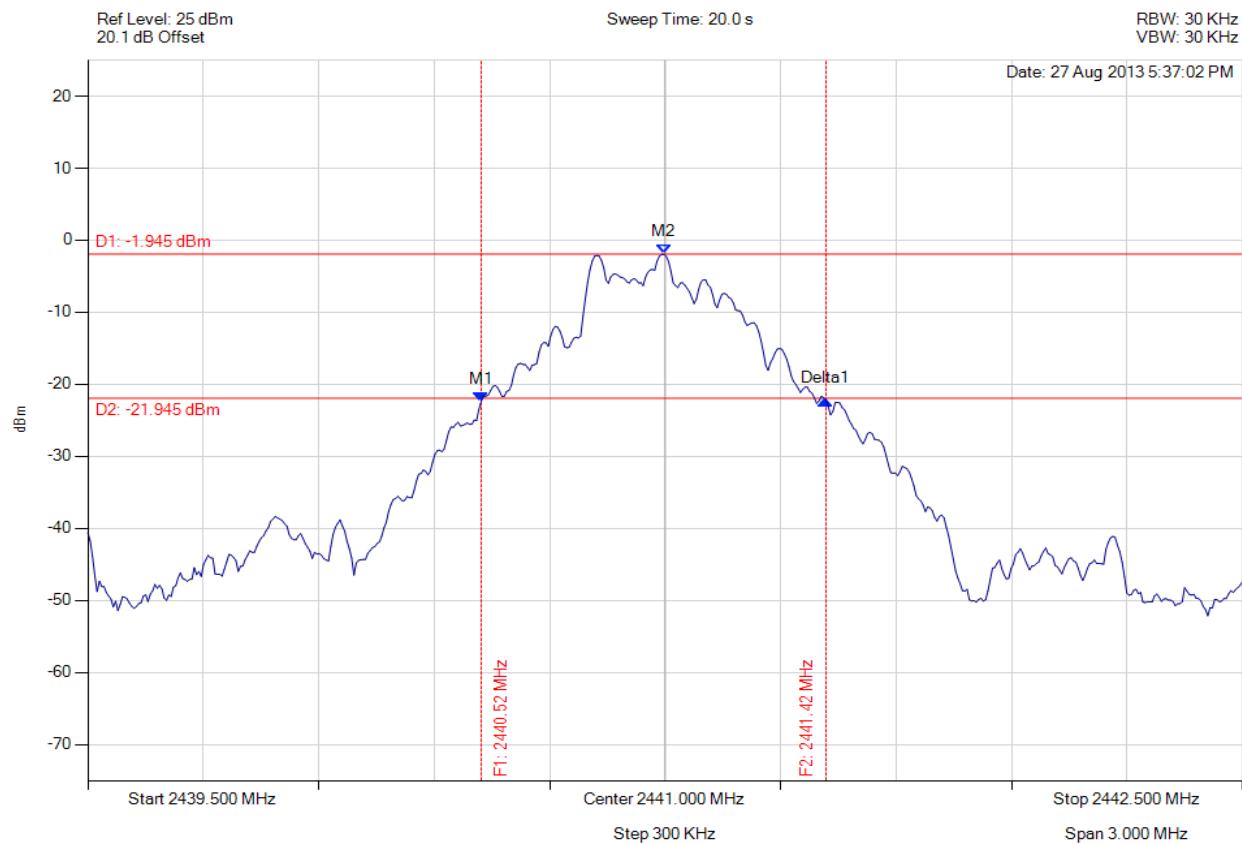


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.522 MHz : -22.360 dBm M2 : 2440.997 MHz : -1.945 dBm Delta1 : 896 KHz : 0.132 dB | Channel Power: 5.99 dBm Limit: 30.00 dBm Margin: -24.01 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15 DH1, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

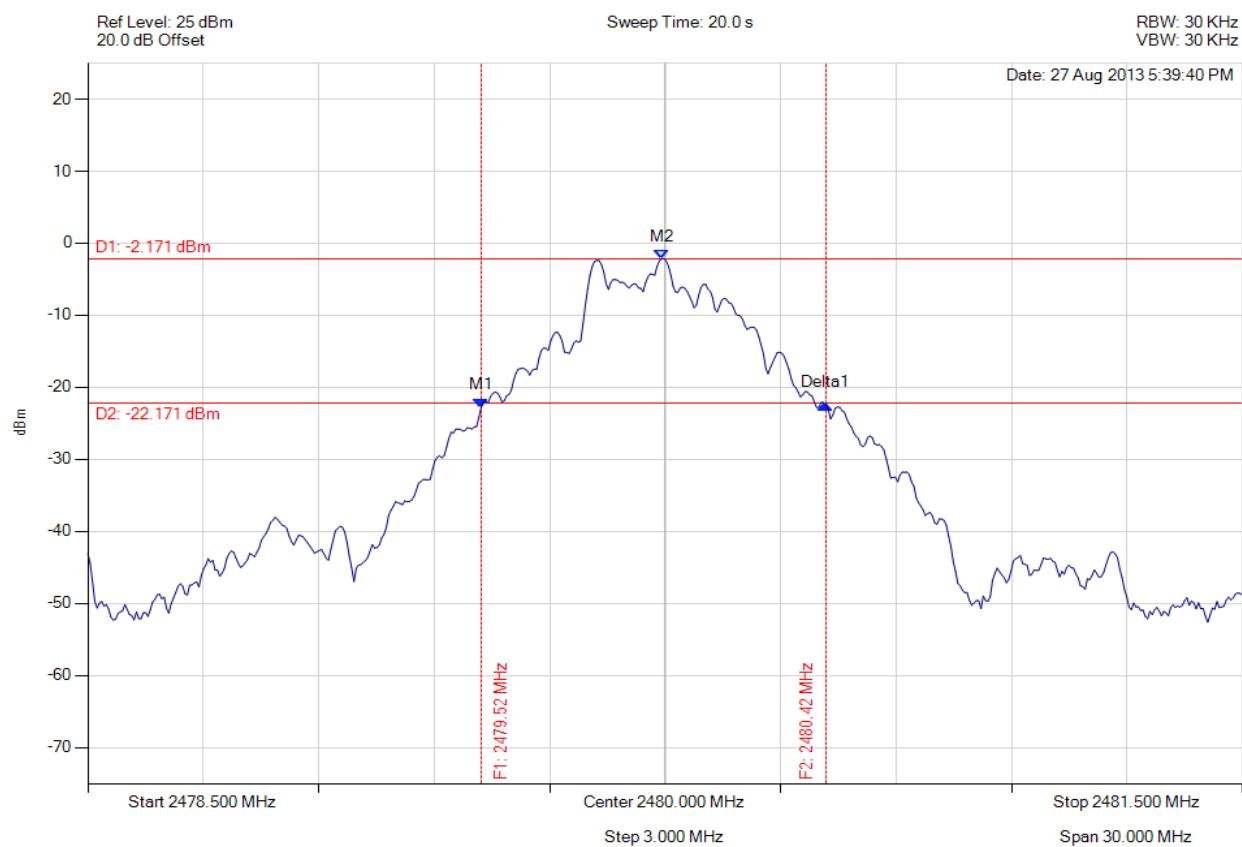


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.522 MHz : -22.799 dBm M2 : 2479.991 MHz : -2.171 dBm Delta1 : 896 KHz : 0.358 dB | Channel Power: 5.74 dBm Limit: 30.00 dBm Margin: -24.26 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15 DH5, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

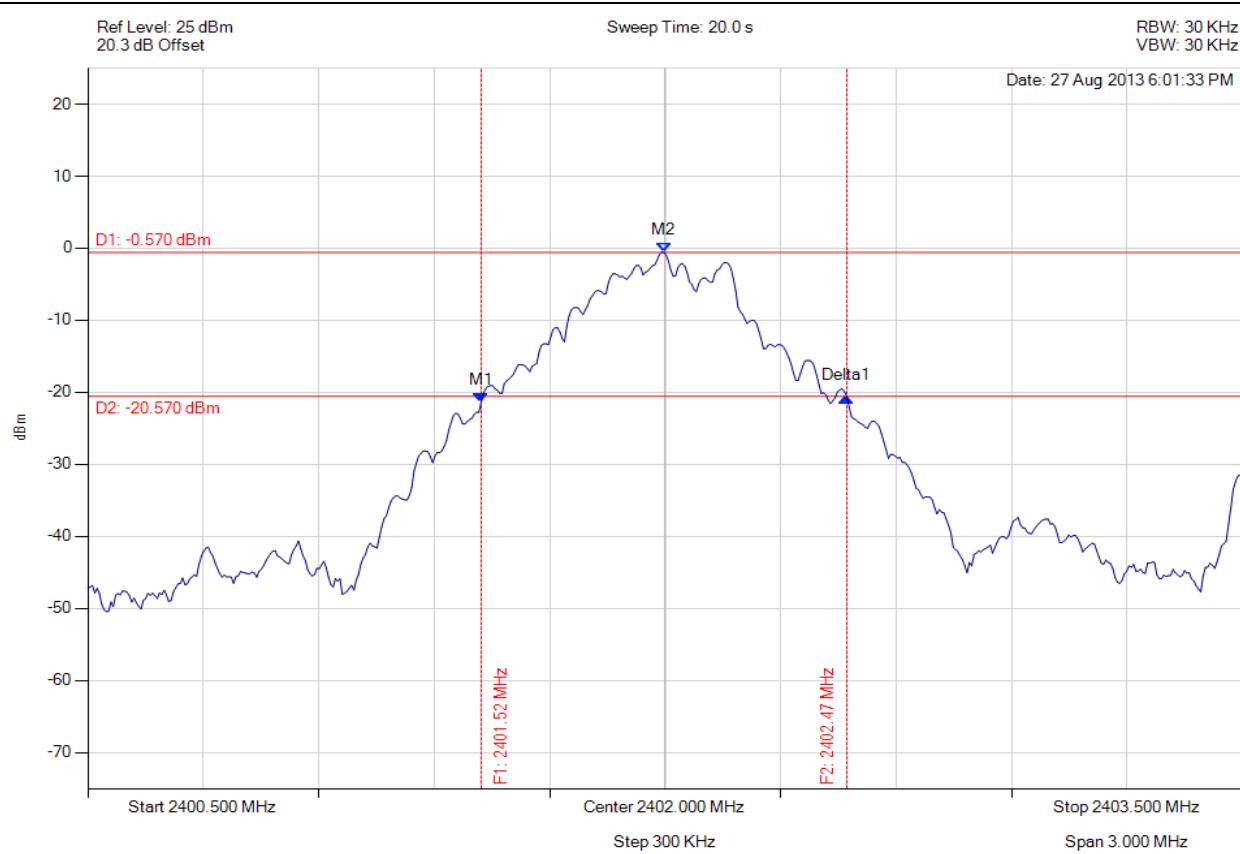


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.522 MHz : -21.371 dBm M2 : 2401.997 MHz : -0.570 dBm Delta1 : 950 KHz : 0.722 dB | Channel Power: 7.72 dBm Limit: 30.00 dBm Margin: -22.28 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER


Variant: 802.15 DH5, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

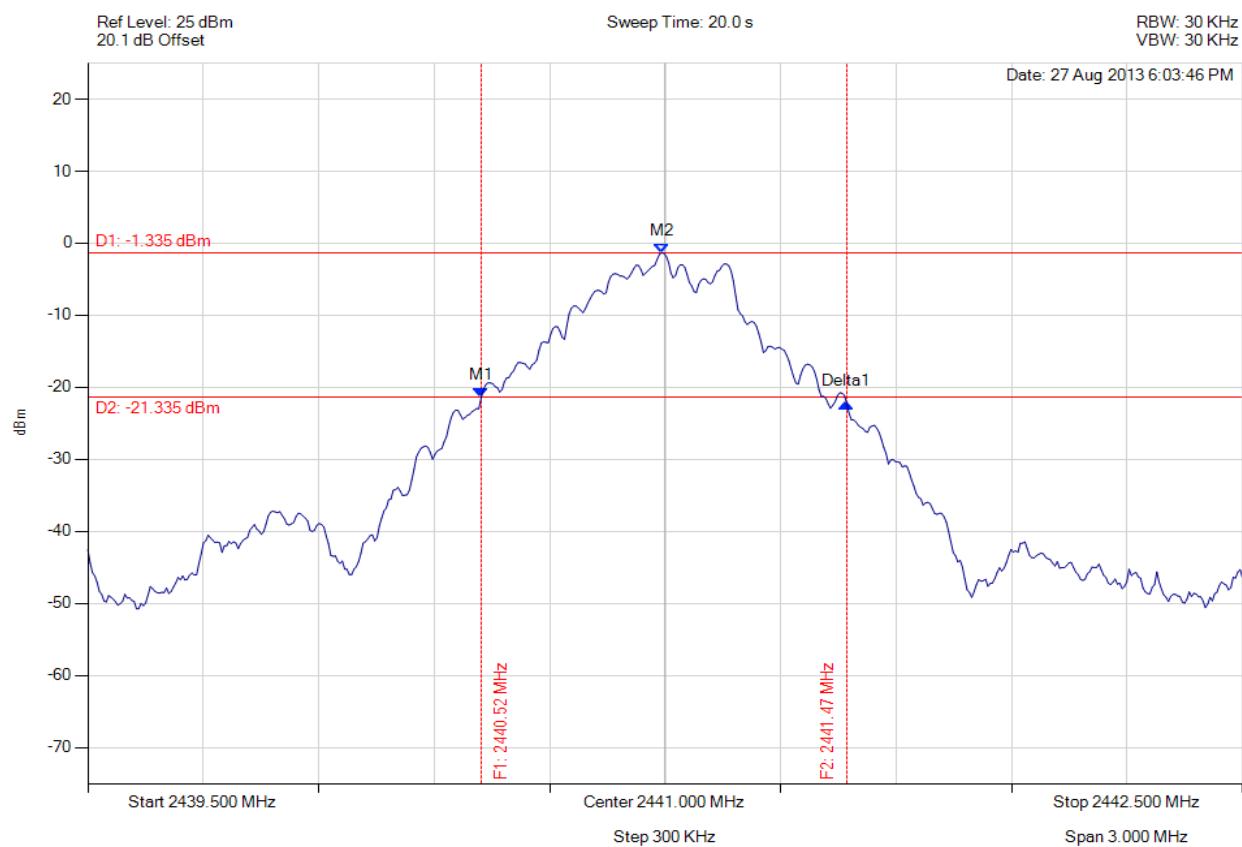

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.522 MHz : -21.404 dBm M2 : 2440.991 MHz : -1.335 dBm Delta1 : 950 KHz : -0.885 dB | Channel Power: 6.95 dBm Limit: 30.00 dBm Margin: -23.05 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

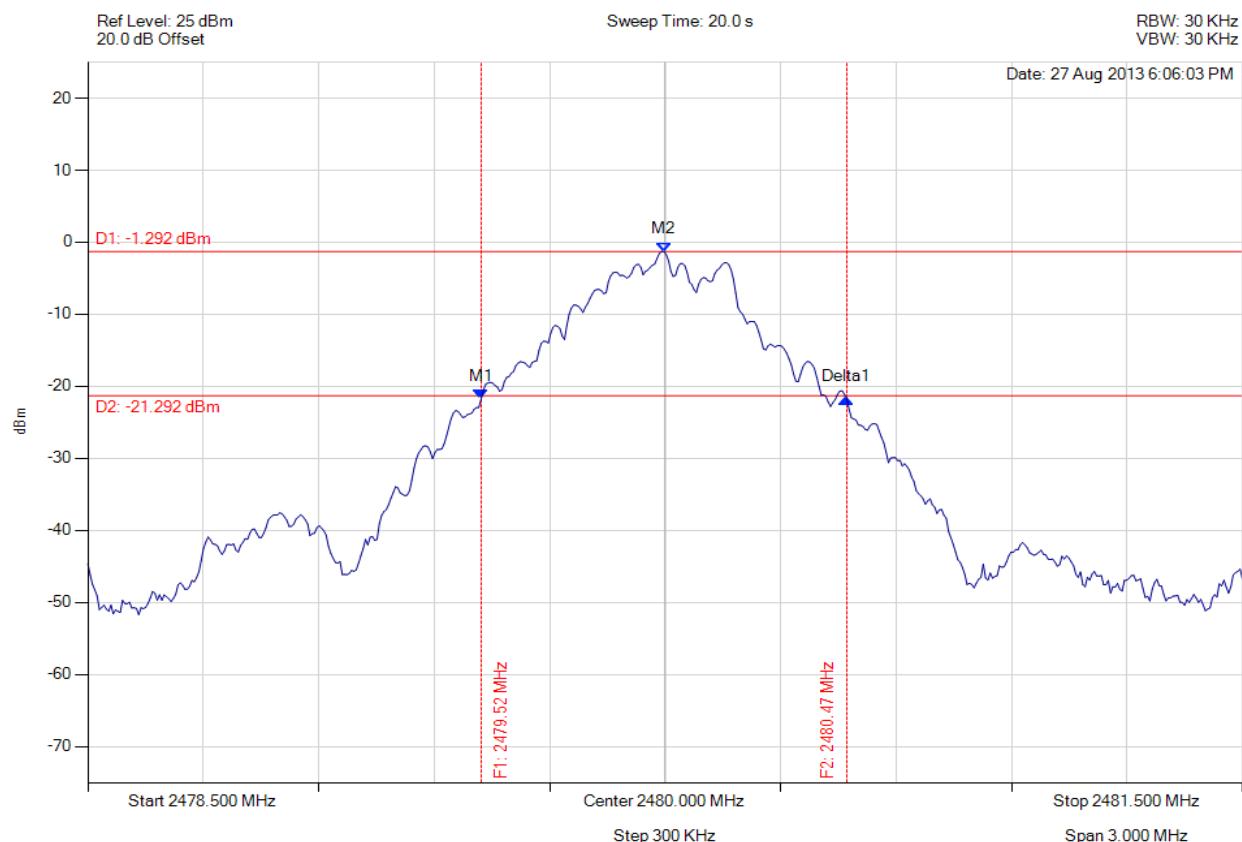


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.522 MHz : -21.721 dBm M2 : 2479.997 MHz : -1.292 dBm Delta1 : 950 KHz : 0.014 dB | Channel Power: 6.98 dBm Limit: 30.00 dBm Margin: -23.02 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15 3-DH1, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

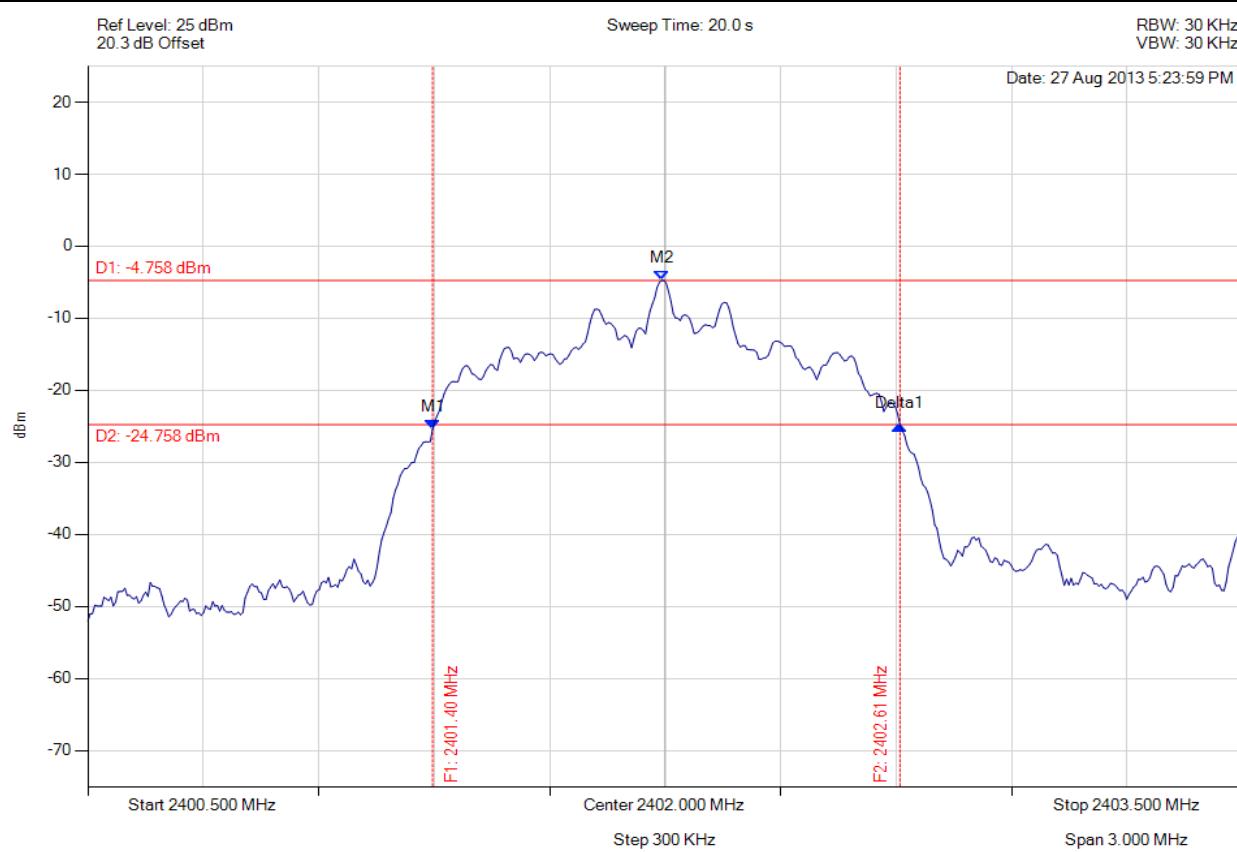


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.396 MHz : -25.398 dBm M2 : 2401.991 MHz : -4.758 dBm Delta1 : 1.214 MHz : 0.523 dB | Channel Power: 2.78 dBm Limit: 30.00 dBm Margin: -27.22 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15 3-DH1, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

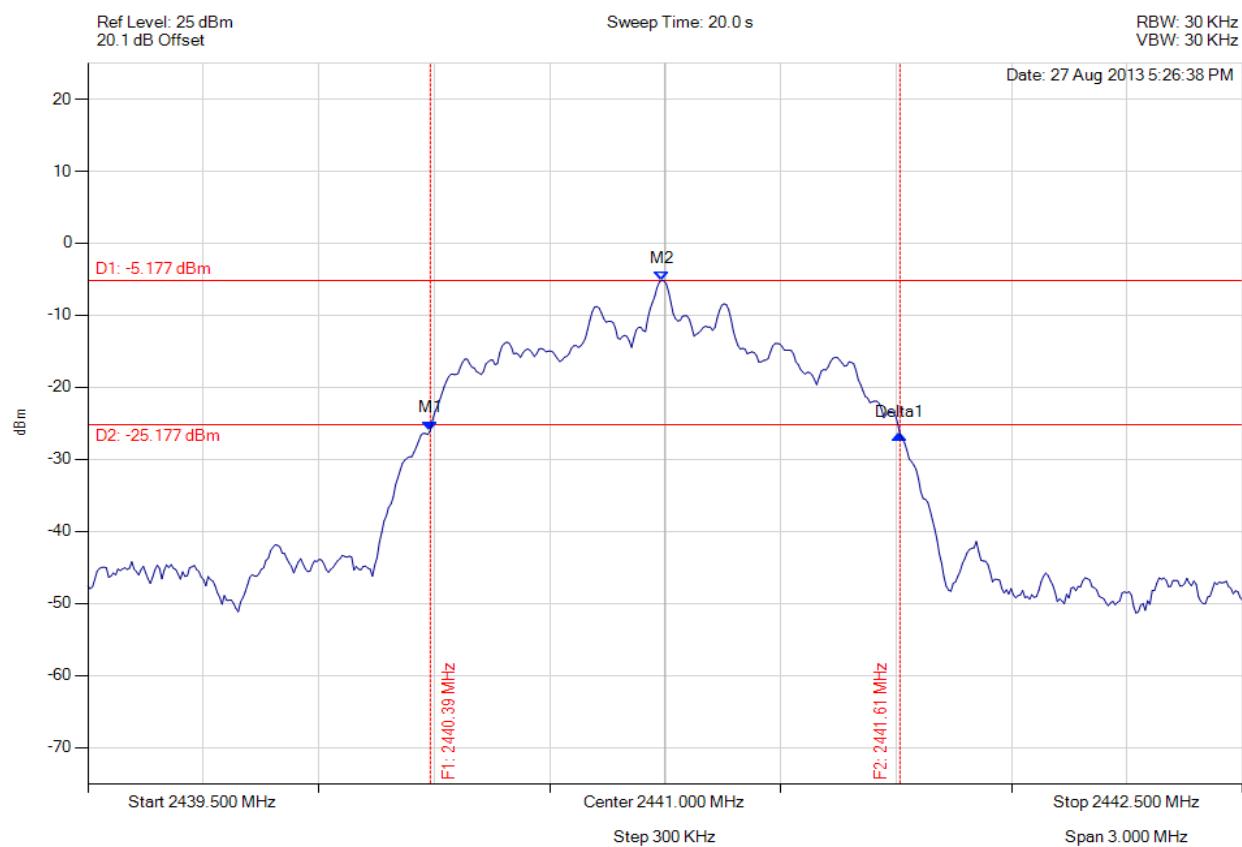


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.390 MHz : -25.966 dBm M2 : 2440.991 MHz : -5.177 dBm Delta1 : 1.220 MHz : -0.606 dB | Channel Power: 2.37 dBm Limit: 30.00 dBm Margin: -27.63 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15 3-DH1, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

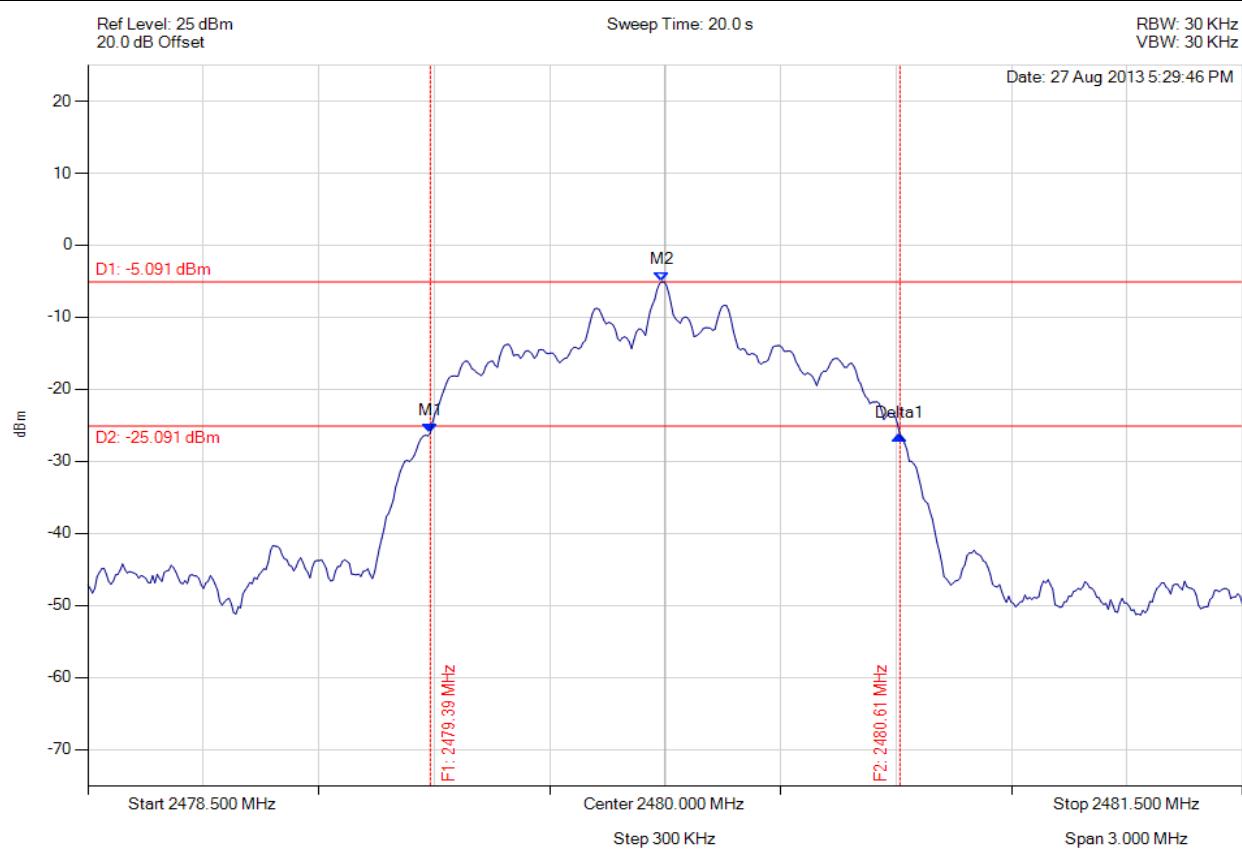


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.390 MHz : -26.075 dBm M2 : 2479.991 MHz : -5.091 dBm Delta1 : 1.220 MHz : -0.362 dB | Channel Power: 2.45 dBm Limit: 30.00 dBm Margin: -27.55 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

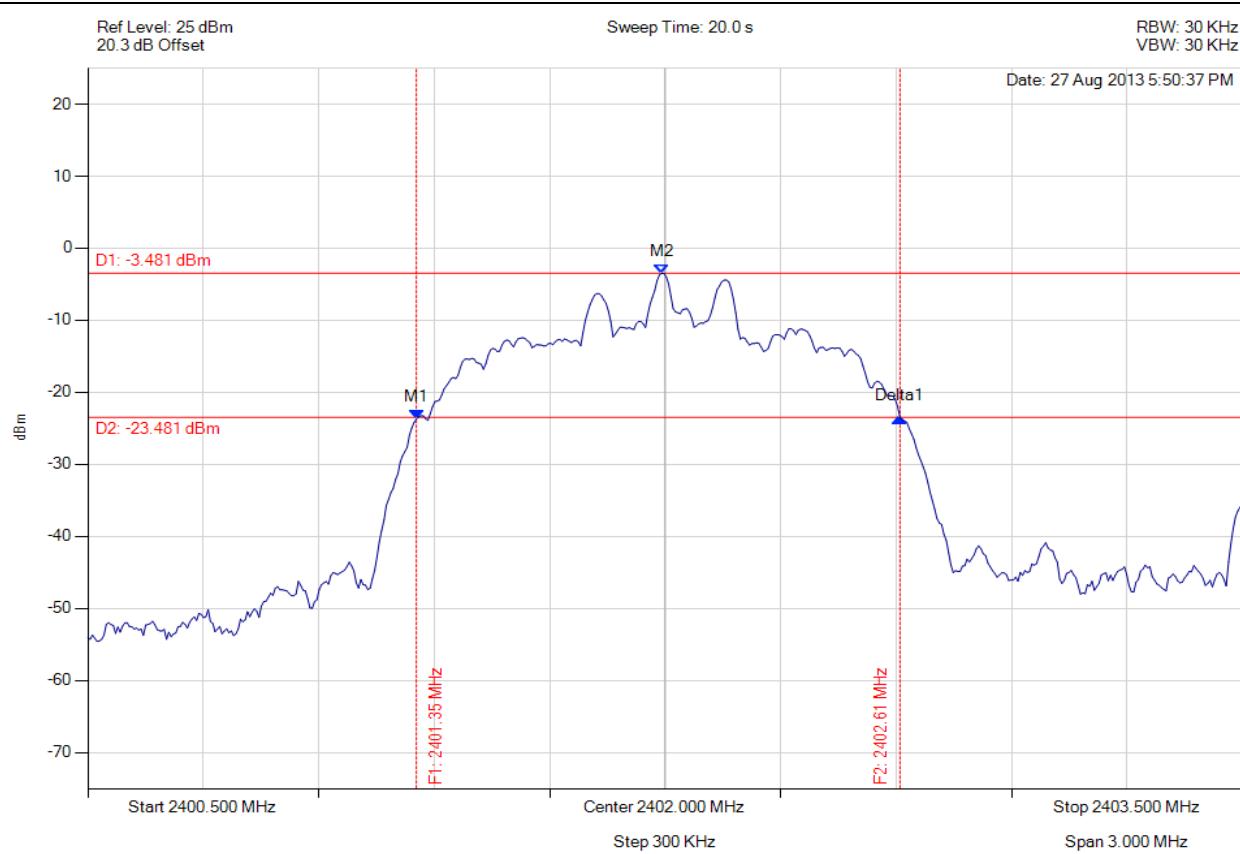


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2401.354 MHz : -23.708 dBm M2 : 2401.991 MHz : -3.481 dBm Delta1 : 1.257 MHz : 0.212 dB | Channel Power: 4.76 dBm Limit: 30.00 dBm Margin: -25.24 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

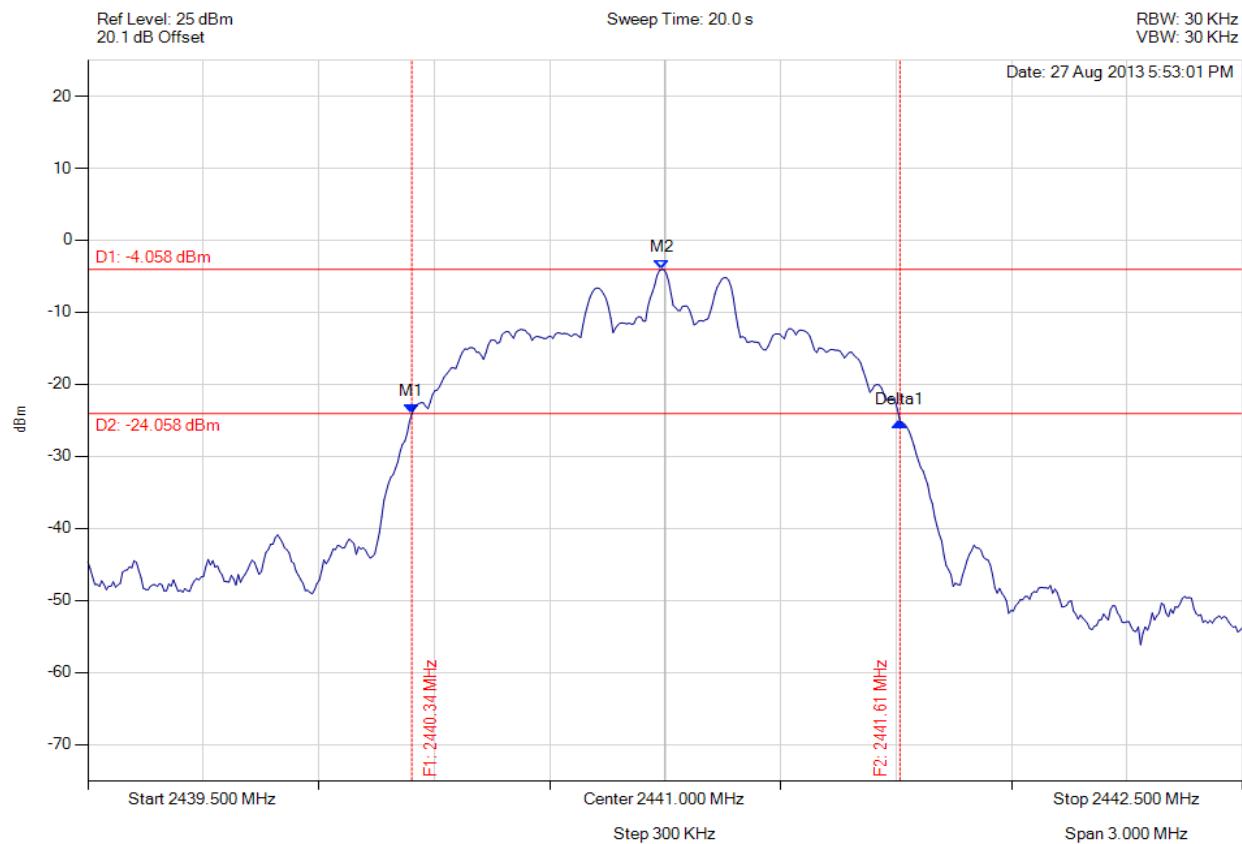


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2440.342 MHz : -24.125 dBm M2 : 2440.991 MHz : -4.058 dBm Delta1 : 1.269 MHz : -1.049 dB | Channel Power: 4.19 dBm Limit: 30.00 dBm Margin: -25.81 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PEAK OUTPUT POWER

Variant: 802.15, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

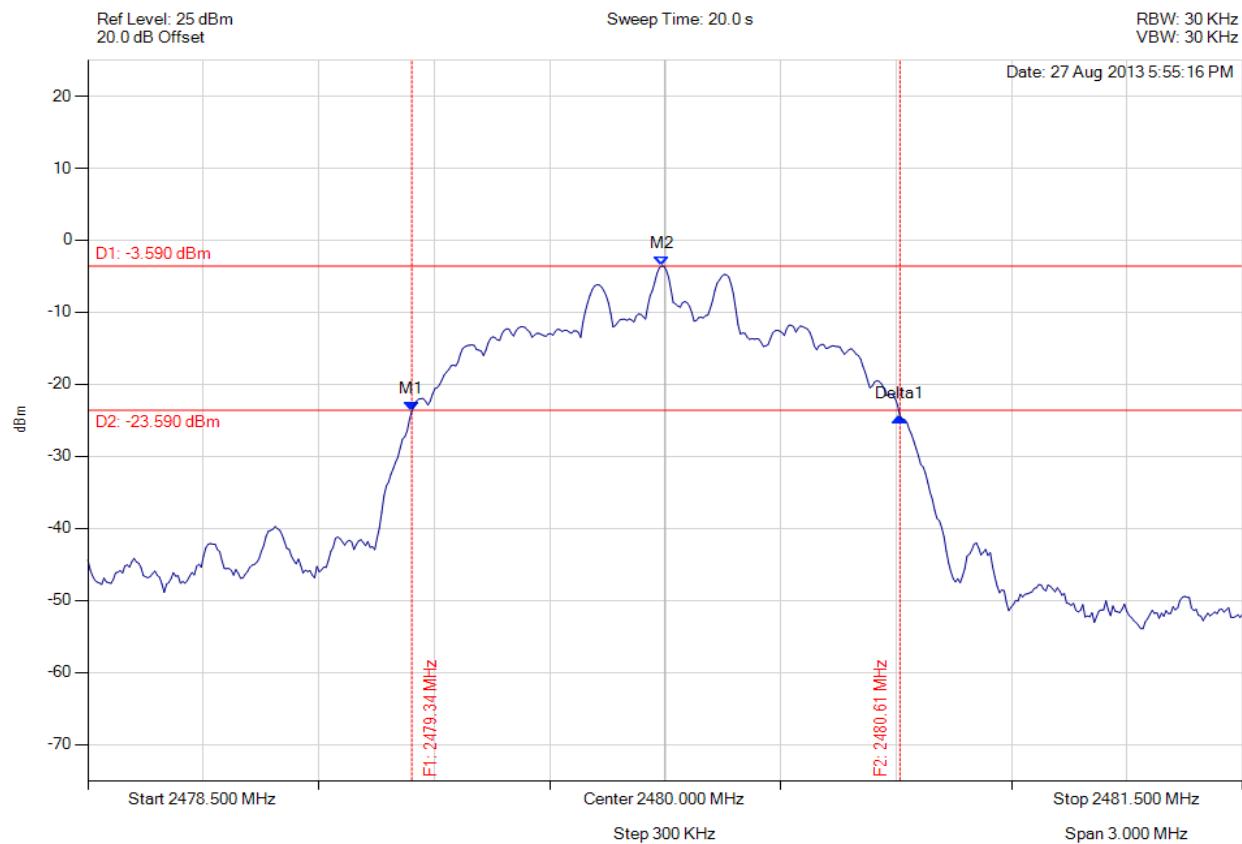

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2479.342 MHz : -23.696 dBm M2 : 2479.991 MHz : -3.590 dBm Delta1 : 1.269 MHz : -0.773 dB | Channel Power: 4.64 dBm Limit: 30.00 dBm Margin: -25.36 dB |

[Back to the Matrix](#)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

A.1.6. Conducted Spurious Emissions



CONDUCTED LOW BAND-EDGE EMISSION - PEAK

Variant: 802.15, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

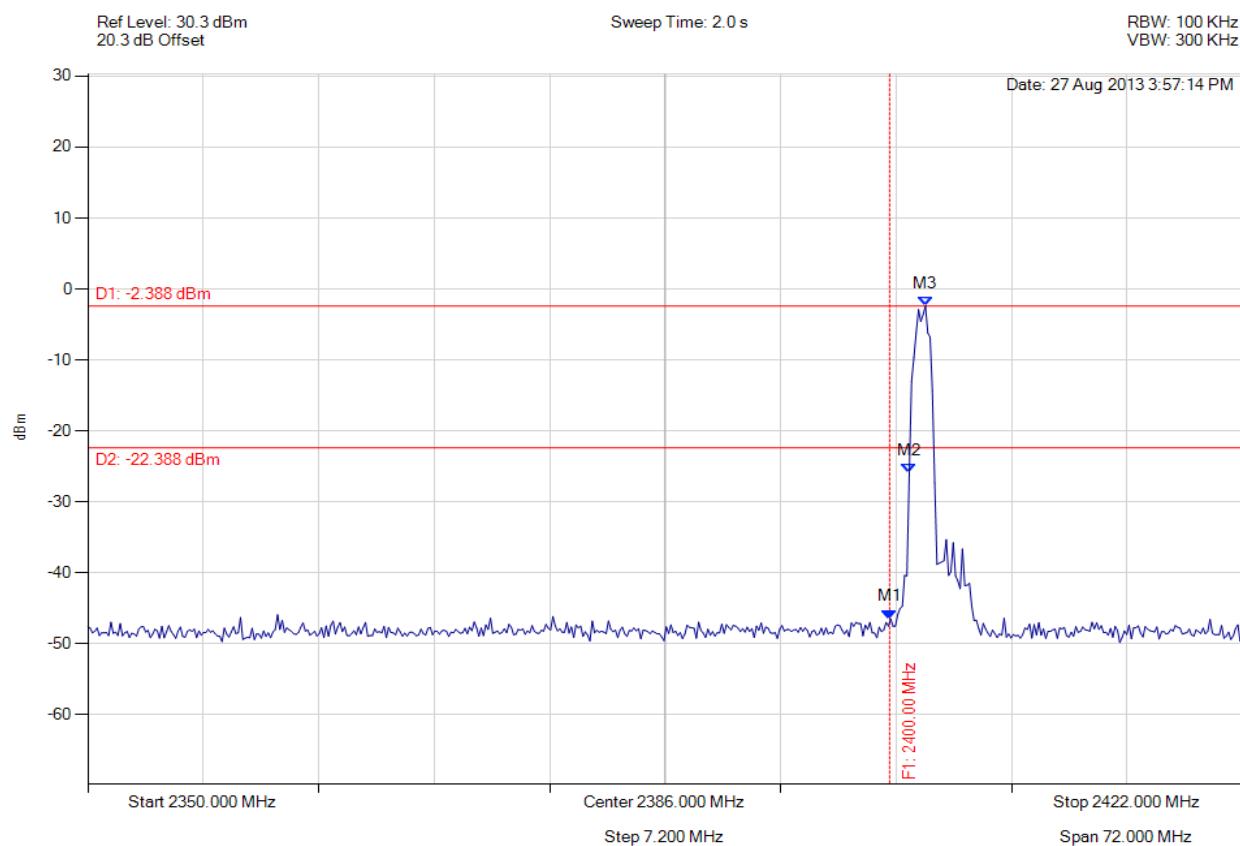


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2400.000 MHz : -46.508 dBm M2 : 2401.222 MHz : -25.960 dBm M3 : 2402.232 MHz : -2.388 dBm | Limit: -22.39 dBm Margin: -24.12 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

CONDUCTED SPURIOUS EMISSIONS - PEAK

Variant: 802.15, Channel: 2402.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

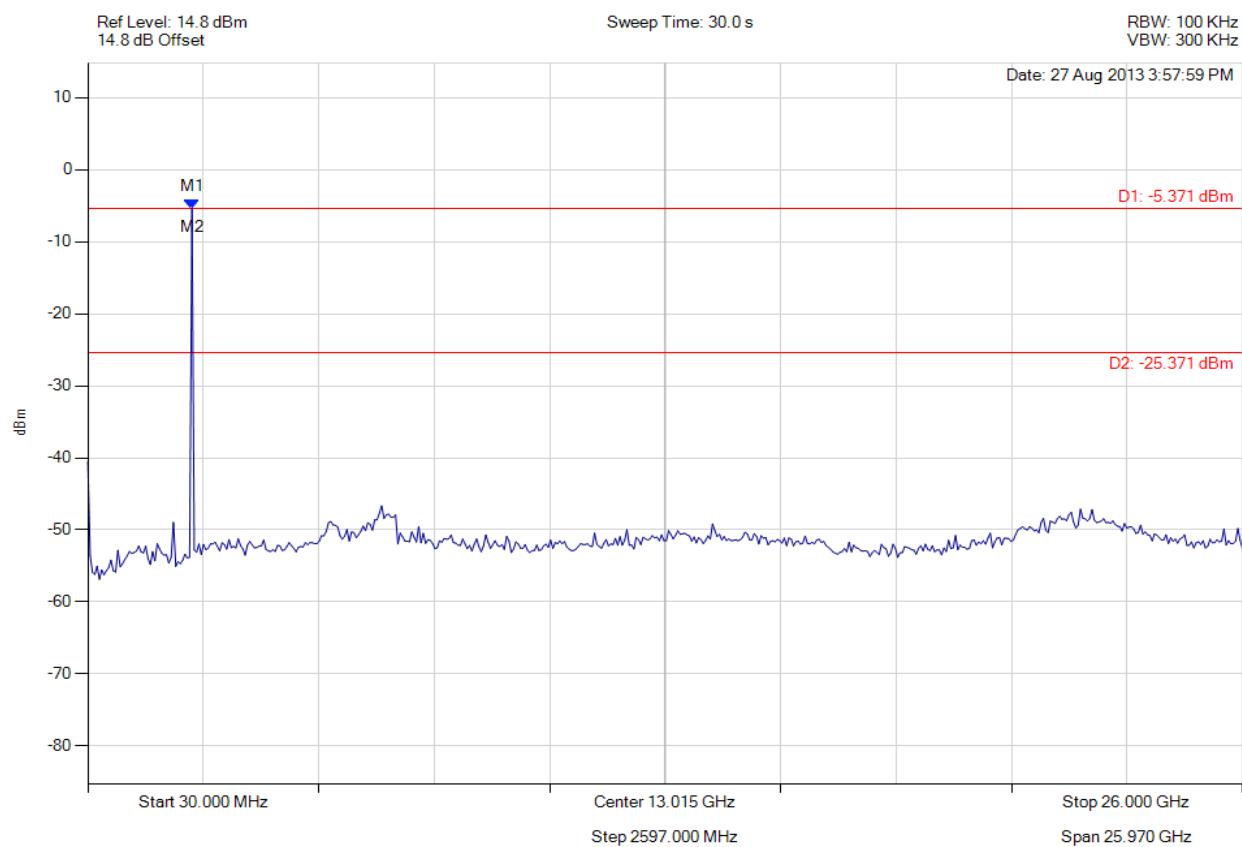


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2371.984 MHz : -5.371 dBm M2 : 6639.599 MHz : -46.650 dBm | Limit: -25.37 dBm Margin: -21.30 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

CONDUCTED SPURIOUS EMISSIONS - PEAK

Variant: 802.15, Channel: 2441.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

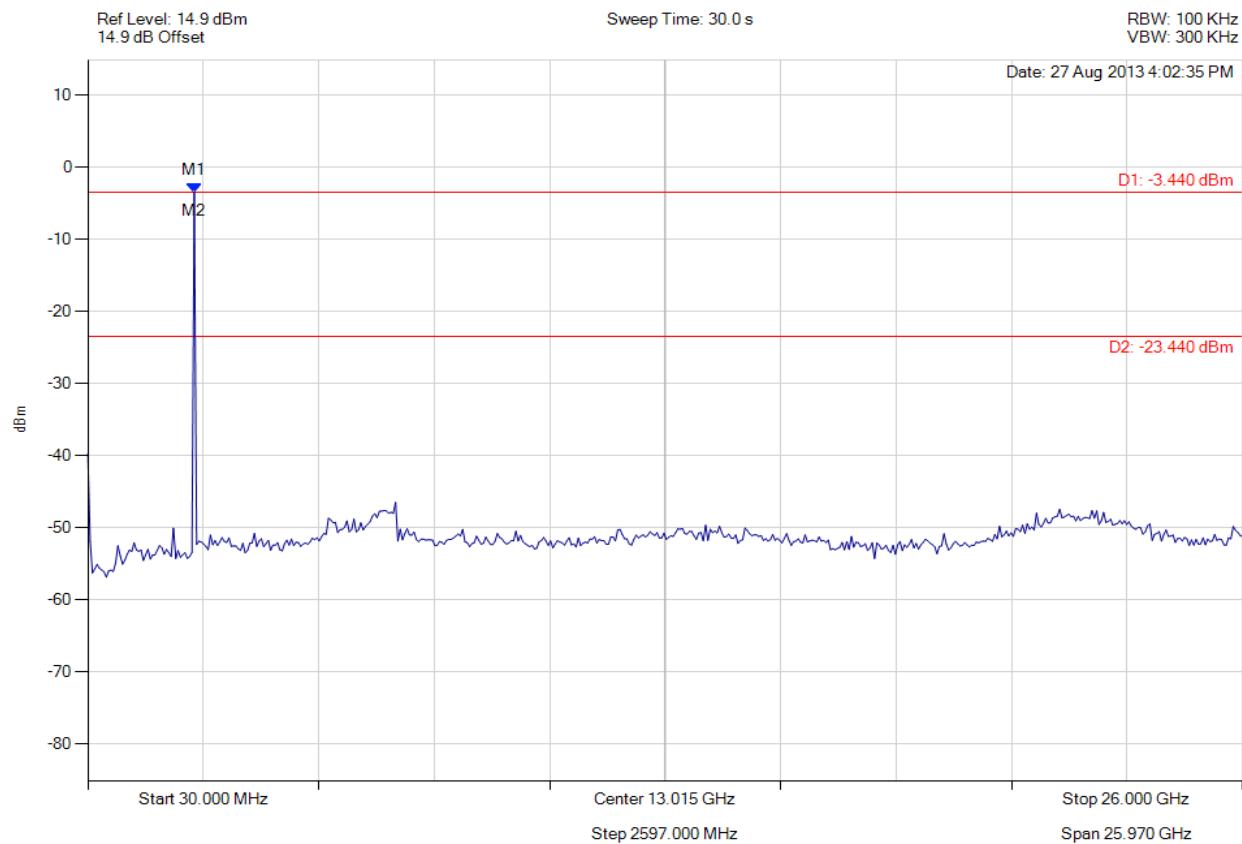


| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2424.028 MHz : -3.440 dBm M2 : 6951.864 MHz : -46.493 dBm | Limit: -23.44 dBm Margin: -23.05 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

CONDUCTED SPURIOUS EMISSIONS - PEAK

Variant: 802.15, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

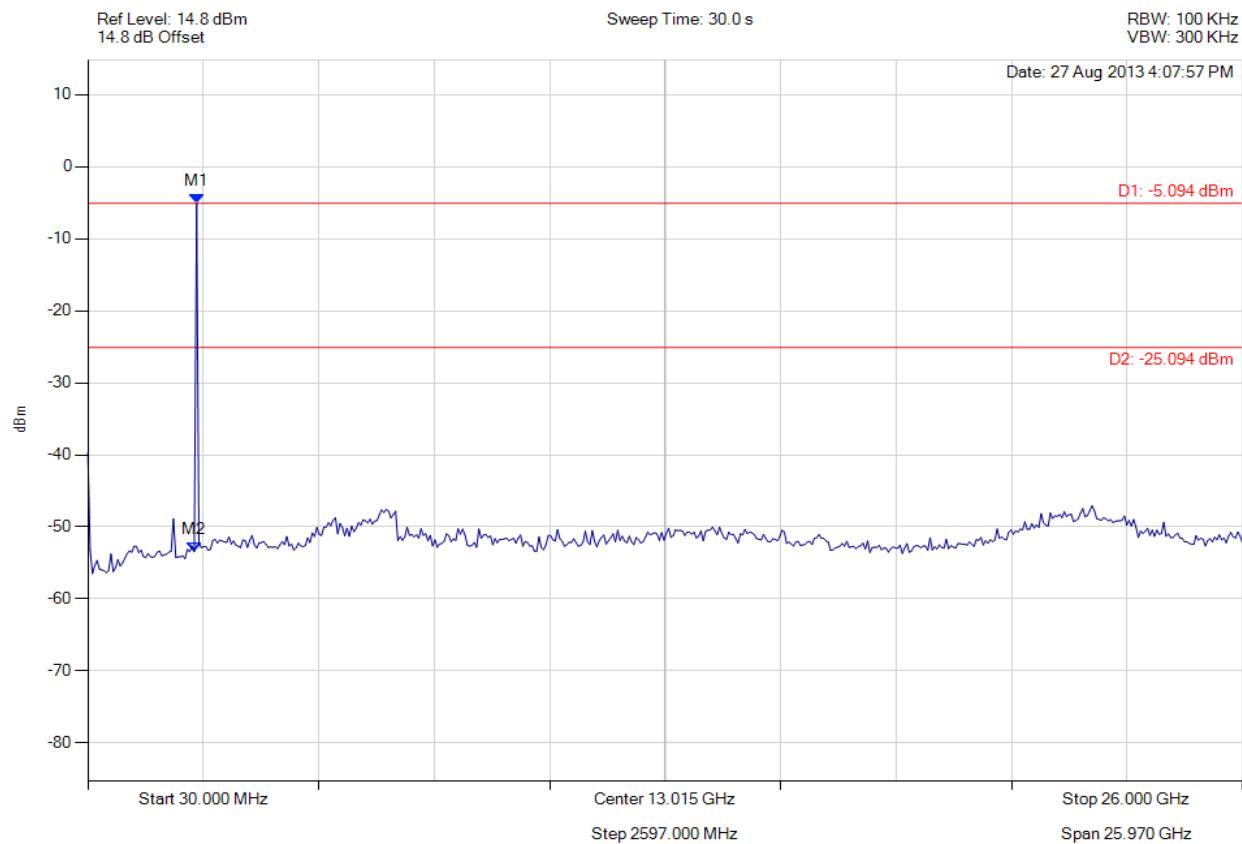

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|---|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2476.072 MHz : -5.094 dBm M2 : 6743.687 MHz : -47.553 dBm | Limit: -25.09 dBm Margin: -22.46 dB |


[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



CONDUCTED HIGH BAND-EDGE EMISSION - PEAK

Variant: 802.15, Channel: 2480.00 MHz, Chain a, Temp: Ambient, Voltage: 3.7 Vdc

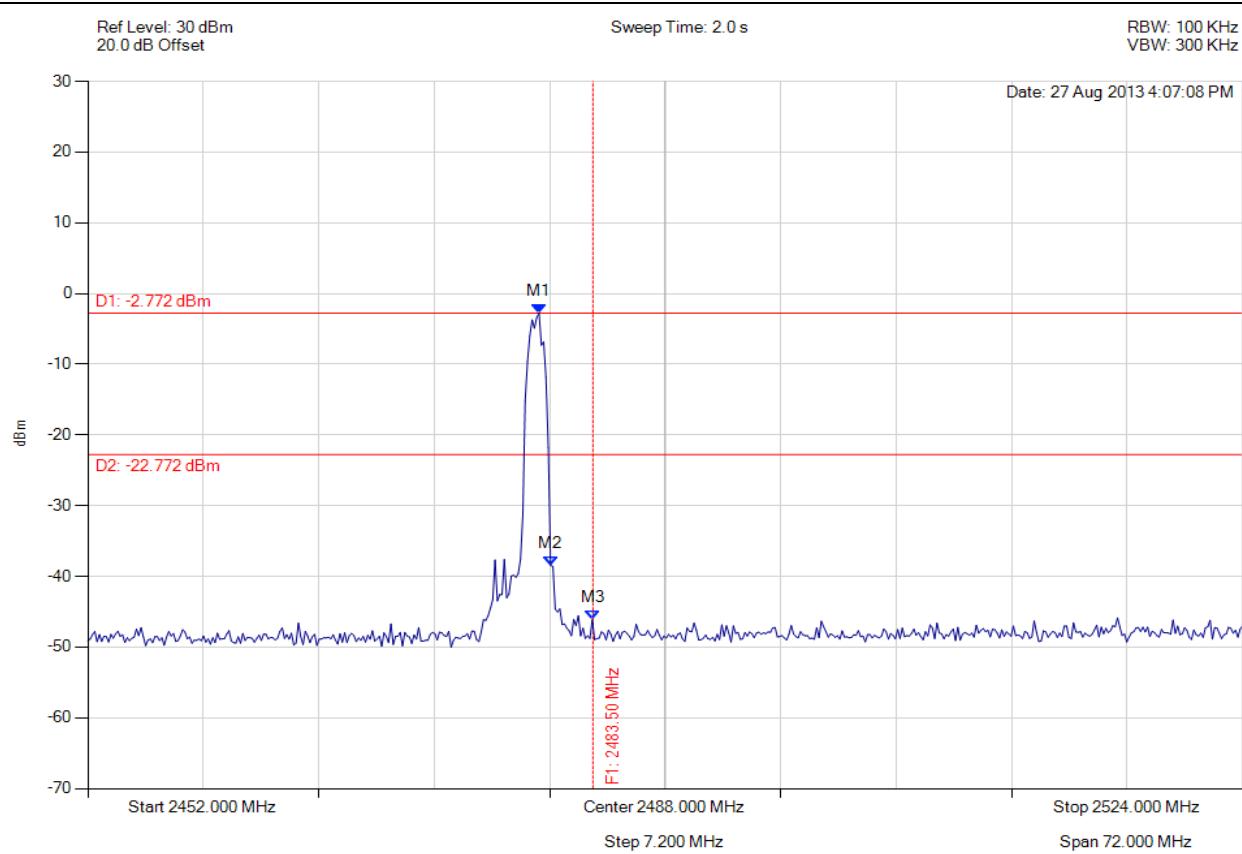

| Analyser Setup | Marker : Frequency : Amplitude | Test Results |
|---|--|--|
| Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW | M1 : 2480.136 MHz : -2.772 dBm M2 : 2480.858 MHz : -38.466 dBm M3 : 2483.500 MHz : -46.115 dBm | Limit: -22.77 dBm Margin: -23.34 dB |

[Back to the Matrix](#)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



575 Boulder Court,
Pleasanton,
California 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com