

RADIO TEST REPORT

Report ID:

REP045719

Project number:

PRJ0055892

Type of assessment:

Class II Permissive Change

Applicant:

ORBCOMM License Corp.

Product:

**Mobile Satellite Earth Station (MSES)
module**

Model (HVIN):

ST6002

ISED certification number:

FCC ID: XGS-ST6002

IC: 11881A-ST6002

Specification:

- ◆ FCC 47 CFR Part 25
- ◆ RSS-170, Issue 4, September 29, 2022

Date of issue: **August 14, 2024**

Fahar Abdul Sukkoor, EMC/RF Specialist

Tested by



Signature

Ketav Jani, EMC/RF Specialist

Reviewed by



Signature

Nemko Canada Inc., a testing laboratory, is accredited by ANSI National Accreditation Board (ANAB).

The tests included in this report are within the scope of this accreditation.

The ANAB symbol is an official symbol of the ANSI National Accreditation Board, used under licence.

ANAB File Number: AT-3195 (Ottawa); AT-3193 (Pointe-Claire); AT-3194 (Cambridge)



Lab and test locations

Company name	Nemko Canada Inc.		
Facilities	<i>Ottawa site:</i> 303 River Road Ottawa, Ontario Canada K1V 1H2	<i>Montréal site:</i> 292 Labrosse Avenue Pointe-Claire, Québec Canada H9R 5L8	<i>Cambridge site:</i> 1-130 Saltsman Drive Cambridge, Ontario Canada N3E 0B2
	Tel: +1 613 737 9680 Fax: +1 613 737 9691	Tel: +1 514 694 2684 Fax: +1 514 694 3528	Tel: +1 519 650 4811
Test site identifier	Organization	Ottawa	Montreal
	FCC: ISED:	CA2040 2040A-4	CA2041 2040G-5
Website	www.nemko.com		

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

Table of contents	2
Section 1. Report summary	3
1.1 Test specifications	3
1.2 Test methods	3
1.3 Exclusions	3
1.4 Statement of compliance	3
1.5 Test report revision history	3
Section 2. Engineering considerations	4
2.1 Modifications incorporated in the EUT for compliance	4
2.2 Technical judgment	4
2.3 Model variant declaration	4
2.4 Deviations from laboratory tests procedures	4
Section 3. Test conditions	5
3.1 Atmospheric conditions	5
3.2 Power supply range	5
Section 4. Information provided by the applicant	6
4.1 Disclaimer	6
4.2 Applicant / Manufacturer	6
4.3 EUT information	6
4.4 Radio technical information	6
4.5 EUT setup details	7
Section 5. Summary of test results	9
5.1 Testing period	9
5.2 Sample information	9
5.3 FCC test results	9
5.4 ISED test results	9
Section 6. Test equipment	10
6.1 Test equipment list	10
Section 7. Testing data	11
7.1 FCC 2.1049 and RSS-Gen 6.7 Occupied Bandwidth	11
7.2 FCC 25.204 and RSS-170 5.5 Transmitter e.i.r.p. for mobile earth stations	18
7.3 FCC 25.202(f) and RSS-170 5.8 Field strength of spurious emissions	25
7.4 FCC 25.202(d) and RSS-170 5.3 Frequency tolerance, Earth stations	39
7.5 FCC 25.216 and RSS-170 5.9 Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service....	42
Section 8. Test setup diagrams	44
8.1 Radiated emissions set-up for frequencies below 1 GHz	44
8.2 Radiated emissions set-up for frequencies above 1 GHz	44
8.3 Antenna port set-up	45

Section 1. Report summary

1.1 Test specifications

FCC 47 CFR Part 25	Satellite communications
RSS-170, Issue 4, September 29, 2022	Mobile Earth Stations and Ancillary Terrestrial Component Equipment Operating in the Mobile-Satellite Service Bands

1.2 Test methods

273109 D01 Equip Auth Guide Part 25 TXReceiver v02r02 (2011)	Equipment Authorization Guidance for Part 25 Transceivers
RSS-Gen, Issue 5, April 2018	General Requirements for Compliance of Radio Apparatus
ANSI C63.26 v2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

1.3 Exclusions

None

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.4 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Test report revision history

Table 1.5-1: Test report revision history

Revision #	Date of issue	Details of changes made to test report
REP039429	May 15, 2024	Original report issued
REP045719	August 14, 2024	Added IDP mode data to report

Section 2. Engineering considerations

2.1 Modifications incorporated in the EUT for compliance

There were no modifications performed to the EUT during this assessment.

2.2 Technical judgment

The radio module was previously evaluated under report 483795-1TRFWL (FCC ID: XGS-ST6002 and IC: 11881A-ST6002). This time in addition OGX mode was added to the module as well as the new four elements antenna. In this report, OGX mode of ST6002 was tested and covered. For the IDP mode of the module, test data was extracted from the previous report 483795-1TRFWL (FCC ID: XGS-ST6002 and IC: 11881A-ST6002).

2.3 Model variant declaration

There were no model variants declared by the applicant.

2.4 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 3. Test conditions

3.1 Atmospheric conditions

Temperature	15 °C – 35 °C
Relative humidity	20 % – 75 %
Air pressure	86 kPa (860 mbar) – 106 kPa (1060 mbar)

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

3.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 4. Information provided by the applicant

4.1 Disclaimer

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

4.2 Applicant / Manufacturer

Applicant name	ORBCOMM License Corp.
Applicant address	395 W Passaic Street, Suite 325 Rochelle Park, NJ 07662 USA
Manufacturer name	Same as applicant
Manufacturer address	Same as applicant

4.3 EUT information

Product description	Mobile Satellite Earth Station (MSES) module
Model / HVIN	ST6002
Serial number	01725148SKYFC89(conducted) 01725174SKY650B (radiated)
Part number	ST6200-S2XX
Power supply requirements	Battery: 9 -32 V (DC)
Product description and theory of operation	ST6002 is a mobile satellite earth station (MSES) module design for Machine-to-Machine application to help tracking and monitoring operation status of industrial equipment such as trailer/truck, shipping container, boat, and remote assets etc. the device contains a satellite radio operating in Inmarsat satellite network. The device also consists of a GPS and GNSS receiver to provide navigation information
Software details	OGX firmware. V6.0.0

4.4 Radio technical information

Frequency band	1626.5 – 1660.5 MHz					
Symbol rate (bps)	800	1600	3200	6400	12800	900 (IDP)
Allocated channel bandwidth (Hz)	3250	4000	6000	10000	18000	2000
Frequency Min (MHz)	1626.501	1626.502	1626.503	1626.505	1626.509	1626.501
Frequency Max (MHz)	1660.499	1660.498	1660.497	1660.495	1660.491	1660.499
RF power Max (W), Conducted	1.56	1.53	1.50	1.52	1.33	1.61
Measured BW (kHz), 99% OBW	1.107	1.975	4.064	7.931	16.090	1.56
Type of modulation	OQPSK					
Emission classification (F1D, G1D, D1D)	G1D					
Antenna information	Internal antenna, built-in on PCB board, F-Inverted metal assembled on to PCB, gain 5.4 dBi. The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.					
Stated EIRP	37 dBm					

4.5 EUT setup details



4.5.1 Radio exercise details

Operating conditions	EUT was controlled by Tera Term Pro session from laptop to transmit a radio signal.																						
Transmitter state	Transmitter set into transmitting mode with 40% duty cycle.																						
Transmitter mode	The SC1000 has various waveform formats with different channel structure (different symbol/data rate, channel bandwidth, spectrum etc.). For each waveform which has the same data/symbol rate, the channel bandwidth (CBW) and the spectrum shaping are the same, the TX power is the same. The difference is mainly on data bits number in each transmitting burst; therefore, it impacts the transmitting time period.																						
The TX formats are listed as below table,																							
<table><thead><tr><th>Waveform</th><th>Symbol rate</th><th>Channel Bandwidth (Hz)</th></tr></thead><tbody><tr><td>J, N, R</td><td>800</td><td>3250</td></tr><tr><td>K, S</td><td>1600</td><td>4000</td></tr><tr><td>T, X</td><td>3200</td><td>6000</td></tr><tr><td>Y</td><td>6400</td><td>10000</td></tr><tr><td>Z</td><td>12800</td><td>18000</td></tr><tr><td>IDP</td><td>900</td><td>2000</td></tr></tbody></table>			Waveform	Symbol rate	Channel Bandwidth (Hz)	J, N, R	800	3250	K, S	1600	4000	T, X	3200	6000	Y	6400	10000	Z	12800	18000	IDP	900	2000
Waveform	Symbol rate	Channel Bandwidth (Hz)																					
J, N, R	800	3250																					
K, S	1600	4000																					
T, X	3200	6000																					
Y	6400	10000																					
Z	12800	18000																					
IDP	900	2000																					

4.5.2 EUT setup configuration

Table 4.5-1: Support equipment

Description	Brand name	Model, Part number, Serial number, Revision level
Laptop	DELL	MN: Latitude E6440
DC power supply	GWINSTEK	MN: GRP-3060D

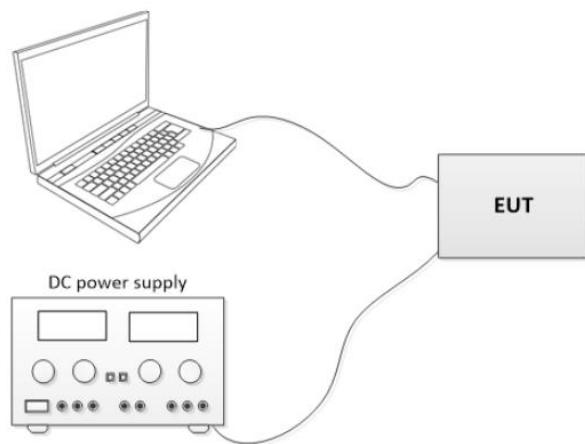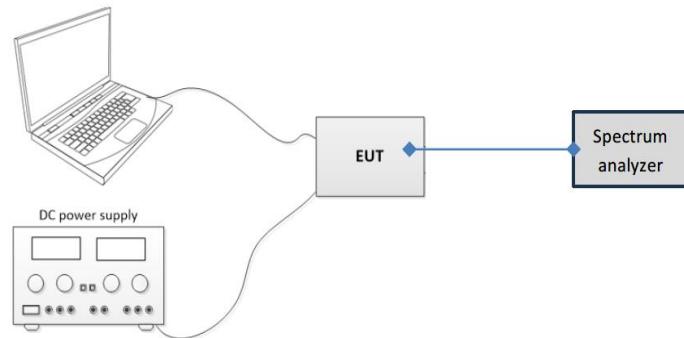**Figure 4.5-1: Radiated testing block diagram****Figure 4.5-2: Antenna port testing block diagram**

Section 5. Summary of test results

5.1 Testing period

Test start date	April 23, 2024	Test end date	May 2, 2024
-----------------	----------------	---------------	-------------

5.2 Sample information

Receipt date	April 22, 2024	Nemko sample ID number(s)	PRJ00558920001(conducted) PRJ00558920002(radiated)
--------------	----------------	---------------------------	---

5.3 FCC test results

Table 5.3-1: FCC Part 25 results

Part	Test description	Verdict
2.1046	Occupied bandwidth	Pass
25.204	Power limits for earth station	Pass
25.202(f)	Spurious emissions at the antenna terminal	Pass
25.202(f)	Field strength of spurious emissions	Pass
25.202(d)	Frequency tolerance, earth stations	Pass
25.216	Limits for emissions from mobile earth stations for protection of aeronautical radionavigation satellite service	Pass

Notes:

¹ Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

² The Antennas are located within the enclosure of EUT and not user accessible.

5.4 ISED test results

Table 5.4-2: RSS-Gen, Issue 5 test results

Part	Test description	Verdict
6.7	Occupied bandwidth	Pass
7.3	Receiver radiated emission limits	Not applicable ¹
7.4	Receiver conducted emission limits	Not applicable ¹
8.8	AC power-line conducted emission limits	Not applicable ²

Notes:

¹ According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

² EUT is battery powered

+

Table 5.4-3: RSS-170, Issue 4 test results

Part	Test description	Verdict
5.2	Frequency bands	Pass
5.3	Frequency stability	Pass
5.5	Transmitter output power for mobile earth stations (MESs)	Pass
5.7.2	Transmitter unwanted emissions for ATC Mobile Equipment within 1626.5–1660.5 MHz band	Pass
5.8	Transmitter unwanted emissions for MESs in all frequency bands	Pass
5.9	Additional unwanted emission limits for MESs to protect radionavigation-satellite service	Pass
5.10	Carrier-off state emissions	Pass

Notes:

None

Section 6. Test equipment

6.1 Test equipment list

Table 6.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA003012	1 year	January 22, 2025
Flush mount turntable	SUNAR	FM2022	FA003006	—	NCR
Controller	SUNAR	SC110V	FA002976	—	NCR
Antenna mast	SUNAR	TLT2	FA003007	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESR26	FA002969	1 year	May 09, 2024
Bilog antenna (30–2000 MHz)	SUNAR	JB1	FA003010	1 year	July 14, 2024
Horn antenna (1–18 GHz)	ETS-Lindgren	3117	FA002911	1 year	May 31, 2024
Preamp (1–18 GHz)	ETS-Lindgren	124334	FA002956	1 year	April 02, 2025
Signal and Spectrum Analyzer	Rohde & Schwarz	FSW43	FA002971	1 year	November 30, 2024
50 Ω coax cable	Huber + Suhner	None	FA003402	1 year	July 14, 2024
50 Ω coax cable	Huber + Suhner	None	FA003047	1 year	July 14, 2024
Temperature chamber	L.I.K	None	FA003430	—	VOU

Notes: VOU - verify on use
NCR - no calibration required

All equipment related to the contribution of measurement has been included in this list. Such items include, but are not limited to, cables, attenuators, directional couplers, and pre-amps.

Table 6.1-2: Automation software details

Test description	Manufacturer of Software	Details
Radiated spurious emissions	Rohde & Schwarz	EMC32, Software for EMC Measurements, Version 10.60.00

Table 6.1-3: Measurement uncertainty calculations based on equipment list

Measurement	Measurement uncertainty, ±dB
Radiated spurious emissions (30 MHz to 1 GHz)	4.27
Radiated spurious emissions (1 GHz to 6 GHz)	4.74
Radiated spurious emissions (6 GHz to 18 GHz)	5.04
RF Output power measurement using Spectrum Analyzer	0.71
RF Output power measurement using Power Meter	0.90
Conducted spurious emissions	2.43%
Other antenna port measurements	0.07

Notes: UKAS Lab 34, TIA-603 and ETSI TR 100 028-1&2 have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products. Measurement uncertainty calculations assume a coverage factor of K = 2 with 95% certainty.

Section 7. Testing data

7.1 FCC 2.1049 and RSS-Gen 6.7 Occupied Bandwidth

7.1.1 References, definitions, and limits

FCC §2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

RSS-Gen 6.7:

The emission bandwidth (\times dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the maximum power level of the transmitted emission is attenuated \times dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3 \times the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

7.1.2 Test summary

Verdict	Pass		
Test date	April 23, 2024	Temperature	23 °C
Tested by	Fahar Abdul Sukkoor	Air pressure	1010 mbar
Test location	Cambridge	Relative humidity	40 %

7.1.3 Observations, settings and special notes

Measurements performed with reference to ANSI 63.26 section 5.4.4

Spectrum analyser settings:

Resolution bandwidth:	≥ 1 % of OBW
Video bandwidth:	≥3 × RBW
Detector mode:	Peak
Trace mode:	Max Hold

7.1.4 Test data

Table 7.1-1: 99 % bandwidth results IDP mode

Frequency, MHz	99 % occupied bandwidth, kHz
1626.501	1.52
1645.000	1.52
1660.499	1.56



Figure 7.1-1: 99 % bandwidth on low channel

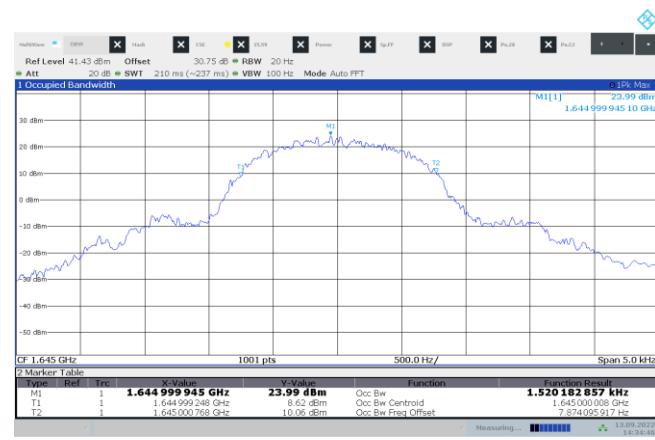


Figure 7.1-2: 99 % bandwidth on mid channel



Figure 7.1-3: 99 % bandwidth on high channel

Test data, continued

Table 7.1-2: 99 % occupied bandwidth results waveform R

Frequency, MHz	99 % occupied bandwidth, kHz
1626.501	1.107
1643.500	1.097
1660.499	1.085



Figure 7.1-4: 99 % bandwidth on low channel waveform R



Figure 7.1-5: 99 % bandwidth on mid channel waveform R



Figure 7.1-6: 99 % bandwidth on high channel waveform R

Test data, continued

Table 7.1-3: 99 % occupied bandwidth results waveform S

Frequency, MHz	99 % occupied bandwidth, kHz
1626.502	1.975
1643.500	1.957
1660.498	1.952




15:58:34 26.04.2024

Figure 7.1-7: 99 % bandwidth on low channel waveform S



10:59:08 26.04.2024

Figure 7.1-8: 99 % bandwidth on mid channel waveform S

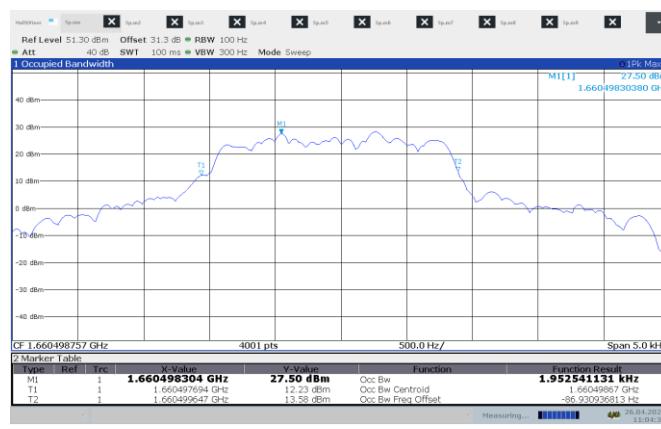

11:04:31 26.04.2024

Figure 7.1-9: 99 % bandwidth on high channel waveform S

Test data, continued

Table 7.1-4: 99 % occupied bandwidth results waveform X

Frequency, MHz	99 % occupied bandwidth, kHz
1626.503	3.922
1643.500	4.064
1660.497	3.996



Figure 7.1-10: 99 % bandwidth on low channel waveform X



Figure 7.1-11: 99 % bandwidth on mid channel waveform X

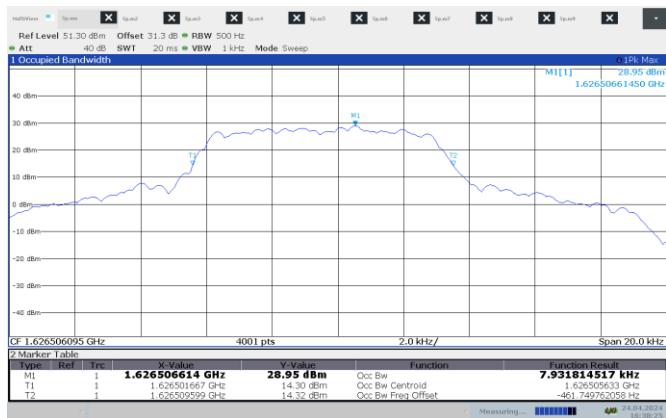


Figure 7.1-12: 99 % bandwidth on high channel waveform X

Test data, continued

Table 7.1-5: 99 % occupied bandwidth results waveform Y

Frequency, MHz	99 % occupied bandwidth, kHz
1626.505	7.931
1643.500	7.782
1660.495	7.893



Test data, continued

Table 7.1-6: 99 % occupied bandwidth results waveform Z

Frequency, MHz	99 % occupied bandwidth, kHz
1626.509	15.964
1643.500	16.090
1660.491	15.933

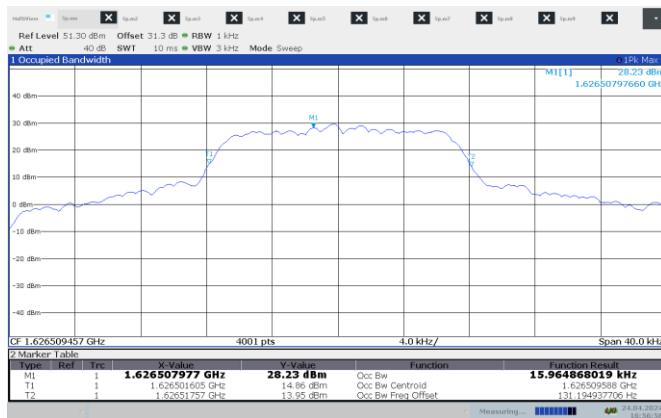


Figure 7.1-16: 99 % bandwidth on low channel waveform Z

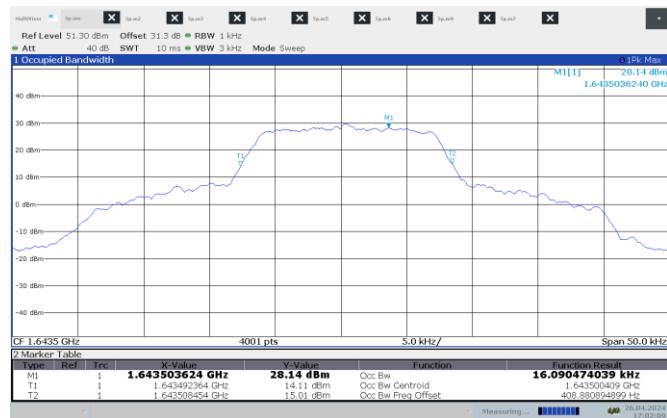


Figure 7.1-17: 99 % bandwidth on mid channel waveform Z



Figure 7.1-18: 99 % bandwidth on high channel waveform Z

7.2 FCC 25.204 and RSS-170 5.5 Transmitter e.i.r.p. for mobile earth stations

7.2.1 References, definitions, and limits

FCC §25.204:

(a) In bands shared coequally with terrestrial radio communication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station, other than an ESV, operating in frequency bands between 1 and 15 GHz, shall not exceed the following limits except as provided for in paragraph (c) below:

+40 dBW (70 dBm) in any 4 kHz band for $\Theta \leq 0^\circ$
+40 + 3 Θ dBW in any 4 kHz band for $0^\circ < \Theta \leq 5^\circ$

where Θ is the angle of elevation of the horizon viewed from the center of radiation of the antenna of the earth station and measured in degrees as positive above the horizontal plane and negative below it.

(b) In bands shared coequally with terrestrial radiocommunication services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station operating in frequency bands above 15 GHz shall not exceed the following limits except as provided for in paragraph (c) below:

+64 dBW (94 dBm) in any 1 MHz band for $\Theta \leq 0^\circ$
+64 + 3 Θ dBW in any 1 MHz band for $0^\circ < \Theta \leq 5^\circ$

where Θ is as defined in paragraph (a) above.

(c) For angles of elevation of the horizon greater than 5° there shall be no restriction as to the equivalent isotropically radiated power transmitted by an earth station towards the horizon.

(d) Notwithstanding the e.i.r.p. and e.i.r.p. density limits specified in the station authorization, each earth station transmission shall be conducted at the lowest power level that will provide the required signal quality as indicated in the application and further amended by coordination agreements.

RSS-170, clause 5.5:

The application for MES certification shall state the MES e.i.r.p. that is necessary for satisfactory communication. The maximum permissible e.i.r.p. will be the stated e.i.r.p. plus a 2 dB margin. If a detachable antenna is used, the certification application shall state the recommended antenna type and manufacturer, the antenna gain and the maximum transmitter output power at the antenna terminal.

7.2.2 Test summary

Verdict	Pass		
Test date	April 23, 2024	Temperature	23 °C
Tested by	Fahar Abdul Sukkoor	Air pressure	1010 mbar
Test location	Cambridge	Relative humidity	40 %

7.2.3 Observations, settings and special notes

Measurement performed with reference to ANSI C63.26 section 5.2.3 for peak power of narrowband signal using spectrum analyzer.
Resolution bandwidth of 5 kHz selected in lieu of 4 kHz to satisfy FCC requirements.

Spectrum analyser settings:

Resolution bandwidth:	5 kHz
Video bandwidth:	3 x RBW
Detector mode:	Peak
Trace mode:	Max Hold

7.2.4 Test data

Table 7.2-1: Conducted peak output power measurement results – ISED IDP mode

Frequency, MHz	Output power, dBm	Gain, dBi	EIRP, dBm	Stated EIRP, dBm	Maximum permissible EIRP, dBm	Margin, dB
1626.501	32.08	5.40	37.48	37.00	39.00	1.52
1645.000	32.08	5.40	37.48	37.00	39.00	1.52
1660.499	32.08	5.40	37.48	37.00	39.00	1.52

Note: Maximum permissible EIRP, dBm = Stated EIRP + 2 dB

Table 7.2-2: Conducted peak output power measurement results – FCC IDP mode

Frequency, MHz	Output power, dBm/5 kHz	Gain, dBi	EIRP, dBm/5 kHz	EIRP*, dBm/4 kHz	EIRP limit, dBm/4 kHz	Margin, dB
1626.501	32.08	5.40	37.48	36.51	70.00	33.49
1645.000	32.08	5.40	37.48	36.51	70.00	33.49
1660.499	32.08	5.40	37.48	36.51	70.00	33.49

Note: * EIRP [dBm/4kHz] = EIRP [dBm/5kHz] + 10xLog₁₀(4k / 5k)

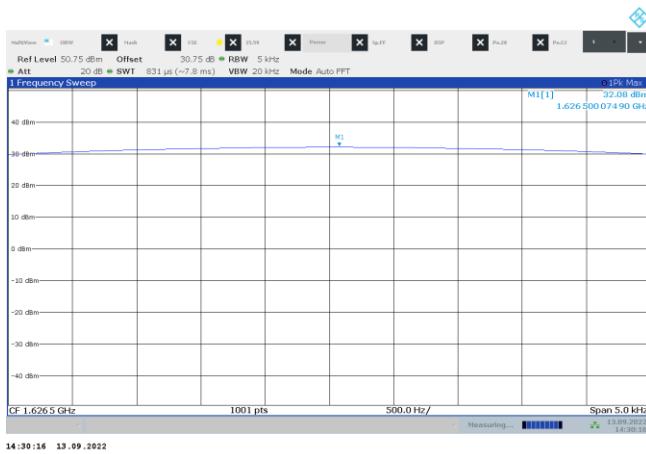


Figure 7.2-1: Conducted peak output power on low channel

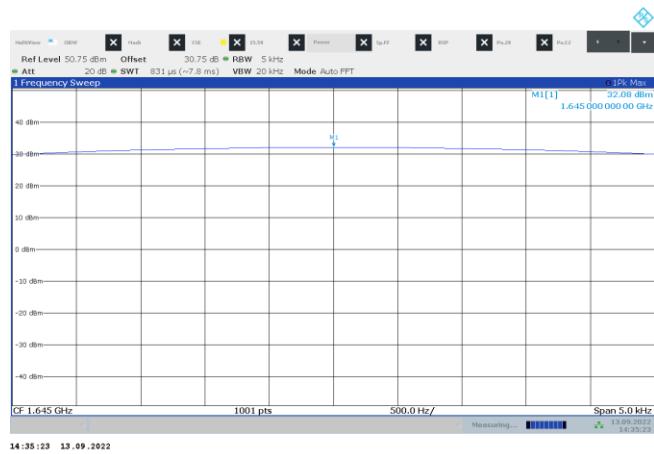


Figure 7.2-2: Conducted peak output power on mid channel

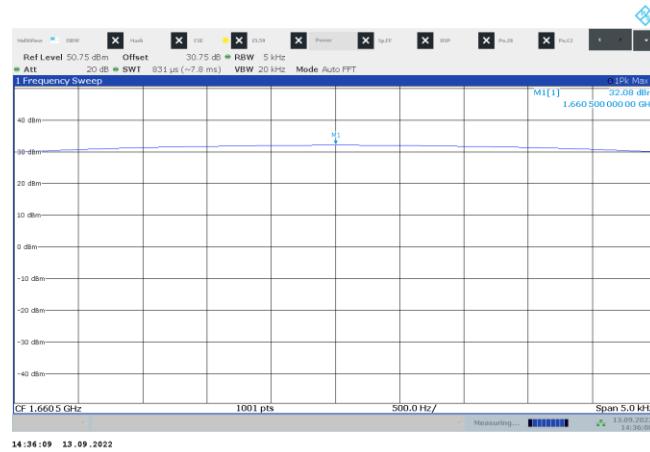


Figure 7.2-3: Conducted peak output power on high channel

Test data, continued

Table 7.2-3: Conducted peak output power measurement results – ISED waveform R

Frequency, MHz	Output power, dBm	Gain, dBi	EIRP, dBm	Stated EIRP, dBm	Maximum permissible EIRP, dBm	Margin, dB
1626.501	31.93	5.40	37.33	37.00	39.00	1.67
1643.500	31.83	5.40	37.23	37.00	39.00	1.77
1660.499	31.80	5.40	37.20	37.00	39.00	1.80

Note: Maximum permissible EIRP, dBm = Stated EIRP + 2 dB

Table 7.2-4: Conducted peak output power measurement results – FCC waveform R

Frequency, MHz	Output power, dBm/5 kHz	Gain, dBi	EIRP, dBm/5 kHz	EIRP, dBm/4 kHz	EIRP limit, dBm/4 kHz	Margin, dB
1626.501	31.93	5.40	37.33	36.36	70.00	33.64
1643.500	31.83	5.40	37.23	36.26	70.00	33.74
1660.499	31.80	5.40	37.20	36.23	70.00	33.77

Note: EIRP limit [dBm/4kHz] = EIRP [dBm/5kHz] + 10×Log10(4k/5k)

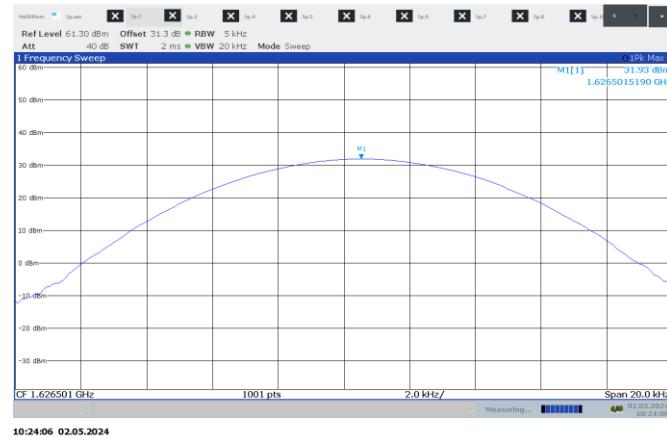


Figure 7.2-4: Conducted peak output power on low channel waveform R

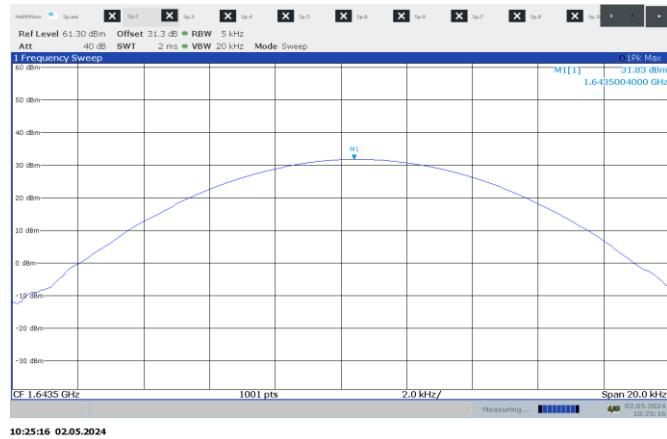


Figure 7.2-5: Conducted peak output power on mid channel waveform R

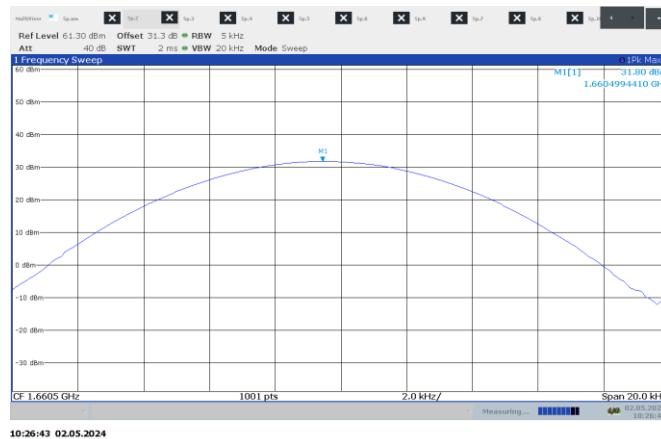


Figure 7.2-6: Conducted peak output power on high channel waveform R

Test data, continued

Table 7.2-5: Conducted peak output power measurement results – ISED waveform S

Frequency, MHz	Output power, dBm	Gain, dBi	EIRP, dBm	Stated EIRP, dBm	Maximum permissible EIRP, dBm	Margin, dB
1626.502	31.84	5.40	37.24	37.00	39.00	1.76
1643.500	31.84	5.40	37.24	37.00	39.00	1.76
1660.498	31.67	5.40	37.07	37.00	39.00	1.93

Note: Maximum permissible EIRP, dBm = Stated EIRP + 2 dB

Table 7.2-6: Conducted peak output power measurement results – FCC waveform S

Frequency, MHz	Output power, dBm/5 kHz	Gain, dBi	EIRP, dBm/5 kHz	EIRP, dBm/4 kHz	EIRP limit, dBm/4 kHz	Margin, dB
1626.502	31.84	5.40	37.24	36.27	70.00	33.73
1643.500	31.84	5.40	37.24	36.27	70.00	33.73
1660.498	31.67	5.40	37.07	36.10	70.00	33.90

Note: EIRP limit [dBm/4kHz] = EIRP [dBm/5kHz] + 10×Log10(4k/5k)

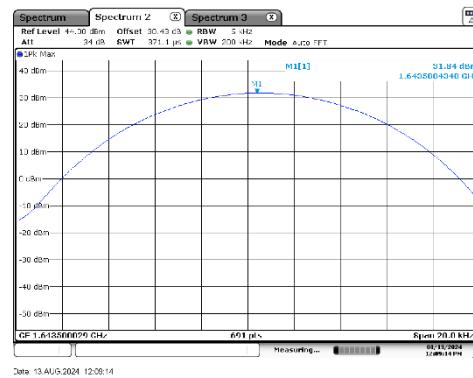
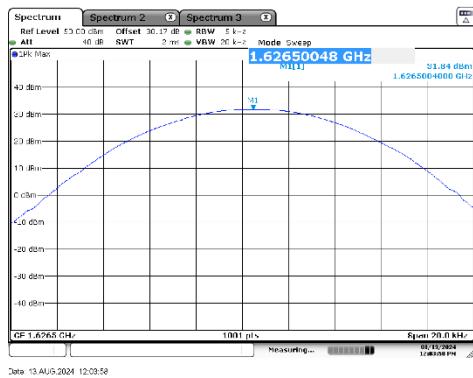


Figure 7.2-7: Conducted peak output power on low channel waveform S

Figure 7.2-8: Conducted peak output power on mid channel waveform S

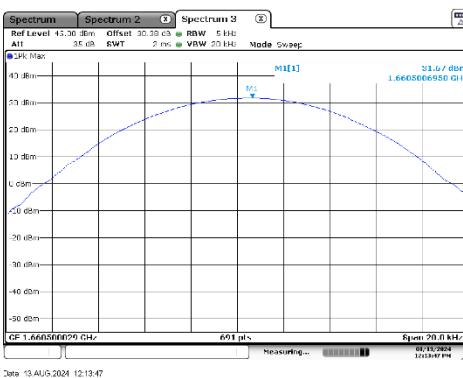


Figure 7.2-9: Conducted peak output power on high channel waveform S

Test data, continued

Table 7.2-7: Conducted peak output power measurement results – ISED waveform X


Frequency, MHz	Output power, dBm	Gain, dBi	EIRP, dBm	Stated EIRP, dBm	Maximum permissible EIRP, dBm	Margin, dB
1626.503	31.73	5.40	37.13	37.00	39.00	1.87
1643.500	31.75	5.40	37.15	37.00	39.00	1.85
1660.497	31.59	5.40	36.99	37.00	39.00	2.01

Note: Maximum permissible EIRP, dBm = Stated EIRP + 2 dB


Table 7.2-8: Conducted peak output power measurement results – FCC waveform X

Frequency, MHz	Output power, dBm/5 kHz	Gain, dBi	EIRP, dBm/5 kHz	EIRP, dBm/4 kHz	EIRP limit, dBm/4 kHz	Margin, dB
1626.503	31.73	5.40	37.13	36.16	70.00	33.84
1643.500	31.75	5.40	37.15	36.18	70.00	33.82
1660.497	31.59	5.40	36.99	36.02	70.00	33.98

Note: EIRP limit [dBm/4kHz] = EIRP [dBm/5kHz] + 10×Log10(4k/5k)

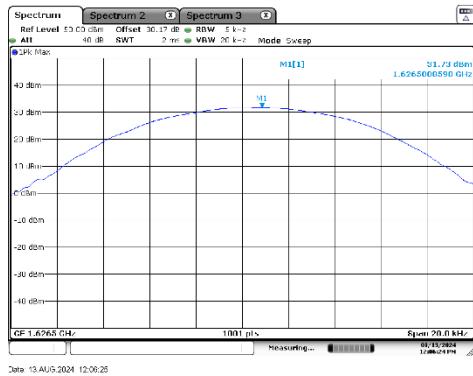


Date: 13.AUG.2024 12:06:25

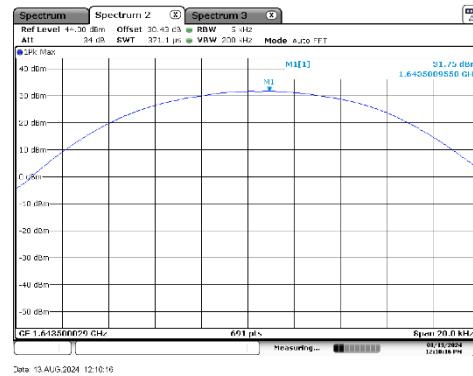

Date: 13.AUG.2024 12:10:16

Figure 7.2-10: Conducted peak output power on low channel waveform X

Figure 7.2-11: Conducted peak output power on mid channel waveform X

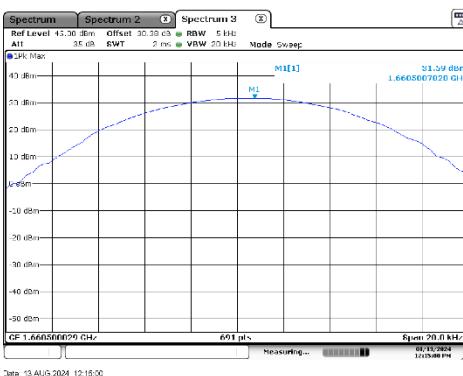

Date: 13.AUG.2024 12:15:00

Figure 7.2-12: Conducted peak output power on high channel waveform X

Test data, continued

Table 7.2-9: Conducted peak output power measurement results – ISED waveform Y


Frequency, MHz	Output power, dBm	Gain, dBi	EIRP, dBm	Stated EIRP, dBm	Maximum permissible EIRP, dBm	Margin, dB
1626.505	31.79	5.40	37.19	37.00	39.00	1.81
1643.500	31.81	5.40	37.21	37.00	39.00	1.79
1660.495	31.72	5.40	37.12	37.00	39.00	1.88

Note: Maximum permissible EIRP, dBm = Stated EIRP + 2 dB


Table 7.2-10: Conducted peak output power measurement results – FCC waveform Y

Frequency, MHz	Output power, dBm/5 kHz	Gain, dBi	EIRP, dBm/5 kHz	EIRP, dBm/4 kHz	EIRP limit, dBm/4 kHz	Margin, dB
1626.505	31.79	5.40	37.19	36.22	70.00	33.78
1643.500	31.81	5.40	37.21	36.24	70.00	33.76
1660.495	31.72	5.40	37.12	36.15	70.00	33.85

Note: EIRP limit [dBm/4kHz] = EIRP [dBm/5kHz] + 10×Log10(4k/5k)

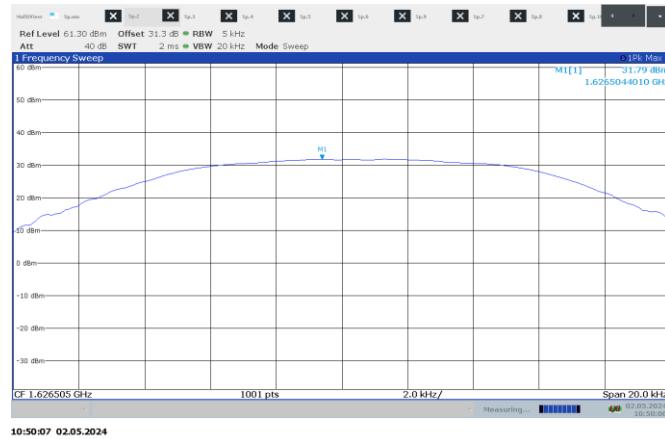

10:50:07 02.05.2024

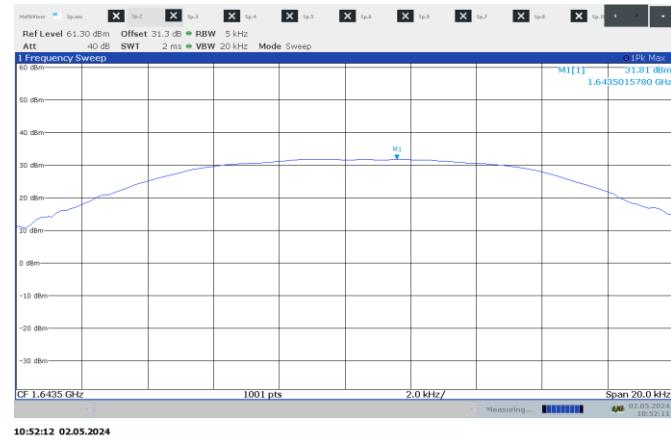

10:52:12 02.05.2024

Figure 7.2-13: Conducted peak output power on low channel waveform Y

Figure 7.2-14: Conducted peak output power on mid channel waveform Y

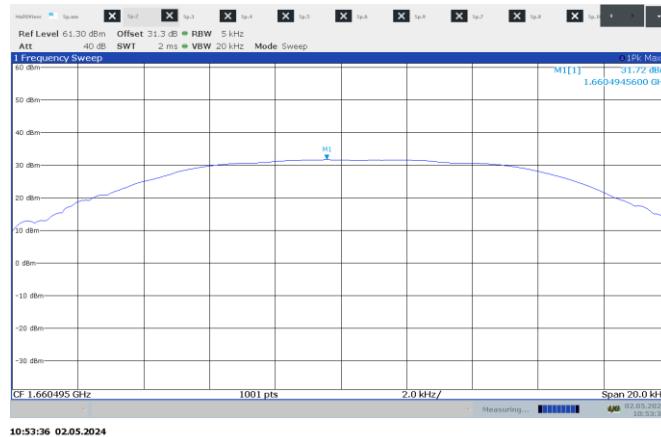


Figure 7.2-15: Conducted peak output power on high channel waveform Y

Test data, continued

Table 7.2-11: Conducted peak output power measurement results – ISED waveform Z


Frequency, MHz	Output power, dBm	Gain, dBi	EIRP, dBm	Stated EIRP, dBm	Maximum permissible EIRP, dBm	Margin, dB
1626.509	31.25	5.40	36.65	37.00	39.00	2.35
1643.500	31.07	5.40	36.47	37.00	39.00	2.53
1660.491	31.08	5.40	36.48	37.00	39.00	2.52

Note: Maximum permissible EIRP, dBm = Stated EIRP + 2 dB


Table 7.2-12: Conducted peak output power measurement results – FCC waveform Z

Frequency, MHz	Output power, dBm/5 kHz	Gain, dBi	EIRP, dBm/5 kHz	EIRP, dBm/4 kHz	EIRP limit, dBm/4 kHz	Margin, dB
1626.509	31.25	5.40	36.65	35.68	70.00	34.32
1643.500	31.07	5.40	36.47	35.50	70.00	34.50
1660.491	31.08	5.40	36.48	35.51	70.00	34.49

Note: EIRP limit [dBm/4kHz] = EIRP [dBm/5kHz] + 10×Log10(4k/5k)

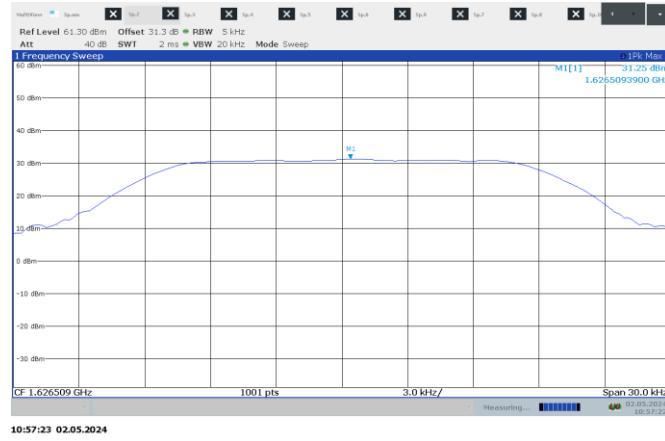

10:57:23 02.05.2024

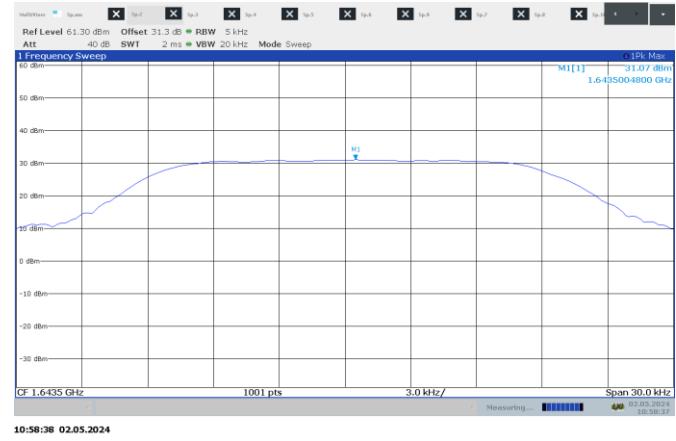

10:58:38 02.05.2024

Figure 7.2-16: Conducted peak output power on low channel waveform Z

Figure 7.2-17: Conducted peak output power on mid channel waveform Z

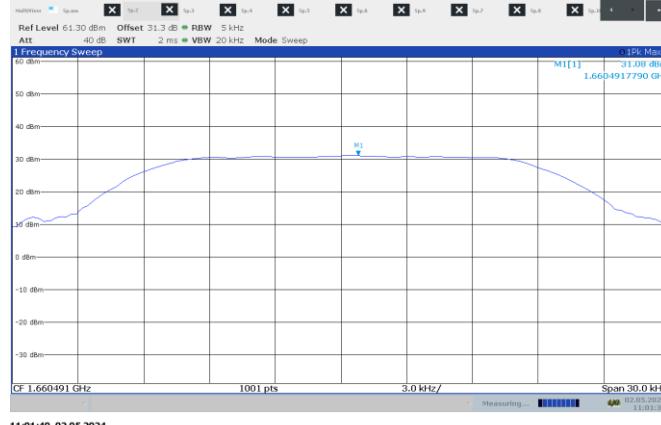


Figure 7.2-18: Conducted peak output power on high channel waveform Z

7.3 FCC 25.202(f) and RSS-170 5.8 Field strength of spurious emissions

7.3.1 References, definitions and limits

FCC §15.202:

(f) Emission limitations. The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: 25 dB;
- (2) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: 35 dB;
- (3) In any 4 kHz band, the center frequency of which is removed from the assigned frequency by more than 250 percent of the authorized bandwidth: An amount equal to 43 dB plus 10 times the logarithm (to the base 10) of the transmitter power in watts (-13 dBm fixed);
- (4) In any event, when an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in paragraphs (f) (1), (2) and (3) of this section.

RSS-170

5.1 The transmitter unwanted emissions shall be measured with the carrier frequency set at both the highest and lowest channels in which the equipment is designed to operate.
The e.i.r.p. density of unwanted and carrier-off emissions in this section shall be averaged over any 2 ms active transmission using a power average detector with a resolution bandwidth of 1 MHz for broadband emissions and a resolution bandwidth of 1 kHz for discrete emissions, unless stated otherwise

5.8 **Unwanted emissions limits for Mobile Earth Stations in All Frequency Bands**
The average power of unwanted emissions shall be attenuated below the average output power, $P(\text{dBW})$, of the transmitter, as specified below:
(1) 25 dB in any 4 kHz band, the centre frequency of which is offset from the channel frequency by more than 50%, up to and including 100% of the occupied bandwidth or necessary bandwidth, whichever is greater.
(2) 35 dB in any 4 kHz band, the centre frequency of which is offset from the channel frequency by more than 100%, up to and including 250% of the occupied bandwidth or necessary bandwidth, whichever is greater.
(3) $43 + 10 \log p$ (watts) in any 4 kHz band, the centre frequency of which is offset from the channel frequency by more than 250% of the occupied bandwidth or necessary bandwidth, whichever is greater.

5.10 **Carrier-off State Emissions**
Mobile equipment with transmitting frequencies between 1 GHz and 3 GHz shall have the e.i.r.p. density of carrier-off state emissions in the band 1559 – 1610 MHz not exceed -80 dBW/MHz.

7.3.2 Test summary

Verdict	Pass		
Test date	April 25, 2024	Temperature	23 °C
Tested by	Fahar Abdul Sukkoor	Air pressure	1010 mbar
Test location	Cambridge	Relative humidity	40 %

7.3.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10th harmonic.

Radiated measurements were performed at a distance of 3 m per ANSI 63.26, section 5.5.2 on a test site validated to the requirements of ANSI 63.10.

Radiated spurious measurements were performed while the Waveform was set at different Symbol rate. No noticeable difference of spurious emissions was observed. Only the worst-case data is presented

Conducted spurious measurements were performed with reference to ANSI 63.26 section 5.7.4

Conducted out of band emissions measurements performed with using the power integration method per ANSI 63.26 section 5.7.2 (a); the measured value is scaled using 10 log (Reference bandwidth)/(Measurement bandwidth)

Authorized bandwidth > Occupied bandwidth Therefore, the authorized bandwidth was used to calculate spurious emission mask shifts.

For waveform R, authorized bandwidth 3.25 kHz, 50% is 1.625 kHz shift, 100% is 3.25 kHz shift, 250% is 8.125 kHz shift.

For waveform S, authorized bandwidth 4 kHz, 50% is 2 kHz shift, 100% is 4 kHz shift, 250% is 10 kHz shift.

For waveform X, authorized bandwidth 6 kHz, 50% is 3 kHz shift, 100% is 6 kHz shift, 250% is 20 kHz shift.

For waveform Y, authorized bandwidth 10 kHz, 50% is 5 kHz shift, 100% is 10 kHz shift, 250% is 25 kHz shift.

For waveform Z, authorized bandwidth 18 kHz, 50% is 9 kHz shift, 100% is 18 kHz shift, 250% is 45 kHz shift.

Spectrum analyser settings for conducted spurious emissions measurements 30 MHz – 1 GHz:

Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold

Spectrum analyser settings for conducted spurious emissions measurements 1 GHz – 18 GHz:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Peak
Trace mode	Max Hold

Spectrum analyser settings for conducted bandedge spurious emission measurements outside assigned channel

Resolution bandwidth	≥ 1 % of OBW
Video bandwidth	≥3 × RBW
Detector mode	RMS
Trace mode	Power Averaging
Integration bandwidth	Fundamental dBm/2 kHz, 50-100% BW dBm/kHz, 100-250% BW dBm/3 kHz, ≥ 250% BW dBm/5 kHz

Spectrum analyser settings for radiated spurious emissions measurements below 1 GHz:

Resolution bandwidth	120 kHz
Video bandwidth	300 kHz
Detector mode	Peak
Trace mode	Max Hold

Spectrum analyser settings for radiated spurious emissions measurements above 1 GHz:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Peak
Trace mode	Max Hold

7.3.4 Test data

Table 7.3-1: Emissions in 50 - 100% Authorized bandwidth IDP mode

Tx Frequency, (MHz)	Mean output power, (dBm/2 kHz)	Scaled mean average power (dBm/4 kHz)	Mean adjacent power 50 -100% BW, (dBm/3kHz)	Scaled mean adjacent power 50 -100% BW, (dBm/4 kHz)	Limit, 50-100% dBc /4 kHz	Margin, (dB)
1626.50	27.49	30.50	-4.44	1.58	5.50	3.92
1660.50	27.49	30.50	-1.68	4.34	5.50	1.16

Note: Scaled power = measured power + 10log(Reference BW/Measurement BW), Limit = scaled mean average power, dBm/4 kHz - 25 dBc

Table 7.3-2: Emissions in 100 - 250 % Authorized bandwidth IDP mode

Tx Frequency, (MHz)	Mean output power, (dBm/2 kHz)	Scaled mean average power (dBm/4 kHz)	Mean adjacent power 100 - 250% BW, (dBm/3kHz)	Scaled mean adjacent power 100 - 250% BW, (dBm/4 kHz)	Limit 100-250% dBc /4 kHz	Margin, (dB)
1626.50	27.49	30.50	-20.95	-19.70	-4.50	15.20
1660.50	27.49	30.50	-17.84	-16.59	-4.50	12.09

Note: Scaled power = measured power + 10log(Reference BW/Measurement BW), Limit = scaled mean average power, dBm/4 kHz - 35 dBc



Figure 7.3-1: Conducted band edge spurious emissions outside assigned bandwidth, low channel

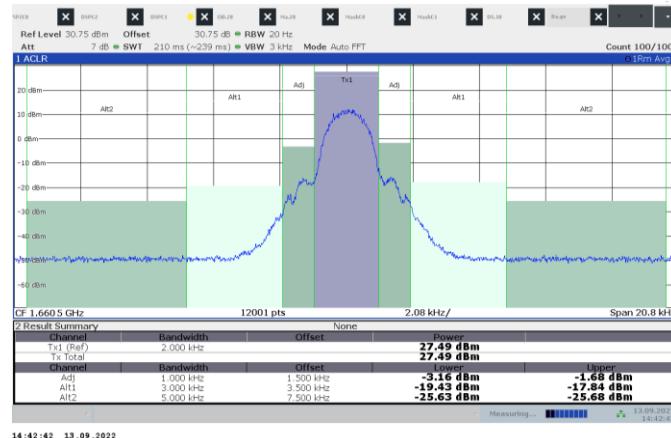


Figure 7.3-2: Conducted band edge spurious emissions outside assigned bandwidth, high channel

Test data, continued

Table 7.3-3: Emissions in 50 – 100% Authorized bandwidth waveform R

Frequency, (MHz)	Measured mean output power, (dBm/3.25 kHz)	Scaled mean average power (dBm/4 kHz)	Measured mean adjacent power 50–100% BW, (dBm/1.625 kHz)	Scaled mean adjacent power 50–100% BW, (dBm/4 kHz)	Limit, 50–100% (dBm/4 kHz)	Margin, (dB)
1626.501	31.80	32.70	-19.13	-15.22	7.70	22.92
1626.499	31.14	32.04	-19.33	-15.42	7.04	22.46

Note: Scaled power = measured power + $10 \times \log (4 \text{ kHz}/\text{Measurement BW})$, Limit = scaled mean average power (dBm/4 kHz) – 25 dB

Table 7.3-4: Emissions in 100 – 250 % Authorized bandwidth waveform R

Frequency, (MHz)	Measured mean output power, (dBm/3.25 kHz)	Scaled mean average power (dBm/4 kHz)	Measured mean adjacent power 100–250% BW, (dBm/4 kHz)	Scaled mean adjacent power 100–250% BW, (dBm/4 kHz)	Limit, 100–250% (dBm/4 kHz)	Margin, (dB)
1626.501	31.80	32.70	-23.99	-23.99	-2.30	21.69
1626.499	31.14	32.04	-25.47	-25.47	-2.96	22.51

Note: Scaled power = measured power + $10 \times \log (4 \text{ kHz}/\text{Measurement BW})$, Limit = scaled mean average power (dBm/4 kHz) – 35 dB

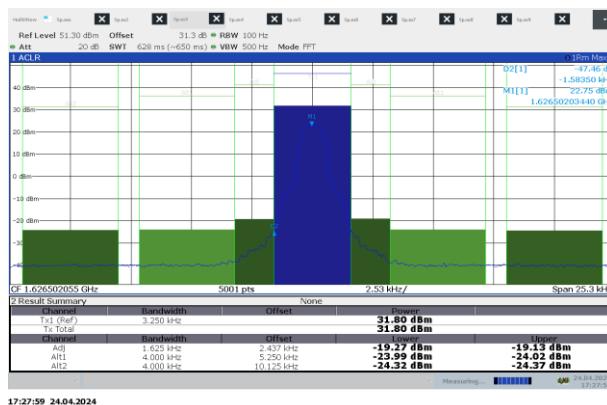


Figure 7.3-3: Conducted band edge spurious emissions outside assigned bandwidth, low channel waveform R

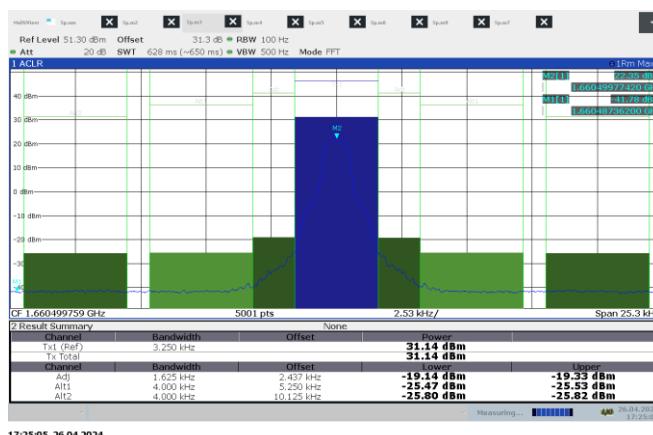


Figure 7.3-4: Conducted band edge spurious emissions outside assigned bandwidth, high channel waveform R

Test data, continued

Table 7.3-5: Emissions in 50 – 100% Authorized bandwidth waveform S

Frequency, (MHz)	Measured mean output power, (dBm/4 kHz)	Scaled mean average power (dBm/4 kHz)	Measured mean adjacent power 50–100% BW, (dBm/2 kHz)	Scaled mean adjacent power 50–100% BW, (dBm/4 kHz)	Limit, 50–100% (dBm/4 kHz)	Margin, (dB)
1626.502	31.03	31.03	-3.30	-0.29	6.03	6.32
1660.498	30.87	30.87	-2.08	0.93	5.87	4.94

Note: Scaled power = measured power + $10 \times \log (4 \text{ kHz}/\text{Measurement BW})$, Limit = scaled mean average power (dBm/4 kHz) – 25 dB

Table 7.3-6: Emissions in 100 – 250 % Authorized bandwidth waveform S

Frequency, (MHz)	Measured mean output power, (dBm/4 kHz)	Scaled mean average power (dBm/4 kHz)	Measured mean adjacent power 100–250% BW, (dBm/4 kHz)	Scaled mean adjacent power 100–250% BW, (dBm/4 kHz)	Limit, 100–250% (dBm/4 kHz)	Margin, (dB)
1626.502	31.03	31.03	-22.94	-22.94	-3.97	-18.97
1660.498	30.87	30.87	-21.43	-21.43	-4.13	-17.3

Note: Scaled power = measured power + $10 \times \log (4 \text{ kHz}/\text{Measurement BW})$, Limit = scaled mean average power (dBm/4 kHz) – 35 dB

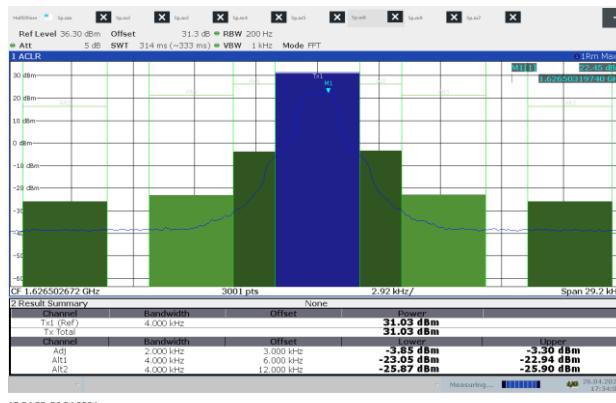


Figure 7.3-5: Conducted band edge spurious emissions outside assigned bandwidth, low channel waveform S

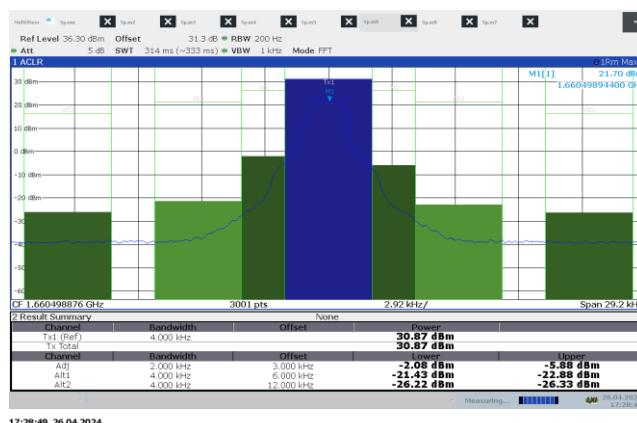


Figure 7.3-6: Conducted band edge spurious emissions outside assigned bandwidth, high channel waveform S

Test data, continued

Table 7.3-7: Emissions in 50 – 100% Authorized bandwidth waveform X

Frequency, (MHz)	Measured mean output power, (dBm/4 kHz)	Scaled mean average power (dBm/4 kHz)	Measured mean adjacent power 50–100% BW, (dBm/3 kHz)	Scaled mean adjacent power 50–100% BW, (dBm/4 kHz)	Limit, 50–100% (dBm/4 kHz)	Margin, (dB)
1626.503	31.55	31.55	2.85	4.09	6.55	2.46
1660.497	31.83	31.83	2.60	3.84	6.83	2.99

Note: Scaled power = measured power + $10 \times \log (4 \text{ kHz}/\text{Measurement BW})$, Limit = scaled mean average power (dBm/4 kHz) – 25 dB

Table 7.3-8: Emissions in 100 – 250 % Authorized bandwidth waveform X

Frequency, (MHz)	Measured mean output power, (dBm/4 kHz)	Scaled mean average power (dBm/4 kHz)	Measured mean adjacent power 100–250% BW, (dBm/4 kHz)	Scaled mean adjacent power 100–250% BW, (dBm/4 kHz)	Limit, 100–250% (dBm/4 kHz)	Margin, (dB)
1626.503	31.55	31.55	-17.64	-17.64	-3.45	14.19
1660.497	31.83	31.83	-16.15	-16.15	-3.17	12.98

Note: Scaled power = measured power + $10 \times \log (4 \text{ kHz}/\text{Measurement BW})$, Limit = scaled mean average power (dBm/4 kHz) – 35 dB

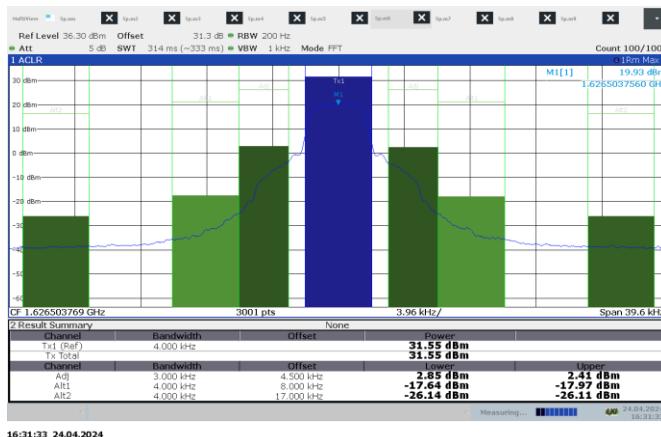


Figure 7.3-7: Conducted band edge spurious emissions outside assigned bandwidth, low channel waveform X

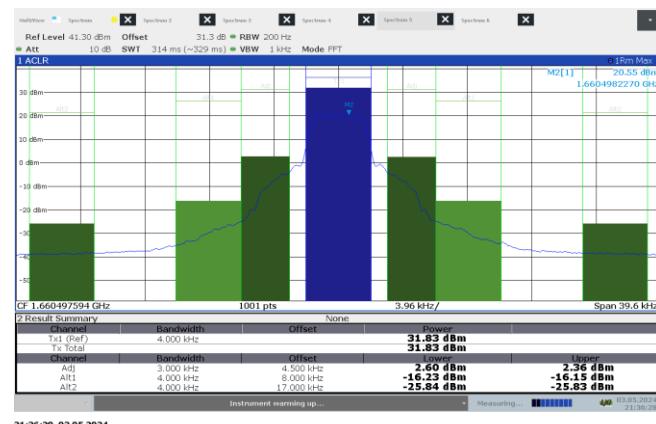


Figure 7.3-8: Conducted band edge spurious emissions outside assigned bandwidth, high channel waveform X

Test data, continued

Table 7.3-9: Emissions in 50 – 100% Authorized bandwidth waveform Y

Frequency, (MHz)	Measured mean output power dBm	Measured mean adjacent power 50–100% BW, (dBm/4 kHz)	Limit, 50–100% (dBm/4 kHz)	Margin, (dB)
1626.505	31.60	4.66	6.60	1.94
1660.495	31.26	4.68	6.26	1.58

Table 7.3-10: Emissions in 100 – 250 % Authorized bandwidth waveform Y

Frequency, (MHz)	Measured mean output power, dBm	Measured mean adjacent power 100–250% BW, (dBm/4 kHz)	Limit, 100–250% (dBm/4 kHz)	Margin, (dB)
1626.505	31.60	-14.10	-3.40	10.70
1660.495	31.26	-13.84	-3.74	10.10

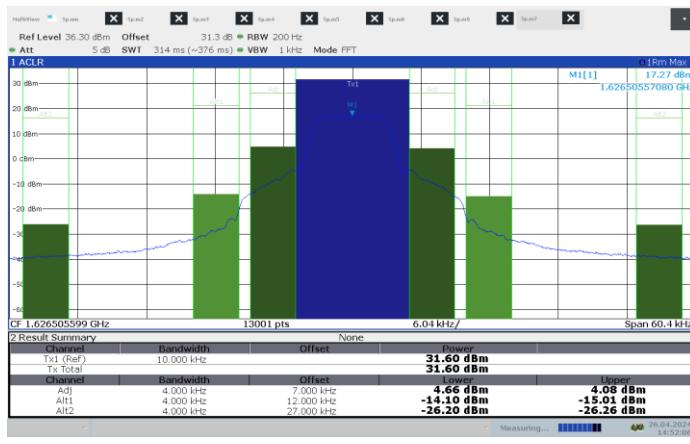


Figure 7.3-9: Conducted band edge spurious emissions outside assigned bandwidth, low channel waveform Y

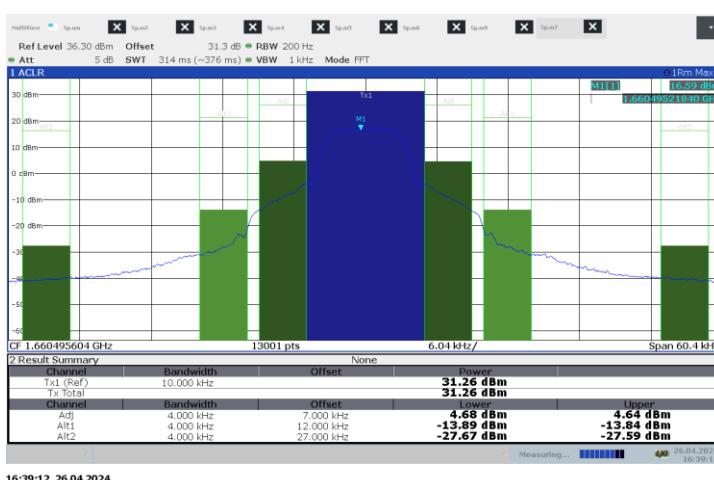


Figure 7.3-10: Conducted band edge spurious emissions outside assigned bandwidth, high channel waveform Y

Test data, continued

Table 7.3-11: Emissions in 50 – 100% Authorized bandwidth waveform Z

Frequency, (MHz)	Measured mean output power, dBm	Measured mean adjacent power 50–100% BW, (dBm/4 kHz)	Limit, 50–100% (dBm/4 kHz)	Margin, (dB)
1626.509	31.34	3.60	6.34	2.74
1660.491	31.17	5.04	6.17	1.13

Table 7.3-12: Emissions in 100 – 250 % Authorized bandwidth waveform Z

Frequency, (MHz)	Measured mean output power, dBm	Measured mean adjacent power 100–250% BW, (dBm/4 kHz)	Limit, 100–250% (dBm/4 kHz)	Margin, (dB)
1626.509	31.34	-8.85	-3.66	5.19
1660.491	31.17	-7.79	-3.83	3.96

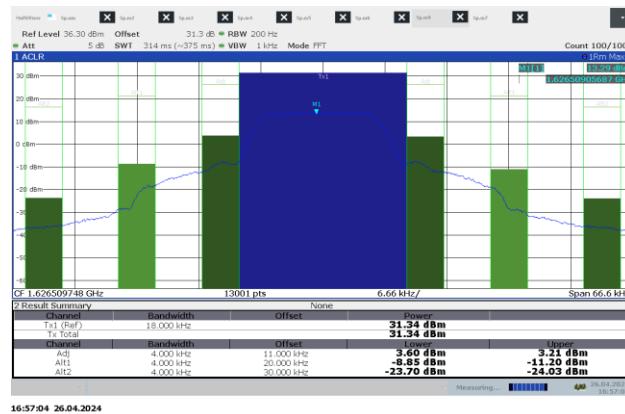


Figure 7.3-11: Conducted band edge spurious emissions outside assigned bandwidth, low channel waveform Z

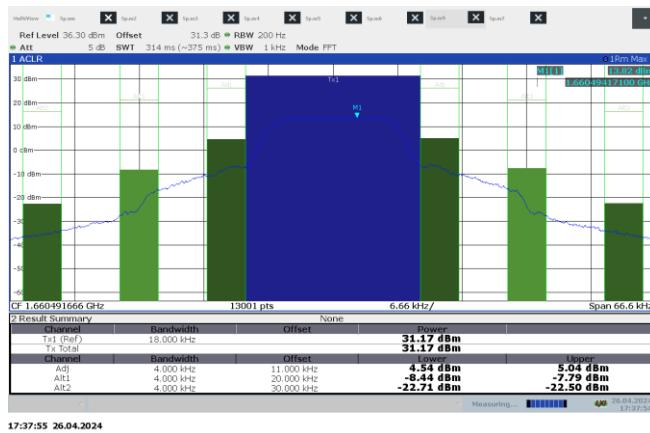


Figure 7.3-12: Conducted band edge spurious emissions outside assigned bandwidth, high channel waveform Z

Test data, continued

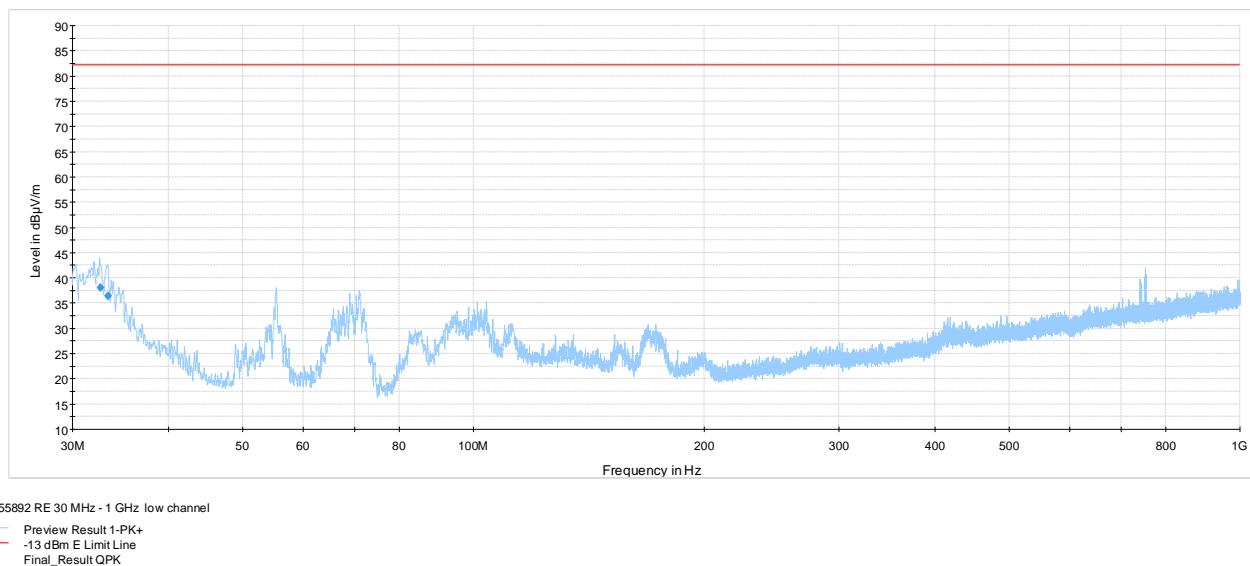


Figure 7.3-13: Radiated Spurious emissions 30 – 1000 MHz, low channel

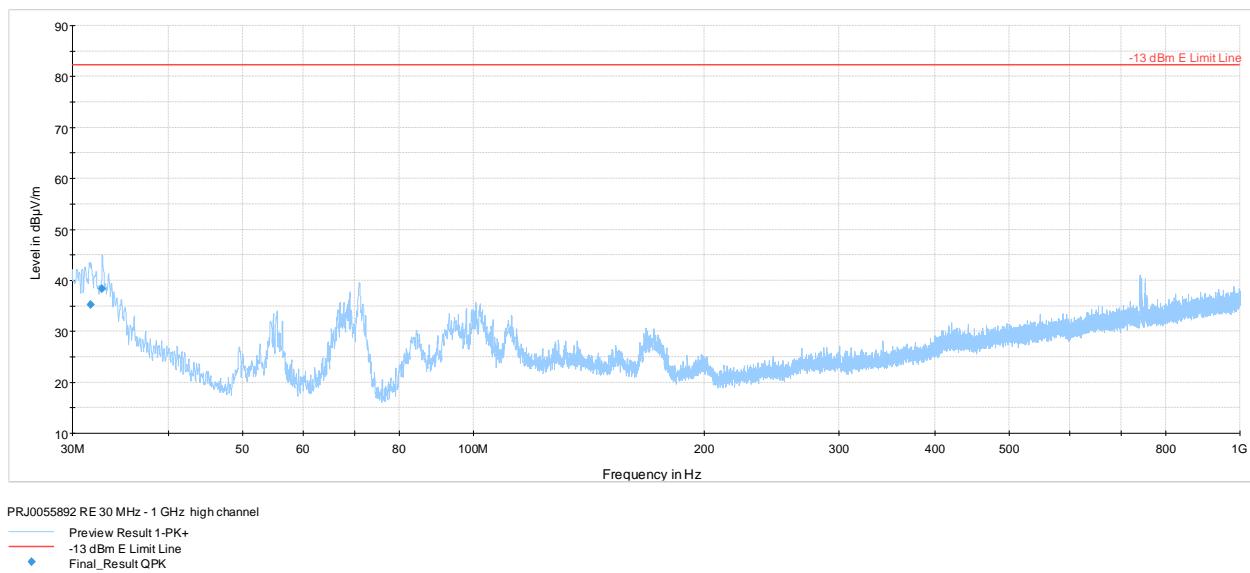


Figure 7.3-14: Radiated Spurious emissions 30 – 1000 MHz, high channel

Test data, continued

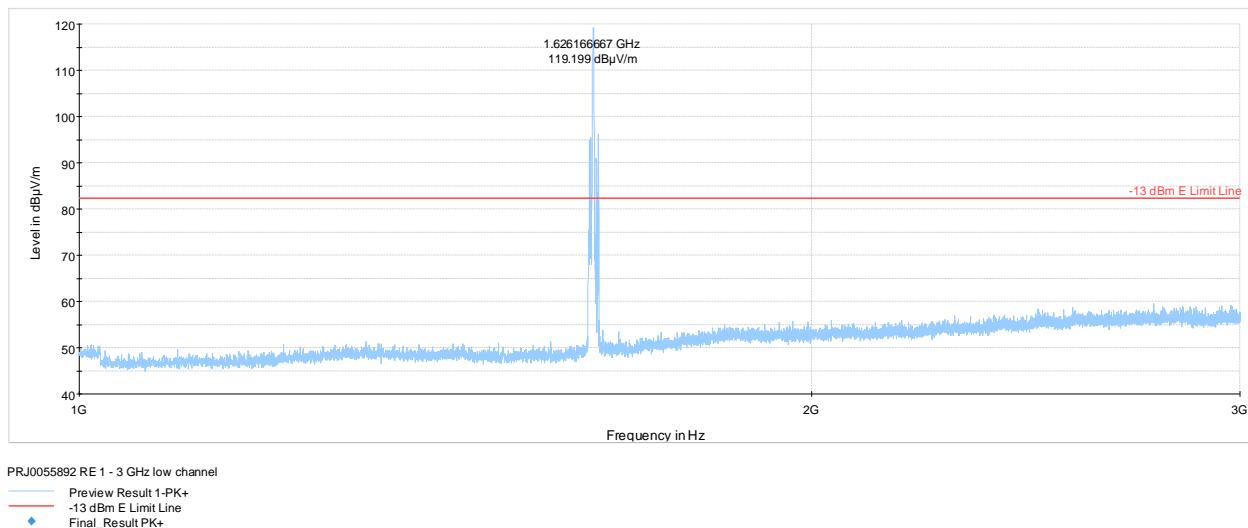


Figure 7.3-15: Radiated Spurious emissions 1 – 3 GHz, low channel

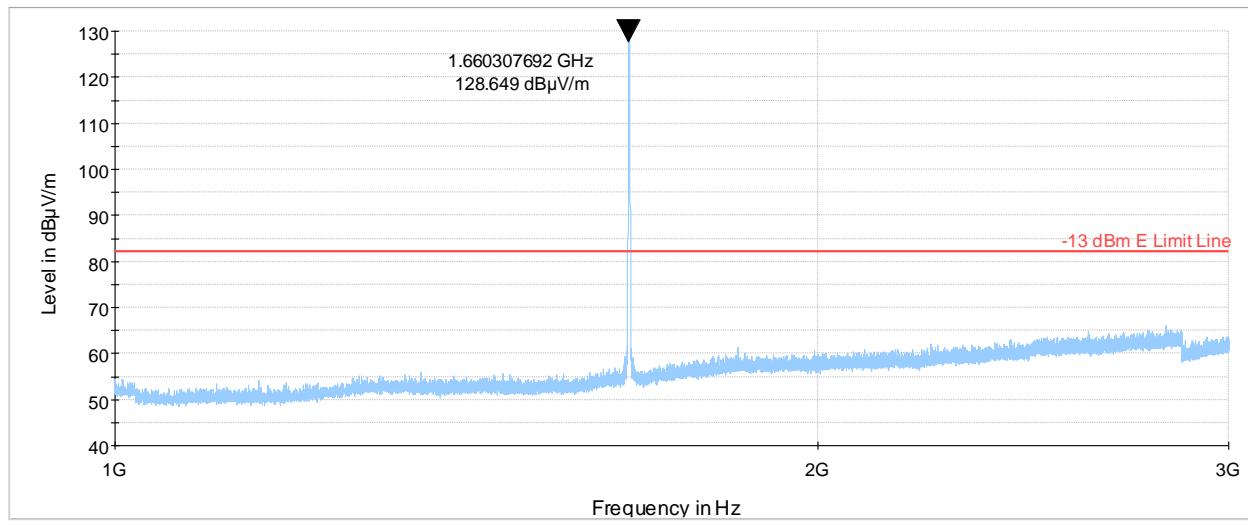


Figure 7.3-16: Radiated Spurious emissions 1 – 3 GHz, high channel

Test data, continued

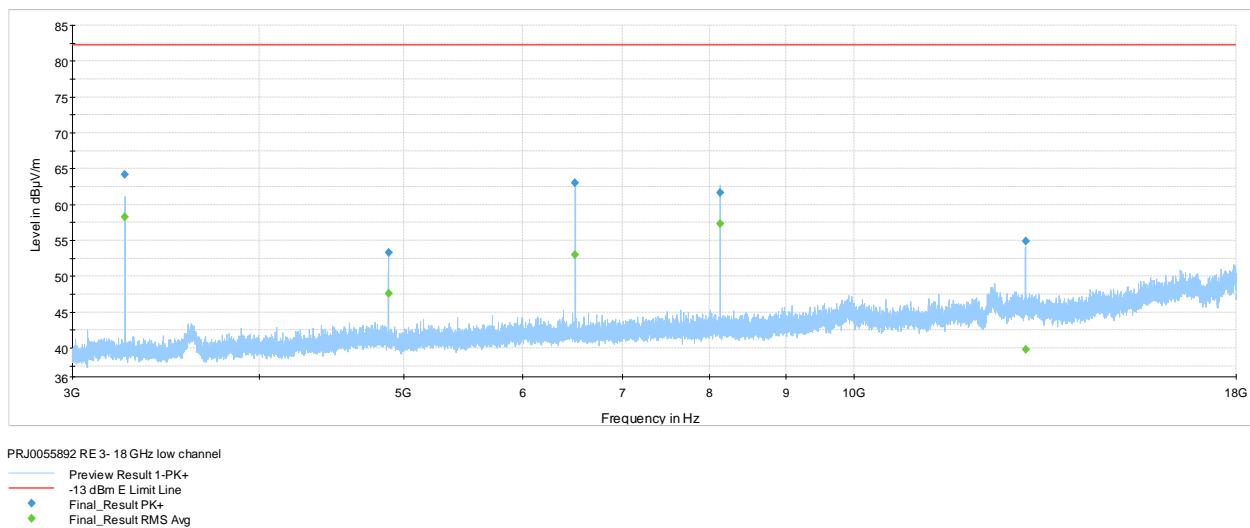


Figure 7.3-17: Radiated Spurious emissions 3 – 18 GHz, low channel

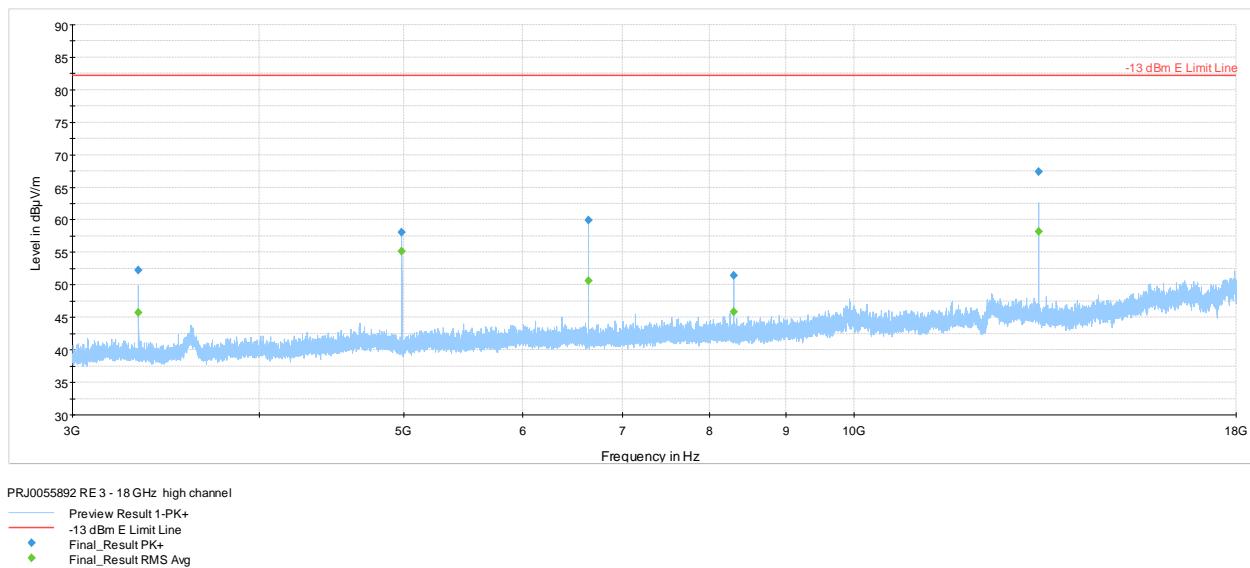


Figure 7.3-18: Radiated Spurious emissions 3 – 18 GHz, high channel

Test data, continued

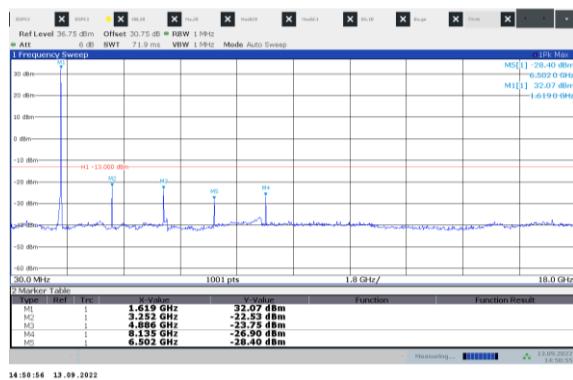


Figure 7.3-19: Conducted spurious emissions, low channel IDP mode

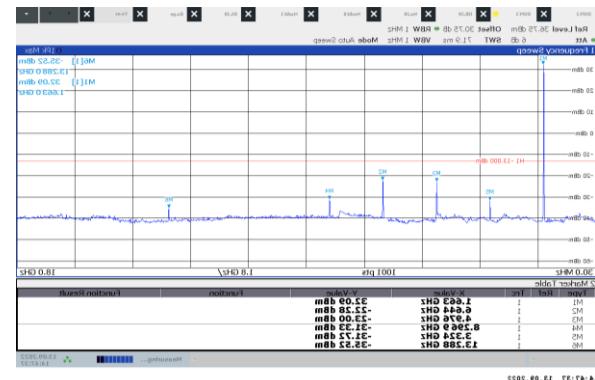


Figure 7.3-20: Conducted spurious emissions, high channel IDP mode

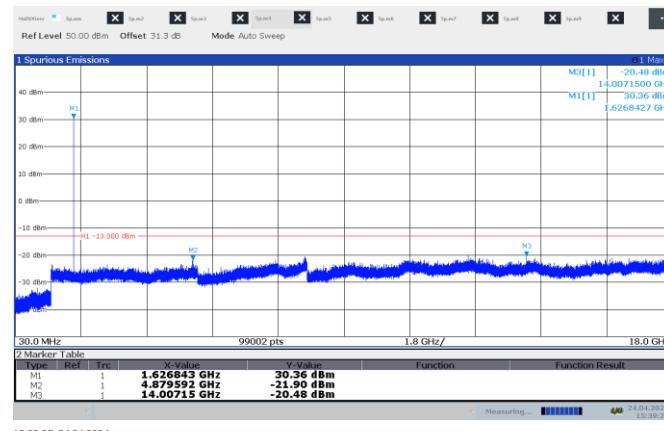


Figure 7.3-21: Conducted spurious emissions, low channel waveform R

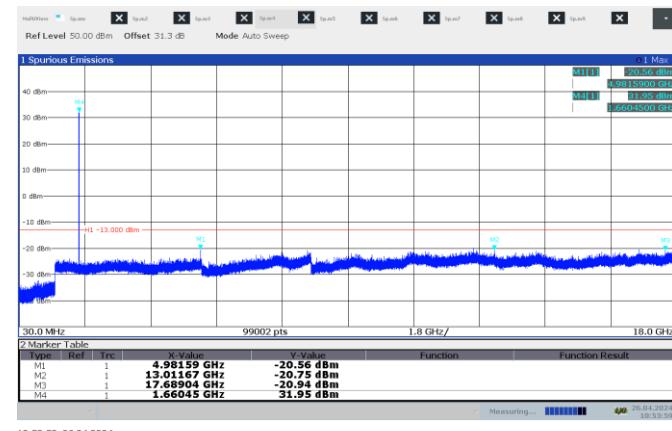


Figure 7.3-22: Conducted spurious emissions, high channel waveform R

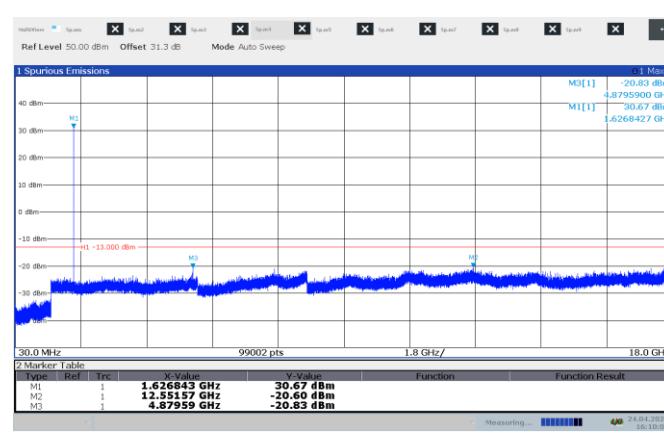


Figure 7.3-23: Conducted spurious emissions, low channel waveform S

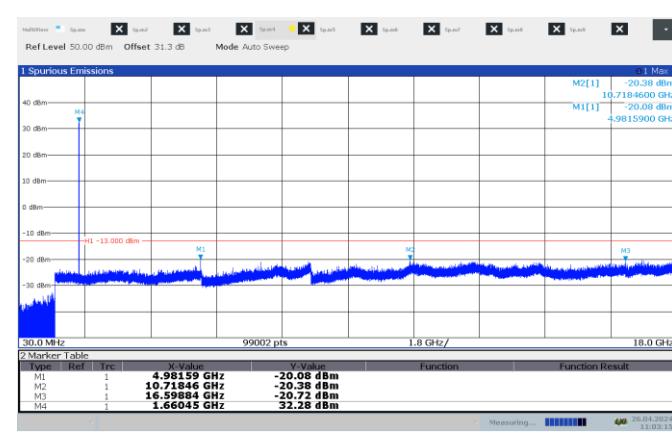


Figure 7.3-24: Conducted spurious emissions, high channel waveform S

Test data, continued

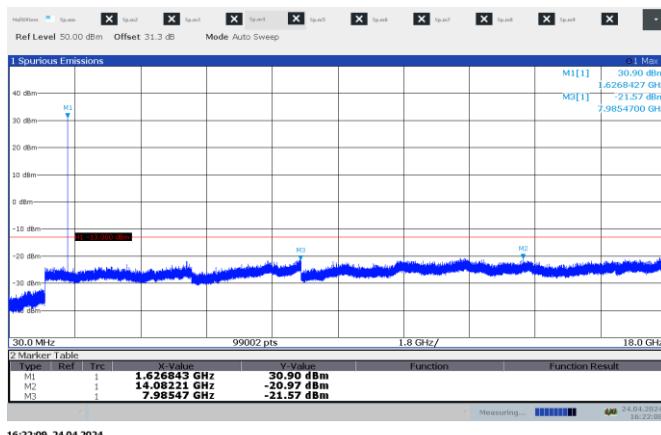


Figure 7.3-25: Conducted spurious emissions, low channel waveform X

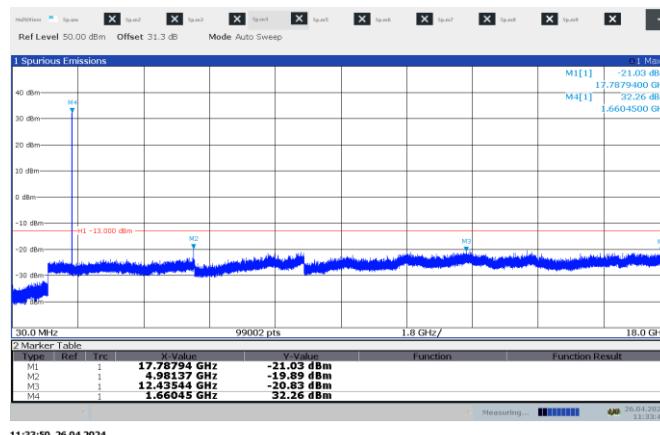


Figure 7.3-26: Conducted spurious emissions, high channel waveform X

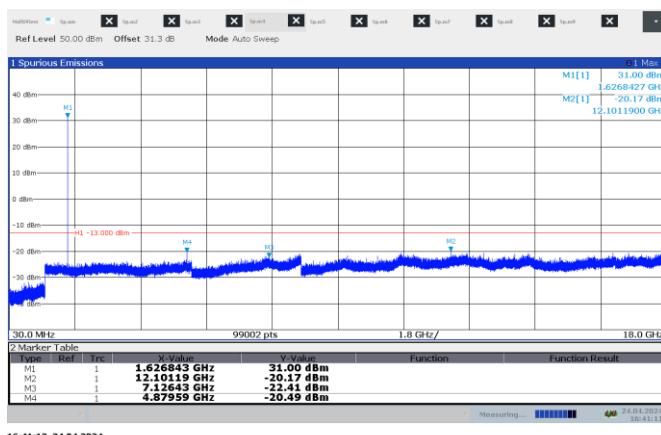


Figure 7.3-27: Conducted spurious emissions, low channel waveform Y

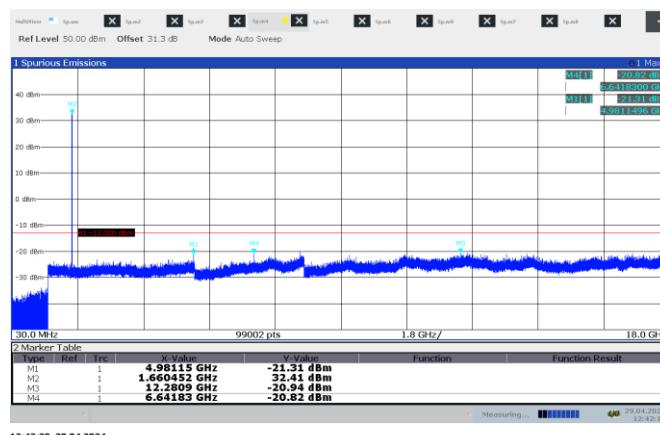
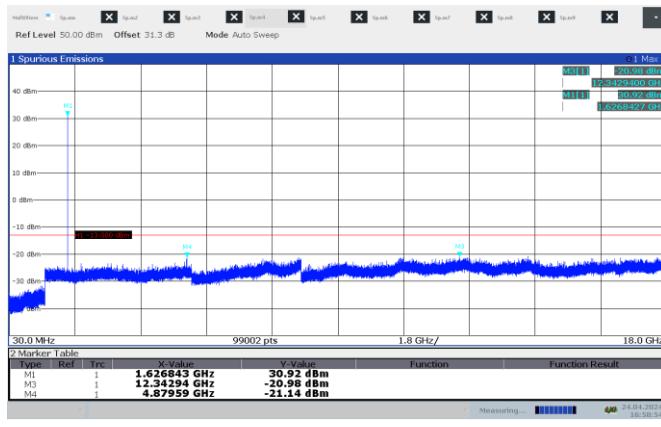
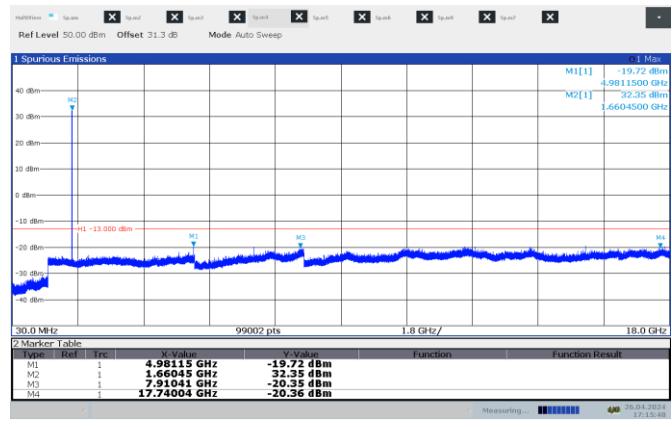
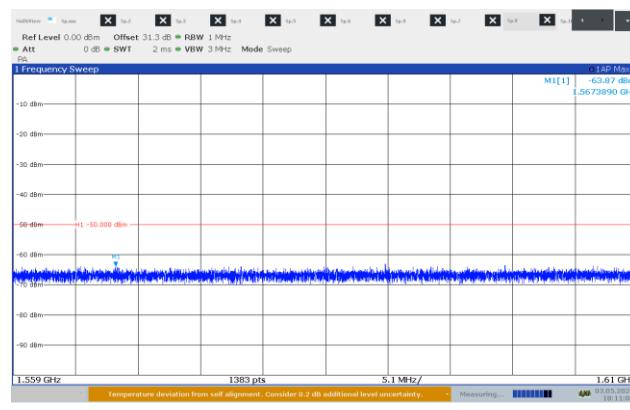


Figure 7.3-28: Conducted spurious emissions, high channel waveform Y

Test data, continued

Figure 7.3-29: Conducted spurious emissions, low channel waveform Z

Figure 7.3-30: Conducted spurious emissions, high channel waveform Z

Figure 7.3-31: Conducted emissions 1559 – 1610 MHz, Carrier-off state

7.4 FCC 25.202(d) and RSS-170 5.3 Frequency tolerance, Earth stations

7.4.1 References, definitions, and limits

FCC §25.202:

(d) Frequency tolerance, Earth stations.

The carrier frequency of each earth station transmitter authorized in these services shall be maintained within 0.001 percent (± 10 ppm) of the reference frequency.

FCC 2.1055:

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30°C to $+50^{\circ}\text{C}$ for all equipment except that specified in paragraphs (a)(2) and (3) of this section

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10°C through the range.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

RSS-170, Clause 5.3:

For mobile earth station equipment, the carrier frequency shall not depart from the reference frequency by more than ± 10 ppm.

7.4.2 Test summary

Verdict	Pass		
Test date	April 29, 2024	Temperature	23°C
Tested by	Fahar Abdul Sukkoor	Air pressure	1010 mbar
Test location	Cambridge	Relative humidity	40 %

7.4.3 Observations, settings and special notes

Frequency stability measurements were performed with reference to ANSI 63.26 section 5.6.3 and section 5.6.5

Offset was calculated as per the following formula:
$$\frac{F_{\text{Measured}} - F_{\text{reference}}}{F_{\text{reference}}} \times 1 \cdot 10^6$$

Spectrum analyser settings:

Resolution bandwidth:	1 – 5 % OBW
Video bandwidth:	$\geq 3 \times \text{RBW}$
Detector mode:	Peak
Trace mode:	Max Hold

7.4.4 Test data

Table 7.4-1: Frequency tolerance measurement result – waveform R

Test conditions	Frequency, GHz	Offset, ppm	Limit, \pm ppm	Margin, ppm
+50 °C, Nominal	1.643500706	0.08	10.00	9.92
+40 °C, Nominal	1.643500793	0.13	10.00	9.87
+30 °C, Nominal	1.643500452	-0.07	10.00	9.93
+20 °C, +15 %	1.643500587	0.01	10.00	9.99
+20 °C, Nominal	1.643500575		Reference	
+20 °C, -15 %	1.643500483	-0.06	10.00	9.94
+10 °C, Nominal	1.643500629	0.03	10.00	9.97
0 °C, Nominal	1.643500716	0.09	10.00	9.91
-10 °C, Nominal	1.643500660	0.05	10.00	9.95
-20 °C, Nominal	1.643500559	-0.01	10.00	9.99
-30 °C, Nominal	1.643500436	-0.08	10.00	9.92

Table 7.4-2: Frequency tolerance measurement result – waveform S

Test conditions	Frequency, GHz	Offset, ppm	Limit, \pm ppm	Margin, ppm
+50 °C, Nominal	1.643500756	0.12	10.00	9.88
+40 °C, Nominal	1.643500779	0.13	10.00	9.87
+30 °C, Nominal	1.643500487	-0.04	10.00	9.96
+20 °C, +15 %	1.643500563	0.01	10.00	9.99
+20 °C, Nominal	1.643500560		Reference	
+20 °C, -15 %	1.643500513	-0.03	10.00	9.97
+10 °C, Nominal	1.643500607	0.03	10.00	9.97
0 °C, Nominal	1.643500725	0.10	10.00	9.90
-10 °C, Nominal	1.64350061	0.03	10.00	9.97
-20 °C, Nominal	1.643500518	-0.03	10.00	9.97
-30 °C, Nominal	1.643500413	-0.09	10.00	9.91

Table 7.4-3: Frequency tolerance measurement result – waveform X

Test conditions	Frequency, GHz	Offset, ppm	Limit, \pm ppm	Margin, ppm
+50 °C, Nominal	1.643500667	0.04	10.00	9.96
+40 °C, Nominal	1.643500743	0.09	10.00	9.91
+30 °C, Nominal	1.643500551	-0.03	10.00	9.97
+20 °C, +15 %	1.643500520	-0.05	10.00	9.95
+20 °C, Nominal	1.643500594		Reference	
+20 °C, -15 %	1.643500570	-0.01	10.00	9.99
+10 °C, Nominal	1.643500589	0.01	10.00	9.99
0 °C, Nominal	1.643500719	0.08	10.00	9.92
-10 °C, Nominal	1.643500584	-0.01	10.00	9.99
-20 °C, Nominal	1.643500500	-0.06	10.00	9.94
-30 °C, Nominal	1.643500466	-0.08	10.00	9.92

Test data continued

Table 7.4-4: Frequency tolerance measurement result – waveform Y

Test conditions	Frequency, GHz	Offset, ppm	Limit, \pmppm	Margin, ppm
+50 °C, Nominal	1.643500703	0.08	10.00	9.92
+40 °C, Nominal	1.643500772	0.13	10.00	9.87
+30 °C, Nominal	1.643500395	-0.10	10.00	9.90
+20 °C, +15 %	1.643500477	-0.05	10.00	9.95
+20 °C, Nominal	1.643500566		Reference	
+20 °C, -15 %	1.643500552	-0.01	10.00	9.99
+10 °C, Nominal	1.643500557	-0.01	10.00	9.99
0 °C, Nominal	1.643500688	0.07	10.00	9.93
-10 °C, Nominal	1.643500593	0.02	10.00	9.98
-20 °C, Nominal	1.643500521	-0.03	10.00	9.97
-30 °C, Nominal	1.643500443	-0.07	10.00	9.93

Table 7.4-5: Frequency tolerance measurement result – waveform Z

Test conditions	Frequency, GHz	Offset, ppm	Limit, \pmppm	Margin, ppm
+50 °C, Nominal	1.643500674	0.04	10.00	9.96
+40 °C, Nominal	1.643500571	-0.02	10.00	9.98
+30 °C, Nominal	1.643500399	-0.12	10.00	9.88
+20 °C, +15 %	1.643500377	-0.14	10.00	9.86
+20 °C, Nominal	1.643500602		Reference	
+20 °C, -15 %	1.643500572	-0.02	10.00	9.98
+10 °C, Nominal	1.643500530	-0.04	10.00	9.96
0 °C, Nominal	1.643500541	-0.04	10.00	9.96
-10 °C, Nominal	1.643500617	0.01	10.00	9.99
-20 °C, Nominal	1.643500548	-0.03	10.00	9.97
-30 °C, Nominal	1.643500314	-0.18	10.00	9.82

Table 7.4-6: Frequency tolerance measurement result – IDP mode

Test conditions	Frequency, GHz	Offset, ppm	Limit, \pmppm	Margin, ppm
+50 °C, Nominal	1.645000111	0.06	10.00	9.94
+40 °C, Nominal	1.645000091	0.05	10.00	9.95
+30 °C, Nominal	1.645000074	0.04	10.00	9.96
+20 °C, +15 %	1.645000046	0.02	10.00	9.98
+20 °C, Nominal	1.645000014		Reference	
+20 °C, -15 %	1.645000041	0.02	10.00	9.98
+10 °C, Nominal	1.645000023	0.01	10.00	9.99
0 °C, Nominal	1.644999830	-0.11	10.00	9.89
-10 °C, Nominal	1.644999872	-0.09	10.00	9.91
-20 °C, Nominal	1.644999873	-0.09	10.00	9.91
-30 °C, Nominal	1.644999861	-0.09	10.00	9.91

7.5 FCC 25.216 and RSS-170 5.9 Limits on emissions from mobile earth stations for protection of aeronautical radionavigation-satellite service

7.5.1 References, definitions and limits

FCC §25.216:

- (c) The e.i.r.p. density of emissions from mobile earth stations with assigned uplink frequencies between 1610 MHz and 1660.5 MHz shall not exceed -70 dBW/MHz (-40 dBm/MHz), averaged over any 2 millisecond active transmission interval, in the band 1559–1605 MHz. The e.i.r.p. of discrete emissions of less than 700 Hz bandwidth from such stations shall not exceed -80 dBW (-50 dBm), averaged over any 2 millisecond active transmission interval, in the 1559–1605 MHz band.
- (f) Mobile earth stations with assigned uplink frequencies in the 1610–1660.5 MHz band shall suppress the power density of emissions in the 1605–1610 MHz band to an extent determined by linear interpolation from -70 dBW/MHz (-40 dBm/MHz) at 1605 MHz to -10 dBW/MHz (20 dBm/MHz) at 1610 MHz.

RSS-170, Clause 5.9:

- 5.9.1 Mobile earth stations with transmitting frequencies between 1610 and 1626.5 MHz shall have the e.i.r.p. density of unwanted emissions in the band 1605–1610 MHz, averaged over any 2 ms active transmission interval, not exceed the following limits:
 - (1) -70 dBW/MHz (-40 dBm/MHz) at 1605 MHz, linearly interpolated to -10 dBW/MHz (20 dBm/MHz) at 1610 MHz, for broadband emissions; and
 - (2) -80 dBW/kHz (-50 dBm/kHz) at 1605 MHz, linearly interpolated to -20 dBW/kHz (10 dBm/kHz) at 1610 MHz, for discrete emissions.
- 5.9.2 Mobile earth stations with transmitting frequencies between 1626.5 and 1660.5 MHz shall have the e.i.r.p. density of unwanted emissions in the band 1605–1610 MHz, averaged over any 2 ms active transmission interval, not exceed the following limits:
 - (1) -70 dBW/MHz (-40 dBm/MHz) at 1605 MHz, linearly interpolated to -46 dBW/MHz (-16 dBm/MHz) at 1610 MHz, for broadband emissions; and
 - (2) -80 dBW/kHz (-50 dBm/kHz) at 1605 MHz, linearly interpolated to -56 dBW/kHz (-26 dBm/kHz) at 1610 MHz, for discrete emissions.

7.5.2 Test summary

Verdict	Pass		
Test date	May 1, 2024	Temperature	23 °C
Tested by	Fahar Abdul Sukkoor	Air pressure	1010 mbar
Test location	Cambridge	Relative humidity	40 %

7.5.3 Observations, settings, and special notes

The test was performed radiated at the distance of 3 m. (Direct radiated field strength method based on a pre-characterized path loss per ANSI 63.4)

Spectrum analyser settings:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	RMS
Trace mode	Max-hold

7.5.4 Test data

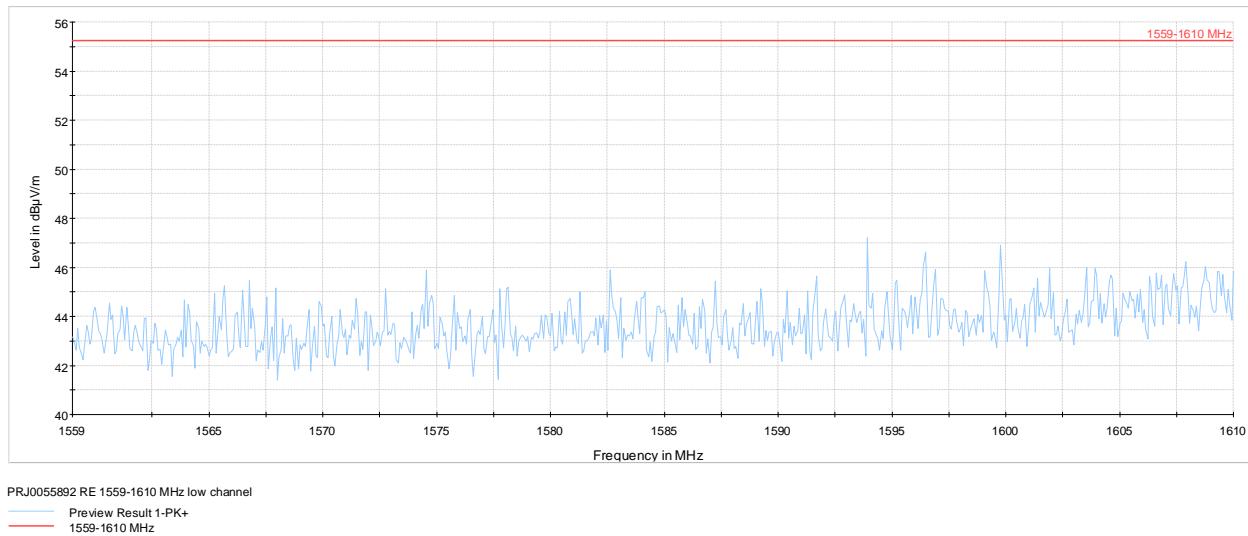


Figure 7.5-1: Radiated spurious emissions 1559–1610 MHz, low channel


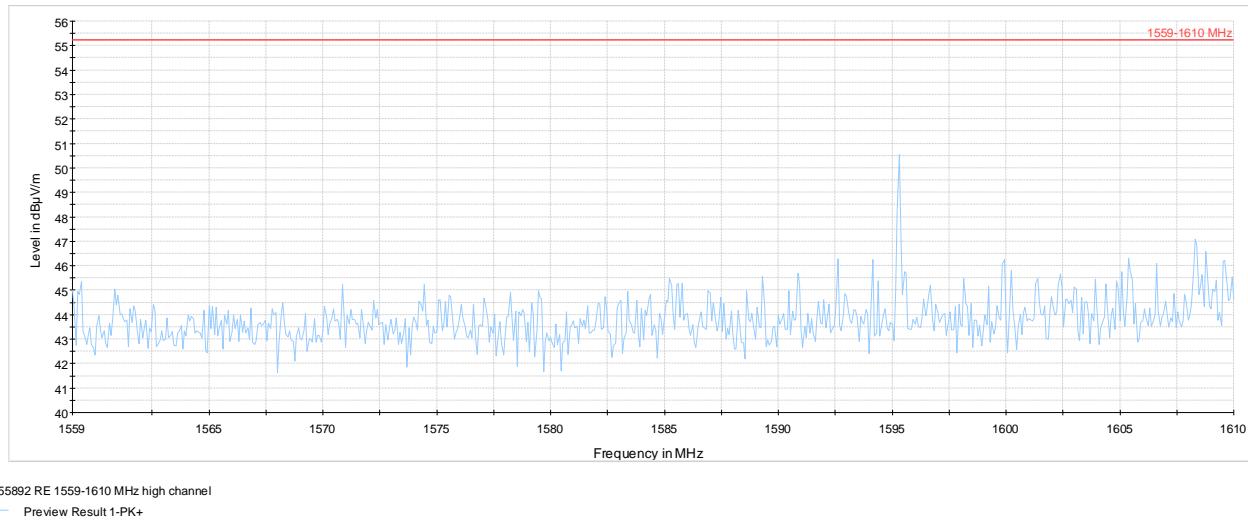



Figure 7.5-2: Radiated spurious emissions 1559–1610 MHz, high channel

Section 8. Test setup diagrams


8.1 Radiated emissions set-up for frequencies below 1 GHz

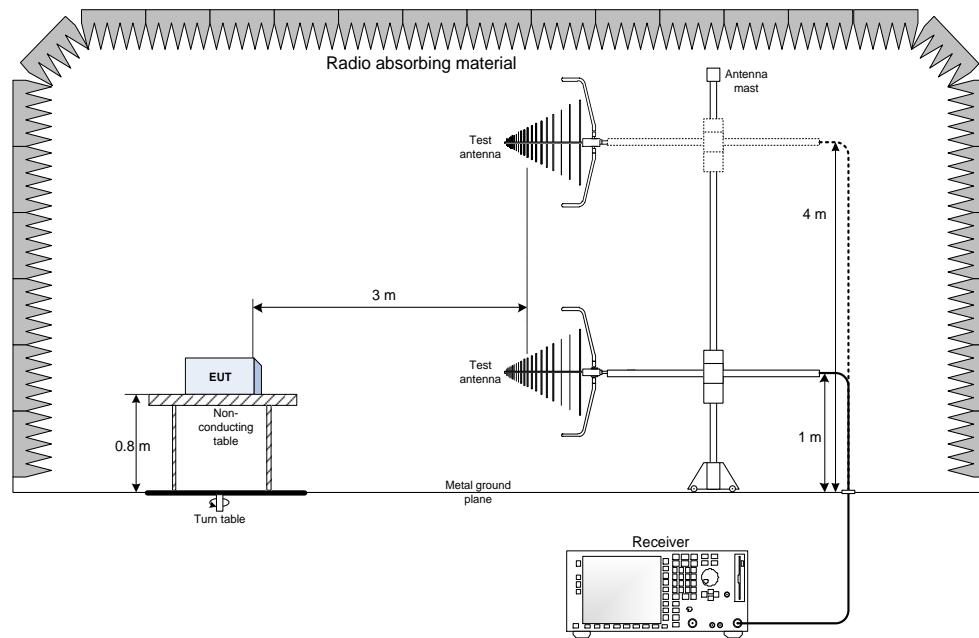

8.2 Radiated emissions set-up for frequencies above 1 GHz

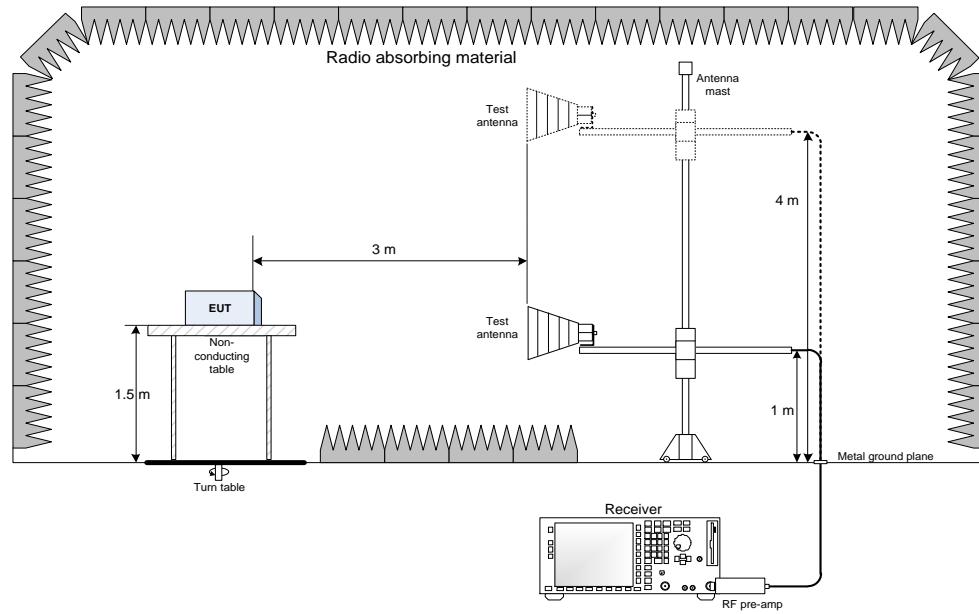

8.3 Antenna port set-up

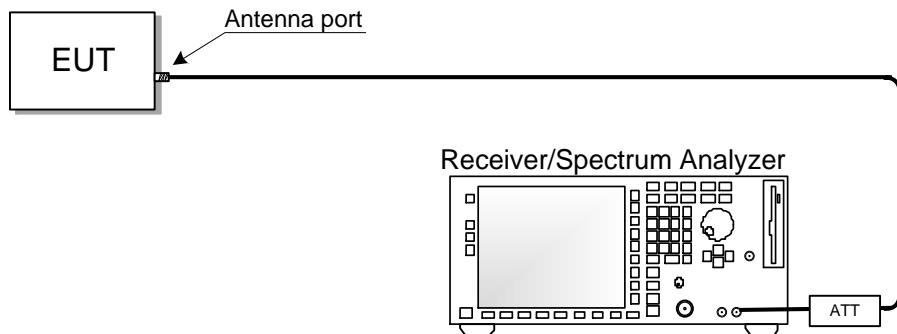

End of the test report