

TEST REPORT

Applicant Name : Franklin Technology Inc.
Address : 906 JEI Platz, 186, Gasan digital 1-ro, Gumcheon-Gu Seoul,
South Korea
Report Number : RA221101-50847E-RF-00A
FCC ID: XHG-RG2102

Test Standard (s)

FCC PART 15.247


Sample Description

Product Type: Mobile Hotspot
Model No.: RG2102
Multiple Model(s) No.: N/A
Trade Mark: N/A
Date Received: 2022/11/01
Report Date: 2022/12/20

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Andy Yu
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA221101-50847E-RF-00A	Original Report	2022/12/20

TABLE OF CONTENTS

GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1310&§2.1093 - RF EXPOSURE	13
APPLICABLE STANDARD	13
TEST RESULT	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
TRANSD FACTOR & MARGIN CALCULATION.....	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
APPENDIX	34
APPENDIX A: DTS BANDWIDTH	34
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	39
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	44
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	46
APPENDIX E: BAND EDGE MEASUREMENTS	55
APPENDIX F: DUTY CYCLE	61

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	Wi-Fi: 802.11b: 20.56dBm, 802.11g: 19.24dBm, 802.11n-HT20: 20.08dBm, 802.11ax20: 13.82dBm
Modulation Technique	Wi-Fi: DSSS, OFDM, OFDMA
Antenna Specification*	ANT 1: -2.21dBi ANT 2: -2.41dBi (provided by the applicant)
Voltage Range	DC 3.8V from battery or DC 5/9/12V from adapter
Sample serial number	1OJ3-1 for Conducted and Radiated Emissions 1OJ4-2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter Information	Model: PD018W-G Input: 100-240V,50/60Hz,0.5A Max Output: 5.0V,3.0A;9.0V,2.0A;12V,1.5A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

802.11b, 802.11g, 802.11n-HT20/AX20 mode was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“QRCT”* software was used to test and power level as below:

Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	15	15	15
802.11g	6Mbps	10	10	10
802.11n-HT20	MCS0	10	10	10
802.11ax-HE20	MCS0	01	01	01

The software and power level was provided by applicant.

For 802.11 ax mode, the device only support full RU mode, not support partial RU mode.

The device have two antennas and support SISO/MIMO transmit, scan SISO/MIMO, the worst case MIMO was selected to test.

Duty cycle



Test Result: Compliant. Please refer to the Appendix.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded detachable USB Cable	1.0	Adapter	EUT

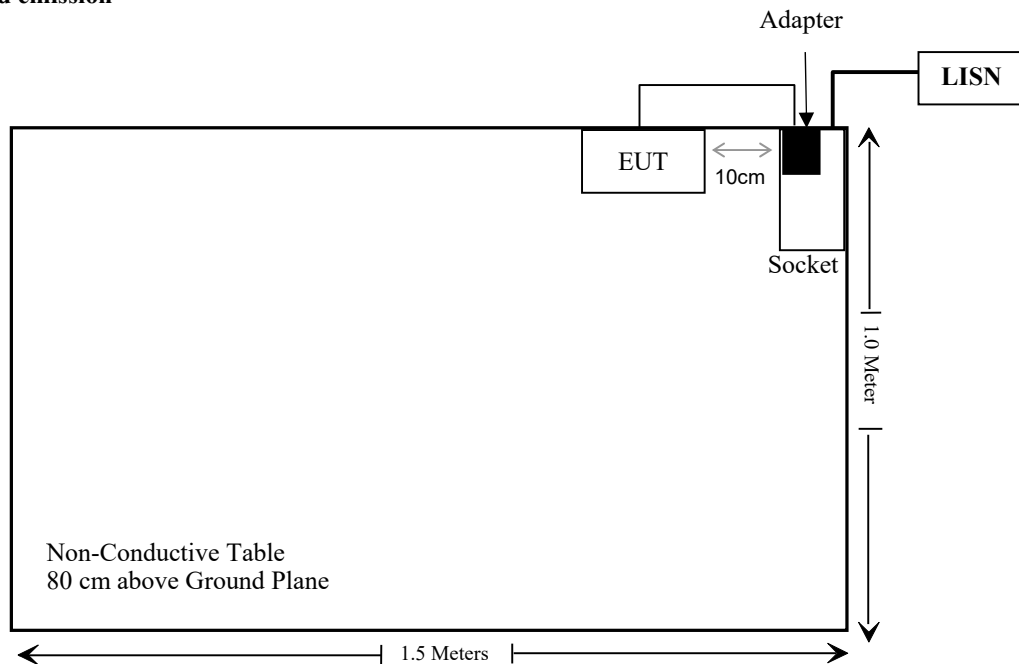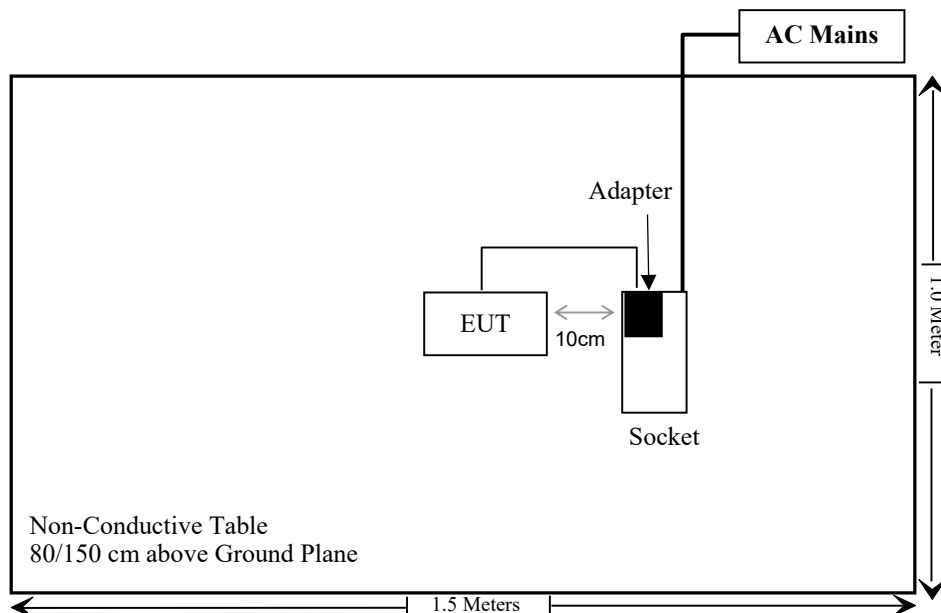Block Diagram of Test Setup**For conducted emission****For radiated emission:**

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF EXPOSURE	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test (30MHz-1GHz)					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Radiated Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test (Above 1GHz)					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.31	RF-01	Each time	/

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310&§2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RA221101-50847E-SA.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two internal antenna arrangement, which was permanently attached and the antenna gain is -2.21dBi for antenna 1, -2.41dBi for antenna 2, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

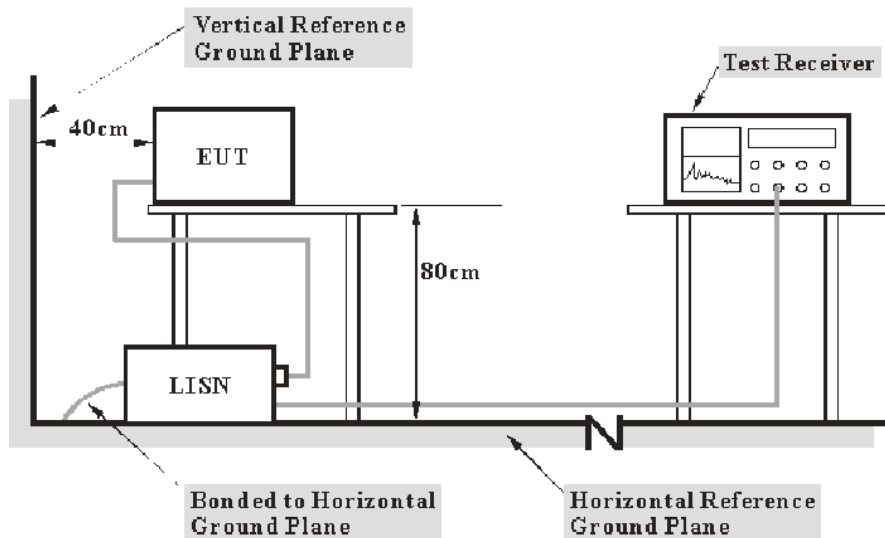

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the device was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{reading level} + \text{Transd Factor}\end{aligned}$$

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	47%
ATM Pressure:	101.0kPa

The testing was performed by Lipa on 2022-12-06.

EUT operation mode: Transmitting


Wi-Fi: (Worst case is 802.11b mode, middle Channel)

AC 120V/60 Hz, Line

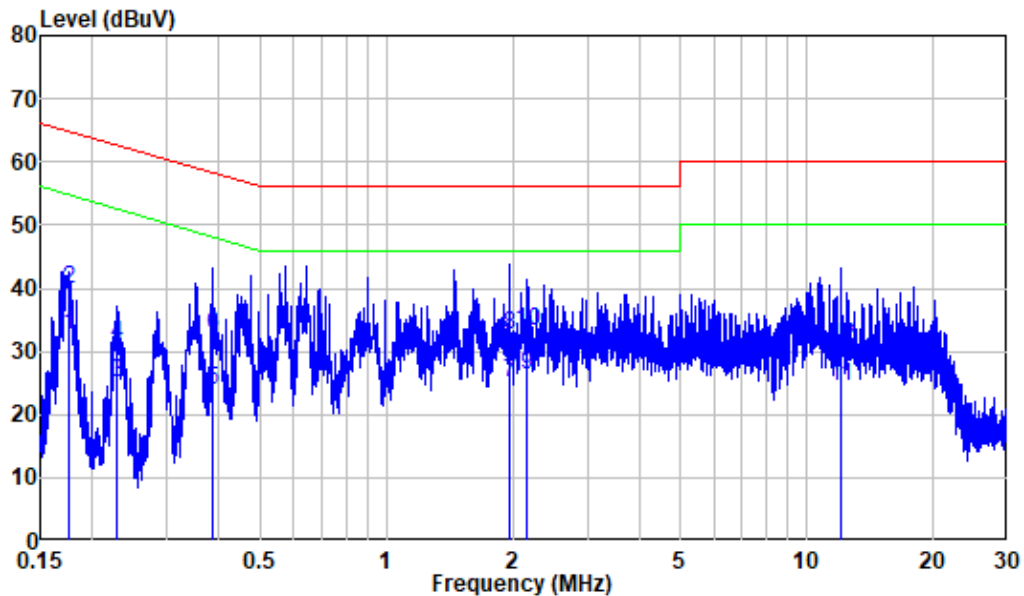

Site : Shielding Room
 Condition: Line
 Job No. : RA221101-50847E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.175	9.80	22.83	32.63	54.72	-22.09	Average
2	0.175	9.80	30.14	39.94	64.72	-24.78	QP
3	0.229	9.80	15.22	25.02	52.50	-27.48	Average
4	0.229	9.80	21.31	31.11	62.50	-31.39	QP
5	0.386	9.80	14.01	23.81	48.14	-24.33	Average
6	0.386	9.80	22.71	32.51	58.14	-25.63	QP
7	1.963	9.82	15.12	24.94	46.00	-21.06	Average
8	1.963	9.82	22.73	32.55	56.00	-23.45	QP
9	2.151	9.82	16.54	26.36	46.00	-19.64	Average
10	2.151	9.82	23.43	33.25	56.00	-22.75	QP
11	12.004	9.92	14.61	24.53	50.00	-25.47	Average
12	12.004	9.92	20.92	30.84	60.00	-29.16	QP

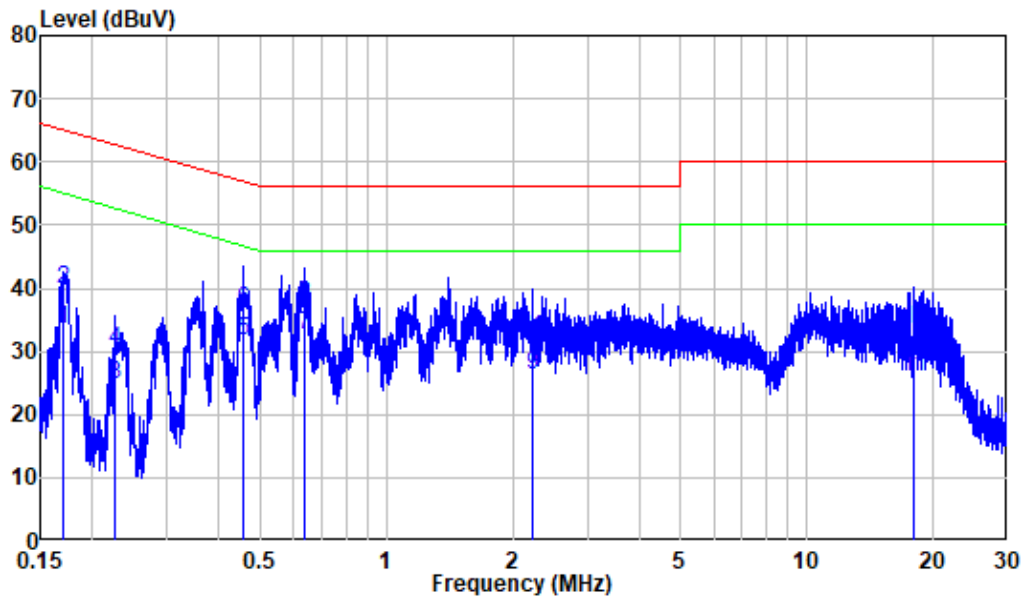AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Job No. : RA221101-50847E-RF
 Mode : 2.4G WIFI
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.170	9.80	23.73	33.53	54.95	-21.42	Average
2	0.170	9.80	29.92	39.72	64.95	-25.23	QP
3	0.226	9.80	14.93	24.73	52.61	-27.88	Average
4	0.226	9.80	20.37	30.17	62.61	-32.44	QP
5	0.455	9.80	22.04	31.84	46.78	-14.94	Average
6	0.455	9.80	26.74	36.54	56.78	-20.24	QP
7	0.636	9.81	22.90	32.71	46.00	-13.29	Average
8	0.636	9.81	27.66	37.47	56.00	-18.53	QP
9	2.216	9.82	16.32	26.14	46.00	-19.86	Average
10	2.216	9.82	22.04	31.86	56.00	-24.14	QP
11	17.897	10.08	15.88	25.96	50.00	-24.04	Average
12	17.897	10.08	23.35	33.43	60.00	-26.57	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

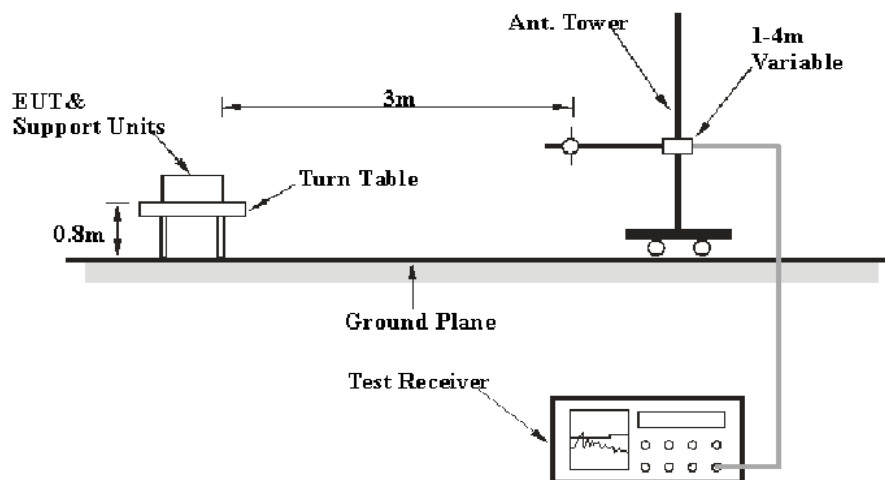

Above 1GHz:

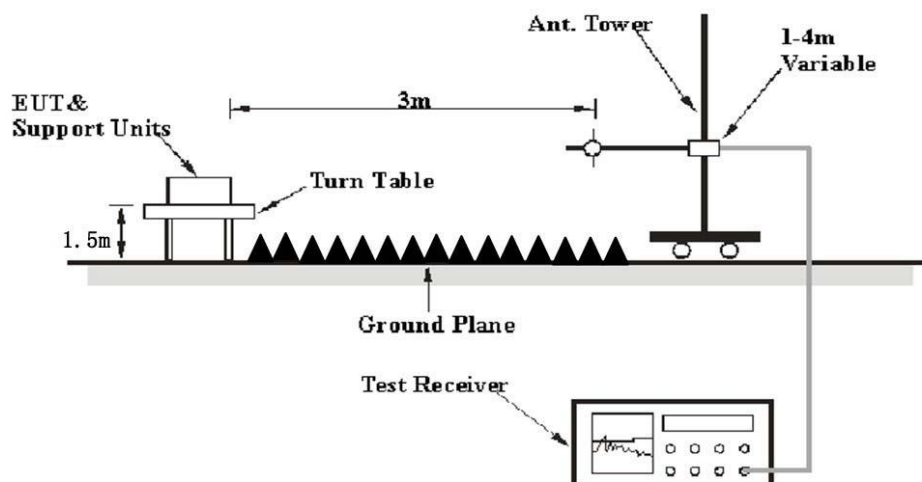

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a overlimit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24~25.5°C
Relative Humidity:	52~57%
ATM Pressure:	101.0 kPa


The testing was performed by Level Li on 2022-12-08 for below 1GHz and Jimi Zheng on 2022-11-16 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30MHz-1GHz: (Worst case is 802.11b mode, middle Channel)

Note: When the test result of peak was less than the limit of QP, just peak value were recorded.


Horizontal

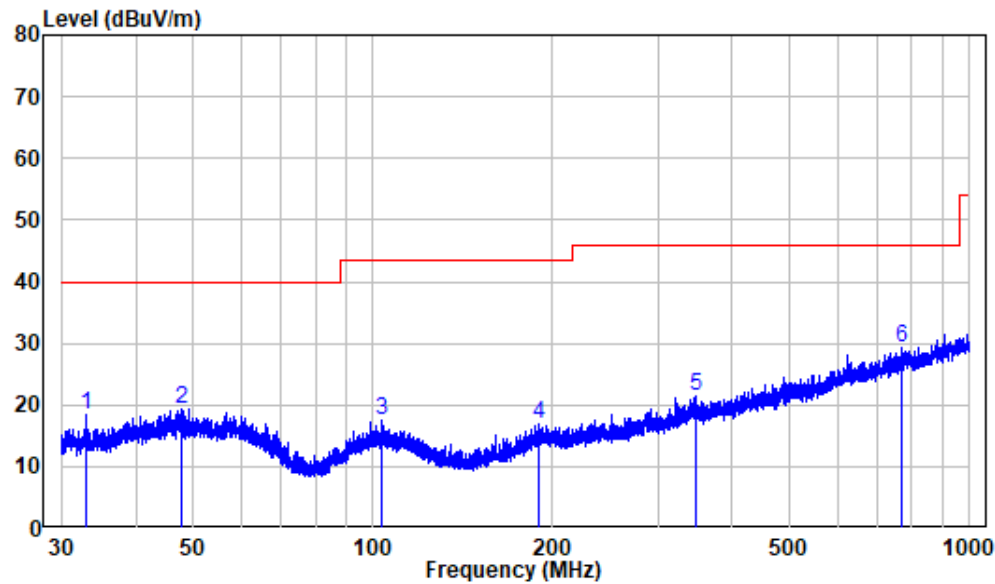

Site : chamber
Condition: 3m HORIZONTAL
Job No. : RA221101-50847E-RF
Test Mode: 2.4G WIFI transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.109	-11.99	30.31	18.32	40.00	-21.68	Peak
2	47.805	-10.00	29.29	19.29	40.00	-20.71	Peak
3	103.397	-11.69	29.31	17.62	43.50	-25.88	Peak
4	189.572	-11.64	28.63	16.99	43.50	-26.51	Peak
5	346.657	-7.24	28.60	21.36	46.00	-24.64	Peak
6	768.075	-0.28	29.63	29.35	46.00	-16.65	Peak

Vertical

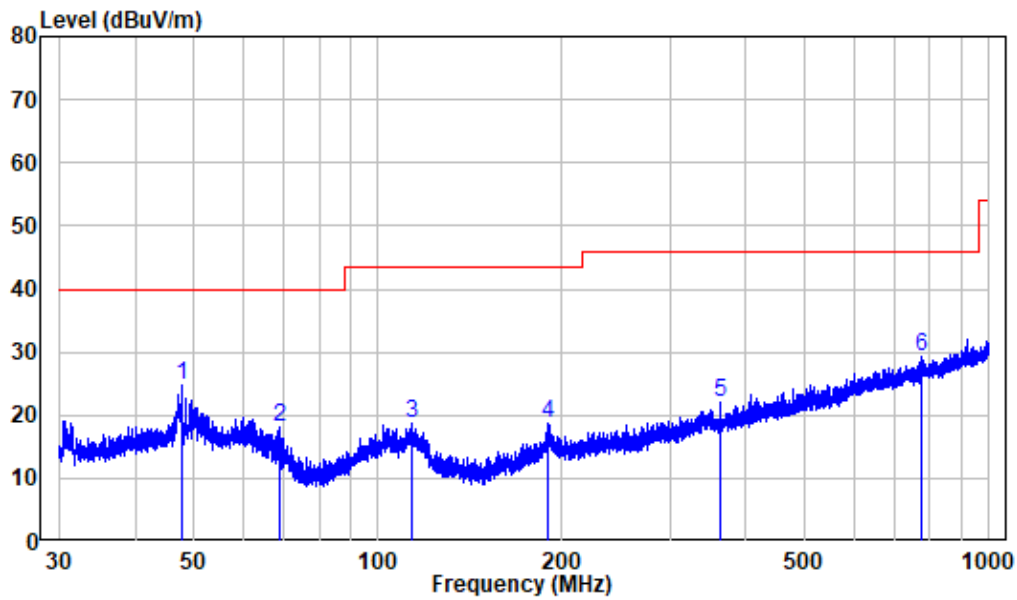

Site : chamber

Condition: 3m VERTICAL

Job No. : RA221101-50847E-RF

Test Mode: 2.4G WIFI transmitting

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	47.763	-10.00	34.62	24.62	40.00	-15.38	Peak
2	68.963	-14.28	32.27	17.99	40.00	-22.01	Peak
3	113.515	-12.51	31.13	18.62	43.50	-24.88	Peak
4	190.072	-11.57	30.20	18.63	43.50	-24.87	Peak
5	362.031	-7.62	29.62	22.00	46.00	-24.00	Peak
6	772.802	-0.06	29.30	29.24	46.00	-16.76	Peak

1-25 GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11b									
Low Channel(2412MHz)									
2310	60.88	PK	159	2.2	H	-7.24	53.64	74	-20.36
2310	46.97	Ave.	159	2.2	H	-7.24	39.73	54	-14.27
2310	60.75	PK	308	2.1	V	-7.24	53.51	74	-20.49
2310	46.83	Ave.	308	2.1	V	-7.24	39.59	54	-14.41
2390	63.38	PK	304	1.2	H	-7.22	56.16	74	-17.84
2390	49.51	Ave.	304	1.2	H	-7.22	42.29	54	-11.71
2390	63.13	PK	293	2.4	V	-7.22	55.91	74	-18.09
2390	49.27	Ave.	293	2.4	V	-7.22	42.05	54	-11.95
4824	58.41	PK	35	2	H	-3.52	54.89	74	-19.11
4824	45.00	Ave.	35	2	H	-3.52	41.48	54	-12.52
4824	60.48	PK	28	1.6	V	-3.52	56.96	74	-17.04
4824	48.69	Ave.	28	1.6	V	-3.52	45.17	54	-8.83
Middle Channel(2437MHz)									
4874	58.77	PK	97	2.4	H	-3.42	55.35	74	-18.65
4874	45.56	Ave.	97	2.4	H	-3.42	42.14	54	-11.86
4874	60.02	PK	66	2.4	V	-3.42	56.6	74	-17.40
4874	47.93	Ave.	66	2.4	V	-3.42	44.51	54	-9.49
High Channel(2462 MHz)									
2483.5	64.89	PK	88	2.3	H	-7.20	57.69	74	-16.31
2483.5	49.76	Ave.	88	2.3	H	-7.20	42.56	54	-11.44
2483.5	64.68	PK	203	1.2	V	-7.20	57.48	74	-16.52
2483.5	49.57	Ave.	203	1.2	V	-7.20	42.37	54	-11.63
2500	62.69	PK	190	1	H	-7.18	55.51	74	-18.49
2500	48.82	Ave.	190	1	H	-7.18	41.64	54	-12.36
2500	62.51	PK	99	1.4	V	-7.18	55.33	74	-18.67
2500	48.68	Ave.	99	1.4	V	-7.18	41.5	54	-12.50
4924	57.04	PK	350	1.3	H	-3.16	53.88	74	-20.12
4924	42.69	Ave.	350	1.3	H	-3.16	39.53	54	-14.47
4924	57.75	PK	69	1.5	V	-3.16	54.59	74	-19.41
4924	44.50	Ave.	69	1.5	V	-3.16	41.34	54	-12.66

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11g									
Low Channel(2412MHz)									
2310	61.57	PK	77	2.4	H	-7.24	54.33	74	-19.67
2310	47.28	Ave.	77	2.4	H	-7.24	40.04	54	-13.96
2310	61.43	PK	13	1.2	V	-7.24	54.19	74	-19.81
2310	47.15	Ave.	13	1.2	V	-7.24	39.91	54	-14.09
2390	75.31	PK	51	2.3	H	-7.22	68.09	74	-5.91
2390	50.72	Ave.	51	2.3	H	-7.22	43.50	54	-10.50
2390	69.79	PK	16	2.4	V	-7.22	62.57	74	-11.43
2390	49.73	Ave.	16	2.4	V	-7.22	42.51	54	-11.49
4824	59.61	PK	25	1.9	H	-3.52	56.09	74	-17.91
4824	43.44	Ave.	25	1.9	H	-3.52	39.92	54	-14.08
4824	62.28	PK	30	2	V	-3.52	58.76	74	-15.24
4824	44.05	Ave.	30	2	V	-3.52	40.53	54	-13.47
Middle Channel(2437MHz)									
4874	57.92	PK	72	2.4	H	-3.42	54.5	74	-19.50
4874	42.70	Ave.	72	2.4	H	-3.42	39.28	54	-14.72
4874	60.11	PK	283	1.9	V	-3.42	56.69	74	-17.31
4874	43.27	Ave.	283	1.9	V	-3.42	39.85	54	-14.15
High Channel(2462MHz)									
2483.5	76.00	PK	86	2.1	H	-7.20	68.8	74	-5.20
2483.5	51.13	Ave.	86	2.1	H	-7.20	43.93	54	-10.07
2483.5	70.48	PK	222	2.3	V	-7.20	63.28	74	-10.72
2483.5	50.37	Ave.	222	2.3	V	-7.20	43.17	54	-10.83
2500	62.92	PK	190	2.1	H	-7.18	55.74	74	-18.26
2500	48.97	Ave.	190	2.1	H	-7.18	41.79	54	-12.21
2500	62.70	PK	34	2	V	-7.18	55.52	74	-18.48
2500	48.84	Ave.	34	2	V	-7.18	41.66	54	-12.34
4924	58.93	PK	125	2.4	H	-3.16	55.77	74	-18.23
4924	42.66	Ave.	125	2.4	H	-3.16	39.50	54	-14.50
4924	61.28	PK	38	2	V	-3.16	58.12	74	-15.88
4924	43.57	Ave.	38	2	V	-3.16	40.41	54	-13.59

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11n20									
Low Channel(2412MHz)									
2310	61.75	PK	302	1.5	H	-7.24	54.51	74	-19.49
2310	47.63	Ave.	302	1.5	H	-7.24	40.39	54	-13.61
2310	61.58	PK	273	2.3	V	-7.24	54.34	74	-19.66
2310	47.50	Ave.	273	2.3	V	-7.24	40.26	54	-13.74
2390	77.88	PK	195	1.1	H	-7.22	70.66	74	-3.34
2390	58.21	Ave.	195	1.1	H	-7.22	50.99	54	-3.01
2390	71.53	PK	300	1.3	V	-7.22	64.31	74	-9.69
2390	53.24	Ave.	300	1.3	V	-7.22	46.02	54	-7.98
4824	61.55	PK	4	1.8	H	-3.52	58.03	74	-15.97
4824	46.42	Ave.	4	1.8	H	-3.52	42.90	54	-11.10
4824	65.14	PK	212	1.1	V	-3.52	61.62	74	-12.38
4824	47.69	Ave.	212	1.1	V	-3.52	44.17	54	-9.83
Middle Channel(2437MHz)									
4874	58.27	PK	205	2.2	H	-3.42	54.85	74	-19.15
4874	43.35	Ave.	205	2.2	H	-3.42	39.93	54	-14.07
4874	60.94	PK	131	1.9	V	-3.42	57.52	74	-16.48
4874	44.66	Ave.	131	1.9	V	-3.42	41.24	54	-12.76
High Channel(2462MHz)									
4874	58.27	PK	205	2.2	H	-3.42	54.85	74	-19.15
4874	43.35	Ave.	205	2.2	H	-3.42	39.93	54	-14.07
4874	60.94	PK	131	1.9	V	-3.42	57.52	74	-16.48
4874	44.66	Ave.	131	1.9	V	-3.42	41.24	54	-12.76
2500	69.25	PK	233	1.1	H	-7.18	62.07	74	-11.93
2500	57.10	Ave.	233	1.1	H	-7.18	49.92	54	-4.08
2500	68.48	PK	24	1	V	-7.18	61.3	74	-12.7
2500	56.86	Ave.	24	1	V	-7.18	49.68	54	-4.32
4924	55.47	PK	321	1.9	H	-3.16	52.31	74	-21.69
4924	42.34	Ave.	321	1.9	H	-3.16	39.18	54	-14.82
4924	58.17	PK	204	1.3	V	-3.16	55.01	74	-18.99
4924	46.15	Ave.	204	1.3	V	-3.16	42.99	54	-11.01

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11ax20									
Low Channel(2412MHz)									
2310	60.48	PK	313	1.4	H	-7.24	53.24	74	-20.76
2310	48.60	Ave.	313	1.4	H	-7.24	41.36	54	-12.64
2310	61.15	PK	323	1.9	V	-7.24	53.91	74	-20.09
2310	48.68	Ave.	323	1.9	V	-7.24	41.44	54	-12.56
2390	73.89	PK	83	1.1	H	-7.22	66.67	74	-7.33
2390	57.20	Ave.	83	1.1	H	-7.22	49.98	54	-4.02
2390	65.48	PK	78	1.6	V	-7.22	58.26	74	-15.74
2390	52.33	Ave.	78	1.6	V	-7.22	45.11	54	-8.89
4824	58.83	PK	51	1.1	H	-3.52	55.31	74	-18.69
4824	45.28	Ave.	51	1.1	H	-3.52	41.76	54	-12.24
4824	58.03	PK	301	2.2	V	-3.52	54.51	74	-19.49
4824	44.92	Ave.	301	2.2	V	-3.52	41.40	54	-12.60
Middle Channel(2437MHz)									
4874	58.92	PK	135	2.2	H	-3.42	55.5	74	-18.50
4874	45.53	Ave.	135	2.2	H	-3.42	42.11	54	-11.89
4874	57.97	PK	209	1.3	V	-3.42	54.55	74	-19.45
4874	45.19	Ave.	209	1.3	V	-3.42	41.77	54	-12.23
High Channel(2462MHz)									
2483.5	64.00	PK	218	1.9	H	-7.20	56.8	74	-17.20
2483.5	50.62	Ave.	218	1.9	H	-7.20	43.42	54	-10.58
2483.5	63.67	PK	183	2.3	V	-7.20	56.47	74	-17.53
2483.5	50.14	Ave.	183	2.3	V	-7.20	42.94	54	-11.06
2500	67.83	PK	344	1.6	H	-7.18	60.65	74	-13.35
2500	53.51	Ave.	344	1.6	H	-7.18	46.33	54	-7.67
2500	65.74	PK	249	2.1	V	-7.18	58.56	74	-15.44
2500	51.56	Ave.	249	2.1	V	-7.18	44.38	54	-9.62
4924	58.90	PK	71	1	H	-3.16	55.74	74	-18.26
4924	45.42	Ave.	71	1	H	-3.16	42.26	54	-11.74
4924	57.90	PK	359	1.4	V	-3.16	54.74	74	-19.26
4924	44.72	Ave.	359	1.4	V	-3.16	41.56	54	-12.44

Simultaneously Transmission (WWAN+WLAN)

Note: The worst case 802.11b Mode 2412MHz+LTE B30 (QPSK,5MHz)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
961.04	31.15	PK	258	2.2	H	2.36	33.51	46	-12.49
961.04	31.72	PK	258	2.2	V	2.36	34.08	46	-11.92
4824	58.34	PK	120	1.8	H	-3.52	54.82	74	-19.18
4824	44.85	Ave.	120	1.8	H	-3.52	41.33	54	-12.67
4824	60.37	PK	198	2.2	V	-3.52	56.85	74	-17.15
4824	48.60	Ave.	198	2.2	V	-3.52	45.08	54	-8.92

Frequency (MHz)	Receiver Reading (dBm)	Turntable Degree	Rx Antenna		Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)				
239.56	-58.23	216	1.5	H	7.4	-50.83	-40	-10.83
633.89	-48.26	132	1.3	V	7	-41.26	-40	-1.26
4615.0	-59.19	82	1.5	H	10.5	-48.69	-40	-8.69
4615.0	-57.92	248	1.6	V	10.1	-47.82	-40	-7.82

Note 1:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected Amplitude - Limit

The other spurious emission which is 20dB below to the limit was not recorded.



The test result of peak was less than the limit of average, so just peak values were recorded.

Note 2:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: SG Level - Cable loss+ Antenna Gain


Margin = Absolute Level - Limit

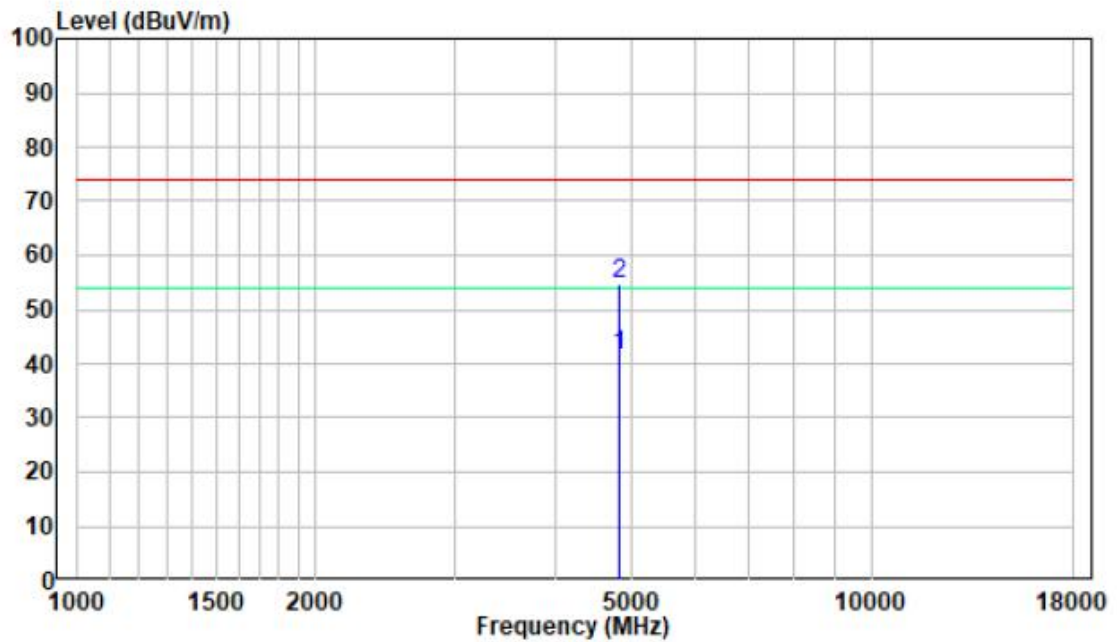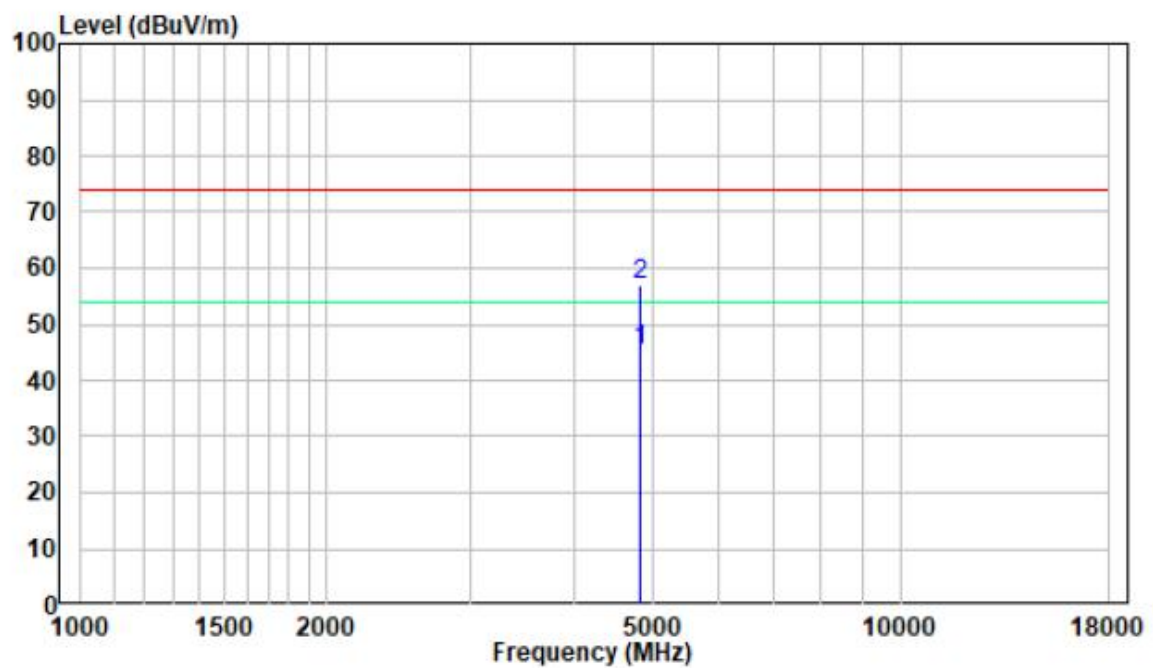1-18 GHz:**Pre-scan Plots:****802.11 b Low Channel
Horizontal****Vertical**


18 -25GHz:

Pre-scan Plots:

802.11 b Low Channel
Horizontal

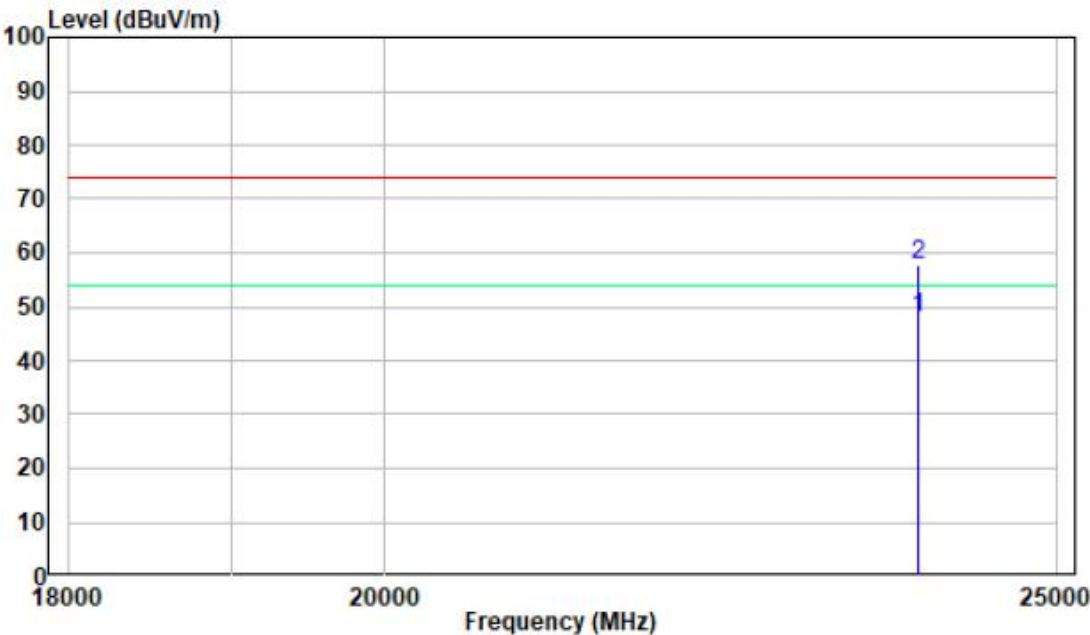

Vertical

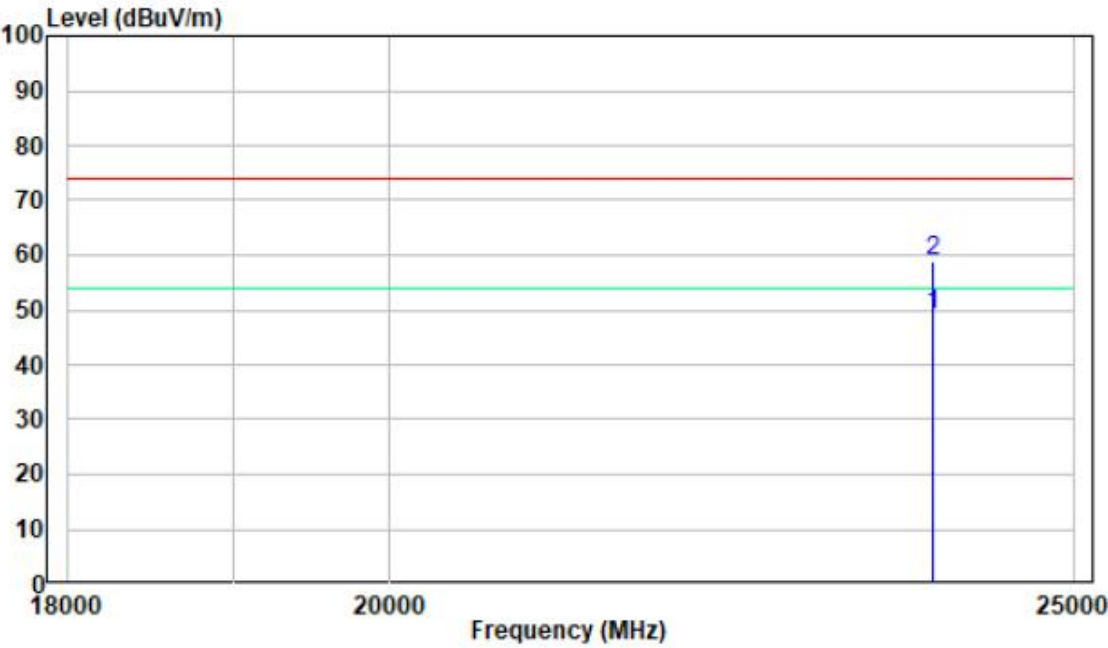


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

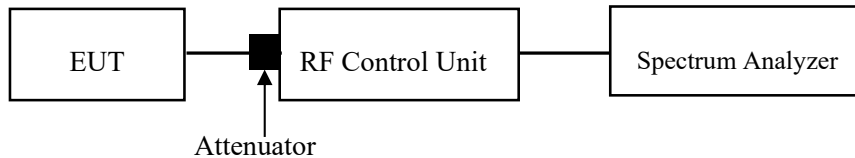

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-12-01.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

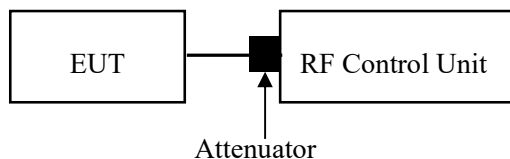

Note: the RF control unit has a built-in power sensor

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-12-01.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

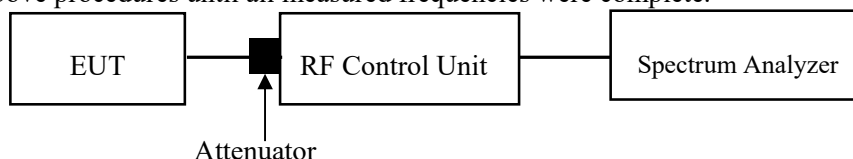

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-12-01.

EUT operation mode: Transmitting

Test Result: Compliant.

Please refer to the Appendix.


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

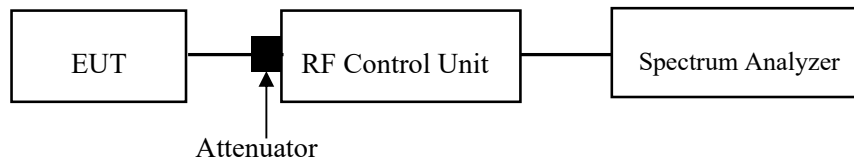

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-12-01.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

APPENDIX

Appendix A: DTS Bandwidth Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	8.16	2407.48	2415.64	0.5	PASS
	Ant1	2437	7.12	2433.44	2440.56	0.5	PASS
	Ant1	2462	8.24	2457.48	2465.72	0.5	PASS
11G-CDD	Ant1	2412	16.04	2403.84	2419.88	0.5	PASS
	Ant1	2437	15.52	2429.24	2444.76	0.5	PASS
	Ant1	2462	16.28	2453.84	2470.12	0.5	PASS
11N20MIMO	Ant1	2412	16.32	2403.48	2419.80	0.5	PASS
	Ant1	2437	15.64	2428.92	2444.56	0.5	PASS
	Ant1	2462	16.72	2453.64	2470.36	0.5	PASS
11AX20MIMO	Ant1	2412	17.00	2402.84	2419.84	0.5	PASS
	Ant1	2437	15.72	2429.04	2444.76	0.5	PASS
	Ant1	2462	18.28	2452.96	2471.24	0.5	PASS

Test Graphs


11B-CDD_Ant1_2412



11B-CDD_Ant1_2437

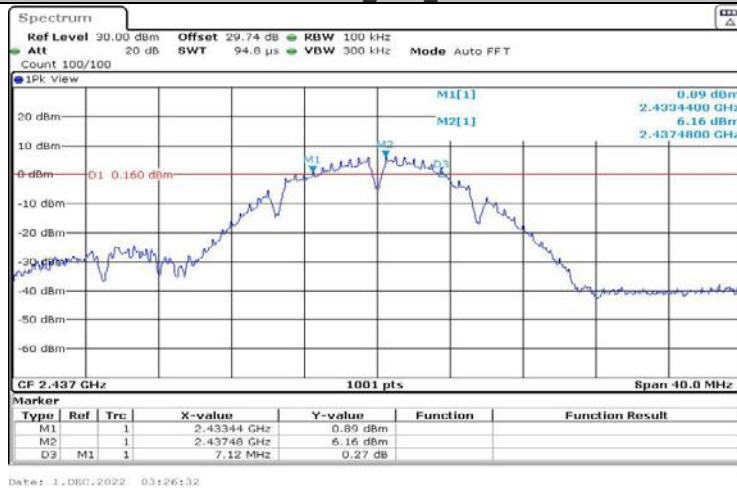


11B-CDD_Ant1_2462

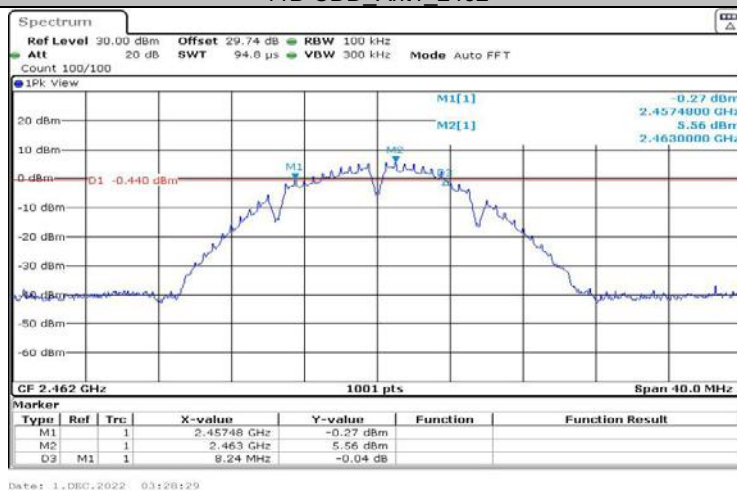


11G-CDD_Ant1_2412



11G-CDD_Ant1_2437

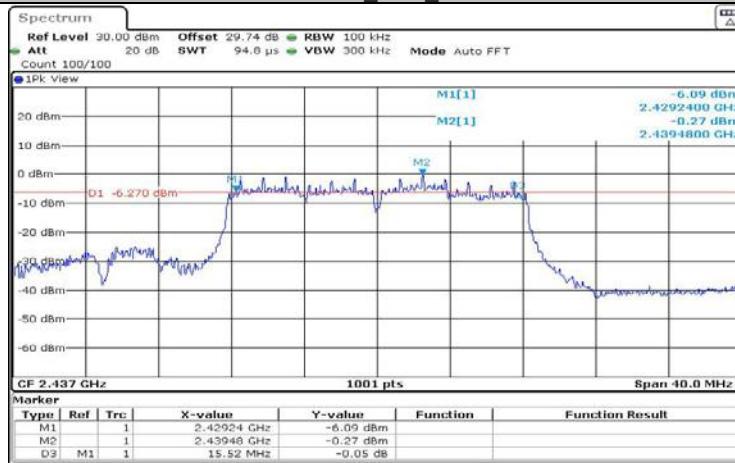

11G-CDD_Ant1_2462

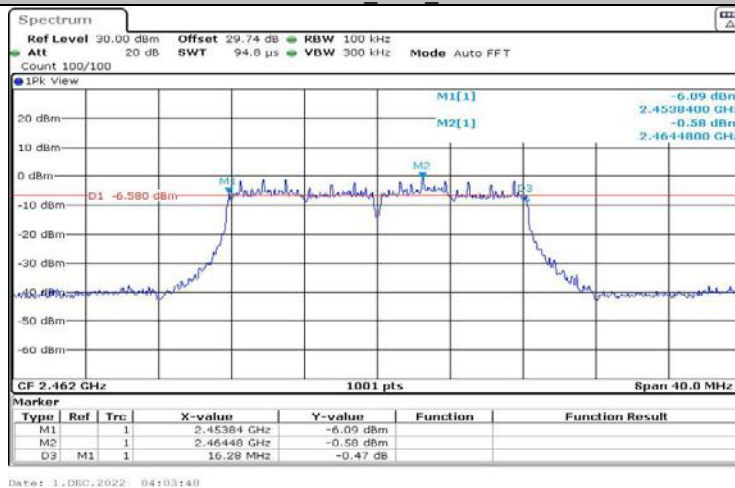


11N20MIMO_Ant1_2412




Date: 1, DEC, 2022 03:50:57

11N20MIMO_Ant1_2437

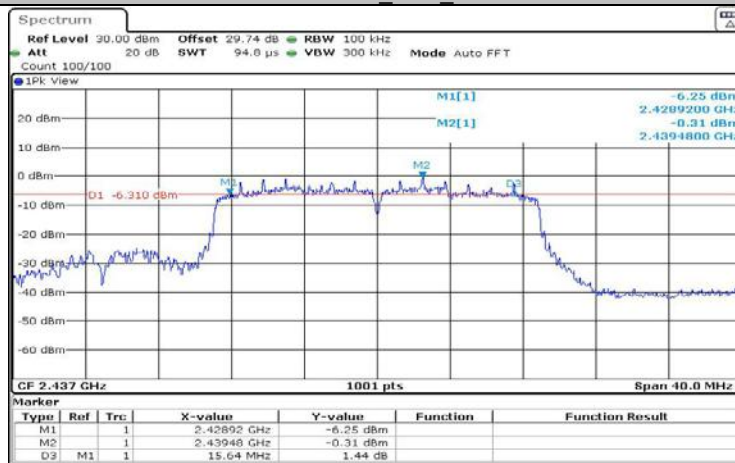


Date: 1, DEC, 2022 03:53:22

11N20MIMO_Ant1_2462

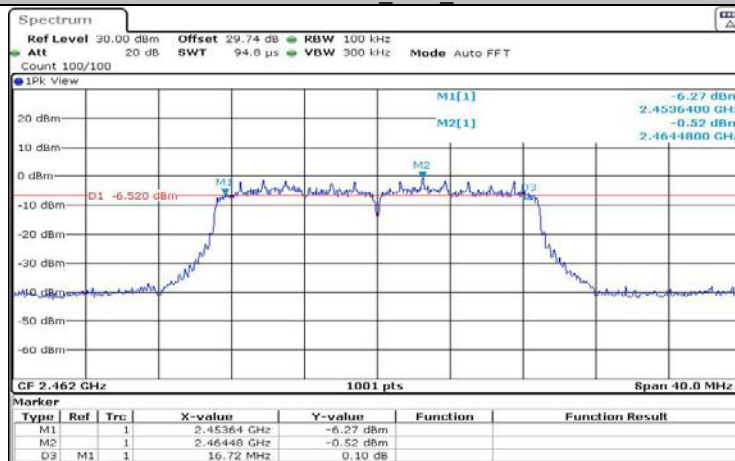


Date: 1, DEC, 2022 03:56:08


11AX20MIMO_Ant1_2412

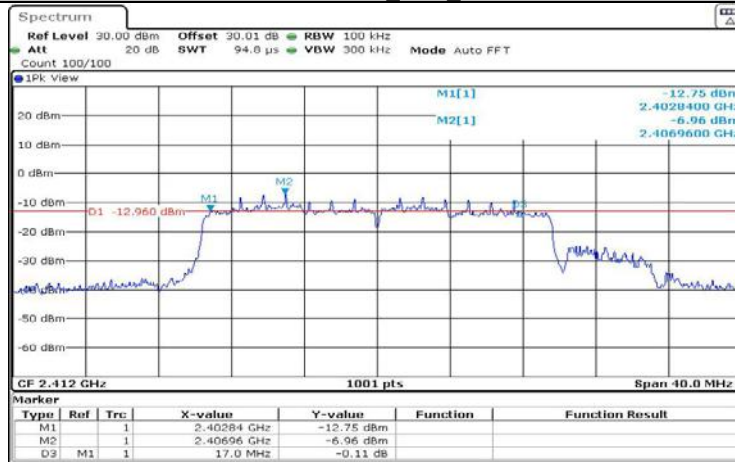

11AX20MIMO_Ant1_2437

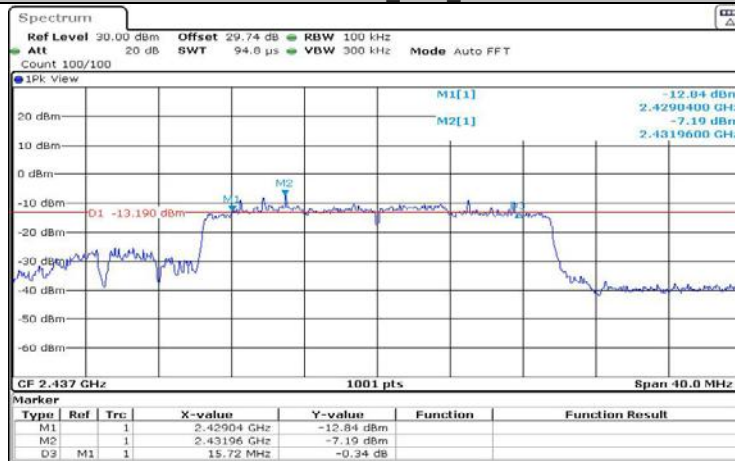

11AX20MIMO_Ant1_2462

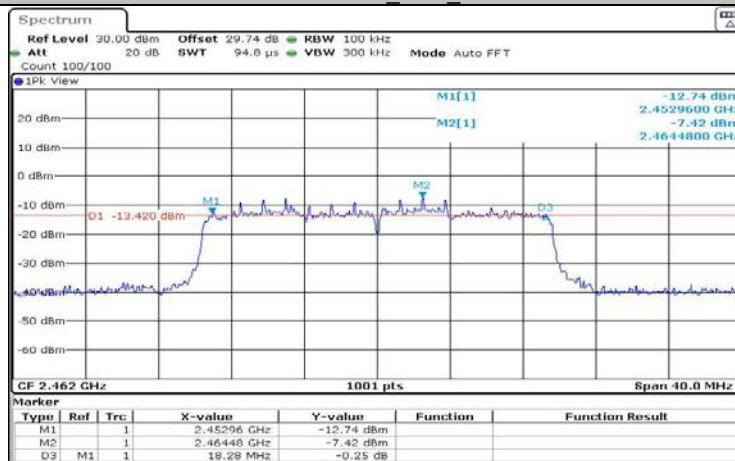


Appendix B: Occupied Channel Bandwidth Test Result


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B-CDD	Ant1	2412	13.906	2405.087	2418.993	---	---
	Ant1	2437	13.506	2430.047	2443.553	---	---
	Ant1	2462	13.267	2455.327	2468.593	---	---
11G-CDD	Ant1	2412	16.663	2403.688	2420.352	---	---
	Ant1	2437	16.663	2428.648	2445.312	---	---
	Ant1	2462	16.623	2453.688	2470.312	---	---
11N20MIMO	Ant1	2412	17.782	2403.129	2420.911	---	---
	Ant1	2437	17.702	2428.129	2445.831	---	---
	Ant1	2462	17.662	2453.169	2470.831	---	---
11AX20MIMO	Ant1	2412	19.540	2402.410	2421.950	---	---
	Ant1	2437	19.580	2426.970	2446.550	---	---
	Ant1	2462	19.141	2452.450	2471.590	---	---

Test Graphs


11B-CDD_Ant1_2412

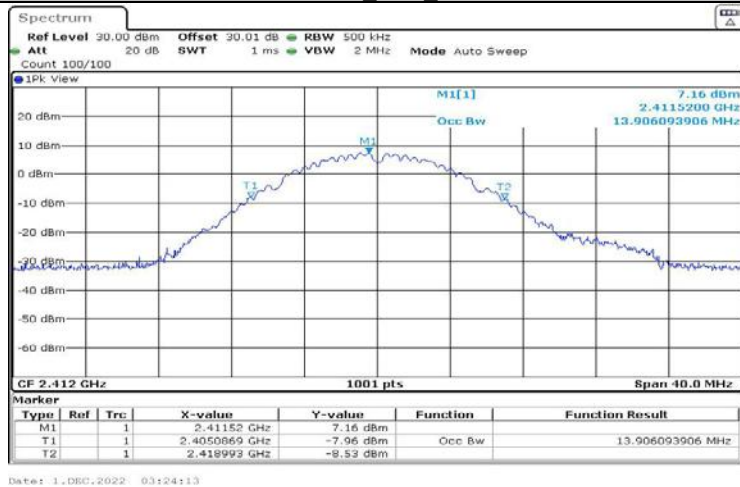


11B-CDD_Ant1_2437

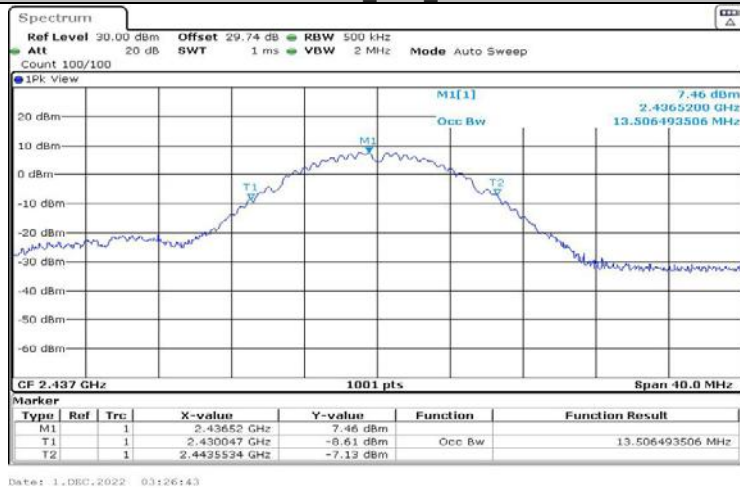


11B-CDD_Ant1_2462

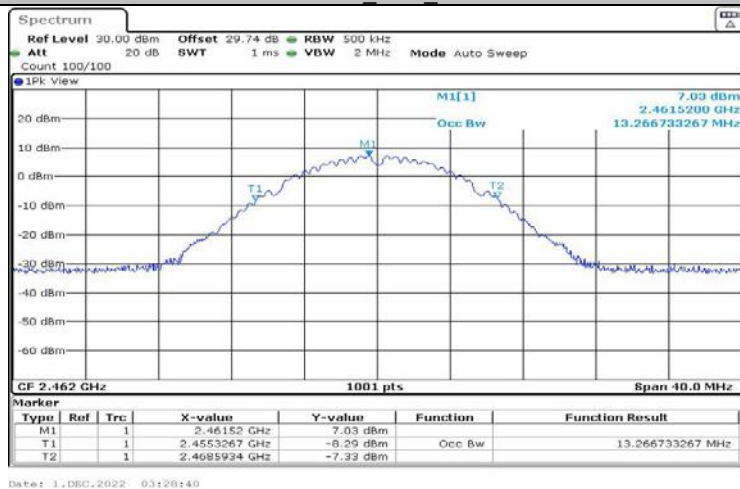


11G-CDD_Ant1_2412

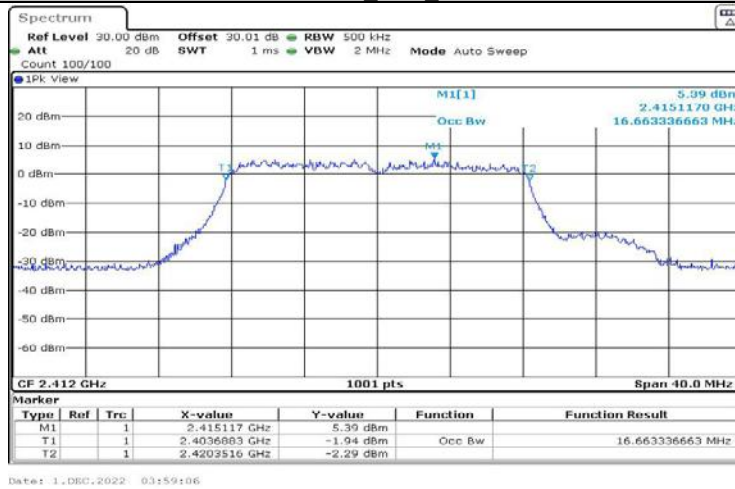


11G-CDD_Ant1_2437

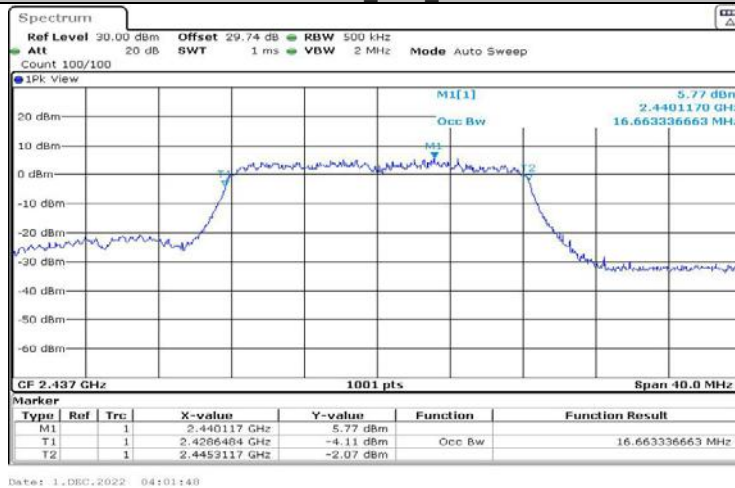

11G-CDD_Ant1_2462

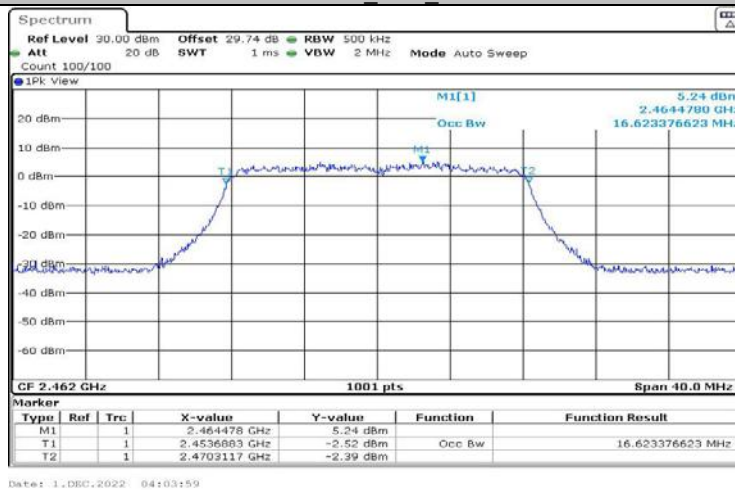


11N20MIMO_Ant1_2412

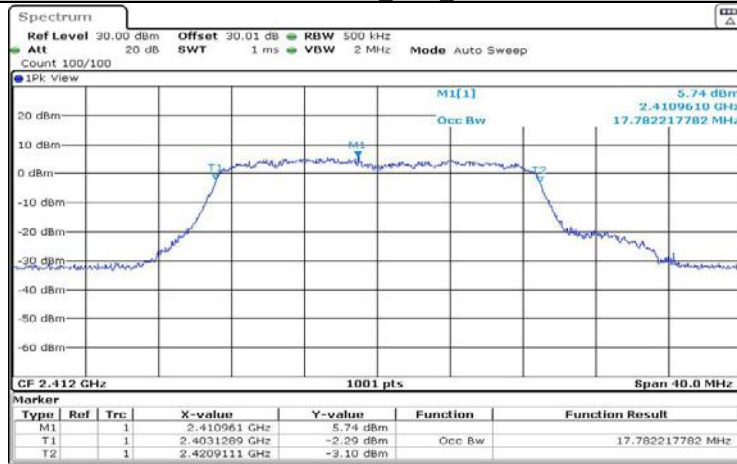


Date: 1.DEC.2022 03:51:00

11N20MIMO_Ant1_2437

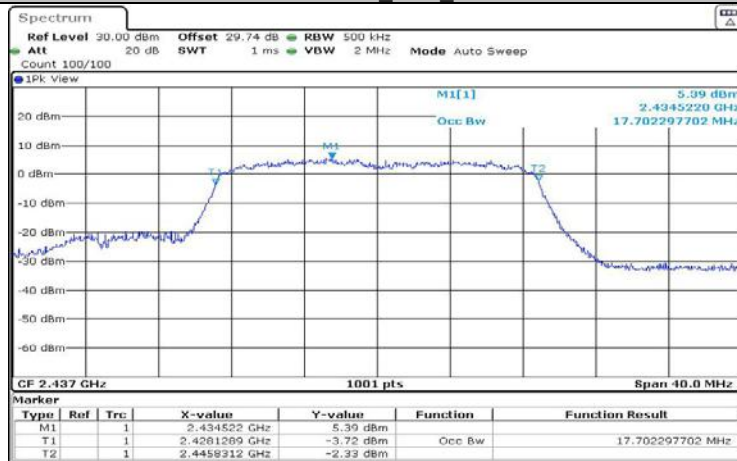

Date: 1.DEC.2022 03:53:33

11N20MIMO_Ant1_2462

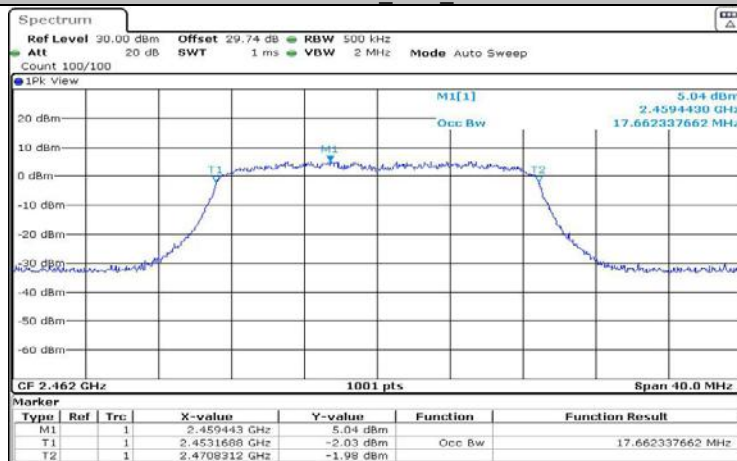


Date: 1.DEC.2022 03:56:19

11AX20MIMO_Ant1_2412



11AX20MIMO_Ant1_2437

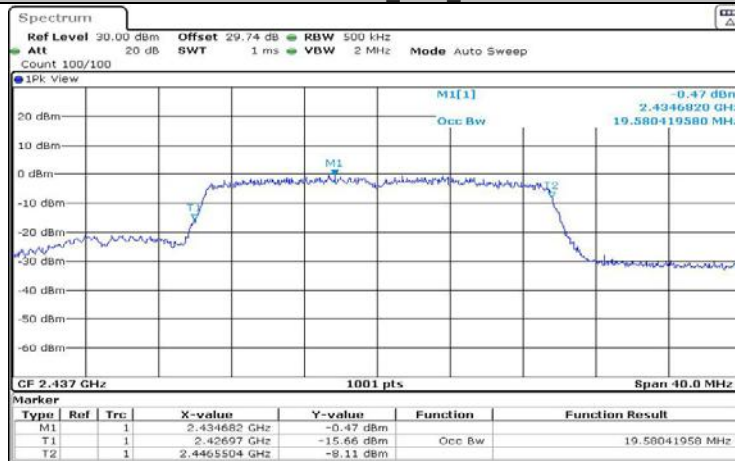

11AX20MIMO_Ant1_2462



Appendix C: Maximum conducted output power Test Result

Test Mode	Antenna	Frequency[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B-CDD	Ant1	2412	17.53	≤30.00	PASS
	Ant2	2412	17.17	≤30.00	PASS
	total	2412	20.36	≤30.00	PASS
	Ant1	2437	17.48	≤30.00	PASS
	Ant2	2437	17.61	≤30.00	PASS
	total	2437	20.56	≤30.00	PASS
	Ant1	2462	17.36	≤30.00	PASS
	Ant2	2462	17.46	≤30.00	PASS
	total	2462	20.42	≤30.00	PASS
11G-CDD	Ant1	2412	16.31	≤30.00	PASS
	Ant2	2412	15.82	≤30.00	PASS
	total	2412	19.08	≤30.00	PASS
	Ant1	2437	16.22	≤30.00	PASS
	Ant2	2437	16.24	≤30.00	PASS
	total	2437	19.24	≤30.00	PASS
	Ant1	2462	16.32	≤30.00	PASS
	Ant2	2462	15.85	≤30.00	PASS
	total	2462	19.10	≤30.00	PASS
11N20MIMO	Ant1	2412	17.20	≤30.00	PASS
	Ant2	2412	16.85	≤30.00	PASS
	total	2412	20.04	≤30.00	PASS
	Ant1	2437	16.99	≤30.00	PASS
	Ant2	2437	17.14	≤30.00	PASS
	total	2437	20.08	≤30.00	PASS
	Ant1	2462	17.12	≤30.00	PASS
	Ant2	2462	16.70	≤30.00	PASS
	total	2462	19.93	≤30.00	PASS
11AX20MIMO	Ant1	2412	10.40	≤30.00	PASS
	Ant2	2412	11.19	≤30.00	PASS
	total	2412	13.82	≤30.00	PASS
	Ant1	2437	10.33	≤30.00	PASS
	Ant2	2437	10.90	≤30.00	PASS
	total	2437	13.63	≤30.00	PASS
	Ant1	2462	10.33	≤30.00	PASS
	Ant2	2462	10.92	≤30.00	PASS
	total	2462	13.65	≤30.00	PASS

Test Mode	Antenna	Frequency[MHz]	Average Power[dBm]	Conducted Limit[dBm]	Verdict
11B-CDD	Ant1	2412	13.98	≤30.00	PASS
	Ant2	2412	15.05	≤30.00	PASS
	total	2412	17.56	≤30.00	PASS
	Ant1	2437	14.14	≤30.00	PASS
	Ant2	2437	15.11	≤30.00	PASS
	total	2437	17.66	≤30.00	PASS
	Ant1	2462	14.03	≤30.00	PASS
	Ant2	2462	15.35	≤30.00	PASS
	total	2462	17.75	≤30.00	PASS
11G-CDD	Ant1	2412	11.10	≤30.00	PASS
	Ant2	2412	11.40	≤30.00	PASS
	total	2412	14.26	≤30.00	PASS
	Ant1	2437	11.31	≤30.00	PASS
	Ant2	2437	11.76	≤30.00	PASS
	total	2437	14.55	≤30.00	PASS

	Ant1	2462	12.30	≤30.00	PASS
	Ant2	2462	12.00	≤30.00	PASS
	total	2462	15.16	≤30.00	PASS
11N20MIMO	Ant1	2412	8.82	≤30.00	PASS
	Ant2	2412	9.81	≤30.00	PASS
	total	2412	12.35	≤30.00	PASS
	Ant1	2437	8.67	≤30.00	PASS
	Ant2	2437	9.93	≤30.00	PASS
	total	2437	12.36	≤30.00	PASS
	Ant1	2462	8.90	≤30.00	PASS
	Ant2	2462	9.94	≤30.00	PASS
	total	2462	12.46	≤30.00	PASS
11AX20MIMO	Ant1	2412	2.03	≤30.00	PASS
	Ant2	2412	3.72	≤30.00	PASS
	total	2412	5.97	≤30.00	PASS
	Ant1	2437	2.14	≤30.00	PASS
	Ant2	2437	3.48	≤30.00	PASS
	total	2437	5.87	≤30.00	PASS
	Ant1	2462	1.99	≤30.00	PASS
	Ant2	2462	3.51	≤30.00	PASS
	total	2462	5.83	≤30.00	PASS

Note:

The EUT employ CDD for MIMO

$Directional\ Gain = G_{ANT} + Array\ Gain$

For Output Power Measurement, $Array\ Gain = 0dB$ for $N_{ANT} \leq 4$

$G_{ANT1} = -2.21dBi$, $G_{ANT2} = -2.41dBi$, use the higher antenna gain to calculate the worst case:

$Directional\ Gain = -2.21dBi + 0dB = -2.21dBi < 6dBi$

Appendix D: Maximum power spectral density Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B-CDD	Ant1	2412	-8.29	≤8.00	PASS
	Ant2	2412	-9.36	≤8.00	PASS
	total	2412	-5.78	≤8.00	PASS
	Ant1	2437	-8.45	≤8.00	PASS
	Ant2	2437	-8.62	≤8.00	PASS
	total	2437	-5.52	≤8.00	PASS
	Ant1	2462	-8.61	≤8.00	PASS
	Ant2	2462	-8.23	≤8.00	PASS
11G-CDD	total	2462	-5.41	≤8.00	PASS
	Ant1	2412	-16.72	≤8.00	PASS
	Ant2	2412	-18.23	≤8.00	PASS
	total	2412	-14.40	≤8.00	PASS
	Ant1	2437	-17.51	≤8.00	PASS
	Ant2	2437	-17.86	≤8.00	PASS
	total	2437	-14.67	≤8.00	PASS
	Ant1	2462	-17.83	≤8.00	PASS
11N20MIMO	Ant2	2462	-18.25	≤8.00	PASS
	total	2462	-15.02	≤8.00	PASS
	Ant1	2412	-14.78	≤8.00	PASS
	Ant2	2412	-15.26	≤8.00	PASS
	total	2412	-12.00	≤8.00	PASS
	Ant1	2437	-15.6	≤8.00	PASS
	Ant2	2437	-15.3	≤8.00	PASS
	total	2437	-12.44	≤8.00	PASS
11AX20MIMO	Ant1	2462	-15.48	≤8.00	PASS
	Ant2	2462	-15.9	≤8.00	PASS
	total	2462	-12.67	≤8.00	PASS
	Ant1	2412	-21.41	≤8.00	PASS
	Ant2	2412	-22.2	≤8.00	PASS
	total	2412	-18.78	≤8.00	PASS
	Ant1	2437	-21.49	≤8.00	PASS
	Ant2	2437	-21.19	≤8.00	PASS
	total	2437	-18.33	≤8.00	PASS
	Ant1	2462	-22.37	≤8.00	PASS
	Ant2	2462	-21.33	≤8.00	PASS
	total	2462	-18.81	≤8.00	PASS

Note:

The EUT employ CDD for MIMO


$Directional\ Gain = G_{ANT} + Array\ Gain$

For PSD Measurement, $Array\ Gain = 10 * \log N_{ANT} = 10 * \log 2 = 3dB$


$G_{ANT1} = -2.21dBi$, $G_{ANT2} = -2.41dBi$, use the higher antenna gain to calculate the worst case:

$Directional\ Gain = -2.21dBi + 3dB = 0.79dBi < 6dBi$


Test Graphs

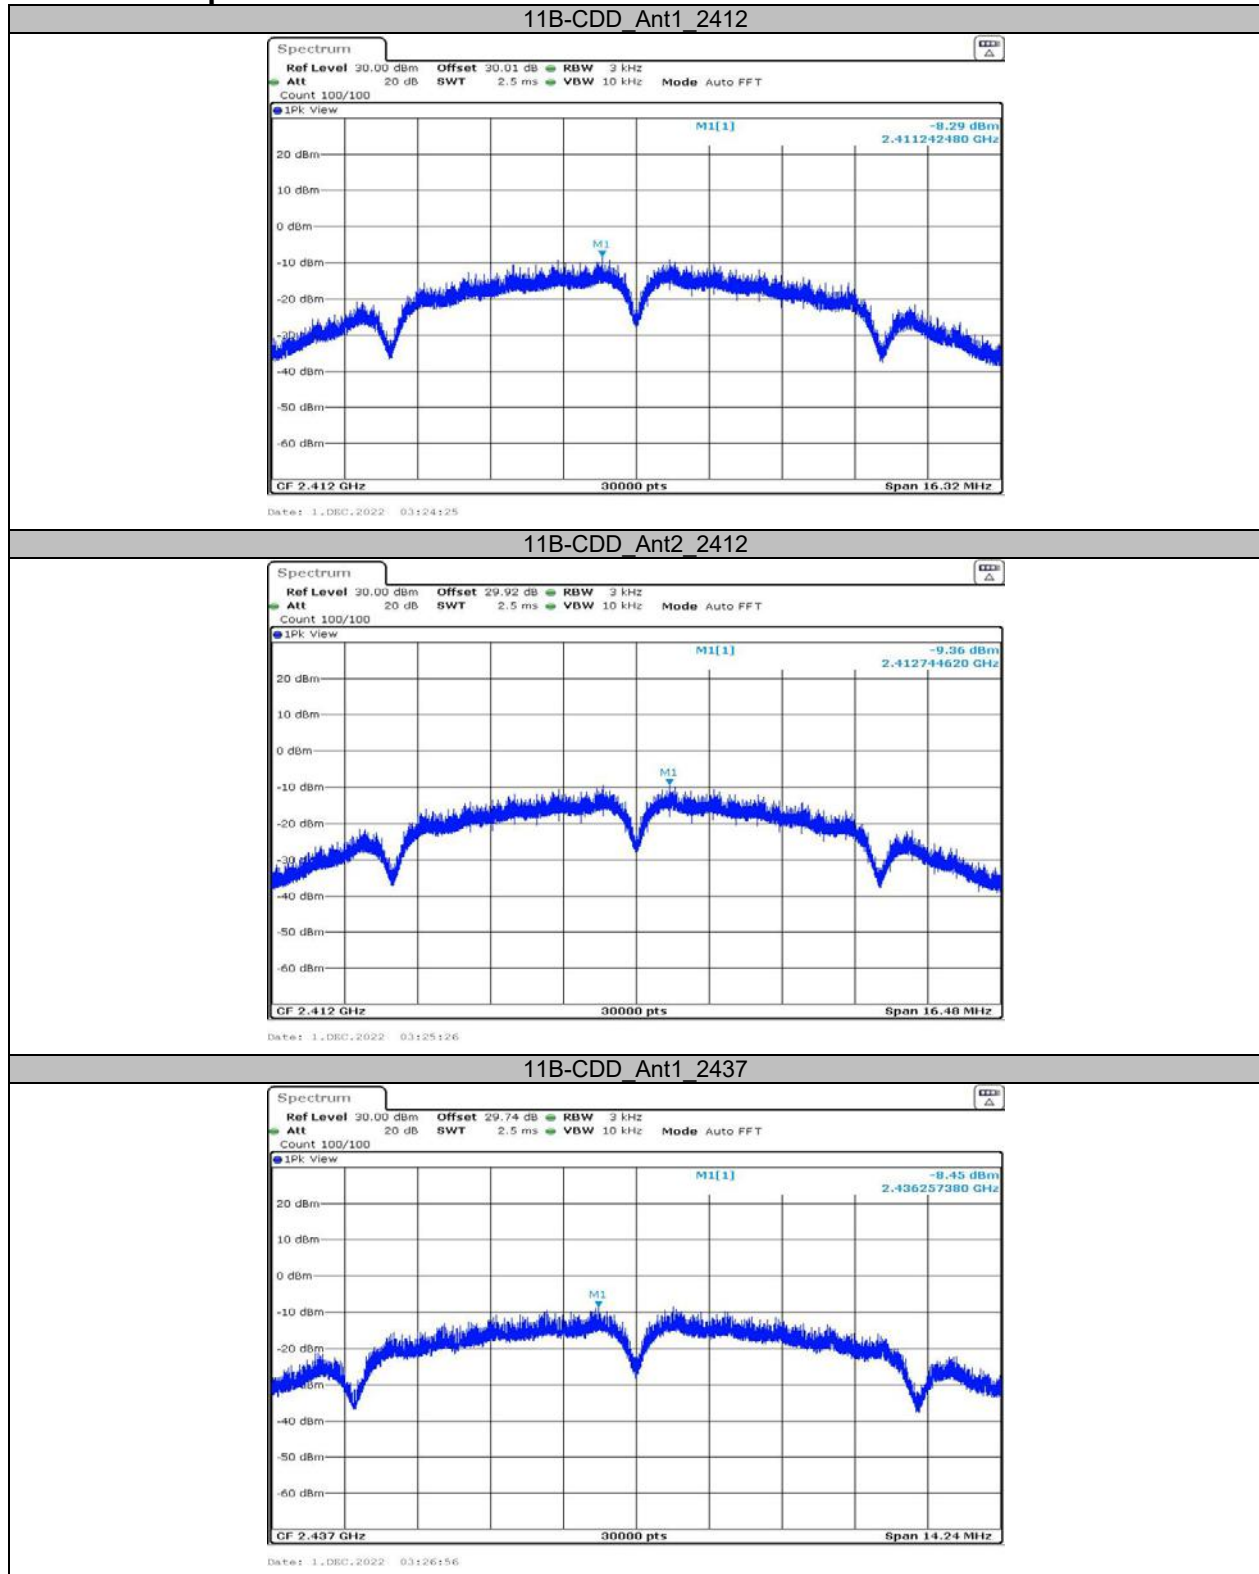


11B-CDD_Ant2_2437

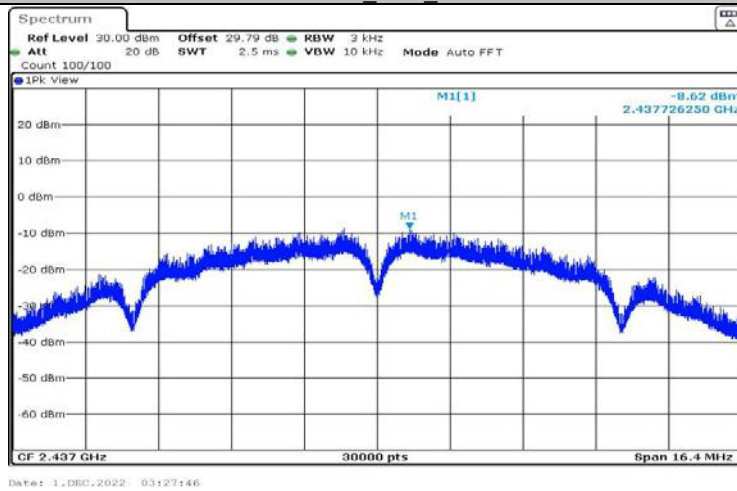


11B-CDD_Ant1_2462

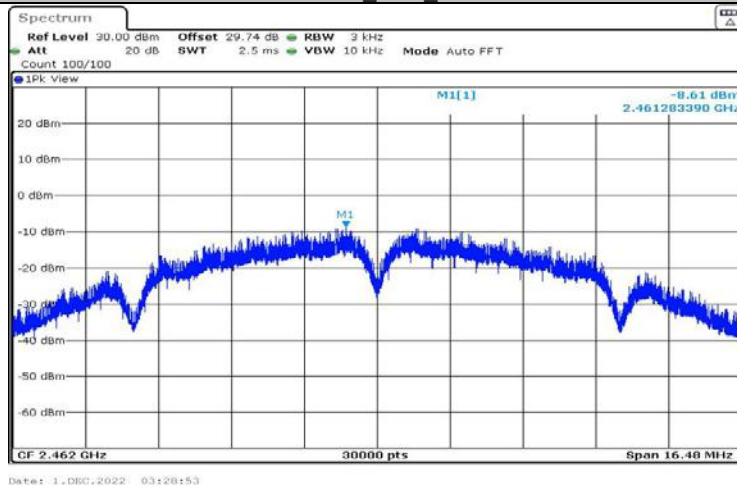


11B-CDD_Ant2_2462

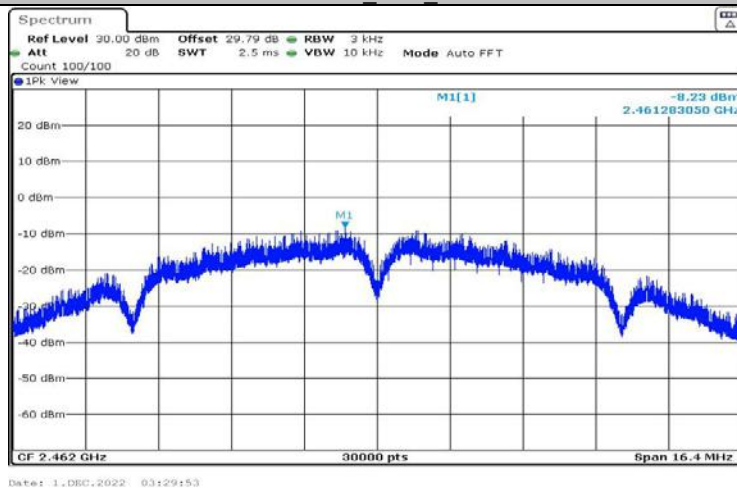


11G-CDD_Ant1_2412

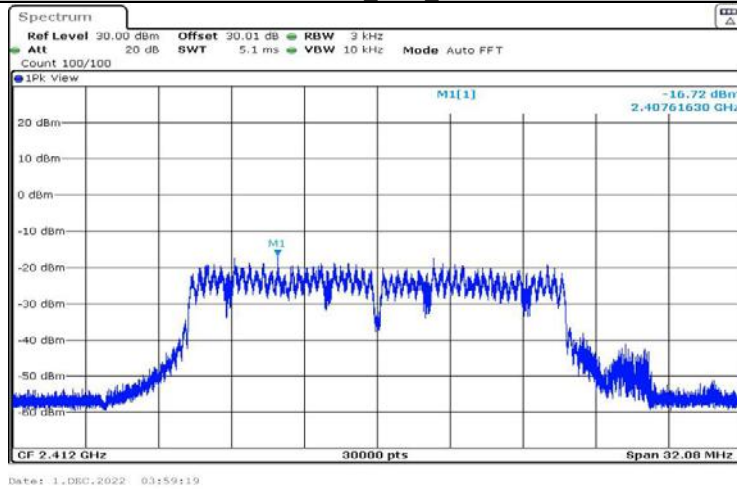


11G-CDD_Ant2_2412

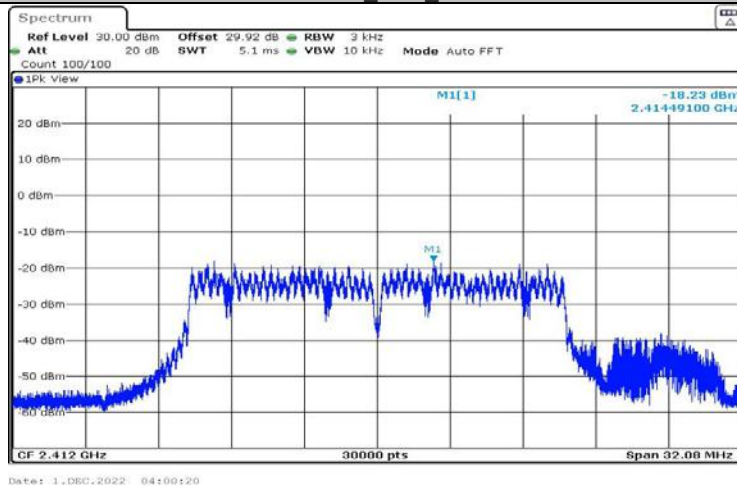


11G-CDD_Ant1_2437

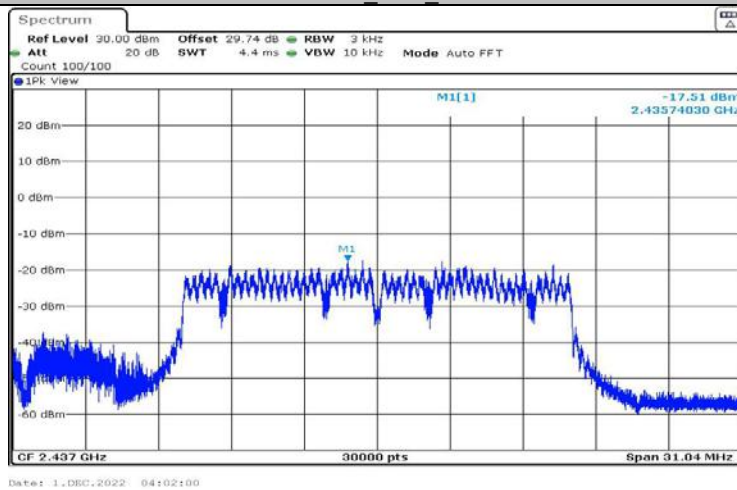


11G-CDD_Ant2_2437

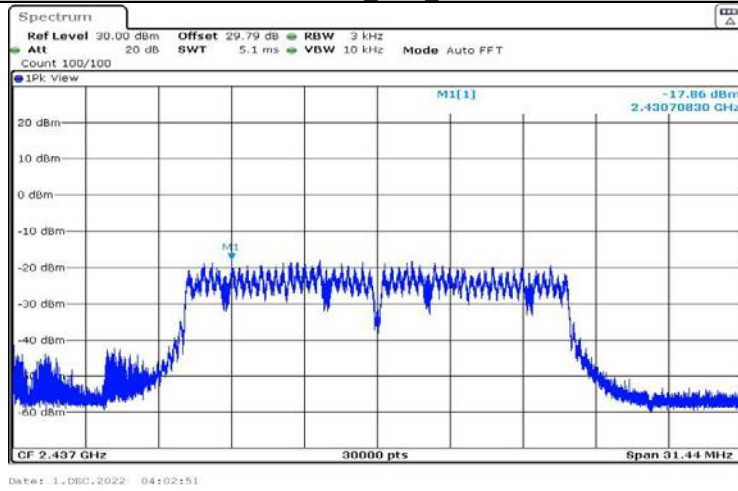


11G-CDD_Ant1_2462

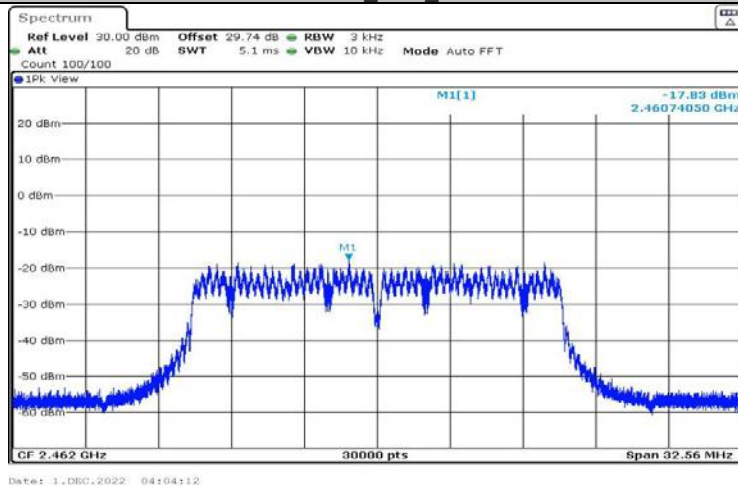


11G-CDD_Ant2_2462

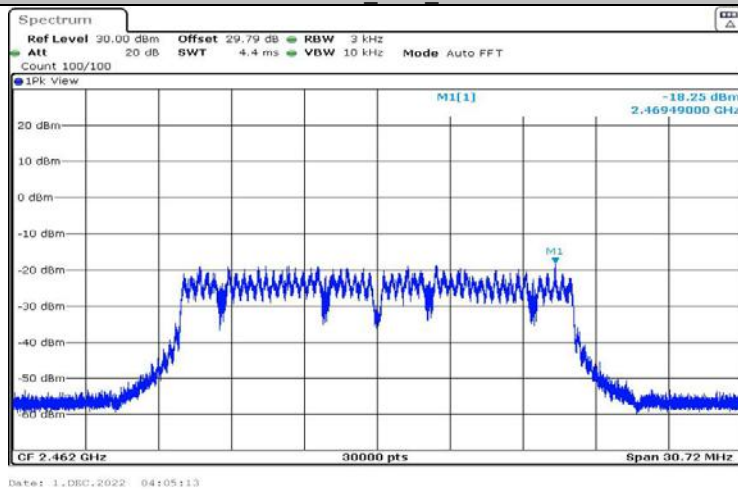


11N20MIMO_Ant1_2412

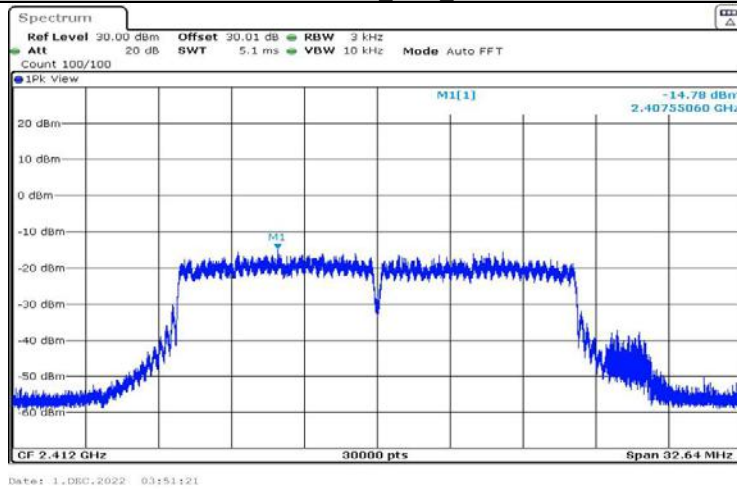


11N20MIMO_Ant2_2412

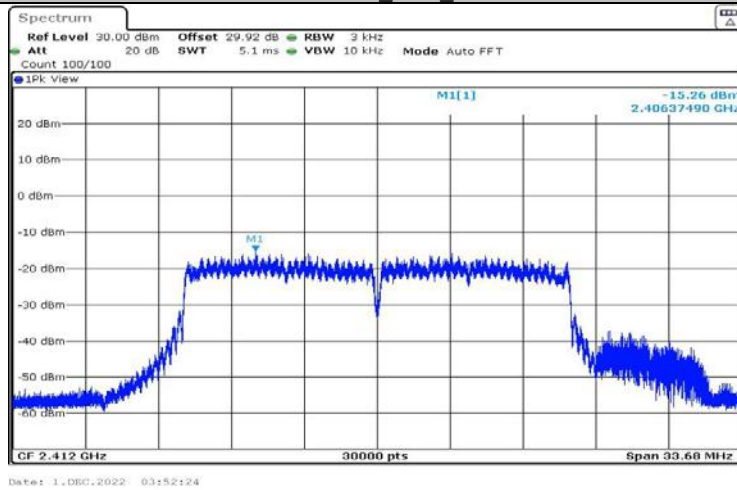


11N20MIMO_Ant1_2437

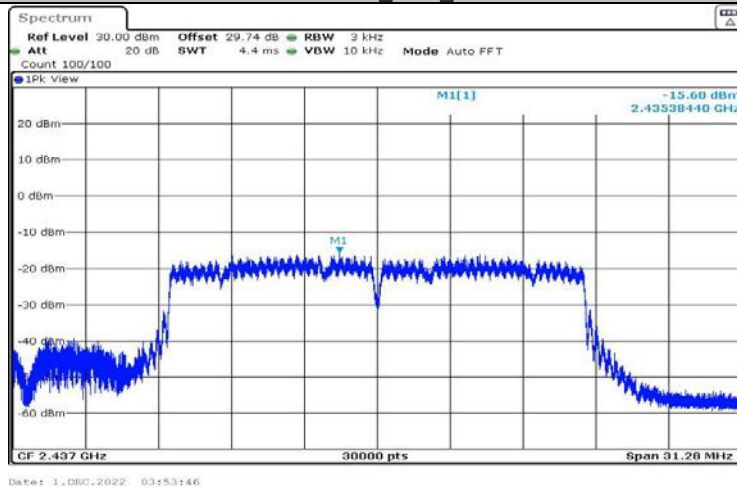


11N20MIMO_Ant2_2437

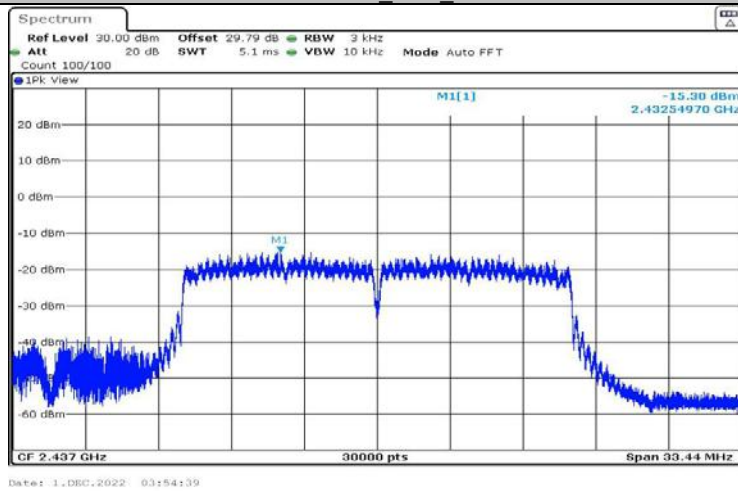


11N20MIMO_Ant1_2462

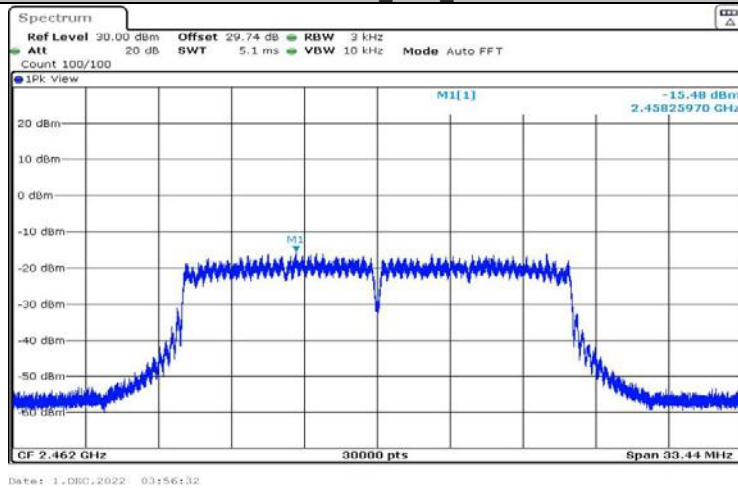


11N20MIMO_Ant2_2462

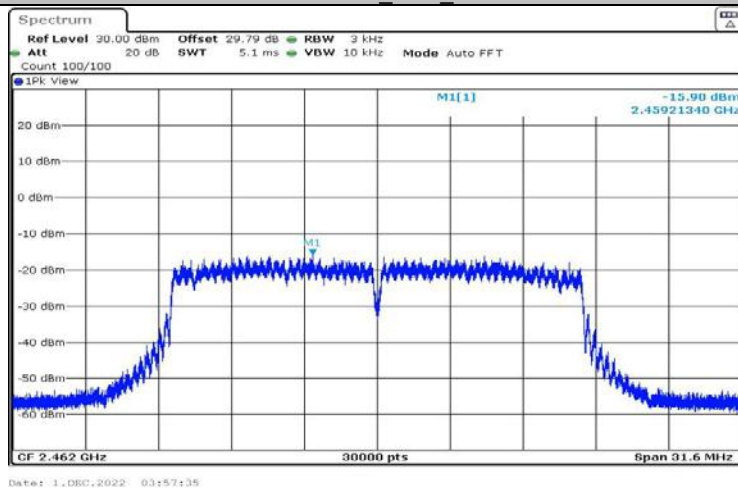


11AX20MIMO_Ant1_2412

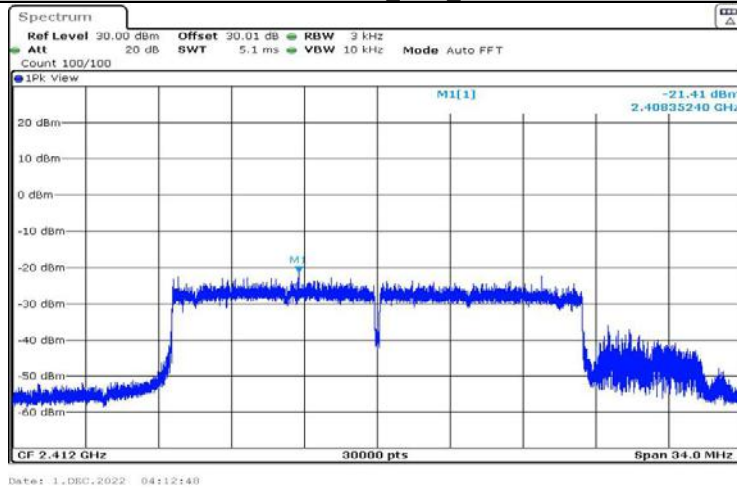


11AX20MIMO_Ant2_2412

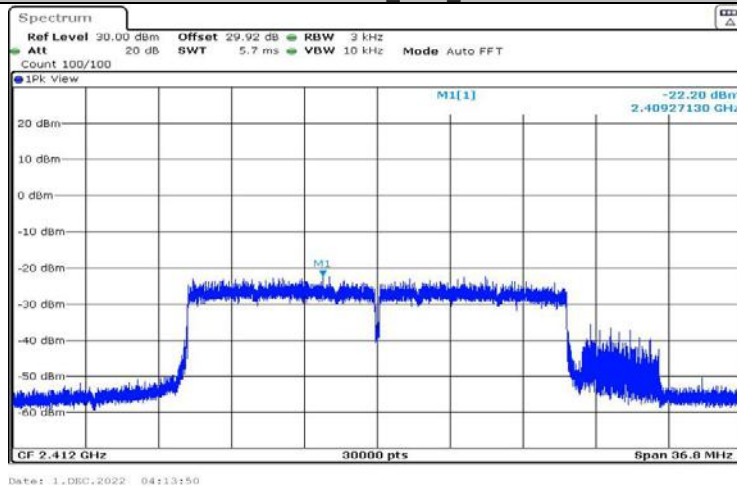


11AX20MIMO_Ant1_2437

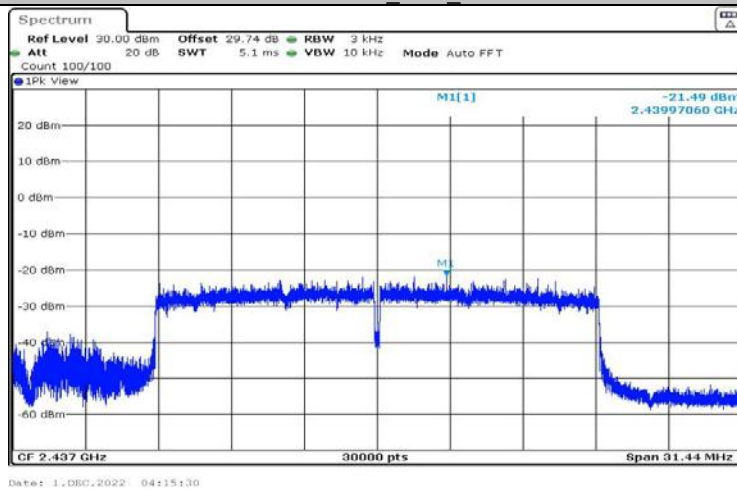


11AX20MIMO_Ant2_2437

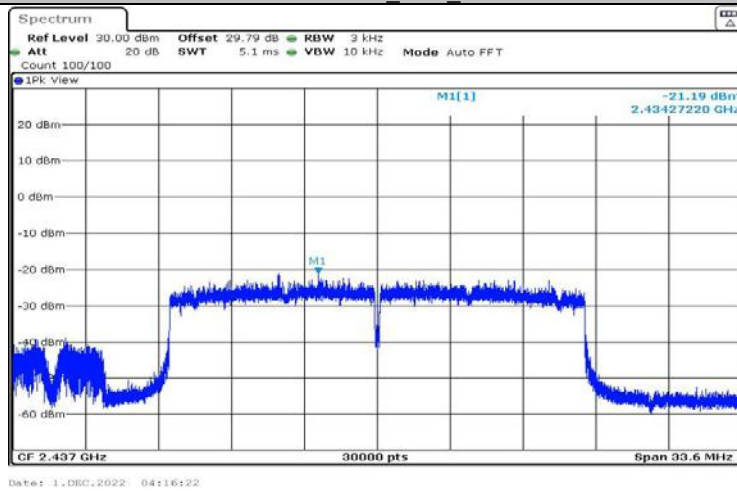

11AX20MIMO_Ant1_2462

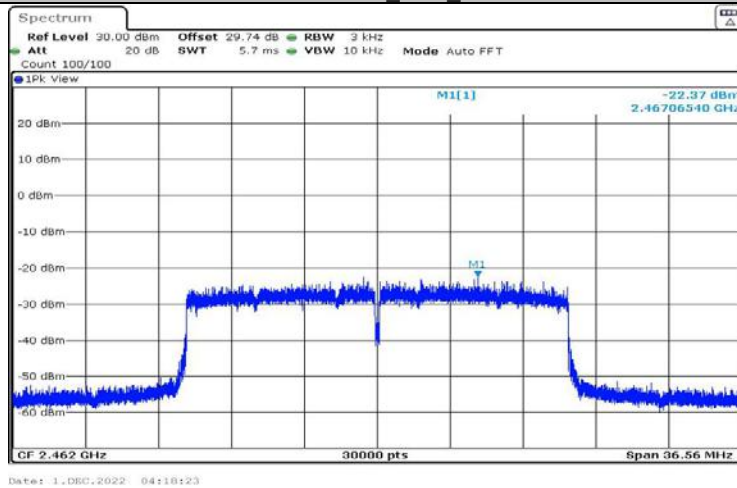


11AX20MIMO_Ant2_2462

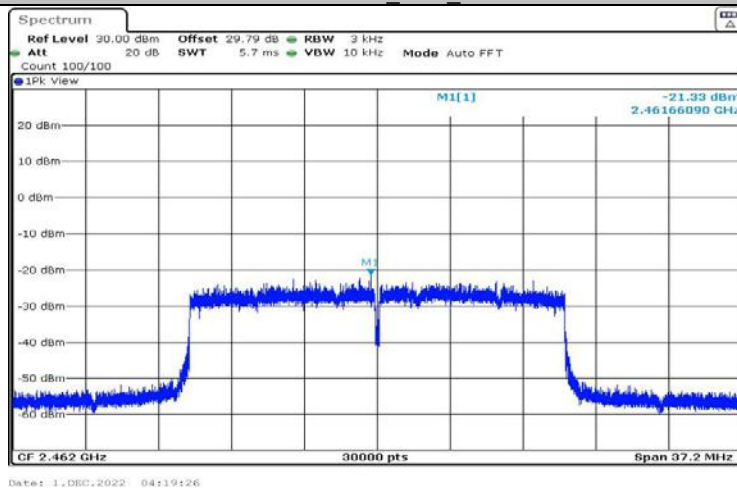


Appendix E: Band edge measurements Test Graphs


11B-CDD_Ant1_Low_2412

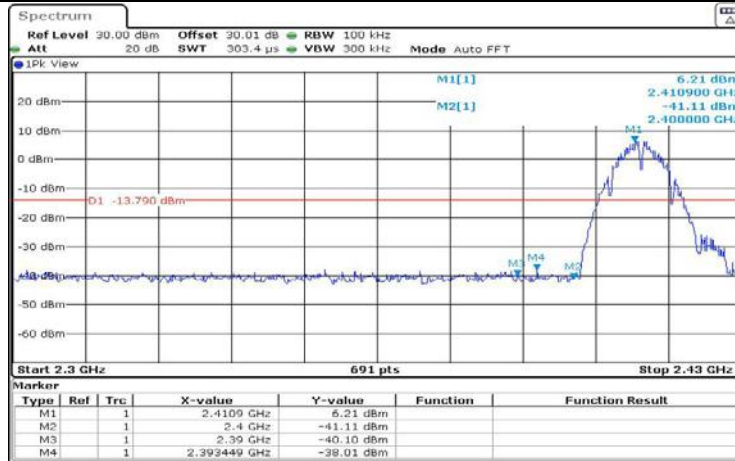


11B-CDD_Ant2_Low_2412

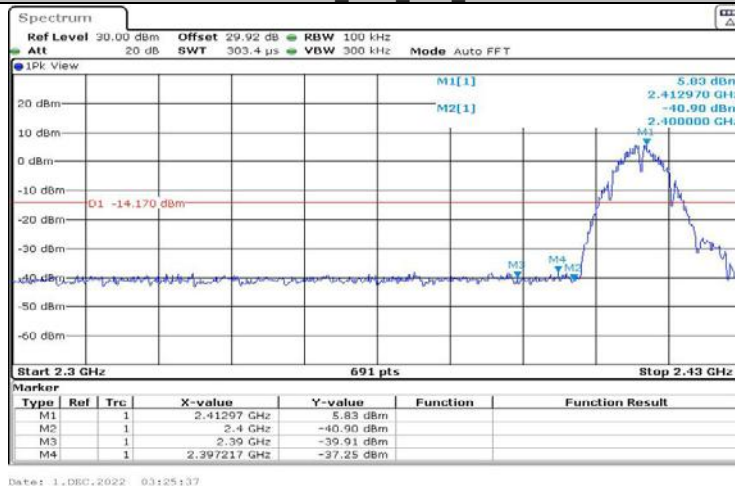

11B-CDD_Ant1_High_2462

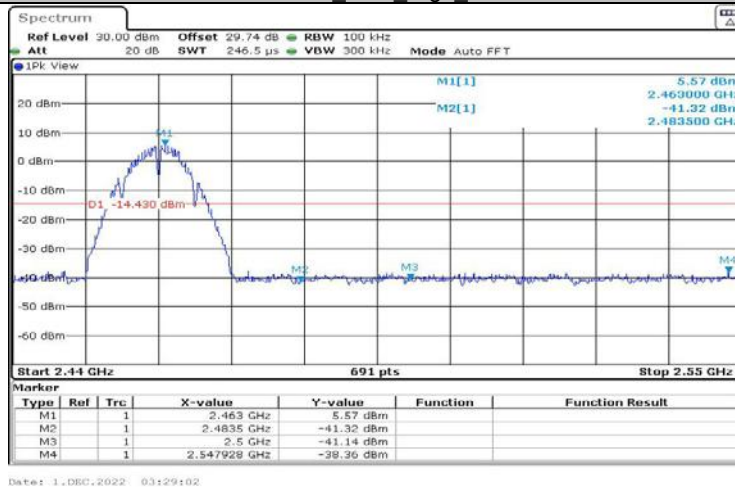


11B-CDD_Ant2_High_2462

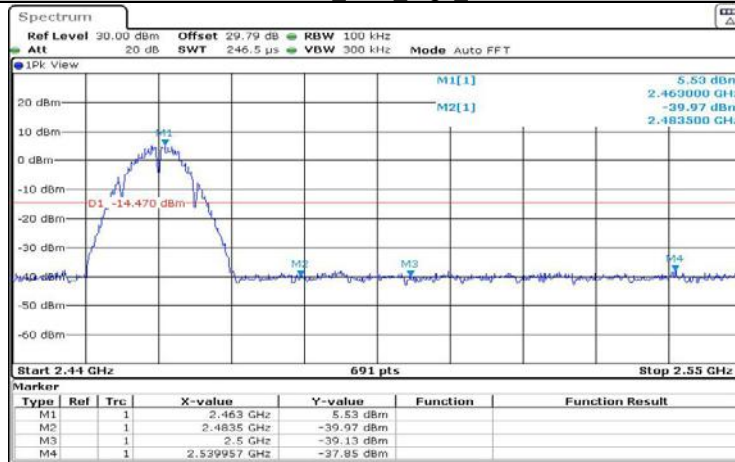


Date: 1, DEC, 2022 03:30:04

11G-CDD_Ant1_Low_2412

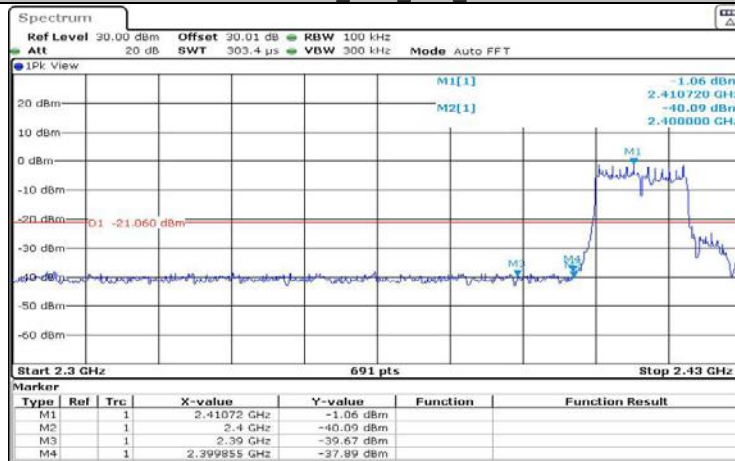


Date: 1, DEC, 2022 03:59:20

11G-CDD_Ant2_Low_2412

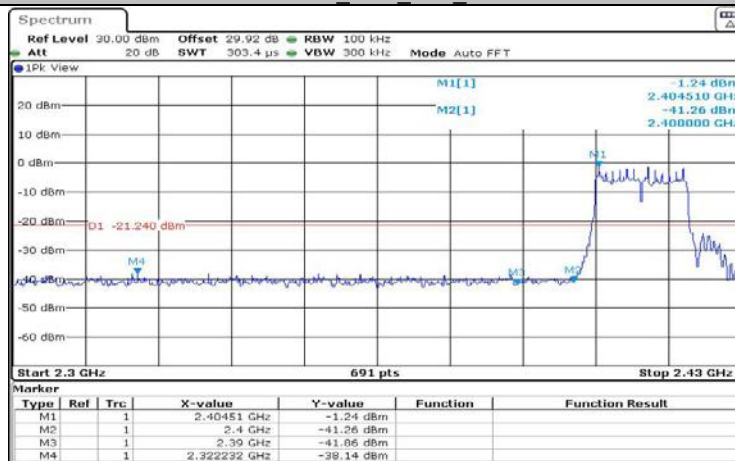


Date: 1, DEC, 2022 04:00:31

11G-CDD_Ant1_High_2462

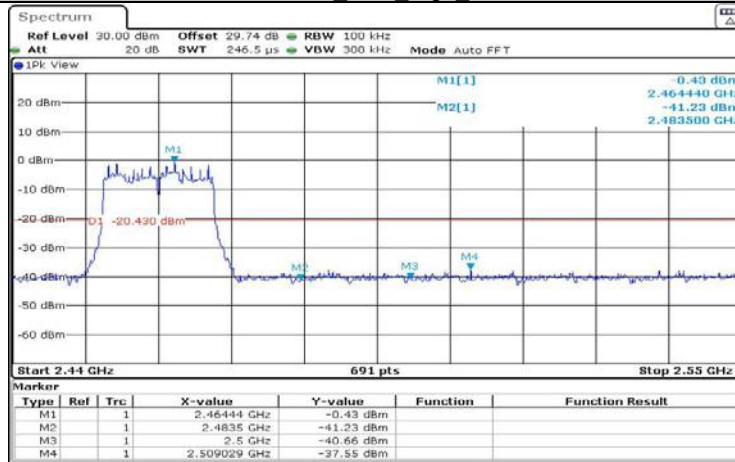


Date: 1, DEC, 2022 04:04:21

11G-CDD_Ant2_High_2462

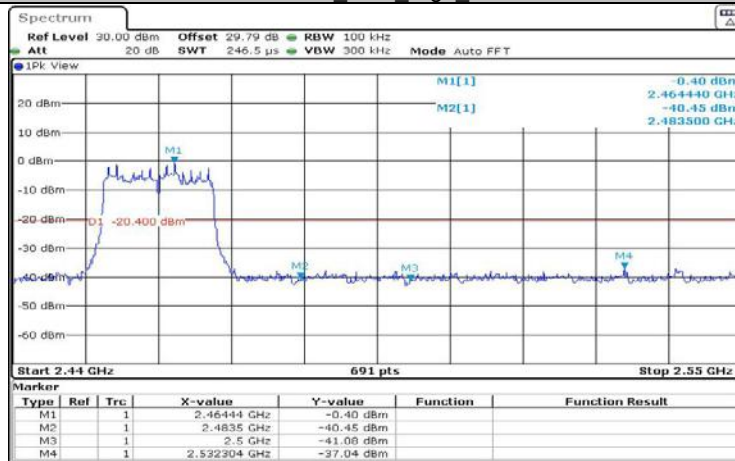


Date: 1, DEC, 2022 04:05:24

11N20MIMO_Ant1_Low_2412

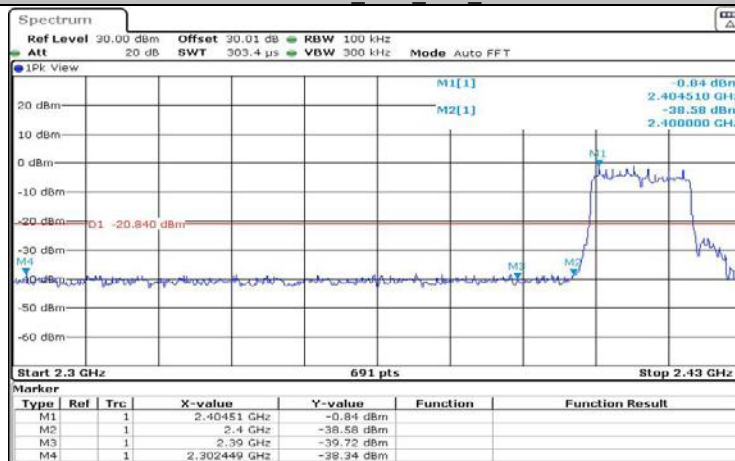


Date: 1, DEC, 2022 03:51:30

11N20MIMO_Ant2_Low_2412

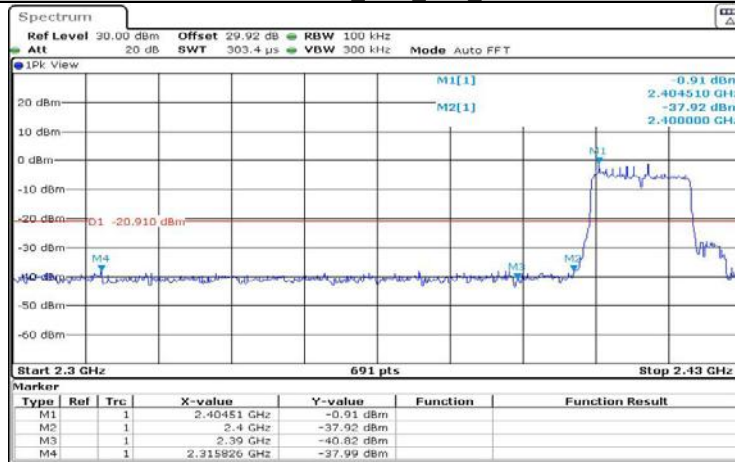


Date: 1, DEC, 2022 03:52:34

11N20MIMO_Ant1_High_2462

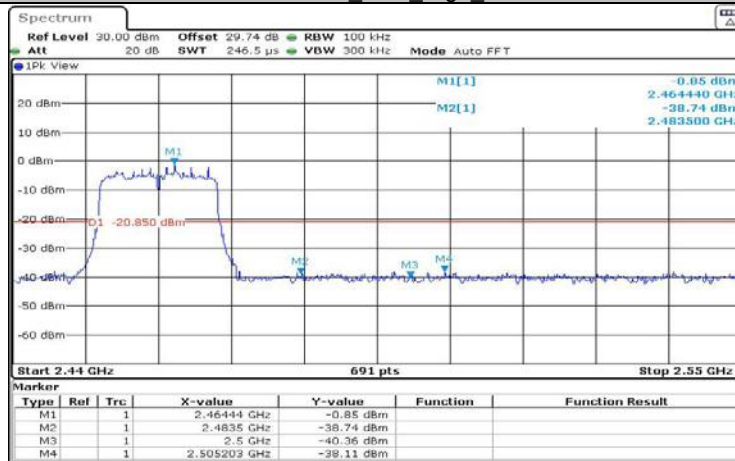


Date: 1, DEC, 2022 03:56:41

11N20MIMO_Ant2_High_2462

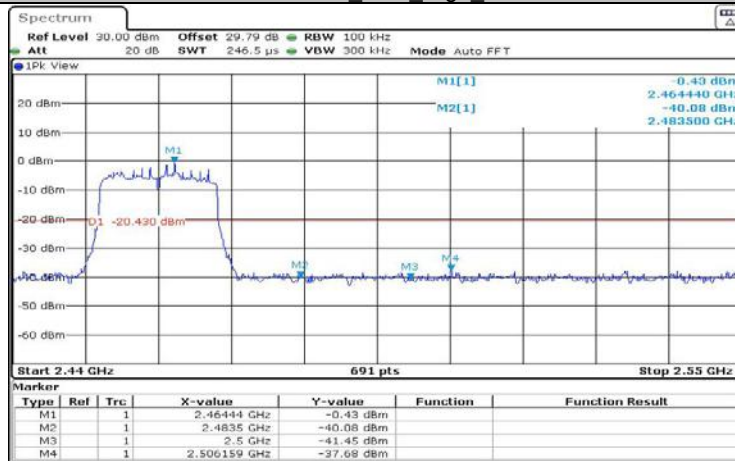


Date: 1, DEC, 2022 03:57:46

11AX20MIMO_Ant1_Low_2412

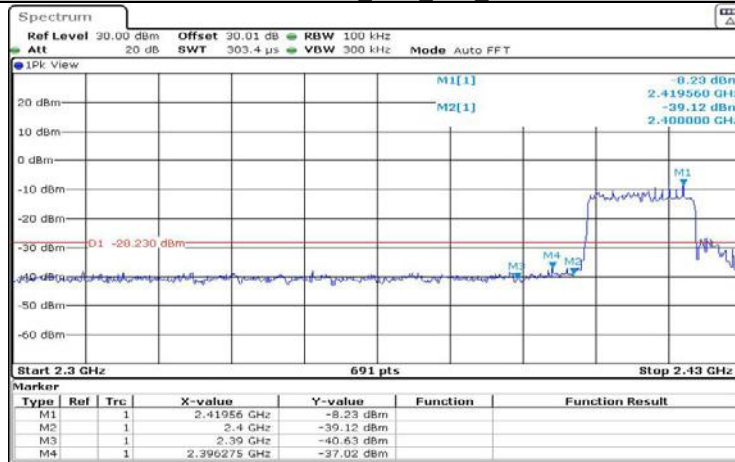


Date: 1, DEC, 2022 04:12:57

11AX20MIMO_Ant2_Low_2412

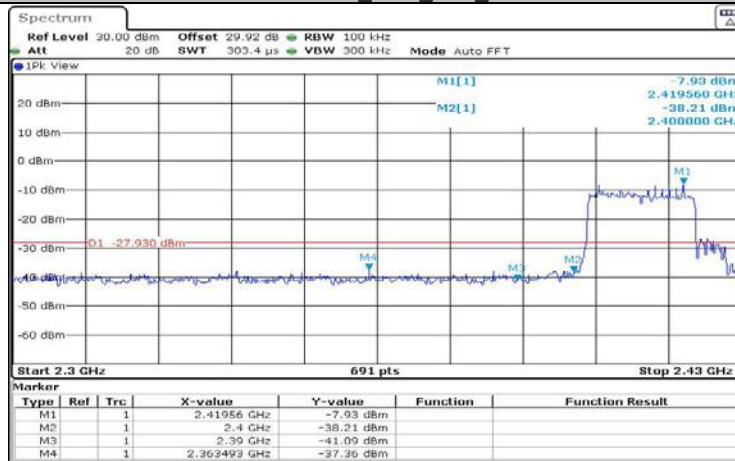


Date: 1, DEC, 2022 04:14:00

11AX20MIMO_Ant1_High_2462

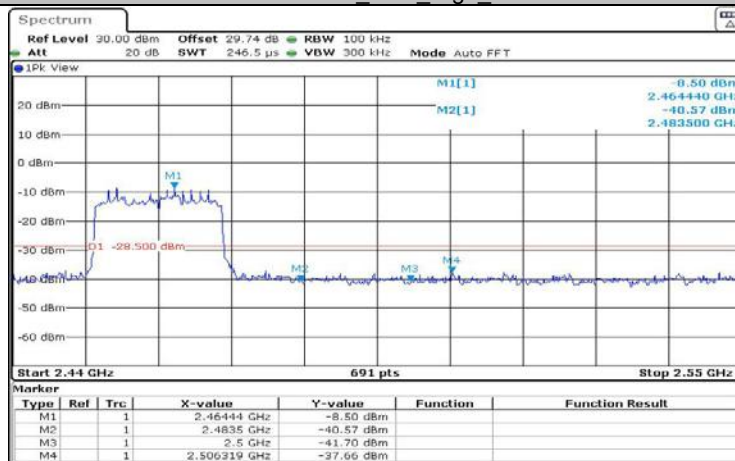

Date: 1, DEC, 2022 04:18:32

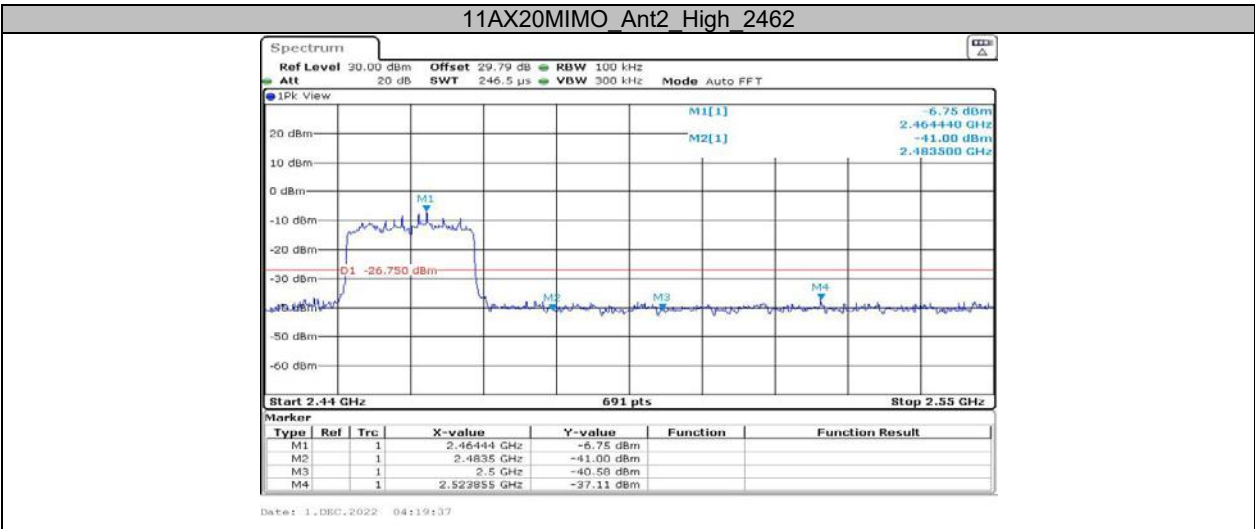


**Appendix F: Duty Cycle
Test Result**


Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B-CDD	Ant1	2437	0.66	0.76	86.84
11G-CDD	Ant1	2437	0.10	0.50	20.00
11N20MIMO	Ant1	2437	1.95	2.06	94.66
11AX20MIMO	Ant1	2437	1.96	2.07	94.69

Test Graphs


11B-CDD_Ant1_2437

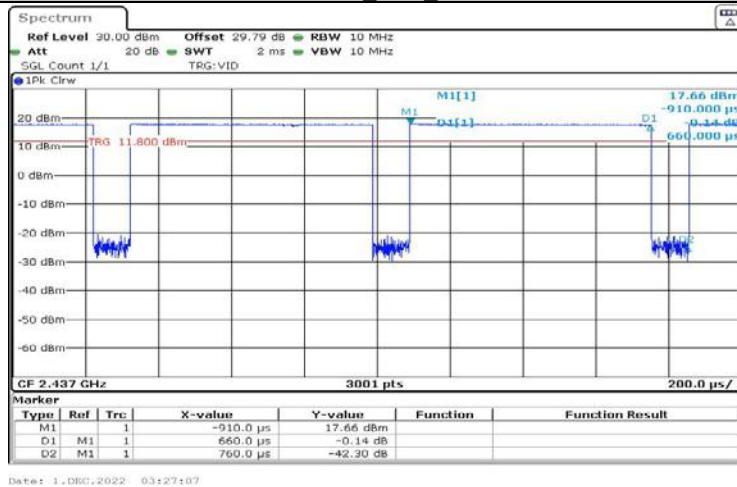


11G-CDD_Ant1_2437

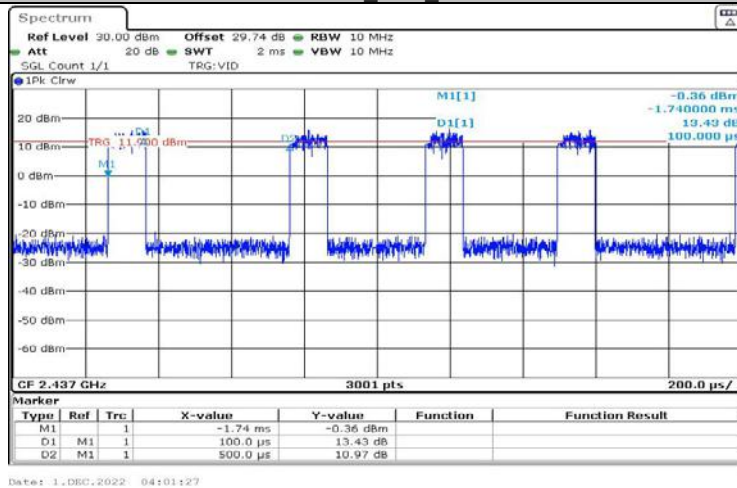

11N20MIMO_Ant1_2437

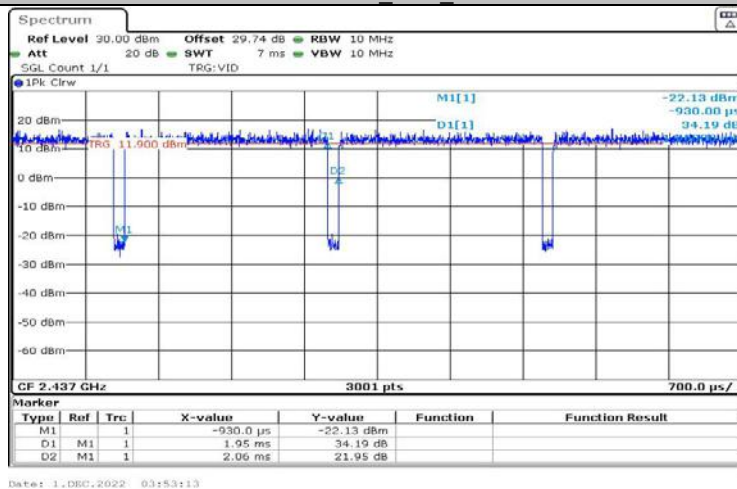

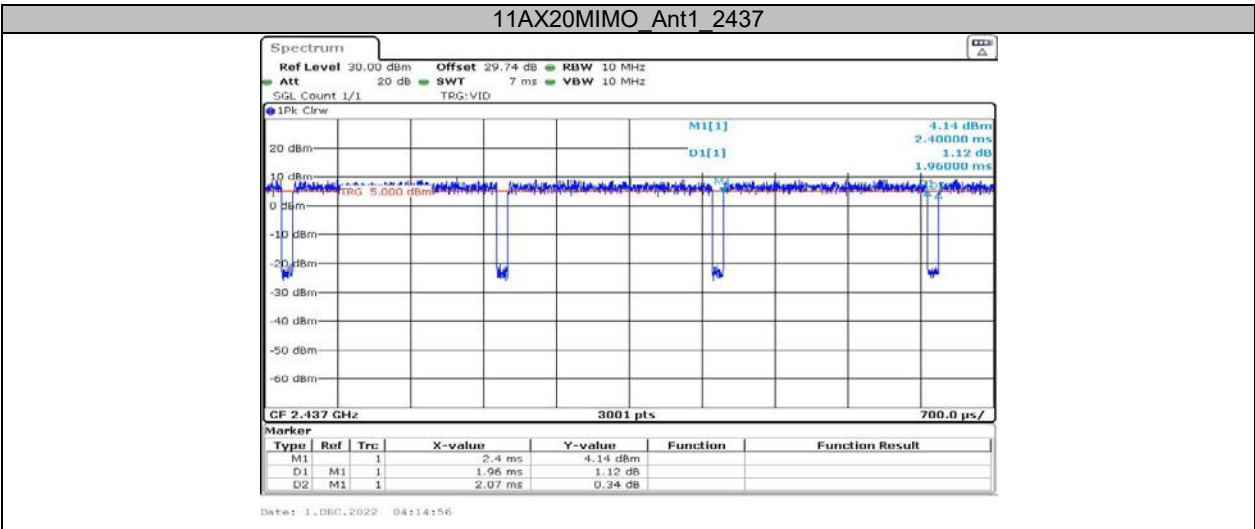

***** END OF REPORT *****