



**FCC OET BULLETIN 65 SUPPLEMENT C  
IC RSS-102 ISSUE 4**

**SAR EVALUATION REPORT**

*For*  
**EBOOK, WLAN, AND USB PORTS WITHOUT WWAN**

**MODEL: BNRV100**

**FCC ID: XHHBNRV100  
IC: 8961A-BNRV100**

**REPORT NUMBER: 10U13164-10A**

**ISSUE DATE: May 28, 2010**

*Prepared for*  
**BARNES AND NOBLE  
400 HAMILTON AVENUE  
PALO ALTO, CA 94301, U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**

**NVLAP<sup>®</sup>**  
NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	May 25, 2010	Initial Issue	--
A	May 28, 2010	Added Section 7 Composition of Ingredients for Tissue Simulating liquids.	Sunny Shih

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
<b>6. SYSTEM SPECIFICATIONS .....</b>	<b>8</b>
<b>7. COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS .....</b>	<b>9</b>
<b>8. TISSUE DIELECTRIC PARAMETERS CHECK .....</b>	<b>10</b>
8.1. <i>TISSUE PARAMETERS CHECK RESULTS FOR 2450 MHZ .....</i>	<i>11</i>
<b>9. SYSTEM VERIFICATION.....</b>	<b>12</b>
9.1. <i>SYSTEM CHECK RESULTS FOR D2450V2.....</i>	<i>12</i>
<b>10. OUTPUT POWER VERIFICATION.....</b>	<b>15</b>
<b>11. SUMMARY OF SAR TEST RESULTS .....</b>	<b>16</b>
<b>12. SAR TEST PLOTS.....</b>	<b>17</b>
<b>13. ATTACHMENTS.....</b>	<b>20</b>
<b>14. ATENNA TO USER SEPARATION DISTANCES .....</b>	<b>21</b>
<b>15. TEST SETUP PHOTOS .....</b>	<b>22</b>
<b>16. HOST DEVICE PHOTOS.....</b>	<b>25</b>

## 1. ATTESTATION OF TEST RESULTS

COMPANY NAME:	BARNES AND NOBLE 400 Hamilton Avenue. PALO ALTO, CA 94301, U.S.A.		
EUT DESCRIPTION:	EBOOK, WLAN, AND USB PORTS WITHOUT WWAN		
MODEL NUMBER:	BNRV100		
DEVICE CATEGORY:	Portable		
EXPOSURE CATEGORY:	General Population/Uncontrolled Exposure		
DATE TESTED:	May 14 , 2010		


FCC / IC Rule Parts	Freq. Range [MHz]	The Highest 1g SAR mW/g)	Limit (mW/g)
15.247 / RSS-102	2400 – 2483.5	0.567 (Tablet – Bottom face)	1.6

Applicable Standards	Test Results
FCC OET Bulletin 65 Supplement C 01-01 IC RSS 102 Issue 4	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released For CCS By:



SUNNY SHIH  
ENGINEERING SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



DEVIN CHANG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

FCC OET Bulletin 65 Supplement C 01-01 and the following specific FCC test procedures:

- KDB 248227 SAR measurement procedures for 802.11a/b/g transmitters
- KDB 447498 D01 Mobile Portable RF Exposure v04, suppl. to KDB 616217 D03

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
Robot - Six Axes	Staubli	RX90BL	N/A			N/A
Robot Remote Control	Staubli	CS7MB	3403-91535			N/A
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041			N/A
Probe Alignment Unit	SPEAG	LB (V2)	261			N/A
SAM Phantom (SAM1)	SPEAG	QD000P40CA	1185			N/A
SAM Phantom (SAM2)	SPEAG	QD000P40CA	1050			N/A
Oval Flat Phantom (ELI 4.0)	SPEAG	QD OVA001 B	1003			N/A
Electronic Probe kit	HP	85070C	N/A			N/A
S-Parameter Network Analyzer	Agilent	8753ES-6	MY40001647	11	22	2010
Signal Generator	Agilent	8753ES-6	MY40001647	11	22	2010
E-Field Probe	SPEAG	EX3DV3	3531	2	23	2011
Data Acquisition Electronics	SPEAG	DAE3 V1	500	9	15	2010
System Validation Dipole	SPEAG	D2450V2	706	4	18	2013
ESG Vector Signal Generator	Agilent	E4438C	US44271090	9	17	2010
Amplifier	Mini-Circuits	ZVE-8G	90606			N/A
Amplifier	Mini-Circuits	ZHL-42W	D072701-5			N/A
Simulating Liquid	SPAEG	M2450	N/A	Within 24 hrs of first test		

**Note:** Per KDB 450824 D02 requirements for dipole calibration, CCS has adopted three years calibration intervals. On annual basis, each measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value.
3. Return-loss is within 20% of calibrated measurement ( test data on file in CCS)
4. Impedance is within 5Ω of calibrated measurement (test data on file in CCS)

## 4.2. MEASUREMENT UNCERTAINTY

Measurement uncertainty for 300 MHz to 3 GHz averaged over 1 gram

Component	error, %	Probe Distribution	Divisor	Sensitivity	U (Xi), %
<b>Measurement System</b>					
Probe Calibration (k=1) @ Body 2450 MHz	5.50	Normal	1	1	5.50
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Conditions - Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Conditions - Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner Mechanical Tolerance	0.40	Rectangular	1.732	1	0.23
Probe Positioning with respect to Phantom	2.90	Rectangular	1.732	1	1.67
Extrapolation, Interpolation and Integration	1.00	Rectangular	1.732	1	0.58
<b>Test Sample Related</b>					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder Uncertainty	3.60	Normal	1	1	3.60
Output Power Variation - SAR Drift	5.00	Rectangular	1.732	1	2.89
<b>Phantom and Tissue Parameters</b>					
Phantom Uncertainty (shape and thickness)	4.00	Rectangular	1.732	1	2.31
Liquid Conductivity - deviation from target	5.00	Rectangular	1.732	0.64	1.85
Liquid Conductivity - measurement	-2.31	Normal	1	0.64	-1.48
Liquid Permittivity - deviation from target	5.00	Rectangular	1.732	0.6	1.73
Liquid Permittivity - measurement	-3.56	Normal	1	0.6	-2.14
Combined Standard Uncertainty Uc(y) =					
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence = 19.58 %					
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence = 1.55 dB					


Measurement uncertainty for 300 MHz to 3 GHz averaged over 10 gram

Component	error, %	Probe Distribution	Divisor	Sensitivity	U (Xi), %
<b>Measurement System</b>					
Probe Calibration (k=1) @ 2450 MHz	5.50	Normal	1	1	5.50
Axial Isotropy	1.15	Rectangular	1.732	0.7071	0.47
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7071	0.94
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Conditions - Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Conditions - Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner Mechanical Tolerance	0.40	Rectangular	1.732	1	0.23
Probe Positioning with respect to Phantom	2.90	Rectangular	1.732	1	1.67
Extrapolation, Interpolation and Integration	1.00	Rectangular	1.732	1	0.58
<b>Test Sample Related</b>					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder Uncertainty	3.60	Normal	1	1	3.60
Output Power Variation - SAR Drift	5.00	Rectangular	1.732	1	2.89
<b>Phantom and Tissue Parameters</b>					
Phantom Uncertainty (shape and thickness)	4.00	Rectangular	1.732	1	2.31
Liquid Conductivity - deviation from target	5.00	Rectangular	1.732	0.43	1.24
Liquid Conductivity - measurement	-2.31	Normal	1	0.43	-0.99
Liquid Permittivity - deviation from target	5.00	Rectangular	1.732	0.49	1.41
Liquid Permittivity - measurement uncertainty	-3.56	Normal	1	0.49	-1.74
Combined Standard Uncertainty Uc(y), % =					
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence = 19.00 %					
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence = 1.51 dB					

## 5. EQUIPMENT UNDER TEST

EBOOK, WLAN, AND USB PORTS WITHOUT WWAN		
Normal operation:	Tablet bottom face, and Tablet edges - Multiple display orientations supporting both portrait and landscape configurations	
Antenna tested:	<u>Manufactured</u> Walsin Technology Corporation	<u>Part number</u> RGFRA1903041A5T
Antenna-to-user separation distances:	See section 13 for details	

## 6. SYSTEM SPECIFICATIONS

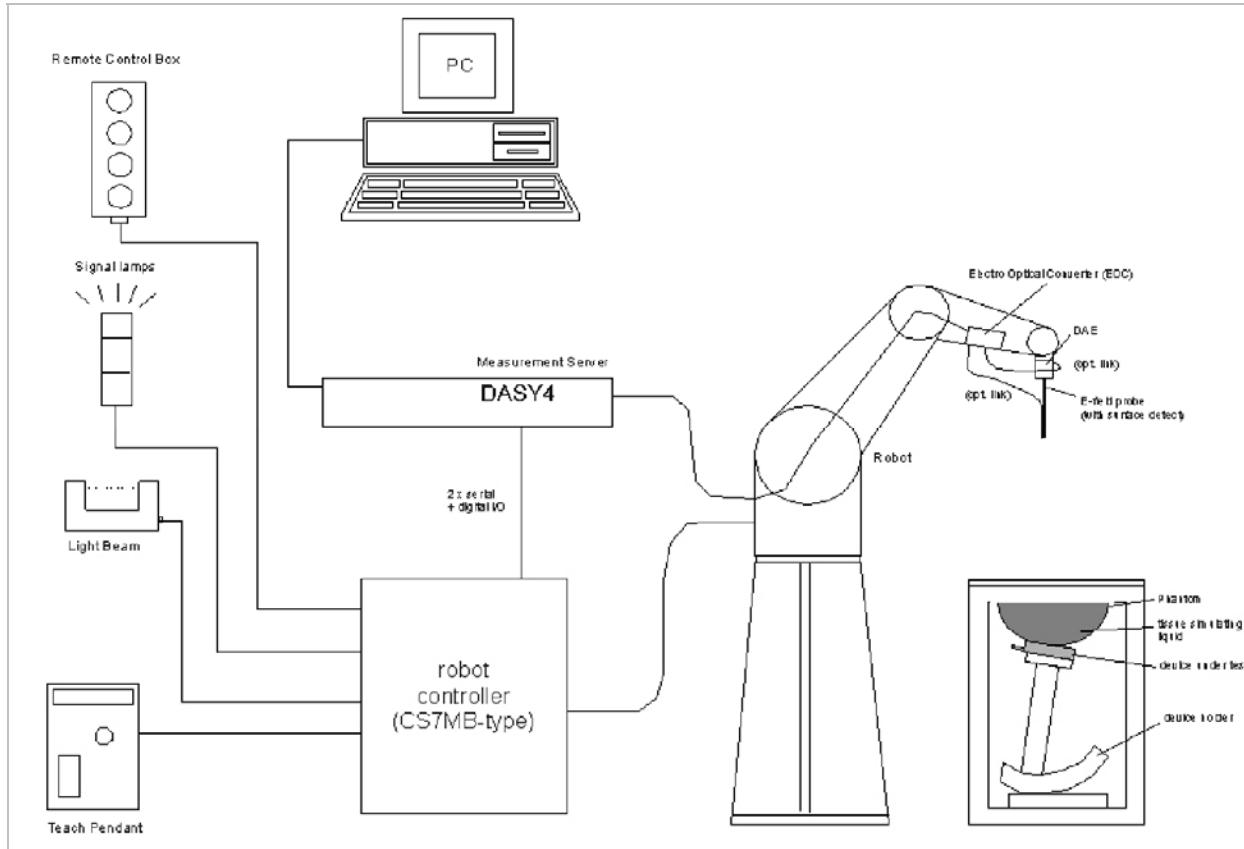

**The DASY4 system for performing compliance tests consists of the following items:**

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

## 7. COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

### Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

## 8. TISSUE DIELECTRIC PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. For frequencies in 300 MHz to 2 GHz, the measured conductivity and relative permittivity should be within  $\pm$  5% of the target values. For frequencies in the range of 2–3 GHz and above the measured conductivity should be within  $\pm$  5% of the target values. The measured relative permittivity tolerance can be relaxed to no more than  $\pm$  10%.

### Reference Values of Tissue Dielectric Parameters for Body (for 300 – 3000 MHz and 5800 MHz)

The body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Body (Supplement C 01-01)	
	$\epsilon_r$	$\sigma$ (S/m)
300	58.20	0.92
450	56.70	0.94
835	55.20	0.97
900	55.00	1.05
915	55.00	1.06
1450	54.00	1.30
1610	53.80	1.40
1800 – 2000	53.30	1.52
2450	52.70	1.95
3000	52.00	2.73
5800	48.20	6.00

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000$  kg/m<sup>3</sup>)

## 8.1. TISSUE PARAMETERS CHECK RESULTS FOR 2450 MHZ

Simulating Liquid Dielectric Parameters for Body 2450 MHz

Room Ambient Temperature = 24°C; Relative humidity = 40%

Measured by: Devin Chang

f (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit (%)
2450	e'	50.82	Relative Permittivity ( $\epsilon_r$ ):	50.823	52.7	-3.56	? 5
	e"	13.98	Conductivity ( $\sigma$ ):	1.905	1.95	-2.31	? 5

### Liquid Check

Ambient temperature: 24 deg. C; Liquid temperature: 23 deg. C

May 14, 2010 09:10 AM

Frequency	e'	e"
2400000000.	50.9574	13.7365
2405000000.	50.9399	13.7828
2410000000.	50.9242	13.8206
2415000000.	50.8970	13.8147
2420000000.	50.8782	13.8459
2425000000.	50.8580	13.8405
2430000000.	50.8462	13.8520
2435000000.	50.8525	13.8737
2440000000.	50.8543	13.8909
2445000000.	50.8340	13.9383
<b>2450000000.</b>	<b>50.8226</b>	<b>13.9760</b>
2455000000.	50.7903	13.9907
2460000000.	50.7825	14.0115
2465000000.	50.7304	14.0216
2470000000.	50.7147	14.0206
2475000000.	50.6781	14.0170
2480000000.	50.6787	14.0205
2485000000.	50.6809	14.0312
2490000000.	50.6870	14.0589
2495000000.	50.6743	14.0894
2500000000.	50.6722	14.1375

The conductivity ( $\sigma$ ) can be given as:

$$\sigma = \omega \epsilon_0 \epsilon'' = 2 \pi f \epsilon_0 \epsilon''$$

where  $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

## 9. SYSTEM VERIFICATION

The system performance check is performed prior to any usage of the system in order to verify SAR system accuracy. The system performance check verifies that the system operates within its specifications of  $\pm 10\%$ .

### System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (2.4 GHz) fine cube was chosen for cube integration and Special 8x8x10 (5 GHz) fine cube was chosen for cube integration
- Distance between probe sensors and phantom surface was set to 3 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input powers (forward power) were 100 mW.
- The results are normalized to 1 W input power.

Reference SAR Values for HEAD & BODY-tissue from calibration certificate of SPEAG.

System validation dipole	Cal. certificate #	Cal. due date	SAR Avg (mW/g)		
			Tissue:	Head	Body
D2450V2	D2450V2-706_Apr10	04/18/13	SAR <sub>1g</sub> :		52.8
			SAR <sub>10g</sub> :		24.5

### 9.1. SYSTEM CHECK RESULTS FOR D2450V2

Ambient Temperature = 24°C; Relative humidity = 38%

Measured by: Devin Chang

System validation dipole	Date Tested	Measured (Normalized to 1 W)		Target	Delta (%)	Tolerance (%)
		Tissue:	Body			
D2450V2	05/14/10	SAR <sub>1g</sub> :	51.2	52.8	-3.03	$\pm 10$
		SAR <sub>10g</sub> :	23.8	24.5	-2.86	

## SYSTEM CHECK PLOT

Date/Time: 5/14/2010 09:34:51 AM

Test Laboratory: Compliance Certification Services

### System Performance Check - D2450V2

DUT: Dipole ; Type: D2450V2; Serial: 706

Communication System: System Check Signal - CW, Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.9$  mho/m;  $\epsilon_r = 50.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(7.58, 7.58, 7.58); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**d=10mm, Pin=100mW/Area Scan (6x6x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.59 mW/g


**d=10mm, Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.5 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 10.5 W/kg

**SAR(1 g) = 5.12 mW/g; SAR(10 g) = 2.38 mW/g**

Maximum value of SAR (measured) = 6.73 mW/g

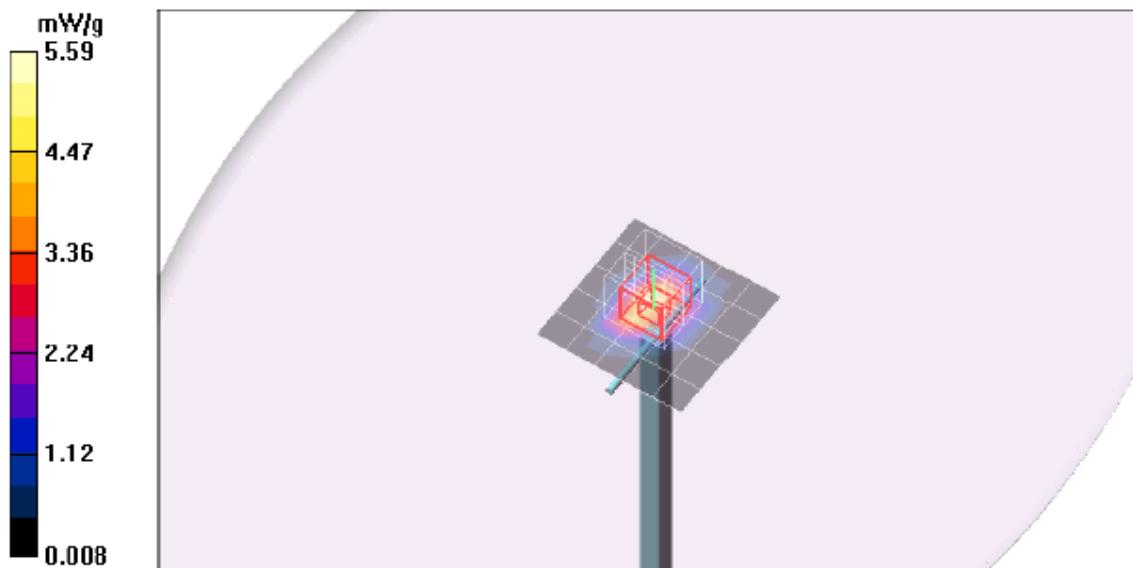

### SYSTEM CHECK – Z Plot

Date/Time: 5/14/2010 09:50:44 AM


Test Laboratory: Compliance Certification Services

### System Performance Check - D2450V2

DUT: Dipole ; Type: D2450V2, Serial: 748

Communication System: System Check Signal - CW; Frequency: 2450 MHz; Duty Cycle: 1:1

**d=10mm, Pin=100mW/Z Scan (1x1x34):** Measurement grid: dx=20mm, dy=20mm, dz=3mm  
Maximum value of SAR (measured) = 6.75 mW/g

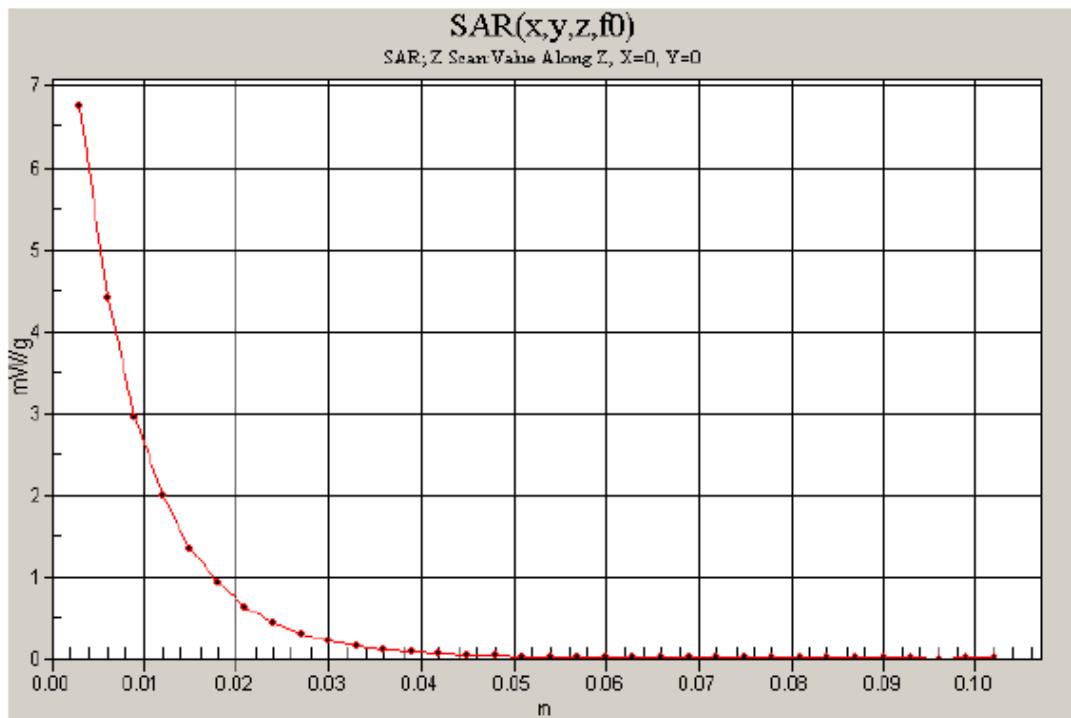

## 10. OUTPUT POWER VERIFICATION

### Results

Mode	Channel	Freq. (MHz)	Average Output Power (dBm)
802.11b	1	2412	15.20
	6	2437	15.30
	11	2462	15.00
802.11g	1	2412	13.10
	6	2437	12.82
	11	2462	12.70

**Note:** KDB 248227 - SAR is not required for 802.11g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

## 11. SUMMARY OF SAR TEST RESULTS

KDB 248227 - SAR is not required for 802.11g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

### 1. Tablet – Bottom face (3.59 mm from Tx antenna-to-user)

Mode	Channel	f (MHz)	Results (mW/g)	
			1g-SAR	10g-SAR
802.11b	1	2412		
	6	2437	0.567	0.199
	11	2462		

### 2. Tablet – Edges with the following configurations

#### 2.1 Edge - Primary Landscape (112.46 mm from Tx antenna-to-user)

This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4)  
b) ii) (2) - SAR is required only for the edge with the most conservative exposure conditions.

#### 2.2 Edge - Secondary Landscape (10.5 mm from Tx antenna-to-user)

Mode	Channel	f (MHz)	Results (mW/g)	
			1g-SAR	10g-SAR
802.11b	1	2412		
	6	2437	0.099	0.044
	11	2462		

#### 2.3 Edge - Primary Portrait (168.6 mm from Tx antenna-to-user)

This is not the most conservative antenna-to-user distance at edge mode. According to KDB 447498 4)  
b) ii) (2) - SAR is required only for the edge with the most conservative exposure conditions.

#### 2.4 Edge - Secondary Portrait (8.59 mm from Tx antenna-to-user)

Mode	Channel	f (MHz)	Results (mW/g)	
			1g-SAR	10g-SAR
802.11b	1	2412		
	6	2437	0.169	0.075
	11	2462		

## 12. SAR TEST PLOTS

### SAR Plot for Tablet – Bottom face (3.59 mm from Tx antenna-to-user)

Date/Time: 5/14/2010 10:22:01 AM

Test Laboratory: Compliance Certification Services

#### Tablet - Bottom face

DUT: Barnes & Noble; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(7.58, 7.58, 7.58); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom EL14.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

#### 802.11b M-ch Mian Ant/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.672 mW/g

#### 802.11b M-ch Mian Ant/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 4.21 V/m; Power Drift = -0.223 dB

Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.199 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.891 mW/g

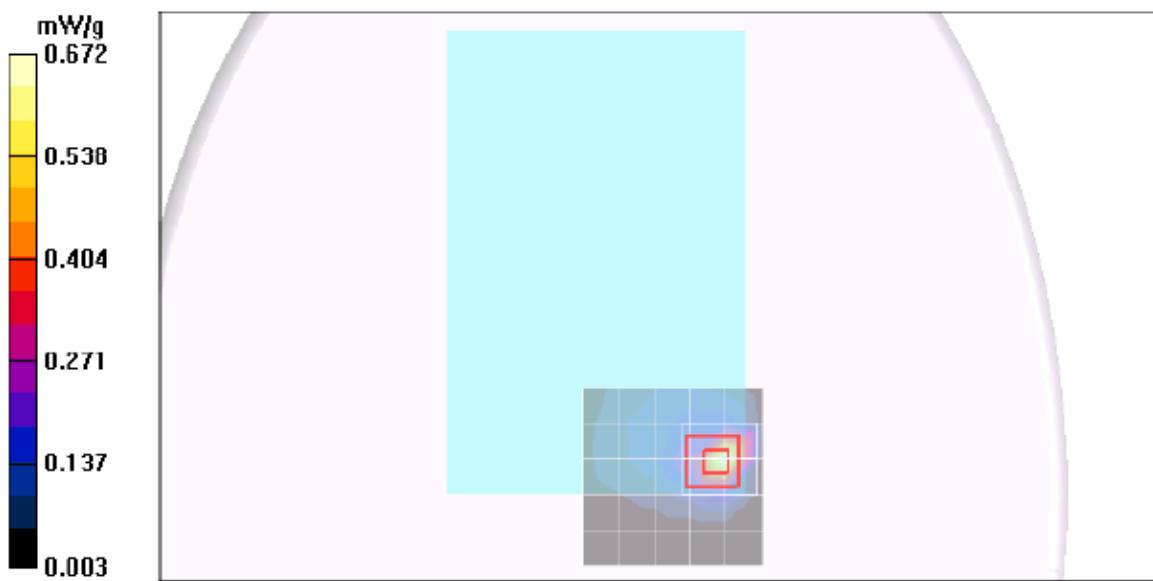

SAR Plot for Edge - Secondary Landscape (10.5 mm from Tx antenna-to-user)

Date/Time: 5/14/2010 10:48:15 AM

Test Laboratory: Compliance Certification Services

## Secondary Landscape

DUT: Barnes & Noble; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(7.58, 7.58, 7.58); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### 802.11b M-ch Mian Ant/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.131 mW/g

### 802.11b M-ch Mian Ant/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 2.67 V/m; Power Drift = 0.189 dB

Peak SAR (extrapolated) = 0.226 W/kg

**SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.044 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.134 mW/g

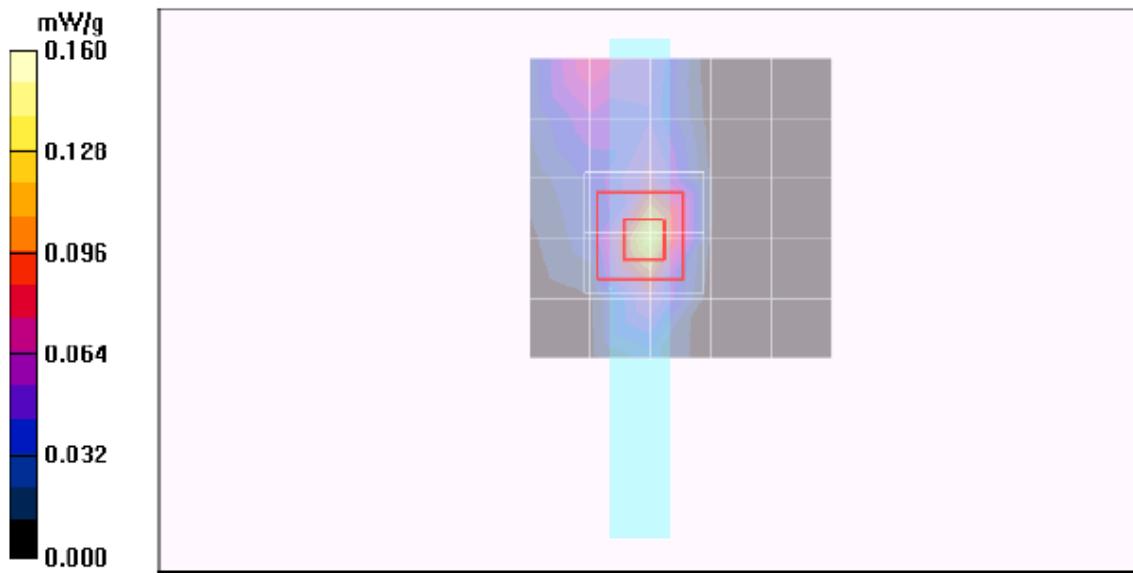

### SAR Plot for Edge - Secondary Portrait (8.59 mm from Tx antenna-to-user)

Date/Time: 5/14/2010 11:12:59 AM

Test Laboratory: Compliance Certification Services

## Secondary Portrait

DUT: Barnes & Noble; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(7.58, 7.58, 7.58); Calibrated: 2/23/2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### **802.11b M-ch Mian Ant/Area Scan (6x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.204 mW/g

### **802.11b M-ch Mian Ant/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 6.14 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 0.368 W/kg

**SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.075 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.228 mW/g

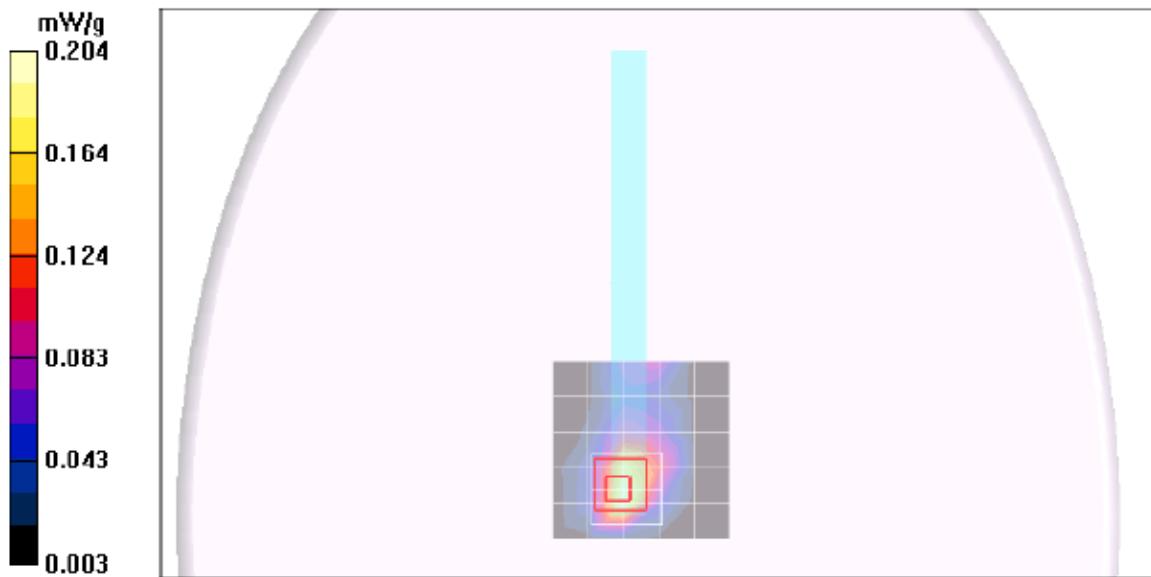

## 13. ATTACHMENTS

<u>No.</u>	<u>Contents</u>	<u>No. of page (s)</u>
1	Certificate of E-Field Probe - EX3DV3 SN 3531	11
2	Certificate of System Validation Dipole - D2450 SN:706	9