

Page: 1 of 240

SAR TEST REPORT





The following samples were submitted and identified on behalf of the client as:

Mobile POS **Equipment Under Test**

G10 **Marketing Name**

iRUGGY Brand Name

G10 Model No.

iRUGGY Systems Co., Ltd. **Company Name**

6F., No. 30, Xingzhong Rd., Neihu Dist., Taipei City **Company Address**

IEEE/ANSI C95.1-1992, IEEE 1528-2013, **Standards**

> KDB616217D04v01r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB941225D05v02r05.

KDB447498D01v06,KDB248227D01v02r02

XHM-PBG10D41 FCC ID

Date of Receipt Jun. 02, 2017

Date of Test(s) Jun. 16, 2017 ~ Jun. 26, 2017

Aug. 09, 2017 **Date of Issue**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS	
Engineer	Supervisor
Bond Tsai Date: Aug. 09, 2017	John Yeh
Date: Aug. 09, 2017	Date: Aug. 09, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 2 of 240

Revision History

Report Number	Revision	Description	Issue Date
E5/2017/60002	Rev.00	Initial creation of document	Jun. 28, 2017
E5/2017/60002	Rev.01	1 st modification	Aug. 09, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 3 of 240

Contents

1.General Information	4
1.1 Testing Laboratory	4
1.2 Details of Applicant	4
1.3 Description of EUT	5
1.4 Test Environment	74
1.5 Operation Description	74
1.6 Proximity sensor operation description	75
1.7 The SAR Measurement System	90
1.8 System Components	92
1.9 SAR System Verification	94
1.10 Tissue Simulant Fluid for the Frequency Band	96
1.11 Evaluation Procedures	98
1.12 Probe Calibration Procedures	99
1.13 Test Standards and Limits	102
2.Summary of Results	104
3.Simultaneous Transmission Analysis	
3.1 Estimated SAR calculation	
3.2 SPLSR evaluation and analysis	113
4.Instruments List	128
5.Measurements	130
6.SAR System Performance Verification	149
7. DAE & Probe Calibration Certificate	159
8.Uncertainty Budget	
9.Phantom Description	
10.System Validation from Original Equipment Supplier	178

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 4 of 240

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Electronics & Communication Laboratory				
No. 2, Keji 1 st Rd., Guishan Township, Taoyuan County, 33383, Taiwan				
Tel	+886-2-2299-3279			
Fax +886-2-2298-0488				
Internet	http://www.tw.sgs.com/			

1.2 Details of Applicant

Company Name	iRUGGY Systems Co., Ltd.
IL Amnany Address	6F.,No.30,Xingzhong Rd.,Neihu Dist.,Taipei City 114,Taiwan.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 5 of 240

1.3 Description of EUT

•										
Equipment Under Test	lobile POS									
Marketing Name	310									
Brand Name	iRUGGY	UGGY								
Model No.	10									
WWAN FCC ID	XHM-L83FL41	HM-L83FL41								
WLAN FCC ID	XHM-PB63D31									
Host FCC ID	XHM-PBG10D41									
	⊠LTE									
Mode of Operation	⊠WLAN802.11 a/b/g/n/ac(20M/40M/80M)									
	⊠Bluetooth									
	LTE	1								
Duty Cycle	WLAN802.11 a/b/g/n/ac(20M/40M/80M)	1								
	Bluetooth		1							
	LTE FDD Band 2	1850	_	1910						
	LTE FDD Band 4	1710	_	1755						
	LTE FDD Band 5	824	_	849						
	LTE FDD Band 7	2500	_	2570						
	LTE FDD Band 13	777	_	787						
TV = 5	LTE FDD Band 17	704	_	716						
TX Frequency Range (MHz)	LTE FDD Band 26	815	_	849						
((VII 12)	WLAN802.11 b/g/n(20M)	2412	_	2462						
	WLAN802.11 n(40M)	2422	_	2452						
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	5180	_	5240						
	WLAN802.11 n(40M)/ac(40M) 5.2G	5190	_	5230						
	WLAN802.11 ac(80M) 5.2G	5210								
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	5260	_	5320						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 6 of 240

	WLAN802.11 n(40M)/ac(40M) 5.3G	5270	_	5310	
	WLAN802.11 ac(80M) 5.3G		5290)	
	WLAN802.11 a/n/ac(20M) 5.6G	5500	_	5720	
TY Fraguency Range	WLAN802.11 n/ac(40M) 5.6G	5510	_	5710	
TX Frequency Range (MHz)	WLAN802.11 ac(80M) 5.6G	5530	_	5690	
(IVII 12)	WLAN802.11 a/n(20M)/ac(20M) 5.8G	5745	_	5825	
	WLAN802.11 n(40M)/ac(40M) 5.8G	5755	_	5795	
	WLAN802.11 ac(80M) 5.8G		5775	5	
	Bluetooth	2402	_	2480	
	LTE FDD Band 2	18607	_	19193	
	LTE FDD Band 4	19957	_	20393	
	LTE FDD Band 5	20407	_	20643	
	LTE FDD Band 7	20775	_	21425	
	LTE FDD Band 13	23205	_	23255	
	LTE FDD Band 17	23755	_	23825	
	LTE FDD Band 26	26697	_	27033	
	WLAN802.11 b/g/n(20M)	1	_	11	
	WLAN802.11 n(40M)	3	_	9	
	WLAN802.11 a/n(20M)/ac(20M) 5.2G	36	_	48	
Channel Number	WLAN802.11 n(40M)/ac(40M) 5.2G	38	_	46	
(ARFCN)	WLAN802.11 ac(80M) 5.2G		42		
	WLAN802.11 a/n(20M)/ac(20M) 5.3G	52	_	64	
	WLAN802.11 n(40M)/ac(40M) 5.3G	54	_	62	
	WLAN802.11 ac(80M) 5.3G		58		
	WLAN802.11 a/n/ac(20M) 5.6G	100	_	144	
	WLAN802.11 n/ac(40M) 5.6G	102	_	142	
	WLAN802.11 ac(80M) 5.6G	106	_	138	
	WLAN802.11 a/n(20M)/ac(20M) 5.8G	149	_	165	
	WLAN802.11 n(40M)/ac(40M) 5.8G	151	_	159	
	WLAN802.11 ac(80M) 5.8G	155			
	Bluetooth	0	_	78	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 7 of 240

WWAN Max. SAR (1-g) (Unit: W/Kg)								
Band	Measured	Reported	Channel	Position				
LTE FDD Band 2	0.49	0.53	19100	Left side				
LTE FDD Band 4	0.46	0.48	20050	Left side				
LTE FDD Band 5	0.40	0.44	20600	Left side				
LTE FDD Band 7	0.61	0.63	21100	Left side				
LTE FDD Band 13	0.44	0.52	23230	Left side				
LTE FDD Band 17	0.43	0.49	23780	Left side				
LTE FDD Band 26	0.41	0.43	26965	Left side				

	WLAN Max. SAR (1-g) (Unit: W/Kg)									
Antenna	Band	Measured	Reported	Channel	Position					
	WLAN802.11b	0.81	0.85	6	Left side					
Main	Bluetooth (8DPSK)	0.05	0.05	39	Left side					
	WLAN802.11 a 5.2G	0.44	0.49	40	Left side					
	WLAN802.11 a 5.3G	0.42	0.46	52	Left side					
	WLAN802.11 a 5.6G	0.29	0.31	120	Left side					
	WLAN802.11 a 5.8G	0.46	0.50	165	Left side					
	WLAN802.11b	0.71	0.77	6	Top side					
	Bluetooth (8DPSK)	0.08	0.10	0	Top side					
Aux	WLAN802.11 a 5.2G	0.21	0.22	36	Top side					
Aux	WLAN802.11 a 5.3G	0.20	0.20	52	Top side					
	WLAN802.11 a 5.6G	0.20	0.20	120	Top side					
	WLAN802.11 a 5.8G	0.41	0.42	165	Top side					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 8 of 240

LTE FDD Band 2 / Band 4 / Band 5 / Band 7 / Band 13 / Band 17 / Band 26 power table:

table: FDD Band 2 (Full Power)									
			FUU	Band 2 (Full P	ower)		_		
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1860	18700	21.45	23	0	
			0	1880	18900	21.36	23	0	
				1900	19100	21.53	23	0	
				1860	18700	21.46	23	0	
		1 RB	50	1880	18900	21.29	23	0	
				1900	19100	21.35	23	0	
				1860	18700	21.14	23	0	
			99	1880	18900	21.17	23	0	
				1900	19100	21.06	23	0	
				1860	18700	20.84	22	0-1	
	QPSK		0	1880	18900	20.84	22	0-1	
				1900	19100	20.85	22	0-1	
				1860	18700	20.55	22	0-1	
		50 RB	25	1880	18900	20.64	22	0-1	
				1900	19100	20.58	22	0-1	
			50	1860	18700	20.59	22	0-1	
				1880	18900	20.63	22	0-1	
				1900	19100	20.53	22	0-1	
				1860	18700	20.70	22	0-1	
		100RB		1880	18900	20.74	22	0-1	
20				1900	19100	20.71	22	0-1	
				1860	18700	20.77	22	0-1	
			0	1880	18900	20.60	22	0-1	
				1900	19100	20.38	22	0-1	
			50	1860	18700	20.91	22	0-1	
		1 RB		1880	18900	20.61	22	0-1	
				1900	19100	20.55	22	0-1	
				1860	18700	20.10	22	0-1	
			99	1880	18900	20.04	22	0-1	
				1900	19100	20.03	22	0-1	
				1860	18700	19.76	21	0-2	
	16-QAM		0	1880	18900	19.85	21	0-2	
				1900	19100	19.86	21	0-2	
				1860	18700	19.58	21	0-2	
		50 RB	25	1880	18900	19.58	21	0-2	
				1900	19100	19.62	21	0-2	
				1860	18700	19.53	21	0-2	
			50	1880	18900	19.63	21	0-2	
				1900	19100	19.49	21	0-2	
				1860	18700	19.66	21	0-2	
Ì		100)RB	1880	18900	19.73	21	0-2	
l				1900	19100	19.70	21	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 9 of 240

	FDD Band 2 (Full Power)								
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1857.5	18675	21.47	23	0	
			0	1880	18900	21.56	23	0	
				1902.5	19125	21.50	23	0	
				1857.5	18675	21.29	23	0	
		1 RB	36	1880	18900	21.43	23	0	
				1902.5	19125	21.36	23	0	
				1857.5	18675	21.16	23	0	
			74	1880	18900	21.26	23	0	
				1902.5	19125	21.21	23	0	
				1857.5	18675	20.72	22	0-1	
	QPSK		0	1880	18900	20.83	22	0-1	
				1902.5	19125	20.80	22	0-1	
				1857.5	18675	20.49	22	0-1	
		36 RB	18	1880	18900	20.61	22	0-1	
				1902.5	19125	20.56	22	0-1	
			37	1857.5	18675	20.58	22	0-1	
				1880	18900	20.64	22	0-1	
				1902.5	19125	20.61	22	0-1	
		75RB		1857.5	18675	20.62	22	0-1	
				1880	18900	20.76	22	0-1	
15			•	1902.5	19125	20.69	22	0-1	
			0	1857.5	18675	20.93	22	0-1	
				1880	18900	20.77	22	0-1	
				1902.5	19125	20.74	22	0-1	
		4.00	36	1857.5	18675	20.45	22	0-1	
		1 RB		1880	18900	20.94	22	0-1	
				1902.5	19125	20.65	22	0-1	
			7.4	1857.5	18675	20.36	22	0-1	
			74	1880	18900	20.43	22	0-1	
				1902.5	19125	20.38	22	0-1	
	16-QAM		0	1857.5	18675	19.74	21 21	0-2 0-2	
	10-QAIVI		U	1880	18900	19.80			
				1902.5	19125	19.77	21	0-2	
		36 RB	18	1857.5 1880	18675 18900	19.51 19.59	21 21	0-2 0-2	
		30 KB	10	1902.5	19125	19.59	21	0-2	
				1857.5	18675	19.46	21	0-2	
			37	1880	18900	19.46	21	0-2	
			3,	1902.5	19125	19.59	21	0-2	
				1857.5	18675	19.54	21	0-2	
		75	RB	1880	18900	19.72	21	0-2	
			=	1902.5	19125	19.67	21	0-2	
				1002.0	10120	10.07	<u>- 1</u>	0.2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 240

			FDD	Band 2 (Full P	ower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1855	18650	21.60	23	0
			0	1880	18900	21.81	23	0
				1905	19150	21.75	23	0
				1855	18650	21.44	23	0
		1 RB	25	1880	18900	21.56	23	0
				1905	19150	21.49	23	0
				1855	18650	21.35	23	0
			49	1880	18900	21.69	23	0
				1905	19150	21.60	23	0
				1855	18650	20.59	22	0-1
	QPSK		0	1880	18900	20.74	22	0-1
				1905	19150	20.70	22	0-1
				1855	18650	20.40	22	0-1
		25 RB	12	1880	18900	20.64	22	0-1
				1905	19150	20.58	22	0-1
			25	1855	18650	20.51	22	0-1
				1880	18900	20.73	22	0-1
				1905	19150	20.56	22	0-1
		50RB		1855	18650	20.42	22	0-1
				1880	18900	20.71	22	0-1
10				1905	19150	20.62	22	0-1
			0	1855	18650	20.81	22	0-1
				1880	18900	20.84	22	0-1
				1905	19150	20.92	22	0-1
			25	1855	18650	20.73	22	0-1
		1 RB		1880	18900	20.85	22	0-1
				1905	19150	20.79	22	0-1
			40	1855	18650	20.70	22	0-1
			49	1880	18900	20.63	22	0-1
				1905	19150	20.77	22	0-1
	46.0414		0	1855	18650	19.60	21	0-2
	16-QAM		0	1880	18900	19.73	21	0-2
				1905	19150	19.66	21	0-2
		25 RB	12	1855	18650	19.52	21	0-2
		20 KD	12	1880	18900	19.67	21	0-2
				1905 1855	19150	19.55	21	0-2
			25	1855	18650	19.43	21 21	0-2
			25	1880 1905	18900 19150	19.71 19.57	21	0-2 0-2
				1855	18650	19.57	21	0-2
		50	RB	1880	18900	19.69	21	0-2
		30		1905	19150	19.61	21	0-2
				1900	19100	19.01	41	∪ - ∠

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 240

	FDD Band 2 (Full Power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1852.5	18625	21.31	23	0				
			0	1880	18900	21.46	23	0				
				1907.5	19175	21.43	23	0				
				1852.5	18625	21.34	23	0				
		1 RB	12	1880	18900	21.43	23	0				
				1907.5	19175	21.35	23	0				
				1852.5	18625	21.22	23	0				
			24	1880	18900	21.32	23	0				
				1907.5	19175	21.33	23	0				
				1852.5	18625	20.50	22	0-1				
	QPSK		0	1880	18900	20.58	22	0-1				
				1907.5	19175	20.56	22	0-1				
				1852.5	18625	20.48	22	0-1				
		12 RB	6	1880	18900	20.55	22	0-1				
				1907.5	19175	20.42	22					
				1852.5	18625	20.44	22	0-1				
			13	1880	18900	20.52	22	0-1				
				1907.5	19175	20.45	22	0-1				
				1852.5	18625	20.42	22	0-1				
		25	RB	1880	18900	20.60	22	0-1				
5				1907.5	19175	20.49	22	0-1				
Ü				1852.5	18625	20.54	22	0-1				
			0	1880	18900	20.34	22	0-1				
				1907.5	19175	20.64	22	0-1				
				1852.5	18625	20.84	22	0-1				
		1 RB	12	1880	18900	20.32	22	0-1				
				1907.5	19175	20.29	22					
				1852.5	18625	20.64	22					
			24	1880	18900	20.99	22					
				1907.5	19175	20.82	22					
	40.0			1852.5	18625	19.47	21					
	16-QAM		0	1880	18900	19.61	21					
				1907.5	19175	19.47	21					
		40.55		1852.5	18625	19.47	21	0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-				
		12 RB	6	1880	18900	19.58	21					
				1907.5	19175	19.48	21					
			40	1852.5	18625	19.45	21	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			13	1880	18900	19.53	21					
				1907.5	19175	19.53	21					
			DD	1852.5	18625	19.38	21					
	25F	KR	1880	18900	19.55	21						
					1907.5	19175	19.45	21	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 12 of 240

FDD Band 2 (Full Power)											
			100		0.101)		Target				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1851.5	18615	21.61	23	0			
			0	1880	18900	21.57	23	0			
				1908.5	19185	21.63	23	0			
				1851.5	18615	21.67	23	0			
		1 RB	7	1880	18900	21.63	23	0			
				1908.5	19185	21.63	23	0			
				1851.5	18615	21.53	23	0			
			14	1880	18900	21.66	23	0			
				1908.5	19185	21.63	23	0			
				1851.5	18615	20.64	22	0-1			
	QPSK		0	1880	18900	20.66	22	0-1			
				1908.5	19185	20.66	22	0-1			
				1851.5	18615	20.51	22	0-1			
		8 RB	4	1880	18900	20.60	22	0-1			
				1908.5	19185	20.59	22	0-1			
				1851.5	18615	20.60	22	0-1			
			7	1880	18900	20.61	22	0-1			
				1908.5	19185	20.59	22	0-1			
				1851.5	18615	20.44	22				
		15	RB	1880	18900	20.62	22	0-1			
3				1908.5	19185	20.63	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
				1851.5	18615	20.84	22				
			0	1880	18900	20.81	22				
				1908.5	19185	21.08	22				
				1851.5	18615	21.09	22				
		1 RB	7	1880	18900	21.07	22				
				1908.5	19185	20.97	22				
				1851.5	18615	20.89	22				
			14	1880	18900	20.52	22				
				1908.5	19185	20.58	22				
				1851.5	18615	19.61	21				
	16-QAM		0	1880	18900	19.68	21				
				1908.5	19185	19.67	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		0.00		1851.5	18615	19.59	21				
		8 RB	4	1880	18900	19.63	21				
				1908.5	19185	19.65	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1			
			7	1851.5	18615	19.57	21				
			7	1880	18900	19.68	21				
				1908.5	19185	19.63	21	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		4-	DD	1851.5	18615	19.53	21				
		15	RB	1880	18900	19.68	21				
				1908.5	19185	19.57	21	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 13 of 240

FDD Band 2 (Full Power)										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1850.7	18607	21.52	23	0		
			0	1880	18900	21.79	23	0		
				1909.3	19193	21.72	23	0		
				1850.7	18607	21.19	23	0		
		1 RB	2	1880	18900	21.38	23	0		
ı				1909.3	19193	21.33	23	0		
1				1850.7	18607	21.62	23	0		
			5	1880	18900	21.80	23	0		
				1909.3	19193	21.70	23	0		
				1850.7	18607	21.45	23	0		
	QPSK		0	1880	18900	21.72	23	0		
				1909.3	19193	21.56	23	0		
				1850.7	18607	21.43	23	0		
		3 RB	2	1880	18900	21.52	23	0		
				1909.3	19193	21.47	23	0		
				1850.7	18607	21.62	23	0		
			3	1880	18900	21.71	23	0		
				1909.3	19193	21.69	23	0		
				1850.7	18607	20.56	22	0-1		
		6F	RB	1880	18900	20.74	22	0-1		
1.4				1909.3	19193	20.55	22	0-1		
1				1850.7	18607	20.75	22	0-1		
			0	1880	18900	21.17	22	0-1		
				1909.3	19193	21.29	22	0-1		
				1850.7	18607	20.65	22	0-1		
		1 RB	2	1880	18900	20.55	22	0-1		
				1909.3	19193	20.65	22	0-1		
				1850.7	18607	20.96	22	0-1		
			5	1880	18900	21.26	22	0-1		
				1909.3	19193	20.98	22	0-1		
				1850.7	18607	20.56	22	0-1		
	16-QAM		0	1880	18900	20.74	22	0-1		
				1909.3	19193	20.61	22	0-1		
				1850.7	18607	20.47	22	0-1		
		3 RB	2	1880	18900	20.76	22	0-1		
				1909.3	19193	20.39	22	0-1		
				1850.7	18607	20.35	22	0-1		
			3	1880	18900	20.63	22	0-1		
				1909.3	19193	20.56	22	0-1		
				1850.7	18607	19.55	21	0-2		
		6RB		1880	18900	19.86	21	0-2		
			Oixi		1909.3	19193	19.73	21	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 14 of 240

	FDD Band 2 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1860	18700	16.58	17	0				
			0	1880	18900	16.57	17	0				
				1900	19100	16.67	17	0				
				1860	18700	16.62	17	0				
		1 RB	50	1880	18900	16.63	17	0				
				1900	19100	16.61	17	0				
				1860	18700	16.19	17	0				
			99	1880	18900	16.28	17	0				
				1900	19100	16.18	17	0				
				1860	18700	15.58	16	0-1				
	QPSK		0	1880	18900	15.55	16	0-1				
				1900	19100	15.59	16	0-1				
				1860	18700	15.40	16	0-1				
		50 RB	25	1880	18900	15.38	16	0-1				
				1900	19100	15.36	16	0-1				
				1860	18700	15.42	16	0-1				
			50	1880	18900	15.41	16	0-1				
				1900	19100	15.33	16	0-1				
				1860	18700	15.53	16	0-1				
		100)RB	1880	18900	15.45	16	0-1				
20				1900	19100	15.46	16	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
				1860								
			0	1880	18900	15.25						
				1900	19100	15.29	16					
				1860	18700	15.51	16					
		1 RB	50	1880	18900	15.73	16					
				1900	19100	15.43	16					
				1860	18700	14.77	16					
			99	1880	18900	14.94	16					
				1900	19100	14.87	16					
	46.0444		_	1860	18700	14.55	15					
	16-QAM		0	1880	18900	14.57	15					
				1900	19100	14.57	15					
		E0 DD	0.5	1860	18700	14.38	15					
		50 RB	25	1880	18900	14.40	15					
				1900	19100	14.31	15					
			F^	1860	18700	14.43	15	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
			50	1880	18900	14.37	15					
				1900	19100	14.38	15					
		400	NDD	1860	18700	14.43	15					
		100)RB	1880	18900	14.41	15					
		100112	1900	19100	14.40	15	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 15 of 240

FDD Band 2 (Reduced power)										
			I DD Ba	ina z (Neducet	power)		Torret			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1857.5	18675	16.27	17	0		
			0	1880	18900	16.15	17	0		
				1902.5	19125	16.25	17	0		
				1857.5	18675	16.21	17	0		
		1 RB	36	1880	18900	16.25	17	0		
				1902.5	19125	16.15	17	0		
				1857.5	18675	15.95	17	0		
			74	1880	18900	15.95	17	0		
				1902.5	19125	16.02	17	0		
				1857.5	18675	15.52	16	0-1		
	QPSK		0	1880	18900	15.46	16	0-1		
				1902.5	19125	15.53	16	0-1		
				1857.5	18675	15.34	16	0-1		
		36 RB	18	1880	18900	15.35	16	0-1		
				1902.5	19125	15.38	16	0-1		
				1857.5	18675	15.39	16	0-1		
			37	1880	18900	15.43	16	0-1		
				1902.5	19125	15.40	16	0-1		
				1857.5	18675	15.49	16	0-1		
		75	RB	1880	18900	15.47	16	0-1		
15				1902.5	19125	15.39	16	0-1		
10				1857.5	18675	15.57	16	0-1		
			0	1880	18900	15.48	16	0-1		
				1902.5	19125	15.43	16	0-1		
				1857.5	18675	15.41	16	0-1		
		1 RB	36	1880	18900	15.21	16	0-1		
				1902.5	19125	15.55	16	0-1		
				1857.5	18675	15.14	16			
			74	1880	18900	15.03	16	0-1		
				1902.5	19125	15.30	16			
				1857.5	18675	14.59	15			
	16-QAM		0	1880	18900	14.54	15	0-2		
				1902.5	19125	14.47	15	0-2		
				1857.5	18675	14.34	15	0-2		
		36 RB	18	1880	18900	14.35	15			
				1902.5	19125	14.28	15	0-2		
				1857.5	18675	14.46	15	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-		
			37	1880	18900	14.36	15			
				1902.5	19125	14.32	15			
				1857.5	18675	14.52	15			
	75F	RB	1880	18900	14.41	15				
				1902.5	19125	14.39	15	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 16 of 240

			FDD Ba	nd 2 (Reduced	d power)					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1855	18650	16.31	17	0		
			0	1880	18900	16.43	17	0		
				1905	19150	16.40	17	0		
				1855	18650	16.31	17	0		
		1 RB	25	1880	18900	16.32	17	0		
				1905	19150	16.39	17	0		
				1855	18650	16.17	17	0		
			49	1880	18900	16.26	17	0		
				1905	19150	16.31	17	0		
				1855	18650	15.51	16	0-1		
	QPSK		0	1880	18900	15.48	16	0-1		
				1905	19150	15.41	16	0-1		
				1855	18650	15.43	16	0-1		
		25 RB	12	1880	18900	15.46	16	0-1		
				1905	19150	15.34	16	0-1		
				1855	18650	15.40	16	0-1		
			25	1880	18900	15.42	16	0-1		
				1905	19150	15.33	16	0-1		
				1855	18650	15.43	16	0-1		
		50	RB	1880	18900	15.46	16	0-1		
10			•	1905	19150	15.31	16	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1		
				1855	18650	15.47	16			
			0	1880	18900	15.58	16			
				1905	19150	15.39	16			
				1855	18650	15.96	16			
		1 RB	25	1880	18900	15.56	16			
				1905	19150	15.73	16			
				1855	18650	15.29	16			
			49	1880	18900	15.58	16	•		
				1905	19150	15.28	16			
	40.0444		_	1855	18650	14.41	15			
	16-QAM		0	1880	18900	14.42	15			
				1905	19150	14.40	15			
		0E DD	40	1855	18650	14.42	15			
		25 RB	12	1880	18900	14.43	15			
				1905	19150	14.43	15			
			25	1855	18650	14.39	15			
			25	1880	18900	14.43	15			
				1905	19150	14.39	15			
		E0.	DD	1855	18650	14.43	15			
	501	עט	1880	18900	14.44	15				
			OONS		1905	19150	14.36	15	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 17 of 240

			FDD Ba	nd 2 (Reduced	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1852.5	18625	16.22	17	0
			0	1880	18900	16.22	17	0
				1907.5	19175	16.14	17	0
				1852.5	18625	16.20	17	0
		1 RB	12	1880	18900	16.31	17	0
				1907.5	19175	16.12	17	0
				1852.5	18625	15.94	17	0
			24	1880	18900	16.14	17	0
				1907.5	19175	16.07	17	0
				1852.5	18625	15.39	16	0-1
	QPSK		0	1880	18900	15.43	16	0-1
				1907.5	19175	15.31	16	0-1
				1852.5	18625	15.35	16	0-1
		12 RB	6	1880	18900	15.42	16	0-1
				1907.5	19175	15.32	16	0-1
				1852.5	18625	15.38	16	0-1
			13	1880	18900	15.37	16	0-1
				1907.5	19175	15.33	16	0-1
				1852.5	18625	15.34	16	0-1
		25	RB	1880	18900	15.35	16	0-1
5			1	1907.5	19175	15.30	16	0-1
				1852.5	18625	15.19	16	0-1
			0	1880	18900	15.43	16	0-1
				1907.5	19175	15.21	16	0-1
		4.00	40	1852.5	18625	15.66	16	0-1
		1 RB	12	1880	18900	15.25	16	0-1
				1907.5	19175	15.25	16	0-1
				1852.5	18625	15.37	16	0-1
			24	1880	18900	15.71	16	0-1
				1907.5	19175	15.35	16	0-1
	46 0 4 14		0	1852.5	18625	14.38	15	0-2
	16-QAM		0	1880	18900	14.34	15	0-2
				1907.5	19175	14.27	15	0-2
		12 DD	e	1852.5	18625	14.31	15	0-2
		12 RB	6	1880	18900	14.32	15	0-2
				1907.5	19175	14.21	15	0-2
			13	1852.5	18625	14.41	15	0-2
			13	1880	18900	14.38	15 15	0-2
				1907.5	19175	14.32	15	0-2
		25	RB	1852.5	18625	14.31	15 15	0-2
		25	ND	1880	18900	14.38	15 15	0-2
			1907.5	19175	14.36	15	0-2	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 18 of 240

	FDD Band 2 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1851.5	18615	16.40	17	0				
			0	1880	18900	16.38	17	0				
				1908.5	19185	16.28	17	0				
				1851.5	18615	16.55	17	0				
		1 RB	7	1880	18900	16.54	17	0				
				1908.5	19185	16.48	17	0				
				1851.5	18615	16.52	17	0				
			14	1880	18900	16.36	17	0				
				1908.5	19185	16.39	17	0				
				1851.5	18615	15.54	16	0-1				
	QPSK		0	1880	18900	15.47	16	0-1				
				1908.5	19185	15.45	16	0-1				
				1851.5	18615	15.44	16	0-1				
		8 RB	4	1880	18900	15.48	16	0-1				
				1908.5	19185	15.42	16	0-1				
				1851.5	18615	15.47	16	0-1				
			7	1880	18900	15.52	16	0-1				
				1908.5	19185	15.44	16	0-1				
				1851.5	18615	15.44	16	0-1				
		15	RB	1880	18900	15.50	16	0-1				
3			•	1908.5	19185	15.42	16	0-1				
				1851.5	18615	15.52	16	0-1				
			0	1880	18900	15.68	16	0-1				
				1908.5	19185	15.64	16	0-1				
			_	1851.5	18615	15.95	16	0-1				
		1 RB	7	1880	18900	15.62	16	0-1				
				1908.5	19185	15.95	16	0-1				
				1851.5	18615	15.73	16	0-1				
			14	1880	18900	15.71	16	0-1				
				1908.5	19185	15.47	16	0-1				
	40.0414		_	1851.5	18615	14.47	15	0-2				
	16-QAM		0	1880	18900	14.59	15	0-2				
				1908.5	19185	14.49	15	0-2				
		0 00	4	1851.5	18615	14.48	15	0-2				
		8 RB	4	1880	18900	14.48	15	0-2				
				1908.5	19185	14.52	15	0-2				
			7	1851.5	18615	14.44	15	0-2				
			7	1880	18900	14.37	15	0-2				
				1908.5	19185	14.41	15	0-2				
	15R	4.5	DD	1851.5	18615	14.39	15	0-2				
		עט	1880	18900	14.46	15	0-2					
				1908.5	19185	14.38	15	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 19 of 240

			FDD Ba	nd 2 (Reduced	d power)				
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
				1850.7	18607	16.54	17	0	
			0	1880	18900	16.59	17	0	
				1909.3	19193	16.51	17	0	
				1850.7	18607	16.11	17	0	
		1 RB	2	1880	18900	16.19	17	0	
				1909.3	19193	16.16	17	0	
				1850.7	18607	16.54	17	0	
			5	1880	18900	16.60	17	0	
				1909.3	19193	16.51	17	0	
				1850.7	18607	16.42	17	0	
	QPSK		0	1880	18900	16.48	17	0	
				1909.3	19193	16.53	17	0	
				1850.7	18607	16.41	17	0	
		3 RB	2	1880	18900	16.36	17	0	
				1909.3	19193	16.25	17	0	
				1850.7	18607	16.47	17	0	
			3	1880	18900	16.59	17	0	
				1909.3	19193	16.46	17	0	
				1850.7	18607	15.40	16	0-1	
		6	RB	1880	18900	15.47	16	0-1	
1.4				1909.3	19193	15.49	16	0-1	
				1850.7	18607	15.17	16	0-1	
			0	1880	18900	16.00	16	0-1	
				1909.3	19193	15.69	16	0-1	
			_	1850.7	18607	15.72	16	0-1	
		1 RB	2	1880	18900	15.17	16	0-1	
				1909.3	19193	15.09	16	0-1	
			_	1850.7	18607	15.12	16	0-1	
			5	1880	18900	15.82	16	0-1	
				1909.3	19193	15.73	16	0-1	
	40.0414		0	1850.7	18607	15.63	16	0-1	
	16-QAM		0	1880	18900	15.42	16	0-1	
				1909.3	19193	15.59	16	0-1	
		2 00		1850.7	18607	15.55	16	0-1	
		3 RB	2	1880	18900	15.45	16	0-1	
				1909.3	19193	15.31	16	0-1	
			2	1850.7	18607	15.62	16	0-1	
			3	1880	18900	15.54	16	0-1	
				1909.3	19193	15.47	16	0-1	
		e.	OD	1850.7	18607	14.49	15	0-2	
	6R	ND.	1880	18900	14.63	15	0-2		
					1909.3	19193	14.46	15	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 20 of 240

FDD Band 4 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1720	20050	21.39	23	0			
			0	1732.5	20175	21.27	23	0			
				1745	20300	21.22	23	0			
				1720	20050	21.21	23	0			
		1 RB	50	1732.5	20175	21.29	23	0			
				1745	20300	21.35	23	0			
				1720	20050	21.06	23	0			
			99	1732.5	20175	21.06	23	0			
				1745	20300	21.02	23	0			
				1720	20050	20.88	22	0-1			
	QPSK		0	1732.5	20175	20.82	22	0-1			
				1745	20300	20.79	22				
				1720	20050	20.56	22	0-1			
		50 RB	25	1732.5	20175	20.57	22	0-1			
				1745	20300	20.66	22	0-1			
				1720	20050	20.59	22				
			50	1732.5	20175	20.65	22				
				1745	20300	20.60	22	0-1			
				1720	20050	20.67	22				
		100)RB	1732.5	20175	20.79	22				
20			•	1745	20300	20.73	22	+			
			0	1720	20050	20.44	22				
			0	1732.5	20175	20.39	22				
				1745	20300	20.70	22				
		4.00	50	1720	20050	20.82	22				
		1 RB	50	1732.5	20175	20.58	22				
				1745	20300	20.59	22				
			00	1720	20050	20.03	22				
			99	1732.5	20175	20.29	22				
				1745	20300	20.22	22				
	16-QAM		0	1720	20050	19.71	21 21				
	10-QAIVI		U	1732.5	20175	19.75					
				1745	20300	19.74	21				
		50 RB	25	1720 1732.5	20050 20175	19.47 19.50	21 21				
		30 KB	25	1732.5	20175		21				
				1745	20300	19.58 19.50					
			50	1732.5	20050	19.50	21 21	0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
			30	1732.5	20175	19.59	21				
				1743	20050	19.63	21				
		100)RB	1732.5	20050	19.63	21				
		100	,,,,,,	1732.3	20300	19.65	21				
				1740	20300	19.00	41	∪ - ∠			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this online unlawful and offenders may be

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

prosecuted to the fullest extent of the law.



Page: 21 of 240

			FDD	Band 4 (Full p	ower)					
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				1717.5	20025	21.27	23	0		
			0	1732.5	20175	21.34	23	0		
				1747.5	20325	21.42	23	0		
				1717.5	20025	21.24	23	0		
		1 RB	36	1732.5	20175	21.33	23	0		
				1747.5	20325	21.34	23	0		
				1717.5	20025	21.01	23	0		
			74	1732.5	20175	21.09	23	0		
				1747.5	20325	21.11	23	0		
				1717.5	20025	20.71	22	0-1		
	QPSK		0	1732.5	20175	20.71	22	0-1		
				1747.5	20325	20.83	22	0-1		
				1717.5	20025	20.51	22	0-1		
		36 RB	18	1732.5	20175	20.49	22	0-1		
				1747.5	20325	20.65	22	0-1		
				1717.5	20025	20.57	22	0-1		
			37	1732.5	20175	20.62	22	0-1		
				1747.5	20325	20.71	22	0-1		
				1717.5	20025	20.60	22	0-1		
		75	RB	1732.5	20175	20.67	22	0-1		
15				1747.5	20325	20.74	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
				1717.5	20025	20.89	22			
			0	1732.5	20175	20.49	22			
				1747.5	20325	21.03	22			
				1717.5	20025	20.91	22			
		1 RB	36	1732.5	20175	20.56	22			
				1747.5	20325	20.59	22			
				1717.5	20025	20.07	22			
			74	1732.5	20175	20.34	22			
				1747.5	20325	20.14	22			
	40.044		_	1717.5	20025	19.68	21			
	16-QAM		0	1732.5	20175	19.73	21			
				1747.5	20325	19.79	21			
		00.55	40	1717.5	20025	19.46	21			
		36 RB	18	1732.5	20175	19.50	21			
				1747.5	20325	19.60	21			
			27	1717.5	20025	19.50	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-		
			37	1732.5	20175	19.53	21			
				1747.5	20325	19.46	21			
		7-	DD	1717.5	20025	19.66	21			
		/5	RB	1732.5	20175	19.59	21			
				1747.5	20325	19.73	21	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this online unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 22 of 240

	FDD Band 4 (Full power)												
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)					
				1715	20000	21.52	23	0					
			0	1732.5	20175	21.56	23	0					
				1750	20350	21.70	23	0					
				1715	20000	21.35	23	0					
		1 RB	25	1732.5	20175	21.46	23	0					
				1750	20350	21.66	23	0					
				1715	20000	21.30	23	0					
			49	1732.5	20175	21.46	23	0					
				1750	20350	21.50	23	0					
				1715	20000	20.60	22	0-1					
	QPSK		0	1732.5	20175	20.63	22	0-1					
				1750	20350	20.77	22						
				1715	20000	20.56	22	0-1					
		25 RB	12	1732.5	20175	20.57	22	0-1					
				1750	20350	20.68	22	0-1					
				1715	20000	20.46	22						
			25	1732.5	20175	20.55	22						
				1750	20350	20.62	22	0-1					
				1715	20000	20.53	22						
		50	RB	1732.5	20175	20.59	22						
10			•	1750	20350	20.73	22	ł					
			_	1715	20000	20.79	22						
			0	1732.5	20175	20.87	22						
				1750	20350	20.68	22						
		4.00	0.5	1715	20000	20.45	22						
		1 RB	25	1732.5	20175	20.79	22						
				1750	20350	20.88	22						
			40	1715	20000	20.61	22						
			49	1732.5	20175	20.70	22						
				1750	20350	20.45	22						
	16-QAM		0	1715	20000	19.63	21 21						
	10-QAIVI		U	1732.5	20175	19.63							
				1750	20350	19.59	21						
		25 RB	12	1715 1732.5	20000 20175	19.47 19.55	21 21						
		20 ND	14	1732.5		19.55	21						
				1750	20350 20000	19.71	21						
			25	1715	20175	19.53	21	0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1					
			2.5	1732.5	20175	19.57	21						
				1715	20000	19.62	21						
		50	RB	1732.5	20175	19.59	21						
		30		1752.5	20350	19.55	21						
				1750	20000	19.08	41	U-Z					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 23 of 240

FDD Band 4 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1712.5	19975	21.40	23	0			
			0	1732.5	20175	21.42	23	0			
				1752.5	20375	21.50	23	0			
				1712.5	19975	21.53	23	0			
		1 RB	12	1732.5	20175	21.47	23	0			
				1752.5	20375	21.49	23	0			
				1712.5	19975	21.12	23	0			
			24	1732.5	20175	21.33	23	0			
				1752.5	20375	21.40	23	0			
				1712.5	19975	20.65	22	0-1			
	QPSK		0	1732.5	20175	20.60	22	0-1			
				1752.5	20375	20.69	22	0-1			
				1712.5	19975	20.49	22	0-1			
		12 RB	6	1732.5	20175	20.55	22	0-1			
				1752.5	20375	20.71	22	0-1			
				1712.5	19975	20.55	22	0-1			
			13	1732.5	20175	20.50	22	0-1			
				1752.5	20375	20.65	22	0-1			
				1712.5	19975	20.36	22				
		25	RB	1732.5	20175	20.58	22	0-1			
5				1752.5	20375	20.70	22	0-1 0-1 0-1 0-1 0-1 0-1 0-1			
			1712.5 19975 20.66 22 0 1732.5 20175 20.62 22								
			0	1732.5	20175	20.62	22				
				1752.5	20375	20.69	22				
				1712.5	19975	20.72	22				
		1 RB	12	1732.5	20175	20.46	22				
				1752.5	20375	21.11	22				
				1712.5	19975	20.27	22				
			24	1732.5	20175	20.33	22				
				1752.5	20375	20.59	22				
	40.0414			1712.5	19975	19.55	21				
	16-QAM		0	1732.5	20175	19.59	21				
				1752.5	20375	19.76	21	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1			
		10 00	_	1712.5	19975	19.59	21				
		12 RB	6	1732.5	20175	19.54	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-			
				1752.5	20375	19.57	21				
			12	1712.5	19975	19.50	21				
			13	1732.5	20175	19.51	21				
				1752.5	20375	19.61	21	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		O.F.	DD	1712.5	19975	19.51	21				
		25	RB	1732.5	20175	19.57	21				
				1752.5	20375	19.59	21	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this online unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 24 of 240

	FDD Band 4 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1711.5	19965	21.61	23	0				
			0	1732.5	20175	21.75	23	0				
				1753.5	20385	21.75	23	0				
				1711.5	19965	21.69	23	0				
		1 RB	7	1732.5	20175	21.72	23	0				
				1753.5	20385	21.71	23	0				
				1711.5	19965	21.53	23	0				
			14	1732.5	20175	21.63	23	0				
				1753.5	20385	21.78	23	0				
				1711.5	19965	20.74	22	0-1				
	QPSK		0	1732.5	20175	20.70	22	0-1				
				1753.5	20385	20.81	22	0-1				
				1711.5	19965	20.65	22	0-1				
		8 RB	4	1732.5	20175	20.68	22	0-1				
				1753.5	20385	20.80	22	0-1				
				1711.5	19965	20.67	22	0-1				
			7	1732.5	20175	20.73	22	0-1				
				1753.5	20385	20.77	22	0-1				
				1711.5	19965	20.65	22	0-1				
		15	RB	1732.5	20175	20.83	22	0-1				
3			•	1753.5	20385	20.79	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
			0	1711.5	19965	21.08	22					
			0	1732.5	20175	21.02	22					
				1753.5	20385	20.79	22					
			_	1711.5	19965	20.79	22					
		1 RB	7	1732.5	20175	21.30	22					
				1753.5	20385	21.04	22					
			4.4	1711.5	19965	20.51	22					
			14	1732.5	20175	20.73	22	•				
				1753.5	20385	21.13	22					
	16 0 4 14		_	1711.5	19965	19.69	21					
	16-QAM		0	1732.5	20175	19.83	21					
				1753.5	20385	19.86	21					
		Q DD	1	1711.5	19965	19.72	21					
		8 RB	4	1732.5	20175	19.79	21					
				1753.5	20385	19.80	21					
			7	1711.5	19965	19.70	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-				
			'	1732.5	20175	19.78	21					
				1753.5	20385	19.81	21					
		15	DR .	1711.5	19965	19.69	21					
	15RI	ND	1732.5	20175	19.63	21						
				1753.5	20385	19.71	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 25 of 240

FDD Band 4 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1710.7	19957	21.74	23	0			
			0	1732.5	20175	21.78	23	0			
				1754.3	20393	21.88	23	0			
				1710.7	19957	21.35	23	0			
		1 RB	2	1732.5	20175	21.34	23	0			
				1754.3	20393	21.51	23	0			
				1710.7	19957	21.75	23	0			
			5	1732.5	20175	21.79	23	0			
				1754.3	20393	21.93	23	0			
				1710.7	19957	21.65	23	0			
	QPSK		0	1732.5	20175	21.73	23	0			
				1754.3	20393	21.80	23	0			
				1710.7	19957	21.53	23	0			
		3 RB	2	1732.5	20175	21.66	23	0			
				1754.3	20393	21.64	23	0			
				1710.7	19957	21.67	23	0			
			3	1732.5	20175	21.69	23	0			
				1754.3	20393	21.85	23	0			
				1710.7	19957	20.67	22	0-1			
		6	RB	1732.5	20175	20.81	22	0-1			
1.4				1754.3	20393	20.90	22	0-1			
1.4				1710.7	19957	21.08	22	0-1			
			0	1732.5	20175	21.43	22	0-1			
				1754.3	20393	21.12	22	0-1			
				1710.7	19957	20.97	22	0-1			
		1 RB	2	1732.5	20175	20.99	22	0-1			
				1754.3	20393	20.51	22	0-1			
				1710.7	19957	21.19	22	0-1			
			5	1732.5	20175	21.15	22	0-1			
				1754.3	20393	21.43	22	0-1			
				1710.7	19957	20.76	22	0-1			
	16-QAM		0	1732.5	20175	20.84	22	0-1			
				1754.3	20393	20.96	22	0-1			
				1710.7	19957	20.67	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
		3 RB	2	1732.5	20175	20.70	22				
				1754.3	20393	20.72	22	0-1			
				1710.7	19957	20.68	22	0-1			
			3	1732.5	20175	20.80	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			
				1754.3	20393	20.96	22	0-1			
				1710.7	19957	19.86	21	0-2			
	6RI	RB	1732.5	20175	19.77	21					
				1754.3	20393	19.87	21	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 26 of 240

FDD Band 4 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				1720	20050	19.74	20	0			
			0	1732.5	20175	19.56	20	0			
				1745	20300	19.42	20	0			
				1720	20050	19.64	20	0			
		1 RB	50	1732.5	20175	19.60	20	0			
				1745	20300	19.71	20	0			
				1720	20050	19.11	20	0			
			99	1732.5	20175	19.17	20	0			
				1745	20300	19.10	20	0			
				1720	20050	18.60	19	0-1			
	QPSK		0	1732.5	20175	18.63	19	0-1			
				1745	20300	18.70	19				
				1720	20050	18.39	19	0-1			
		50 RB	25	1732.5	20175	18.38	19	0-1			
				1745	20300	18.52	19	0-1			
				1720	20050	18.37	19				
			50	1732.5	20175	18.49	19	0-1			
				1745	20300	18.53	19	0-1			
				1720	20050	18.50	19				
		100)RB	1732.5	20175	18.58	19				
20			1	1745	20300	18.62	19	•			
			_	1720	20050	18.70	19				
			0	1732.5	20175	18.72	19				
				1745	20300	18.58	19				
				1720	20050	18.44	19				
		1 RB	50	1732.5	20175	18.34	19				
				1745	20300	18.51	19				
				1720	20050	18.23	19				
			99	1732.5	20175	17.94	19				
				1745	20300	17.92	19				
	40.0414			1720	20050	17.68	18				
	16-QAM		0	1732.5	20175	17.68	18				
				1745	20300	17.83	18				
		EO DD	25	1720	20050	17.51	18	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1			
		50 RB	25	1732.5	20175	17.47	18				
				1745	20300	17.59	18				
			50	1720	20050	17.47	18	0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-			
			50	1732.5	20175	17.50	18				
				1745 1720	20300 20050	17.55	18				
		100)RB	1720		17.56	18				
		100	IND	1732.5	20175	17.64	18				
				1745	20300	17.66	18	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 27 of 240

	FDD Band 4 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1717.5	20025	19.20	20	0				
			0	1732.5	20175	19.30	20	0				
				1747.5	20325	19.22	20	0				
				1717.5	20025	19.14	20	0				
		1 RB	36	1732.5	20175	19.31	20	0				
				1747.5	20325	19.39	20	0				
				1717.5	20025	18.96	20	0				
			74	1732.5	20175	18.98	20	0				
				1747.5	20325	19.06	20	0				
				1717.5	20025	18.61	19	0-1				
	QPSK		0	1732.5	20175	18.63	19	0-1				
				1747.5	20325	18.69	19	0-1				
				1717.5	20025	18.46	19	0-1				
		36 RB	18	1732.5	20175	18.43	19	0-1				
				1747.5	20325	18.54	19	0-1				
				1717.5	20025	18.43	19	0-1				
			37	1732.5	20175	18.53	19	0-1				
				1747.5	20325	18.58	19					
				1717.5	20025	18.56	19					
		75	RB	1732.5	20175	18.54	19					
15			1	1747.5	20325	18.63	19	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-1				
			0	1717.5	20025	18.85	19					
			0	1732.5	20175	18.48	19					
				1747.5	20325	18.60	19					
		4.00		1717.5	20025	18.38	19					
		1 RB	36	1732.5	20175	18.79	19					
				1747.5	20325	18.36	19					
			- .	1717.5	20025	18.47	19					
			74	1732.5	20175	18.28	19					
				1747.5	20325	18.78	19					
	16 0 4 14		_	1717.5	20025	17.72	18					
	16-QAM		0	1732.5	20175	17.73	18					
				1747.5	20325	17.85	18					
		26 DD	10	1717.5	20025	17.53	18	-				
		36 RB	18	1732.5	20175	17.52	18					
				1747.5	20325	17.59	18					
			37	1717.5	20025	17.48	18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
			31	1732.5	20175	17.64	18					
				1747.5	20325	17.65 17.57	18					
		75	RB	1717.5	20025	17.57	18					
		/5	ND	1732.5	20175	17.65	18					
			1747.5	20325	17.74	18	U-Z					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 28 of 240

	FDD Band 4 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1715	20000	19.41	20	0				
			0	1732.5	20175	19.53	20	0				
				1750	20350	19.50	20	0				
				1715	20000	19.43	20	0				
		1 RB	25	1732.5	20175	19.48	20	0				
				1750	20350	19.59	20	0				
				1715	20000	19.16	20	0				
			49	1732.5	20175	19.39	20	0				
				1750	20350	19.31	20	0				
				1715	20000	18.52	19	0-1				
	QPSK		0	1732.5	20175	18.58	19	0-1				
				1750	20350	18.59	19	0-1				
				1715	20000	18.47	19	0-1				
		25 RB	12	1732.5	20175	18.57	19	0-1				
				1750	20350	18.57	19	0-1				
				1715	20000	18.42	19	0-1				
			25	1732.5	20175	18.48	19	0-1				
				1750	20350	18.52	19					
				1715	20000	18.51	19					
		50	RB	1732.5	20175	18.53	19					
10			1	1750	20350	18.56	19					
				1715	20000	18.63	19	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			0	1732.5	20175	18.71	19					
				1750	20350	18.85	19					
		4 DD	0.5	1715	20000	18.40	19					
		1 RB	25	1732.5	20175	18.55	19					
				1750	20350	18.71	19					
			40	1715	20000	18.47	19					
			49	1732.5	20175	18.66	19					
				1750	20350	18.57	19 18					
	16-QAM		0	1715	20000	17.58						
	10-QAIVI		U	1732.5	20175	17.60	18					
				1750	20350	17.73	18					
		25 RB	12	1715 1732.5	20000 20175	17.61 17.62	18 18					
		20 KD	12			ł						
				1750 1715	20350	17.66	18					
			25	1715	20000	17.51 17.51	18 18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-				
			25	1732.5	20175	17.51	18					
				1750	20000	17.56	18					
		50	RB	1713	20175	17.60	18					
		30		1752.5	20350	17.69	18					
				1750	20330	17.08	10	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 29 of 240

	FDD Band 4 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1712.5	19975	19.24	20	0				
			0	1732.5	20175	19.23	20	0				
				1752.5	20375	19.37	20	0				
				1712.5	19975	19.32	20	0				
		1 RB	12	1732.5	20175	19.25	20	0				
				1752.5	20375	19.41	20	0				
				1712.5	19975	19.19	20	0				
			24	1732.5	20175	19.21	20	0				
				1752.5	20375	19.30	20	0				
				1712.5	19975	18.42	19	0-1				
	QPSK		0	1732.5	20175	18.49	19	0-1				
				1752.5	20375	18.54	19	0-1				
				1712.5	19975	18.42	19					
		12 RB	6	1732.5	20175	18.44	19	0-1				
				1752.5	20375	18.44	19	0-1				
				1712.5	19975	18.42	19	0-1				
			13	1732.5	20175	18.46	19	0-1				
				1752.5	20375	18.50	19	0-1				
				1712.5	19975	18.41	19					
		25	RB	1732.5	20175	18.41	19					
5			•	1752.5	20375	18.51	19	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			0	1712.5	19975	18.39	19					
			0	1732.5	20175	18.37	19					
				1752.5	20375	18.67	19					
		4.00	40	1712.5	19975	18.49	19					
		1 RB	12	1732.5	20175	18.57	19					
				1752.5	20375	18.38	19					
				1712.5	19975	18.82	19					
			24	1732.5	20175	18.42	19					
				1752.5	20375	18.30	19					
	16 0 14		_	1712.5	19975	17.56	18					
	16-QAM		0	1732.5	20175	17.48	18					
				1752.5	20375	17.66	18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-				
		10 00	_	1712.5	19975	17.47	18					
		12 RB	6	1732.5	20175	17.51	18					
				1752.5	20375	17.56	18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
			12	1712.5	19975	17.48	18					
			13	1732.5	20175	17.43	18					
				1752.5	20375	17.57	18					
		O.F.	DD	1712.5	19975	17.46	18					
		25	RB	1732.5	20175	17.52	18					
						1752.5	20375	17.68	18	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 30 of 240

	FDD Band 4 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				1711.5	19965	19.57	20	0				
			0	1732.5	20175	19.55	20	0				
				1753.5	20385	19.54	20	0				
				1711.5	19965	19.69	20	0				
		1 RB	7	1732.5	20175	19.59	20	0				
				1753.5	20385	19.73	20	0				
				1711.5	19965	19.49	20	0				
			14	1732.5	20175	19.47	20	0				
				1753.5	20385	19.60	20	0				
				1711.5	19965	18.64	19	0-1				
	QPSK		0	1732.5	20175	18.61	19	0-1				
				1753.5	20385	18.64	19	0-1				
				1711.5	19965	18.61	19	0-1				
		8 RB	4	1732.5	20175	18.54	19	0-1				
				1753.5	20385	18.68	19					
				1711.5	19965	18.63	19					
			7	1732.5	20175	18.66	19					
				1753.5	20385	18.70	19					
				1711.5	19965	18.59	19					
		15	RB	1732.5	20175	18.62	19					
3			1	1753.5	20385	18.65	19	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-				
			0	1711.5	19965	18.86	19					
			0	1732.5	20175	18.64	19					
				1753.5	20385	18.83	19					
		4 DD	-	1711.5	19965	18.93	19					
		1 RB	7	1732.5	20175	18.73	19					
				1753.5	20385	18.76	19					
			14	1711.5	19965	18.67	19					
			14	1732.5	20175	18.46	19	•				
				1753.5 1711.5	20385	18.83 17.81	19 18					
	16-QAM		0	1711.5	19965 20175	17.66	18					
	IO QAIVI			1752.5	20175	17.82	18					
				1755.5	19965	17.75	18					
		8 RB	4	1711.5	20175	17.70	18	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
		5 N.D	,	1752.5	20385	17.76	18					
				1711.5	19965	17.73	18					
			7	1732.5	20175	17.77	18	0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1				
				1753.5	20385	17.85	18					
				1711.5	19965	17.68	18					
	15R	15	RB	1732.5	20175	17.76	18					
			1753.5	20385	17.93	18						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 31 of 240

			FDD Ba	and 4 (Reduced	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				1710.7	19957	19.60	20	0
			0	1732.5	20175	19.64	20	0
				1754.3	20393	19.68	20	0
				1710.7	19957	19.19	20	0
		1 RB	2	1732.5	20175	19.21	20	0
				1754.3	20393	19.25	20	0
				1710.7	19957	19.67	20	0
			5	1732.5	20175	19.58	20	0
				1754.3	20393	19.71	20	0
				1710.7	19957	19.56	20	0
	QPSK		0	1732.5	20175	19.54	20	0
				1754.3	20393	19.57	20	0
				1710.7	19957	19.43	20	0
		3 RB	2	1732.5	20175	19.47	20	0
				1754.3	20393	19.46	20	0
				1710.7	19957	19.58	20	0
			3	1732.5	20175	19.56	20	0
				1754.3	20393	19.58	20	0
				1710.7	19957	18.53	19	0-1
		6	RB	1732.5	20175	18.58	19	0-1
1.4				1754.3	20393	18.65	19	0-1
1				1710.7	19957	18.68	19	0-1
			0	1732.5	20175	18.26	19	0-1
				1754.3	20393	18.25	19	0-1
				1710.7	19957	18.23	19	0-1
		1 RB	2	1732.5	20175	18.77	19	0-1
				1754.3	20393	18.51	19	0-1
				1710.7	19957	18.34	19	0-1
			5	1732.5	20175	18.85	19	0-1
				1754.3	20393	18.67	19	0-1
				1710.7	19957	18.66	19	0-1
	16-QAM		0	1732.5	20175	18.63	19	0-1
				1754.3	20393	18.89	19	0-1
				1710.7	19957	18.56	19	0-1
		3 RB	2	1732.5	20175	18.49	19	0-1
				1754.3	20393	18.59	19	0-1
				1710.7	19957	18.57	19	0-1
			3	1732.5	20175	18.79	19	0-1
				1754.3	20393	18.73	19	0-1
				1710.7	19957	17.67	18	0-2
	6R	RB	1732.5	20175	17.67	18	0-2	
				1754.3	20393	17.83	18	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 32 of 240

	FDD Band 5 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				829	20450	21.70	23	0				
			0	836.5	20525	21.65	23	0				
				844	20600	21.86	23	0				
				829	20450	21.69	23	0				
		1 RB	25	836.5	20525	21.71	23	0				
				844	20600	21.62	23	0				
				829	20450	21.65	23	0				
			49	836.5	20525	21.53	23	0				
				844	20600	21.66	23	0				
				829	20450	20.76	22	0-1				
	QPSK		0	836.5	20525	20.78	22	0-1				
				844	20600	20.82	22	0-1				
				829	20450	20.70	22	0-1				
		25 RB	12	836.5	20525	20.76	22	0-1				
				844	20600	20.73	22					
				829	20450	20.68	22	0-1				
			25	836.5	20525	20.79	22	0-1				
				844	20600	20.62	22	0-1				
				829	20450	20.80	22	0-1				
		50	RB	836.5	20525	20.75	22	0-1				
10				844	20600	20.79	22	0-1				
				829	20450	21.27	22					
			0	836.5	20525	21.23	22	0-1				
				844	20600	21.02	22	0-1				
				829	20450	20.78	22	0-1				
		1 RB	25	836.5	20525	20.87	22	0-1				
				844	20600	20.62	22					
				829	20450	21.11	22					
			49	836.5	20525	20.86	22					
				844	20600	20.71	22					
	40.0			829	20450	19.78	21					
	16-QAM		0	836.5	20525	19.84	21					
				844	20600	19.89	21					
		05.55	4.5	829	20450	19.84	21	0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1 0-1				
		25 RB	12	836.5	20525	19.78	21					
				844	20600	19.88	21					
				829	20450	19.79	21					
			25	836.5	20525	19.88	21					
				844	20600	19.73	21					
			NDD.	829	20450	19.76	21					
		500)RB	836.5	20525	19.90	21					
				844	20600	19.92	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 33 of 240

	FDD Band 5 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				826.5	20425	21.53	23	0				
			0	836.5	20525	21.61	23	0				
				846.5	20625	21.42	23	0				
				826.5	20425	21.69	23	0				
		1 RB	12	836.5	20525	21.63	23	0				
				846.5	20625	21.50	23	0				
				826.5	20425	21.55	23	0				
			24	836.5	20525	21.49	23	0				
				846.5	20625	21.33	23	0				
				826.5	20425	20.74	22	0-1				
	QPSK		0	836.5	20525	20.77	22	0-1				
				846.5	20625	20.69	22	0-1				
				826.5	20425	20.79	22	0-1				
		12 RB	6	836.5	20525	20.70	22	0-1				
				846.5	20625	20.58	22	0-1				
				826.5	20425	20.76	22	0-1				
			13	836.5	20525	20.70	22	0-1				
				846.5	20625	20.57	22	0-1				
				826.5	20425	20.68	22	0-1				
		25	RB	836.5	20525	20.70	22	0-1				
5			•	846.5	20625	20.72	22					
				826.5	20425	20.52	22					
			0	836.5	20525	20.94	22					
				846.5	20625	21.06	22					
		4.00	40	826.5	20425	21.20	22					
		1 RB	12	836.5	20525	20.82	22					
				846.5	20625	20.86	22					
				826.5	20425	21.06	22					
			24	836.5	20525	20.75	22					
				846.5	20625	20.53	22					
	46.0414		0	826.5	20425	19.89	21					
	16-QAM		0	836.5	20525	19.72	21					
				846.5	20625	19.76	21					
		12 DD	e	826.5	20425	19.76	21	0 0 0 0 0 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-				
		12 RB	6	836.5	20525	19.71	21					
				846.5	20625	19.62	21					
			13	826.5	20425	19.78	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
			13	836.5	20525	19.71	21					
				846.5 826.5	20625	19.64	21					
		25	RB	826.5 836.5	20425	19.76 19.77	21					
		25	ND	836.5 846.5	20525		21					
				20625	19.74	21	U-Z					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 34 of 240

	FDD Band 5 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				825.5	20415	21.79	23	0				
			0	836.5	20525	21.74	23	0				
				847.5	20635	21.68	23	0				
				825.5	20415	21.83	23	0				
		1 RB	7	836.5	20525	21.98	23	0				
				847.5	20635	21.73	23	0				
				825.5	20415	21.75	23	0				
			14	836.5	20525	21.80	23	0				
				847.5	20635	21.67	23	0				
				825.5	20415	20.77	22	0-1				
	QPSK		0	836.5	20525	20.88	22	0-1				
				847.5	20635	20.68	22	0-1				
				825.5	20415	20.86	22	0-1				
		8 RB	4	836.5	20525	20.85	22	0-1				
				847.5	20635	20.66	22	0-1				
				825.5	20415	20.83	22	0-1				
			7	836.5	20525	20.77	22	0-1				
				847.5	20635	20.60	22	0-1				
				825.5	20415	20.78	22	0-1				
		15	RB	836.5	20525	21.20	22	0-1				
3				847.5	20635	20.71	22	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1				
				825.5	20415	20.86	22					
			0	836.5	20525	21.08	22					
				847.5	20635	20.63	22	ł				
			_	825.5	20415	21.35	22					
		1 RB	7	836.5	20525	21.03	22					
				847.5	20635	21.27	22					
				825.5	20415	21.00	22	ł				
			14	836.5	20525	20.88	22	ł				
				847.5	20635	20.94	22					
				825.5	20415	19.87	21					
	16-QAM		0	836.5	20525	19.93	21					
				847.5	20635	19.91	21					
		0.55	,	825.5	20415	19.93	21					
		8 RB	4	836.5	20525	20.00	21					
				847.5	20635	19.77	21					
			7	825.5	20415	19.96	21					
			7	836.5	20525	19.96	21					
				847.5	20635	19.73	21					
		4-	DD	825.5	20415	20.04	21					
		15	RB	836.5	20525	19.82	21	0-2				
			847.5	20635	19.74	21	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 35 of 240

	FDD Band 5 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
		1 RB	0	824.7	20407	21.86	23	0				
				836.5	20525	21.84	23	0				
				848.3	20643	21.67	23	0				
			2	824.7	20407	21.50	23	0				
				836.5	20525	21.45	23	0				
				848.3	20643	21.22	23	0				
			5	824.7	20407	21.93	23	0				
				836.5	20525	21.87	23	0				
				848.3	20643	21.55	23	0				
		3 RB	0	824.7	20407	21.72	22	0				
	QPSK			836.5	20525	21.75	22	0				
				848.3	20643	21.62	22	0				
			2	824.7	20407	21.65	22	0				
				836.5	20525	21.64	22	0				
				848.3	20643	21.38	22	0				
			3	824.7	20407	21.84	22	0				
				836.5	20525	21.75	22	0				
				848.3	20643	21.58	22	0				
		6RB		824.7	20407	20.75	22	0-1				
				836.5	20525	20.79	22	0-1				
1.4				848.3	20643	20.59	22	0-1				
1	16-QAM	1 RB	0	824.7	20407	21.00	22	0-1				
				836.5	20525	21.04	22	0-1				
				848.3	20643	20.82	22	0-1				
			2	824.7	20407	20.50	22	0-1				
				836.5	20525	20.38	22	0-1				
				848.3	20643	20.48	22	0-1				
			5	824.7	20407	21.44	22	0-1				
				836.5	20525	21.41	22	0-1				
				848.3	20643	21.12	22	0-1				
		3 RB	0	824.7	20407	20.82	21	0-1				
				836.5	20525	20.97	21	0-1				
				848.3	20643	20.55	21	0-1				
			2	824.7	20407	20.79	21	0-1				
				836.5	20525	20.83	21	0-1				
				848.3	20643	20.50	21	0-1				
			3	824.7	20407	20.91	21	0-1				
				836.5	20525	20.92	21	0-1				
				848.3	20643	20.64	21	0-1				
		6RB		824.7	20407	19.92	21	0-2				
				836.5	20525	19.87	21	0-2				
				848.3	20643	19.71	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 36 of 240

FDD Band 5 (Reduced power)										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
		1 RB	0	829	20450	17.45	18	0		
				836.5	20525	17.48	18	0		
				844	20600	17.66	18	0		
			25	829	20450	17.39	18	0		
				836.5	20525	17.43	18	0		
				844	20600	17.44	18	0		
			49	829	20450	17.37	18	0		
				836.5	20525	17.55	18	0		
				844	20600	17.17	18	0		
			0	829	20450	16.59	17	0-1		
	QPSK			836.5	20525	16.58	17	0-1		
				844	20600	16.51	17	0-1		
			12	829	20450	16.52	17	0-1		
		25 RB		836.5	20525	16.56	17	0-1		
				844	20600	16.46	17	0-1		
			25	829	20450	16.53	17	0-1		
				836.5	20525	16.62	17	0-1		
				844	20600	16.45	17	0-1		
		50RB		829	20450	16.45	17	0-1		
				836.5	20525	16.47	17	0-1		
10				844	20600	16.50	17	0-1		
	16-QAM	1 RB	0	829	20450	16.81	17	0-1		
				836.5	20525	16.83	17	0-1		
				844	20600	16.66	17	0-1		
			25	829	20450	16.70	17	0-1		
				836.5	20525	16.97	17	0-1		
				844	20600	16.68	17	0-1		
			49	829	20450	16.84	17	0-1		
				836.5	20525	16.91	17	0-1		
				844	20600	16.82	17	0-1		
		25 RB	0	829	20450	15.64	16	0-2		
				836.5	20525	15.68	16	0-2		
				844	20600	15.62	16	0-2		
			12	829	20450	15.56	16	0-2		
				836.5	20525	15.61	16	0-2		
				844	20600	15.66	16	0-2		
			25	829	20450	15.55	16	0-2		
				836.5	20525	15.68	16	0-2		
				844	20600	15.61	16	0-2		
		500RB		829	20450	15.61	16	0-2		
				836.5	20525	15.56	16	0-2		
				844	20600	15.56	16	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 37 of 240

BW(Mhz) Modulation RB Size RB Offset Frequency (MHz) Channel power (dBm) Target power (dBm) Tolerance (d				FDD Ba	and 5 (Reduced	d power)			
O 836.5 20525 17.26 18 0 846.5 20625 17.15 18 0 826.5 20425 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.31 18 0 826.5 20525 17.48 18 0 826.5 20525 17.49 18 0 826.5 20525 17.08 18 0 826.5 20525 17.08 18 0 826.5 20525 16.44 17 0-1 826.5 20525 16.45 17 0-1 826.5 20525 16.43 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.33 17 0-1 826.5 20525 16.34 17 0-1 826.5 20525 16.37 17 0-1 826.5 20525 16.37 17 0-1 826.5 20525 16.44 17 0-1 826.5 20525 16.44 17 0-1 826.5 20525 16.49 17 0-1 826.5 20525 16.49 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 16.50 17 0-1 826.5 20525 15.50 16 0-2 826.5 20525 15.50 16	BW(Mhz)	Modulation	RB Size	RB Offset		Channel		Power + Max. Tolerance	Allowed per
A SAGE S 20625 17.15 18 0 0 826.5 20425 17.24 18 0 0 826.5 20425 17.24 18 0 0 826.5 20625 17.31 18 0 0 826.5 20625 17.31 18 0 0 826.5 20625 17.31 18 0 0 826.5 20625 17.77 18 0 0 826.5 20625 17.02 18 0 0 826.5 20625 17.08 18 0 0 826.5 20625 17.08 18 0 0 826.5 20625 17.08 18 0 0 826.5 20625 17.08 18 0 0 826.5 20625 16.44 17 0-1 826.5 20625 16.45 17 0-1 846.5 20625 16.45 17 0-1 846.5 20625 16.45 17 0-1 826.5 20625 16.43 17 0-1 826.5 20625 16.43 17 0-1 826.5 20625 16.33 17 0-1 826.5 20625 16.33 17 0-1 826.5 20625 16.33 17 0-1 826.5 20625 16.33 17 0-1 826.5 20625 16.33 17 0-1 826.5 20625 16.33 17 0-1 826.5 20625 16.34 17 0-1 826.5 20625 16.34 17 0-1 826.5 20625 16.34 17 0-1 826.5 20625 16.34 17 0-1 826.5 20625 16.34 17 0-1 826.5 20625 16.34 17 0-1 826.5 20625 16.44 17 0-1 826.5 20625 16.69					826.5	20425	17.14	18	0
1 RB				0	836.5	20525	17.26	18	0
APSK 1 RB					846.5	20625	17.15	18	0
PSK Record Recor					826.5	20425	17.24	18	0
APSK QPSK			1 RB	12	836.5	20525	17.31	18	0
QPSK					846.5	20625	17.17	18	0
QPSK QPSK 0 846.5 20625 16.44 17 0-1 846.5 20625 16.43 17 0-1 846.5 20625 16.43 17 0-1 846.5 20625 16.43 17 0-1 846.5 20625 16.49 17 0-1 0-1 826.5 20625 16.49 17 0-1 0-1 826.5 20625 16.33 17 0-1 826.5 20625 16.33 17 0-1 13 836.5 20625 16.33 17 0-1 13 836.5 20625 16.33 17 0-1 826.5 20425 16.33 17 0-1 826.5 20425 16.44 17 0-1 826.5 20425 16.44 17 0-1 826.5 20425 16.44 17 0-1 826.5 20425 16.44 17 0-1 826.5 20425 16.44 17 0-1 826.5 20425 16.44 17 0-1 826.5 20425 16.44 17 0-1 826.5 20425 16.49 17 0-1 826.5 20425 16.38 17 0-1 826.5 20425 16.40 17 0-1 826.5 20425 16.41 17 0-1 826.5 20425 16.48 17 0-1 826.5 20425 16.69 17 0-1 826.5 20425 16.68 17 0-1 826.5 20425 16.69 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 16 0-2 826.5 20425 16.90 16 0-2 826.5 20425 16.90 16 0-2 826.5 20425 16.90 16 0-2 826.5 20425 16.90 16 0-2 826.5 20425 16.90 16 0-2 826.5 20425 16.90 16 0-2 826.5 20425 16.90 17 0-1 826.5 826.5 20425 16.90 17 0-1 826.5 826.5 20425 16.90 17 0-1 826.5 826.5 20425 16.90 17 0-1 826.5 826.5 20425 16.90 17 0-1 18 18 18 18 0 20 20 20 20 20 20 20 20 20					826.5	20425	17.24	18	0
QPSK A				24	836.5	20525	17.13	18	0
PSK 12 RB					846.5	20625	17.08		0
12 RB 12 RB 846.5 20625 16.43 17					826.5	20425	16.44	17	0-1
12 RB		QPSK		0	836.5	20525	16.45		0-1
12 RB					846.5	20625	16.43	17	0-1
846.5 20625 16.31 17 0-1 826.5 20425 16.43 17 0-1 826.5 20425 16.38 17 0-1 826.5 20425 16.32 17 0-1 826.5 20425 16.32 17 0-1 826.5 20425 16.47 17 0-1 826.5 20425 16.47 17 0-1 826.5 20425 16.47 17 0-1 826.5 20425 16.49 17 0-1 826.5 20625 16.29 17 0-1 826.5 20425 16.79 17 0-1 826.5 20525 16.48 17 0-1 826.5 20525 16.96 17 0-1 826.5 20525 16.96 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20425 16.90 17 0-1 826.5 20525 16.63 17 0-1 826.5 20525 16.24 17 0-1 826.5 20525 16.20 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 15.50 16 0-2 826.5 20425 15.69 16 0-2 826.5 20425 15.69 16 0-2 826.5 20425 15.44 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2							 	17	0-1
1 RB 12 826.5 20425 16.43 17 0-1 1 RB 12 836.5 20525 16.32 17 0-1 1 RB 12 836.5 20525 16.32 17 0-1 24 836.5 20525 16.48 17 0-1 25 RB 16-QAM 1 RB 17 0-1 1 RB 18 18 18 18 17 0-1 1 RB 19 18 18 18 18 17 0-1 1 RB 19 18 18 18 18 18 17 0-1 1 RB 19 18 19 18 18 18 18 17 0-1 1 RB 19 18 19 18 18 18 18 18 17 0-1 1 RB 19 18 19 18 18 18 18 18 17 0-1 1 RB 19 18 19 18 18 18 18 18 18 19 19 19 18 18 18 19 19 18 18 18 18 19 18 18 18 19 19 18 18 18 19 18 18 18 19 18 19 18 18 19 18 18 19 18 18 19 18 18 19 18 18 19 18 19 18 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 19 18 18 18 19 18 18 18 18 18 18 18 18 18 18 18 18 18			12 RB	6					
13 836.5 20525 16.38 17 0-1 846.5 20625 16.32 17 0-1 826.5 20425 16.47 17 0-1 836.5 20525 16.44 17 0-1 846.5 20625 16.29 17 0-1 846.5 20625 16.29 17 0-1 846.5 20625 16.29 17 0-1 846.5 20625 16.48 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.63 17 0-1 846.5 20625 16.63 17 0-1 846.5 20625 16.24 17 0-1 846.5 20625 16.24 17 0-1 846.5 20625 16.36 17 0-1 846.5 20625 16.36 17 0-1 846.5 20625 15.50 16 0-2 846.5 20625 15.50 16 0-2 846.5 20625 15.50 16 0-2 846.5 20625 15.44 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.44 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.44 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.44 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2									
1 RB 12 836.5 20625 16.32 17 0-1 1 RB 12 836.5 20425 16.44 17 0-1 1 RB 12 836.5 20525 16.48 17 0-1 846.5 20625 16.99 17 0-1 846.5 20625 16.99 17 0-1 846.5 20625 16.99 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.96 17 0-1 846.5 20625 16.63 17 0-1 846.5 20625 16.63 17 0-1 846.5 20625 16.36 17 0-1 846.5 20625 16.36 17 0-1 846.5 20625 16.36 17 0-1 846.5 20625 15.59 16 0-2 846.5 20625 15.50 16 0-2 846.5 20625 15.50 16 0-2 846.5 20625 15.44 16 0-2 846.5 20625 15.44 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.44 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.56 16 0-2 846.5 20625 15.57 16 0-2									ł
16-QAM 16-QAM 18-QAM 18-QAM 18-QAM 18-QAM 25-RB 25-				13					
16-QAM 25RB 836.5 20525 16.44 17 0-1 846.5 20625 16.29 17 0-1 826.5 20425 16.79 17 0-1 846.5 20525 16.48 17 0-1 846.5 20525 16.48 17 0-1 846.5 20525 16.48 17 0-1 846.5 20525 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.63 17 0-1 826.5 20425 16.63 17 0-1 826.5 20425 16.63 17 0-1 826.5 20425 16.63 17 0-1 826.5 20425 16.63 17 0-1 826.5 20425 16.63 17 0-1 826.5 20425 16.60 17 0-1 826.5 20425 16.36 17 0-1 826.5 20425 15.69 16 0-2 826.5 20425 15.46 16 0-2 826.5 20425 15.46 16 0-2 826.5 20425 15.46 16 0-2 826.5 20425 15.48 16 0-2 826.5 20425 15.44 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.57 16 0-2									
16-QAM 1 RB 1 RB									
1 RB 12 826.5 20425 16.79 17 0-1 846.5 20625 16.48 17 0-1 826.5 20425 16.96 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.99 17 0-1 826.5 20425 16.63 17 0-1 826.5 20625 16.63 17 0-1 826.5 20425 16.78 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20425 15.69 16 0-2 826.5 20425 15.50 16 0-2 826.5 20425 15.46 16 0-2 826.5 20425 15.44 16 0-2 826.5 20425 15.62 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.53 16 0-2 826.5 20425 15.53 16 0-2 826.5 20425 15.53 16 0-2			25	RB					
1 RB 12 836.5 20525 16.48 17 0-1 826.5 20425 16.96 17 0-1 826.5 20425 16.99 17 0-1 826.5 20525 16.63 17 0-1 826.5 20525 16.63 17 0-1 826.5 20525 16.63 17 0-1 826.5 20525 16.24 17 0-1 826.5 20425 16.78 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 16.36 17 0-1 826.5 20525 15.50 16 0-2 826.5 20525 15.50 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.57 16 0-2	5			1					ł
1 RB							1		
1 RB 12 826.5 20425 16.99 17 0-1 836.5 20525 16.63 17 0-1 846.5 20625 16.24 17 0-1 826.5 20425 16.78 17 0-1 826.5 20525 16.20 17 0-1 846.5 20525 16.20 17 0-1 846.5 20525 16.36 17 0-1 846.5 20525 15.69 16 0-2 836.5 20525 15.51 16 0-2 846.5 20625 15.50 16 0-2 846.5 20525 15.46 16 0-2 826.5 20425 15.46 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.44 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.56 16 0-2 826.5 20525 15.57 16 0-2				0					
1 RB 12 836.5 20525 16.63 17 0-1 846.5 20625 16.24 17 0-1 826.5 20425 16.78 17 0-1 846.5 20625 16.20 17 0-1 846.5 20625 16.36 17 0-1 846.5 20625 15.69 16 0-2 826.5 20425 15.50 16 0-2 846.5 20625 15.50 16 0-2 826.5 20425 15.46 16 0-2 826.5 20425 15.44 16 0-2 12 RB 6 836.5 20525 15.56 16 0-2 826.5 20425 15.60 16 0-2 826.5 20425 15.60 16 0-2 826.5 20425 15.44 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.53 16 0-2 826.5 20425 15.53 16 0-2									ł
16-QAM			4 DD	40					
16-QAM 16-QAM 16-QAM 1826.5			IRD	12					
16-QAM 16-QAM 16-QAM 16-QAM 16-QAM 10 10 10 10 10 10 10 10 10 1									
16-QAM 16-QAM 16-QAM 16-QAM 10 10 11 11 11 11 11 11 11 1				24					ł
16-QAM 0 826.5 20425 15.69 16 0-2 836.5 20525 15.51 16 0-2 846.5 20625 15.50 16 0-2 826.5 20425 15.46 16 0-2 826.5 20425 15.48 16 0-2 826.5 20525 15.48 16 0-2 826.5 20625 15.44 16 0-2 826.5 20425 15.62 16 0-2 826.5 20425 15.62 16 0-2 826.5 20425 15.62 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.57 16 0-2				24					ł
16-QAM 10 836.5 20525 15.51 16 0-2 846.5 20625 15.50 16 0-2 826.5 20425 15.46 16 0-2 836.5 20525 15.48 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.62 16 0-2 826.5 20525 15.56 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.57 16 0-2 826.5 20425 15.57 16 0-2									
846.5 20625 15.50 16 0-2 826.5 20425 15.46 16 0-2 836.5 20525 15.48 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.62 16 0-2 826.5 20525 15.56 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.57 16 0-2 826.5 20525 15.57 16 0-2		16-OAM		RB Offset (MHz)					
12 RB 6 826.5 20425 15.46 16 0-2 836.5 20525 15.48 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.62 16 0-2 836.5 20525 15.56 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.56 16 0-2 826.5 20425 15.53 16 0-2 25RB 836.5 20525 15.57 16 0-2		10 QAIVI							
12 RB 6 836.5 20525 15.48 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.62 16 0-2 13 836.5 20525 15.56 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.53 16 0-2 25RB 836.5 20525 15.57 16 0-2									
846.5 20625 15.44 16 0-2 826.5 20425 15.62 16 0-2 13 836.5 20525 15.56 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.53 16 0-2 25RB 836.5 20525 15.57 16 0-2			12 RB	6					
826.5 20425 15.62 16 0-2 836.5 20525 15.56 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.53 16 0-2 25RB 836.5 20525 15.57 16 0-2									1
13 836.5 20525 15.56 16 0-2 846.5 20625 15.44 16 0-2 826.5 20425 15.53 16 0-2 25RB 836.5 20525 15.57 16 0-2									0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
846.5 20625 15.44 16 0-2 826.5 20425 15.53 16 0-2 25RB 836.5 20525 15.57 16 0-2				13					
826.5 20425 15.53 16 0-2 25RB 836.5 20525 15.57 16 0-2									3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1
25RB 836.5 20525 15.57 16 0-2									
			25	RB					
							15.49	16	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 38 of 240

	FDD Band 5 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				825.5	20415	17.40	18	0				
			0	836.5	20525	17.49	18	0				
				847.5	20635	17.36	18	0				
				825.5	20415	17.55	18	0				
		1 RB	7	836.5	20525	17.55	18	0				
				847.5	20635	17.45	18	0				
				825.5	20415	17.46	18	0				
			14	836.5	20525	17.47	18	0				
				847.5	20635	17.44	18	0				
				825.5	20415	16.57	17	0-1				
	QPSK		0	836.5	20525	16.59	17	0-1				
				847.5	20635	16.49	17	0-1				
				825.5	20415	16.62	17	0-1				
		8 RB	4	836.5	20525	16.55	17	0-1				
				847.5	20635	16.52	17	0-1				
				825.5	20415	16.56	17	0-1				
			7	836.5	20525	16.57	17	0-1				
				847.5	20635	16.37	17	0-1				
				825.5	20415	16.49	17	0-1				
		15	RB	836.5	20525	16.60	17	0-1				
3				847.5	20635	16.44	17	0-1 0-1				
				825.5	20415	16.59	17					
			0	836.5	20525	16.75	17					
				847.5	20635	16.67	17					
			_	825.5	20415	16.89	17					
		1 RB	7	836.5	20525	16.99	17					
				847.5	20635	16.86	17					
				825.5	20415	16.79	17					
			14	836.5	20525	16.82	17	•				
				847.5	20635	16.67	17					
	40.0414			825.5	20415	15.60	16					
	16-QAM		0	836.5	20525	15.71	16					
				847.5	20635	15.67	16					
		0 00	4	825.5	20415	15.63	16					
		8 RB	4	836.5	20525	15.66	16	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				847.5	20635	15.56	16					
			7	825.5	20415	15.66	16					
			7	836.5	20525	15.69	16	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
				847.5	20635	15.55	16					
	[4.5	DD	825.5	20415	15.88	16					
	15RB		עט	836.5	20525	15.60	16					
				847.5	20635	15.56	16	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 39 of 240

			FDD Ba	nd 5 (Reduced	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				824.7	20407	17.56	18	0
			0	836.5	20525	17.61	18	0
				848.3	20643	17.37	18	0
				824.7	20407	17.17	18	0
		1 RB	2	836.5	20525	17.13	18	0
				848.3	20643	16.98	18	0
				824.7	20407	17.60	18	0
			5	836.5	20525	17.58	18	0
				848.3	20643	17.37	18	0
				824.7	20407	16.39	17	0
	QPSK		0	836.5	20525	16.43	17	0
				848.3	20643	16.31	17	0
				824.7	20407	16.33	17	0
		3 RB	2	836.5	20525	16.35	17	0
				848.3	20643	16.18	17	0
				824.7	20407	16.53	17	0
			3	836.5	20525	16.49	17	0
				848.3	20643	16.33	17	
				824.7	20407	16.47	17	0-1
		6F	RB	836.5	20525	16.50	17	0-1
1.4			•	848.3	20643	16.36	17	
				824.7	20407	16.87	17	9 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
			0	836.5	20525	16.57	17	
				848.3	20643	16.75	17	
				824.7	20407	16.81	17	
		1 RB	2	836.5	20525	16.46	17	
				848.3	20643	15.93	17	
			_	824.7	20407	16.87	17	
			5	836.5	20525	16.89	17	
				848.3	20643	16.40	17	
	16 0 4 14		_	824.7	20407	15.77	16	
	16-QAM		0	836.5	20525	15.58	16	
				848.3	20643	15.59	16	
		2 DD	2	824.7	20407	15.37	16	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		3 RB	2	836.5	20525	15.59	16	
				848.3	20643	15.43	16	
			3	824.7	20407	15.63	16	
			٥	836.5	20525	15.43 15.45	16	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
				848.3	20643	15.45	16	
		61	RB	824.7	20407	15.62 15.60	16	
			\D	836.5	20525	15.60	16 16	
				848.3	20643	15.58	16	U-Z

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The

Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 40 of 240

			FDD	Band 7 (Full p	ower)							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2510	20850	22.80	23.5	0				
			0	2535	21100	23.14	23.5	0				
				2560	21350	22.96	23.5	0				
				2510	20850	23.24	23.5	0				
		1 RB	50	2535	21100	23.27	23.5	0				
				2560	21350	23.15	23.5	0				
				2510	20850	22.47	23.5	0				
			99	2535	21100	22.70	23.5	0				
				2560	21350	22.57	23.5	0				
				2510	20850	22.28	22.5	0-1				
	QPSK		0	2535	21100	22.36	22.5	0-1				
				2560	21350	22.23	22.5	0-1				
				2510	20850	22.12	22.5	0-1				
		50 RB	25	2535	21100	22.15	22.5	0-1				
				2560	21350	22.06	22.5	0-1				
				2510	20850	22.09	22.5	0-1				
			50	2535	21100	22.22	22.5	0-1				
				2560	21350	22.11	22.5	0-1				
				2510	20850	22.19	22.5	0-1				
		100)RB	2535	21100	22.27	22.5	0-1				
20				2560	21350	22.19	22.5	0-1				
			0	2510	20850	22.09	22.5					
			0	2535	21100	22.12	22.5					
				2560	21350	22.18	22.5					
				2510	20850	22.19	22.5	•				
		1 RB	50	2535	21100	22.23	22.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				2560	21350	22.03	22.5					
				2510	20850	21.47	22.5					
			99	2535	21100	21.77	22.5					
				2560	21350	21.95	22.5					
	46 0 4 14		0	2510	20850	21.28	21.5					
	16-QAM		0	2535	21100	21.33	21.5					
				2560	21350	21.37	21.5					
		50 RB	25	2510	20850	21.14	21.5					
		OU KD	∠5	2535	21100	21.23	21.5					
				2560 2510	21350	21.27	21.5					
			50	2510	20850	21.09	21.5					
			30	2535 2560	21100 21350	21.23	21.5					
						21.18	21.5	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1				
		100	NRR	2510 2535	20850 21100	21.20 21.30	21.5 21.5					
	100	/\U										
L			2560	21350	21.25	21.5	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 41 of 240

	FDD Band 7 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2507.5	20825	23.00	23.5	0				
			0	2535	21100	22.89	23.5	0				
				2562.5	21375	23.25	23.5	0				
				2507.5	20825	22.89	23.5	0				
		1 RB	36	2535	21100	22.81	23.5	0				
				2562.5	21375	22.82	23.5	0				
				2507.5	20825	22.73	23.5	0				
			74	2535	21100	22.55	23.5	0				
				2562.5	21375	23.16	23.5	0				
				2507.5	20825	22.26	22.5	0-1				
	QPSK		0	2535	21100	22.26	22.5	0-1				
				2562.5	21375	22.50	22.5	0-1				
				2507.5	20825	22.11	22.5	0-1				
		36 RB	18	2535	21100	22.08	22.5	0-1				
				2562.5	21375	22.07	22.5	0-1				
				2507.5	20825	22.17	22.5	0-1				
			37	2535	21100	22.12	22.5	0-1				
				2562.5	21375	22.28	22.5					
				2507.5	20825	22.22	22.5					
		75	RB	2535	21100	22.15	22.5					
15			1	2562.5	21375	22.38	22.5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0				
			0	2507.5	20825	22.13	22.5					
			0	2535	21100	21.95	22.5					
				2562.5	21375	22.00	22.5					
		4.00		2507.5	20825	22.46	22.5					
		1 RB	36	2535	21100	22.46	22.5					
				2562.5	21375	22.16	22.5					
			- .	2507.5	20825	21.81	22.5					
			74	2535	21100	21.64	22.5					
				2562.5	21375	22.32	22.5					
	40.001		0	2507.5	20825	21.33	21.5					
	16-QAM		0	2535	21100	21.33	21.5					
				2562.5	21375	21.38	21.5					
		26 DD	10	2507.5	20825	21.21	21.5	-				
		36 RB	18	2535	21100	21.19	21.5	0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1 0-1				
				2562.5	21375	21.16	21.5					
			37	2507.5	20825	21.21	21.5					
			31	2535	21100	21.19	21.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
				2562.5	21375	21.29	21.5					
		75	D R	2507.5	20825	21.20	21.5					
	75	/5	מא	2535	21100	21.20	21.5					
				2562.5	21375	21.28	21.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 42 of 240

			FDD	Band 7 (Full p	ower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2505	20800	23.14	23.5	0
			0	2535	21100	23.22	23.5	0
				2565	21400	23.13	23.5	0
				2505	20800	22.92	23.5	0
		1 RB	25	2535	21100	23.02	23.5	0
				2565	21400	22.97	23.5	0
				2505	20800	22.92	23.5	0
			49	2535	21100	22.94	23.5	0
				2565	21400	23.01	23.5	0
				2505	20800	22.13	22.5	0-1
	QPSK		0	2535	21100	22.21	22.5	0-1
				2565	21400	22.16	22.5	0-1
				2505	20800	22.06	22.5	0-1
		25 RB	12		21100	22.08	22.5	0-1
				2565	21400	22.12	22.5	0-1
				2505	20800	22.06	22.5	0-1
			25	2535	21100	22.07	22.5	0-1
				2565	21400	22.09	22.5	0-1
				2505				0-1
		50	RB	2535				0-1
10				2565				0-1
			0			+		0-1
			0			+		+
								ł
						+		
		1 RB	25			0800 22.42 22.5 1100 22.50 22.5 1400 22.33 22.5 0800 22.12 22.5 1100 22.34 22.5		
					Y Channel power (dBm) Conducted power (dBm) Power + Max. Tolerance (dBm) MPR Allowed p 3GPP(dBm) 20800 23.14 23.5 0 21100 23.22 23.5 0 21400 23.13 23.5 0 20800 22.92 23.5 0 21100 23.02 23.5 0 21400 22.97 23.5 0 21100 22.92 23.5 0 21400 22.94 23.5 0 21400 23.01 23.5 0 21400 23.01 23.5 0 21400 22.13 22.5 0-1 21400 22.13 22.5 0-1 21400 22.16 22.5 0-1 21400 22.06 22.5 0-1 21400 22.08 22.5 0-1 21400 22.07 22.5 0-1 21400 22.09 22.5 0-1 21400<			
						1		ł
			49	(MHz) Chairrel (dBm) power (dBm) Max. Toleran (dBm) 2505 20800 23.14 23.5 2535 21100 23.22 23.5 2505 20800 22.92 23.5 2505 20800 22.92 23.5 2505 20800 22.97 23.5 2505 20800 22.92 23.5 2505 20800 22.92 23.5 2505 20800 22.92 23.5 2505 20800 22.92 23.5 2505 20800 22.92 23.5 2505 20800 22.13 22.5 2505 20800 22.13 22.5 2505 20800 22.16 22.5 2505 20800 22.06 22.5 2535 21100 22.08 22.5 2505 20800 22.06 22.5 2535 21100 22.07 22.5 2505 20800 <td></td> <td>ł</td>		ł		
						+		
	16-QAM		0					Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
						1		
		05.55	40					
		25 RB	12			·		1
			0.5			1		
			25					
			DD					
	50R		KR			+		
				2565	21400	21.25	21.5	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 43 of 240

			FDD	Band 7 (Full p	ower)							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				2502.5	20775	22.85	23.5	0				
			0	2535	21100	22.85	23.5	0				
				2567.5	21425	22.94	23.5	0				
				2502.5	20775	23.01	23.5	0				
		1 RB	12	2535	21100	23.03	23.5	0				
				2567.5	21425	23.12	23.5	0				
				2502.5	20775	22.78	23.5	0				
			24	2535	21100	22.82	23.5	0				
				2567.5	21425	22.84	23.5	0				
				2502.5	20775	22.04	22.5	0-1				
	QPSK		0	2535	21100	22.07	22.5	0-1				
				2567.5	21425	22.08	22.5	0-1				
				2502.5	20775	22.02	22.5	0-1				
		12 RB	6	2535	21100	22.04	22.5	0-1				
				2567.5	21425	22.01	22.5	0-1				
				2502.5	20775	22.03	22.5	0-1				
			13	2535	21100	22.06	22.5	0-1				
				2567.5	21425	21.97	22.5	0-1				
				2502.5	20775	22.01	22.5	0-1				
		25	RB	2535	21100	22.01	22.5	0-1				
5				2567.5	21425	22.00	22.5	0-1 0-1 0-1				
				2502.5	20775	22.15	22.5					
			0	2535	21100	22.36	22.5	+				
				2567.5	21425	22.26	22.5	ł				
				2502.5	20775	22.06	22.5	ł — — — — — — — — — — — — — — — — — — —				
		1 RB	12	2535	21100	22.48	22.5					
				2567.5	21425	22.32	22.5					
				2502.5	20775	22.00	22.5	ł				
			24	2535	21100	22.26	22.5	ł				
				2567.5	21425	21.94	22.5					
	40.044		_	2502.5	20775	21.25	21.5					
	16-QAM		0	2535	21100	21.32	21.5					
				2567.5	21425	21.17	21.5	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-				
		40.55	_	2502.5	20775	21.18	21.5	+				
		12 RB	6	2535	21100	21.12	21.5	1				
				2567.5	21425	21.07	21.5					
			40	2502.5	20775	21.13	21.5	1				
			13	2535	21100	21.19	21.5					
				2567.5	21425	21.00	21.5	+				
		0.5	DD	2502.5	20775	21.14	21.5	+				
	25R		KR	2535	21100	21.16	21.5					
				2567.5	21425	21.13	21.5	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 44 of 240

			FDD Ba	nd 7 (Reduced	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				2510	20850	16.28	17	0
			0	2535	21100	16.42	17	0
				2560	21350	16.38	17	0
				2510	20850	16.69	17	0
		1 RB	50	2535	21100	16.85	17	0
				2560	21350	16.62	17	0
				2510	20850	16.16	17	0
			99	2535	21100	16.01	17	0
				2560	21350	15.96	17	0
				2510	20850	15.93	16	0-1
	QPSK		0	2535	21100	15.98	16	0-1
				2560	21350	15.97	16	0-1
				2510	20850	15.80	16	0-1
		50 RB	25	2535	21100	15.92	16	0-1
				2560	21350	15.79	16	0-1
				2510	20850	15.88	16	0-1
			50	2535	21100	15.76	16	0-1
				2560	21350	15.81	16	0-1
				2510	20850	15.95	16	0-1
		100)RB	2535	21100	15.94	16	0-1
20				2560	21350	15.84	16	0-1
			2510	20850	15.67	16		
			0	2535	21100	15.97	16	
				2560	21350	15.68	16	
				2510	20850	15.70	16	
		1 RB	50	2535	21100	15.95	16	
				2560	21350	15.96	16	
				2510	20850	15.38	16	
			99	2535	21100	15.37	16	
				2560	21350	15.43	16	
	46.0444		_	2510	20850	14.98	15	
	16-QAM		0	2535	21100	14.94	15	
				2560	21350	14.96	15	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-
		E0 DD	0.5	2510	20850	15.00	15	
		50 RB	25	2535	21100	14.95	15	
				2560	21350	14.96	15	
			F^	2510	20850	14.94	15	
			50	2535	21100	14.97	15	
				2560	21350	14.97	15	
		400	NDD	2510	20850	14.96	15	
		100)RB	2535	21100	14.92	15	
				2560	21350	15.00	15	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 240

FDD Band 7 (Reduced power)										
			l DD Ba	ina / (Neducet	power)		Tarret			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				2507.5	20825	16.65	17	0		
			0	2535	21100	16.61	17	0		
				2562.5	21375	16.70	17	0		
				2507.5	20825	16.60	17	0		
		1 RB	36	2535	21100	16.59	17	0		
				2562.5	21375	16.61	17	0		
				2507.5	20825	16.46	17	0		
			74	2535	21100	16.39	17	0		
				2562.5	21375	16.39	17	0		
				2507.5	20825	15.96	16	0-1		
	QPSK		0	2535	21100	16.00	16	0-1		
				2562.5	21375	15.92	16	0-1		
				2507.5	20825	15.85	16	0-1		
		36 RB	18	2535	21100	15.64	16	0-1		
				2562.5	21375	15.77	16	0-1		
				2507.5	20825	15.92	16	0-1		
			37	2535	21100	15.95	16	0-1		
				2562.5	21375	15.87	16	0-1		
				2507.5	20825	15.93	16	0-1		
		75	RB	2535	21100	15.98	16	0-1		
15				2562.5	21375	15.89	16	0-1		
				2507.5	20825	15.87	16	0-1		
			0	2535	21100	15.99	16	0-1		
				2562.5	21375	15.71	16	0-1		
				2507.5	20825	15.93	16	0-1		
		1 RB	36	2535	21100	15.69	16	0-1		
				2562.5	21375	15.91	16	0-1		
				2507.5	20825	15.90	16	0-1		
			74	2535	21100	15.97	16	0-1		
				2562.5	21375	15.46	16	0-1		
				2507.5	20825	14.90	15	0-2		
	16-QAM		0	2535	21100	14.97	15	0-2		
			75RB 0 36 74 0 18	2562.5	21375	14.83	15	0-2		
				2507.5	20825	14.77	15	0-2		
		36 RB	18	2535	21100	14.90	15	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1		
				2562.5	21375	14.92	15	0-2		
				2507.5	20825	15.00	15			
			37	2535	21100	14.96	15	0-2		
				2562.5	21375	14.77	15	0-2		
				2507.5	20825	14.83	15	0-2		
	75RE	RB	2535	21100	14.94	15	0-2			
			2562.5	21375	14.80	15	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 46 of 240

	FDD Band 7 (Reduced power)										
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				2505	20800	16.81	17	0			
			0	2535	21100	16.79	17	0			
				2565	21400	16.74	17	0			
				2505	20800	16.68	17	0			
		1 RB	25	2535	21100	16.84	17	0			
				2565	21400	16.75	17	0			
				2505	20800	16.64	17	0			
			49	2535	21100	16.58	17	0			
				2565	21400	16.70	17				
				2505	20800	15.82	16	0-1			
	QPSK		0	2535	21100	15.96	16	0-1			
				2565	21400	15.88	16				
				2505	20800	15.81	16				
		25 RB	12	2535	21100	15.77	16				
				2565	21400	15.83	16				
				2505	20800	15.86	16				
			25	2535	21100	15.74	16				
				2565	21400	15.81	16				
				2505	20800	15.84	16				
		50	RB	2535	21100	16.00	16				
10			1	2565	21400	15.81	16	0 0 0 0 0 0 0 0 0 0 0 0			
			_	2505	20800	15.84	16	0-1 0-1 0-1 0-1 0-1 0-1 0-1 0-1			
			0	2535	21100	15.93	16				
				2565	21400	15.94	16				
				2505	20800	15.93	16				
		1 RB	25	2535	21100	15.64	16				
				2565	21400	15.94	16				
			40	2505	20800	15.99	16				
			49	2535	21100	15.96	16				
				2565	21400	15.98	16				
	40.0414			2505	20800	14.98	15				
	16-QAM		0	2535	21100	14.94	15				
				2565	21400	14.92	15				
		OF DD	40	2505	20800	14.92	15				
		25 RB	12	2535	21100	14.94	15				
				2565	21400	14.95	15				
			25	2505	20800	14.94	15				
			25	2535	21100	14.95	15				
				2565	21400	14.96	15				
		F0	DD	2505	20800	14.94	15				
	50F	KR	2535	21100	14.97	15					
				2565	21400	14.95	15	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 47 of 240

FDD Band 7 (Reduced power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)			
				2502.5	20775	16.52	17	0			
			0	2535	21100	16.45	17	0			
				2567.5	21425	16.60	17	0			
				2502.5	20775	16.69	17	0			
		1 RB	12	2535	21100	16.77	17	0			
				2567.5	21425	16.65	17	0			
				2502.5	20775	16.60	17	0			
			24	2535	21100	16.48	17	0			
				2567.5	21425	16.49	17	0			
				2502.5	20775	15.76	16	0-1			
	QPSK		0	2535	21100	15.95	16	0-1			
				2567.5	21425	15.77	16	0-1			
				2502.5	20775	15.76	16	0-1			
		12 RB	6	2535	21100	15.87	16	0-1			
				2567.5	21425	15.67	16	0-1			
				2502.5	20775	15.77	16	0-1			
			13	2535	21100	15.62	16	0-1			
				2567.5	21425	15.74	16	0-1			
			•	2502.5	20775	15.73	16	0-1			
		25	RB	2535	21100	15.61	16	0-1			
-				2567.5	21425	15.72	16	0-1			
5				2502.5	20775	15.72	16	0-1			
			0	2535	21100	15.90	16	0-1			
				2567.5	21425	15.91	16	0-1			
				2502.5	20775	15.98	16	0-1			
		1 RB	12	2535	21100	15.96	16	0-1			
				2567.5	21425	15.94	16	0-1			
I				2502.5	20775	15.72	16	0-1			
I			24	2535	21100	15.98	16	0-1			
				2567.5	21425	15.91	16	0-1			
				2502.5	20775	14.87	15	0-2			
	16-QAM		0	2535	21100	14.99	15	0-2			
				2567.5	21425	14.98	15	0-2			
				2502.5	20775	14.90	15	0-2			
		12 RB	6	2535	21100	14.96	15	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-			
				2567.5	21425	14.97	15	0-2			
				2502.5	20775	14.91	15	0-2			
			13	2535	21100	14.97	15	0-2			
				2567.5	21425	14.91	15	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1			
				2502.5	20775	14.70	15				
		25	RB	2535	21100	14.84	15	0-2			
İ			•	2567.5	21425	14.95	15	0-2			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 48 of 240

			FDD E	Band 13 (Full F	Power)							
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
			0	782	23230	22.51	23	0				
		1 RB	25	782	23230	21.71	23	0				
			49	782	23230	21.30	23	0				
	QPSK		0	782	23230	20.92	22	0-1				
		25 RB	12	782	23230	20.79	22	0-1				
			25	782	23230	20.80	22	0-1				
10		50	RB	782	23230	20.89	22	0-1				
10			0	782	23230	21.53	22	0-1				
		1 RB	25	782	23230	20.92	22	0-1				
			49	782	23230	20.20	22	0-1				
	16-QAM		0	782	23230	19.91	21	0-2				
		25 RB	12	782	23230	19.80	21	0-2				
			25	782	23230	19.81	21	0-2				
		-				50	RB	782	23230	19.79	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and www.s

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 49 of 240

FDD Band 13 (Full power)										
			1001		, o mon ,		Toract			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				779.5	23205	21.86	23	0		
			0	782	23230	21.79	23	0		
				784.5	23255	21.57	23	0		
				779.5	23205	21.77	23	0		
		1 RB	12	782	23230	21.72	23	0		
				784.5	23255	21.78	23	0		
				779.5	23205	21.60	23	0		
			24	782	23230	21.61	23	0		
				784.5	23255	21.66	23	0		
				779.5	23205	20.82	22	0-1		
	QPSK		0	782	23230	20.76	22	0-1		
				784.5	23255	20.73	22	0-1		
				779.5	23205	20.81	22			
		12 RB	6	782	23230	20.66	22	0-1		
				784.5	23255	20.70	22	0-1		
				779.5	23205	20.79	22			
			13	782	23230	20.64	22			
				784.5	23255	20.66	22			
				779.5	23205	20.74	22			
		25	RB	782	23230	20.72	22			
5			1	784.5	23255	20.63	22			
				779.5	23205	20.80	22			
			0	782	23230	20.80	22			
				784.5	23255	20.54	22			
		4 DD	40	779.5	23205	20.72	22			
		1 RB	12	782	23230	20.96	22			
				784.5	23255	20.56	22			
			0.4	779.5	23205	20.96	22			
			24	782	23230	21.06	22			
				784.5	23255	20.99 19.97	22 21			
	16-QAM		0	779.5 782	23205 23230	19.97	21			
	10-QAIVI				23255	1	21			
				784.5 779.5	23205	19.72 19.81	21			
		12 RB	6	782	23230	19.81	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1		
		12110		784.5	23255	19.65	21			
				779.5	23205	19.74	21			
			13	782	23230	19.69	21			
				784.5	23255	19.72	21			
				779.5	23205	19.72	21			
		25	RB	782	23230	19.79	21			
			=	784.5	23255	19.73	21			
				. 54.0	20200	10.70		V 2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 240

			FDD Bar	nd 13 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
			0	782	23230	18.28	19	0
		1 RB	25	782	23230	18.23	19	0
			49	782	23230	17.96	19	0
	QPSK		0	782	23230	17.52	18	0-1
		25 RB	12	782	23230	17.46	18	0-1
			25	782	23230	17.45	18	0-1
10		50	RB	782	23230	17.54	18	0-1
10			0	782	23230	17.27	18	0-1
		1 RB	25	782	23230	17.22	18	0-1
			49	782	23230	17.14	18	0-1
	16-QAM		0	782	23230	16.53	17	0-2
		25 RB	12	782	23230	16.50	17	0-2
			25	782	23230	16.54	(dBm) 19 0 19 0 19 0 18 0-1 18 0-1 18 0-1 18 0-1 18 0-1 18 0-1 18 0-1 17 0-2	0-2
		50	RB	782	23230	15.58	17	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 51 of 240

FDD Band 13 (Reduced power)										
			ואט טט ו	ia 13 (ixeduce	a power)		Tanant			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				779.5	23205	18.25	19	0		
			0	782	23230	18.18	19	0		
				784.5	23255	18.04	19	0		
				779.5	23205	18.27	19	0		
		1 RB	12	782	23230	18.22	19	0		
				784.5	23255	18.25	19	0		
				779.5	23205	18.06	19	0		
			24	782	23230	18.01	19	0		
				784.5	23255	18.18	19	0		
				779.5	23205	17.46	18	0-1		
QPSK	QPSK		0	782	23230	17.34	18	0-1		
				784.5	23255	17.34	18	0-1		
				779.5	23205	17.40	18	0-1		
		12 RB	6	782	23230	17.29	18	0-1		
				784.5	23255	17.29	18	0-1		
				779.5	23205	17.36	18	0-1		
			13	782	23230	17.21	18	0-1		
				784.5	23255	17.20	18	0-1		
				779.5	23205	17.39	18			
		25	RB	782	23230	17.28	18			
5			T	784.5	23255	17.22	18			
				779.5	23205	17.59	18			
			0	782	23230	17.74	18			
				784.5	23255	17.68	18			
		4.00	40	779.5	23205	17.58	18			
		1 RB	12	782	23230	17.77	18			
				784.5	23255	17.76	18			
			24	779.5	23205	17.27	18			
			24	782	23230	17.51	18			
				784.5 779.5	23255	17.31 16.57	18 17			
	16-QAM		0	782	23205 23230	16.50	17			
	10-QAIVI		0							
				784.5 779.5	23255	16.40 16.56	17 17			
		12 RB	6	782	23230	16.41	17	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0-1 0-1 0-		
		12 110	l	784.5	23255	16.37	17			
				779.5	23205	16.44	17			
			13	782	23230	16.48	17	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-1		
			"	784.5	23255	16.39	17			
			I	779.5	23205	16.44	17			
		25	RB	782	23230	16.45	17			
	25	=	784.5	23255	16.30	17				
				. 54.0	20200	. 5.55		<u> </u>		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 52 of 240

	FDD Band 17 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				709	23780	22.19	23	0				
			0	710	23790	21.92	23	0				
				711	23800	21.97	23	0				
				709	23780	21.91	23	0				
		1 RB	25	710	23790	21.90	23	0				
				711	23800	22.03	23	0				
				709	23780	22.02	23	0				
			49	710	23790	22.04	23	0				
				711	23800	21.96	23	0				
				709	23780	21.05	22	0-1				
	QPSK		0	710	23790	20.97	22	0-1				
				711	23800	20.98	22	0-1				
				709	23780	21.02	22	0-1				
		25 RB	12	710	23790	20.94	22	0-1				
				711	23800	20.96	22	0-1				
				709	23780	21.00	22	0-1				
			25	710	23790	20.99	22	0-1				
				711	23800	21.01	22	0-1				
				709	23780	21.00	22	0-1				
		50	RB	710	23790	21.03	22	0-1				
10			1	711	23800	21.02	22	0-1				
				709	23780	21.25	22	0-1				
			0	710	23790	21.06	22	0-1				
				711	23800	21.05	22	0-1				
		4 DD	25	709	23780	20.92	22	0-1				
		1 RB	25	710	23790	20.91	22	0-1				
				711	23800	21.08	22	0-1				
			49	709	23780	21.33	22 22	0-1 0-1				
			49	710 711	23790 23800	21.12 20.94	22	0-1				
				711			21					
	16-QAM		0	710	23780 23790	20.06 20.13	21	0-2 0-2				
	10 QAIVI			710	23800	20.13	21	0-2				
				709	23780	20.16	21	0-2				
		25 RB	12	710	23790	20.04	21	0-2				
		20110	'-	711	23800	20.08	21	0-2				
				709	23780	20.09	21	0-2				
			25	710	23790	20.09	21	0-2				
				710	23800	20.03	21	0-2				
				709	23780	20.03	21	0-2				
		50	RB	710	23790	20.08	21	0-2				
				711	23800	20.06	21	0-2				
				_0000	_0.00		<u> </u>					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 53 of 240

	FDD Band 17 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				706.5	23755	21.90	23	0				
			0	710	23790	21.77	23	0				
				713.5	23825	21.73	23	0				
				706.5	23755	21.93	23	0				
		1 RB	12	710	23790	21.84	23	0				
				713.5	23825	21.98	23	0				
				706.5	23755	21.70	23	0				
			24	710	23790	21.78	23	0				
				713.5	23825	21.93	23	0				
				706.5	23755	21.03	22	0-1				
	QPSK		0	710	23790	20.95	22	0-1				
				713.5	23825	20.95	22	0-1				
				706.5	23755	21.03	22	0-1				
		12 RB	6	710	23790	20.91	22	0-1				
				713.5	23825	20.94	22	0-1				
				706.5	23755	20.96	22	0-1				
			13	710	23790	20.98	22	0-1				
				713.5	23825	20.94	22	0-1				
				706.5	23755	20.95	22	0-1				
		25	RB	710	23790	20.95	22	0-1				
5				713.5	23825	20.95	22	0-1				
				706.5	23755	21.11	22	0-1				
			0	710	23790	21.00	22	0-1				
				713.5	23825	21.12	22	0-1				
				706.5	23755	21.44	22	0-1				
		1 RB	12	710	23790	21.20	22	0-1				
				713.5	23825	20.83	22	0-1				
				706.5	23755	21.49	22	0-1				
			24	710	23790	21.04	22	0-1				
				713.5	23825	20.66	22	0-1				
			_	706.5	23755	20.06	21	0-2				
	16-QAM		0	710	23790	20.00	21					
				713.5	23825	19.94	21					
		40.77	_	706.5	23755	20.08	21					
		12 RB	6	710	23790	20.00	21					
				713.5	23825	19.94	21					
			4.5	706.5	23755	19.98	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1				
			13	710	23790	20.01	21					
				713.5	23825	20.03	21					
				706.5	23755	20.05	21					
		25	RB	710	23790	20.00	21					
				713.5	23825	19.91	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 240

			FDD Bar	nd 17 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				709	23780	20.48	21	0
			0	710	23790	20.37	21	0
				711	23800	20.27	21	0
				709	23780	20.44	21	0
		1 RB	25	710	23790	20.43	21	0
				711	23800	20.35	21	0
				709	23780	20.46	21	0
			49	710	23790	20.39	21	0
				711	23800	20.25	21	0
				709	23780	19.63	20	0-1
	QPSK		0	710	23790	19.56	20	0-1
				711	23800	19.52	20	0-1
				709	23780	19.61	20	0-1
		25 RB	12	710	23790	19.57	20	0-1
				711	23800	19.54	20	0-1
				709	23780	19.62	20	0-1
			25	710	23790	19.53	20	0-1
				711	23800	19.55	20	0-1
				709	23780	19.61	20	0-1
		50	RB	710	23790	19.62	20	0-1
10			•	711	23800	19.59	20	0-1
				709	23780	19.44	20	0-1
			0	710	23790	19.61	20	0-1
				711	23800	19.88	20	0-1
				709	23780	19.51	20	0-1
		1 RB	25	710	23790	19.61	20	0-1
				711	23800	20.00	20	0-1
				709	23780	19.89	20	0-1
			49	710	23790	19.65	20	0-1
				711	23800	19.92	20	0-1
	40.0414			709	23780	18.62	19	0-2
	16-QAM		0	710	23790	18.59	19	0-2
				711	23800	18.62	19	0-2
		0E DD	40	709	23780	18.57	19	0-2
		25 RB	12	710	23790	18.57	19	0-2
				711	23800	18.54	19	0-2
			25	709	23780	18.51	19	0-2
			25	710	23790	18.69	19	0-2
				711	23800	18.61	19	0-2
		FΛ	DD	709	23780	18.68	19	0-2
		50	עט	710	23790	18.61	19	0-2
		50RB		711	23800	18.54	19	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 240

			FDD Bar	nd 17 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				706.5	23755	20.32	21	0
			0	710	23790	20.20	21	0
				713.5	23825	20.21	21	0
				706.5	23755	20.40	21	0
		1 RB	12	710	23790	20.34	21	0
				713.5	23825	20.37	21	0
				706.5	23755	20.32	21	0
			24	710	23790	20.29	21	0
				713.5	23825	20.27	21	0
				706.5	23755	19.55	20	0-1
	QPSK		0	710	23790	19.54	20	0-1
				713.5	23825	19.53	20	0-1
				706.5	23755	19.50	20	0-1
		12 RB	6	710	23790	19.50	20	0-1
				713.5	23825	19.47	20	0-1
				706.5	23755	19.59	20	0-1
			13	710	23790	19.54	20	0-1
				713.5	23825	19.48	20	0-1
				706.5	23755	19.54	20	0-1
		25	RB	710	23790	19.49	20	0-1
5			•	713.5	23825	19.52	20	0-1
				706.5	23755	19.58	20	0-1
			0	710	23790	19.81	20	0-1
				713.5	23825	19.42	20	0-1
				706.5	23755	19.76	20	0-1
		1 RB	12	710	23790	19.91	20	0-1
				713.5	23825	19.83	20	0-1
				706.5	23755	19.66	20	0-1
			24	710	23790	19.87	20	0-1
				713.5	23825	19.82	20	0-1
	40.0444		_	706.5	23755	18.66	19	0-2
	16-QAM		0	710	23790	18.58	19	0-2
				713.5	23825	18.53	19	0-2
		10 00	_	706.5	23755	18.56	19	0-2
		12 RB	6	710	23790	18.55	19	0-2
				713.5	23825	18.54	19	0-2
			10	706.5	23755	18.63	19	0-2
			13	710 710 F	23790	18.55	19	0-2
				713.5	23825	18.64	19	0-2
		0.5	DD	706.5	23755	18.56	19	0-2
		25	RB	710 712 F	23790	18.59	19	0-2
				713.5	23825	18.56	19	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 56 of 240

			FDD E	Band 26 (Full p	oower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				822.5	26825	21.50	23	0
			0	831.5	26865	21.44	23	0
				841.5	26965	21.61	23	0
				822.5	26825	21.32	23	0
		1 RB	36	831.5	26865	21.37	23	0
				841.5	26965	21.33	23	0
				822.5	26825	21.31	23	0
			74	831.5	26865	21.30	23	0
				841.5	26965	21.22	23	0
				822.5	26825	20.79	22	0-1
	QPSK		0	831.5	26865	20.76	22	0-1
				841.5	26965	20.71	22	0-1
				822.5	26825	20.54	22	0-1
		36 RB	18	831.5	26865	20.55	22	0-1
				841.5	26965	20.55	22	0-1
				822.5	26825	20.71	22	0-1
			37	831.5	26865	20.70	22	0-1
				841.5	26965	20.58	22	0-1
				822.5	26825	20.65	22	0-1
		75	RB	831.5	26865	20.67	22	0-1
15			•	841.5	26965	20.60	22	0-1
				822.5	26825	20.93	22	0-1
			0	831.5	26865	20.85	22	0-1
				841.5	26965	20.91	22	0-1
				822.5	26825	20.32	22	0-1
		1 RB	36	831.5	26865	21.03	22	0-1
				841.5	26965	20.46	22	0-1
			- .	822.5	26825	20.55	22	0-1
			74	831.5	26865	20.31	22	0-1
				841.5	26965	20.19	22	0-1
	16 0 4 14		_	822.5	26825	19.91	21	0-2
	16-QAM		0	831.5	26865	19.87	21	0-2
				841.5	26965	19.78	21	0-2
		26 DD	10	822.5	26825	19.69	21	0-2
		36 RB	18	831.5	26865	19.75	21	0-2
				841.5	26965	19.56	21	0-2
			37	822.5	26825	19.76	21	0-2
			31	831.5	26865	19.70	21	0-2
				841.5	26965	19.63	21	0-2
		75	RB	822.5	26825	19.83	21	0-2
		/5	ND	831.5	26865	19.85	21	0-2
				841.5	26965	19.80	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this online unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 57 of 240

			FDD E	Band 26 (Full p	oower)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				820	26800	21.61	23	0
			0	831.5	26865	21.66	23	0
				844	26990	21.69	23	0
				820	26800	21.45	23	0
		1 RB	25	831.5	26865	21.54	23	0
				844	26990	21.62	23	0
				820	26800	21.51	23	0
			49	831.5	26865	21.58	23	0
				844	26990	21.38	23	0
				820	26800	20.67	22	0-1
	QPSK		0	831.5	26865	20.74	22	0-1
				844	26990	20.76	22	0-1
				820	26800	20.66	22	0-1
		25 RB	12	831.5	26865	20.69	22	0-1
				844	26990	20.55	22	0-1
				820	26800	20.69	22	0-1
			25	831.5	26865	20.75	22	0-1
				844	26990	20.55	22	0-1
				820	26800	20.72	22	0-1
		50	RB	831.5	26865	20.74	22	0-1
10				844	26990	20.64	22	0-1
				820	26800	20.78	22	0-1
			0	831.5	26865	21.21	22	0-1
				844	26990	20.67	22	0-1
				820	26800	20.83	22	0-1
		1 RB	25	831.5	26865	21.11	22	0-1
				844	26990	20.73	22	0-1
				820	26800	20.93	22	0-1
			49	831.5	26865	20.70	22	0-1
				844	26990	20.83	22	0-1
	40.0414			820	26800	19.84	21	0-2
	16-QAM		0	831.5	26865	19.82	21	0-2
				844	26990	19.71	21	0-2
		0E DD	40	820	26800	19.77	21	0-2
		25 RB	12	831.5	26865	19.72	21	0-2
				844	26990	19.77	21	0-2
			25	820	26800	19.76	21	0-2
			25	831.5	26865	19.68	21	0-2
				844	26990	19.69	21	0-2
		E0	DD	820	26800	19.79	21	0-2
		50	RB	831.5	26865	19.76	21	0-2
				844	26990	19.72	21	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 58 of 240

	FDD Band 26 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				816.5	26715	21.56	23	0				
			0	831.5	26865	21.40	23	0				
				846.5	27015	21.37	23	0				
				816.5	26715	21.63	23	0				
		1 RB	12	831.5	26865	21.49	23	0				
				846.5	27015	21.37	23	0				
				816.5	26715	21.53	23	0				
			24	831.5	26865	21.41	23	0				
				846.5	27015	21.33	23	0				
				816.5	26715	20.83	22	0-1				
	QPSK		0	831.5	26865	20.65	22	0-1				
				846.5	27015	20.65	22	0-1				
				816.5	26715	20.72	22	0-1				
		12 RB	6	831.5	26865	20.57	22	0-1				
				846.5	27015	20.56	22	0-1				
				816.5	26715	20.80	22	0-1				
			13	831.5	26865	20.58	22					
				846.5	27015	20.45	22	0-1				
				816.5	26715	20.71	22					
		25	RB	831.5	26865	20.59	22					
5			•	846.5	27015	20.50	22	•				
			_	816.5	26715	20.85	22					
			0	831.5	26865	20.63	22					
				846.5	27015	20.90	22					
		4 DD	40	816.5	26715	20.78	22	•				
		1 RB	12	831.5	26865	20.90	22					
				846.5	27015	20.39	22					
			0.4	816.5	26715	21.10	22					
			24	831.5	26865	20.42	22					
				846.5	27015	20.21	22					
	16-QAM		0	816.5	26715	19.86	21 21					
	10-QAIVI		U	831.5	26865	19.70						
				846.5	27015	19.58	21					
		12 RB	6	816.5 831.5	26715 26865	19.78 19.69	21 21					
		IZ ND	٥	846.5			21					
				816.5	27015	19.60 19.84						
			13	831.5	26715	19.69	21 21					
			13	846.5	26865 27015	19.69	21	0-1				
				816.5	26715	19.52	21					
		25	RB	831.5	26865	19.78	21					
		25		-		1						
			846.5	27015	19.55	21	0-2					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this online unlawful and offenders may be

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

prosecuted to the fullest extent of the law.



Page: 59 of 240

FDD Band 26 (Full power)										
			1001	Jana 20 (i ali p	.0.1101)		Target			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
				815.5	26705	21.82	23	0		
			0	831.5	26865	21.64	23	0		
				847.5	27025	21.58	23	0		
				815.5	26705	21.91	23	0		
		1 RB	7	831.5	26865	21.68	23	0		
				847.5	27025	21.53	23	0		
				815.5	26705	21.93	23	0		
			14	831.5	26865	21.51	23	0		
				847.5	27025	21.43	23	0		
				815.5	26705	20.94	22	0-1		
	QPSK		0	831.5	26865	20.69	22	0-1		
				847.5	27025	20.63	22	0-1		
				815.5	26705	20.88	22	0-1		
		8 RB	4	831.5	26865	20.71	22	0-1		
				847.5	27025	20.60	22	0-1		
				815.5	26705	20.86	22	0-1		
			7	831.5	26865	20.70	22	0-1		
				847.5	27025	20.61	22	0-1		
				815.5	26705	20.88	22	0-1		
		15	RB	831.5	26865	20.73	22	0-1		
3				847.5	27025	20.52	22	0-1		
				815.5	26705	21.32	22	0-1		
			0	831.5	26865	20.91	22	0-1		
				847.5	27025	21.21	22	0-1		
				815.5	26705	20.97	22	0-1		
		1 RB	7	831.5	26865	21.12	22	0-1		
				847.5	27025	20.86	22	0-1		
				815.5	26705	20.98	22	0-1		
			14	831.5	26865	20.95	22	0-1		
				847.5	27025	20.67	22			
				815.5	26705	20.03	21			
	16-QAM		0	831.5	26865	19.77	21	0-2		
				847.5	27025	19.78	21	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0-1 0-1 0-		
				815.5	26705	20.03	21	0-2		
		8 RB	4	831.5	26865	19.87	21			
				847.5	27025	19.58	21			
				815.5	26705	20.08	21			
			7	831.5	26865	19.85	21			
				847.5	27025	19.59	21			
				815.5	26705	19.86	21			
		15	RB	831.5	26865	19.79	21			
				847.5	27025	19.74	21	0-2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 60 of 240

	FDD Band 26 (Full power)											
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)				
				814.7	26697	21.94	23	0				
			0	831.5	26865	21.83	23	0				
				848.3	27033	21.61	23	0				
				814.7	26697	21.51	23	0				
		1 RB	2	831.5	26865	21.37	23	0				
				848.3	27033	21.11	23	0				
				814.7	26697	21.91	23	0				
			5	831.5	26865	21.82	23	0				
				848.3	27033	21.55	23	0				
				814.7	26697	21.89	22	0				
	QPSK		0	831.5	26865	21.68	22	0				
				848.3	27033	21.53	22	0				
				814.7	26697	21.74	22	0				
		3 RB	2	831.5	26865	21.50	22	0				
				848.3	27033	21.37	22	0				
				814.7	26697	21.90	22	0				
			3	831.5	26865	21.77	22	0				
				848.3	27033	21.46	22	0				
				814.7	26697	20.81	22	0-1				
		6	RB	831.5	26865	20.70	22	0-1				
1.4				848.3	27033	20.51	22	0-1				
1				814.7	26697	21.56	22	0-1				
			0	831.5	26865	21.18	22	0-1				
				848.3	27033	20.98	22	0-1				
				814.7	26697	20.91	22	0-1				
		1 RB	2	831.5	26865	20.31	22	0-1				
				848.3	27033	20.49	22	0-1				
				814.7	26697	21.14	22	0-1				
			5	831.5	26865	21.27	22	0-1				
				848.3	27033	21.08	22	0-1				
				814.7	26697	20.94	21	0-1				
	16-QAM		0	831.5	26865	20.83	21	0-1				
				848.3	27033	20.62	21	0-1				
				814.7	26697	20.79	21	0-1				
		3 RB	2	831.5	26865	20.72	21	0-1				
				848.3	27033	20.50	21	0-1				
				814.7	26697	20.94	21	0-1				
			3	831.5	26865	20.74	21	0-1				
				848.3	27033	20.59	21	0-1				
				814.7	26697	20.07	21	0-2				
	6	RB	831.5	26865	19.59	21	0-2					
				848.3	27033	19.67	21	0-2				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this online unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 61 of 240

			FDD Bar	nd 26 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				822.5	26825	17.55	18	0
			0	831.5	26865	17.60	18	0
				841.5	26965	17.75	18	0
				822.5	26825	17.62	18	0
		1 RB	36	831.5	26865	17.53	18	0
				841.5	26965	17.56	18	0
				822.5	26825	17.54	18	0
			74	831.5	26865	17.55	18	0
				841.5	26965	17.19	18	0
	QPSK 36 RB			822.5	26825	16.61	17	0-1
			0	831.5	26865	16.57	17	0-1
				841.5	26965	16.60	17	0-1
				822.5	26825	16.40	17	0-1
		36 RB	18	831.5	26865	16.44	17	0-1
				841.5	26965	16.38	17	0-1
			37	822.5	26825	16.57	17	0-1
				831.5	26865	16.55	17	0-1
				841.5	26965	16.48	17	0-1
		75RB		822.5	26825	16.61	17	0-1
				831.5	26865	16.54	17	0-1
15			1	841.5	26965	16.56	17	0-1
			0	822.5	26825	16.38	17	0-1
				831.5	26865	16.80	17	0-1
				841.5	26965	16.41	17	0-1
		4 DD	00	822.5	26825	16.90	17	0-1
		1 RB	36	831.5	26865	16.74	17	0-1
				841.5	26965	16.89	17	0-1
			7.4	822.5	26825	16.41	17	0-1
			74	831.5	26865	16.66	17	0-1
				841.5	26965	16.41	17 16	0-1
	16-QAM		0	822.5	26825 26865	15.64		0-2
	10-QAIVI		U	831.5		15.58	16	0-2
				841.5	26965	15.50	16	0-2
		36 RB	18	822.5	26825 26865	15.50 15.48	16 16	0-2 0-2
	36	JU KD	10	831.5		ł		
				841.5 822.5	26965	15.44	16	0-2
			37		26825	15.57	16 16	0-2
			31	831.5 841.5	26865 26965	15.56 15.43	16	0-2 0-2
				822.5	26825	15.43	16	0-2
		75	RB	831.5	26865	15.56	16	0-2
		/3	ועט				16	0-2
L				841.5	26965	15.51	ا۵۱	∪-∠

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

f (886-2) 2298-0488

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 62 of 240

			FDD Bar	nd 26 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				820	26800	17.25	18	0
			0	831.5	26865	17.30	18	0
				844	26990	17.38	18	0
				820	26800	17.31	18	0
		1 RB	25	831.5	26865	17.22	18	0
				844	26990	17.26	18	0
				820	26800	17.00	18	0
			49	831.5	26865	17.24	18	0
				844	26990	17.18	18	0
	ODSK			820	26800	16.33	17	0-1
	QPSK		0	831.5	26865	16.44	17	0-1
	25 RB			844	26990	16.53	17	0-1
			820	26800	16.53	17	0-1	
		25 RB	12	831.5	26865	16.44	17	0-1
				844	26990	16.45	17	0-1
				820	26800	16.35	17	0-1
			25	831.5	26865	16.45	17	0-1
				844	26990	16.41	17	0-1
		50RB		820	26800	16.46	17	0-1
				831.5	26865	16.47	17	0-1
10				844	26990	16.46	17	0-1
			0	820	26800	16.52	17	0-1
				831.5	26865	16.67	17	0-1
				844	26990	16.74	17	0-1
				820	26800	16.94	17	0-1
		1 RB	25	831.5	26865	16.73	17	0-1
				844	26990	16.66	17	0-1
				820	26800	16.82	17	0-1
			49	831.5	26865	16.42	17	0-1
				844	26990	16.39	17	0-1
	40.0444		_	820	26800	15.53	16	0-2
	16-QAM		0	831.5	26865	15.65	16	0-2
				844	26990	15.49	16	0-2
		05.00	40	820	26800	15.58	16	0-2
	25 RB	25 RB	12	831.5	26865	15.43	16	0-2
			844	26990	15.49	16	0-2	
			0.5	820	26800	15.62	16	0-2
			25	831.5	26865	15.37	16	0-2
				844	26990	15.51	16	0-2
		==		820	26800	15.49	16	0-2
		50	RB	831.5	26865	15.47	16	0-2
				844	26990	15.53	16	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 63 of 240

			FDD Bar	nd 26 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				816.5	26715	17.44	18	0
			0	831.5	26865	17.06	18	0
				846.5	27015	17.04	18	0
				816.5	26715	17.46	18	0
		1 RB	12	831.5	26865	17.22	18	0
				846.5	27015	17.04	18	0
				816.5	26715	17.17	18	0
			24	831.5	26865	17.13	18	0
				846.5	27015	16.98	18	0
	QPSK 12 RB		816.5	26715	16.67	17	0-1	
		0	831.5	26865	16.42	17	0-1	
			846.5	27015	16.44	17	0-1	
				816.5	26715	16.40	17	0-1
		12 RB	6	831.5	26865	16.37	17	0-1
				846.5	27015	16.26	17	0-1
				816.5	26715	16.53	17	0-1
			13	831.5	26865	16.38	17	0-1
				846.5	27015	16.33	17	0-1
		25RB		816.5	26715	16.49	17	0-1
				831.5	26865	16.45	17	0-1
5				846.5	27015	16.31	17	0-1
			0	816.5	26715	16.67	17	0-1
				831.5	26865	16.12	17	0-1
				846.5	27015	16.76	17	0-1
		4 DD	40	816.5	26715	16.43	17	0-1
		1 RB	12	831.5	26865	16.76	17	0-1
				846.5	27015	16.48	17	0-1
			24	816.5	26715	16.92	17	0-1
			24	831.5	26865	16.37	17	0-1
				846.5 816.5	27015 26715	16.57 15.67	17 16	0-1 0-2
	16-QAM		0	831.5	26865	15.54	16	0-2
	IO-MUNI		, o	846.5	27015	15.53	16	0-2
				816.5	26715	15.56	16	0-2
	12 RB	12 RR	6	831.5	26865	15.47	16	0-2
		12110		846.5	27015	15.47	16	0-2
			816.5	26715	15.54	16	0-2	
		13	831.5	26865	15.63	16	0-2	
			, ,	846.5	27015	15.42	16	0-2
				816.5	26715	15.63	16	0-2
		25	RB	831.5	26865	15.50	16	0-2
				846.5	27015	15.37	16	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 64 of 240

			FDD Bar	nd 26 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				815.5	26705	17.61	18	0
			0	831.5	26865	17.48	18	0
				847.5	27025	17.32	18	0
				815.5	26705	17.62	18	0
		1 RB	7	831.5	26865	17.47	18	0
				847.5	27025	17.37	18	0
				815.5	26705	17.46	18	0
			14	831.5	26865	17.41	18	0
				847.5	27025	17.19	18	0
			815.5	26705	16.67	17	0-1	
	QPSK	QPSK	0	831.5	26865	16.46	17	0-1
				847.5	27025	16.43	17	0-1
	8 RB		815.5	26705	16.69	17	0-1	
		8 RB	4	831.5	26865	16.60	17	0-1
				847.5	27025	16.38	17	0-1
				815.5	26705	16.63	17	0-1
			7	831.5	26865	16.44	17	0-1
				847.5	27025	16.34	17	0-1
		15RB		815.5	26705	16.57	17	0-1
				831.5	26865	16.46	17	0-1
3					27025	16.45	17	0-1
Ü				815.5	26705	16.36	17	0-1
			0	831.5	26865	16.52	17	0-1
				847.5	27025	16.70	17	0-1
				815.5	26705	17.00	17	0-1
		1 RB	7	831.5	26865	16.87	17	0-1
				847.5	27025	16.53	17	0-1
				815.5	26705	16.43	17	0-1
I			14	831.5	26865	16.62	17	0-1
				847.5	27025	16.49	17	0-1
				815.5	26705	15.87	16	0-2
	16-QAM		0	831.5	26865	15.75	16	0-2
				847.5	27025	15.46	16	0-2
				815.5	26705	15.79	16	0-2
		8 RB	4	831.5	26865	15.43	16	0-2
				847.5	27025	15.55	16	0-2
				815.5	26705	15.80	16	0-2
			7	831.5	26865	15.67	16	0-2
				847.5	27025	15.35	16	0-2
				815.5	26705	15.69	16	0-2
		15	RB	831.5	26865	15.65	16	0-2
				847.5	27025	15.47	16	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 65 of 240

			FDD Bar	nd 26 (Reduce	d power)			
BW(Mhz)	Modulation	RB Size	RB Offset	Frequency (MHz)	Channel	Conducted power (dBm)	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
				814.7	26697	17.72	18	0
			0	831.5	26865	17.52	18	0
				848.3	27033	17.33	18	0
				814.7	26697	17.28	18	0
		1 RB	2	831.5	26865	17.10	18	0
				848.3	27033	17.04	18	0
				814.7	26697	17.70	18	0
			5	831.5	26865	17.53	18	0
				848.3	27033	17.38	18	0
	QPSK 3 RB			814.7	26697	16.62	17	0
			0	831.5	26865	16.48	17	0
				848.3	27033	16.27	17	0
			2	814.7	26697	16.40	17	0
		3 RB		831.5	26865	16.34	17	0
				848.3	27033	16.09	17	0
				814.7	26697	16.53	17	0
			3	831.5	26865	16.54	17	0
				848.3	27033	16.23	17	0
		6RB		814.7	26697	16.64	17	0-1
				831.5	26865	16.54	17	0-1
1.4			•	848.3	27033	16.32	17	0-1
			0	814.7	26697	16.25	17	0-1
				831.5	26865	16.01	17	0-1
				848.3	27033	16.76	17	0-1
				814.7	26697	16.56	17	0-1
		1 RB	2	831.5	26865	16.42	17	0-1
				848.3	27033	16.15	17	0-1
			_	814.7	26697	16.86	17	0-1
			5	831.5	26865	16.19	17	0-1
				848.3	27033	16.09	17	0-1
	46.0414		0	814.7	26697	15.86	16	0-1
	16-QAM		0	831.5	26865	15.74	16	0-1
				848.3	27033	15.58	16	0-1
		2 DD	2	814.7	26697	15.66	16	0-1
		3 RB	2	831.5	26865	15.43	16	0-1
				848.3	27033	15.25	16	0-1
			3	814.7	26697	15.75	16	0-1
			٥	831.5	26865	15.49	16	0-1
				848.3	27033	15.34	16	0-1 0-2
		61	RB	814.7	26697	15.85	16 16	0-2
		Or	\D	831.5	26865	15.62		
				848.3	27033	15.33	16	0-2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this online unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 66 of 240

WLAN802.11 a/b/g/n/ac(20M/40M/80M) conducted power table:

	Main Antenna										
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)					
		1	2412		17.50	17.26					
	802.11b	6	2437	1Mbps	17.50	17.31					
		11	2462		17.50	17.21					
	802.11g	1	2412		16.50	16.25					
		6	2437	6Mbps	16.50	16.21					
2450 MHz		11	2462		16.50	16.20					
2430 1011 12		1	2412		15.00	14.61					
	802.11n-HT20	6	2437	MCS0	15.00	14.56					
		11	2462		15.00	14.73					
		3	2422		14.50	14.13					
	802.11n-HT40	6	2437	MCS0	14.50	14.11					
		9	2452		14.50	14.39					

		Mair	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)
		36	5180		13.00	12.57
	802.11a	40	5200	6Mbps	13.00	12.60
	002.11a	44	5220		13.00	12.57
		48	5240		13.00	12.44
	802.11n-HT20	36	5180	MCS0	12.00	11.54
		40	5200		12.00	11.61
		44	5220		12.00	11.62
		48	5240		12.00	11.59
5.15-5.25 GHz		36	5180		12.00	11.23
	802.11n-VHT20	40	5200	MCS0	12.00	11.42
	002.1111 111120	44	5220	IVIOOU	12.00	11.44
		48	5240		12.00	11.41
	802.11n-HT40	38	5190	MCS0	12.00	11.58
	002.1111-111-40	46	5230	IVICOU	12.00	11.56
	802.11n-VHT40	38	5190	MCS0	12.00	11.37
		46	5230	IVICOU	12.00	11.36
	802.11n-VHT80	42	5210	MCS0	10.00	9.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 67 of 240

		Mair	n Antenna			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)
		100	5500		13.00	12.58
		120	5600		13.00	12.65
	802.11a	124	5620	6Mbps	13.00	12.57
		128	5640		13.00	12.55
		140	5700		13.00	12.61
		100	5500		12.00	11.56
		120	5600		12.00	11.62
	802.11n-HT20	124	5620	MCS0	12.00	11.55
		128	5640		12.00	11.51
		140	5700		12.00	11.61
	802.11n-VHT20	100	5500	MCS0	12.00	11.46
		120	5600		12.00	11.42
		124	5620		12.00	11.41
5600 MHz		128	5640		12.00	11.39
3600 MHZ		140	5700		12.00	11.43
		144	5720		12.00	11.53
		102	5510		12.00	11.55
	802.11n-HT40	118	5590	MCS0	12.00	11.61
	002.1111-1140	126	5630	IVICSU	12.00	11.58
		134	5670		12.00	11.62
		102	5510		12.00	11.45
		118	5590		12.00	11.45
	802.11n-VHT40	126	5630	MCS0	12.00	11.40
		134	5670		12.00	11.45
		142	5710		12.00	11.55
		106	5530		10.00	9.51
	802.11n-VHT80	122	5610	MCS0	10.00	9.57
		138	5690		10.00	9.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 68 of 240

	Main Antenna									
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)				
		149	5745		13.00	12.61				
	802.11a	157	5785	6Mbps	13.00	12.62				
		165	5825		13.00	12.63				
	802.11n-HT20	149	5745	MCS0	12.00	11.60				
		157	5785		12.00	11.52				
		165	5825		12.00	11.57				
5800 MHz		149	5745		12.00	11.51				
3600 1011 12	802.11n-VHT20	157	5785	MCS0	12.00	11.34				
		165	5825		12.00	11.39				
	802.11n-HT40	151	5755	MCS0	12.00	11.57				
	002.1111-11140	159	5795	IVICOU	12.00	11.58				
	802.11n-VHT40	151	5755	MCS0	12.00	11.42				
	002.1111-711140	159	5795	IVICOU	12.00	11.44				
	802.11n-VHT80	155	5775	MCS0	10.00	9.52				

	Aux Antenna										
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)					
		1	2412		17.50	17.01					
	802.11b	6	2437	1Mbps	17.50	17.15					
		11	2462		17.50	16.94					
	802.11g	1	2412		16.50	16.19					
		6	2437	6Mbps	16.50	16.01					
2450 MHz		11	2462		16.50	15.95					
2430 1011 12		1	2412		15.00	14.16					
	802.11n-HT20	6	2437	MCS0	15.00	14.24					
		11	2462		15.00	14.26					
		3	2422		14.50	13.93					
	802.11n-HT40	6	2437	MCS0	14.50	14.05					
		9	2452		14.50	14.16					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 69 of 240

	Aux Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)				
		36	5180		13.00	12.96				
	802.11a	40	5200	6Mbps	13.00	12.94				
	002.11a	44	5220	Olvibps	13.00	12.91				
		48	5240		13.00	12.81				
		36	5180	MCS0	12.00	11.75				
	802.11n-HT20	40	5200		12.00	11.76				
		44	5220		12.00	11.71				
		48	5240		12.00	11.59				
5.15-5.25 GHz		36	5180		12.00	11.52				
	802.11n-VHT20	40	5200	MCS0	12.00	11.64				
	002.1111-111120	44	5220	IVICOU	12.00	11.64				
		48	5240		12.00	11.66				
	802.11n-HT40	38	5190	MCS0	12.00	11.94				
	002.1111-11140	46	5230	IVICOU	12.00	11.65				
	802.11n-VHT40	38	5190	MCS0	12.00	11.63				
		46	5230	IVICOU	12.00	11.50				
	802.11n-VHT80	42	5210	MCS0	10.00	9.91				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 70 of 240

	Aux Antenna									
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)				
		52	5260		13.00	12.93				
	802.11a	56	5280	6Mbps	13.00	12.91				
	002.11a	60	5300		13.00	12.90				
		64	5320		13.00	12.87				
		52	5260	MCS0	12.00	11.73				
	802.11n-HT20	56	5280		12.00	11.71				
		60	5300		12.00	11.72				
		64	5320		12.00	11.66				
5.25-5.35 GHz		52	5260		12.00	11.63				
	802.11n-VHT20	56	5280	MCS0	12.00	11.67				
	002.1111-111120	60	5300	IVICOU	12.00	11.64				
		64	5320		12.00	11.54				
	802.11n-HT40	54	5270	MCS0	12.00	11.94				
	002.1111-11140	62	5310	IVICOU	12.00	11.65				
	802.11n-VHT40	54	5270	MCS0	12.00	11.63				
	002.1111-111140	62	5310	IVICOU	12.00	11.50				
	802.11n-VHT80	58	5290	MCS0	10.00	9.91				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 71 of 240

Aux Antenna										
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)				
5600 MHz	802.11a	100	5500	6Mbps	13.00	12.94				
		120	5600		13.00	12.95				
		124	5620		13.00	12.82				
		128	5640		13.00	12.83				
		140	5700		13.00	12.93				
		100	5500	MCS0	12.00	11.70				
	802.11n-HT20	120	5600		12.00	11.73				
		124	5620		12.00	11.66				
		128	5640		12.00	11.61				
		140	5700		12.00	11.76				
	802.11n-VHT20	100	5500	MCS0	12.00	11.63				
		120	5600		12.00	11.62				
		124	5620		12.00	11.52				
		128	5640		12.00	11.60				
		140	5700		12.00	11.62				
		144	5720		12.00	11.61				
	802.11n-HT40	102	5510	MCS0	12.00	11.93				
		118	5590		12.00	11.92				
		126	5630	IVICOU	12.00	11.83				
		134	5670		12.00	11.94				
	802.11n-VHT40	102	5510	MCS0	12.00	11.64				
		118	5590		12.00	11.64				
		126	5630		12.00	11.52				
		134	5670		12.00	11.66				
		142	5710		12.00	11.60				
	802.11n-VHT80	106	5530	MCS0	10.00	9.82				
		122	5610		10.00	9.90				
		138	5690		10.00	9.89				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 72 of 240

Aux Antenna											
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max.	Average power (dBm)					
5800 MHz	802.11a	149	5745	6Mbps	13.00	12.91					
		157	5785		13.00	12.91					
		165	5825		13.00	12.95					
	802.11n-HT20	149	5745	MCS0	12.00	11.70					
		157	5785		12.00	11.71					
		165	5825		12.00	11.73					
	802.11n-VHT20	149	5745	MCS0	12.00	11.68					
		157	5785		12.00	11.59					
		165	5825		12.00	11.64					
	802.11n-HT40	151	5755	MCS0	12.00	11.91					
		159	5795		12.00	11.89					
	802.11n-VHT40	151	5755	MCS0	12.00	11.62					
		159	5795		12.00	11.66					
	802.11n-VHT80	155	5775	MCS0	10.00	9.75					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 73 of 240

Bluetooth conducted power table:

		a po c.				
Mode	Channel	Frequency	Average	Output Pow	er (dBm)	Max. Rated Avg.
Mode	Channel	(MHz)	1Mbps	2Mbps	3Mbps	Power + Max. Tolerance
	CH 00	2402	-0.91	5.11	5.13	
BR/EDR	CH 39	2441	-0.95	5.08	5.15	5.5
	CH 78	2480	-0.99	4.89	4.91	

Mode	Channel [Frequency]		Average Output Power (dBm)	Max. Rated Avg.	
Mode	Channel	(MHz)	GFSK	Power + Max. Tolerance	
	CH 00	2402	4.66		
LE	CH 19 2440		4.31	5.5	
	CH 39	2480	4.80		

Note:

The EUT supports the antenna with TX/RX diversity function for WLAN and Bluetooth. (Ex. Assume Main was selected to conduct transmitting function in WLAN, so Aux was selected in Bluetooth Mode. Vice versa.)

Both antenna(Main) and antenna(Aux) could be used as transmitting/receiving antenna, but only one of them could transmit/receive at the same time.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 74 of 240

1.4 Test Environment

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

For WLAN, use chipset specific software to control the EUT, and makes it transmit in maximum power. The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged. EUT was tested in the following configuration.

WWAN:

Back/left sides with test distance 0mm (with power reduction)


Top side with test distance 0mm (No power reduction).

Backside with test distance 10mm (No power reduction)

Left side with test distance 15mm (No power reduction)

WLAN:

Back/top/left sides with test distance 0mm.

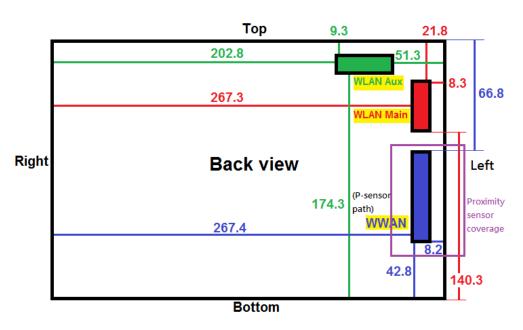

*: mm

Antenna location (Back view)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 75 of 240

Note:

- LTE modes test according to KDB 941225D05v02r05.
 - a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
 - Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
 - When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
 - b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
 - The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
 - c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
 - For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are \leq 0.8 W/kg.
 - Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. Per Section 5.2.4, Higher order modulations
 - For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
 - e. Per Section 5.3, other channel bandwidth standalone SAR test requirements. For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 1/2 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 76 of 240

and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

802.11b DSSS SAR Test Requirements:

- 2. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 3. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

4. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

- 5. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
- 6. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- 7. For WLAN, 5.2a/5.3a/5.6a/5.8a is chosen to be the initial test configuration.
- 8. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.



Page: 77 of 240

9. Based on KDB447498D01,

(1) SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances≤ 50 mm are determined by:

$$\frac{\text{Max. tune up power(mW)}}{\text{Min. test separation distance(mm)}} \times \sqrt{f(\text{GHz})} \leq 3$$

When the minimum test separation distance is < 5mm, 5mm is applied to determine SAR test exclusion.

- (2) For test separation distances > 50 mm, and the frequency at 100 MHz to 1500MHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01. [(Threshold at 50mm in step1) + (test separation distance-50mm) $x(\frac{f(NHz)}{160})](mW),$
- (3) For test separation distances > 50 mm, and the frequency at >1500MHz to 6GHz, the SAR test exclusion threshold is determined according to the following, and as illustrated in Appendix B of KDB447498 D01.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 78 of 240

Mode		LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 13	LTE Band 17	LTE Band 26
Max. tune-up power(dBm)		23	23	23	23.5	22	23	23
Max. tune-	-up power(mW)	21.530	21.390	21.860	23.270	22.510	22.190	21.610
	Test separation distance (mm)	66.8	66.8	66.8	66.8	66.8	66.8	66.8
Top side	Calculation value	173.514	173.285	98.685	175.174	90.672	83.283	98.685
	Require SAR testing?	YES						
	Test separation distance (mm)	267.4	267.4	267.4	267.4	267.4	267.4	267.4
Right side	>20cm	YES						
	Require SAR testing?	NO						
	Test separation distance (mm)	8.2	8.2	8.2	8.2	8.2	8.2	8.2
Left side	Calculation value	33.622	32.228	22.411	43.746	17.119	20.553	22.411
	Require SAR testing?	YES						
Bottom	Test separation distance (mm)	42.8	42.8	42.8	42.8	42.8	42.8	42.8
side	Calculation value	6.442	6.175	4.294	8.381	3.280	3.938	4.294
	Require SAR testing?	NO						
	Test separation distance (mm)	less than 5						
Back side	Calculation value	55.140	52.854	36.754	71.744	28.075	33.708	36.754
	Require SAR testing?	YES						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 79 of 240

Mode		WLAN Main 2.45GHz	WLAN Main 5GHz	BT Main		Mode	WLAN Aux 2.45GHz	WLAN Aux 5GHz	BT Aux
Max. tune-	-up power(dBm)	17.5	13	5.5	Max. tune-up power(dBm)		17.5	13	5.5
Max. tune	-up power(mW)	17.310	12.650	5.150	Max. tune	-up power(mW)	17.150	12.960	4.620
	Test separation distance (mm)	21.8	21.8	21.8		Test separation distance (mm)	9.3	9.3	9.3
Top side	Calculation value	4.048	2.209	0.256	Top side	Calculation value	9.488	5.178	0.601
	Require SAR testing?	YES	YES	NO		Require SAR testing?	YES	YES	NO
	Test separation distance (mm)	267.3	267.3	267.3	Pight side	Test separation distance (mm)	202.8	202.8	202.8
Right side	>20cm	YES	YES	YES	Right side	>20cm	YES	YES	YES
	Require SAR testing?	NO	NO	NO		Require SAR testing?	NO	NO	NO
	Test separation distance (mm)	8.3	8.3	8.3		Test separation distance (mm)	51.3	51.3	51.3
Left side	Calculation value	10.631	5.802	0.673	Left side	Calculation value	14.765	13.963	13.112
	Require SAR testing?	YES	YES	NO		Require SAR testing?	YES	YES	NO
Bottom	Test separation distance (mm)	140.3	140.3	140.3	Bottom	Test separation distance (mm)	174.3	174.3	174.3
side	Calculation value	904.765	903.963	903.112	side	Calculation value	1244.765	1243.963	1243.112
	Require SAR testing?	NO	NO	NO		Require SAR testing?	NO	NO	NO
	Test separation distance (mm)	less than 5	less than 5	less than 5		Test separation distance (mm)	less than 5	less than 5	less than 5
Back side	Calculation value	17.647	9.631	1.118	Back side	Calculation value	17.647	9.631	1.118
	Require SAR testing?	YES	YES	NO		Require SAR testing?	YES	YES	NO

- 10. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
- 11. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 80 of 240


1.6 Proximity sensor operation description

The P-sensor being used to reduce output power is capacitive in which when the object such as human body, metal or plastic is being approached, the sensing capacitance would be increased with the antenna pad. Once the capacitance is accumulated, and reached over the threshold as set in MCU of the microchip, the interruption signal is pulled low (High state without trigger) and further inform modem module of the transmitter to make power reduction.



1.6.1 Proximity sensor measurement procedure

- 1. The proximity sensor is collocated with WWAN antenna.
- 2. Output power is measured, and monitored by using the communication tester. A RF cables with sufficient length was being attached from the antenna port of the module, and used for the measurement. The appropriate loss attenuated from cable is compensated in the communication tester.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 81 of 240

1.6.2 Trigger distances for back/left side

Test procedure:

- 1. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue equivalent medium and positioned at least 20 mm further than the distance that triggers power reduction.
- 2. The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- 3. The back surface or edge is then moved back (further away) from the phantom until maximum output power is returned to the normal maximum level.
- 4. The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom
- 5. If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- 6. The process is then reversed by moving the tablet away from the phantom to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- 7. The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated.
- 8. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.
- 9. For back side, the trigger distance of proximity sensor is 11mm.
- 10. For left side, the trigger distance of proximity sensor is 17mm, and we perform the 1.6.3 tilt angle testing in next step.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com

SGS Taiwan Ltd.



Page: 82 of 240

1.6.3 Tilt angle testing

Test procedure:

- 1. The influence of table tilt angles to proximity sensor triggering is determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance determined in sections 1.6.2 by rotating the tablet around the edge next to the phantom in ≤ 10 deg increments until the tablet is +/- 45deg or more from the vertical position at 0 dea.
- 2. If sensor triggering is released and normal maximum output power is restored within the +/- 45deg range, the procedures in step 1) should be repeated by reducing the tablet to phantom separation distance by 1 mm until the proximity sensor no longer releases triggering, and maximum output power remains in the reduced mode.
- 3. The smallest separation distance determined in steps 1) and 2), minus 1 mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance determined in sections 1.6.2, 1.6.3 minus 1 mm should be used in the SAR measurements.
- 4. The influence of tablet tilt angles to proximity sensor triggering is determined by positioning top and right sides, please refer to table 1.6.5 and 1.6.6.
- 5. After the tilt angle testing for left side, the sensor is not released during +/- 45deg, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1 mm (16-1=15mm) should be used in the SAR measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 83 of 240

1.6.4 Proximity sensor coverage

The following procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

Test procedure:

- 1. The back surface or edges of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset.
- 2. The similar sequence of steps applied to determine sensor triggering distance in section 1.6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- 3. After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- 4. The process is then repeated from the other direction, at the opposite end of maximum antenna and sensor offset, by rotating the tablet 180 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 84 of 240

1.6.5 Results

The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom is tabulated in the following.

Back side

Moving device toward the phantom

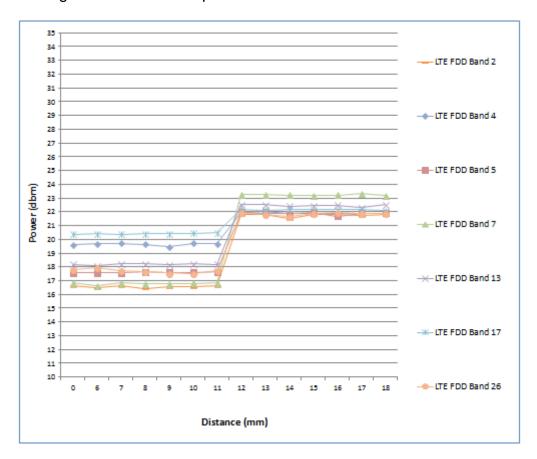

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 85 of 240

Moving device away from the phantom

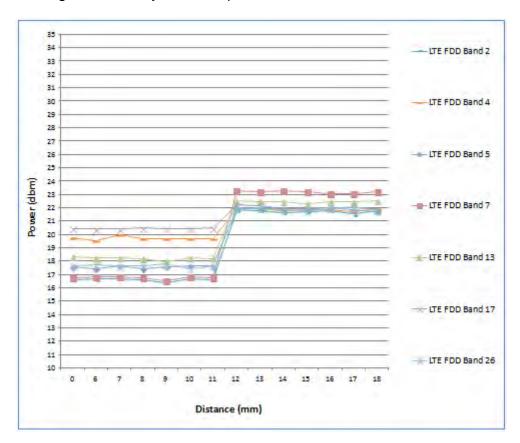

For back side, the worst trigger distance of proximity sensor is 11mm, thus we test back side SAR in 10mm without power reduction and 0mm with power reduction.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.



Page: 86 of 240

Left side

Moving device toward the phantom

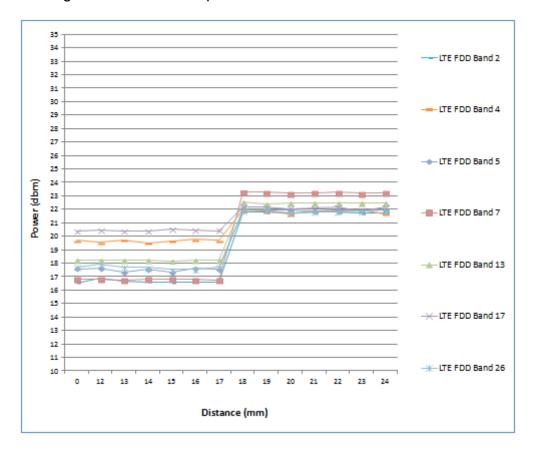

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 87 of 240

Moving device away from the phantom

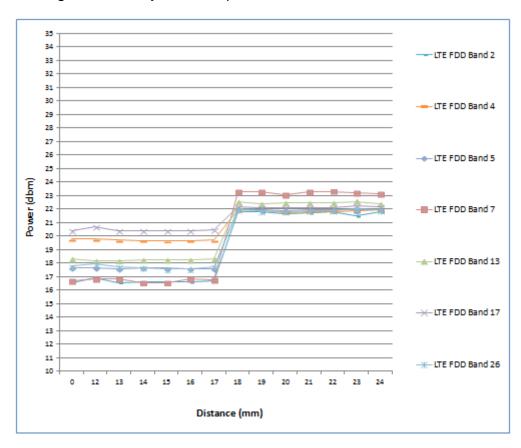


Table 1.6.5 Tilt angle test results for left side

P-sensor	-50	-45	-40	-30	-20	-10	0	10	20	30	40	45	50
ON/OFF	deg												
17mm	ON												

During the tilt angle testing for top side, the sensor is not released in 17mm, so 17-1=16mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance minus 1mm (16-1=15mm) should be used in the SAR measurements for left side.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 88 of 240

Note:

- 1. The triggering variations and hysteresis effect has been evaluated separately according to the tissue-equivalent medium required for each frequency band, and sensor triggering does not change with different tissue-equivalent media.
- 2. The default power level for sensor failure and malfunctioning, including all compliance concerns, has been addressed in the client's operation description (1.6.6) for the proximity sensor implementation to be acceptable.
- 3. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 89 of 240

1.6.6 Operation description for P-sensor

Power Reduction Design Specification (for P-sensor)

The mechanism of power reduction is used only for WWAN, not for Wi-Fi and Bluetooth. The reduced power for each technology/band is defined in Table1-1. With P-sensor mechanism, the LTE default power when P-sensor failure or malfunction are show in Table 1-2 as below.

Table1-1: The power reduction scenario table

Band	Power Reduction
LTE B2/4/5/7/13/17/26	YES
WLAN	NO
ВТ	NO

Table1-2: The default maximum power when p-sensor failure or malfunction

Technology / Band	Mode	Default Maximum Power (dBm)
LTE B2	ALL	17
LTE B4	ALL	20
LTE B5	ALL	18
LTE B7	ALL	17
LTE B13	ALL	19
LTE B17	ALL	21
LTE B26	ALL	18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 90 of 240

1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ ($|Ei|^2$)/ ρ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

- 1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- 2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
- 3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

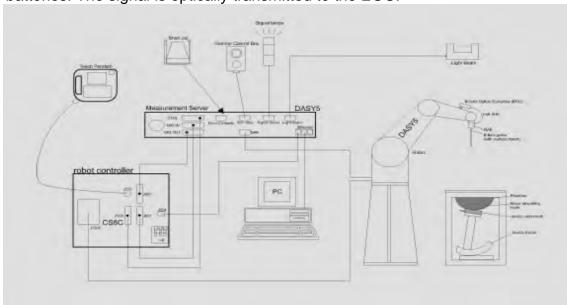


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.tw.sas.com



Page: 91 of 240

- 4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- 5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- 6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- 7. A computer operating Windows 7.
- 8. DASY 5 software.
- 9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- 10. The SAM twin phantom enabling testing left-hand and right-hand usage.
- 11. The device holder for handheld mobile phones.
- 12. Tissue simulating liquid mixed according to the given recipes.
- 13. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 92 of 240

1.8 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 750/ 835/1750/1900/2450/2600/5200/5300/ 5600/5800 MHz Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic	$10 \mu\text{W/g}$ to > 100mW/g
Range	Linearity: ± 0.2 dB (noise: typically < 1 µW/g)
Dimensions	Tip diameter: 2.5 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 93 of 240

Phantom

<u>i nantom</u>		
Model	ELI	
Construction	body-mounted wireless devices to 6 GHz. ELI is fully compatible and all known tissue simulating regarding its performance and caphantom tables. A cover prevented process on the performance of the perform	impliance testing of handheld and in the frequency range of 30 MHz le with the IEC 62209-2 standard liquids. ELI has been optimized an be integrated into our standard vents evaporation of the liquid hantom allow installation of the redefined phantom positions and three points. The phantom is metric probes and dipoles.
Shell	2 ± 0.2 mm	The same of the sa
Thickness		
Filling Volume	Approx. 30 liters	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	

DEVICE HOLDER

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.	
		Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 94 of 240

1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. These tests were done at 750/835/1750/1900/2450/2600/ 5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, he liquid depth above the ear reference points was ≥ 15 cm ± 5 mm (frequency ≤ 3 GHz) or ≥ 10 cm ± 5 mm (frequency > 3 G Hz) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

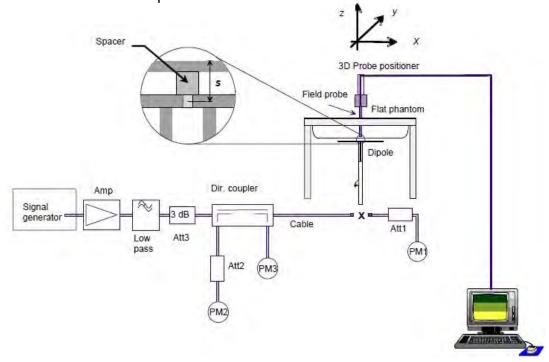


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

> SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 95 of 240

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D750V3	1015	750	Body	8.77	2.29	9.16	4.45%	Jun. 16, 2017
D835V2	4d063	835	Body	9.57	2.44	9.76	1.99%	Jun. 16, 2017
D1750V2	1008	1750	Body	37.3	9.24	36.96	-0.91%	Jun. 20, 2017
D1900V2	5d173	1900	Body	40.2	9.96	39.84	-0.90%	Jun. 20, 2017
D2450V2	727	2450	Body	50.6	12.7	50.8	0.40%	Jun. 22, 2017
D2600V2	1005	2600	Body	55.1	13.9	55.6	0.91%	Jun. 22, 2017
		5200	Body	72.8	7.33	73.3	0.69%	Jun. 23, 2017
D5GHzV2	1023	5300	Body	76.1	7.61	76.1	0.00%	Jun. 23, 2017
DOGHZVZ	1023	5600	Body	79.6	8.09	80.9	1.63%	Jun. 26, 2017
		5800	Body	75.9	7.62	76.2	0.40%	Jun. 26, 2017

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 96 of 240

1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this body-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer (30 KHz-6000 MHz).

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within \pm 5% of the target values.

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		709	55.691	0.960	53.838	0.921	3.44%	4.08%
		710	55.687	0.960	53.833	0.922	3.44%	3.98%
		711	55.683	0.960	53.828	0.923	3.45%	3.89%
		750	55.531	0.963	53.633	0.962	3.54%	0.14%
		782	55.406	0.966	53.473	0.994	3.62%	-2.91%
	Jun. 16, 2017	822.5	55.249	0.969	55.048	0.971	0.36%	-0.20%
	Juli. 10, 2017	829	55.223	0.970	55.009	0.978	0.39%	-0.82%
		831.5	55.214	0.970	54.994	0.980	0.40%	-1.06%
		835	55.200	0.970	54.973	0.984	0.41%	-1.39%
		836.5	55.195	0.972	54.964	0.985	0.42%	-1.35%
		841.5	55.180	0.978	54.934	0.990	0.45%	-1.23%
		844	55.172	0.981	54.919	0.993	0.46%	-1.16%
		1720	53.511	1.469	52.612	1.504	1.71%	-2.35%
		1732.5	53.478	1.477	52.550	1.517	1.77%	-2.65%
Body		1745	53.445	1.485	52.487	1.529	1.82%	-2.94%
Бойу	Jun. 20, 2017	1750	53.432	1.488	52.462	1.534	1.85%	-3.06%
		1860	53.300	1.520	51.912	1.541	2.67%	-1.38%
		1880	53.300	1.520	51.812	1.561	2.87%	-2.70%
		1900	53.300	1.520	51.712	1.582	3.07%	-4.08%
		2402	52.764	1.904	54.671	1.906	-3.49%	-0.10%
		2412	52.751	1.914	54.472	1.916	-3.16%	-0.12%
		2437	52.717	1.938	53.973	1.941	-2.33%	-0.18%
		2441	52.712	1.941	53.892	1.945	-2.19%	-0.19%
		2450	52.700	1.950	53.716	1.954	-1.89%	-0.21%
	Jun. 22, 2017	2462	52.685	1.967	53.472	1.966	-1.47%	0.05%
		2480	52.662	1.993	53.118	1.984	-0.86%	0.43%
		2510	52.624	2.035	52.512	2.014	0.21%	1.04%
		2535	52.592	2.071	52.015	2.039	1.11%	1.52%
		2560	52.560	2.106	51.514	2.064	2.03%	1.99%
		2600	52.509	2.163	50.713	2.104	3.54%	2.72%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 97 of 240

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ
		5180	49.041	5.276	50.093	5.151	-2.10%	2.37%
		5200	49.014	5.299	49.994	5.172	-1.96%	2.40%
		5220	48.987	5.323	49.895	5.199	-1.82%	2.32%
	lun 22 2017	5240	48.960	5.346	49.796	5.218	-1.68%	2.39%
	Jun. 23, 2017	5260	48.933	5.369	49.693	5.230	-1.53%	2.60%
		5280	48.906	5.393	49.597	5.253	-1.39%	2.59%
		5300	48.879	5.416	49.493	5.274	-1.24%	2.62%
Body		5320	48.851	5.439	49.398	5.297	-1.11%	2.62%
		5500	48.607	5.650	48.493	5.472	0.24%	3.14%
		5600	48.471	5.766	47.999	5.576	0.98%	3.30%
		5700	48.336	5.883	47.480	5.675	1.80%	3.54%
	Jun. 26, 2017	5745	48.275	5.936	47.268	5.715	2.13%	3.72%
		5785	48.220	5.982	47.061	5.755	2.46%	3.80%
		5800	48.200	6.000	46.993	5.773	2.57%	3.78%
		5825	48.166	6.029	46.865	5.795	2.78%	3.88%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

The composition of the body tissue simulating liquid:

Fraguenav				Ingre	dient			Total
Frequency (MHz)	Mode	DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	Total amount
750	Body	_	631.68 g	11.72 g	1.2 g	-	600 g	1.0L(Kg)
850	Body	_	631.68 g	11.72 g	1.2 g	1	600 g	1.0L(Kg)
1750	Body	300.67 g	716.56 g	4.0 g	-	1	l	1.0L(Kg)
1900	Body	300.67 g	716.56 g	4.0 g	-	1	I	1.0L(Kg)
2450	Body	301.7ml	698.3ml	_	_	_	-	1.0L(Kg)
2600	Body	301.7ml	698.3ml	_	_	_	_	1.0L(Kg)

Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 98 of 240

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan.
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within –2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 99 of 240

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 100 of 240

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

- 2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- 3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c; much better for p), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed ±5%.
- 4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about ±10% (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is ±5% (RSS) when the same liquid is used for the calibration and for actual measurements and ±7-9% (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids. When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- 1. The setup must enable accurate determination of the incident power.
- 2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

www.tw.sgs.com



Page: 101 of 240

3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, \Broadband 2. calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954{1962, Oct. 1996.
- K. Jokela, P. Hyysalo, and L. Puranen, \Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432{438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 102 of 240

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- 3. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 103 of 240

devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

- 1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
- 2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Page: 104 of 240

2. Summary of Results

LTE FDD Band 2

Proximity Sensor OFF

	Bandwi								Max. Rated	Measure		Averaged 1g (W		
	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	d Avg. Power (dBm)	Scaling	Measured	Reported	Plot page	
					Back side	10	19100	1900	23	21.53	40.28%	0.334	0.469	-
			1 RB	0	Top side	0	19100	1900	23	21.53	40.28%	0.060	0.085	-
					Left side	15	19100	1900	23	21.53	40.28%	0.272	0.382	-
LTE					Back side	10	19100	1900	22	20.85	30.32%	0.292	0.381	-
Band 2	20MHz	QPSK	50 RB	0	Top side	0	19100	1900	22	20.85	30.32%	0.050	0.065	-
Dana 2					Left side	15	19100	1900	22	20.85	30.32%	0.236	0.308	-
					Back side	10	18900	1880	22	20.74	33.66%	0.285	0.381	-
			100	RB	Top side	0	18900	1880	22	20.74	33.66%	0.048	0.064	-
					Left side	15	18900	1880	22	20.74	33.66%	0.231	0.309	-

Proximity Sensor ON

	Bandwi	wi							Max. Rated	Measure d		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
			1 RB	0	Back side	0	19100	1900	17	16.67	7.89%	0.219	0.236	-
			IKD	0	Left side	0	19100	1900	17	16.67	7.89%	0.492	0.531	130
LTE	201411-7	OBSK	50 RB	0	Back side	0	19100	1900	16	15.59	9.90%	0.165	0.181	-
Band 2	LONNIHA LOPSK		מא	0	Left side	0	19100	1900	16	15.59	9.90%	0.377	0.414	-
			100	B	Back side	0	18700	1860	16	15.53	11.43%	0.163	0.182	-
			100	IΛD	Left side	0	18700	1860	16	15.53	11.43%	0.372	0.415	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. www.tw.sgs.com



LTE FDD Band 4

Report No. : E5/2017/60002

Page: 105 of 240

Proximity Sensor OFF

	Bandwi								Max. Rated	Measure d		Averaged 1g (W		
Mode	Mode dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
					Back side	10	20050	1720	23	21.39	44.88%	0.295	0.427	-
			1 RB	0	Top side	0	20050	1720	23	21.39	44.88%	0.048	0.069	-
					Left side	15	20050	1720	23	21.39	44.88%	0.251	0.364	-
LTE					Back side	10	20050	1720	22	20.88	29.42%	0.254	0.329	-
Band 4	20MHz	QPSK	50 RB	0	Top side	0	20050	1720	22	20.88	29.42%	0.042	0.054	-
Dana 4					Left side	15	20050	1720	22	20.88	29.42%	0.218	0.282	-
					Back side	10	20175	1733	22	20.79	32.13%	0.251	0.332	-
			100	RB	Top side	0	20175	1733	22	20.79	32.13%	0.041	0.054	-
					Left side	15	20175	1733	22	20.79	32.13%	0.211	0.279	-

Proximity Sensor ON

Bandwi								Max. Rated Avg.	Measure d		Averaged 3			
Mode		Modulatior	RB Size		Position	Distance (mm)	СН	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power	Scaling	Measured	Reported	Plot page
		1 RB	0	Back side	0	20050	1720	20	19.74	6.17%	0.341	0.362	-	
			I KB	U	Left side	0	20050	1720	20	19.74	6.17%	0.456	0.484	131
LTE	201411-	OBSK	50 RB	0	Back side	0	20300	1745	19	18.70	7.15%	0.255	0.273	-
Band 4	1 201/142 1	QPSK 5	30 KB	U	Left side	0	20300	1745	19	18.70	7.15%	0.446	0.478	-
			100	DR	Back side	0	20300	1745	19	18.62	9.14%	0.252	0.275	-
			100	ND	Left side	0	20300	1745	19	18.62	9.14%	0.441	0.481	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 106 of 240

Report No.: E5/2017/60002

LTE FDD Band 5

Proximity Sensor OFF

	Bandwi								Max. Rated	Measure d		Averaged 1g (W		
	Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page	
					Back side	10	20600	844	23	21.86	30.02%	0.332	0.432	-
			1 RB	0	Top side	0	20600	844	23	21.86	30.02%	0.059	0.077	-
					Left side	15	20600	844	23	21.86	30.02%	0.294	0.382	-
LTE					Back side	10	20600	844	22	20.82	31.22%	0.265	0.348	-
Band 5	10MHz	QPSK	25 RB	0	Top side	0	20600	844	22	20.82	31.22%	0.047	0.062	-
Bana o					Left side	15	20600	844	22	20.82	31.22%	0.235	0.308	-
					Back side	10	20450	829	22	20.80	31.83%	0.264	0.348	-
			50 F	RB	Top side	0	20450	829	22	20.80	31.83%	0.045	0.059	-
					Left side	15	20450	829	22	20.80	31.83%	0.233	0.307	-

Proximity Sensor ON

	Bandwi								Max. Rated Avg.	Measure d		Averaged 1g (W			
Mode		Modulatior	Size s		Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page	
			1 RB	1 RB 0	Back side	0	20600	844	18	17.66	8.14%	0.238	0.257	-	
			ו א	U	Left side	0	20600	844	18	17.66	8.14%	0.404	0.437	132	
LTE	10MHz	OPSK	25 RB 25	Back side	0	20525	836.5	17	16.62	9.14%	0.195	0.213	-		
Band 5	TOWNIZ	MHz QPSK	25 170	23	Left side	0	20525	836.5	17	16.62	9.14%	0.325	0.355	-	
			50 RE	50 DD		Back side	0	20600	844	17	16.50	12.20%	0.189	0.212	-
			30 F	עט	Left side	0	20600	844	17	16.50	12.20%	0.321	0.360	-	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



LTE FDD Band 7

Report No.: E5/2017/60002 Page: 107 of 240

Proximity Sensor OFF

	Bandwi								Max. Rated	Measure d		Averaged 1g (W		
Mode	Mode dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power	Scaling	Measured	Reported	Plot page
					Back side	10	21100	2535	23.5	23.27	5.44%	0.189	0.199	-
			1 RB	50	Top side	0	21100	2535	23.5	23.27	5.44%	0.007	0.007	-
					Left side	15	21100	2535	23.5	23.27	5.44%	0.382	0.403	-
LTE					Back side	10	21100	2535	22.5	22.36	3.28%	0.151	0.156	-
Band 7	20MHz	QPSK	50 RB	0	Top side	0	21100	2535	22.5	22.36	3.28%	0.006	0.006	-
Dana /					Left side	15	21100	2535	22.5	22.36	3.28%	0.305	0.315	-
					Back side	10	21100	2535	22.5	22.27	5.44%	0.148	0.156	-
			100	RB	Top side	0	21100	2535	22.5	22.27	5.44%	0.006	0.006	-
					Left side	15	21100	2535	22.5	22.27	5.44%	0.295	0.311	-

Proximity Sensor ON

	Bandwi	vi							Max. Rated Avg.	Measure d		Averaged 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power	Scaling	Measured	Reported	Plot page
			1 RB	50	Back side	0	21100	2535	17	16.85	3.51%	0.087	0.090	-
			מאו	30	Left side	0	21100	2535	17	16.85	3.51%	0.607	0.628	133
LTE	201411-	OBSK	50 RB	0	Back side	0	21100	2535	16	15.98	0.46%	0.072	0.072	-
Band 7	1 20MHz I	0MHz QPSK 5	מא	U	Left side	0	21100	2535	16	15.98	0.46%	0.501	0.503	-
			100	DD	Back side	0	20850	2510	16	15.95	1.16%	0.065	0.066	-
			100	ΝD	Left side	0	20850	2510	16	15.95	1.16%	0.493	0.499	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



LTE FDD Band 13

Report No.: E5/2017/60002 Page: 108 of 240

Proximity Sensor OFF

Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)		Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		
									Avg. Power + Max. Toleranc e (dBm)			Measured	Reported	Plot page
LTE Band 13	10MHz	QPSK	1 RB	0	Back side	10	23230	782	23	22.51	11.94%	0.300	0.336	-
					Top side	0	23230	782	23	22.51	11.94%	0.036	0.040	-
					Left side	15	23230	782	23	22.51	11.94%	0.223	0.250	-
			25 RB	0	Back side	10	23230	782	22	20.92	28.23%	0.201	0.258	-
					Top side	0	23230	782	22	20.92	28.23%	0.024	0.031	-
					Left side	15	23230	782	22	20.92	28.23%	0.148	0.190	-
					Back side	10	23230	782	22	20.89	29.12%	0.199	0.257	-
			50 F	RB	Top side	0	23230	782	22	20.89	29.12%	0.023	0.030	-
					Left side	15	23230	782	22	20.89	29.12%	0.145	0.187	-

Proximity Sensor ON

Mode	Bandwi dth (MHz)	Modulatior	RB Size	RB start	Position	Distance (mm)	СН	Freq. (MHz)		Power		Averaged SAR over 1g (W/kg)		
									Avg. Power + Max. Toleranc e (dBm)		Scaling	Measured		Plot page
LTE Band 13	10MHz	QPSK	1 RB	0	Back side	0	23230	782	19	18.28	18.03%	0.250	0.295	-
					Left side	0	23230	782	19	18.28	18.03%	0.436	0.515	134
			25 RB	0	Back side	0	23230	782	18	17.52	11.69%	0.215	0.240	-
					Left side	0	23230	782	18	17.52	11.69%	0.371	0.414	-
			50 RB	8	Back side	0	23230	782	18	17.54	11.17%	0.212	0.236	-
				נט	Left side	0	23230	782	18	17.54	11.17%	0.369	0.410	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

> f (886-2) 2298-0488 t (886-2) 2299-3279



LTE FDD Band 17

Report No.: E5/2017/60002 Page: 109 of 240

Proximity Sensor OFF

	Bandwi				I Position I				Max. Rated Measure Avg. d			Averaged SAR over 1g (W/kg)		
Mode dth		Modulatior	RB Size	RB start		Distance (mm)	СН	Freq. (MHz)	Power + Max. Toleranc e (dBm)	Avg. Power	Scaling	Measured	Reported	Plot page
					Back side	10	23780	709	23	22.19	20.50%	0.137	0.165	-
			1 RB	0	Top side	0	23780	709	23	22.19	20.50%	0.022	0.027	-
					Left side	15	23780	709	23	22.19	20.50%	0.112	0.135	-
LTE					Back side	10	23780	709	22	21.05	24.45%	0.102	0.127	-
Band	10MHz	QPSK	25 RB	0	Top side	0	23780	709	22	21.05	24.45%	0.018	0.022	-
17					Left side	15	23780	709	22	21.05	24.45%	0.089	0.111	-
					Back side	10	23790	710	22	21.03	25.03%	0.101	0.126	-
			50 F	RB	Top side	0	23790	710	22	21.03	25.03%	0.018	0.023	-
					Left side	15	23790	710	22	21.03	25.03%	0.090	0.113	-

Proximity Sensor ON

Ban	Pondui	Bandwi	DD DD						Max. Rated	Measure d		Averaged 1g (W					
Mode			RB Size	RB start	Position	Distance (mm)	CH 23780	(IVIFIZ)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page			
			1 RB	0	Back side	0	23780	709	21	20.48	12.72%	0.196	0.221	-			
,			מאו	O	Left side	0	23780	709	21	20.48	12.72%	0.432	0.487	135			
LTE Band	10MHz	QPSK	25 RB	0	Back side	0	23780	709	20	19.63	8.89%	0.165	0.180	-			
17	10IVII 12	QFSIX	25 170	O	Left side	0	23780	709	20	19.63	8.89%	0.362	0.394	-			
''			50 RE	DB.	Back side	0	23790	710	20	19.62	9.14%	0.153	0.167	-			
							30 F	VD.	Left side	0	23790	710	20	19.62	9.14%	0.352	0.384

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



LTE FDD Band 26

Report No.: E5/2017/60002 Page: 110 of 240

Proximity Sensor OFF

	Bandwi		DD	RB		D			Max. Rated	Measure d		Averaged SAR over 1g (W/kg)		
	Modulatior	RB Size	start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	Avg. Power	Scaling	Measured	Reported	Plot page	
					Back side	10	26965	841.5	23	21.61	37.72%	0.323	0.445	-
			1 RB	0	Top side	0	26965	841.5	23	21.61	37.72%	0.055	0.076	-
					Left side	15	26965	841.5	23	21.61	37.72%	0.284	0.391	-
LTE					Back side	10	26825	822.5	22	20.79	32.13%	0.261	0.345	-
Band	15MHz	QPSK	36 RB	0	Top side	0	26825	822.5	22	20.79	32.13%	0.045	0.059	-
26					Left side	15	26825	822.5	22	20.79	32.13%	0.229	0.303	-
					Back side	10	26865	831.5	22	20.67	35.83%	0.255	0.346	-
			75 F	RB	Top side	0	26865	831.5	22	20.67	35.83%	0.044	0.060	-
					Left side	15	26865	831.5	22	20.67	35.83%	0.221	0.300	-

Proximity Sensor ON

Ba	Bandwi		DD.	22						Measure		Averaged 1 1g (W		
Mode		Modulatior	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Avg. Power + Max. Toleranc e (dBm)	d Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
			1 RB	0	Back side	0	26965	841.5	18	17.75	5.93%	0.232	0.246	-
,			TIND	U	Left side	0	26965	841.5	18	17.75	5.93%	0.409	0.433	136
LTE Band	15MHz	QPSK	36 RB	0	Back side	0	26825	822.5	17	16.61	9.40%	0.189	0.207	-
26	1 JIVII 12	QFOR	30 KD	U	Left side	0	26825	822.5	17	16.61	9.40%	0.326	0.357	-
-			75.5	75 RB	Back side	0	26825	822.5	17	16.61	9.40%	0.189	0.207	-
			/5	\D	Left side	0	26825	822.5	17	16.61	9.40%	0.326	0.357	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. www.tw.sgs.com



Page: 111 of 240

WLAN Main Antenna

Antenna	Mode	Position	Distance	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged S (W/	-	Plot
			(mm)		(IVITIZ)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back sdie	0	6	2437	17.5	17.31	104.47%	0.178	0.186	1
		Top side	0	6	2437	17.5	17.31	104.47%	0.044	0.046	-
	WLAN802.11 b	Left side	0	6	2437	17.5	17.31	104.47%	0.811	0.847	137
		Left side*	0	6	2437	17.5	17.31	104.47%	0.808	0.844	-
		Left side	0	11	2462	11.5	11.21	106.91%	0.728	0.778	-
		Back sdie	0	39	2441	5.5	5.15	108.39%	0.012	0.013	-
	Bluetooth (8DPSK)	Top side	0	39	2441	5.5	5.15	108.39%	0.003	0.003	-
		Left side	0	39	2441	5.5	5.15	108.39%	0.050	0.054	138
		Back sdie	0	40	5200	13	12.6	109.65%	0.166	0.182	-
Main	WLAN802.11 a 5.2G	Top side	0	40	5200	13	12.6	109.65%	0.037	0.041	-
Iviairi		Left side	0	40	5200	13	12.6	109.65%	0.444	0.487	139
		Back sdie	0	52	5260	13	12.65	108.39%	0.149	0.162	-
	WLAN802.11 a 5.3G	Top side	0	52	5260	13	12.65	108.39%	0.037	0.040	-
		Left side	0	52	5260	13	12.65	108.39%	0.423	0.459	140
		Back sdie	0	120	5600	13	12.65	108.39%	0.082	0.089	-
	WLAN802.11 a 5.6G	Top side	0	120	5600	13	12.65	108.39%	0.015	0.016	-
		Left side	0	120	5600	13	12.65	108.39%	0.287	0.311	141
		Back sdie	0	165	5825	13	12.63	108.89%	0.118	0.128	-
	WLAN802.11 a 5.8G	Top side	0	165	5825	13	12.63	108.89%	0.022	0.024	-
		Left side	0	165	5825	13	12.63	108.89%	0.458	0.499	142

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

WLAN Aux Antenna

Antenna	Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		AR over 1g /kg)	Plot page
			(111111)		(1011 12)	Tolerance (dBm)	(dBm)		Measured	Reported	page
		Back sdie	0	6	2437	17.5	17.15	108.39%	0.242	0.262	-
	WLAN802.11 b	Top side	0	6	2437	17.5	17.15	108.39%	0.709	0.769	143
		Left side	0	6	2437	17.5	17.15	108.39%	0.063	0.068	-
		Back sdie	0	0	2402	5.5	4.62	122.46%	0.027	0.034	-
	Bluetooth (8DPSK)	Top side	0	0	2402	5.5	4.62	122.46%	0.084	0.103	144
		Left side	0	0	2402	5.5	4.62	122.46%	0.003	0.004	-
	WLAN802.11 a 5.2G	Back sdie	0	36	5180	13	12.96	100.93%	0.188	0.190	-
		Top side	0	36	5180	13	12.96	100.93%	0.213	0.215	145
A		Left side	0	36	5180	13	12.96	100.93%	0.019	0.019	-
Aux		Back sdie	0	52	5260	13	12.93	101.62%	0.190	0.193	-
	WLAN802.11 a 5.3G	Top side	0	52	5260	13	12.93	101.62%	0.199	0.202	146
		Left side	0	52	5260	13	12.93	101.62%	0.012	0.012	-
		Back sdie	0	120	5600	13	12.95	101.16%	0.113	0.114	-
	WLAN802.11 a 5.6G	Top side	0	120	5600	13	12.95	101.16%	0.195	0.197	147
		Left side	0	120	5600	13	12.95	101.16%	0.009	0.009	-
		Back sdie	0	165	5825	13	12.95	101.16%	0.111	0.112	-
	WLAN802.11 a 5.8G	Top side	0	165	5825	13	12.95	101.16%	0.411	0.416	148
		Left side	0	165	5825	13	12.95	101.16%	0.013	0.013	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

t (886-2) 2299-3279

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 112 of 240

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
LTE + 2.4/5GHz WLAN Main	Yes
LTE + 2.4/5GHz WLAN Aux	Yes
LTE + BT Main + 2.4/5GHz WLAN Aux	Yes
LTE + 2.4/5GHz WLAN Main + BT Aux	Yes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 113 of 240

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power (mW)}}{\text{Min.test separation distance (mm)}} \times \frac{\sqrt{f(GHz)}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

mode	antenna	position	distance (mm)	Estimated SAR
WLAN 2.4G	Main/Aux	bottom	> 50	0.4 (1g)
WLAN 5G	Main/Aux	bottom	> 50	0.4 (1g)
BT	Main/Aux	bottom	>50	0.4 (1g)

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sas.com



Page: 114 of 240

LTE FDD Band 2 + 2.4 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.236	0.186	0.42	ΣSAR<1.6, Not required
1	LTE Band 2	Top side	0	0.085	0.046	0.13	ΣSAR<1.6, Not required
		Left side	0	0.531	0.847	1.38	ΣSAR<1.6, Not required

ITE FDD Band 4 + 2 4 GHz WI AN Main

	DD Dui	14 T Z.T OI 12 1	· · · · · · · · · · · · · · · · · · ·				
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.362	0.186	0.55	ΣSAR<1.6, Not required
2	LTE Band 4	Top side	0	0.069	0.046	0.12	ΣSAR<1.6, Not required
		Left side	0	0.484	0.847	1.33	ΣSAR<1.6, Not required

ITF FDD Band 5 + 2.4 GHz WI AN Main

	I DD Dui	14 5 T 2.7 OI 12 1	, , <u> </u>	idiii			
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.257	0.186	0.44	ΣSAR<1.6, Not required
3	LTE Band 5	Top side	0	0.077	0.046	0.12	ΣSAR<1.6, Not required
		Left side	0	0.437	0.847	1.28	ΣSAR<1.6, Not required

LTE FDD Band 7 + 2.4 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.090	0.186	0.28	ΣSAR<1.6, Not required
4	LTE Band 7	Top side	0	0.008	0.046	0.05	ΣSAR<1.6, Not required
		Left side	0	0.628	0.847	1.48	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 115 of 240

LTE FDD Band 13 + 2.4 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.295	0.186	0.48	ΣSAR<1.6, Not required
5	LTE Band 13	Top side	0	0.040	0.046	0.09	ΣSAR<1.6, Not required
		Left side	0	0.515	0.847	1.36	ΣSAR<1.6, Not required

ITF FDD Band 17 + 2.4 GHz WI AN Main

	ETET DD Build IT T 2.4 ONE WEAR Main										
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR				
		Back side	0	0.221	0.186	0.41	ΣSAR<1.6, Not required				
6	LTE Band 17	Top side	0	0.027	0.046	0.07	ΣSAR<1.6, Not required				
		Left side	0	0.487	0.847	1.33	ΣSAR<1.6, Not required				

ITF FDD Band 26 + 2.4 GHz WI AN Main

	ETE T DD Balla 20 + 2.4 OTIZ WEAR Mail										
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR				
		Back side	0	0.246	0.186	0.43	ΣSAR<1.6, Not required				
7	LTE Band 26	Top side	0	0.076	0.046	0.12	ΣSAR<1.6, Not required				
		Left side	0	0.433	0.847	1.28	ΣSAR<1.6, Not required				

LTE FDD Band 2 + 2.4 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.236	0.262	0.50	ΣSAR<1.6, Not required
8	LTE Band 2	Top side	0	0.085	0.769	0.85	ΣSAR<1.6, Not required
		Left side	0	0.531	0.068	0.60	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 116 of 240

LTE FDD Band 4 + 2.4 GHz WLAN Aux

	TE 1 DD Build 4 1 E.4 OHE WEAR AUX										
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR				
		Back side	0	0.362	0.262	0.62	ΣSAR<1.6, Not required				
9	LTE Band 4	Top side	0	0.069	0.769	0.84	ΣSAR<1.6, Not required				
		Left side	0	0.484	0.068	0.55	ΣSAR<1.6, Not required				

LTE FDD Band 5 + 2.4 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.257	0.262	0.52	ΣSAR<1.6, Not required
10	LTE Band 5	Top side	0	0.077	0.769	0.85	ΣSAR<1.6, Not required
		Left side	0	0.437	0.068	0.51	ΣSAR<1.6, Not required

LTE FDD Band 7 + 2.4 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR				
		Back side	0	0.090	0.262	0.35	ΣSAR<1.6, Not required				
11	LTE Band 7	Top side	0	0.008	0.769	0.78	ΣSAR<1.6, Not required				
		Left side	0	0.628	0.068	0.70	ΣSAR<1.6, Not required				

LTE FDD Band 13 + 2.4 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.295	0.262	0.56	ΣSAR<1.6, Not required
12	LTE Band 13	Top side	0	0.040	0.769	0.81	ΣSAR<1.6, Not required
		Left side	0	0.515	0.068	0.58	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 117 of 240

LTE FDD Band 17 + 2.4 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.221	0.262	0.48	ΣSAR<1.6, Not required
13	LTE Band 17	Top side	0	0.027	0.769	0.80	ΣSAR<1.6, Not required
		Left side	0	0.487	0.068	0.56	ΣSAR<1.6, Not required

LTE FDD Band 26 + 2.4 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR				
		Back side	0	0.246	0.262	0.51	ΣSAR<1.6, Not required				
14	LTE Band 26	Top side	0	0.076	0.769	0.85	ΣSAR<1.6, Not required				
		Left side	0	0.433	0.068	0.50	ΣSAR<1.6, Not required				

LTE FDD Band 2 + 5 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR			
		Back side	0	0.236	0.182	0.42	ΣSAR<1.6, Not required			
15	LTE Band 2	Top side	0	0.085	0.041	0.13	ΣSAR<1.6, Not required			
		Left side	0	0.531	0.499	1.03	ΣSAR<1.6, Not required			

LTE FDD Band 4 + 5 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.362	0.182	0.54	ΣSAR<1.6, Not required
16	LTE Band 4	Top side	0	0.069	0.041	0.11	ΣSAR<1.6, Not required
		Left side	0	0.484	0.499	0.98	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 118 of 240

LTE FDD Band 5 + 5 GHz WLAN Main

	TE 1 DD Build 0 1 0 OHZ WEAR Main										
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR				
		Back side	0	0.257	0.182	0.44	ΣSAR<1.6, Not required				
17	LTE Band 5	Top side	0	0.077	0.041	0.12	ΣSAR<1.6, Not required				
		Left side	0	0.437	0.499	0.94	ΣSAR<1.6, Not required				

LTE FDD Band 7 + 5 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR				
		Back side	0	0.090	0.182	0.27	ΣSAR<1.6, Not required				
18	LTE Band 7	Top side	0	0.008	0.041	0.05	ΣSAR<1.6, Not required				
		Left side	0	0.628	0.499	1.13	ΣSAR<1.6, Not required				

LTE FDD Band 13 + 5 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.295	0.182	0.48	ΣSAR<1.6, Not required
19	LTE Band 13	Top side	0	0.040	0.041	0.08	ΣSAR<1.6, Not required
		Left side	0	0.515	0.499	1.01	ΣSAR<1.6, Not required

LTE FDD Band 17 + 5 GHz WLAN Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR
		Back side	0	0.221	0.182	0.40	ΣSAR<1.6, Not required
20	LTE Band 17	Top side	0	0.027	0.041	0.07	ΣSAR<1.6, Not required
		Left side	0	0.487	0.499	0.99	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 119 of 240

LTE FDD Band 26 + 5 GHz WLAN Main

	TE 1 DD Balla 20 1 0 OH2 WEAR Mail										
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	SAR Sum	SPLSR				
		Back side	0	0.246	0.182	0.43	ΣSAR<1.6, Not required				
21	LTE Band 26	Top side	0	0.076	0.041	0.12	ΣSAR<1.6, Not required				
		Left side	0	0.433	0.499	0.93	ΣSAR<1.6, Not required				

LTE FDD Band 2 + 5 GHz WLAN Aux

	III I DD Dalla I I O OIII WEALTH AND									
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR			
		Back side	0	0.236	0.193	0.43	ΣSAR<1.6, Not required			
22	LTE Band 2	Top side	0	0.085	0.416	0.50	ΣSAR<1.6, Not required			
		Left side	0	0.531	0.019	0.55	ΣSAR<1.6, Not required			

LTE FDD Band 4 + 5 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.362	0.193	0.56	ΣSAR<1.6, Not required
23	LTE Band 4	Top side	0	0.069	0.416	0.49	ΣSAR<1.6, Not required
		Left side	0	0.484	0.019	0.50	ΣSAR<1.6, Not required

LTE FDD Band 5 + 5 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.257	0.193	0.45	ΣSAR<1.6, Not required
24	LTE Band 5	Top side	0	0.077	0.416	0.49	ΣSAR<1.6, Not required
		Left side	0	0.437	0.019	0.46	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 120 of 240

LTE FDD Band 7 + 5 GHz WLAN Aux

	TET DD Balla 7 TO GITE WEALTHAM										
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR				
		Back side	0	0.090	0.193	0.28	ΣSAR<1.6, Not required				
25	LTE Band 7	Top side	0	0.008	0.416	0.42	ΣSAR<1.6, Not required				
		Left side	0	0.628	0.019	0.65	ΣSAR<1.6, Not required				

I TE FDD Band 13 + 5 GHz WI AN Aux

	TE 1 DD Build 10 1 0 OHZ WEAR AUX									
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR			
		Back side	0	0.295	0.193	0.49	ΣSAR<1.6, Not required			
26	LTE Band 13	Top side	0	0.040	0.416	0.46	ΣSAR<1.6, Not required			
		Left side	0	0.515	0.019	0.53	ΣSAR<1.6, Not required			

LTE FDD Band 17 + 5 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR				
		Back side	0	0.221	0.193	0.41	ΣSAR<1.6, Not required				
27	LTE Band 17	Top side	0	0.027	0.416	0.44	ΣSAR<1.6, Not required				
		Left side	0	0.487	0.019	0.51	ΣSAR<1.6, Not required				

LTE FDD Band 26 + 5 GHz WLAN Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	SAR Sum	SPLSR
		Back side	0	0.246	0.193	0.44	ΣSAR<1.6, Not required
28	LTE Band 26	Top side	0	0.076	0.416	0.49	ΣSAR<1.6, Not required
		Left side	0	0.433	0.019	0.45	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 121 of 240

LTE FDD Band 2 + 2.4 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0	0.236	0.186	0.034	0.46	ΣSAR<1.6, Not required
29	LTE Band 2	Top side	0	0.085	0.046	0.103	0.23	ΣSAR<1.6, Not required
		Left side	0	0.531	0.847	0.004	1.38	ΣSAR<1.6, Not required

LTE FDD Band 4 + 2.4 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	вт	SAR Sum	SPLSR			
		Back side	0	0.362	0.186	0.034	0.58	ΣSAR<1.6, Not required			
30	LTE Band 4	Top side	0	0.069	0.046	0.103	0.22	ΣSAR<1.6, Not required			
		Left side	0	0.484	0.847	0.004	1.34	ΣSAR<1.6, Not required			

LTF FDD Band 5 + 2 4 GHz WI AN Main + BT Aux

	LIE I DD Baild 3 + 2.4 GHZ WEAN Maill + BT Aux											
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR				
		Back side	0	0.257	0.186	0.034	0.48	ΣSAR<1.6, Not required				
31	LTE Band 5	Top side	0	0.077	0.046	0.103	0.23	ΣSAR<1.6, Not required				
		Left side	0	0.437	0.847	0.004	1.29	ΣSAR<1.6, Not required				

LTE FDD Band 7 + 2.4 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0	0.090	0.186	0.034	0.31	ΣSAR<1.6, Not required
32	LTE Band 7	Top side	0	0.008	0.046	0.103	0.16	ΣSAR<1.6, Not required
		Left side	0	0.628	0.847	0.004	1.48	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 122 of 240

LTE FDD Band 13 + 2.4 GHz WLAN Main + BT Aux

	TE 1 DD Build 10 1 2.4 OHZ WEAR Mulli 1 D1 Aux										
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR			
		Back side	0	0.295	0.186	0.034	0.52	ΣSAR<1.6, Not required			
33	LTE Band 13	Top side	0	0.040	0.046	0.103	0.19	ΣSAR<1.6, Not required			
		Left side	0	0.515	0.847	0.004	1.37	ΣSAR<1.6, Not required			

LTE FDD Band 17+ 2.4 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0	0.221	0.186	0.034	0.44	ΣSAR<1.6, Not required
34	LTE Band 17	Top side	0	0.027	0.046	0.103	0.18	ΣSAR<1.6, Not required
		Left side	0	0.487	0.847	0.004	1.34	ΣSAR<1.6, Not required

LTE FDD Band 26 + 2.4 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR			
		Back side	0	0.246	0.186	0.034	0.47	ΣSAR<1.6, Not required			
35	LTE Band 26	Top side	0	0.076	0.046	0.103	0.23	ΣSAR<1.6, Not required			
		Left side	0	0.433	0.847	0.004	1.28	ΣSAR<1.6, Not required			

LTE FDD Band 2 + 2.4 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.236	0.262	0.013	0.51	ΣSAR<1.6, Not required
36	LTE Band 2	Top side	0	0.085	0.769	0.003	0.86	ΣSAR<1.6, Not required
		Left side	0	0.531	0.068	0.054	0.65	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 123 of 240

LTE FDD Band 4 + 2.4 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.362	0.262	0.013	0.64	ΣSAR<1.6, Not required
37	LTE Band 4	Top side	0	0.069	0.769	0.003	0.84	ΣSAR<1.6, Not required
		Left side	0	0.484	0.068	0.054	0.61	ΣSAR<1.6, Not required

LTE FDD Band 5 + 2.4 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR				
		Back side	0	0.257	0.262	0.013	0.53	ΣSAR<1.6, Not required				
38	LTE Band 5	Top side	0	0.077	0.769	0.003	0.85	ΣSAR<1.6, Not required				
		Left side	0	0.437	0.068	0.054	0.56	ΣSAR<1.6, Not required				

LTE FDD Band 7 + 2.4 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR				
		Back side	0	0.090	0.262	0.013	0.37	ΣSAR<1.6, Not required				
39	LTE Band 7	Top side	0	0.008	0.769	0.003	0.78	ΣSAR<1.6, Not required				
		Left side	0	0.628	0.068	0.054	0.75	ΣSAR<1.6, Not required				

LTE FDD Band 13 + 2.4 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.295	0.262	0.013	0.57	ΣSAR<1.6, Not required
40	LTE Band 13	Top side	0	0.040	0.769	0.003	0.81	ΣSAR<1.6, Not required
		Left side	0	0.515	0.068	0.054	0.64	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 124 of 240

LTE FDD Band 17 + 2.4 GHz WLAN Aux + BT Main

	TE I DD Balla II I ZIA GIIZ VIZIVI NAX I DI Iliani											
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR				
		Back side	0	0.221	0.262	0.013	0.50	ΣSAR<1.6, Not required				
41	LTE Band 17	Top side	0	0.027	0.769	0.003	0.80	ΣSAR<1.6, Not required				
		Left side	0	0.487	0.068	0.054	0.61	ΣSAR<1.6, Not required				

LTE FDD Band 26 + 2.4 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.246	0.262	0.013	0.52	ΣSAR<1.6, Not required
42	LTE Band 26	Top side	0	0.076	0.769	0.003	0.85	ΣSAR<1.6, Not required
		Left side	0	0.433	0.068	0.054	0.56	ΣSAR<1.6, Not required

LTE FDD Band 2 + 5 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR				
		Back side	0	0.236	0.182	0.034	0.45	ΣSAR<1.6, Not required				
43	LTE Band 2	Top side	0	0.085	0.041	0.103	0.23	ΣSAR<1.6, Not required				
	2	Left side	0	0.531	0.499	0.004	1.03	ΣSAR<1.6, Not required				

LTE FDD Band 4 + 5 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0	0.362	0.182	0.034	0.58	ΣSAR<1.6, Not required
44	LTE Band 4	Top side	0	0.069	0.041	0.103	0.21	ΣSAR<1.6, Not required
		Left side	0	0.484	0.499	0.004	0.99	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 125 of 240

LTE FDD Band 5 + 5 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e	Max. WWAN	Max. WLAN	ВТ	SAR Sum	SPLSR
			(mm)		Main			70AD 4.0
		Back side	0	0.257	0.182	0.034	0.47	ΣSAR<1.6, Not required
45	LTE Band 5	Top side	0	0.077	0.041	0.103	0.22	ΣSAR<1.6, Not required
		Left side	0	0.437	0.499	0.004	0.94	ΣSAR<1.6, Not required

LTE FDD Band 7 + 5 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0	0.090	0.182	0.034	0.31	ΣSAR<1.6, Not required
46	LTE Band 7	Top side	0	0.008	0.041	0.103	0.15	ΣSAR<1.6, Not required
		Left side	0	0.628	0.499	0.004	1.13	ΣSAR<1.6, Not required

LTE FDD Band 13 + 5 GHz WLAN Main + BT Aux

	TE 1 DD Balla 10 10 GHZ WE/W Mail 1 D1 / MAX											
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR				
		Back side	0	0.295	0.182	0.034	0.51	ΣSAR<1.6, Not required				
47	LTE Band 13	Top side	0	0.040	0.041	0.103	0.18	ΣSAR<1.6, Not required				
		Left side	0	0.515	0.499	0.004	1.02	ΣSAR<1.6, Not required				

LTE FDD Band 17+ 5 GHz WLAN Main + BT Aux

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR
		Back side	0	0.221	0.182	0.034	0.44	ΣSAR<1.6, Not required
48	LTE Band 17	Top side	0	0.027	0.041	0.103	0.17	ΣSAR<1.6, Not required
		Left side	0	0.487	0.499	0.004	0.99	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 126 of 240

LTE FDD Band 26 + 5 GHz WLAN Main + BT Aux

	TE 1 DD Dana 20 1 0 GHZ WEXT Main 1 D1 Xax											
No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Main	ВТ	SAR Sum	SPLSR				
		Back side	0	0.246	0.182	0.034	0.46	ΣSAR<1.6, Not required				
49	LTE Band 26	Top side	0	0.076	0.041	0.103	0.22	ΣSAR<1.6, Not required				
		Left side	0	0.433	0.499	0.004	0.94	ΣSAR<1.6, Not required				

LTE FDD Band 2 + 5 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.236	0.193	0.013	0.44	ΣSAR<1.6, Not required
50	LTE Band 2	Top side	0	0.085	0.416	0.003	0.50	ΣSAR<1.6, Not required
		Left side	0	0.531	0.019	0.054	0.60	ΣSAR<1.6, Not required

LTE FDD Band 4 + 5 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.362	0.193	0.013	0.57	ΣSAR<1.6, Not required
51	LTE Band 4	Top side	0	0.069	0.416	0.003	0.49	ΣSAR<1.6, Not required
		Left side	0	0.484	0.019	0.054	0.56	ΣSAR<1.6, Not required

LTE FDD Band 5 + 5 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.257	0.193	0.013	0.46	ΣSAR<1.6, Not required
52	LTE Band 5	Top side	0	0.077	0.416	0.003	0.50	ΣSAR<1.6, Not required
		Left side	0	0.437	0.019	0.054	0.51	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 127 of 240

LTE FDD Band 7 + 5 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.090	0.193	0.013	0.30	ΣSAR<1.6, Not required
53	LTE Band 7	Top side	0	0.008	0.416	0.003	0.43	ΣSAR<1.6, Not required
		Left side	0	0.628	0.019	0.054	0.70	ΣSAR<1.6, Not required

LTE FDD Band 13 + 5 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
		Back side	0	0.295	0.193	0.013	0.50	ΣSAR<1.6, Not required
54	LTE Band 13	Top side	0	0.040	0.416	0.003	0.46	ΣSAR<1.6, Not required
		Left side	0	0.515	0.019	0.054	0.59	ΣSAR<1.6, Not required

LTE FDD Band 17 + 5 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR	
		Back side	0	0.221	0.193	0.013	0.43	ΣSAR<1.6, Not required	
55	LTE Band 17	Top side	0	0.027	0.416	0.003	0.45	ΣSAR<1.6, Not required	
		Left side	0	0.487	0.019	0.054	0.56	ΣSAR<1.6, Not required	

LTE FDD Band 26 + 2.4 GHz WLAN Aux + BT Main

No.	Conditions	Position	Distanc e (mm)	Max. WWAN	Max. WLAN Aux	ВТ	SAR Sum	SPLSR
56	LTE Band 26	Back side	0	0.246	0.193	0.013	0.45	ΣSAR<1.6, Not required
		Top side	0	0.076	0.416	0.003	0.50	ΣSAR<1.6, Not required
		Left side	0	0.433	0.019	0.054	0.51	ΣSAR<1.6, Not required

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 128 of 240

4. Instruments List

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
Schmid & Partner Engineering AG	Dosimetric E-Field Probe	EX3DV4	3923	Sep.02,2016	Sep.01,2017
		D750V3	1015	Aug.30,2016	Aug.29,2017
		D835V2	4d063	Aug.25,2016	Aug.24,2017
Schmid &		D175V2	1008	Aug.31,2016	Aug.30,2017
Partner	System Validation Dipole	D1900V2	5d173	May.31,2017	May.30,2018
Engineering AG	p = .c	D2450V2		Apr.21,2017	Apr.20,2018
		D2600V2		Jan.25,2017	Jan.24,2018
		D5GHzV2	1023	Jan.20,2017	Jan.19,2018
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	547	Mar.22,2017	Mar.21,2018
Schmid & Partner Engineering AG	Software	DASY 52 V52.8.8	N/A	Calibration not required	Calibration not required
Schmid & Partner Engineering AG	Phantom	ELI	N/A	Calibration not required	Calibration not required
Agilent	Network Analyzer	E5071C	MY46107530	Jan.20,2017	Jan.19,2018
Agilent	Dielectric Probe Kit	85070E	MY44300677	Calibration not required	Calibration not required
\(\ailont	Dual-directional	772D	MY46151242	Jul.11,2016	Jul.10,2017
Agilent	coupler	778D	778D MY48220468		Jul.05,2017
Agilent	RF Signal Generator	N5181A	MY50144143	Mar.01,2017	Feb.28,2018
Agilent	Power Meter	E4417A	MY52240003	Oct.17,2016	Oct.16,2017
\ ailant	Dower Canaar	F000411	MY52200003	Oct.17,2016	Oct.16,2017
Agilent	Power Sensor	E9301H	MY52200004	Oct.17,2016	Oct.16,2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 129 of 240

Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration
TECPEL	Digital thermometer	DTM-303A	TP130077	Mar.17,2017	Mar.16,2018
LKM	Temperature Probe	DTM-3000	EC14010603	Mar.20,2017	Mar.19,2018
Anritsu	Radio Communication Test	MT8820C	6201061049	Apr.08,2017	Apr.07,2018

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 130 of 240

5. Measurements

Date: 2017/6/20

LTE Band 2 (20MHz) Body Left side CH 19100 QPSK 1-0 0mm

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; $\sigma = 1.582 \text{ S/m}$; $\varepsilon_r = 51.712$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (61x131x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.721 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 7.633 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.717 W/kg



0 dB = 0.717 W/kq = -1.45 dBW/kq

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 131 of 240

Date: 2017/6/20

LTE Band 4 (20MHz)_Body_Left side_CH 20050_QPSK_1-0_0mm

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1720 MHz; $\sigma = 1.504 \text{ S/m}$; $\varepsilon_r = 52.612$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (61x131x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.626 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dv=8mm, dz=5mm


Π

Reference Value = 6.149 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.598 W/kg



0 dB = 0.598 W/kg = -2.23 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: E5/2017/60002 Page: 132 of 240

Date: 2017/6/16

LTE Band 5 (10MHz)_Body_Left side_CH 20600_QPSK_1-0_0mm

Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: f = 844 MHz; $\sigma = 0.993$ S/m; $\varepsilon_r = 54.919$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.67, 10.67, 10.67); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (61x131x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.534 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm, dz=5mm

Reference Value = 18.47 V/m: Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.551 W/kg



0 dB = 0.551 W/kg = -2.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Report No.: E5/2017/60002 Page: 133 of 240

Date: 2017/6/22

LTE Band 7 (20MHz)_Body_Left side_CH 21100_QPSK_1-50_0mm

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2535 MHz; $\sigma = 2.039$ S/m; $\varepsilon_r = 52.015$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x181x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 0.996 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm, dz=5mm

Reference Value = 14.46 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.257 W/kg

Maximum value of SAR (measured) = 0.971 W/kg



0 dB = 0.971 W/kg = -0.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No.: E5/2017/60002 Page: 134 of 240

Date: 2017/6/16

LTE Band 13 (10MHz)_Body_Left side_CH 23230_QPSK_1-0_0mm

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: f = 782 MHz; $\sigma = 0.994$ S/m; $\varepsilon_r = 53.473$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (61x131x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.554 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm, dz=5mm

Reference Value = 19.69 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.582 W/kg



0 dB = 0.582 W/kg = -2.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 135 of 240

Date: 2017/6/16

LTE Band 17 (10MHz)_Body_Left side_CH 23780_QPSK_1-0_0mm

Communication System: LTE; Frequency: 709 MHz; Duty Cycle: 1:1

Medium parameters used: f = 709 MHz; $\sigma = 0.921$ S/m; $\varepsilon_r = 53.838$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (61x131x1): Interpolated grid: dx=15 mm, dy=15

Maximum value of SAR (interpolated) = 0.546 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dv=8mm, dz=5mm

Reference Value = 19.43 V/m: Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.558 W/kg



0 dB = 0.558 W/kg = -2.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 136 of 240

Date: 2017/6/16

LTE Band 26 (15MHz)_Body_Left side_CH 26965_QPSK_1-0_0mm

Communication System: LTE; Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 841.5 MHz; $\sigma = 0.99 \text{ S/m}$; $\varepsilon_r = 54.934$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.67, 10.67, 10.67); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (61x131x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.553 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 17.57 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.679 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.557 W/kg



0 dB = 0.557 W/kg = -2.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 137 of 240

Date: 2017/6/22

WLAN 802.11b_Body_Left side_CH 6_Main_0mm

Communication System: WLAN(2.4G); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2437 MHz; $\sigma = 1.941$ S/m; $\varepsilon_r = 53.973$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.06, 8.06, 8.06); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (71x101x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 1.25 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm, dz=5mm

Reference Value = 6.889 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 1.26 W/kg



0 dB = 1.26 W/kg = 1.02 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 138 of 240

Date: 2017/6/22

Bluetooth(8DPSK)_Body_Left side_CH 39_Main_0mm

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2441 MHz; $\sigma = 1.945$ S/m; $\varepsilon_r = 53.892$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.06, 8.06, 8.06); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (71x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0978 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 1.372 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0832 W/kg



0 dB = 0.0832 W/kg = -10.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Report No.: E5/2017/60002 Page: 139 of 240

Date: 2017/6/23

WLAN 802.11a 5.2G_Body_Left side_CH 40_Main_0mm

Communication System: WLAN(5G); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 5.172 \text{ S/m}$; $\varepsilon_r = 49.994$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.8°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.822 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 1.040 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.904 W/kg





0 dB = 0.904 W/kg = -0.44 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: E5/2017/60002 Page: 140 of 240

Date: 2017/6/23

WLAN 802.11a 5.3G_Body_Left side_CH 52_Main_0mm

Communication System: WLAN(5G); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5260 MHz; $\sigma = 5.23 \text{ S/m}$; $\varepsilon_r = 49.693$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.9°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.826 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm

Reference Value = 1.789 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.906 W/kg



0 dB = 0.906 W/kg = -0.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Report No.: E5/2017/60002 Page: 141 of 240

Date: 2017/6/26

WLAN 802.11a 5.6G Body Left side CH 120 Main 0mm

Communication System: WLAN(5G); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.576 \text{ S/m}$; $\varepsilon_r = 47.999$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4, 4, 4); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.644 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2mm


Reference Value = 0.4970 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.657 W/kg





0 dB = 0.657 W/kg = -1.82 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No. : E5/2017/60002 Page : 142 of 240

Date: 2017/6/26

WLAN 802.11a 5.8G Body Left side CH 165 Main 0mm

Communication System: WLAN(5G); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5825 MHz; $\sigma = 5.795 \text{ S/m}$; $\varepsilon_r = 46.865$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.19, 4.19, 4.19); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.902 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.4812 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.51 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 1.05 W/kg



0 dB = 1.05 W/kg = 0.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 143 of 240

Date: 2017/6/22

WLAN 802.11b_Body_Top side_CH 6_Aux_0mm

Communication System: WLAN(2.45G); Frequency: 2437 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2437 MHz; $\sigma = 1.941$ S/m; $\varepsilon_r = 53.973$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.06, 8.06, 8.06); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 1.06 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dv=5mm, dz=5mm

Reference Value = 3.947 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm,


dv=5mm, dz=5mm

Reference Value = 3.947 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.982 W/kg



0 dB = 0.982 W/kg = -0.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Report No.: E5/2017/60002 Page: 144 of 240

Date: 2017/6/22

Bluetooth(8DPSK)_Body_Top side_CH 0_Aux_0mm

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2402 MHz; $\sigma = 1.906$ S/m; $\varepsilon_r = 54.671$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.06, 8.06, 8.06); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=12 mm, dy=12

Maximum value of SAR (interpolated) = 0.136 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dv=5mm, dz=5mm

Reference Value = 0.1570 V/m: Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.133 W/kg



0 dB = 0.133 W/kg = -8.76 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: E5/2017/60002 Page: 145 of 240

Date: 2017/6/23

WLAN 802.11a 5.2G_Body_Top side_CH 36_Aux_0mm

Communication System: WLAN(5G); Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5180 MHz; $\sigma = 5.151 \text{ S/m}$; $\varepsilon_r = 50.093$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.8°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.607 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.3820 V/m: Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.493 W/kg



0 dB = 0.493 W/kg = -3.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No.: E5/2017/60002 Page: 146 of 240

Date: 2017/6/23

WLAN 802.11a 5.3G_Body_Top side_CH 52_Aux_0mm

Communication System: WLAN(5G); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5260 MHz; $\sigma = 5.23 \text{ S/m}$; $\varepsilon_r = 49.693$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.8°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.455 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.3927 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.448 W/kg



0 dB = 0.448 W/kg = -3.48 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Report No.: E5/2017/60002 Page: 147 of 240

Date: 2017/6/26

WLAN 802.11a 5.6G_Body_Top side_CH 120_Aux_0mm

Communication System: WLAN(5G); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.576 \text{ S/m}$; $\varepsilon_r = 47.999$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4, 4, 4); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.552 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.3917 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.460 W/kg



0 dB = 0.460 W/kg = -3.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Report No.: E5/2017/60002 Page: 148 of 240

Date: 2017/6/26

WLAN 802.11a 5.8G_Body_Top side_CH 165_Aux_0mm

Communication System: WLAN(5G); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5825 MHz; $\sigma = 5.795$ S/m; $\varepsilon_r = 46.865$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.19, 4.19, 4.19); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Body/Area Scan (81x111x1): Interpolated grid: dx=10 mm, dy=10

Maximum value of SAR (interpolated) = 0.996 W/kg

Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 0.6845 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.955 W/kg



0 dB = 0.955 W/kg = -0.20 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 149 of 240

6. SAR System Performance Verification

Date: 2017/6/16

Dipole 750 MHz_SN:1015

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 750 MHz; $\sigma = 0.962 \text{ S/m}$; $\varepsilon_r = 53.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN3923; ConvF(10.83, 10.83, 10.83); Calibrated: 2016/9/2;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn547; Calibrated: 2017/3/22

Phantom: Body

DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (51x141x1): Interpolated grid: dx=15 mm,

dy=15 mm

Maximum value of SAR (interpolated) = 2.42 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.43 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.42 W/kg Maximum value of SAR (measured) = 2.42 W/kg



0 dB = 2.42 W/kg = 3.84 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Report No.: E5/2017/60002 Page: 150 of 240

Date: 2017/6/16

Dipole 835 MHz SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; $\sigma = 0.984$ S/m; $\varepsilon_r = 54.973$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(10.67, 10.67, 10.67); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (61x121x1): Interpolated grid: dx=15 mm, dv=15 mm

Maximum value of SAR (interpolated) = 3.11 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.51 V/m: Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 3.09 W/kg

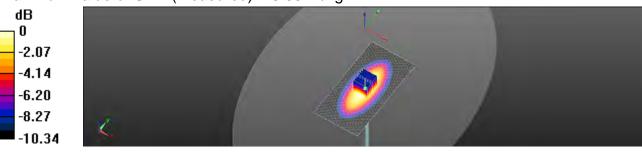

0 dB = 3.09 W/kg = 4.90 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Report No.: E5/2017/60002 Page: 151 of 240

Date: 2017/6/20

Dipole 1750 MHz SN:1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1750 MHz; $\sigma = 1.534 \text{ S/m}$; $\varepsilon_r = 52.462$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.78, 8.78, 8.78); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm, dv=15 mm

Maximum value of SAR (interpolated) = 13.7 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.65 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.24 W/kg; SAR(10 g) = 5.02 W/kg

Maximum value of SAR (measured) = 12.9 W/kg

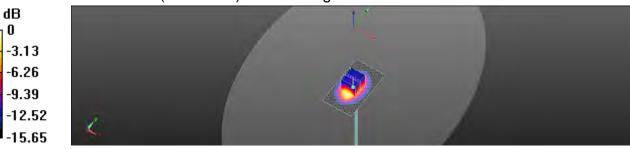

0 dB = 12.9 W/kg = 11.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 152 of 240

Date: 2017/6/20

Dipole 1900 MHz_SN:5d173

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; $\sigma = 1.582 \text{ S/m}$; $\varepsilon_r = 51.712$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- · Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (41x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.8 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.29 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.96 W/kg; SAR(10 g) = 5.2 W/kg

Maximum value of SAR (measured) = 14.2 W/kg

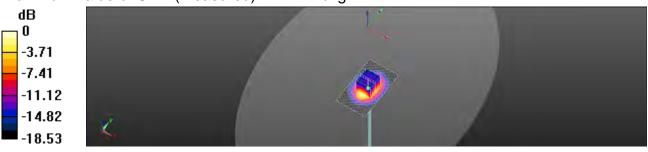

0 dB = 14.2 W/kg = 11.51 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: E5/2017/60002 Page: 153 of 240

Date: 2017/6/22

Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.954 \text{ S/m}$; $\varepsilon_r = 53.716$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(8.06, 8.06, 8.06); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (61x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 20.6 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.51 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.97 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

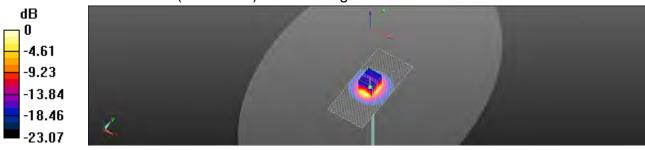

0 dB = 19.7 W/kg = 12.95 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 154 of 240

Date: 2017/6/22

Dipole 2600 MHz SN:1005

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 2.104 \text{ S/m}$; $\epsilon_r = 50.713$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=250mW/Area Scan (71x91x1): Interpolated grid: dx=12 mm, dv=12 mm

Maximum value of SAR (interpolated) = 23.2 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.0 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 31.1 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.15 W/kg

Maximum value of SAR (measured) = 22.1 W/kg



0 dB = 22.1 W/kg = 13.44 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: E5/2017/60002 Page: 155 of 240

ago: .co c. _.c

Date: 2017/6/23

Dipole 5200MHz_SN:1023

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5200 MHz; $\sigma = 5.172 \text{ S/m}$; $\varepsilon_r = 49.994$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.8°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (61x81x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 15.2 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 56.71 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 7.33 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 15.4 W/kg

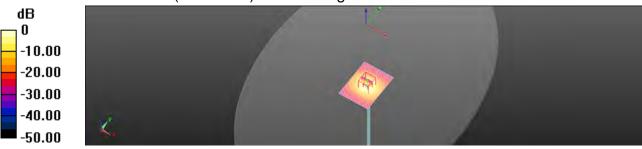

0 dB = 15.4 W/kg = 11.87 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: E5/2017/60002 Page: 156 of 240

Date: 2017/6/23

Dipole 5300MHz SN:1023

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5300 MHz; $\sigma = 5.274 \text{ S/m}$; $\varepsilon_r = 49.493$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.9°C; Liquid temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.58, 4.58, 4.58); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (61x81x1): Interpolated grid: dx=10 mm, dv=10 mm

Maximum value of SAR (interpolated) = 17.0 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.66 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 7.61 W/kg; SAR(10 g) = 2.12 W/kg

Maximum value of SAR (measured) = 16.9 W/kg



0 dB = 16.9 W/kg = 12.28 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Report No.: E5/2017/60002 Page: 157 of 240

Date: 2017/6/26

Dipole 5600MHz SN:1023

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.576 \text{ S/m}$; $\varepsilon_r = 47.999$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4, 4, 4); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (61x81x1): Interpolated grid: dx=10 mm, dv=10 mm

Maximum value of SAR (interpolated) = 17.1 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 59.71 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 17.1 W/kg



0 dB = 17.1 W/kg = 12.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No.: E5/2017/60002 Page: 158 of 240

Date: 2017/6/26

Dipole 5800MHz SN:1023

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: f = 5800 MHz; $\sigma = 5.773 \text{ S/m}$; $\varepsilon_r = 46.993$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 SN3923; ConvF(4.19, 4.19, 4.19); Calibrated: 2016/9/2;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2017/3/22
- Phantom: Body
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7373)

Configuration/Pin=100mW/Area Scan (61x81x1): Interpolated grid: dx=10 mm, dv=10 mm

Maximum value of SAR (interpolated) = 16.4 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.30 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 16.6 W/kg



0 dB = 16.6 W/kg = 12.19 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 159 of 240

7. DAE & Probe Calibration Certificate

Calibration Laboratory of Schmid & Partner Engineering AG Zwoghausstrasse 43, 8004 Zurich, Switzerland





According by the Sweat According to Service (SAS).
The Swiss According to Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates.

Accreditation No.: SCS 0108

SGS - TW (Auden) Certificate No: DAE4-547_Mar17 CALIBRATION CERTIFICATE Object DAE4 - SD 000 D04 BM - SN: 547 OA CAL-08 v29 Calibration procedure(s) Calibration procedure for the data acquisition electronics (DAE) March 22, 2017 Calibration date This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The impassing ments and the uncertainties with confidence probability are given on the following pages and are part of the confidence All calibrations have been conducted in the closed laboratory facility, environment temperature (32 ± 3)°C and furnidity < 70%. Calibration Equipment used (MATE critical for calibration) 10 # Cal Date (Certificate No.) Scheduled Calibration Primary Standards Keithley Multimeter Type 2001 Sep-17 Secondary Standards Check Date (in house) Scheduled Check Auto DAE Galibration Unit SE UWS 053 AA 1001 05-Jan-17 (in house check) In house check: Jan-18 Calibrator Box V2.1 SE UMS 006 AA 1002 95-Jan-17 (in house check) In house check: Jan-18 Eric Hainfeld Tecrnician Deputy Technical Manager Fin Bomhott Approved by: Issued: March 22, 2017 This celloration certificate shall not be reproduced ascept in full without written approval of the laboratory

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

Certificate No: DAE4-547 Mar17

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 1 of 5

SGS Taiwan Ltd.



Page: 160 of 240

Calibration Laboratory of Schmid & Partner Engineering AG 43, 8004 Zurich, Switzerla





Schweizerlocher Kalibrierdienst Service suices d'éstionnage Servizio svizzeno di tecnene **Buiss Calibration Service**

Accreditation No.: SCS 0108

According by the Swiss According to Service (SAS). The Swiss Accorditation Service is one of the signaturies to the EA Müllitateral Agreement for the recognition of calibration certificates

Glossary

DAE data acquisition electronics

information used in DASY system to align probe sensor X to the robot Connector angle

coordinate system.

Methods Applied and Interpretation of Parameters

DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.

- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this
 - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage
 - AD Converter Values with inputs shorted. Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-547 Mar 17

Page 2 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 161 of 240

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = full range = -100...+300 mV Low Range: 1LSB = 61nV, full range = -1......+3mV DASY measurement paremeters. Auto Zéro Time: 3 sec. Measuring time: 3 sec.

Calibration Factors	X	Α.	Z
High Range	403.189 / 0.02% (k=2)	403.093 ± 0.02% (k=2)	402.739 ± 0.02% (k=2)
Low Range	3,95348 ± 1.50% (k=2)	3,90456 ± 1,50% (K=2)	3,96243 ± 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	91.0 °±1 °
---	------------

Circlinate No: DAE4-647, Mart 7

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 162 of 240

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200031.23	0,59	0.00
Channel X + Input	20005,44	2.04	-0.01
Channel X - Input	-20000.97	4,91	-0.02
Channel Y + Input	200029.80	-1,03	-0.00
Channel Y + Input	20000.30	-3.03	-0.02
Channel Y - Input	-20007.73	-1.72	0.01
Channel Z + Input	200030,21	-0.96	-0.00
Channel Z + Input	20003.13	-0.21	-0.00
Channel Z - Input	-20005.14	0.81	-0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2000.02	-0.08	-0.00
Channel X + Input	200 18	0.36	0.18
Channel X - Input	-200.16	0.00	-0.00
Channel Y + Input	2000,10	0.06	0.00
Channel Y + Input	199.43	-0.40	-0.20
Channel Y - Input	-200.77	-0.70	0.35
Channel Z + Input	2000,19	0.28	0.01
Channel Z + Input	198.82	-1,00	-0.50
Channel Z - Input	-201,46	-1,37	0.68

2. Common mode sensitivity

DASY measurement parameters. Auto Zero Time: 3 sec; Measuring time: 3 sec.

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-2.09	-5.00
	- 200	6.80	4,50
Channel Y	200	-0.67	4.21
	-200	0,37	-0.41
Channel Z	200	5.07	4.93
	- 200	-7,67	-8.12

3. Channel separation

DASY measurement parameters: Auto Zero Time, 3 sec: Measuring time; 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	2.65	-2.08
Channel Y	200	10,56	8	3.60
Channel Z	200	4.55	7.85	100

Certificate No: DAE4-547_Mor17

Page 4 of S

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 163 of 240

4. AD-Converter Values with inputs shorted

DASY measurement parameters. Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16364	15364
Channel Y	16476	16801
Channel Z	16077	16468

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec Input 10MD.

	Average (µV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	-0.53	-1.14	0.26	0.31
Channel Y	-1.03	-2.43	-0.21	0.32
Channel Z	-1.56	-2.31	-0.62	0.35

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

Zeroing (kOhm)	Measuring (MOhm)
200	200
200	200
\$00	200
	200 200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9		
Supply (- Vcc)	-7,6		

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	914
Supply (- Voc)	-0.01	-В	-9

Continue No: DAE4-547_Mar1

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



Page: 164 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zaughaustruse 43, 8004 Zurich, Switzerland





Service suisse d'étalormage Servizio evizzero di taratura Swiss Calibration Service

Accredited by the Swas Accreditation Service (SAS) The Swas Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Germania No: EX3-3923_Sep 16

CALIBRATION CERTIFICATE EX3DV4 - SN:3923 Chied QA GAL 01.v8, QA CAL-14.v4. QA CAL-25.v5, DA CAL-25.v6 Cathwilen precedure(s) Calibration procedure for dosimetric E-field probes-September 2, 2016 Calbudios ditie-This calibration cardificate occurrents the traceability to national standards, which ratios this physical units of measurements (SI) The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate All culture runs have been conducted in the closed intomiory facility invironment terrolecture (22 ± 3)°C and humidity < 70%. Calibration Equipment, used (M&TE orbical for definiation)

Primary Standards	.6	Cal Date (Certificate No.)	Scheduled Calibration
Power main NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-ZS1	5N: 183044	(M-Api-19 (No. 217-02288)	Apr-17
Fower sensor NRP-Z91	BN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 55277 (20x)	G5-Apr-16 (No. 217-02293)	Apr-17
Reference Probe ESBDV2	SN: 3013	31-Dec-15 (No ES3-3813 Dec15)	Dec-16.
DAE-4	SN: 660	23-Dac-15 (No DAE4-800 Dec15)	Dec-16
Sepondary Standards	ID.	Check Date (in house)	Scheduled Check
Power meter E44198	SN: ISB41293874	DD-Apr-10 (in naise check Juli-16)	in house streck day-18
Power serisor E4412A	SN MY41408087	06-Apr-10 (in house check Jun-16)	in house check: Jun 18
Power sersor E4412A	SM 000110210	DS-Agr-16 (in house check Jun-18)	in house check ain-18
RP generato: HP 8848C	SN: US3642U01700	04-Aug-89 (In house-check Jun-16)	in house check. Jun-18
Network Analyzer HP 8753E	SN: USJ7Jackie	18-Oct-01 (in house check Oct-15)	in house check, Cici-16

	tvame	Function	Signam
Californian by	Michael William	Laboratory Lecturism	MNEST
Approved by	Kaga Pokovic	Teclinical Manager	BING
			Issued September 2, 2016

Certificate No: EX3-3923_Sep16

Page 1 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 165 of 240

Calibration Laboratory of

Schmid & Partner Engineering AG opposite the second opposite th





Schweizerleicher Kellbriechlein s Sarvice sulms d'élalmanage C Servizio svizzero di teretura 5 Swins Calibration Buryley

Accreditation No. SCS 010E Accrecited by the Swee Accrecitation Security (SAS)

The Swite Accorditation Service is one of the signatures to the EA facetaccal Agreement for the recognition of calibration certificates

Glossary:

hispi pritelume sussil NORMx,y,z sensitivity in tree space aussilvity in TSL / NORMx,y,z CUNF DCP diade compression point

crest factor (1/duty_cycle) of the RF signs. CE A.B.C.D motulation dependent linearization parameters

Polarization a a libitation around probe axis

If relation around an axes that is in the plane normal to probe exis (at measurement center), Polarization II

a w = 0 is normal to probe axis.

information used in DASY system to align probe sensor X to the probal coordinate system Connector Angle

Calibration is Performed According to the Following Standards:

IEEE Std 1528-2013, *IEEE Recommended Proctice for Colormining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices. Measurement

Absorption Nate (SAR) in the furnish head from ynderess communications between research and a 2013

(i) EC 52209-1, "Procedure to measure the Specific Absorption Rete (SAR) for hand-held devices used in cines praximity to the ser (frequency range of 300 MHz to 3 GHz)", February 2005

(ii) EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in circa proximity to the human body (frequency range of 30 MHz to 6 GHz)". March 2010

(d) KDB 855664, "SAR Messurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

NORMs,y,z. Assessed for E-field potenzation ti = 0 (f < 900 MHz in TEM-cell; I > 1800 MHz: R22 waveguide). NORMik,y,z are only intermediate values, i.e., the uncertainties of NORMit,y,z does not affect that 2'-fining uncertainty inside TSL (see below Com/F)

NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncortainty of the frequency response is included in the stated uncertainty of ConvP.

DCPx.y.c. DCP are illumented linearization parameters assessed based on the data of power switch QW signal (no uncertainty (equired), DCP class not depend on frequency nor media.

PAR: PAR a the Peak to Average Ratio that is not collibrated but determined based on the signal

Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, O are numerical linearization paremeters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on requency no media. VR is the maximum calibration range expressed in RMS voltage across the Gode.

CarryF and Boundary Effect Parameters: Assessed in Fat phantom using E-hald (or Temperature Transfer Standard for I < 800 MHz; and inside waveguide using analytical field distributions based on power measurements for t > 800 MHz. The same satups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncartainty values are given. These perameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMb, y.z.* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent.

ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100. Mitz

Spherical isotropy (SD downtion from isotropy); in a field of low gradients realized using a flat phareoni soposed by a paich antenna.

Sensor Officer. The sensor officet corresponds to the officer of virtual inequirement penter from the probe tip. (on probe axis). No tolerance required

Connector Angle: The angle is assessed using the information gained by determining the NOPMs (no uncertainty required)

Certificate Not EX3-3923 Sept6

Page 2 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 166 of 240

EX3DV4 - 9N 3923

September 2, 2016

Probe EX3DV4

SN:3923

Manufactured: Repaired: Calibrated: March 8, 2013 August 30, 2016 September 2, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

Carrificate No: EX3-3923_Sep16

Prige Edi | 1

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 167 of 240

EX3DV4 SN:3923

Seplember 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) ²) ^A	0.55	0.46	0.45	± 10.1 %
DCP (mV)*	101.5	102.8	106.7	

Modulation Calibration Parameters

UID	Communication System Name		A dB	dBõV	C	D dE	WR mV	Unc* (k=2)
0	CW	X	0.0	0.0	1.0	0.00	150.8	±3.0 %
		Y	0.0	0.0	1.0		149.7	1,500
		Z	0.0	0.0	1.0		151.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No. EX3-3923, Sep16

Page 4 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

incorrection of Norm X, Y, Z do not affect the E' field uncontainty inacto T&L (see Pages 5 and 6).

^{**} Numerical investigation presented: Lucesteerty net required:

** Uncertainty is deliarationed using the max. doviation from linear response applying rectangular definitions, and a expression for the aquais of the field value.



Page: 168 of 240

EX3DV4- SN/3923

September 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Calibration Parameter Determined in Head Tissue Simulating Media

r(MHz) ^C	Relative Permittivity	Conductivity (5/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^{tt}	Depth " (mm)	Unic (k=2)
750	41,9	0.89	11.01	11.01	11.01	0.53	0.80	±12.0%
835	41.5	0.90	10.66	10.66	10.65	0.47	0.80	±12.0%
900	41.5	0.07	10.40	10.40	10.40	0.38	0.93	±12.0 %
1750	40.1	1.37	9,27	9.27	9.27	0.29	0:80	± 12.0 %
1900	40.0	1.40	8.90	8.90	8.90	0.30	0.80	±12.0 %
2000	40.0	1,40	8.92	8.92	8.92	0.34	0.80	± 12.0 %
2450	39.2	1,80	7.95	7.95	7.95	0.33	0.85	± 12.0 %
2600	39.0	1,96	7.77	7,77	7.77	0.33	0.80	±12.0 %
0250	35.9	4.71	5.36	5,36	5.36	0.30	1.80	±13.1 %
5800	35.5	5,07	4.94	4.94	4.94	0:40	1.80	±13.1 %
5750	35.4	5.22	4.96	4.96	4.96	0.40	1.80	±13.1 W

Certificate No: EX3-3923_Septil

Plage 5-01 TT

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 169 of 240

EX3DV4-SN:3923

Deptember 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Calibration Parameter Determined in Body Tissue Simulating Media

r (Miniz) c	Relative Permittivity	Conductivity (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ⁶	Depth (mm)	Una (k=2)
750	58.5	0.96	10.83	10.83	10.83	0.32	0.98	± 12,0 %
835	55.2	0.97	10.67	10.67	10.87	0,37	0.96	± 12.0 %
900	55.0	1,05	10.52	10.52	10.52	0.44	0.80	212.0%
1750	53.4	1,49	8.78	8.78	8.78	0.39	0.81	± 12.0 %
1900	53.3	1,52	8.47	8.47	8.47	0.37	0.80	± 12.0 %
2000	53.3	1.52	8.88	8.68	8.68	0.38	0.80	± 12.0 %
2450	52.7	1.95	B.06	8.08	8,08	0.30	0.80	± 12.0 %
2600	52,5	2.16	7.84	7.84	7.84	0.27	0.80	± 12.0 %
5250	48.9	5.36	4.58	4.58	4.58	0.50	1,90	113.1%
5600	48.5	5.77	4.00	4.00	4:00	0,65	1,90	± 13.1 V
5760	46.6	5.94	4.19	4.19	4.19	0.55	1,90	±13.1 %

Fingurancy validity abuse 300 MHz of ± 100 MHz only applies for DASY vA.4 and higher (see Page 2), since if is interiorable ± 50 MHz. The uncertainty of the RSS of this Carlier autocrasinty at catabodic frequency and the uncertainty for the indicated frequency band. Frequency validity habby 900 MHz is ± 10, 25, 40, 00 and 10 MHz for ConvF assessments at 30, 64, 123, 190 and 200 MHz respectively. Above 5 GHz frequency validity can be retended to ± 110 MHz.

At frequencies below 3 CHz, the enabley of tissue parameters (a and of can be assessed to ± 10% if iquid compensation formula is applied to measured 3AR values. At frequencies above 3 GHz, the indictly of tissue parameters (a and of its instructed to ± 4%. The uncertainty is the RSS of the Deniv uncertainty for indicated larger tissue parameters.

Application of the determined cauting callegation, SPAG scarrants that the immaking deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-5 GHz at any distance larger than had the probe replacement from the boundary.

Certificate No. EX3-3923 Septis

Frage 9 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 170 of 240

EX3DV4- BN:3923

September 2, 2016

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

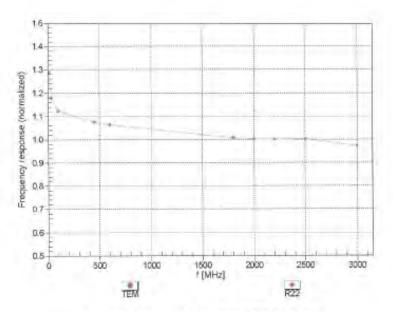

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-3923_Sep16

Page 7 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 171 of 240

EX3DV4-SN:3923

September 2, 2016

Receiving Pattern (6), 9 = 0°

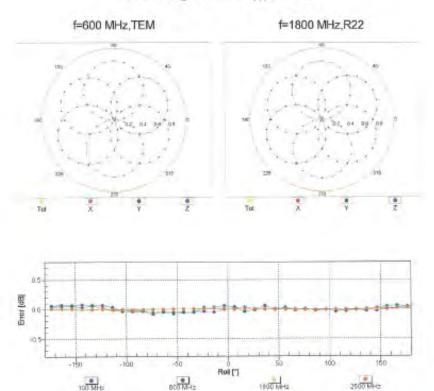

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: EX3-3923_Sep16

Page 8 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 172 of 240

September 2, 2016

EX3DV4-SN:3923

Dynamic Range f(SAR_{head}) (TEM cell , feval= 1900 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No. EX3-3923_Sep16

Page 9 of 11


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 173 of 240

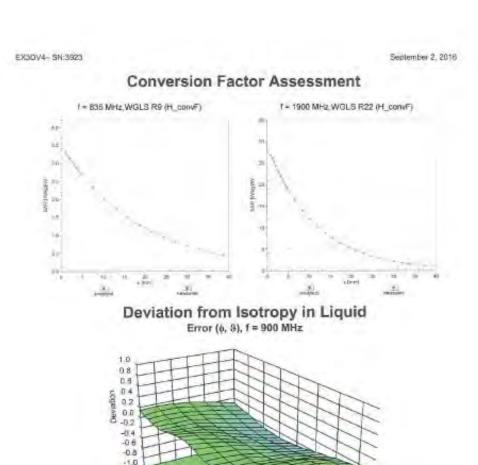



Certificate No: EX3-3923_Sep15

Page 16 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

0

135

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 174 of 240

EX3DV4- SN 3923

September 2, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3923

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (*)	26.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	pisabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2,5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point.	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Certificate (vo: EX3-3923, Boofs

Page 21 of 11

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 175 of 240

8. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	1	D		aluation ten	f	1		i_0 * g / o	l _z
Source of Uncertainty	C Tolerance/	Probabilit	e Div	Div Value	ci (1g)	g ci (10g)	h=c * f / e Standard	i=c * g / e Standard	k vi, or Veff
,	Uncertainty	У			(0)	, 0,	uncertainty	uncertainty	ŕ
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	œ
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	œ
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	œ
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	œ
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	œ
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	œ
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	œ
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	œ
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	œ
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	œ
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	œ
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	œ
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	œ
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	2.78%	N	1	1	0.64	0.43	1.78%	1.20%	М
Liquid Conductivity (mea.)	3.88%	N	1	1	0.6	0.49	2.33%	1.90%	М
Combined standard uncertainty		RSS					12.08%	11.92%	
Expant uncertainty (95% confidence							24.15%	23.84%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 176 of 240

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Vef
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
Isotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	~
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	~
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	~
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	8
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	00
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	8
Probe Positioning with respect to phantom	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	3.62%	N	1	1	0.64	0.43	2.32%	1.56%	М
Liquid Conductivity (mea.)	4.08%	N	1	1	0.6	0.49	2.45%	2.00%	М
Combined standard uncertainty		RSS					11.90%	11.69%	
Expant uncertainty (95% confidence							23.81%	23.37%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 177 of 240

9. Phantom Description

Schmid & Partner Engineering AG

а

Zeughausstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 9700, Fax +41 44 245 9779 info@speag.com, http://www.speag.com

Certificate of Conformity / First Article Inspection

Item	Oval Flat Phantom ELI 5.0	
Type No	QD OVA 002 A	
Series No	1108 and higher	
Manufacturer	Untersee Composites Knebelstrasse 8, CH-8268 Mannenbach, Switzerland	

Tests

Complete tests were made on the prototype units QD OVA 001 A, pre-series units QD OVA 001 B as well as on some series units QD OVA 001 B. Some tests are made on all series units QD OVA 002 A.

Test	Requirement	Details	Units tested
Shape	Internal dimensions, depth and sagging are compatible with standards	Bottom elliptical 600 x 400 mm, Depth 190 mm, dimension compliant with [1] for f > 375 MHz	Prototypes
Material thickness Bottom: 2.0mm +/- 0.2mm		dimension compliant with [3] for f > 800 MHz	all
Material rel. permittivity 2 – 5, loss tangent ≤ 0.05, at f ≤ 6 GHz		rel. permittivity 3.5 +/- 0.5 loss tangent ≤ 0.05	Material samples
Material resistivity	Compatibility with tissue simulating liquids .	Compatible with SPEAG liquids. **	Phantoms, Material sample
Sagging	Sagging of the flat section in tolerance when filled with tissue simulating liquid.	within tolerance for filling height up to 155 mm	Prototypes, samples

Note: Compatibility restrictions apply certain liquid components mentioned in the standard, containing e.g. DGBE, DGMHE or Triton X-100. Observe technical note on material compatibility.

Standards

- OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition 01-01
 IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific
- Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
 [3] IEC 62209–1 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted
- wireless communication devices Human models, instrumentation, and procedures Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", 2005-02-18 IEC 62209-2 ed1.0, "Human exposure to radio frequency fields from hand-held and body-mounted
- wireless communication devices Human models, instrumentation, and procedures Part 2 Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", 2010-03-30

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of body-worn SAR measurements and system performance checks as specified in [1 - 4] and further standards

Signature / Stamp

peag

Doc No 881 - QD OVA 002 A - A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號



Page: 178 of 240

10. System Validation from Original Equipment Supplier

Calibration Laboratory of Schmid & Partner Engineering AG strasse 43, 8004 Zurich, Switzerland





Service suisse d'étalonnage Servizio svizzero di teratura Swiss Calibration Service

Accreditation No.: SCS 0108

According by the Swiss Accordination Service (SAS)

The Swiss Accreditation Service is one of the signaturies to the EA Multilaberal Agreement for the recognition of calibration cartificates

SGS-TW (Auden)

Certificate No: D750V3-1015 Aug 16

CALIBRATION CERTIFICATE D750V3 - SN: 1015 Calibration procedure(s) QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz Cantralinn date: August 30, 2016 This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (Sti., The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All palibrations have been conducted in the closed laboratory facility, environment temperature (22 x 3)°C and humidity < 70%. Cathration Equipment used (M&TE critical for calibration) Primary Standards Cal Date (Certificate No.) Schaduled Calibration 06-April 16 (No. 217-02288/02288) Power meter NRP SN: 104778 Power sensor NRP-Z91 SN: 103244 06-Apr-15 (No. 217-02288) Apr-17 Power sensor NRP-Z91 SN: 199245 06-Apr-16 [No. 217-02280] Apr-17 05-Apr-16 (No. 217-02292) Reference 20 dB Attenuator SN: 5058 (200) Apr-17 BN: 5047.2 / 06327 0G-Apr-16 (No. 217-02295) Apr-17 Type-N mismatch combination Reference Probe EX3DV4 SN: 7349 15-Jun-16 (No. EX3-7349_Jun16) DAE4 30-Dec-15 (No. DAE4-601_Dec15) Dec-16 SN: 601 Secondary Standards SET 4 Check Date (in house) Scheduled Check SN: G837460704 Power meter EPM-442A 07-Oct-15 (No. 217-02222) In house check: Oct-16 SN: US37292783 07-Oct-15 (No. 217-02222) In house check Oct-16 Power sonsor HP 8481A Power sensor HP 6481A SN: MY41092317 07-Oct-15 (No. 217-02223) In house check. Oct-16 SN: 100972 15-Jun-15 (in house check Jun-15) In house check: Oct-16 RF generator R&S SMT-06 Network Analyzer HP 8763E SN US37390585 18-Dct-01 (in house check Oct-15) In house check Oct-16 Function Laboratory Technicien Calibrated by: Michael Waber Technical Manager Approved by Katia Pokovic Issued. August 30, 2016 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D750V3-1015, Aug16

Page 1 of 8:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 179 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zeugheuselnsse 43, 1004 Zurich, Switzerland





S Schweizwiecher Kalibrierdienss
C Service suisse d'étalonnage
Servizio avizzaro di tanature
S Swiss Calibration Service

Accreditation No.: SCS 0108

Accorded by the Swas Accrediation Senice (SAS)

The Swise Accordination Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration continuous

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards.

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) In the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- EC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)". February 2005
- iEC 62209-2, "Procedure to determine the Specific Absorption Rata (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end.
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- . SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D750V3 (015 Aug10

Page 2 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents of the limitation of limitation of limitation of limitation of limitation of limitation and invisdiction issues defined.

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 180 of 240

Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V52.8.B
Extrapolation	Advanced Extrapolation	
Phanton	Modular Flat Phanton	
Distance Dipole Center - TSL.	19 mm.	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Prequency	750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.4 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	-	

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.11 W/kg
SAR for nominal Head TSL parameters	normalized to 1V9	8.32 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.36 W/kg
SAR for nominal Head TSL parameters	mormalized to 1W	5.45 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22,0 °C	55.5	0,96 inholm
Measured Body TSI, parameters	(22.0 ± 0.2) °C	54.9 ± 6 %	0,99 mha/m ± 5 %
Body TSL temperature change during tool	<0.5°C	-	-

SAR result with Body TSL

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAFI measured	250 mW input power	2,25 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.77 W/kg ± 17.0 % (k±2)

SAR averaged over 10 cm1 (10 g) of Body TSL	nontition	
SAFI measured	250 mW input power	1.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.76 W/kg ± 16.5 % (k±2)

Certificate No: 0750V3-1015_Aug16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 181 of 240

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.1 Ω - 9.2 <u>Ω</u>		
Heitien Loss	-30.5 dB		

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.0 (2 - 2,0)(2	
Return Loss	- 30.5 dB	

General Antenna Parameters and Design

Electrical Delay (one direction)	1,037 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard similigid coaxial cable. The center conductor of the leading line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when leaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excassive force must be applied to the dipole erms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	March 22, 2010	

Cartilicate No. 0780V3-1015_Aug16

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 182 of 240

DASY5 Validation Report for Head TSL

Date: 30,08,2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: f = 750 MHz, $\sigma = 0.91 \text{ S/m}$; $\varepsilon_t = 42.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12,2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X (4.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 58.26 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.16 W/kg

SAR(1 g) = 2.11 W/kg; SAR(10 g) = 1.38 W/kgMaximum value of SAR (measured) = 2.81 W/kg

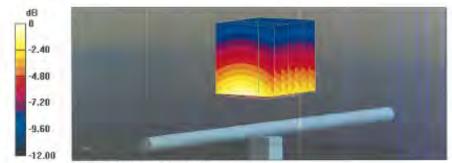

0 dB = 2.81 W/kg = 4.49 dBW/kg

Certificate No: D750V3-1015_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 183 of 240

Impedance Measurement Plot for Head TSL

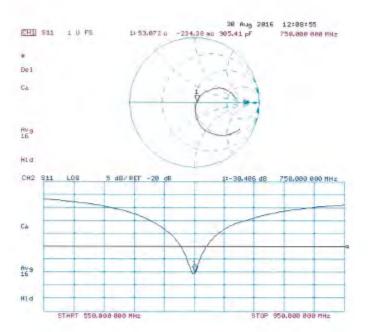

Certificate No: D750V3-1015_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 184 of 240

DASY5 Validation Report for Body TSL

Date: 30.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1015

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: l = 750 MHz; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 15.06.2016;
- Sensor-Surface: I.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sp601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001.
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 57.47 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 3.39 W/kg SAR(1 g) = 2.25 W/kg; SAR(10 g) = 1.47 W/kg

Maximum value of SAR (measured) = 2.97 W/kg

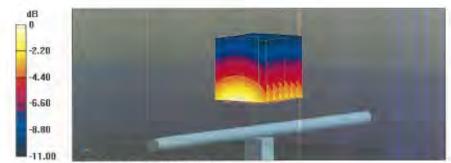

0 dB = 2.97 W/kg = 4.73 dBW/kg

Certificate No: D750V3-1015_Aug16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 185 of 240

Impedance Measurement Plot for Body TSL

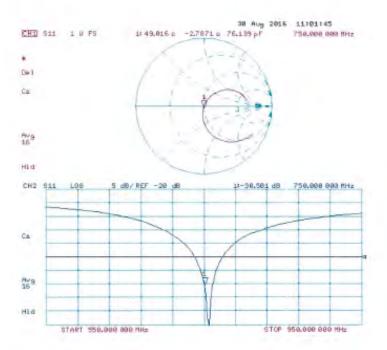

Certificate No: D750V3-1015_Aug16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 186 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zaughausserase 43, 8004 Zurich, Switzerland





S Schwazznnicher Kellorierdienet
C Service stilsse d'étalonnage
Servizio svizzero di taratura
S Swizs Californilino Service

Accredited by the Swiss Accreditation Service (SAS).

The Swise Accreditation Service is one of the signaturies to the EA Multilateral Agreement for the recognition of calibration certificates.

Accreditation No.: SCS 0108

Client SGS-TW (Auden)

Defilicate No: D835V2-4d063_Aug16

	ERTIFICATE		
Object	D835V2 - SN:4d0	063	
Calibration procedurals)	QA CAL-05.V9 Calibration proce	dure for dipole validation kits abo	Ve 700 MHz
Californium dawn	August 25, 2016		
The measurements and the once	etainties with confidence p	onel standerds, which resize the physical un- probability are given on the following pages and by facility, eminocrimit semperature (22 ± 3)°C	d are part of the certificase
Calibration Equipment isset (M8)			
Primary Standards	ID #	Cal Date (Certificals No.)	Scheduled Calibration
Planer modes (NRP)	584: 10.477B	D6-Apr-15 (No. 217-02286/02289)	Apr-17
	SN: 103244	16-Ap/-16 (No. 217-02288)	Apr-17
ower sensor MRP-291	The state of the s	Control of the Contro	
Section of the Property of the	SNŁ 103240	06-Apr-10 (No. 217-02289)	Apr-17
OWRESENSON NRP-Z91	5N: 103240 5N: 5058 (20k)	05 Apr-16 (No. 217-02292)	Apr-17
rower sensor NRP-Z91 Reference 20 dB Attenuator	SN: 5058 (20k) SN: 5047 2 / 06327	05-Apr-16 (No. 217-02292) (IS-Apr-16 (No. 217-02295)	Apr-17 Apr-17
rower sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination	BN: 505B (20k)	05 Apr-16 (No. 217-02292) 05-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16)	Apr-17 Apr-17 Jun-17
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Prote EX30V4	SN: 5058 (20k) SN: 5047 2 / 06327	05-Apr-16 (No. 217-02292) (IS-Apr-16 (No. 217-02295)	Apr-17 Apr-17
Power sensor NRP-Zút Reference 29 dB Attenuarar Type-Minternatch combination Reference Probe EXSDV4 DAE4	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7349	05 Apr-16 (No. 217-02292) 05-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16)	Apr-17 Apr-17 Jun-17
Power sensor NRP-Zúh Reference 20 dB Attenuatur Type-M mismatch combination Reference Probe EX3DV4 DAE4 Siscondary Standards	EN: 5058 (20k) SN: 5047 2 / 06327 SN: 504	05 Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02295) 15-Jun-16 (No. EX3-7349_Jun16) 30-Dec-15 (No. DAE4-B01_Dec15)	Apr-17 Apr-17 Jun-17 Dep-16 Benedulen Eheck
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EXSDV4 DAE4 Biscondary Standards Power meter EPN-142A	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7348 SN: 604	05 Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-R01_Dec15) Check Date (in house)	Apr-17 Apr-17 Jun-17 Den-16 Beneduled Check In house theor. Dot-10
Power sensor NRP-Züh Reference 20 dB Atterwater Type-N mismatch combination Reference Probe EXSDV4 DAE4 Secondary Standards Power meter EPM-142A Power sensor HP 3481A	SN: 5058 (20k) SN: 5047 2 (106327 SN: 7348 SN: 601 ID # SN: GB37480704	05 Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-801_Dec15) Check Date (In nouse) 07-Oct-16 (No. 217-02222)	Apr-17 Apr-17 Jun-17 Dep-16 Sensetuted Chack In house check: Dct-16 In house check: Dct-16
Power sensor NRP-Zéh Reference 20 dB Attenuaren rype-M mismatch combination Reference Probe EXSOV4 DAE4 Secondary Standards Power meter EFM-142A Power sensor HP 8481A	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7340 SN: 607 ID # SN: GB37480704 SN: US37292783	05 Apr-16 (No. 217-02292) 05-Apr-16 (No. 317-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-B01_Dec15) Check Date (In Foute) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222)	Apr-17 Apr-17 Jun-17 Dec-16 Beneduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Power sensor NRP-Zéh Reference 20 dB Attenuator type-M mismatch combination Reference Probe EXSDV4 DAE4 Biscondery Standards Power meter EPM-142A Power sensor HP 8481A DF generator R&S SMT-06	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7348 SN: 901 ID # SN: GB37480704 SN: US37292788 SN: MV41002317	05 April 6 (No. 217-02292) 05-April 6 (No. 217-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-801_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223)	Apr-17 Apr-17 Jun-17 Dep-16 Benjachker Check In house check: Dct-16
Power sensor NRP-Z91 Reference 29 dB Attenuator Type-N mismatch combination Reference Probe EXSDV4 DAE4 Biscondary Standards Power meter EFM-142A Power sensor HP 8481A DF generalor PAS SMT-06	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7348 SN: 661 ID # SN: GB37480704 SN: US37290783 SN: WV41002317 SN: 100872 SN: US37390505	05 April (No. 217-02292) 05-April (No. 217-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-B01_Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (in house check Jun-10) 18-Oct-07 (in house check Jun-10)	Apr-17 Apr-17 Jam-17 Dept-16 Sepectation (Chack In house check: Oct-16
Power sensor NRP-Zith Reference 20 dB Attenuator Type-M mismatch combination Reference Probe EXSDV4 DAE4 Secondary Standards Power meter EPM-H42A Power sensor HP 2481A DF generator HB 3481A DF generator HB 3481A Network Analyzin HP 8753IE	SN: 5058 (20k) SN: 5047 2 (106327 SN: 7340 SN: 661 SN: GB37480704 SN: US37292783 SN: MY41002317 SN: 100972 SN: US37390505	05 April (No. 217-02292) 05-April (No. 217-02295) 15-Jun-16 (No. 217-02295) 15-Jun-16 (No. 217-02295) O7-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (in house check Jun-10) 18-Oct-01 (in house check Jun-10) 18-Oct-01 (in house check Jun-10)	Apr-17 Apr-17 Jun-17 Dep-16 Benjedulen Chieck In house check: Dct-16
Power sensor NRP-Zet Power sensor NRP-Zet Power sensor NRP-Zet Power sensor NRP-Zet Type-N mismatch combination Reference Probe EXSDV4 DAE4 Siscondary Standards Power meter EFNI-142A Power sensor HP 8481A DF generalor FAS SMT OS Network Analyzer HP 8753E Cathraled by:	SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7348 SN: 661 ID # SN: GB37480704 SN: US37290783 SN: WV41002317 SN: 100872 SN: US37390505	05 April (No. 217-02292) 05-April (No. 217-02295) 15-Jun-16 (No. EX3-7340_Jun16) 30-Dec-15 (No. DAE4-B01_Dec15) Check Date (in house) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (in house check Jun-10) 18-Oct-07 (in house check Jun-10)	Apr-17 Apr-17 Jam-17 Dept-16 Sepectation (Chack In house check: Oct-16
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination Reference Probe EXSDV4 DAE4 Siscondary Standards Power meter EPNI-142A Power sensor HP 8481A DF generator F&S SMT-Os Network Analyzer HP 8753E	SN: 5058 (20k) SN: 5047 2 (106327 SN: 7340 SN: 661 SN: GB37480704 SN: US37292783 SN: MY41002317 SN: 100972 SN: US37390505	05 April (No. 217-02292) 05-April (No. 217-02295) 15-Jun-16 (No. 217-02295) 15-Jun-16 (No. 217-02295) O7-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02222) 07-Oct-16 (No. 217-02223) 15-Jun-15 (in house check Jun-10) 18-Oct-01 (in house check Jun-10) 18-Oct-01 (in house check Jun-10)	Apr-17 Apr-17 Jam-17 Dept-16 Sepectation (Chack In house check: Oct-16

Certifidale No: D835V2-4d053_Aug16

Page | of 3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 187 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zaughausstrasse 43, 8004 Zurich, Switzsmann





Schweizertagher Kalibriertim Service walks d'étalonnage Servicio evizzero di taratura Swiss Califoration Service

Appreciation No.: SCS 0108 (SAS) animal rottel basis Acceptation Service (SAS)

The Swips Ascreditation Service is one of the signaturies to the EA Multi-wal Agreement for the recognition of calibration certificate

Glossary:

TSL tissue simulating liquid ConvF sensitivity in TSL / NORM x,y,Z not applicable or not measured N/A

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, TEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless. Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, 'Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*. February 2005
- c) IEC 62209-2, 'Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)*, March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL. The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna inpul power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna conhector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement. multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Gentligate No. Dea5V3-4d069_Aug16

Rage Z of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 188 of 240

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL.	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz = 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Parmittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	41.5	0,90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.93 mha/m ± 6 %
Head TSL lemperature change during test	< 0.5 °C		-

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.40 W/kg = 17.0 % (k=2)

SAR averaged over 10 cm² (10 g) of Head TSL	pondition	
SAR measured	250 mW input power	1.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.05 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.7 ± 6.%	1.01 mbom = 5 %
Body TSL temperature change during test	<0.5 °C	-	-

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.57 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.81 W/kg
SAFI for nominal Body TSL parameters	namalized to tW	6.28 W/kg ± 16.5 % (k=2)

Certificate No: D835V2-4d0G3_Aug 16

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined

therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 189 of 240

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

impadance, transformed to feed point	51.2 IQ - 2.8 jQ	
Return Loss	- 30,3 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 Ω - 5,5 jΩ	
Relum Loss	-24.0 dB	

General Antenna Parameters and Design

Electrical Delay (one direction)	1.392 ns
Electrical pedy (prie direction)	1.392 119

After long term use with 100W radiated power, only a slight warming of the dipole near the leadpoint can be measured

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The entenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Messurement Conditions" paragraph. The SAFI data are not affected by this change. The dverall dipole length is still according to the Standard.

No excussive force must be applied to the dipole arms, because they might bend to the subleved connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	November 27, 2006	

Certificate No. D535V2-4d063_Aug16

Page 4 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 190 of 240

DASY5 Validation Report for Head TSL

Date: 25.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: f = 835 MHz; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(9.72, 9.72, 9.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8,8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 61.75 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 3.65 W/kg SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 3.24 W/kg

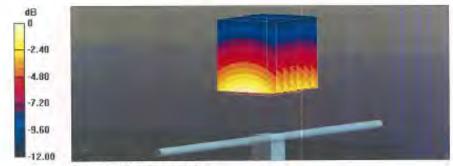

0 dB = 3.24 W/kg = 5.11 dBW/kg

Certificate No: D835V2-4d063_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 191 of 240

Impedance Measurement Plot for Head TSL

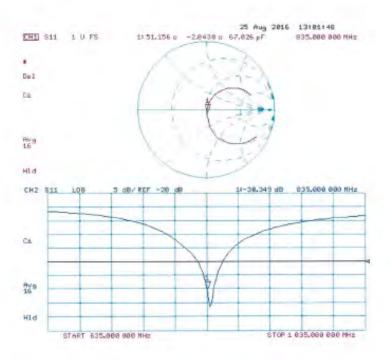

Certificate No: D635V2-4d063_Aug16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 192 of 240

DASY5 Validation Report for Body TSL

Date: 25.08.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d063

Communication System: LTD 0 - CW; Frequency; 835 MHz

Medium parameters used: f = 835 MHz; $\sigma = 1.01$ S/m; $\varepsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63 19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(9.73, 9.73, 9.73); Calibrated: 15.06.2016;
- · Sensor-Surface: L4mm (Mechanical Surface Detection)
- Electronics: DAE4 Su601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L.; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 59.83 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 3.63 W/kg SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.61 W/kg Maximum value of SAR (measured) = 3.25 W/kg



0 dB = 3.25 W/kg = 5.12 dBW/kg

Gerillicate No: DB35V2-4d063_Aug16

Page 7 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 193 of 240

Impedance Measurement Plot for Body TSL

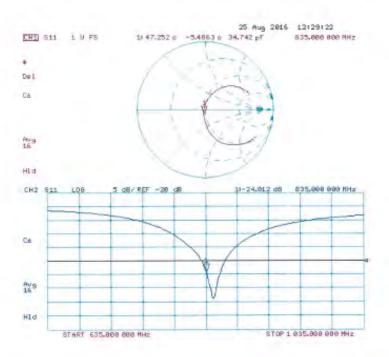

Certificate No: D835V2-4d063_Aug16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 194 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service sulsse d'étalonnage
Servizio svizzero di taratura
S Swiss Colibration Service

Accreditation No. SCS 0108

Acception by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the eignetories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client

SGS-TW (Auden)

Cortificate No: D1750V2-1008 Aug16

	ERTIFICATE		
Disject	D1750V2 - SN:10	800	
Calibration procedure(s)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	we 700 MHz
Calibration date:	August 31, 2016		
The measurements and the unce	rtainties with confidence p	onal standards, which routize the physical un robstvity are given on the following pages an ny lacility: environment température (25° ± 3)°C	d are part of the cestificate.
Calibration Equipment used (M&		VIA 100 100 100	
Printary Standards	ID#	Cal Date (Certificate No.)	Schoduled Calibration
Power meter NAP	SN: 104778	06-Api-16 (No. 217-02288/02289)	Apr-17
ower sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17 Apr-17
ower sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-82289)	The second second
reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-15 (No 217-02292)	Apr-17 Apr-17
and the second second	SN: 5047.2 / 06327	05-Apr-15 (No. 217-02295)	Jun-17
	ON 2000	AC him AG (Nie EVO. 734E him LG)	
Reference Probe EX3DV4	SN: 7349 SN: 601	15-Jun-16 (No. EX3-7345_Jun16) 30-Dec-15 (No. DAE4-601_Dec15)	Dag-16
Type-N mismatch combination Reference Probe EX3DV4 DAE4 Secondary Standards			
Rafarence Probe EX3DV4 DAE4 Secondary Standards	SN: 601	30-Det:-15 (No. DAE4-601_Dec15)	Dec-16
Feference Probe EX3DV4 DAE4 Secondary Standards Power mater EPN-442A	SN: 601	30-Dec-15 (No. DAE4-601_Dec15) Chack Date (in house)	Dec-16 Scheduled Check
Reference Probe EX3DV4 DAE4 Secondary Standards Power mater EPM-442A Power sensor HP 8461A	SN: 601 ID # SN: GB37480704	30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	Scheduled Check In house dheck: Oct-16 In house check: Oct-16 In house check: Oct-16
Selerence Probe EX3DV4 DAE4 Secondary Standards Power mater EPM-442A Power sensor HP 8481A Power sensor HP 8481A PF generator R&S SMT-05	SN: 601 ID 4 SN: GB37480704 SN: US37202783 SN: MY41032317 SN: 100972	30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in flouse check Jun-15)	Dac+16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Solarence Probe EX3DV4 DAE4 Secondary Standards Power moter EPM-442A Power sensor I+P 8461A Power sensor I+P 8481A RF generator RSS SMT-05	SN: 601 ID 4 SN: GB37480704 SN: US37292783 SN: MY41092317	30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223)	Scheduled Check In house dheck: Oct-16 In house check: Oct-16 In house check: Oct-16
Reference Probe EX3DV4 DAE4 Secondary Standards Power mater EPN-442A Power sensor HP 8491A Power sensor HP 8491A PF generator R&S SMT-05 Network Analyzer HP 8753E	SN: 601 ID 4 SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37290586 Name	30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in focuse check Jun-15) 18-Oct-01 (in licuse check Dct-15) Function	Dac+16 Scheduled Check In house check: Oct-16 In house check: Oct-16 In house check: Oct-16 In house check: Oct-16
Reference Probe EX3DV4 DAE4	SN: 601 ED 4 SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390586	30-Detc-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in house check Jun-15) 18-Oct-01 (in house check Jun-15)	Scheduled Check In house check: Oct-16
Reference Probe EX3DV4 DAE4 Secondary Standards Power mater EPN-442A Power sensor HP 8491A Power sensor HP 8491A PF generator R&S SMT-05 Network Analyzer HP 8753E	SN: 601 ID 4 SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37290586 Name	30-Dec-15 (No. DAE4-601_Dec15) Check Date (in house) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02222) 07-Oct-15 (No. 217-02223) 15-Jun-15 (in focuse check Jun-15) 18-Oct-01 (in licuse check Dct-15) Function	Dac+16 Scheduled Check In house check: Oct-16 Signature

Certificate No: D1750V2-1008_Aug16

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 195 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Leughausstrasse 43, 8004 Zurich, Switzerland





mischer Kallbrierd Service suisse d'étalonnaise C Servizio svizzero di terplura S Swiss Calibration Service

Actrecitation No.: SCS 0108

Accredited by the Swise Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration cortilicates

Glossary:

TSL tissue simulating liquid

sensitivity in TSL / NORM x,y,z ConvF N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques*, June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30) MHz to 6 GHz)*, March 2010 d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are svailable from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for riominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D1750V2-1006, Aug 18

Page 2 of 9.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 196 of 240

Measurement Conditions

DASY system configuration, as far as not given an page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	-40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.3 ± 8 %	1:37 mha/m ± 8 %
Head TSL temperature change during test	< 0.5 °C	-	

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	37.2 W/kg = 17.0 % (k=2)

SAR everaged over 10 cm3 (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.6 W/kg ± 16.5 % (k=2).

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53,4	1,49 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.1 ± 6 %	1.49 mho/m ± 6.%
Body TSL temperature change during test	< 0.5 °C	-	-

SAR result with Body TSL

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.34 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.3 W/kg + 17.0 % (k:=2)

SAR averaged over 10 cm3 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.96 W/kg
SAR for nominal Endy TSL parameters	normalized to 1W	19.9 W/kg ± 16.5 % (k=2)

Certificate No. D1750V2-1008_Aug18.

Page I of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 197 of 240

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 Ω - 0.2 jΩ	
Flattim Loss	- 40.1 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 0.5 jΩ
Return Loss	→ 29,3 dB

General Antenna Parameters and Design

1.221 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The entenna is therefore short-circulied for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when leaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections pear the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	May 27, 2003

Cartillonie No: D1756V2-1008_Aug16

Page 4 of B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 198 of 240

DASY5 Validation Report for Head TSL

Date: 24 08 2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.37 \text{ S/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard; DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52,8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.8 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 17.2 W/kg SAR(1 g) = 9.28 W/kg; SAR(10 g) = 4.9 W/kgMaximum value of SAR (measured) = 14.3 W/kg

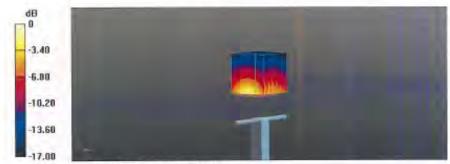

0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1750V2-1008_Aug16

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 199 of 240

Impedance Measurement Plot for Head TSL

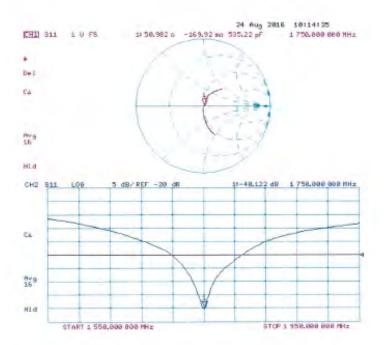

Certificate No: D1750V2-1008_Aug16

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 200 of 240

DASY5 Validation Report for Body TSL

Date: 31.08 2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial; D1750V2 - SN:1008

Communication System: UID 0 - CW; Frequency; 1750 MHz

Medium parameters used: f = 1750 MHz; $\sigma = 1.49 \text{ S/m}$; $\varepsilon_c = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19/2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 100.8 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 16.4 W/kg SAR(1 g) = 9.34 W/kg; SAR(10 g) = 4.98 W/kgMaximum value of SAR (measured) = 13.9 W/kg



0 dB = 13.9 W/kg = 11.43 dBW/kg

Certificate No: D1750V2-1008_Aug16

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 201 of 240

Impedance Measurement Plot for Body TSL

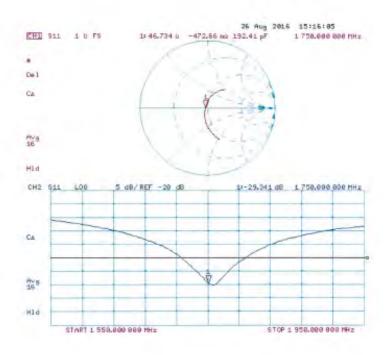

Certificate No: D1750V2-1008_Aug16

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 202 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Service suisse d'étalonnage C Servizio evizzero di toratura

Accreditation No. SCS 0108

Accredited by the Swiss Accreditation Sprvice (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: D1900V2-5d173 May17

2blect	D1900V2 SN:50	1173	
Calibration procedurers)	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	ve 700 MHz
Calibration date;	May 31, 2017		
	sted in the closed laborato	robability are given on the following pages an γ lacility: environment temperature (22 \pm 3) $^{\circ}$	
Primary Standards	10 #	Cal Data (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Ower sensor NRIP-Z91	SN: 100244	04-Apr-17 (No. 217-02521)	Apr-18
	SN: 100244 SN: 103245	04-Apr-17 (No. 217-02521) (04-Apr-17 (No. 217-02522)	Apr-18
Power sensor NRP-Z91			Apr-18 Apr-18
Power sensor NRF-291 Reference 20 dB Attenuelor	SN: 103245	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529)	Apr-18 Apr-18 Apr-18
Power sensor NRP-291 Reference 20 dB Attenuelör Type-N mismatch combination Reference Probe EXSDV4	SN: 103245 SN: 5058 (20k) SN: 5047-2 / 06327 SN: 7460	(M-Apr-17 (No. 217-02522) (7-Apr-17 (No. 217-02528) (7-Apr-17 (No. 217-02529) 19-May-17 (No. EX3-7460_May17)	Apr-18 Apr-18 Apr-18 May-18
Power sensor NRP-291 Reference 20 dB Attenuelör Type-N mismatch combination Reference Probe EXSDV4	SN: 103245 SN: 5058 (20k) SN: 5047.2 / 06327	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529)	Apr-18 Apr-18 Apr-18
Power sensor NRB-291 Reference 20 dB Attenuelon Type-N mismatch combristion Reference Probe EX3DV4 DAEs	SN: 103245 SN: 5058 (20k) SN: 5047-2 / 06327 SN: 7460	(M-Apr-17 (No. 217-02522) (7-Apr-17 (No. 217-02528) (7-Apr-17 (No. 217-02529) 19-May-17 (No. EX3-7460_May17)	Apr-18 Apr-18 Apr-18 May-18
Power sensor NRP-291 Reference 20 dB Attenuelor Type-N mismatch combination Reference Probe EX3DV4	SN: 103245 SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7460 SN: 601	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 19-May-17 (No. EXS-7460_May17) 28-Man-17 (No. DAE4-501_Mar17)	Apr-18 Apr-18 Apr-10 May-18 Man-18
Power sensor NRP-291 Reference 20 dB Attenuelor Type-N mismatch combristion Reference Probe EX3DV4 DAEs Secondary Standards Power inder EPM-442A	SN: 103245 SN: 5058 (20k) SN: 5047 2 / 06327 SN: 7460 SN: 601	(H-Apr-17 (No. 217-02522) (R-Apr-17 (No. 217-02528) (R-Apr-17 (No. 217-02529) 19-May-17 (No. EXS-7460_May-17) 28-May-17 (No. EXS-7460_May-17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Agr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Check In house check: Oct-18 In house check: Oct-18
Power sensor NRP-291 Reference 20 dB Attenuelor Type-N mismatch combination Perference Probe EX3DV4 DAE4 Secondary Standards	SN: 103245 SN: 5058 (26k) SN: 5057 2 / 08327 SN: 7460 SN: 601 ID #	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 19-May-17 (No. EXS-7460_May17) 28-May-17 (No. DAE4-501_May17) 28-May-17 (No. DAE4-501_May17) Check Date (n house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power sensor NR62-291 Reference 20 dB Attenuelor Type-N mismatch combination Perference Probe EXSIDV4 DAC4 Secondary Standards Power moter EPM-442A Power sensor HP 8481A	SN: 103245 SN: 5058 (25k) SN: 5047-2 / 06327 SN: 7460 SN: 601 ID # SN: GB97480704 SN: US37292783 SN: MY41092317 SN: 100972	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 277-02529) 19-May-17 (No. EXS-7460_May17) 28-Man-17 (No. DAE4-501_Mar17) Check Date (in house) 07-Qct-15 (in house check Oct-16) 07-Qct-15 (in house check Oct-16) 07-Qct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power sensor NR62-291 Reference 20 dB Attenuelor Type-N mismatch combination Perference Probe EXSIDV4 DAC4 Secondary Standards Power moter EPM-442A Power sensor HP 8481A	SN: 103245 SN: 5058 (26k) SN: 5057 (26k) SN: 5047 2 / 06327 SN: 7460 SN: 601 ID # SN: GB37480704 SN: US37282783 SN: MY41032317	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 19-May-17 (No. EXS-7460_May17) 28-May-17 (No. DAE4-501_May17) 28-May-17 (No. DAE4-501_May17) Check Date (n house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power sensor NRIP-291 Reference 20 dB Affertuelor Type-N mismatch combination Heference Probe EX3DV4 DAE4 Secondary Standards Power moter EPM-442A Power sensor HP 8481A Pringer sensor HP 8481A Pringer sensor HP 8481A	SN: 103245 SN: 5058 (25k) SN: 5047-2 / 06327 SN: 7460 SN: 601 ID # SN: GB97480704 SN: US37292783 SN: MY41092317 SN: 100972	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 277-02529) 19-May-17 (No. EXS-7460_May17) 28-Man-17 (No. DAE4-501_Mar17) Check Date (in house) 07-Qct-15 (in house check Oct-16) 07-Qct-15 (in house check Oct-16) 07-Qct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18
Power sensor NRB*-291 Reference 20 dB Attenuelon Type-N mismatch combination Preference Probe EXSDV4 DAEa Secondary Standards Power moter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-05 Network Analyzer HF 8753E	SN: 103245 SN: 5058 (26k) SN: 5047.2 / 06327 SN: 7460 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: US37290585 Name	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02529) 19-May-17 (No. EX3-7460_May-17] 28-Mar-17 (No. EX3-7460_May-17] Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Dat-01 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Check In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power sensor NRB-291 Reference 20 dB Attenuelor Type-N mismatch combination Heference Probe EX3DV4 DAE4 Secondary Standards Power moter EPM-442A Power sensor HP 8481A Pri generator HB 8481A RF generator HB 8481A	SN: 103245 SN: 5056 (20k) SN: 5047 2) DE327 SN: 7420 SN: 601 ID A SN: GB37480704 SN: US37292783 SN: MY41092317 SN: 100972 SN: US37390585	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 19-May-17 (No. EXS-7460_May17) 19-May-17 (No. DAE4-501_May17) Check Date (in house of the Cot-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Dat-01 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Cheek In house check: Oct-16 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Balarance 20 dB Attenuation Type-N mismatch combination Reference Probe EXSDV4 DAEs. Secondary Standards Power moter EPM-442A Power sensor HP 9481A RF generator HS SMT-05 Nework Analyzer HF 6753E Celibrated by.	SN: 103245 SN: 5058 (20k) SN: 5047 2) DB327 SN: 5047 2) DB327 SN: 601 ID A SN: GB37480704 SN: US37292783 SN: MY41092217 SN: US37290565 Name Jejosi Kastrati	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 19-May-17 (No. 217-02529) 19-May-17 (No. EX3-7460_May-17) 28-Mar-17 (No. DAE4-601_Mar-17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-16) Function Laboratory Tachnician	Apr-18 Apr-18 Apr-18 May-18 Man-18 Scheduled Cheek In house check: Oct-16 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power sensor NRIP-291 Reference 20 dB Affectuation Type-N mismatch combination Preference Probe EX3DV4 DAE4 Secondary Standards Power moter EPM-442A Power sensor HP 8481A Prover sensor HP 8481A RF generator R&S SMT-05 Nework Analyzer HF 8753E	SN: 103245 SN: 5058 (26k) SN: 5047.2 / 06327 SN: 7460 SN: 601 ID # SN: GB37480704 SN: US37292783 SN: MY41092317 SN: US37290585 Name	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 19-May-17 (No. EXS-7460_May17) 19-May-17 (No. DAE4-501_May17) Check Date (in house of the Cot-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Dat-01 (in house check Oct-16)	Apr-18 Apr-18 Apr-18 May-18 May-18 Man-18 Scheduled Cheek In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power sensor NRB-291 Reference 20 dB Affectuator Type-N mismatch combination Reference Probe EX3DV4 DAEs Secondary Standards Power moter EPM-442A Power sensor HP 8481A Power sensor HP 8481A RF generator R&S SMT-06 Network Analyzer HP 8753E Calibrated by.	SN: 103245 SN: 5058 (20k) SN: 5047 2) DB327 SN: 5047 2) DB327 SN: 601 ID A SN: GB37480704 SN: US37292783 SN: MY41092217 SN: US37290565 Name Jejosi Kastrati	04-Apr-17 (No. 217-02522) 07-Apr-17 (No. 217-02528) 07-Apr-17 (No. 217-02528) 19-May-17 (No. 217-02529) 19-May-17 (No. EX3-7460_May-17) 28-Mar-17 (No. DAE4-601_Mar-17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 18-Oct-01 (in house check Oct-16) Function Laboratory Tachnician	Apr-18 Apr-18 Apr-18 May-18 May-18 Man-18 Scheduled Check In house check: Oct-18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Certificate No: D1900V2-5d173_May17

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Page 1 of II

SGS Taiwan Ltd.



Page: 203 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweigenscher Kallbriertlis Service suisse d'étalonnage C Servizio avizzoro ell taratura Swiss Calibration Service

Accreditation No.: SCS 0108 Accredited by the Swiss Accreditation Service (SAS)

The Swiss Appreditation Service is one of the eigeniories to the EA Multimeral Agreement for the recognition of colloration certificates

Glossary:

tissue simulating liquid TSL sensitivity in TSL / NORM x,y,z ConvF not applicable or not measured N/A

Calibration is Performed According to the Following Standards:

 a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005

c) IEC 62209-2, 'Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010

d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%

Democase No: D1900V2-5d175_May17

Page 2 all B

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sas.com



Page: 204 of 240

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52,10,0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and galculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22,0 °C	40,0	1.40 mila/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	413±6%	1.40 mho/m ± 8 %
Head TSL temperature change during test	< 0.5 °C	land	-

SAR result with Head TSL

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.7 W/kg ± 17.0 % (k=2)

SAR everaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	250 mW Input power	5.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.1 W/kg ± 16.5 % (k=2)

Body TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54,2±6 %	1.51 mha/m ± 6 %
Body TSL temperature change during test	< 0.5°C		-

SAR result with Body TSL

SAR averaged over 1 cm ² (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.98 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5,30 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.3 W/kg ± 16.5 % (k=2)

Certificate No. D1900V2-5d173, May17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 205 of 240

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to food point	$51.3 \Omega + 4.9 J\Omega$
Return Loss	- 26.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to fond point	47.5 Ω + 6,0 jΩ
Return Loss	-23.5 dB

General Antenna Parameters and Design

Electrical Dulay (one direction)	1.199 ns

After long ferm use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the clipple. The antenna is therefore short-circuited for DC-aignals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the leedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 06, 2012

Certricate No: D1980V2-50173_May17

Page 4 01 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 206 of 240

DASY5 Validation Report for Head TSL

Date: 31.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.4 \text{ S/m}$; $\epsilon_i = 41.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 SN7460; ConvF(7.98, 7.98, 7.98); Calibrated: 19.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 107.7 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.26 W/kgMaximum value of SAR (measured) = 15.3 W/kg

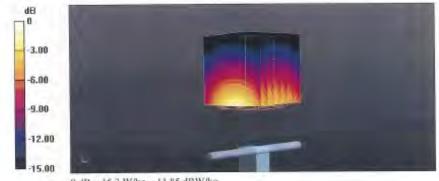

0 dB = 15.3 W/kg = 11.85 dBW/kg

Certificate No. D1900V2-5d173_May17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 207 of 240

Impedance Measurement Plot for Head TSL

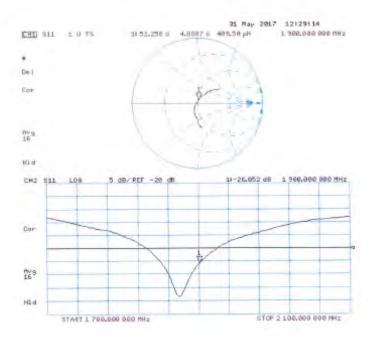

Certificate No: D1900V2-5d173_May17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 208 of 240

DASY5 Validation Report for Body TSL

Date: 31.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d173

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: f = 1900 MHz; $\sigma = 1.51 \text{ S/m}$; $\varepsilon_r = 54.2$; $\rho = 1000 \text{ kg/m}^2$

Phantom section: Flat Section


Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7460; ConvF(7.82, 7.82, 7.82); Calibrated: 19.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type; QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.9 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.3 W/kg Maximum value of SAR (measured) = 14.3 W/kg

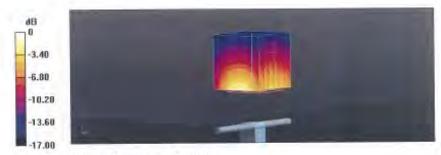

0 dB = 14.3 W/kg = 11.55 dBW/kg

Certificate No: D1900V2-5d173_May17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 209 of 240

Impedance Measurement Plot for Body TSL

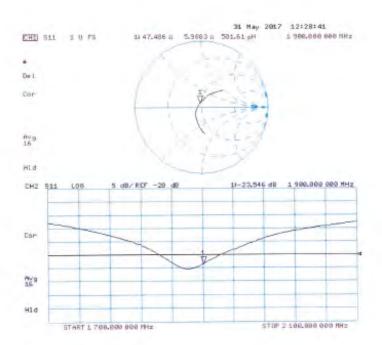

Certificate No: D1900V2-5d173_May17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 210 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zeughnusstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kallbrierdiensi C Service suisse d'étaionnage Servizio avizzero di taratura S Swiss Calibration Service

Accredited by the Swas Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client SGS -TW (Auden)

Accreditation No. SCS 0108

Certificate No: D2450V2-727_Apr17

CALIBRATION CERTIFICATE D2450V2 - SN: 727 Object Calibration procedure(s). QA CAL-05.v9 Calibration procedure for dipole validation kits above 700 MHz April 21, 2017 Calibration date. This calibration cartificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate All calibrations have been conducted in the closed laboratory facility: environment temperature (22 \pm 3)°C and furnicity < 70%. Calibration Equipment used (MSTE critical for carbination) Primary Standards 10 8 Cal Date (Certificate No.) Scheduled Calibration 04-Apr-17 (No. 217-02521/02522) SN: 104778 Power meter NRP April 18 Power sensor NRP-Z91 04-Apr-17 (No. 217-02521) SN: 100244 Apr-18 Power sensor NRP-ZB1 SN: 103245 01-Apr-17 (No. 217-02522) Apr-18 Reference 20 dB Attenuato/ SN: 5058 (20k) D7-Apr-17 (No. 217-02528) Apr-18 07-Apr-17 (No. 217 02529) SN: 5047.2 / 06327 Apr-18 Type-N mismatch combination Poterence Probe EX30V4 31-Dec-16 (No. EX3-7349, Dec16) DAE4 SN: 901 28-Mar-17 (No. DAE4-601_Mar17) Mar-18 ID # Scheduled Check Secondary Standards Check Date (in house). SN: GB37480704 Power meter EPM-442A 97-Oct-15 (in house pheck Oct-16) In house check: Oct-18 Power sensor HP 8481A. SN. US37292783 97-Oct-15 (in house check Oct-16) In house check: Oct-18 Power sensor HP 8481A SN MY41092317 07-Oct-15 (in house check Oct-16) in house check: Oct-18 RF generator R&S SMT-06 SN: 100972 15-Jun-15 (in house check Oct-16) In house check: Oct-18 Notwork Analyzer HP 8753E SN: US37398585 18-Oct-01 (in house check Oct-16) in house check: Oct-17 Function Michael Weber Liaboratory Technician Calibrated by: Technical Manager Katja Pokovic Approved by: Issued: April 21, 2017 This contrasion certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: D2450V2-727_Apr17

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sas.com



Page: 211 of 240

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Service suisse d'étalonnage c Servizio svizzero di taratura Swinn Calibration Service

Accreditation No.: SCS 0108

Accreelled by the Swise Accreditation Service (SAS)

The Swise Accreditation Service is one of the eigentories to the EA Multilateral Agreement for the recognition of calibration pertificates

Glossary:

TSL

tissue simulating liquid

sensitivity in TSL / NORM x,y,z ConvF not applicable or not measured N/A

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques*, June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)*, February 2005
- EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless. communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)4, March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D2460V2-727, April 7

Page 2 of E

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 212 of 240

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DA\$Y5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.7 ± 6 %	1.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.3 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.5 ± 6 %	2.03 mha/m ± 6 %
Body TSL temperature change during test	< 0.5 °C		

SAR result with Body TSL

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	12.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.01 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	23.8 W/kg ± 16.5 % (k=2)

Certificate No: D2450V2-727_Apr17

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803/新北市五股區新北產業園區五工路 134 號

www.tw.sgs.com



Page: 213 of 240

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.3 Ω + 2.1 jΩ
Return Loss	- 24.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.1 Ω + 4.1 jΩ
Return Loss	- 27.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.148 ns
manage paragraph (erro annount)	77.10.10

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the cipole. The antenna is therefore short-circuited for DC-signals. On some of the cipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 09, 2003

Certificate No: D2450V2-727_Apr17 Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 214 of 240

DASY5 Validation Report for Head TSL

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\alpha = 1.87$ S/m; $\epsilon_r = 37.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.72, 7.72, 7.72); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 109.8 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 27.3 W/kg SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.18 W/kg

Maximum value of SAR (measured) = 21.1 W/kg



0 dB = 21.1 W/kg = 13.24 dBW/kg

Certificate No: D2450V2-727_Apr17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 215 of 240

Impedance Measurement Plot for Head TSL

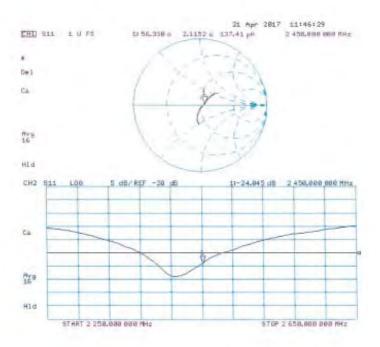

Certificate No: D2450V2-727_Apr17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 216 of 240

DASY5 Validation Report for Body TSL

Date: 21.04.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 727

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: f = 2450 MHz; $\sigma = 2.03 \text{ S/m}$; $\epsilon_1 = 52.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.79, 7.79, 7.79); Calibrated: 31.12,2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 105.0 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 25.4 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.01 W/kgMaximum value of SAR (measured) = 20.0 W/kg



0 dB = 20.0 W/kg = 13.01 dBW/kg

Certificate No: D2450V2-727_April7

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 217 of 240

Impedance Measurement Plot for Body TSL

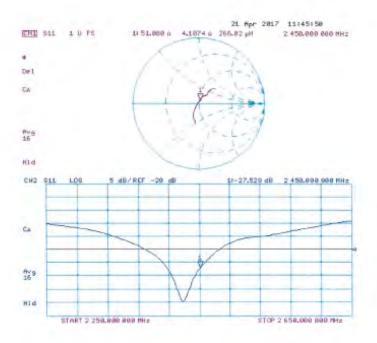

Certificate No: D2450V2-727 Apr17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 218 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurlen, Switzerland





Schweizerischer Kalibi lerdiens Service suisse d'étalonnage Servizio sylzzero di teratura Swiss Calibration Service

Accreditation No. SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Ciert SGS-TW (Auden)

Certificate No: D2600V2-1005 Jan17

Dbject	D2600V2 - SN:10	005	
Calibration procedure(si	QA CAL-05.v9 Calibration proce	dure for dipole validation kits abo	we 700 MHz
Calibration date:	January 25, 2017		
		ional seandards, which realize the physical un rebability are given on the following pages an	
		by facility: antinorment temperature (22 \pm 3)°C	S and humidity < 70%.
Calibration Equipment used (MST	TE anticel for partoration)		
Primary Standards	ID #	Cal Dala (Certificate No.)	Schedoled Cascrayon
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
lower sensor NRP-Z91	SN: 103244	06-April 16 (No. 217-02288)	Apr-17
Owel sellen Mul-597			
Secretary of the Control of the Cont	SN: 103245	06-Apt-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245 SN: 5068 (20k)	06-Apr-16 (No. 217-02289) 06-Apr-16 (No. 217-02292)	Apr-17 Apr-17
Power sensor NRP-291 Reference 20 dB Altenuator			
Power sensor NRP-Z91 Reference 20 dB Attenuator Type-N mismatch combination	SN: 5068 (20k)	06-Apr-16 (No. 217-02292)	Apr-17
Power sensor NRP-ZB1 Pelengos 20 dB Altenualor Type-N mismatch combination Reference Proce EX3DV4	SN: 5068 (20k) SN: 5047.2 / 06327	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296)	Apr-17 Apr-17
Power sensor NRP-291 Pellenance 20 dB Attenuator Type-N mismatch combination Reference Proce EX30V4 DAE4 Secondary Standards	SN: 5068 (20k) SN: 5047.2 / 06327 SN: 7348	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dec-16 (No. EX3-7349, Dec16)	Apr-17 Apr-17 Dec-17
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismatch combination Reference Proce EX3DV4 DAE4	SN: 5056 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dec-16 (No. EX3-7349_Dec16) 04-Jun-17 (No. DAE-4-601_Jan17)	Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismistich combination Reference Proce EX3DV4 DAE4 Secondary Standards Power mater EPM-442A	SN: 5056 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 801	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dec-16 (No. EX3-7349, Dec16) 04-Jim-17 (No. DAE-4-601, Jan17) Check Date (in house)	Apr-17 Apr-17 Dec-17 Jan-18 Schedulod Check In nouse check: Oct-18
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismister comeination Reference Proce EX30V4 DAE4 Secondary Silendards Power mater EPM-442A Power sensor HP 8481A	SN: 5058 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 601	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dac-16 (No. EX3-7346, Dec16) 04-Jim-17 (No. DAE4-601_Jan17) Check Date (in house) 07-Oct-15 (in house check Dct-16)	Apr-17 Apr-17 Dec-17 Jan-18 Schedulod Check In house check: Oct-18 In house check: Oct-18
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismatch combination Reference Proce EX3DV4 DAE4 Secondary Stendards Power motor EPM-442A Power sensor HP 8481A Power sensor HP 8481A	SN: 5056 (20k) SN: 5047.2 / 06327 SN: 7048 SN: 801 E) 4 SN: GB37480704 SN: US37292783	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dae-16 (No. EX3-7346, Dec15) 04-Jim-17 (No. DAE-4-601_Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In house check: Oct-18
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-1 mismission combination Reference Proce EX3DV4 DAE4 Secondary Standards Power motor EPM-442A Power sensor HP 8481A RF generator R&S SMT-06	SN: 5056 (20h) SN: 5047.2 / 06327 SN: 7548 SN: 601 D 4 SN: GB37480Y04 SN: US37292783 SN: MY41022317	05-Apr-16 (No. 217-02292) 05-Apr-16 (No. EX3-7349, Dec16) 31-Dec 16 (No. EX3-7349, Dec16) 04-Jun-17 (No. DAE4-601, Jan17) Check Date (In house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In house check: Oct-18
Pawer sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismatch combination Reference Proce EX3DV4 DAE4	SN: 5056 (20h) SN: 5047.2 / 06327 SN: 7548 SN: 601 D 4 SN: GB37480/V4 SN: UB37292783 SN: MV410k2317 SN: 100072	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dac-16 (No. EX3-7349, Dec16) 04-Jien-17 (No. DAE-4-601, Jan-17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16)	Apr-17 Apr-17 Dec-17 Jan-18
Pawer sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismistic comeination Reference Proce EX3DV4 DAE4 Secondary Stendards Power motor EPM-442A Power sensor HP 8481A Fr generator R&S SMT-06 Network Analyzer HP 8753E	SN: 5056 (20k) SN: 5047.2 / 06327 SN: 7348 SN: 801 SN: 601 SN: GB37480/04 SN: US37292783 SN: MV41032317 SN: 1000772 SN: US37380565	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dac-16 (No. EX3-7346, Dech6) 04-Jian-17 (No. DAE-4-601, Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 16-Oct-71 (in house check Oct-16)	Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In neuse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Power sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismatch combination Reference Proce EX3DV4 DAE4 Secondary Standards Power motor EPM-442A Power sensor HP 8481A PF generator R&S SMT-06	SN: 5056 (20h) SN: 5047.2 / 06327 SN: 7048 SN: 601 D 4 SN: GB37480Y04 SN: US37292783 SN: MY41022317 SN: 100372 SN: US37380565 Name	05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dac-16 (No. EX3-7348, Dec16) 04-Jan-17 (No. DAE-4-601, Jan-17) Check Date (In house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 16-Oct-01 (in house check Oct-16)	Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In neuse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Pawer sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismistic comeination Reference Proce EX3DV4 DAE4 Secondary Stendards Power motor EPM-442A Power sensor HP 8481A Fr generator R&S SMT-06 Network Analyzer HP 8753E	SN: 5056 (20h) SN: 5047.2 / 06327 SN: 7048 SN: 601 D 4 SN: GB37480Y04 SN: US37292783 SN: MY41022317 SN: 100372 SN: US37380565 Name	05-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02296) 31-Dac-16 (No. EX3-7348, Dec16) 04-Jan-17 (No. DAE-4-601, Jan-17) Check Date (In house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 16-Oct-01 (in house check Oct-16)	Apr-17 Apr-17 Dec-17 Jan-18 Scheduled Check In neuse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17
Payer sensor NRP-ZB1 Reference 20 dB Attenuator Type-N mismatic comeination Reference Proce EX30V4 DAE4 Secondary Standards Power motor EPM-442A Power sensor HP 8481A Power sensor HP 8481A PF generator R&S SMT-06 Network Analyzer HP 8753E Califorated by.	SN: 5056 (20k) SN: 5047.2 / 06327 SN: 7048 SN: 601 SN: GB37480704 SN: US37292783 SN: MY41082317 SN: 1000772 SN: US37380565 Name Johannes Kurikka	06-Apr-16 (No. 217-02292) 05-Apr-16 (No. 217-02293) 31-Dac-16 (No. EX3-7349, Dec16) 04-Jian-17 (No. DAE-4-601, Jan17) Check Date (in house) 07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 15-Jun-15 (in house check Oct-16) 16-Oct-01 (in house check Oct-16) Function Laboratory Technician	Apr-17 Apr-17 Dec-17 Jan-18 Schedulod Check In nouse check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-18 In house check: Oct-17

Certificate No: D2600V2-1005_Jan17

Page 1 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 219 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Zeugnausstrasse 43, 8004 Zurich, Switzerland





S Schweizenischer Kallbrierdienst
C Service subset of datennage
Service avizee of denteral
S Swies Californian Service

Approximation No.: SCS 0108

Accredies by the Swee Accreditation Service (SAS).

The Swiss Accreditation Service is one of the signatories to the EA. Multilateral Agreement for the recognition of callbration certificates

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- EEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- i) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)". March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- . SAR measured: SAR measured at the stated antenna input power
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D9600VS-1006 Jan 17

Page 2 tol 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 220 of 240

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2800 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.95 mho/m
Measured Head TSL parameters	(22,0 ± 0.2) °C	37.4 ± 6 %	2.05 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW Input power	14.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.5 W/kg = 17.0 % (k=2)

SAR averaged over 10 cm ⁸ (10 g) of Head TSL	condition	
SAR measured	250 mW Input power	6.32 W/kg
SAR for nominal Head TSL parameters	normalized to TW	24.8 W/kg ± 16.5 % (k=2)

Body TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.8 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.3 ± 6%	2.20 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	(1000)	

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.9 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	55.1 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ⁵ (10 g) of Body TSL	condition	
SAR measured	250 mW Input power	6.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.7 W/kg ± 16.5 % (k=2)

Certificate No: D2600V2-1005_Jan17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 221 of 240

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.3 Ω - 4.7 JΩ	
Platum Loss	- 26.5 dB	

Antenna Parameters with Body TSL

Impedance, transformed to feed point	44.7 0 - 3.2 j0	
Fleturn Loss	-23,7 dB	

General Antenna Parameters and Design

Electrical Delay (one direction) 1.154 ns	Electrical Delay (one direction)	1.154 ns
---	----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semitigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when leaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 23, 2006

Cemficate No: D2600V2-1005_Jan17

Page 4 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 222 of 240

DASY5 Validation Report for Head TSL

Date: 25.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: f = 2600 MHz; $\sigma = 2.05 \text{ S/m}$; $\varepsilon_k = 37.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.56, 7.56, 7.56); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 116.2 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 30.5 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.32 W/kg Maximum value of SAR (measured) = 24.2 W/kg



0 dB = 25.2 W/kg = 13.84 dBW/kg

Certificate No: D2600V2-1005_Jan17

Page 5 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 223 of 240

Impedance Measurement Plot for Head TSL

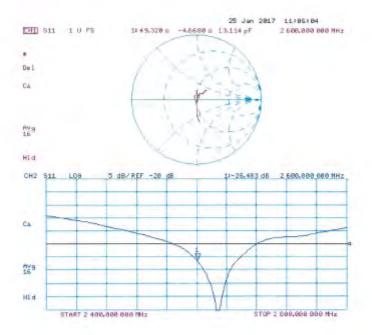

Certificate No: D2600V2-1005_Jan17

Page 6 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 224 of 240

DASY5 Validation Report for Body TSL

Date: 18.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1005

Communication System: UID 0 - CW; Frequency: 2600 MHz. Medium parameters used: f = 2600 MHz; $\sigma = 2.2 \text{ S/m}$; $z_c = 52.3$; $p = 1000 \text{ kg/m}^3$ Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN7349; ConvF(7.48, 7.48, 7.48); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 108.8 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 28.8 W/kg SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.2 W/kgMaximum value of SAR (measured) = 23.3 W/kg



0 dB = 23.3 W/kg = 13.67 dBW/kg

Certificate No: D2600V2-1005_Jan17

Page 7 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 225 of 240

Impedance Measurement Plot for Body TSL

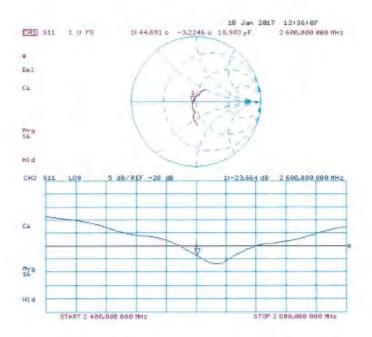

Certificate No: D2600V2-1005_Jan17

Page 8 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 226 of 240

Calibration Laboratory of Schmid & Partner

Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio avizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS-TW (Auden)

Certificate No: D5GHzV2-1023 Jan17

(bjec)	D5GHzV2 - SN:1	023	
Sabration procedurals)	QA CAL-22.v2 Calibration proce	dure for dipole validation kits bet	ween 3-6 GHz
Calibration date:	January 20, 2017	,	
The measurements and the unc	certainses with confidence p	ional standards, which realize the physical un includedly are given on the following pages an ry facility, any ronmont temperature (22 ± 3)*1	clars part of the certificate
Calibration Equipment used (M			
Primary Standards	ID #	Cal Date [Certificate No.]	Scheduled Calibration
Power meter MRP	SN: 104778	06-Apr-16 (No. 217-02269/02269)	Apr-17
Power sensor NRP-Z91	580 103244	06-Apr-16 (No. 217-02288)	Apr-17
ower sensor NRP-Z91	SN 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	85-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	85-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 3503 SN: 801	31-Dec-16 (No. EX3-8503_Dec15) D4-Jen-17 (No. DAE4-601_Jan17)	Jan-18
	1.00		Schedulet Check
Secondary Standards	D1	Check Date (in house)	In house check: Dct-18
Power mater EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check, Oct 48
Power sensor HP 8481A	SN: US37282783 SN: MY41082317	07-Oct-15 (in house check Oct-16) 07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SNL MY41082317 SNL 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-00 Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct 17
	Name	Function	Signature
Corporate him	Jeton Kastrati	Laboratory Technician	1-10-
Calibrated by	Secol Lyounni	(Working)	13 65
	Katja Pokovic	Technical Manager	El K
Approved by:			# /

Certificate No: D5GHzV2-1023_Jan17

Page 1 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 227 of 240

Calibration Laboratory of Schmid & Partner Engineering AG Teographysisses 83, 1994 Zurich, Switzerland





Schweizerischer Kalibrierdier w Service suiese distalernage Service evizzien di tentine Swiss Calibrition Service

Accreditation No.: SCS 0108

Accretion by the Source Americanian Service (SAS)
The Serian Accretitation Service is one of the signatorion to the EA
Multiparest Agreement for the recognition of calibration sertificates

Glossary:

TSL ConvF N/A tissue simulating liquid sensitivity in TSL / NORM x.y.z. not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices. Measurement Techniques", June 2013
- EC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- b) KDB 865664; 'SAR Measurement Requirements for 100 MHz to 6 GHz'

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end
 of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid lilled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncortainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certicate No: D5GHzV2 (023 Jan17

Page 2 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 228 of 240

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASYS	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4,0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	38.0	4.66 mhp/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	4.45 mho/m ± 6.%
Hend TSL temperature change during test	<05℃		-

SAR result with Head TSL at 5200 MHz

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	75.2 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for numinal Head TSL parameters	normalized to 1W	21.5 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1923_Jan17

Page 3 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 229 of 240

Head TSL parameters at 5300 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35,2 ± 6 %	4.55 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		

SAR result with Head TSL at 5300 MHz

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.0 W / kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 19.5 % (k=2)

Head TSL parameters at 5600 MHz

The following paramotors and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	347 = 6%	4.85 mho/m ± 8 %
Head TSL temperature change during test	<0.5°C	-	

SAR result with Head TSL at 5600 MHz

SAR averaged over 1 cm3 (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	8.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	81.7 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Head TSL	condition	
SAR measured	100 mW Input power	2.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan17

Page 4 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 230 of 240

Head TSL parameters at 5800 MHz

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34 4 ± 6 %	5 05 mha/m ± 6 %
Head TSL temperature change during test	< 0.5 °C		_

SAR result with Head TSL at 5800 MHz

SAR averaged over 1 cm ² (1 g) of Head TSL	Condition	
SAR measured	100 mW input power	7.82 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	77.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	100 mW input power	.2.22 W/kg
SAR for nominal Head TSL parameters.	normalized to 1W	22.0 W/kg ± 19.5 % (k=2)

Gertificate No: D5GHzV2-1025_.llan17

Page 5 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 231 of 240

Body TSL parameters at 5200 MHz

he following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 %	49.0	5.30 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.5 ± 6 %	5.36 mho/m ± 6 %
Body TSL temperature change during test	<0.5 ℃		-

SAR result with Body TSL at 5200 MHz

SAR averaged over 1 cm3 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7,32 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	72.8 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.05 W/kg
SAR for nominal Body TSL parameters.	normalized to 1W	20.3 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5300 MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.9	5.42 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3±6%	5,50 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	-400	-

SAR result with Body TSL at 5300 MHz

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	100 mW input power	7.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	76.1 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	Normalized to 1V/	21.3 W/kg = 19.5 % (k=2)

Dertificate No: D5GHzV2-1023 Jan 17

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 232 of 240

Body TSL parameters at 5600 MHz

ing parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.5	5.77 mha/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.5 ± 6 %	5.90 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 €	_	

SAR result with Body TSL at 5600 MHz

SAR averaged over 1 cm ³ (1 g) of Body TSL.	Condition	
SAR measured	100 mW input power	8.02 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	79.6 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm2 (10 g) of Body TSL	condition	
SAR measured	100 INV input power	2.26 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	22.4 W/kg ± 19.5 % (k=2)

Body TSL parameters at 5800 MHz

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6,00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	48.3 ± 6 %	6.17 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	_	-

SAR result with Body TSL at 5800 MHz

SAR averaged over 1 cm2 (1 g) of Body TSL	Condition	
SAR measured	100 mW Input power	7.64 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	75.9 W/kg ± 19.9 % (k=2)

SAR averaged over 10 cm ² (10 g) of Body TSL	condition	
SAR massured	100 mW input power	2.13 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 19.5 % (k=2)

Certificate No: D5GHzV2-1023_Jan17

Page 7 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 233 of 240

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5200 MHz

Impedance, transformed to feed point	49.8 Ω - 6.7 JΩ	
Return Loss	- 23.4 dB	

Antenna Parameters with Head TSL at 5300 MHz

Impedance, transformed to feed point	49.0 Ω = 1.8 μΩ	
Return Loss	+33.5 dB	

Antenna Parameters with Head TSL at 5600 MHz

Impedance, transformed to feed point	54.1 Ω - 0.2 jΩ
Fleturn Loss	- 28.2 dB

Antenna Parameters with Head TSL at 5800 MHz

Impedance, transformed to feed point	55.4 \O + 2.8 \O	
Fletum Loss	−24.8 dB	

Antenna Parameters with Body TSL at 5200 MHz

Impedance, transformed to feed point	48.9 Ω - 7.0 jΩ
Return Loss	- 22.9 dB

Antenna Parameters with Body TSL at 5300 MHz

Impedance, transformed to feed point	51.0 Ω - 1.0 μΩ
Return Loss	- 37.0 dB

Antenna Parameters with Body TSL at 5600 MHz

Impedance, transformed to feed point	55.6 Ω + 1.5 βΔ	
Return Loss	- 25.2 dB	

Antenna Parameters with Body TSL at 5800 MHz

Impedance, transformed to feed point	$56.6 \Omega + 2.7 j\Omega$	
Return Loss	- 23.6 dB	

Certificate No. D5GHzV2-1023 Jan17

Page 8 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 234 of 240

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG	
Manufactured on	February 05, 2004	

Certificate No: D5GHzV2-1023_Jan17

Page 9 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 235 of 240

DASY5 Validation Report for Head TSL

Date: 20.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW;

Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz; a = 4.45 S/m; $\epsilon_c = 35.4$; $\rho = 1000$ kg/m³

Medium parameters used: l = 5300 MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³.

Medium parameters used: l = 5600 MHz; n = 4.85 S/m; $\epsilon_r = 34.7$; $\rho = 1000 \text{ kg/m}^2$.

Medium parameters used: f = 5800 MHz; $\pi = 5.05 \text{ S/m}$; $\epsilon_r = 34.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEBE/IEC/ANSI C63, 19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; ConvF(5.76, 5.76, 5.76); Calibrated: 31.12.2016, ConvF(5.35, 5.35, 5.35); Calibrated: 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.0). 5.01; Calibrated: 31.12.2016;
- Sensor-Surface: L4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.01.2017
- Phantom: Flut Phuntom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan.

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.58 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 7.55 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 17.4 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.0) V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 31,6 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 19.3 W/kg.

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.94 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

Certificate No: OSGHzV2-1023_Jan17

Page 10 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 236 of 240

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 69.84 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 32.7 W/kg SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.22 W/kg Maximum value of SAR (measured) = 19.5 W/kg



0 dB = 17.4 W/kg = 12.41 dBW/kg

Certificate No: D5GHzV2-1023_Jan17

Page 11 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 237 of 240

Impedance Measurement Plot for Head TSL

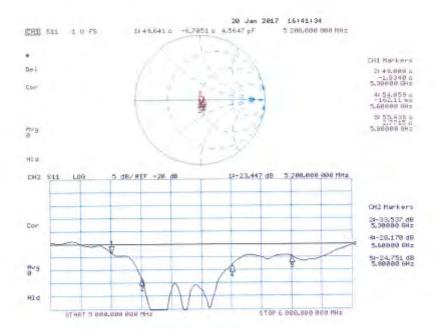

Certificate No: D5GHzV2-1023_Jan17

Page 12 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 238 of 240

DASY5 Validation Report for Body TSL

Date: 19.01.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1023

Communication System: UID 0 - CW;

Frequency: 5200 MHz, Frequency: 5300 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: f = 5200 MHz; $\sigma = 5.36$ S/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m².

Medium parameters used: f = 5300 MHz; $\sigma = 5.5 \text{ S/m}$; $\varepsilon_t = 47.3$; $\rho = 1000 \text{ kg/m}^3$

Medium parameters used: l = 5600 MHz; $\sigma = 5.9 \text{ S/m}$; $\epsilon_i = 46.6$; $\rho = 1000 \text{ kg/m}^3$

Medium parameters used: f = 5800 MHz; $\sigma = 6.17 \text{ S/m}$; $\epsilon_r = 46.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard; DASY5 (IEEE/IEC/ANSI C63,19-2011)

DASY52 Configuration:

- Probe: EX3DV4 SN3503; CoavF(5,29, 5,29, 5,29); Calibrated: 31.12.2016, CoavF(5,04, 5,04, 5,04); Calibrated: 31.12.2016, CoavF(4,57, 4,57, 4,57); Calibrated: 31.12.2016, CoavF(4,48, 4,48, 4,48); Calibrated: 31.12.2016;
- · Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601, Calibrated: 04.01.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5200 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.54 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 28.1 W/kg

SAR(1 g) = 7.32 W/kg; SAR(10 g) = 2.05 W/kg

Maximum value of SAR (measured) = 16.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5300 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.93 V/m; Power Drift = -0.07 dB

Penk SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.15 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,

dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.09 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.26 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

Certificate No: D5GHzV2-1023_Jan17

Page 13 of 16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 239 of 240

Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan,


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.14 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 7.64 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 18.3 W/kg



0 dB = 16.6 W/kg = 12.20 dBW/kg

Certificate No: D5GHzV2-1023 Jan17

Page 14 of 15

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format


documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 240 of 240

Impedance Measurement Plot for Body TSL

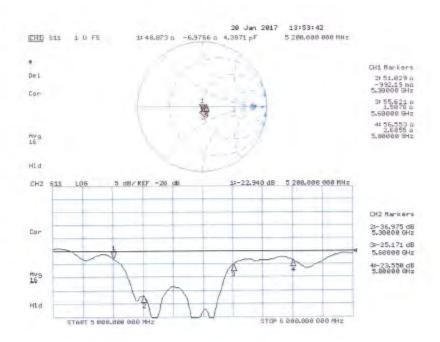

Certificate No: D5GHzV2-1023_Jan17

Page 15 of 15

- End of 1st part of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⁹⁰天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format

documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.