



MEASUREMENT REPORT LTE

Applicant Name:

Netcomm Wireless Limited
18-20 Orion Road
Lane Cove NSW 2066
Sydney Australia

Date of Testing:

3/31 - 5/15/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2003310053-01-R1.XIA

FCC ID: XIA-CFW2132

APPLICANT: Netcomm Wireless Limited

Application Type: Certification

Model: CFW-2132

EUT Type: Outdoor LTE Router

FCC Classification: Citizens Band Category A and B Devices (CBD)

FCC Rule Part(s): 96

Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This revised Test Report (S/N: 1M2003310053-01-R1.XIA) supersedes and replaces the previously issued test report(s) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




TESTING CERT#2041.01

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 1 of 97

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	19
7.4	Band Edge Emissions at Antenna Terminal	37
7.5	Peak Power Spectral Density Measurement	44
7.6	Peak-Average Ratio	64
7.7	Uplink Carrier Aggregation	71
7.8	Radiated Power (EIRP)	81
7.9	Radiated Spurious Emissions Measurements	84
7.10	Uplink Carrier Aggregation Radiated Measurements	90
7.11	Frequency Stability / Temperature Variation	94
8.0	CONCLUSION.....	97

FCC ID: XIA-CFW2132	PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router			Page 2 of 97



MEASUREMENT REPORT

FCC Part 96

Mode	FCC Rule Part	Tx Frequency (MHz)	EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)		
LTE Band 48	96	3552.5 - 3697.5	9.750	39.89	4M54G7D	QPSK
LTE Band 48	96	3552.5 - 3697.5	7.727	38.88	4M51W7D	16QAM
LTE Band 48	96	3552.5 - 3697.5	6.138	37.88	4M52W7D	64QAM
LTE Band 48	96	3555 - 3695	9.817	39.92	9M00G7D	QPSK
LTE Band 48	96	3555 - 3695	7.798	38.92	8M99W7D	16QAM
LTE Band 48	96	3555 - 3695	6.194	37.92	9M02W7D	64QAM
LTE Band 48	96	3557.5 - 3692.5	9.772	39.90	13M5G7D	QPSK
LTE Band 48	96	3557.5 - 3692.5	7.762	38.90	13M5W7D	16QAM
LTE Band 48	96	3557.5 - 3692.5	6.237	37.95	13M5W7D	64QAM
LTE Band 48	96	3560 - 3690	9.931	39.97	18M0G7D	QPSK
LTE Band 48	96	3560 - 3690	7.834	38.94	18M0W7D	16QAM
LTE Band 48	96	3560 - 3690	6.310	38.00	17M9W7D	64QAM

EUT Overview (LTE B48)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 3 of 97

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WInnForum Approved Test Lab
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WInnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router			Page 4 of 97

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Netcomm Outdoor LTE Router FCC ID: XIA-CFW2132**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band 48 operation in the CBRS band. This device is a Category B CBSD.

Test Device Serial No.: 00266, 00274, 00290

2.2 Device Capabilities

This device contains the following capabilities:

LTE B48

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: XIA-CFW2132	 PCTEST[®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router			Page 5 of 97

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: XIA-CFW2132	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router			Page 6 of 97

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 7 of 97

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTx1
-	LTx2	Licensed Transmitter Cable Set	10/30/2019	Annual	10/30/2020	LTx2
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Espec	ESX-2CA	Environmental Chamber	6/13/2019	Annual	6/13/2020	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini Circuits	TVA-11-422	RF Power Amp		N/A		QA1317001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	4/19/2019	Annual	4/19/2020	11401010036
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator		N/A		11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester		N/A		100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/8/2019	Annual	7/8/2020	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 8 of 97

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 9 of 97

7.0 TEST RESULTS

7.1 Summary

Company Name: Netcomm Wireless Limited
 FCC ID: XIA-CFW2132
 FCC Classification: Citizens Band Category A and B Devices (CBD)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1046	Transmitter Conducted Output Power (Calculated EIRP)	50.12W / 10MHz EIRP (average)		PASS	Section 7.8
2.1051 96.41(e)	Out of Band Emissions	-13 dBm/Mhz at frequencies within 0-10MHz of channel edge -25 dBm/MHz at frequencies greater than 10MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz		PASS	Section 7.3, 7.4
2.1046	Transmitter Conducted Output Power (Calculated EIRP)	47 dBm/10MHz		PASS	Section 7.8
96.41(b)	Peak Power Spectral Density	37 dBm/MHz		PASS	Section 7.5
96.41(g)	Peak-Average Ratio	< 13 dB		PASS	Section 7.6
96.41(e)	Uplink Carrier Aggregation Out of Band Emissions	-13 dBm/Mhz at frequencies within 0-10MHz of channel edge -25 dBm/MHz at frequencies greater than 10MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz		PASS	Section 7.7
2.1055	Frequency Stability	Fundamental emissions stay within authorized frequency block		PASS	Section 7.11

Table 7-1. Summary of Conducted Test Results

FCC ID: XIA-CFW2132	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 10 of 97

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1053 96.41(e)	Undesirable Emissions	-40 dBm/MHz	RADIATED	PASS	Section 7.9
96.41(e)	Uplink Carrier Aggregation	Undesirable emissions must meet the limits detailed in 96.41(e)		PASS	Section 7.10

Table 7-2. Summary of Radiated Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 5.1.

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 11 of 97

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

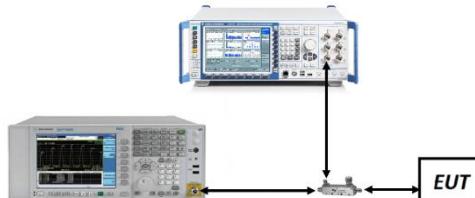



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: XIA-CFW2132	PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	NetCommWireless	
© 2020 PCTEST			Page 12 of 97	

Band 48

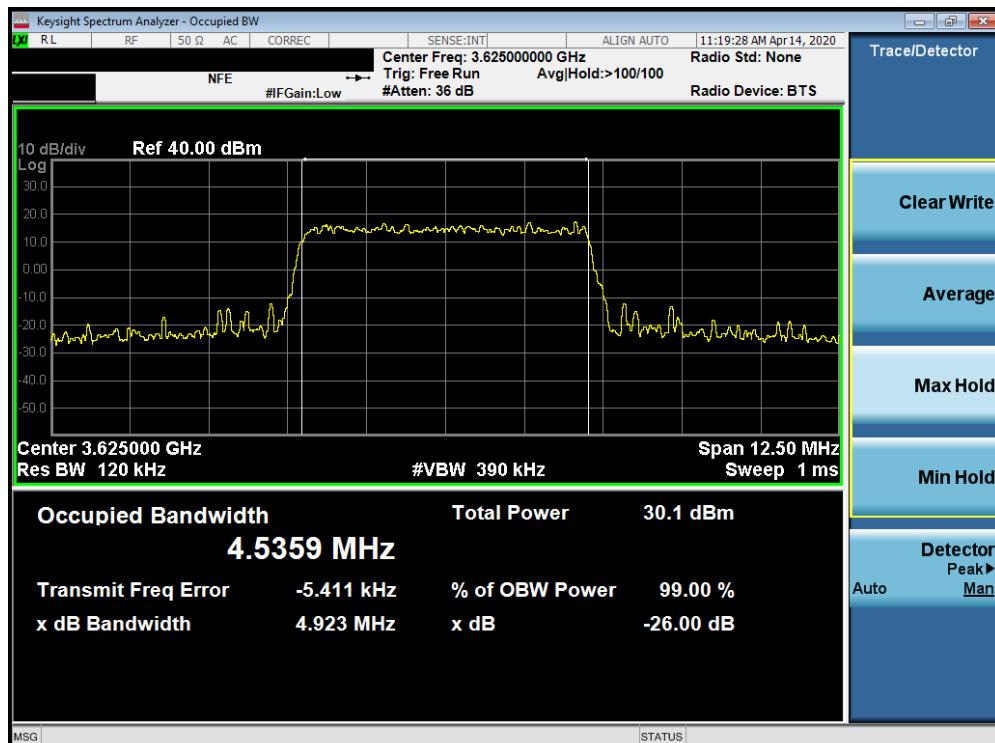


Plot 7-1. Occupied Bandwidth Plot (Band 48 - 5.0MHz QPSK - Full RB Configuration)

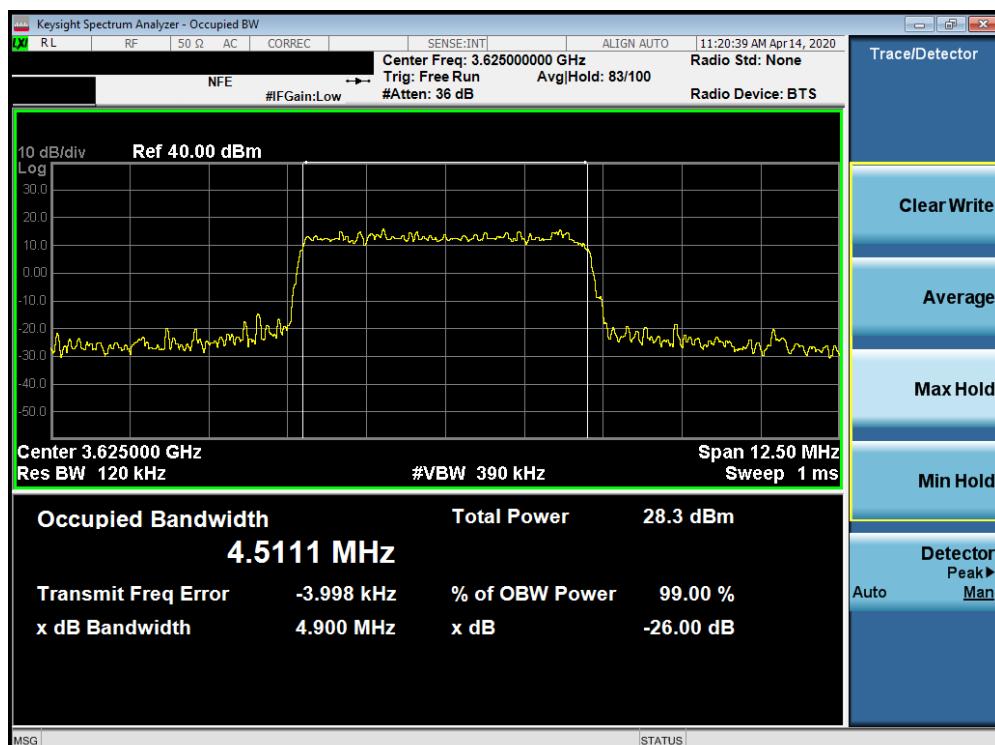


Plot 7-2. Occupied Bandwidth Plot (Band 48 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 13 of 97

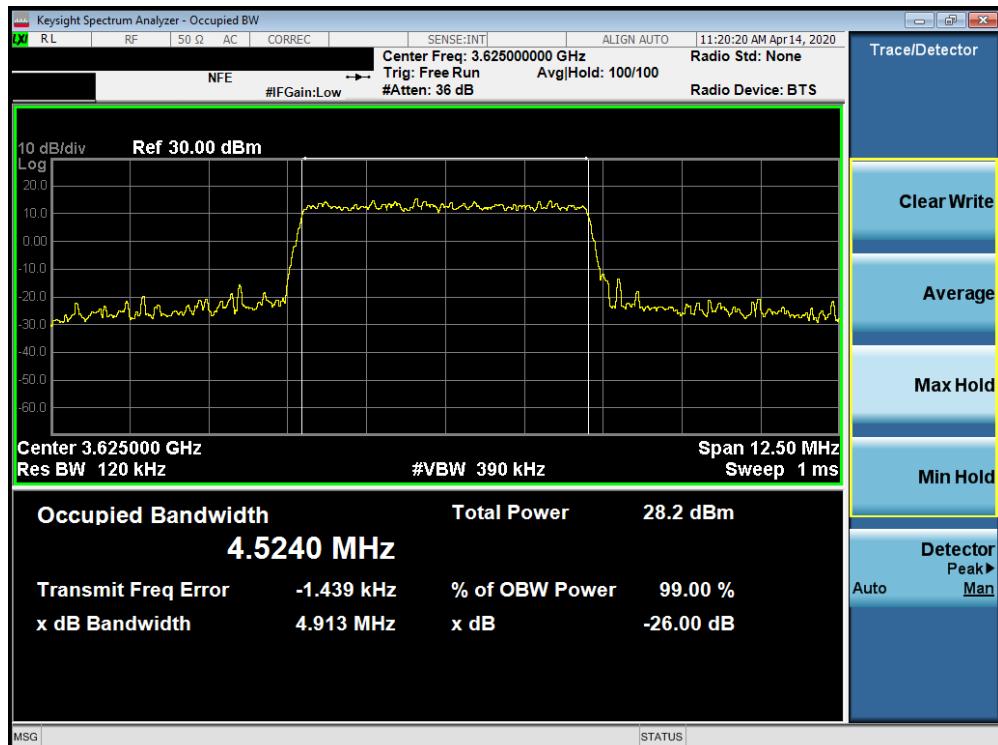


Plot 7-3. Occupied Bandwidth Plot (Band 48 - 5.0MHz 64-QAM - Full RB Configuration)

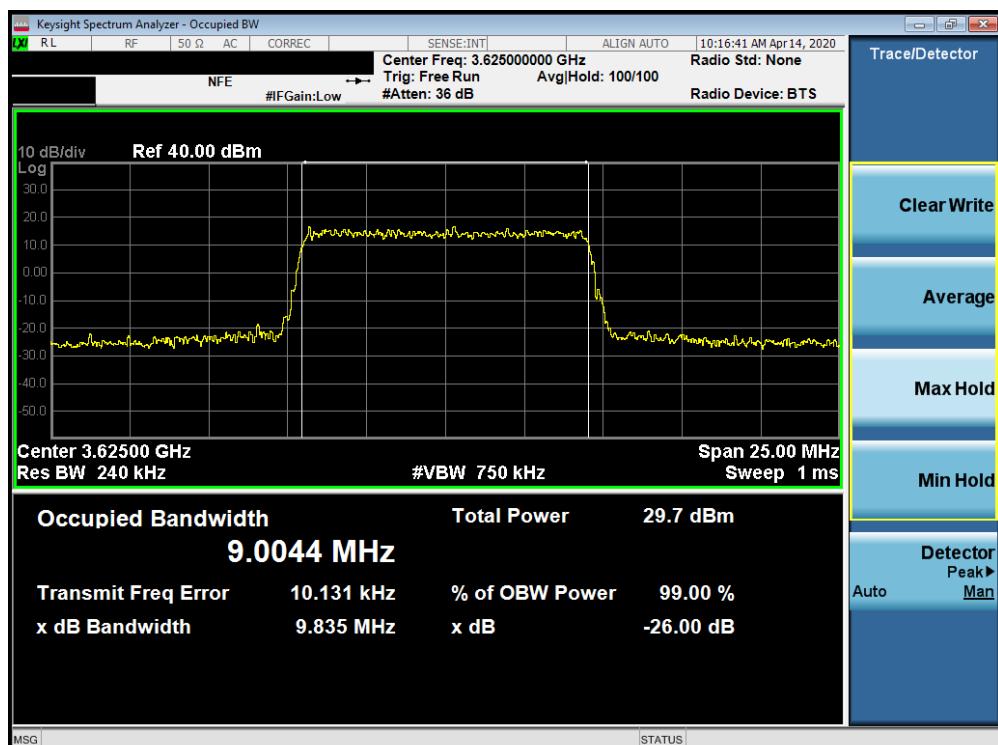


Plot 7-4. Occupied Bandwidth Plot (Band 48 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: XIA-CFW2132	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 14 of 97

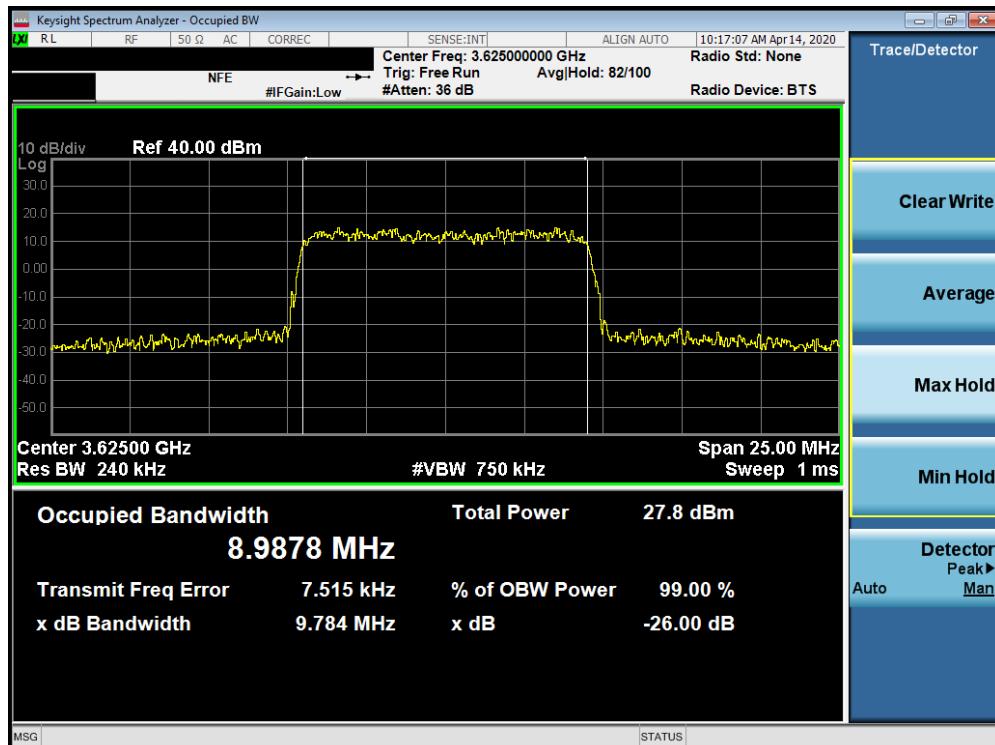


Plot 7-5. Occupied Bandwidth Plot (Band 48 - 10.0MHz 16-QAM - Full RB Configuration)

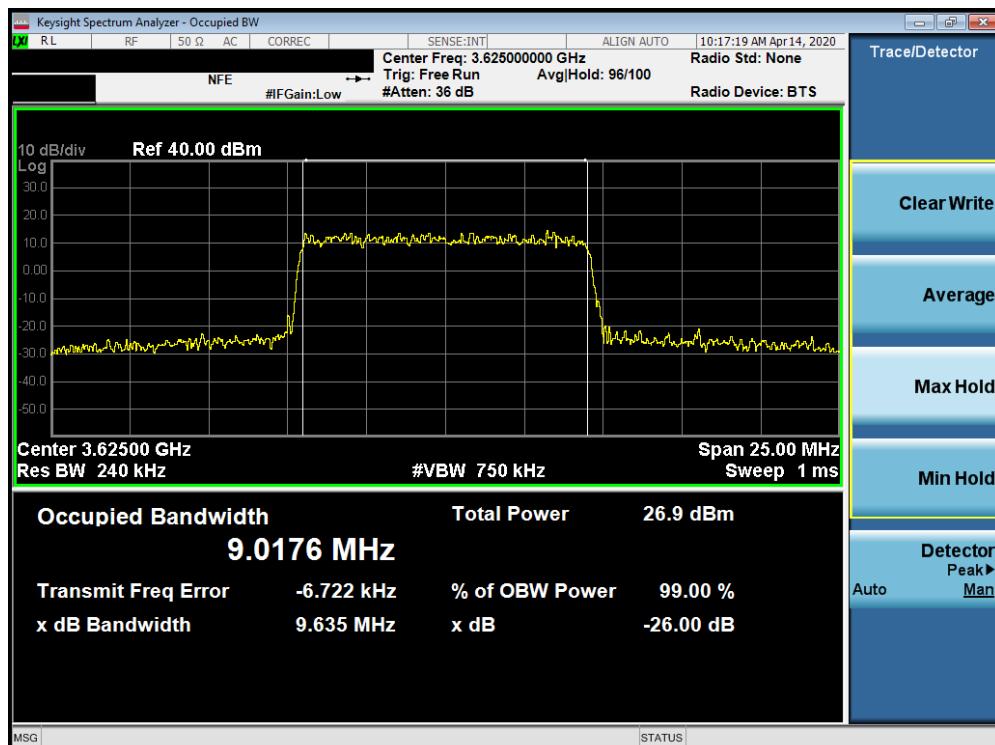


Plot 7-6. Occupied Bandwidth Plot (Band 48 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 15 of 97

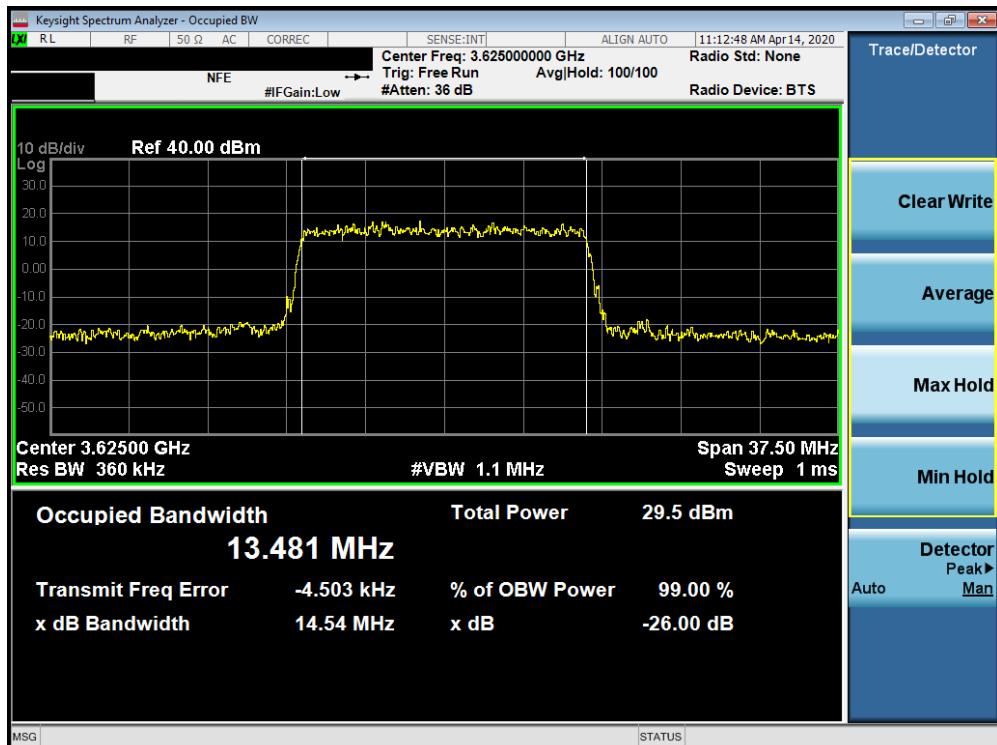


Plot 7-7. Occupied Bandwidth Plot (Band 48 - 15.0MHz QPSK - Full RB Configuration)

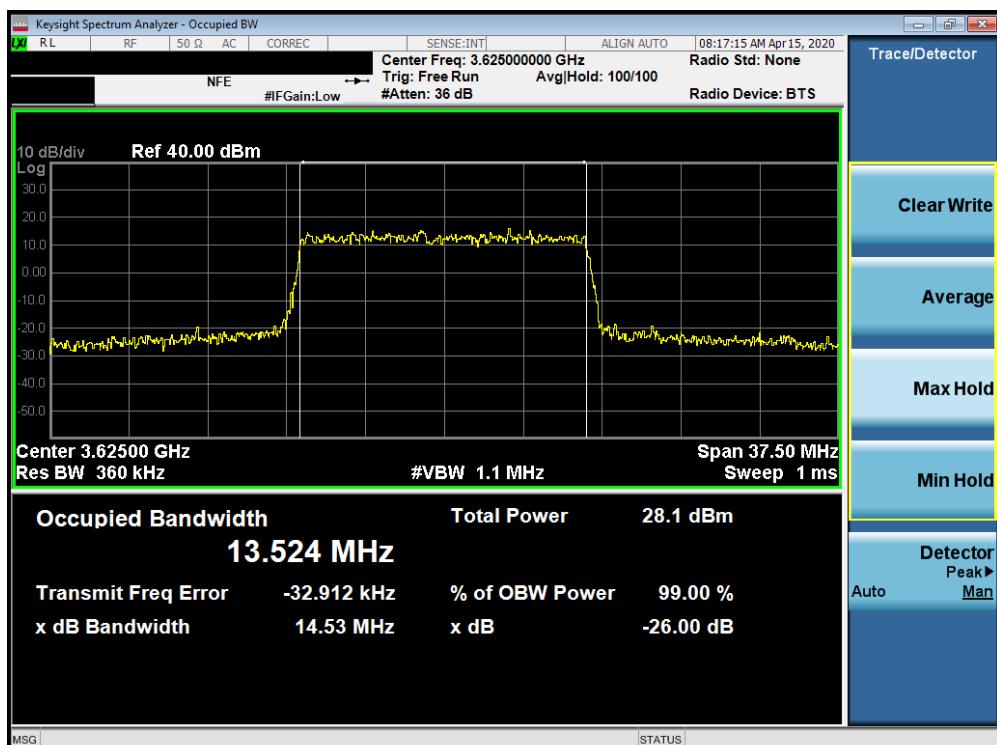


Plot 7-8. Occupied Bandwidth Plot (Band 48 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 16 of 97

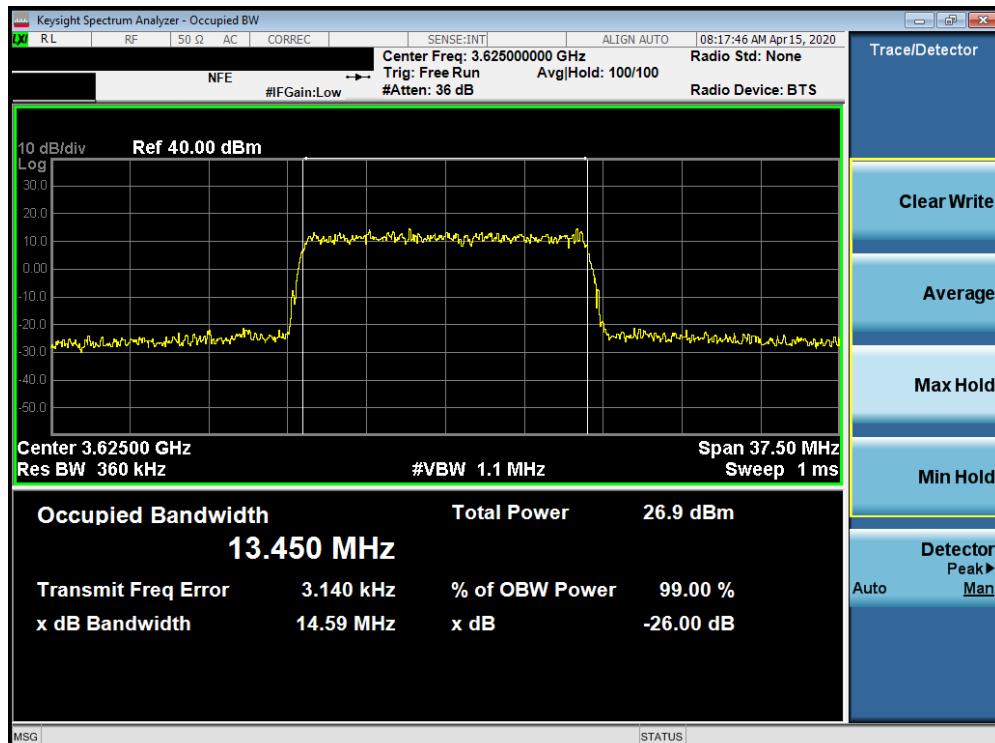


Plot 7-9. Occupied Bandwidth Plot (Band 48 - 15.0MHz 64-QAM - Full RB Configuration)

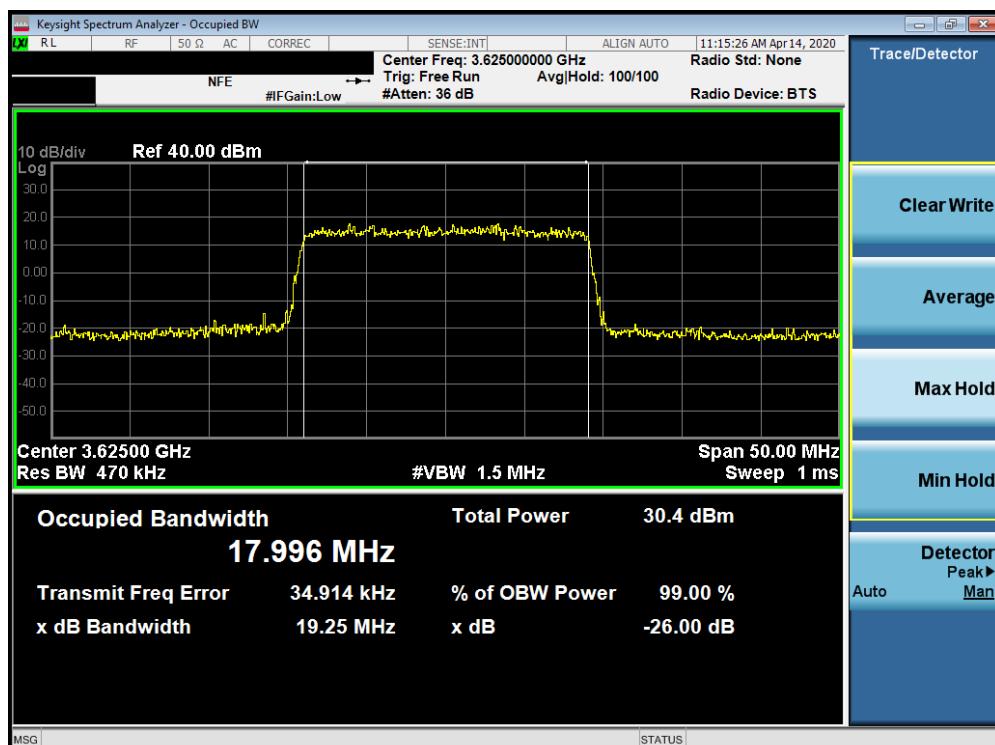


Plot 7-10. Occupied Bandwidth Plot (Band 48 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 17 of 97

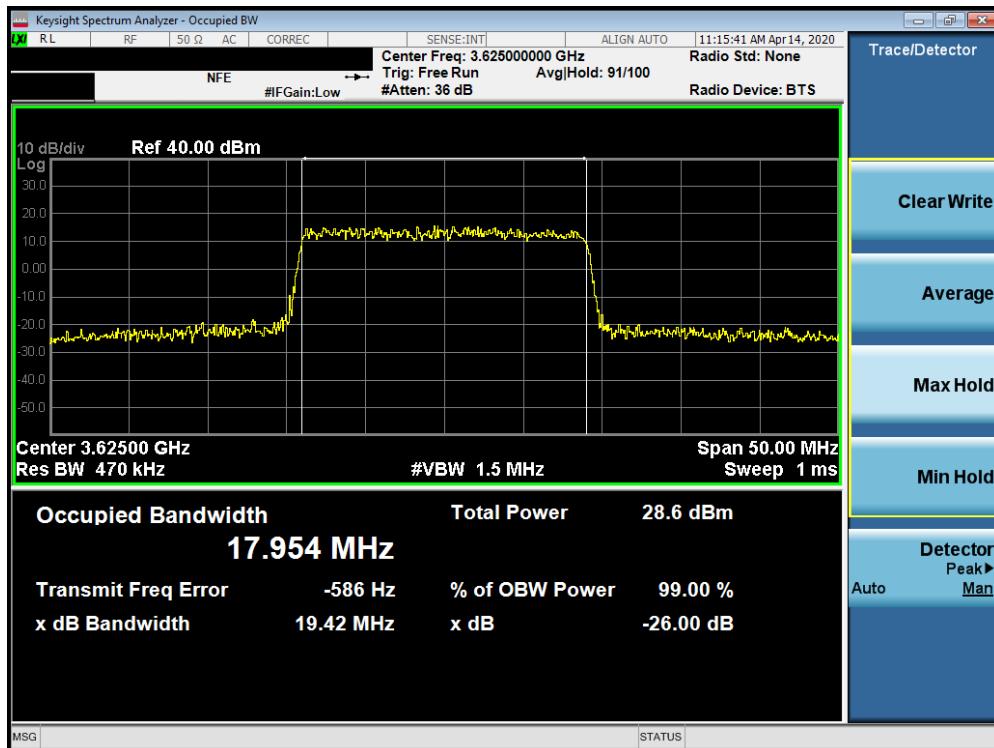

Plot 7-11. Occupied Bandwidth Plot (Band 48 - 20.0MHz 16-QAM - Full RB Configuration)

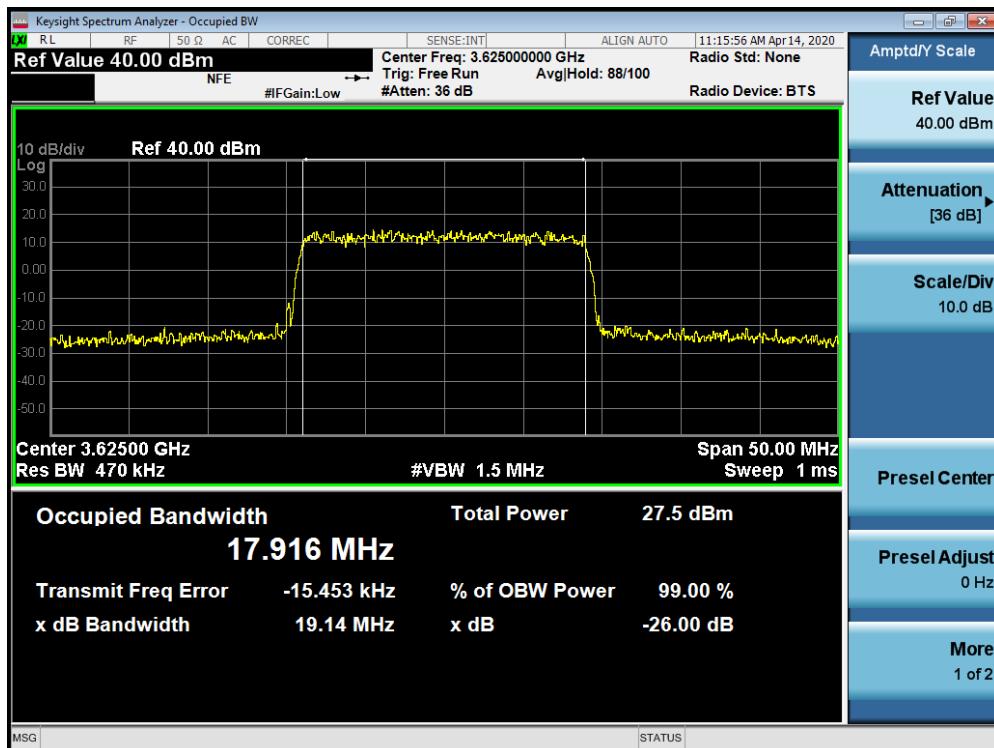

Plot 7-12. Occupied Bandwidth Plot (Band 48 - 20.0MHz 64-QAM - Full RB Configuration)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 18 of 97

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §96.41(e)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

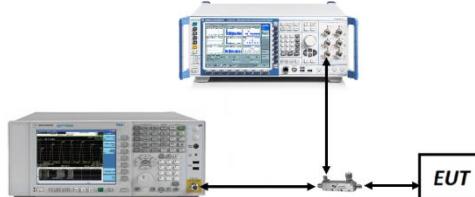



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 19 of 97

Band 48

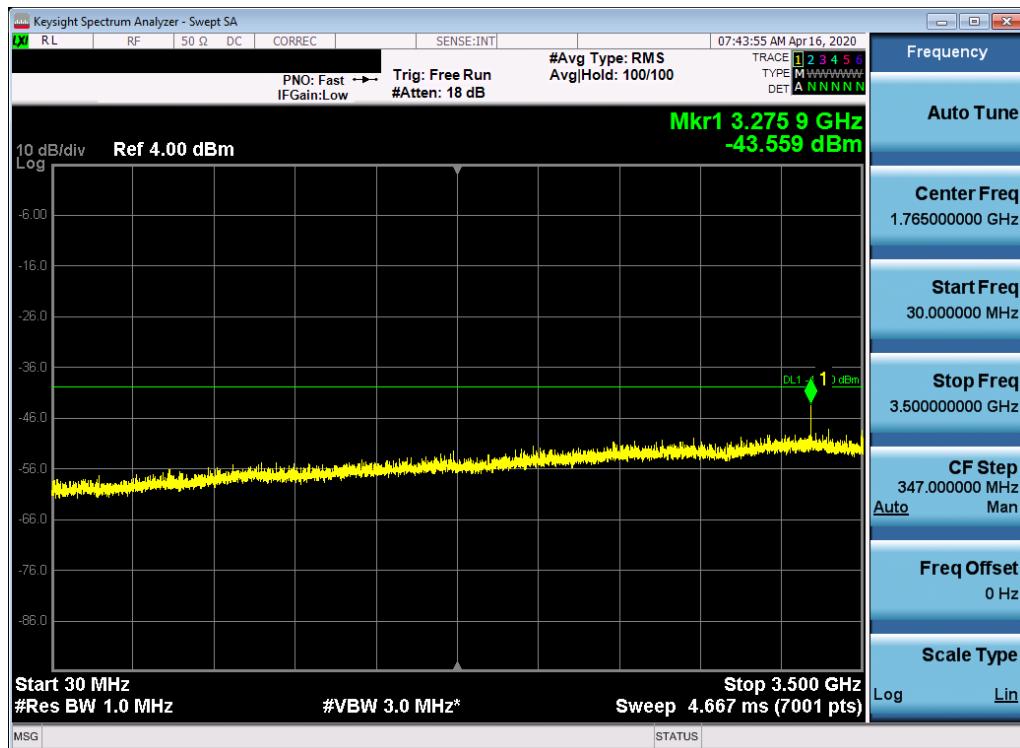


Plot 7-13. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

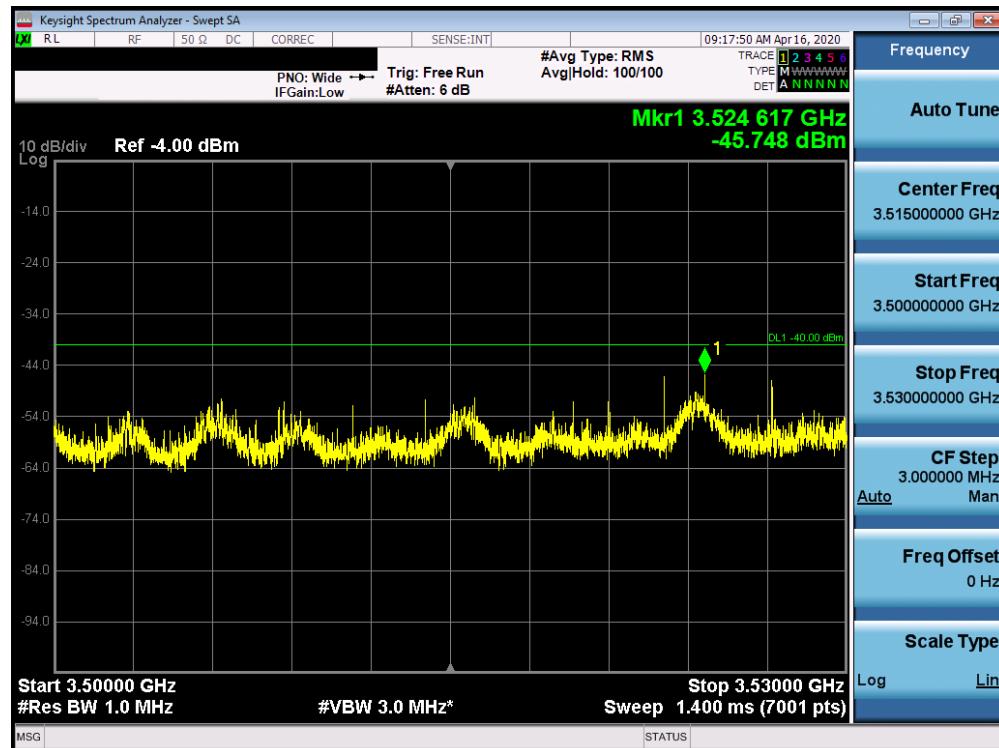


Plot 7-14. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 20 of 97

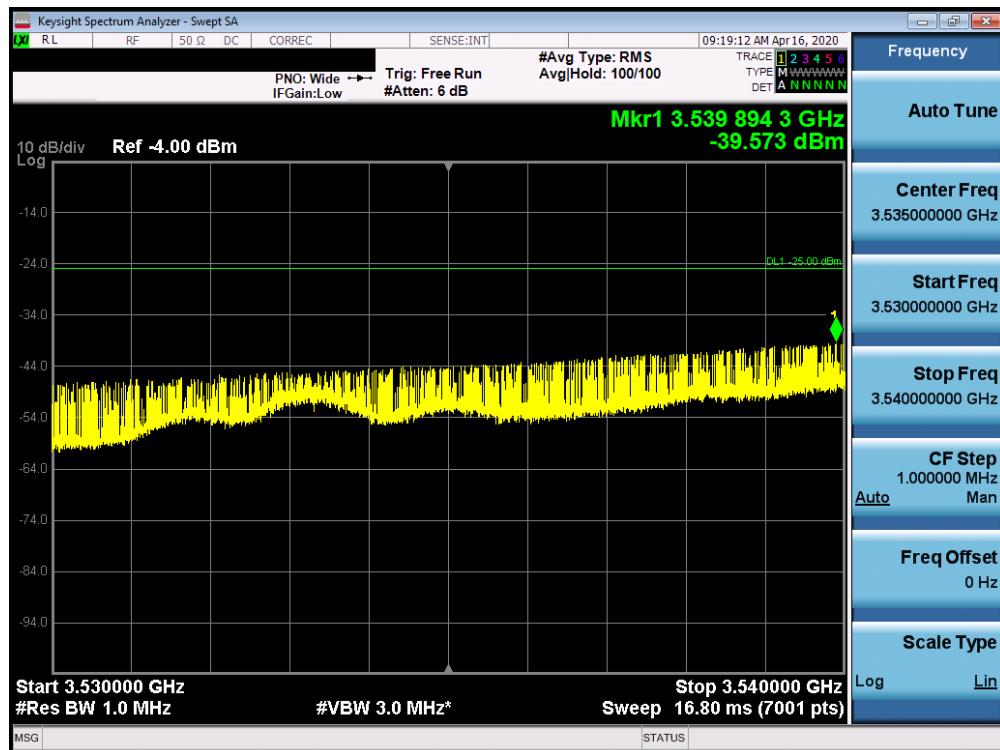


Plot 7-15. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

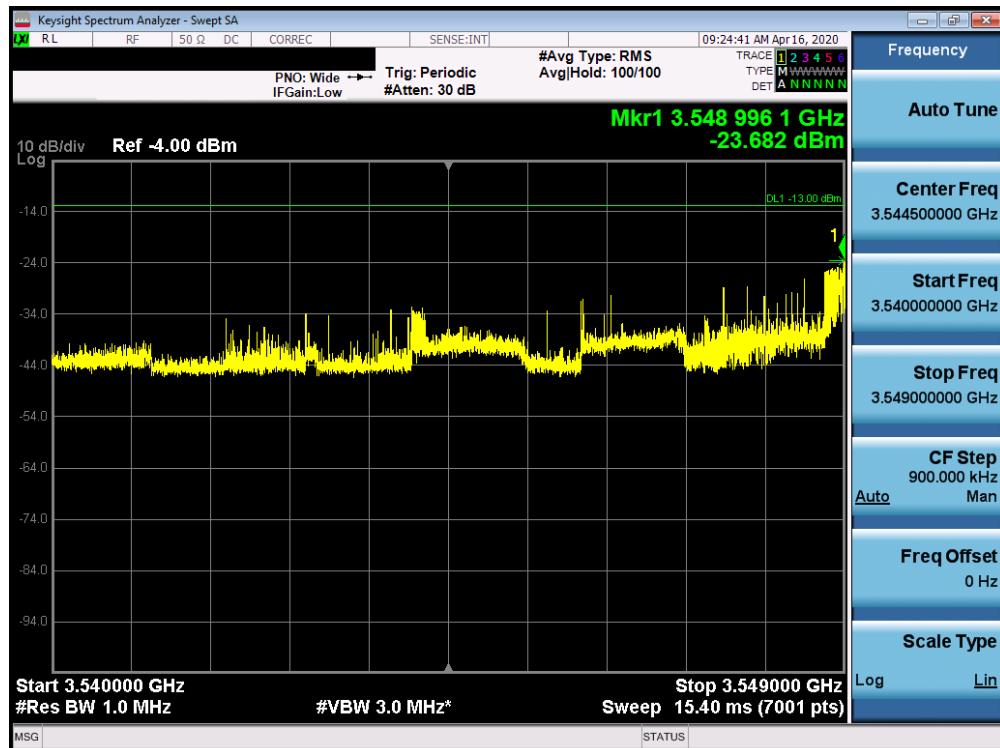


Plot 7-16. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310503-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 21 of 97

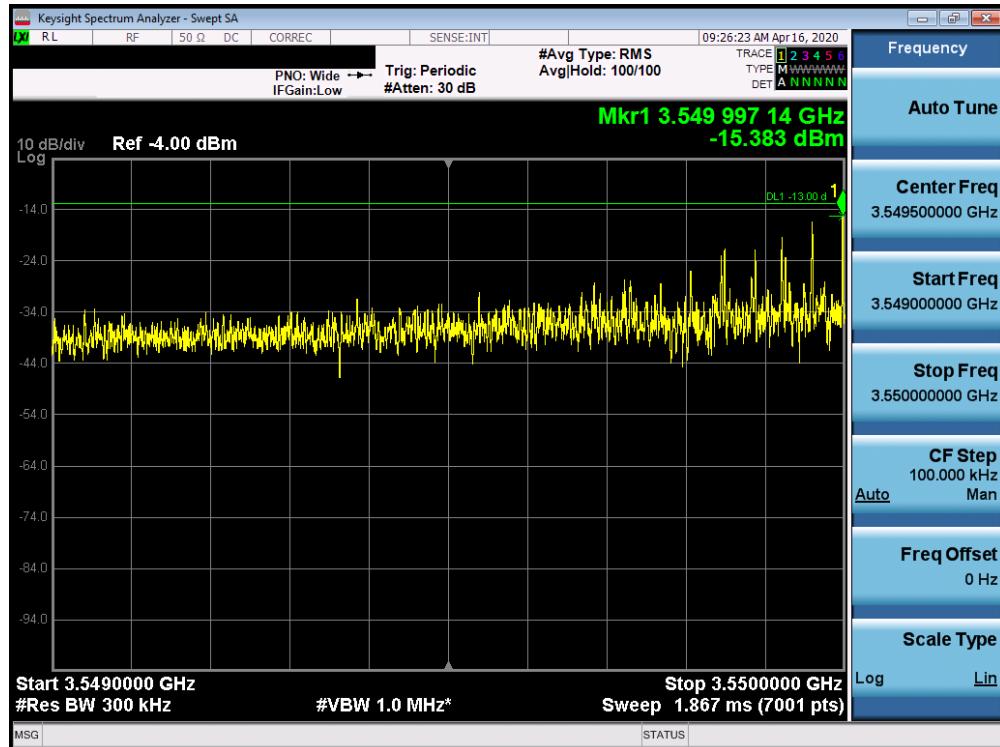


Plot 7-17. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

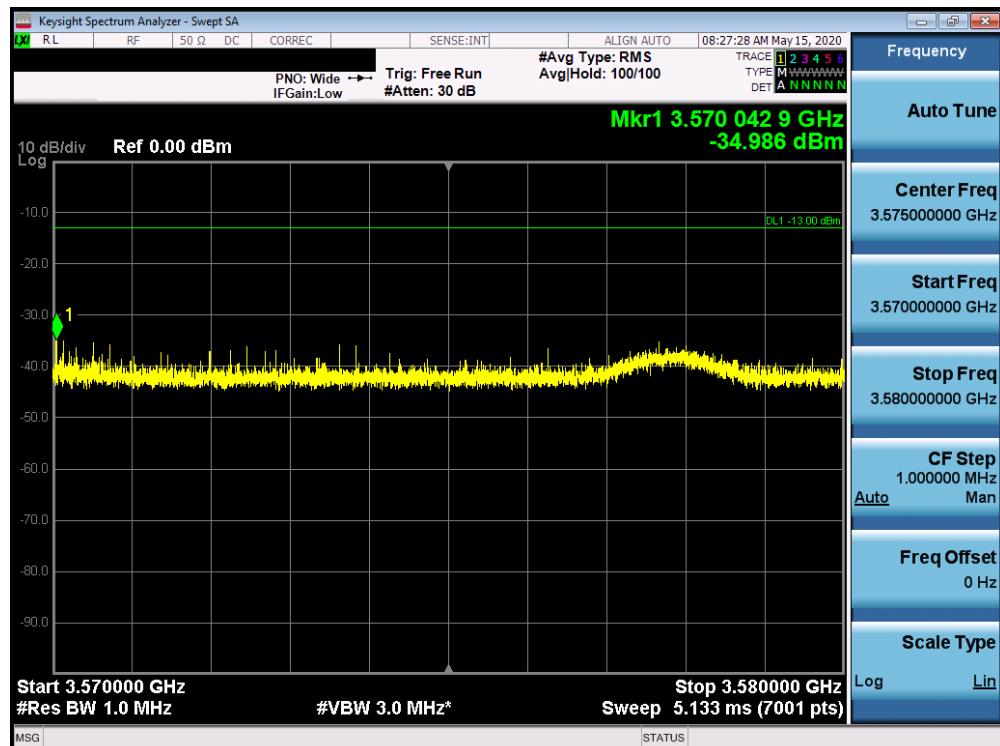


Plot 7-18. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 22 of 97

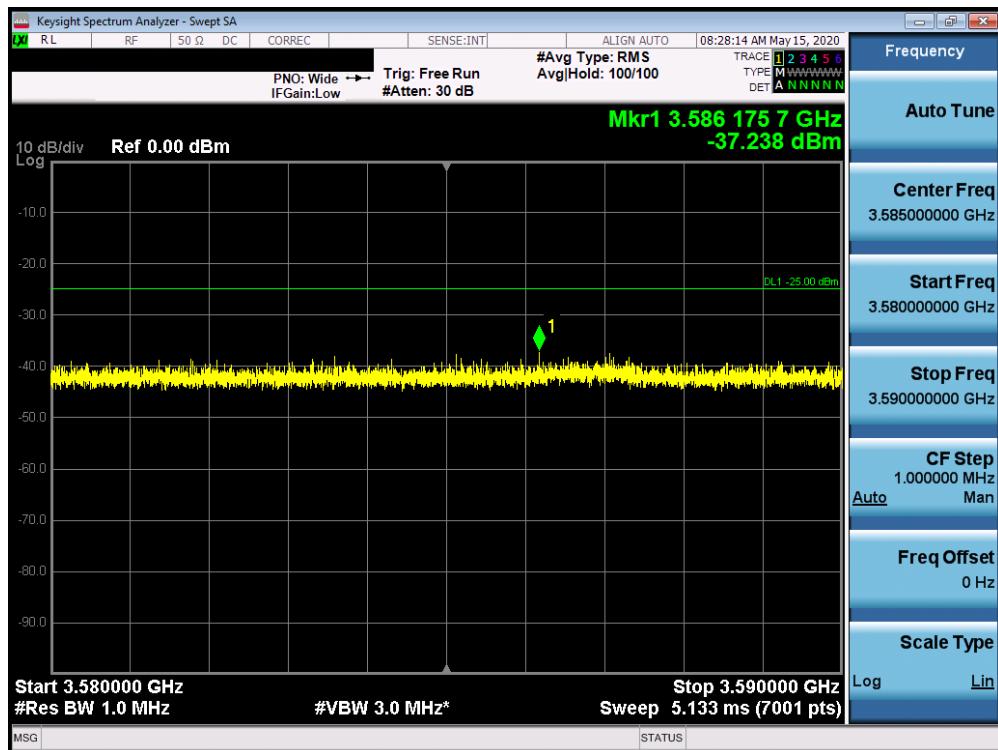


Plot 7-19. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

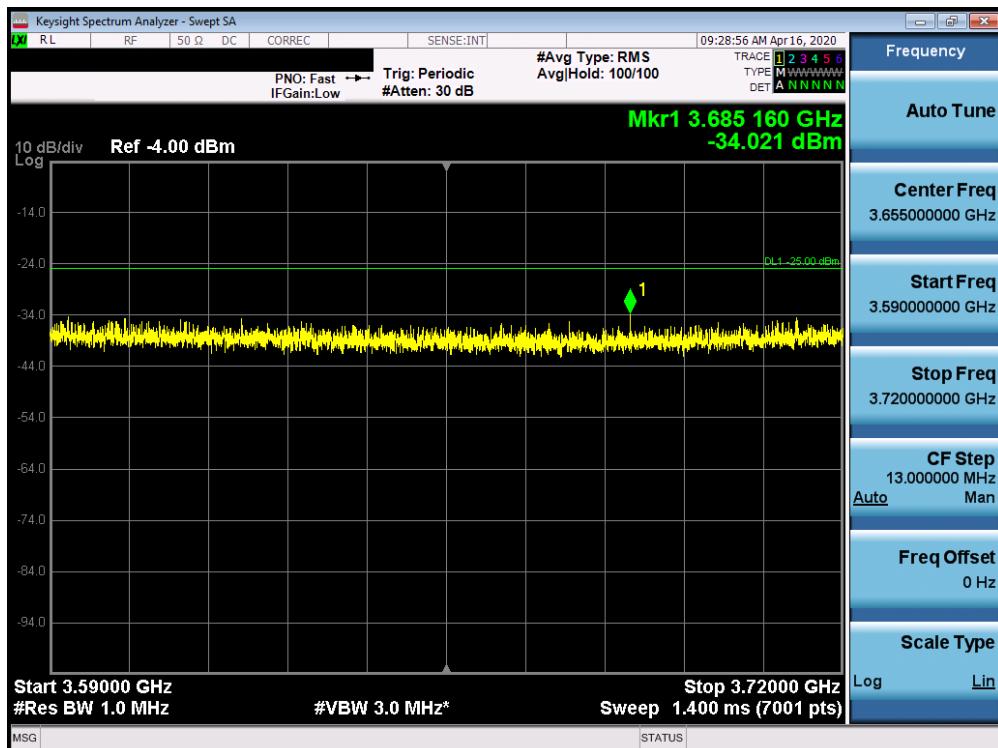


Plot 7-20. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 23 of 97

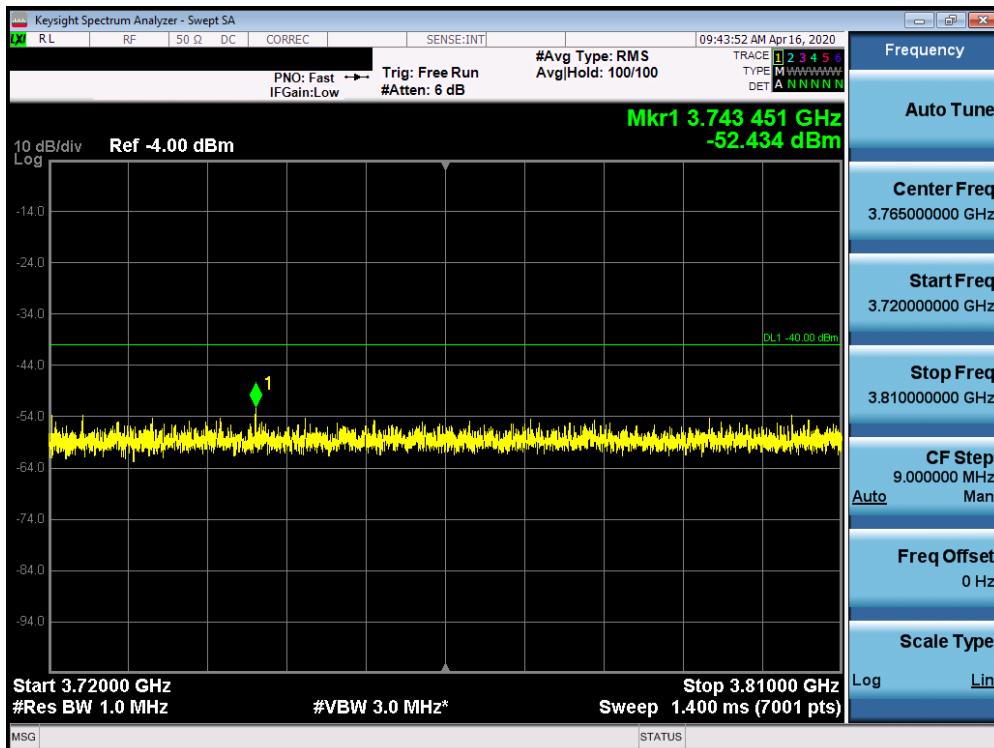


Plot 7-21. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

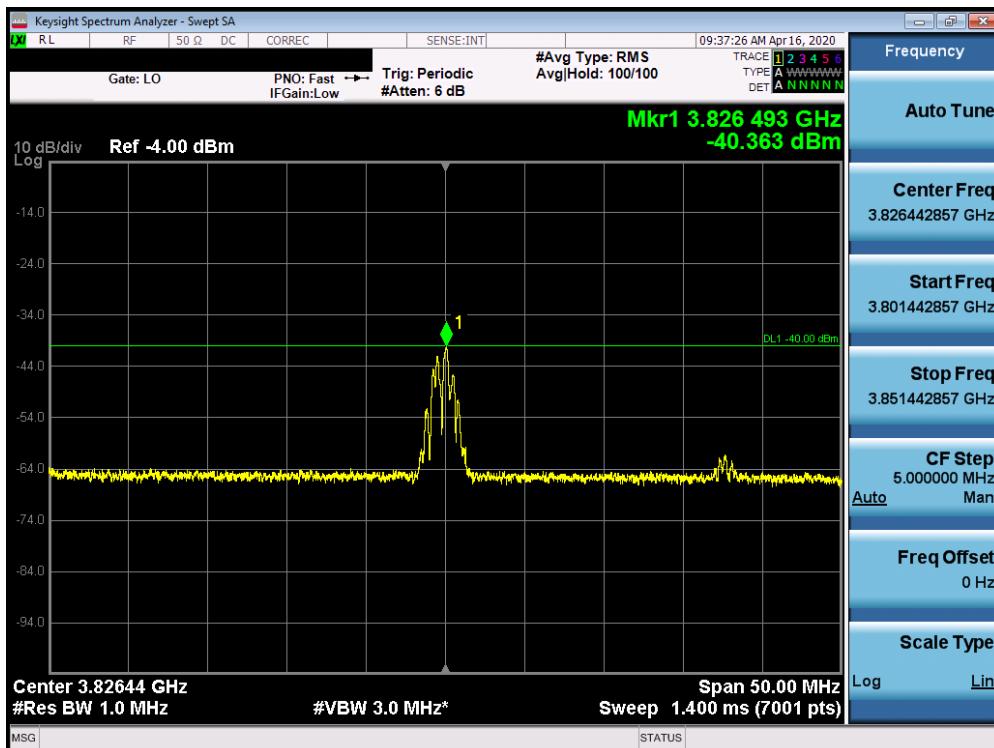


Plot 7-22. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 24 of 97

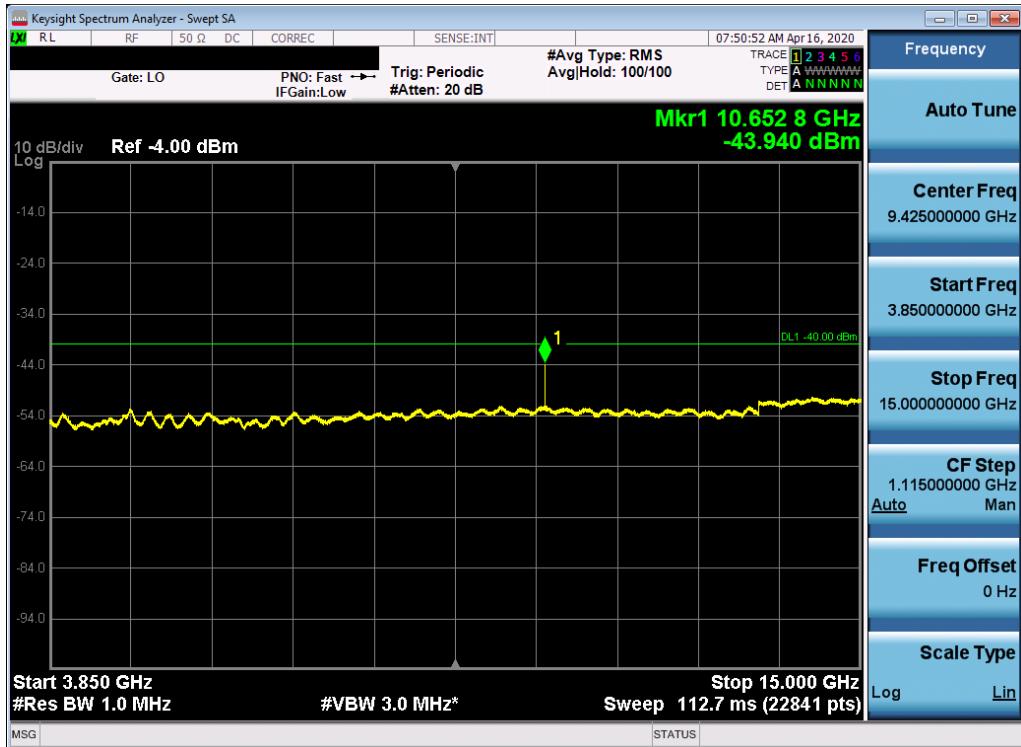


Plot 7-23. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

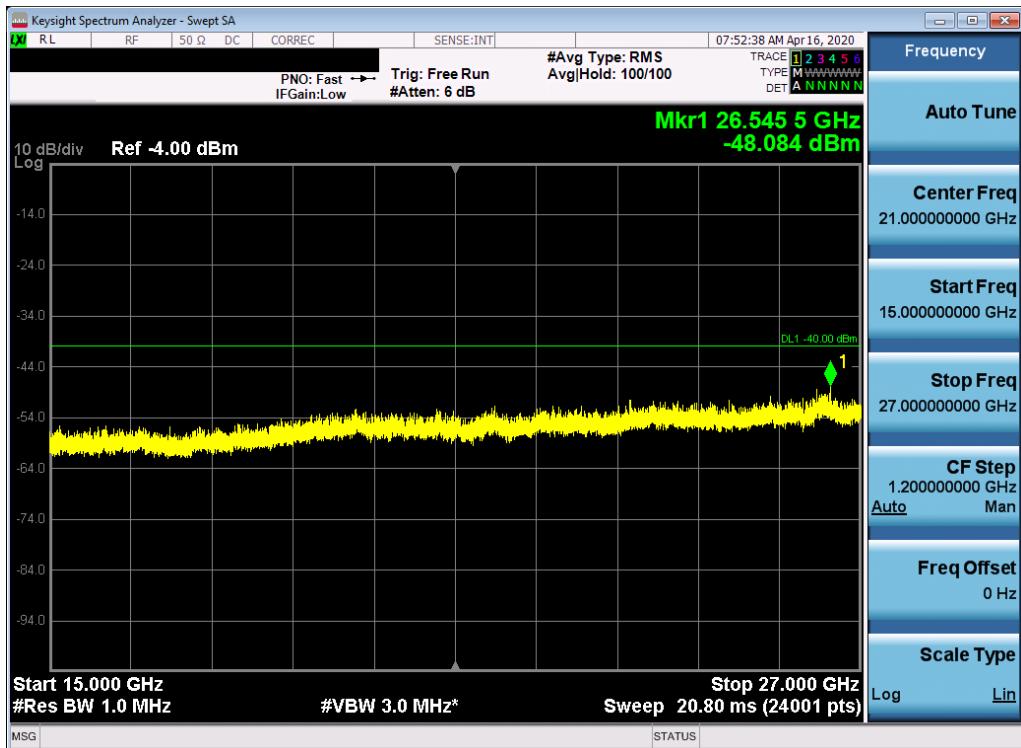


Plot 7-24. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)


FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 25 of 97

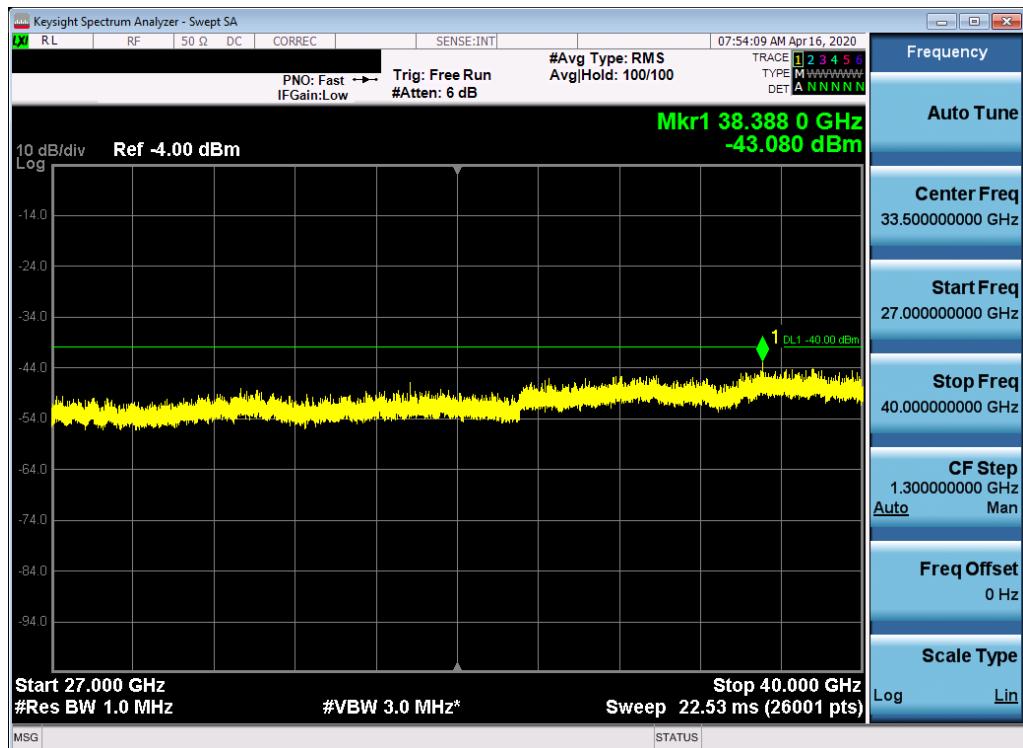


Plot 7-25. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

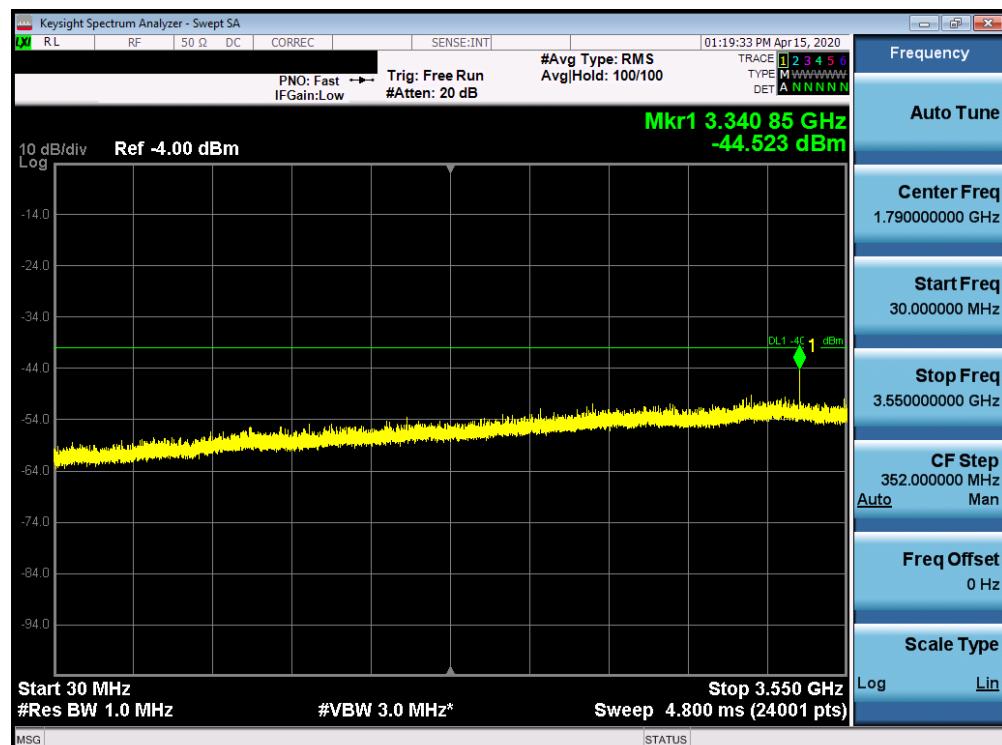


Plot 7-26. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 26 of 97

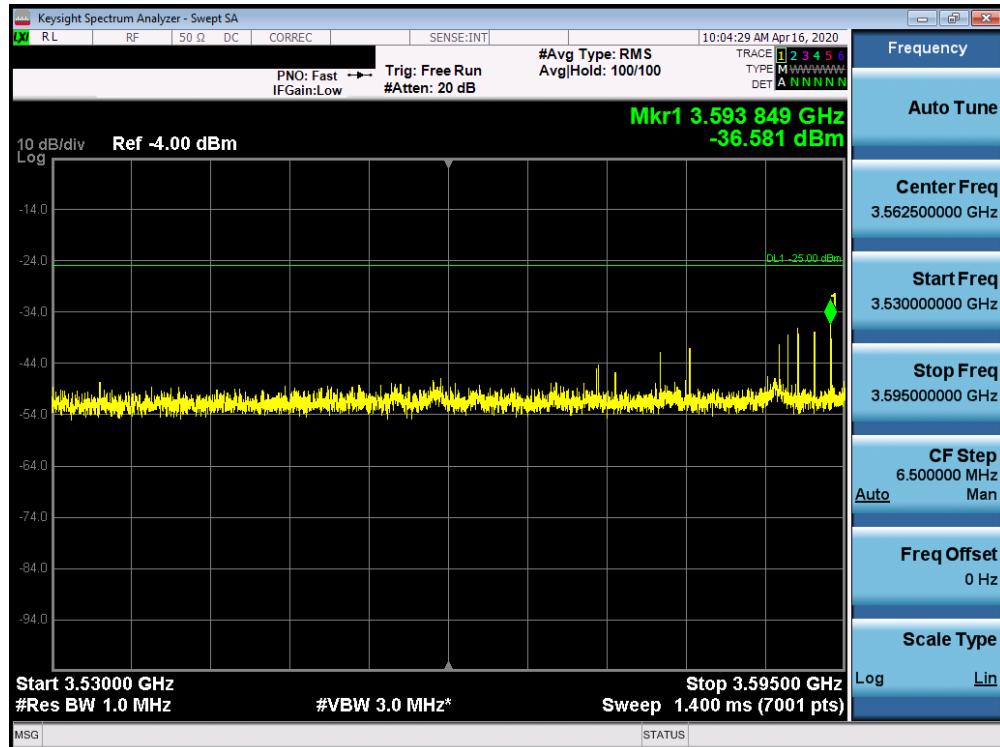


Plot 7-27. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

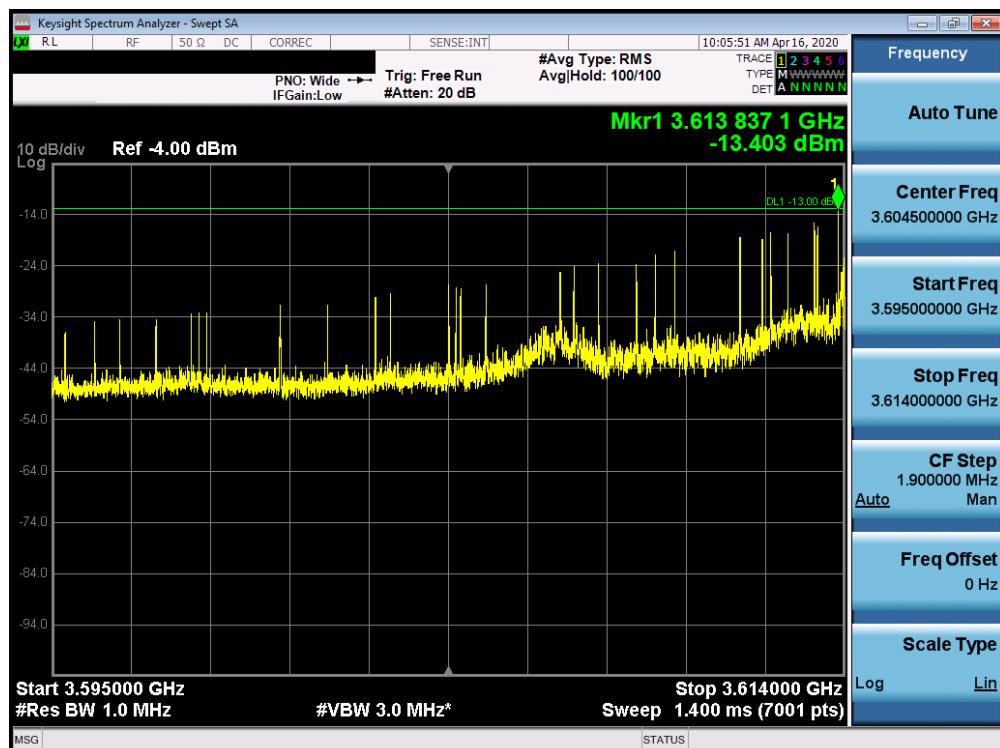


Plot 7-28. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 27 of 97

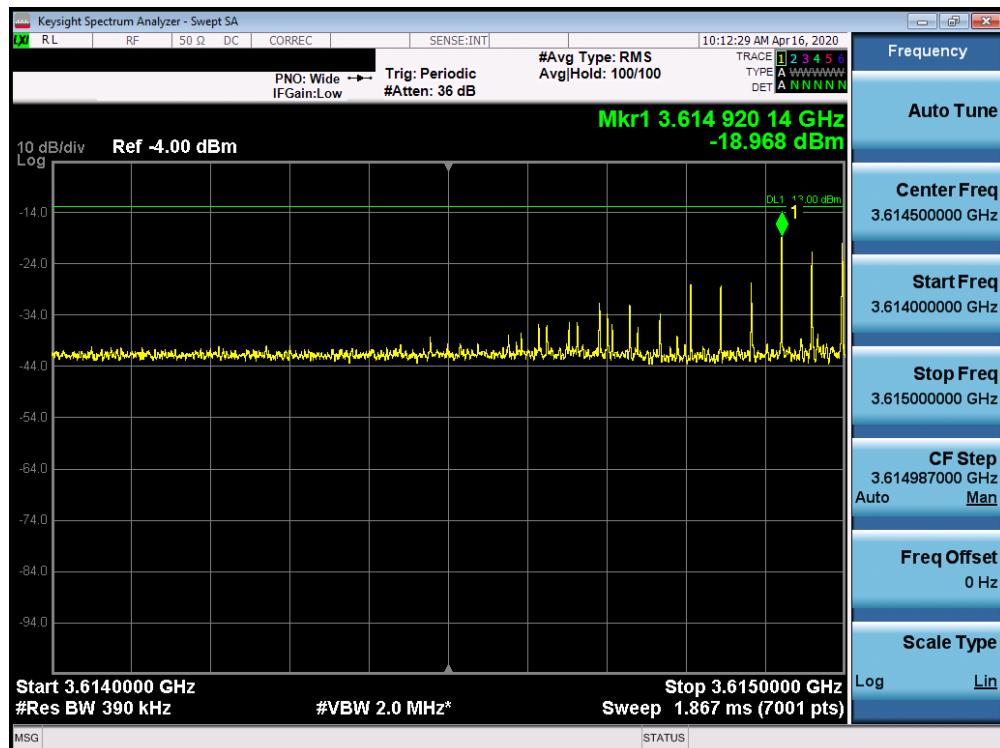


Plot 7-29. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

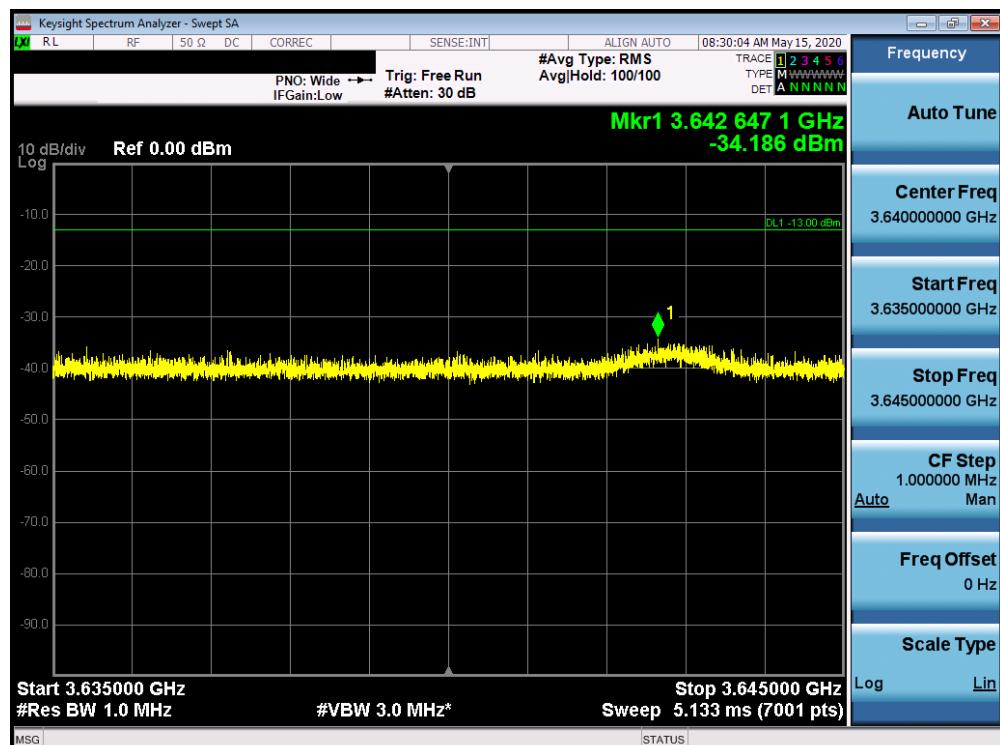


Plot 7-30. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310503-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 28 of 97

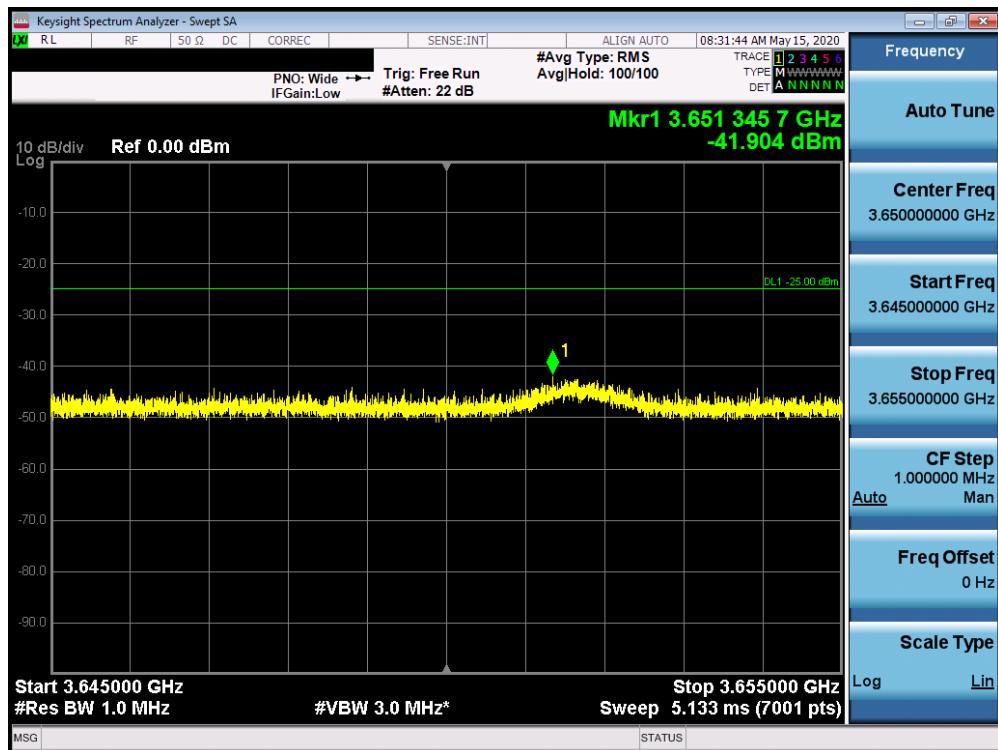


Plot 7-31. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

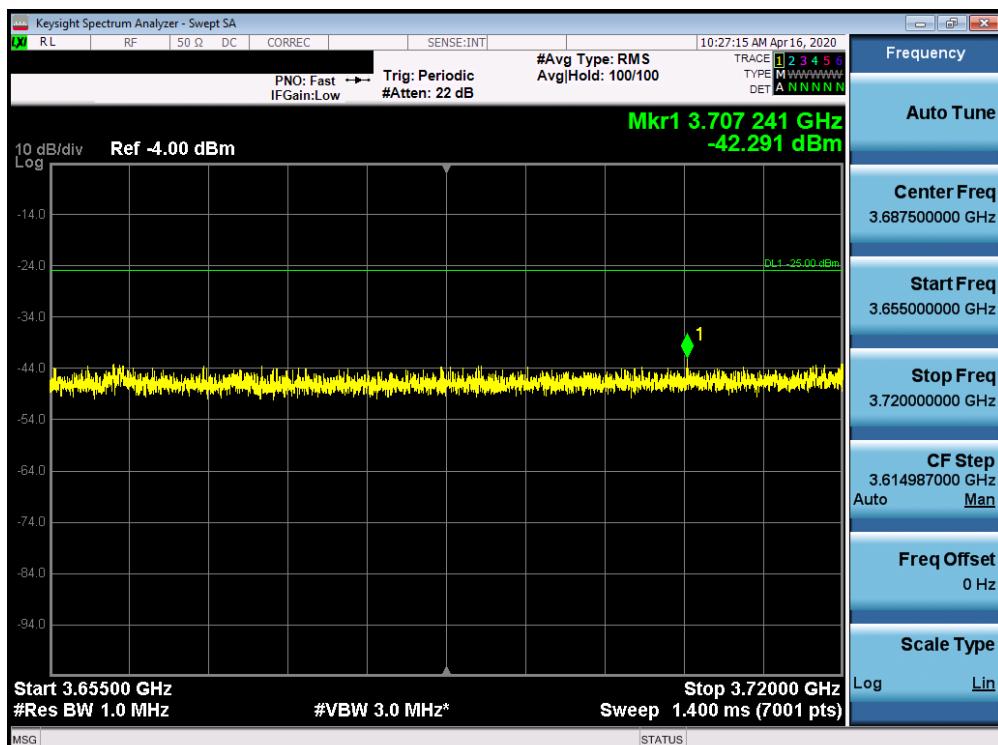


Plot 7-32. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 29 of 97

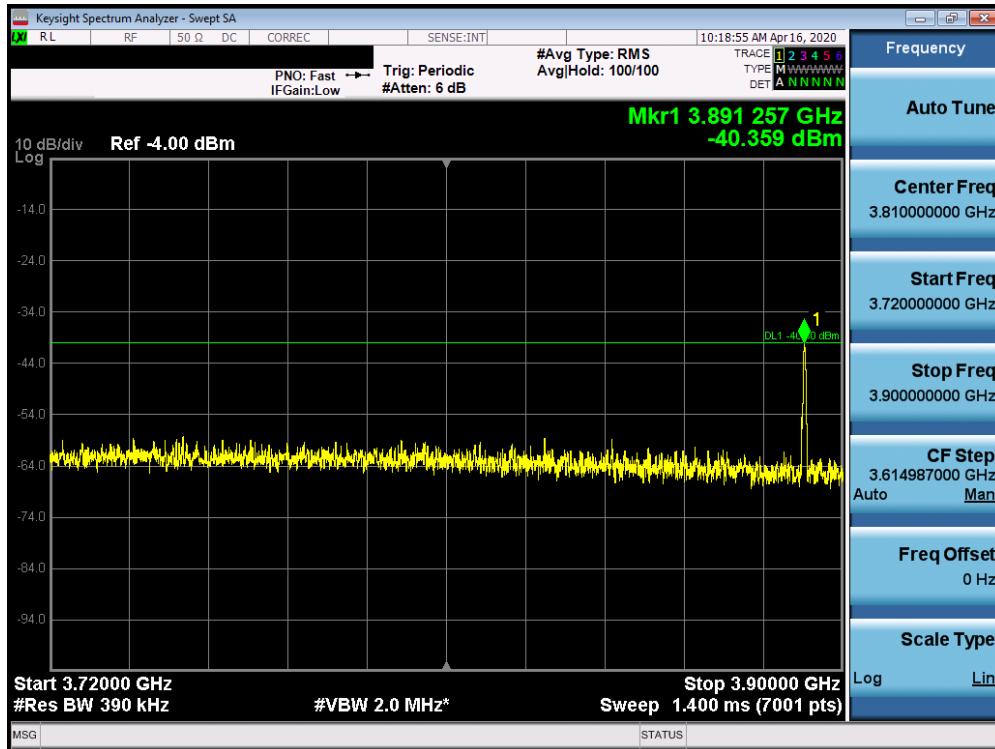


Plot 7-33. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

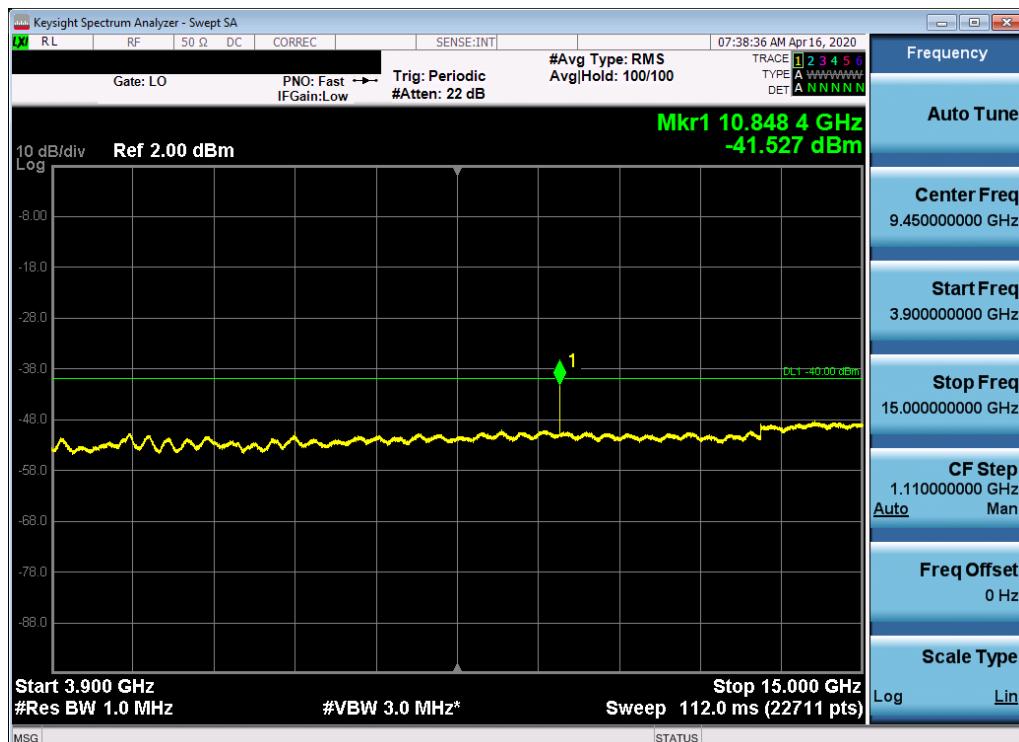


Plot 7-34. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: XIA-CFW2132	 PCTEST® Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 30 of 97

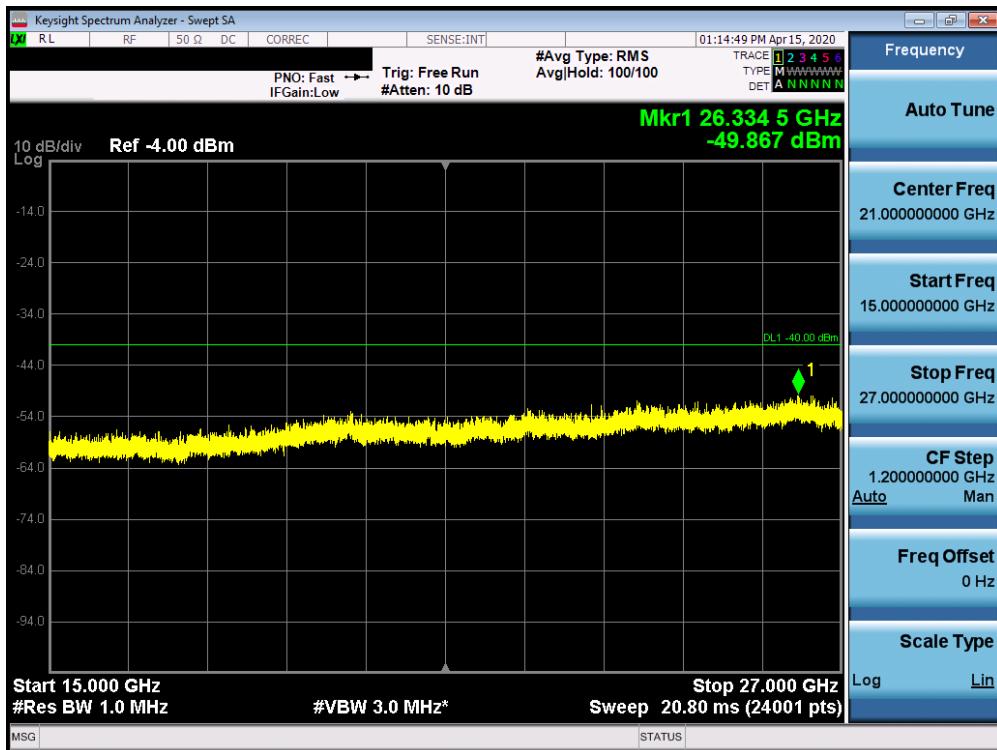


Plot 7-35. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

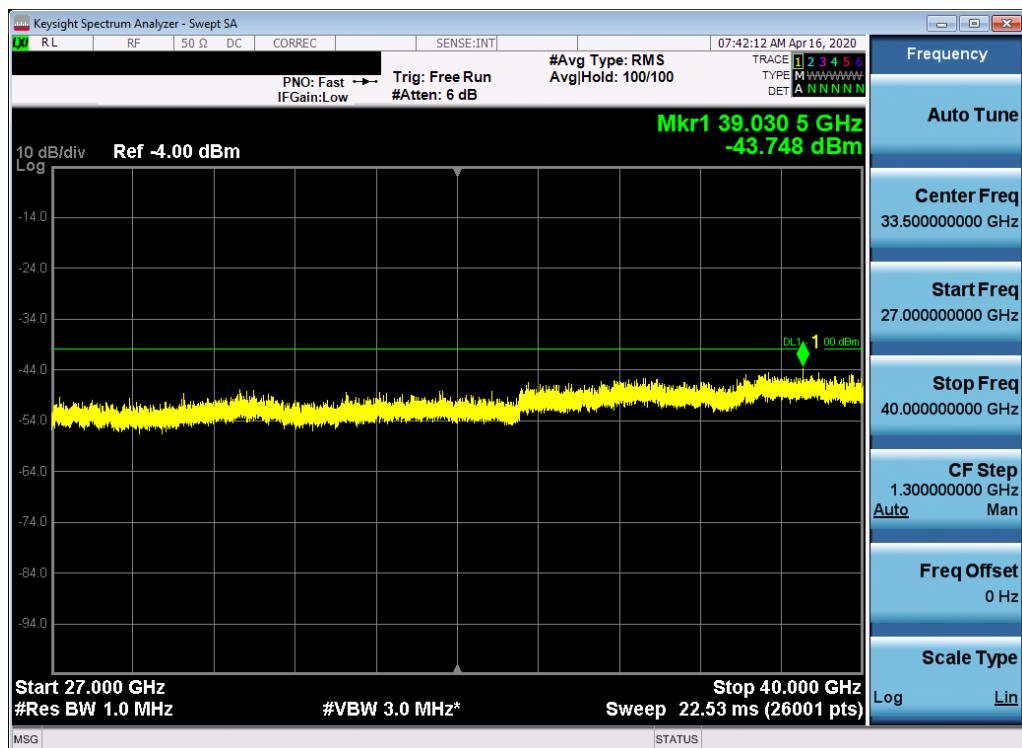


Plot 7-36. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 31 of 97

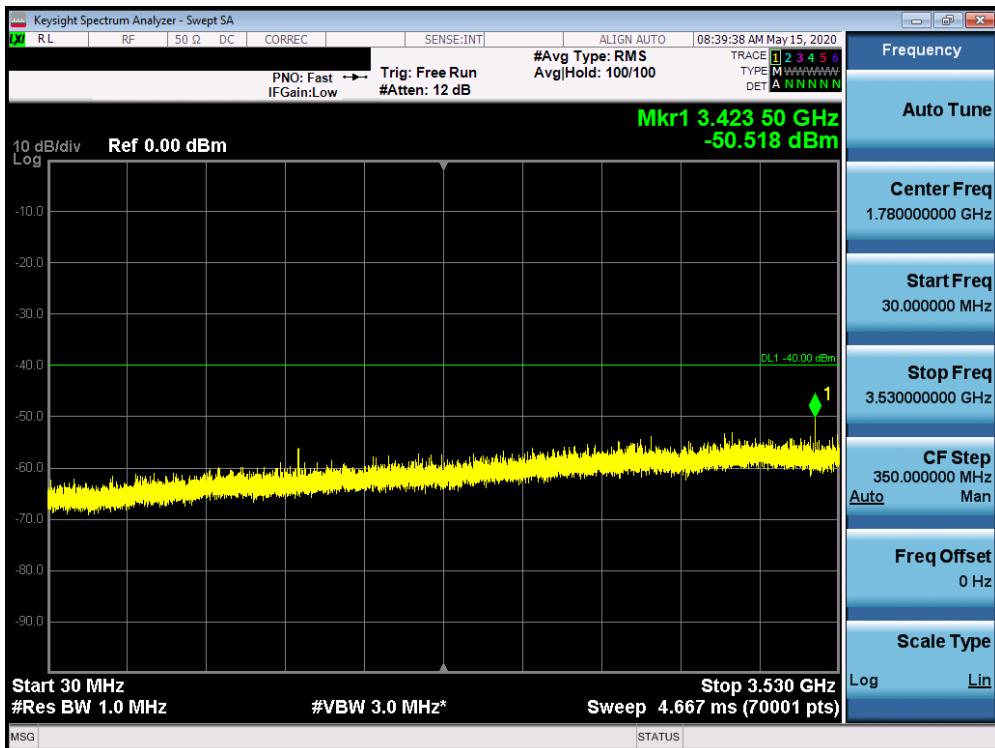


Plot 7-37. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

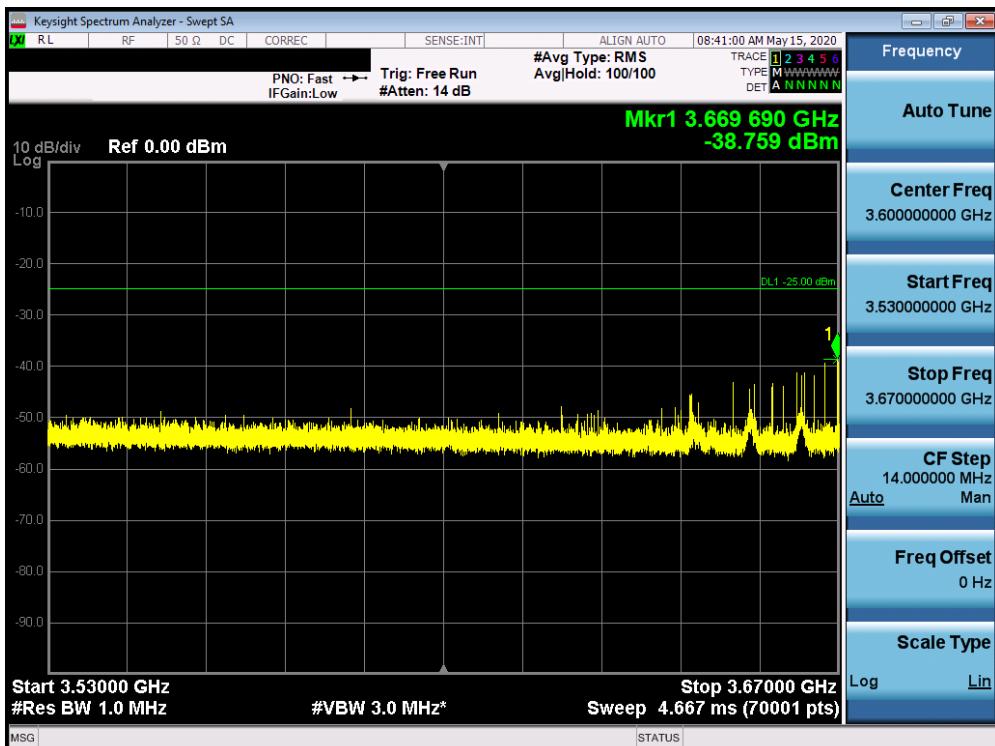


Plot 7-38. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 32 of 97

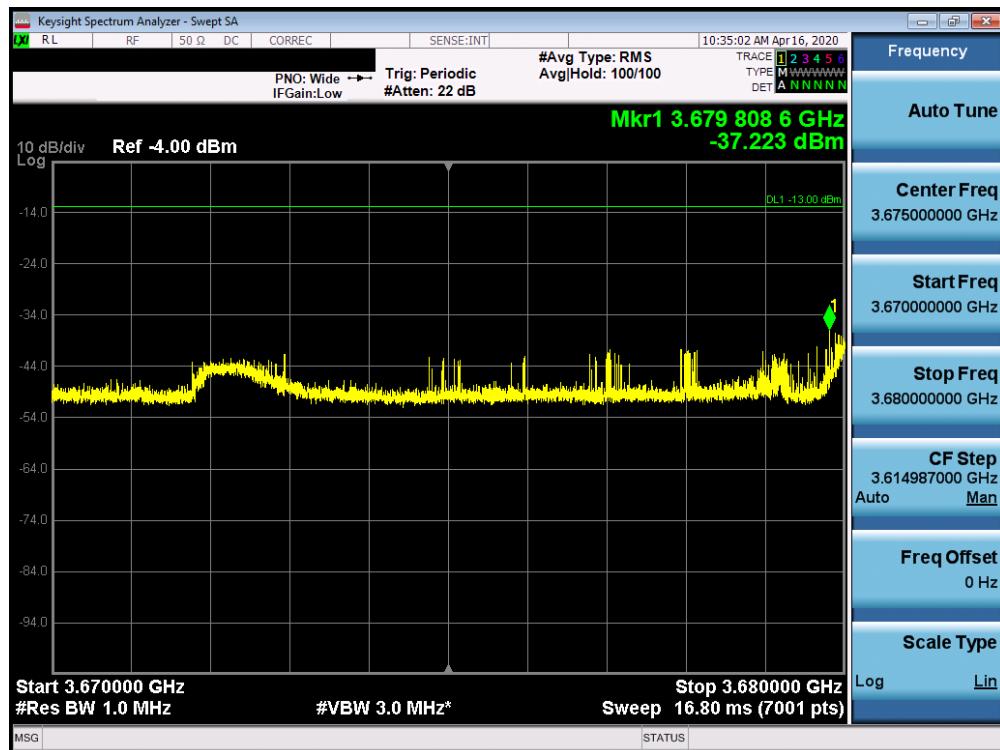


Plot 7-39. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

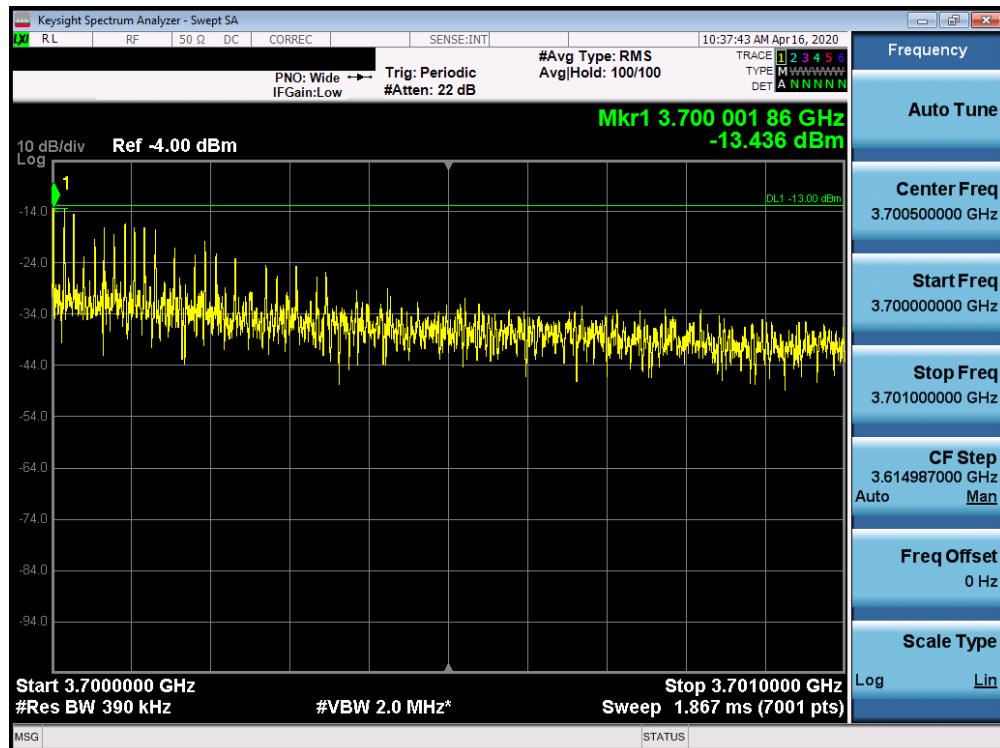


Plot 7-40. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 33 of 97

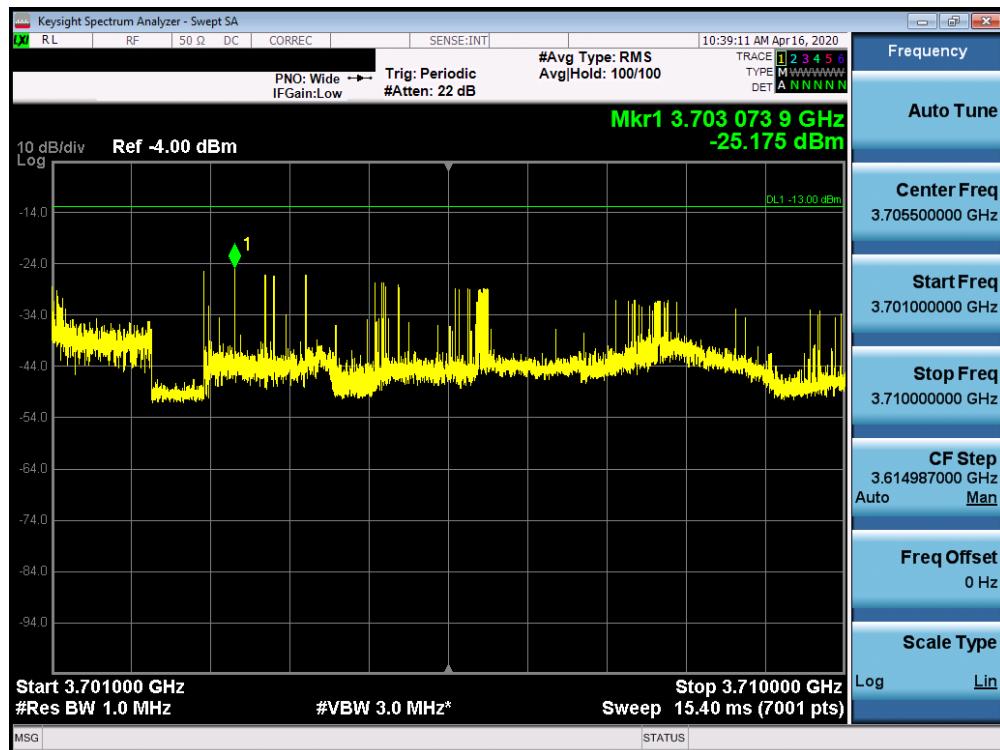


Plot 7-41. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

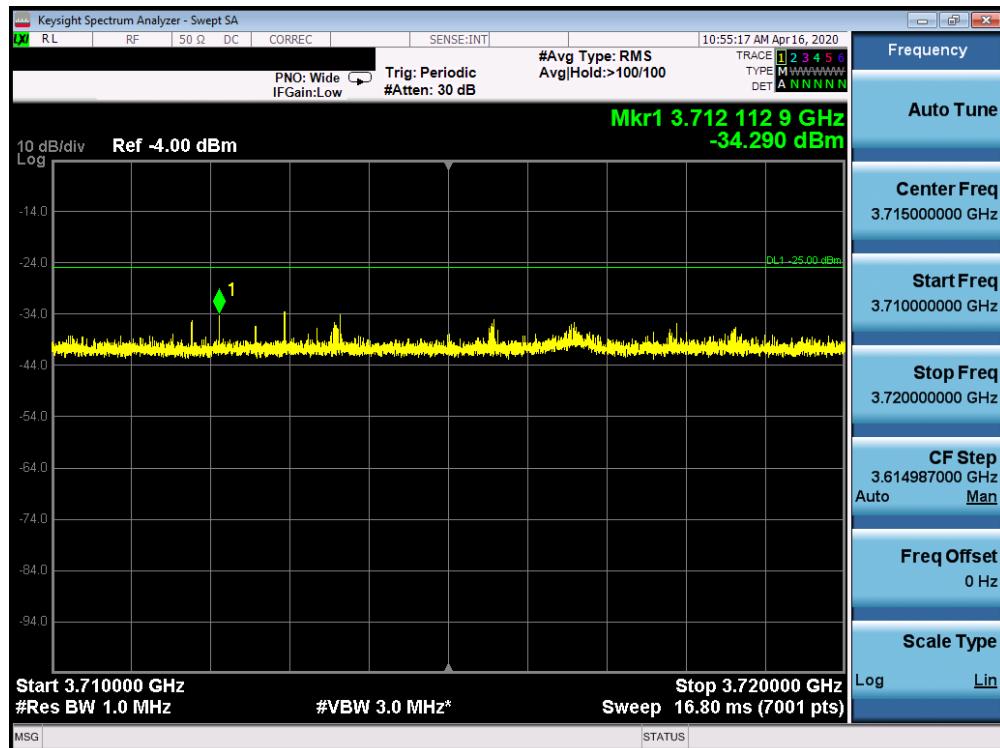


Plot 7-42. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 34 of 97

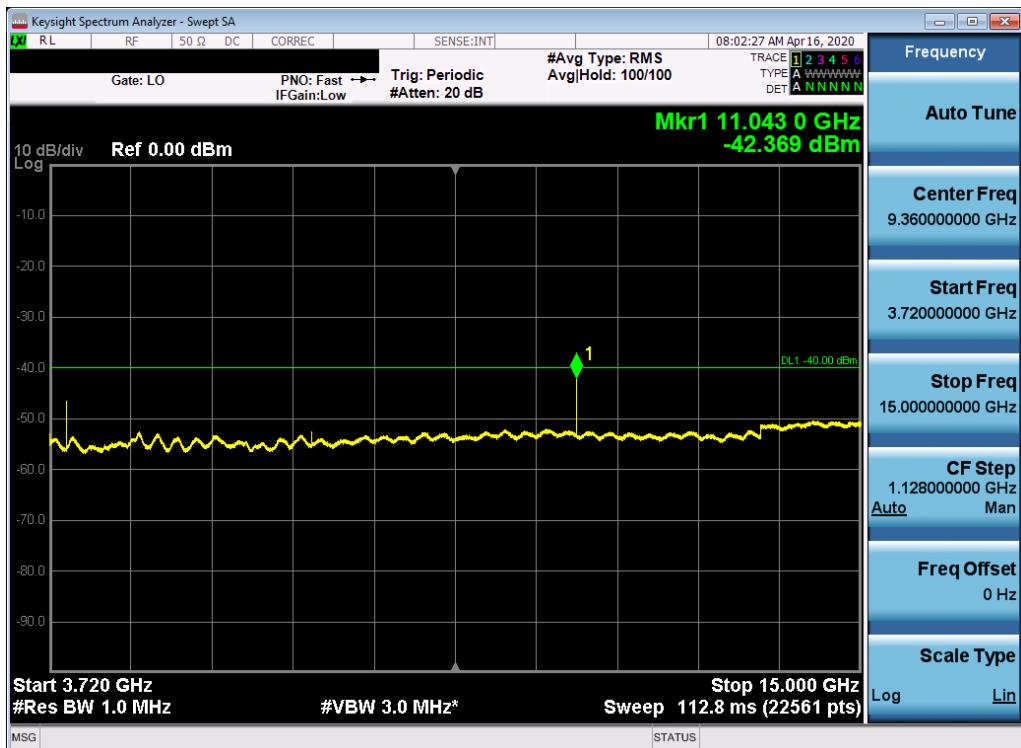


Plot 7-43. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

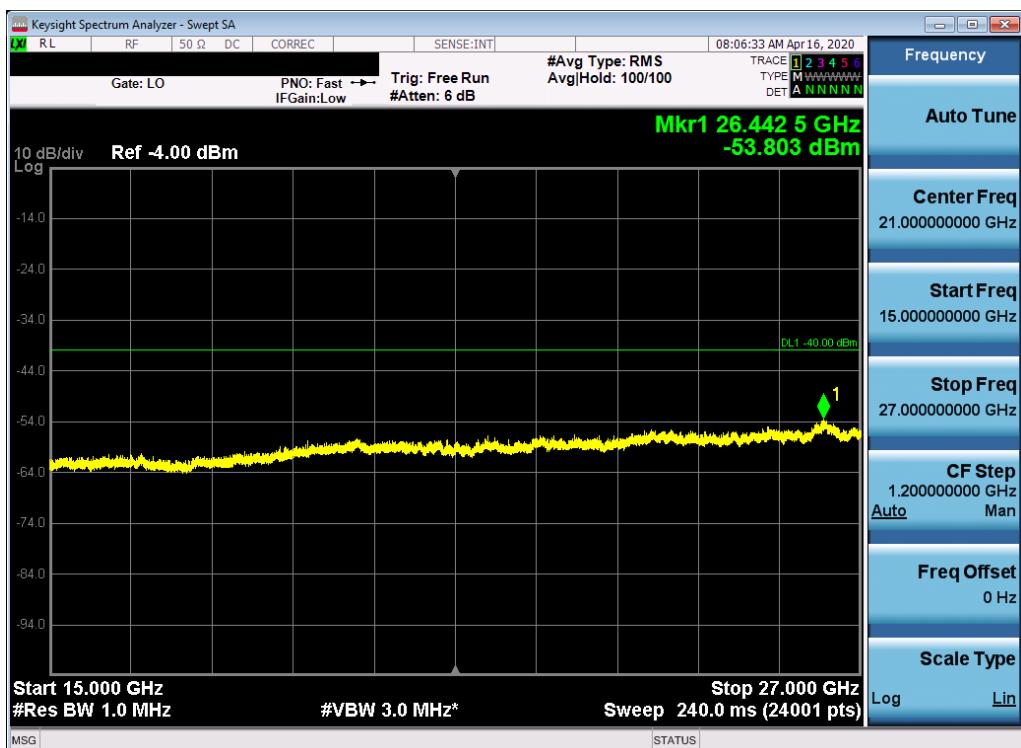

Plot 7-44. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 35 of 97

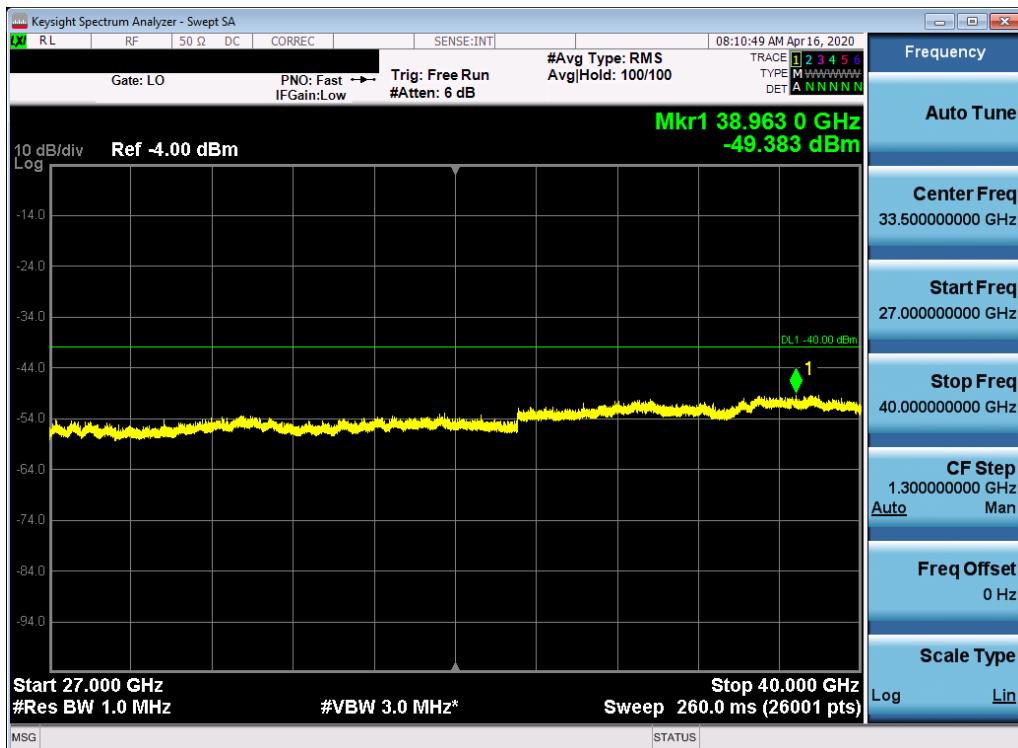

Plot 7-45. Conducted Spurious Plot (Band 48 - 20.0MHz QPSK - RB Size 1, RB Offset 99 - High Channel)

FCC ID: XIA-CFW2132	 PCTEST[®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router			Page 36 of 97

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §96.41(e)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

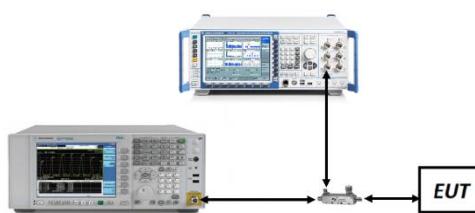


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

N/A


FCC ID: XIA-CFW2132	PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 37 of 97

© 2020 PCTEST


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0 12/17/2018

Band 48

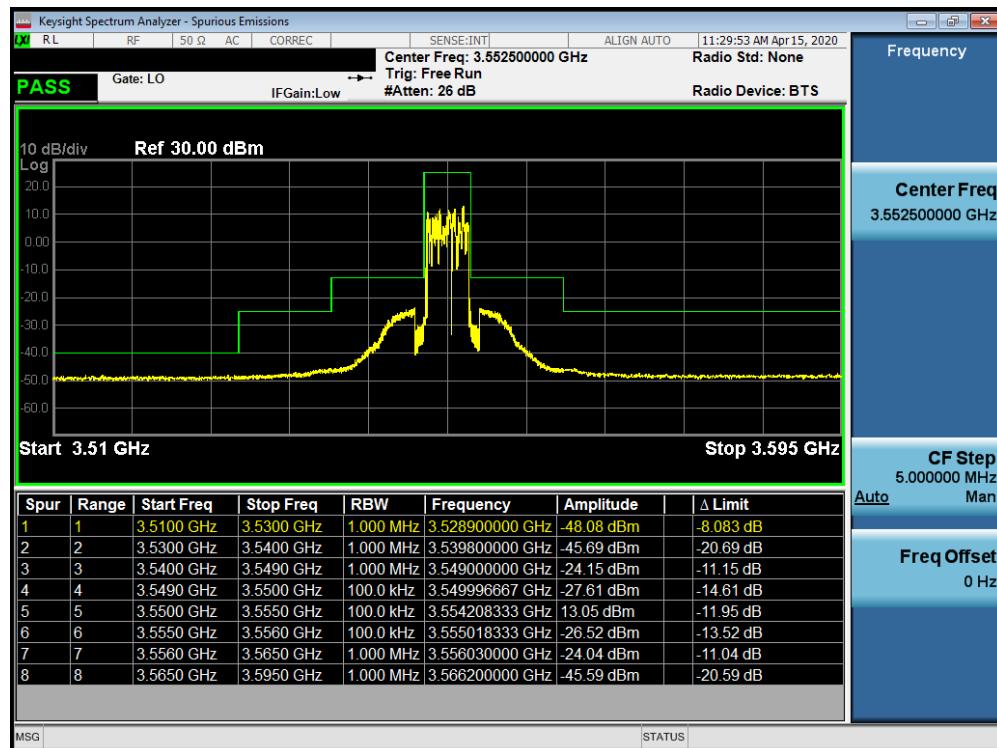


Plot 7-46. Lower Channel Edge Plot (Band 48 - 5.0MHz QPSK - Full RB Configuration)

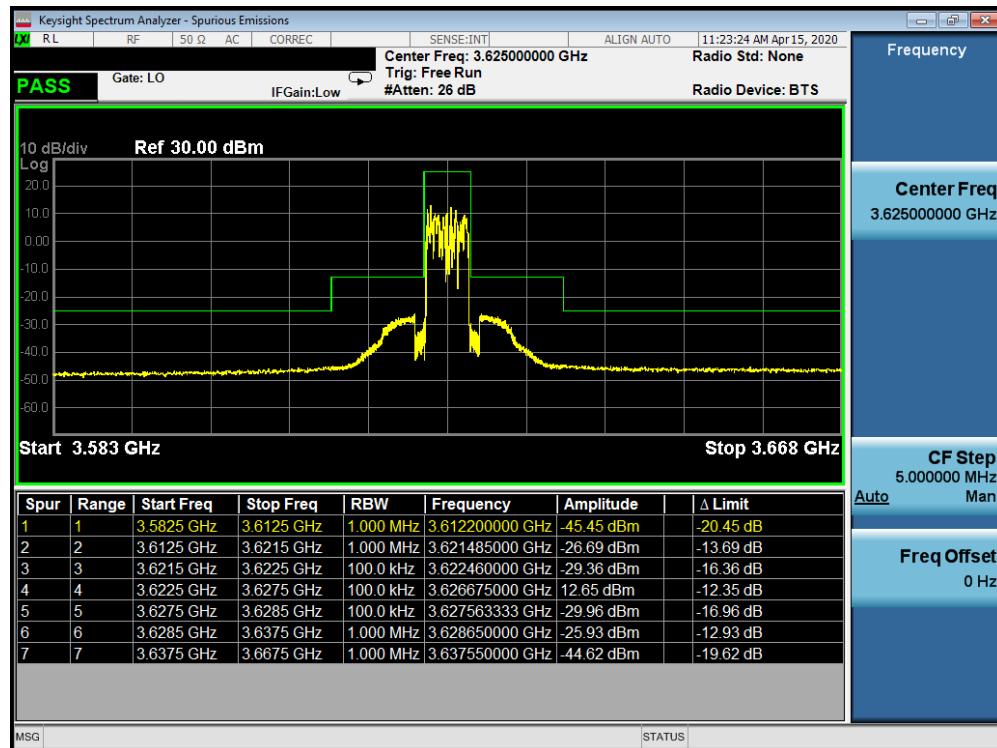


Plot 7-47. Mid Channel Edge Plot (Band 48 - 5.0MHz QPSK - Full RB Configuration)


FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 38 of 97

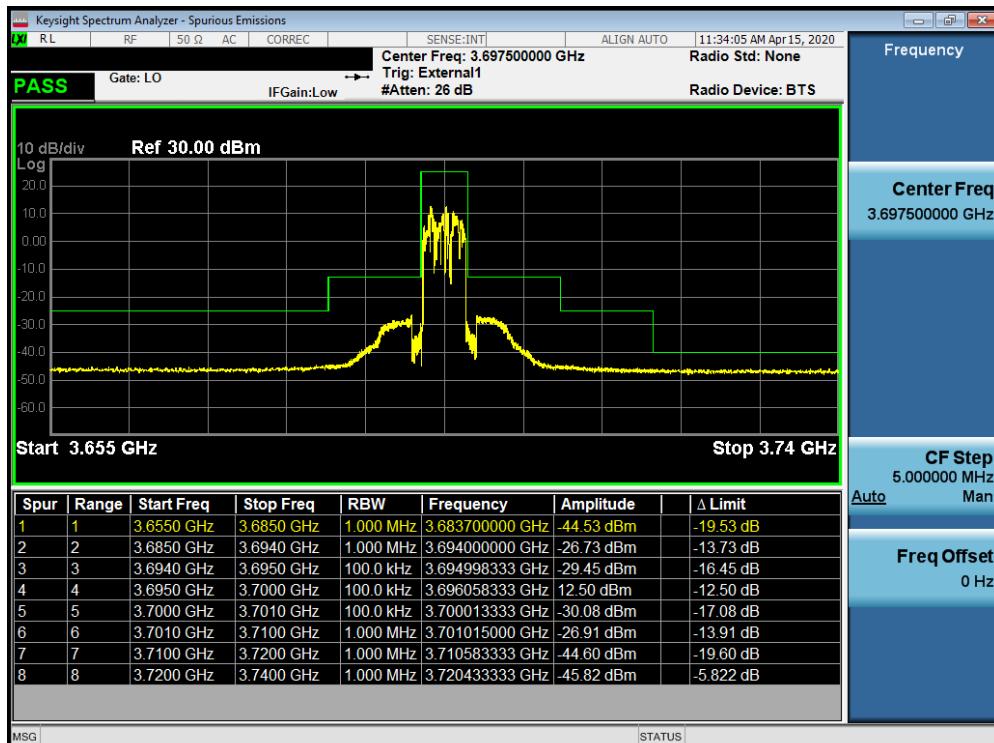


Plot 7-48. Upper Channel Edge Plot (Band 48 - 5.0MHz QPSK - Full RB Configuration)

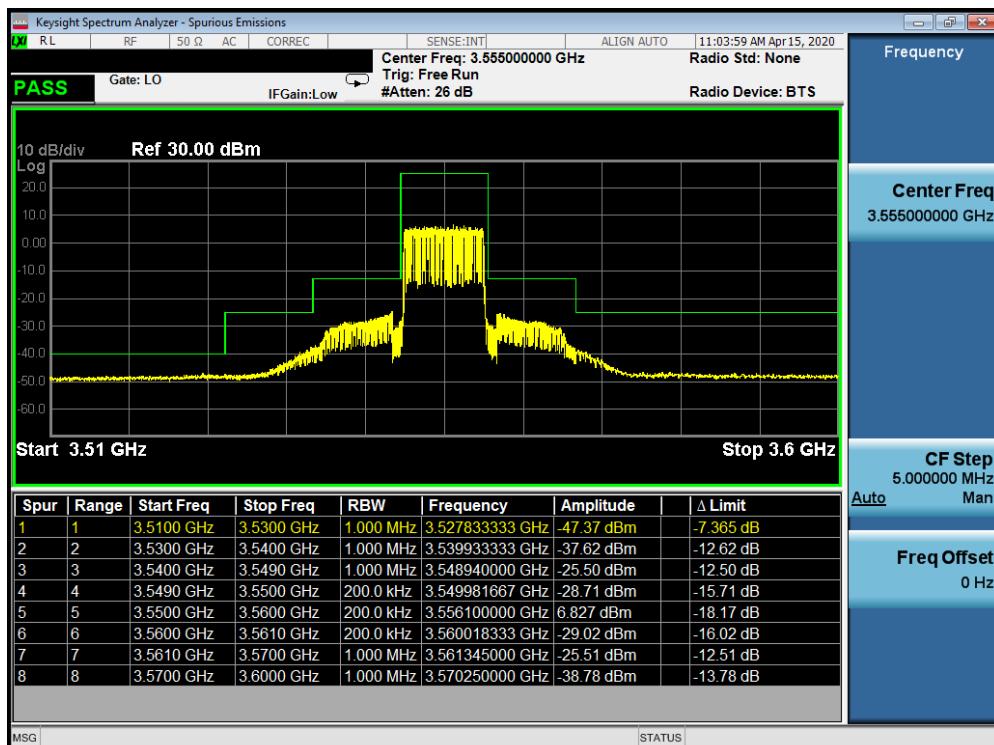


Plot 7-49. Lower Channel Edge Plot (Band 48 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: NetCommWireless Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 39 of 97

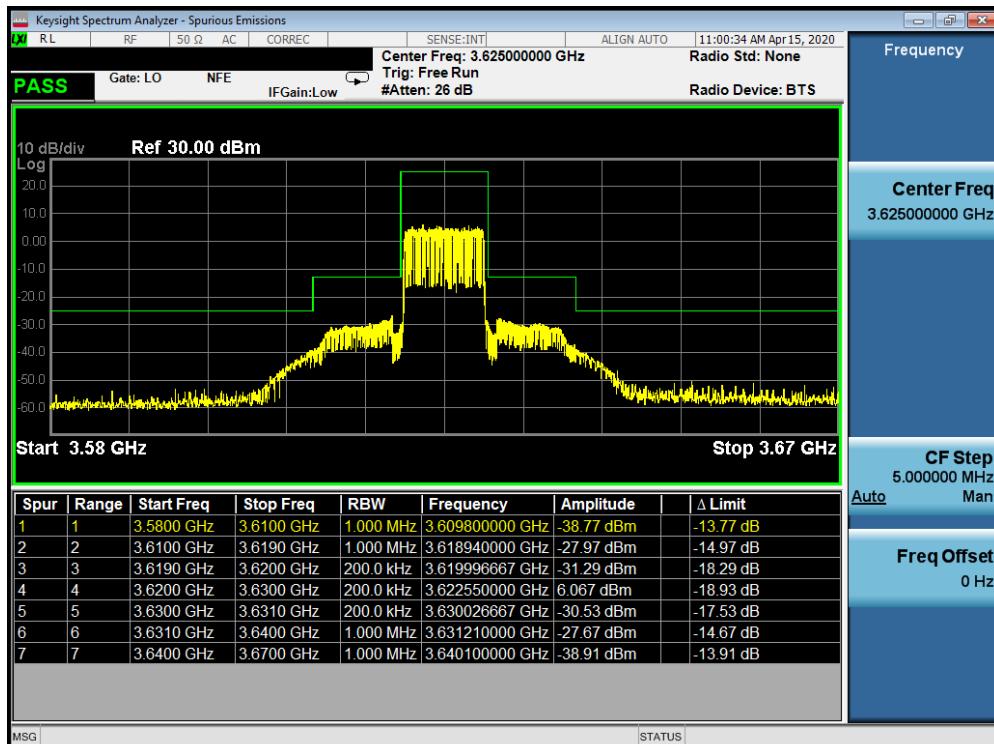


Plot 7-50. Mid Channel Edge Plot (Band 48 - 10.0MHz QPSK - Full RB Configuration)

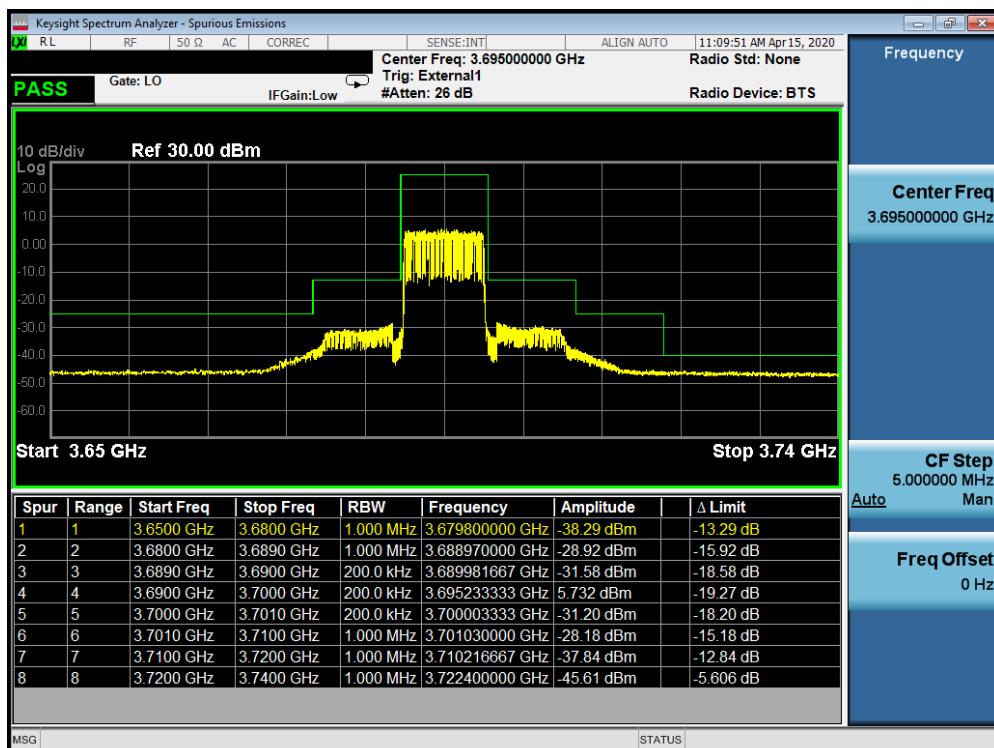


Plot 7-51. Upper Channel Edge Plot (Band 48 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: XIA-CFW2132	 PCTEST[®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 40 of 97

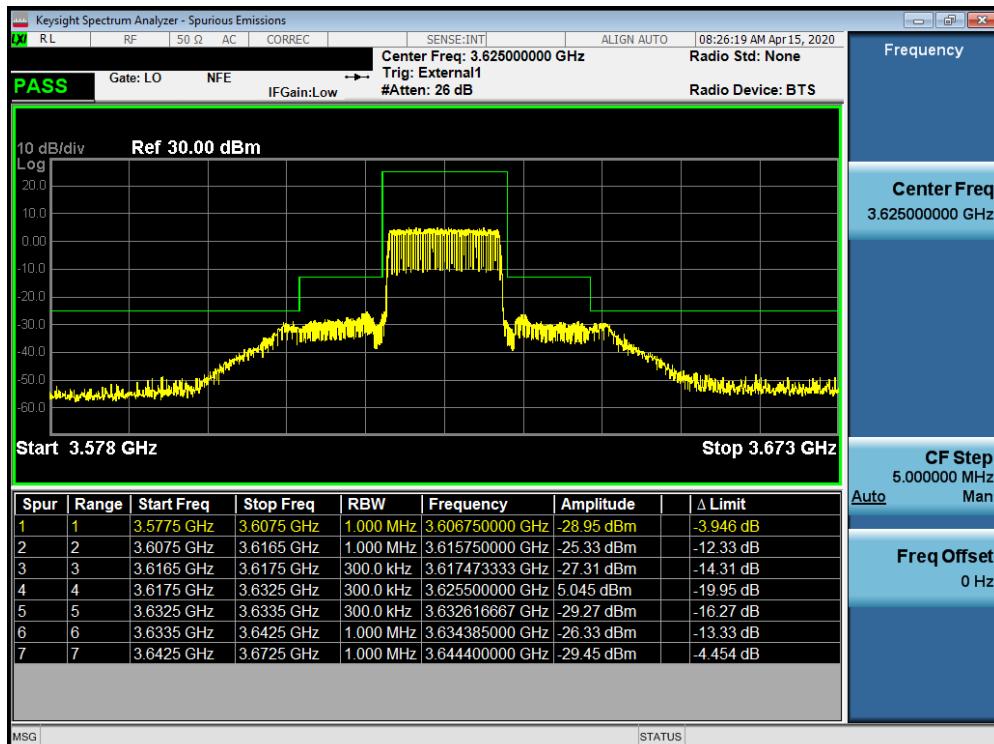


Plot 7-52. Lower Channel Edge Plot (Band 48 - 15.0MHz QPSK - Full RB Configuration)

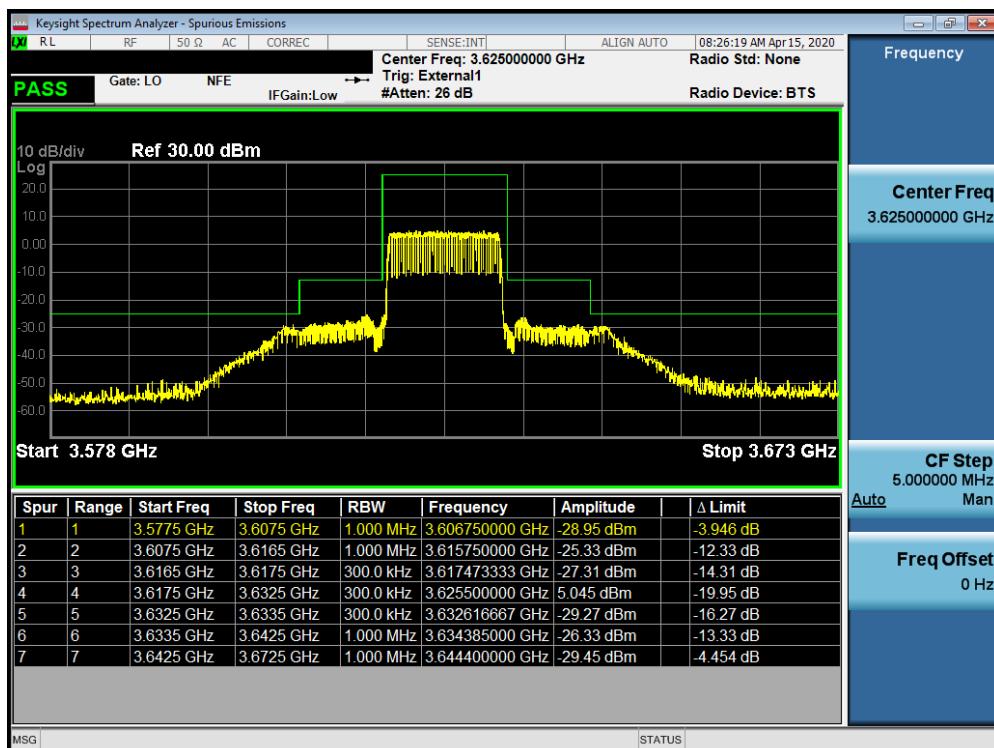


Plot 7-53. Mid Channel Edge Plot (Band 48 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310503-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 41 of 97

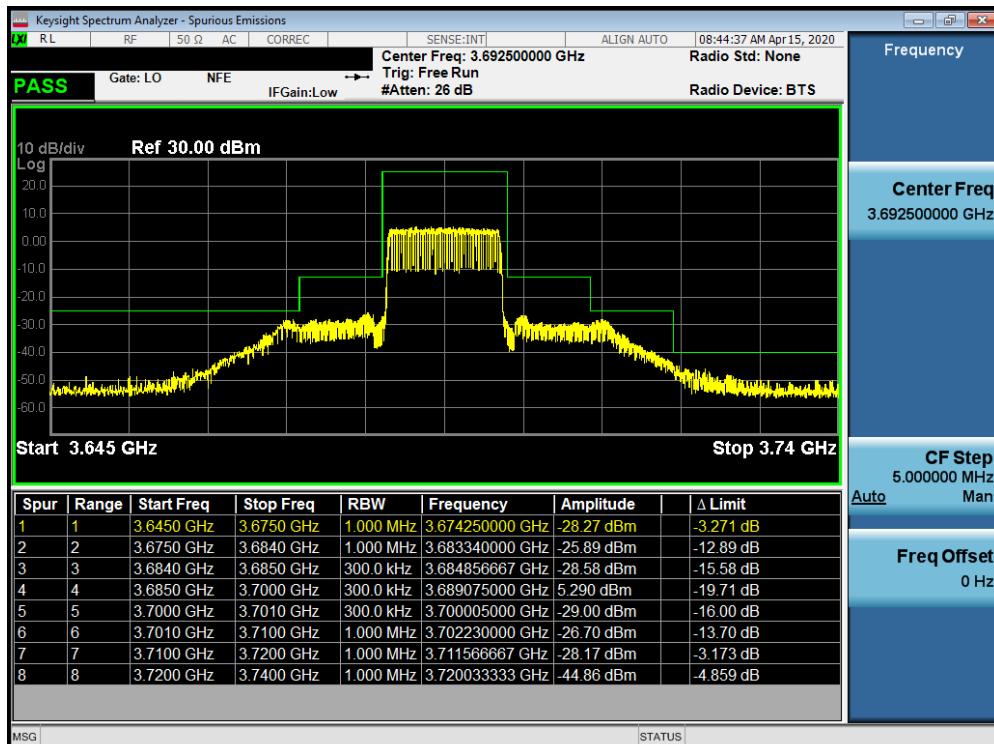


Plot 7-54. Upper Channel Edge Plot (Band 48 - 15.0MHz QPSK - Full RB Configuration)

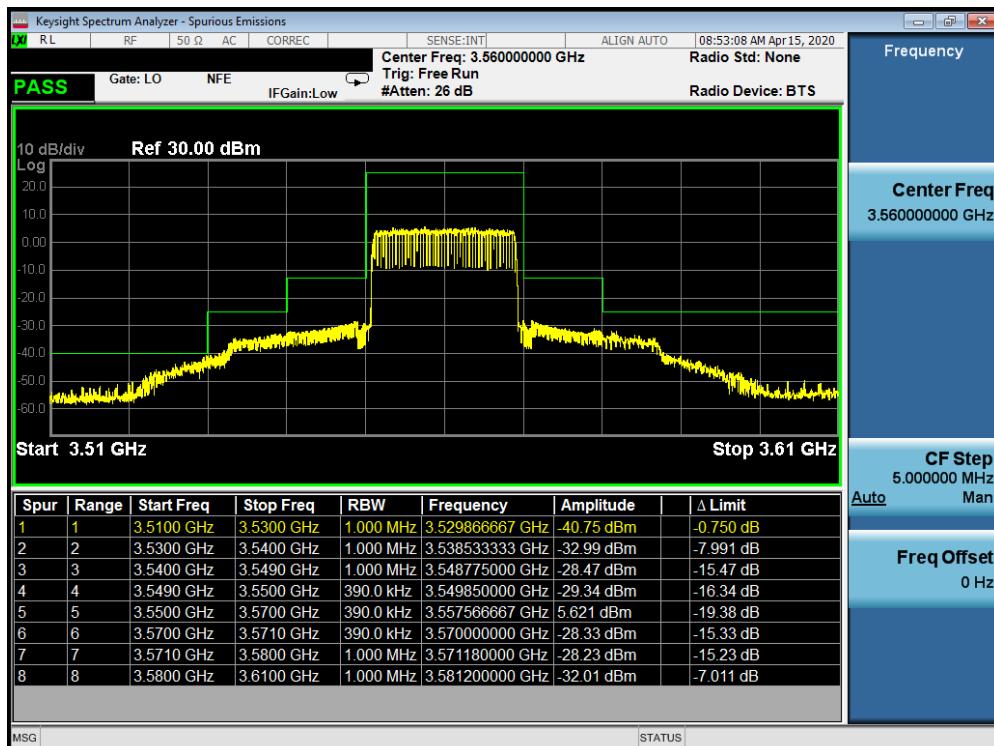


Plot 7-55. Lower Channel Edge Plot (Band 48 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 42 of 97

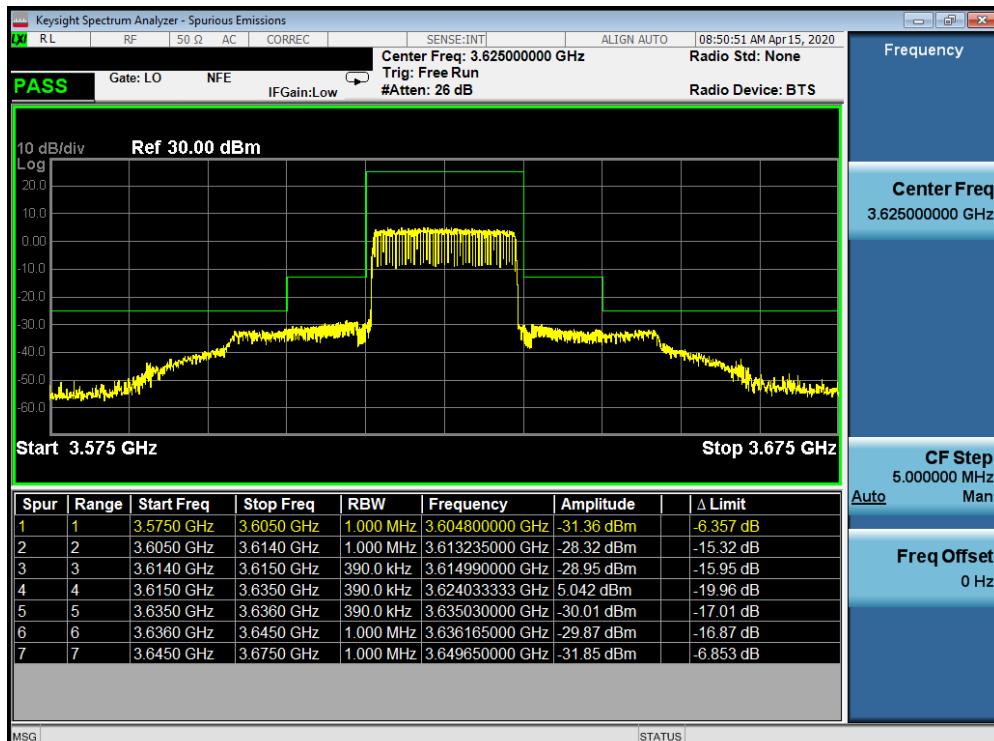

Plot 7-56. Mid Channel Edge Plot (Band 48 - 20.0MHz QPSK - Full RB Configuration)

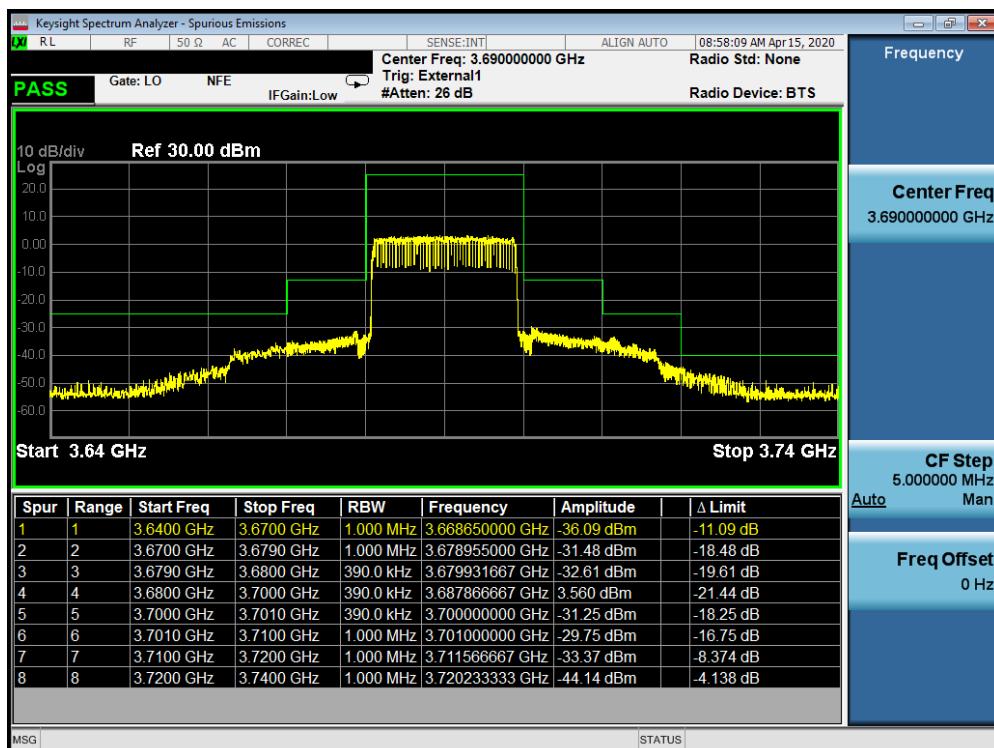

Plot 7-57. Upper Channel Edge Plot (Band 48 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 43 of 97

7.5 Peak Power Spectral Density Measurement

§96.41(b)

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 37 dBm in any 1 MHz band.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.2.2

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Analyzer was set to center frequency of the B48 Channel.
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = Average (RMS) and Trace mode = Clear write
5. Sweep time = 1 second.
6. Number of points > 2*Span/RBW
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

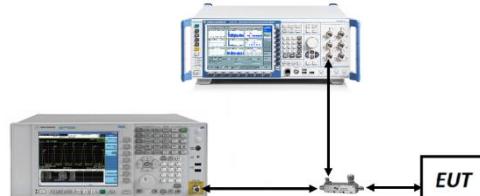


Figure 7-4. Test Instrument & Measurement Setup

Test Notes


1. Antenna Gains (dBi) are provided by the client.

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router			Page 44 of 97


Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	RB Size/Offset	Conducted PSD [dbm/MHz]	Ant. Gain [dBi]	PSD [dBm/MHz]	PSD Limit [Watts/MHz]	PSD Limit [dBm]	Margin [dB]
3552.50	5	QPSK	1/0	18.88	17.50	36.38	4.345	37.00	-0.62
3625.00	5	QPSK	1/0	18.53	17.50	36.03	4.009	37.00	-0.97
3697.50	5	QPSK	1/0	18.78	17.50	36.28	4.246	37.00	-0.72
3552.50	5	16-QAM	1/0	19.48	17.50	36.98	4.989	37.00	-0.02
3625.00	5	16-QAM	1/0	19.26	17.50	36.76	4.742	37.00	-0.24
3697.50	5	16-QAM	1/0	19.35	17.50	36.85	4.842	37.00	-0.15
3552.50	5	64-QAM	1/0	19.23	17.50	36.73	4.710	37.00	-0.27
3625.00	5	64-QAM	1/0	19.15	17.50	36.65	4.624	37.00	-0.35
3697.50	5	64-QAM	1/0	19.38	17.50	36.88	4.875	37.00	-0.12
3555.00	10	QPSK	1/0	19.05	17.50	36.55	4.519	37.00	-0.45
3625.00	10	QPSK	1/0	18.72	17.50	36.22	4.188	37.00	-0.78
3695.00	10	QPSK	1/0	18.82	17.50	36.32	4.285	37.00	-0.68
3555.00	10	16-QAM	1/0	19.43	17.50	36.93	4.932	37.00	-0.07
3625.00	10	16-QAM	1/0	18.99	17.50	36.49	4.457	37.00	-0.51
3695.00	10	16-QAM	1/0	19.17	17.50	36.67	4.645	37.00	-0.33
3555.00	10	64-QAM	1/0	19.49	17.50	36.99	5.000	37.00	-0.01
3625.00	10	64-QAM	1/0	19.09	17.50	36.59	4.560	37.00	-0.41
3695.00	10	64-QAM	1/0	19.24	17.50	36.74	4.721	37.00	-0.26
3557.50	15	QPSK	1/0	19.13	17.50	36.63	4.603	37.00	-0.37
3625.00	15	QPSK	1/0	18.85	17.50	36.35	4.315	37.00	-0.65
3692.50	15	QPSK	1/0	18.89	17.50	36.39	4.355	37.00	-0.61
3557.50	15	16-QAM	1/0	19.45	17.50	36.95	4.955	37.00	-0.05
3625.00	15	16-QAM	1/0	19.26	17.50	36.76	4.742	37.00	-0.24
3692.50	15	16-QAM	1/0	19.31	17.50	36.81	4.797	37.00	-0.19
3557.50	15	64-QAM	1/0	19.44	17.50	36.94	4.943	37.00	-0.06
3625.00	15	64-QAM	1/0	19.34	17.50	36.84	4.831	37.00	-0.16
3692.50	15	64-QAM	1/0	19.40	17.50	36.90	4.898	37.00	-0.10
3560.00	20	QPSK	1/0	19.21	17.50	36.71	4.688	37.00	-0.29
3625.00	20	QPSK	1/0	18.86	17.50	36.36	4.325	37.00	-0.64
3690.00	20	QPSK	1/0	18.88	17.50	36.38	4.345	37.00	-0.62
3560.00	20	16-QAM	1/0	19.44	17.50	36.94	4.943	37.00	-0.06
3625.00	20	16-QAM	1/0	19.36	17.50	36.86	4.853	37.00	-0.14
3690.00	20	16-QAM	1/0	19.36	17.50	36.86	4.853	37.00	-0.14
3560.00	20	64-QAM	1/0	19.49	17.50	36.99	5.000	37.00	-0.01
3625.00	20	64-QAM	1/0	18.99	17.50	36.49	4.457	37.00	-0.51
3690.00	20	64-QAM	1/0	19.28	17.50	36.78	4.764	37.00	-0.22

Table 7-3. Peak Power Spectral Density (Band 48)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 45 of 97

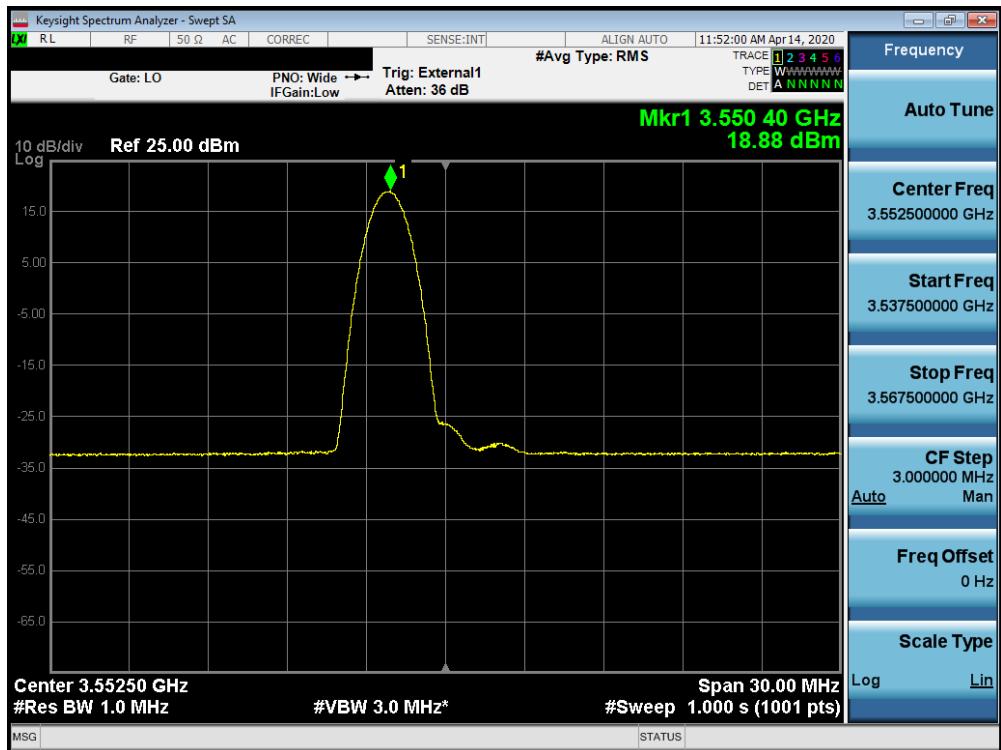


Plot 7-58. Peak Power Spectral Density Plot (B48 – 5.0MHz QPSK – Low Channel RB: 1 RB, Offset: 0)

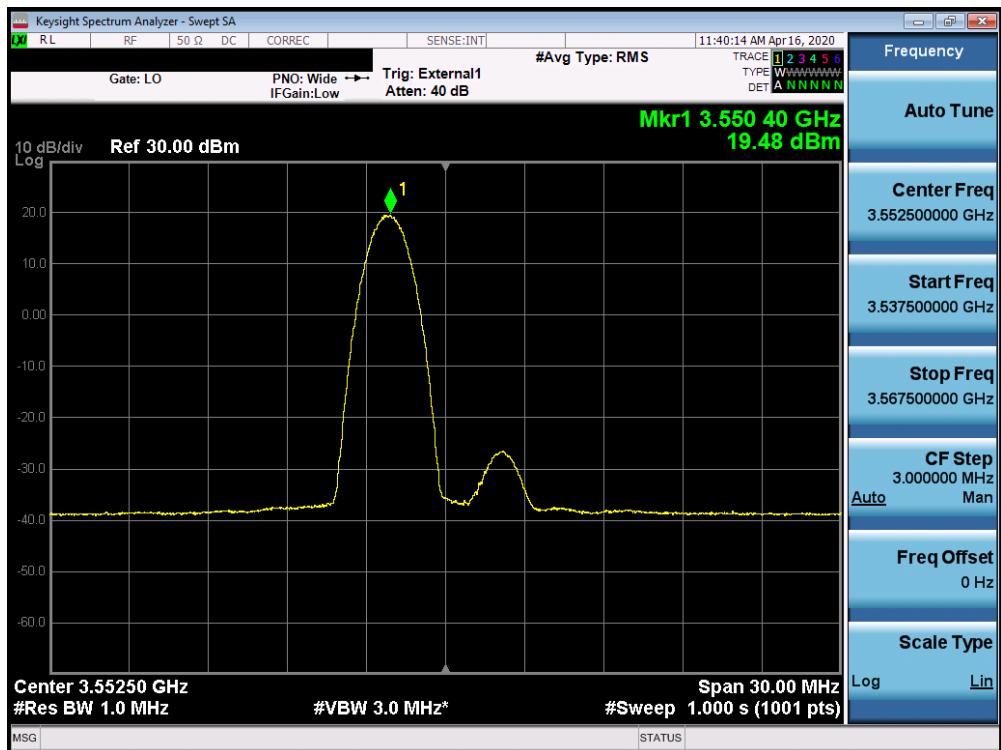


Plot 7-59. Peak Power Spectral Density Plot (B48 – 5.0MHz 16-QAM – Low Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 46 of 97

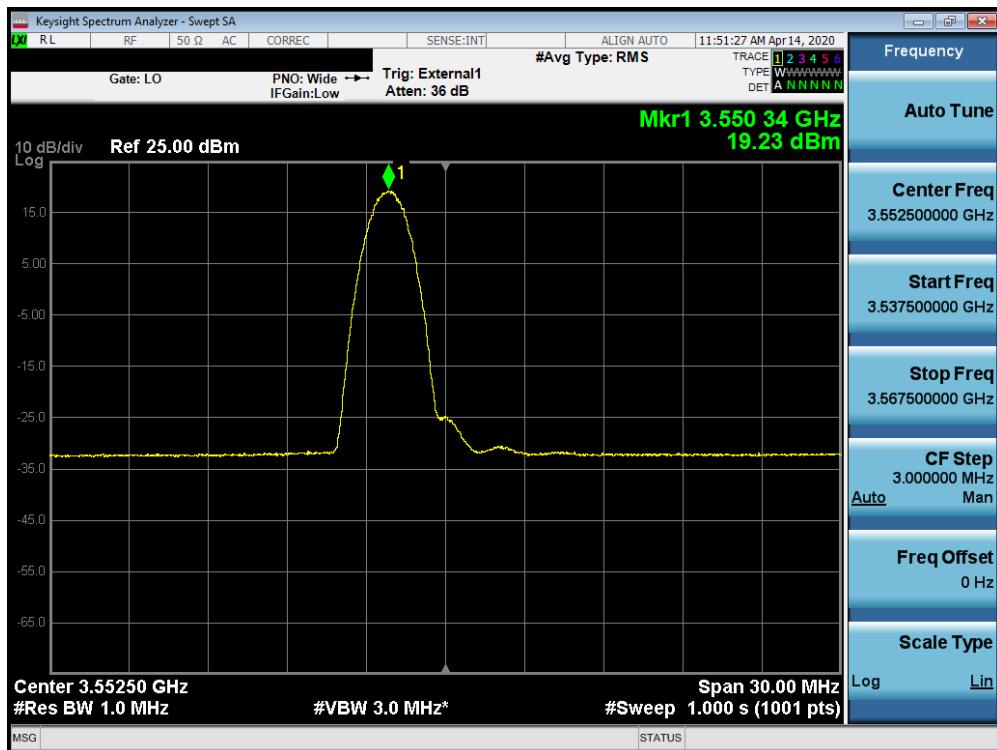


Plot 7-60. Peak Power Spectral Density Plot (B48 – 5.0MHz 64-QAM – Low Channel RB: 1 RB, Offset: 0)

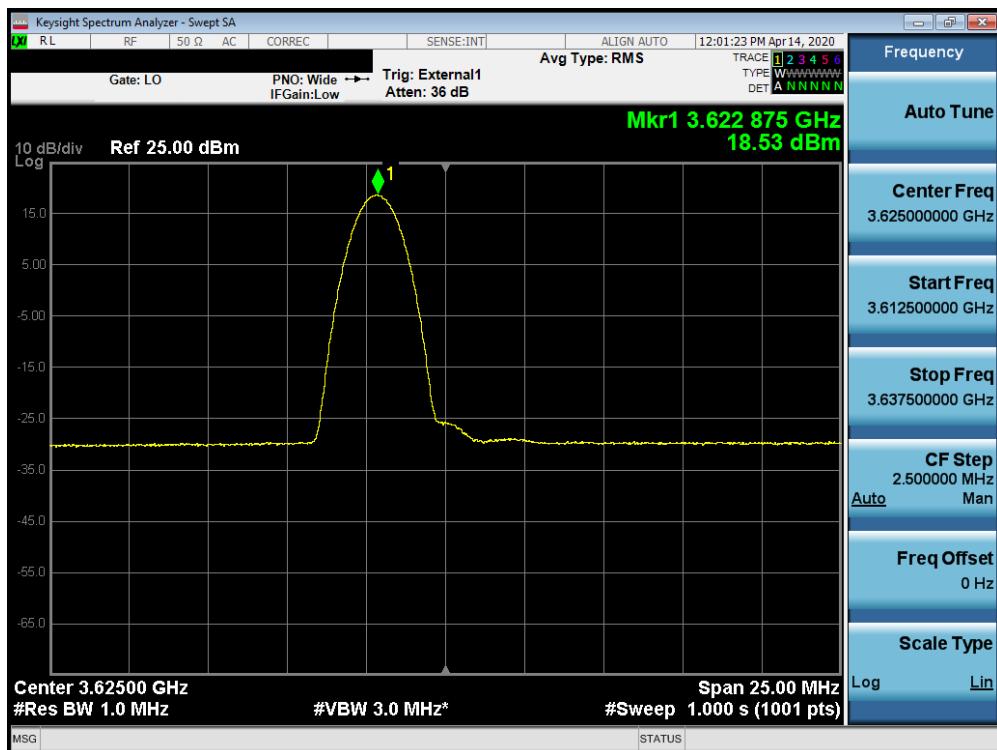


Plot 7-61. Peak Power Spectral Density Plot (B48 – 5.0MHz QPSK – Mid Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 47 of 97

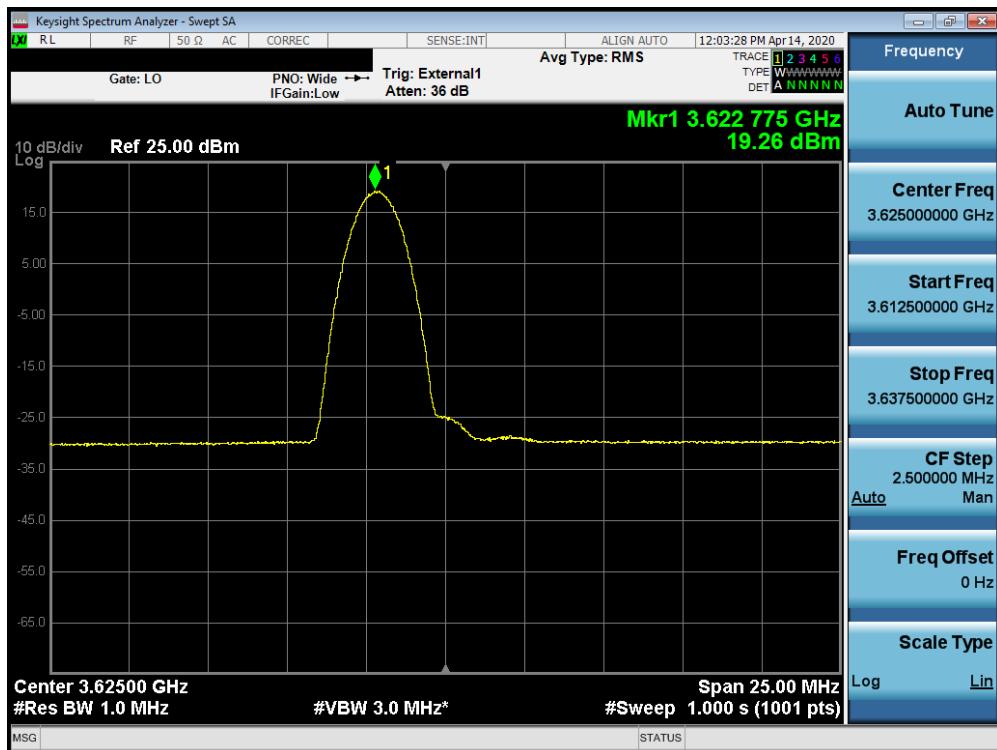


Plot 7-62. Peak Power Spectral Density Plot (B48 – 5.0MHz 16-QAM – Mid Channel RB: 1 RB, Offset: 0)

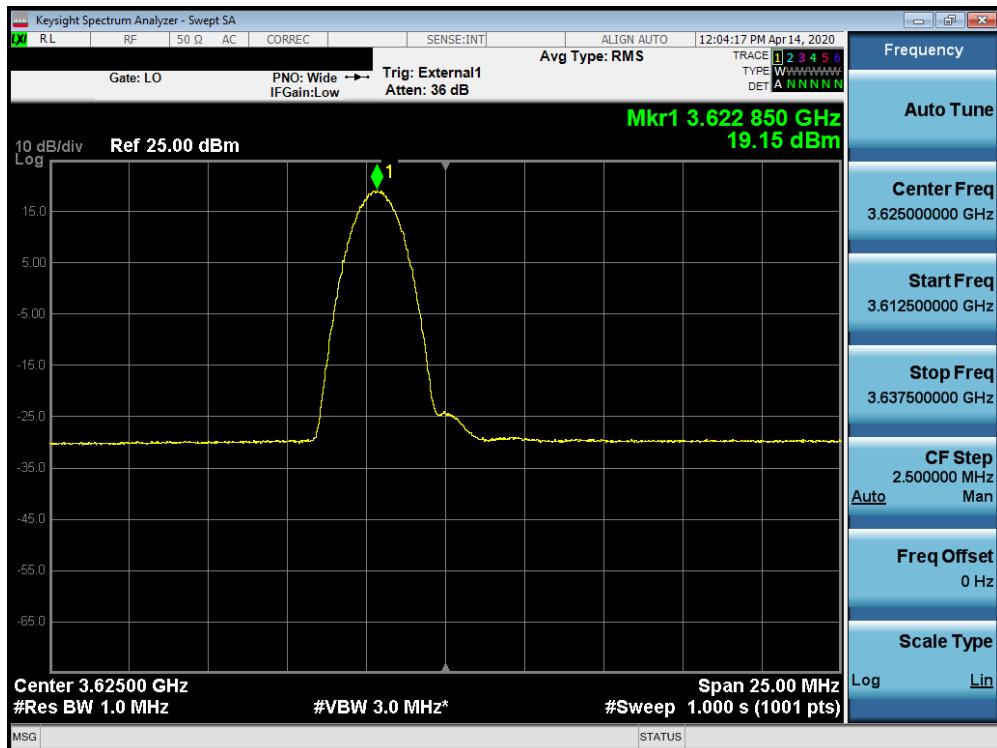


Plot 7-63. Peak Power Spectral Density Plot (B48 – 5.0MHz 64-QAM – Mid Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 48 of 97

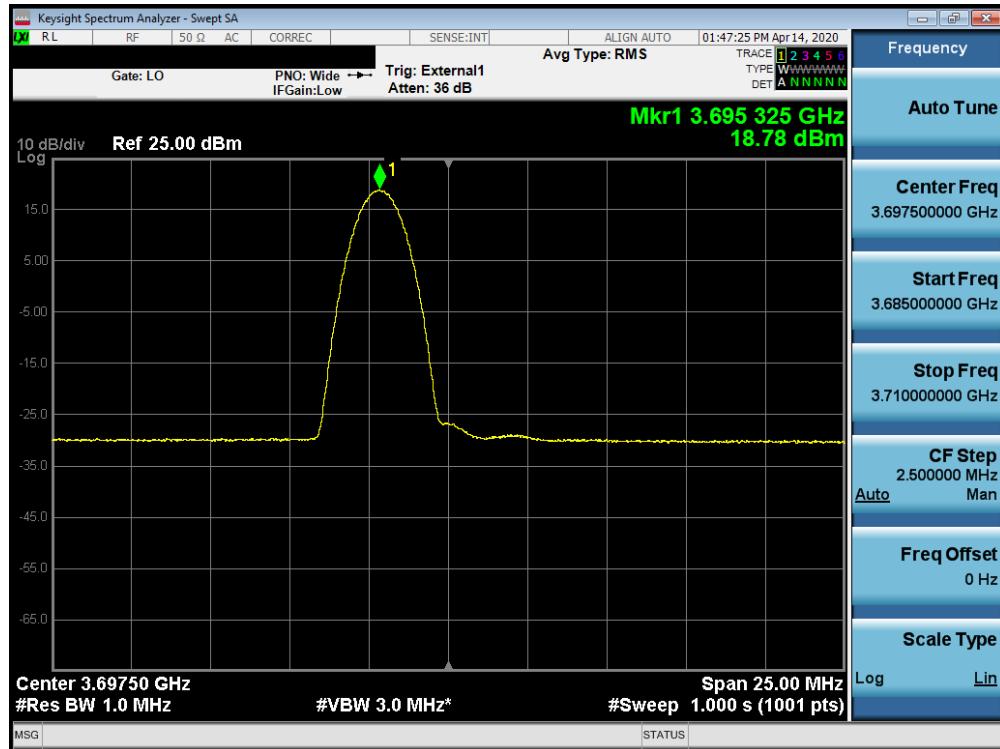


Plot 7-64. Peak Power Spectral Density Plot (B48 – 5.0MHz QPSK – High Channel RB: 1 RB, Offset: 0)

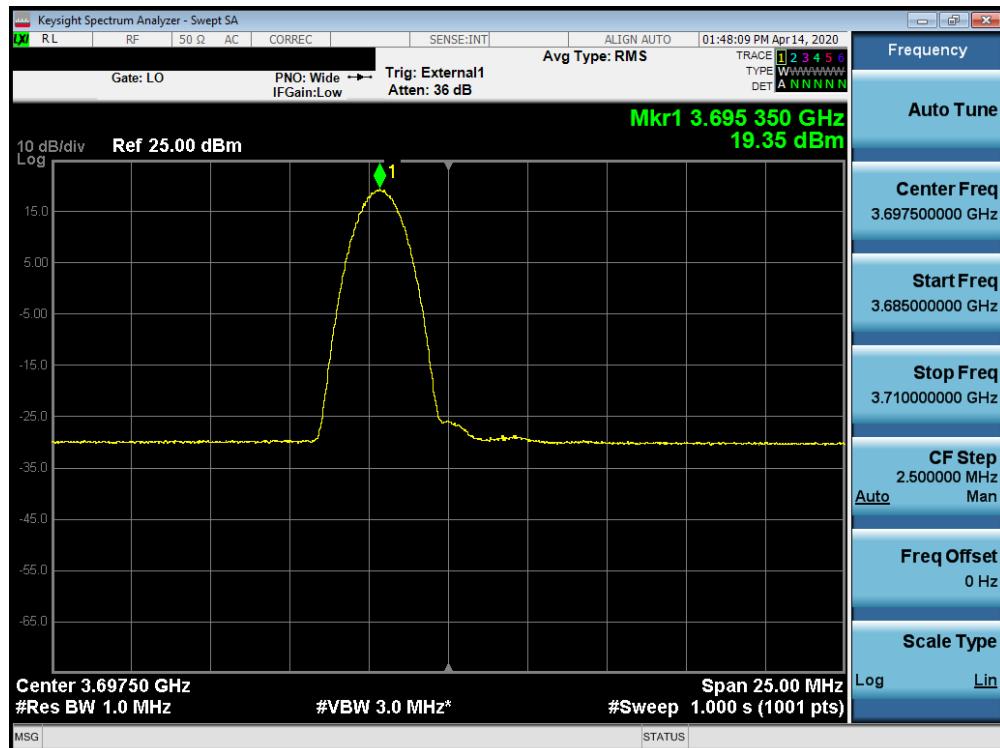


Plot 7-65. Peak Power Spectral Density Plot (B48 – 5.0MHz 16-QAM – High Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 49 of 97

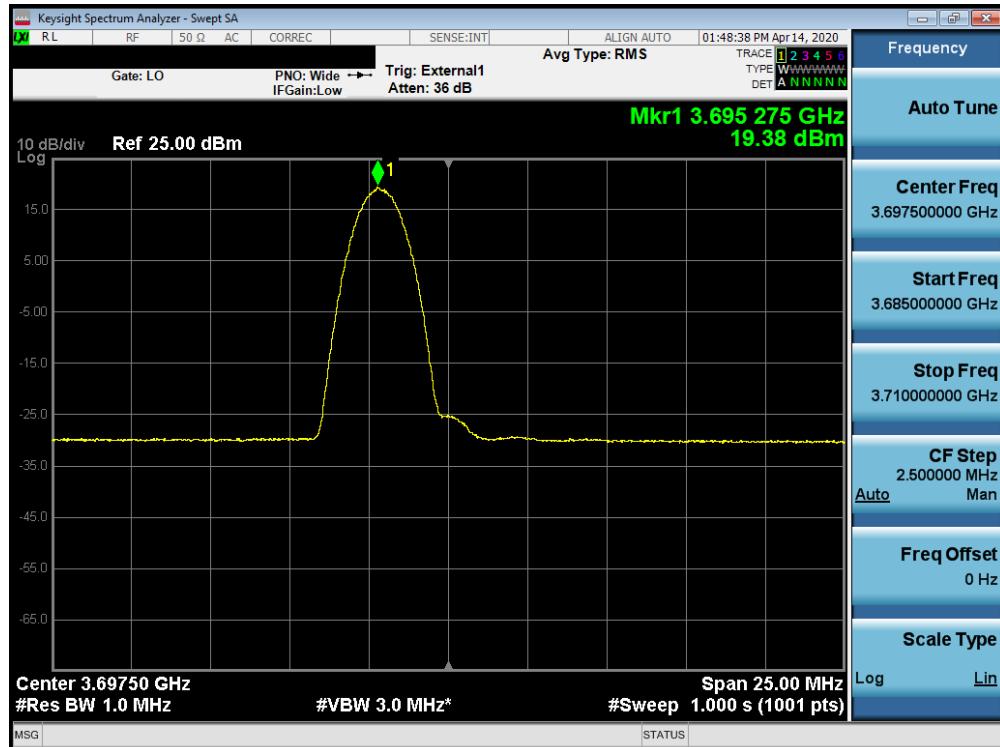


Plot 7-66. Peak Power Spectral Density Plot (B48 – 5.0MHz 64-QAM – High Channel RB: 1 RB, Offset: 0)

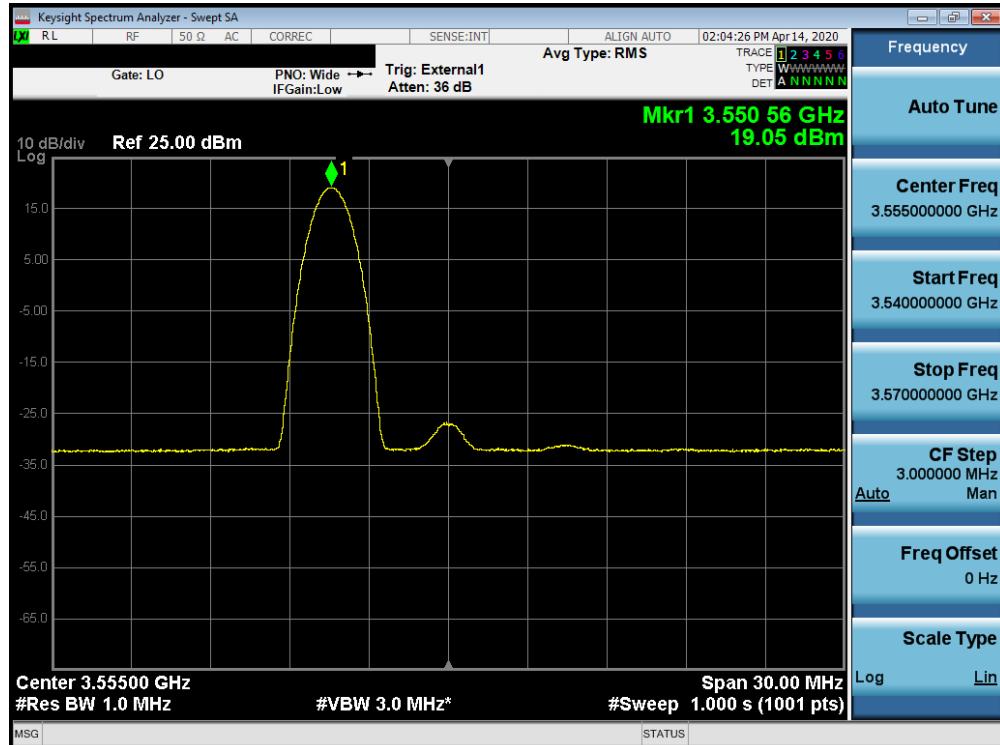


Plot 7-67. Peak Power Spectral Density Plot (B48 – 10.0MHz QPSK – Low Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 50 of 97

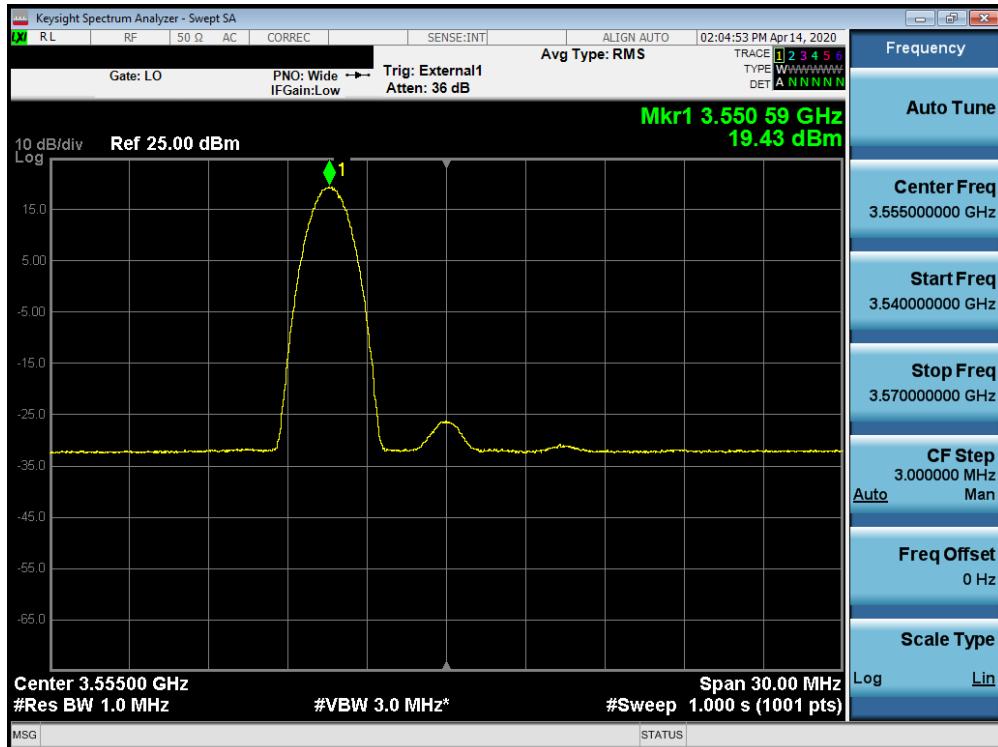


Plot 7-68. Peak Power Spectral Density Plot (B48 – 10.0MHz 16-QAM – Low Channel RB: 1 RB, Offset: 0)

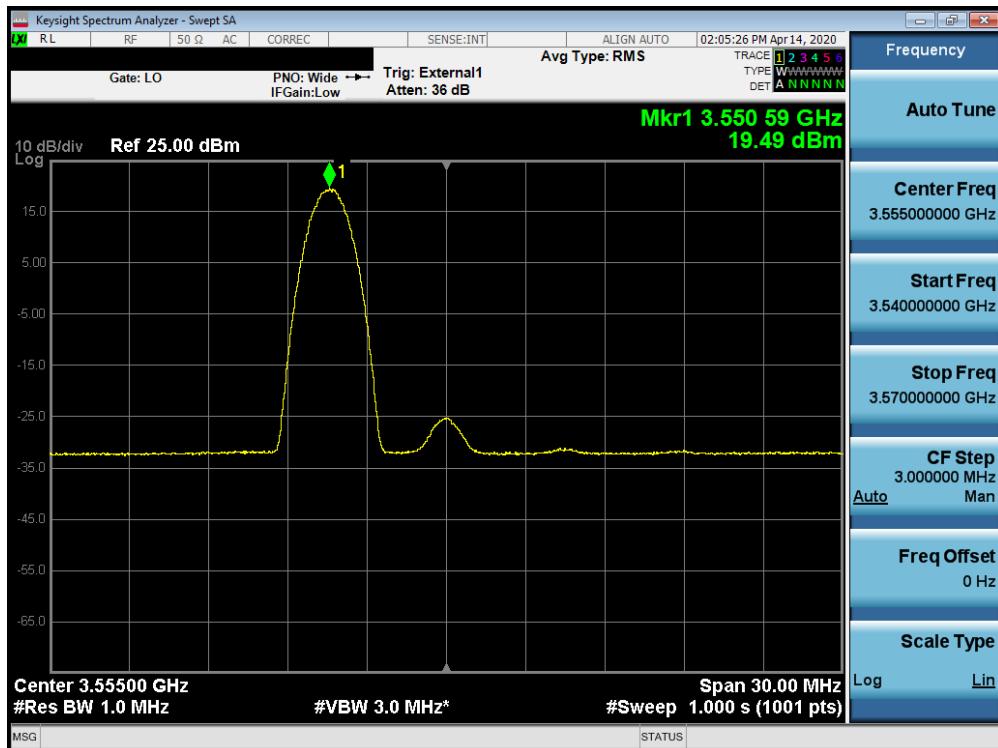


Plot 7-69. Peak Power Spectral Density Plot (B48 – 10.0MHz 64-QAM – Low Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 51 of 97

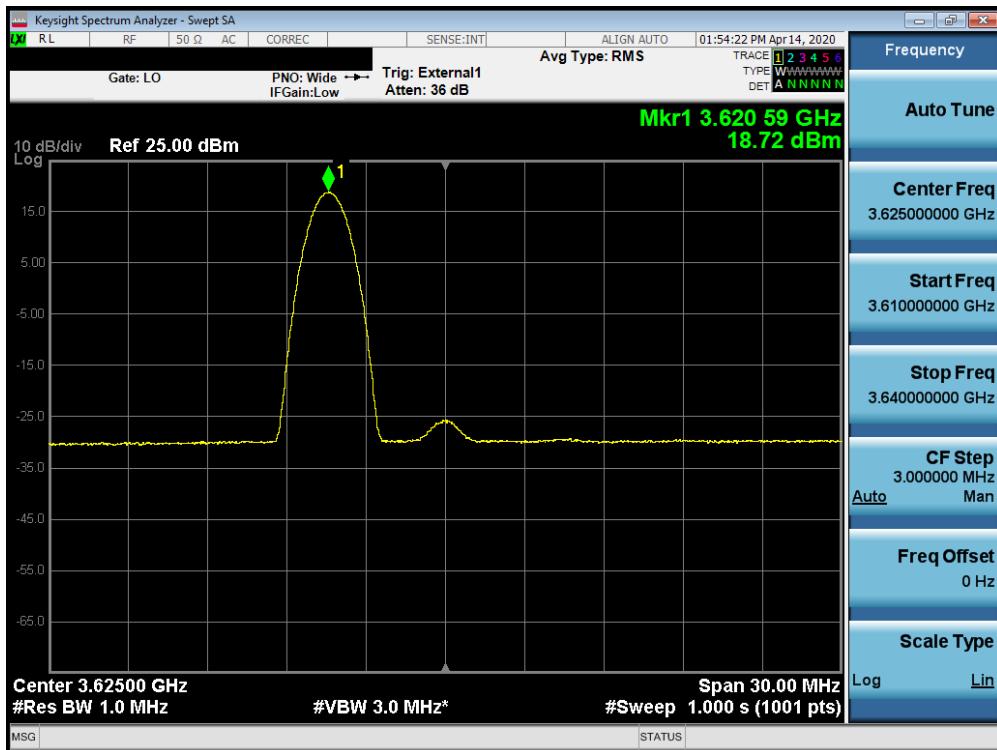


Plot 7-70. Peak Power Spectral Density Plot (B48 – 10.0MHz QPSK – Mid Channel RB: 1 RB, Offset: 0)

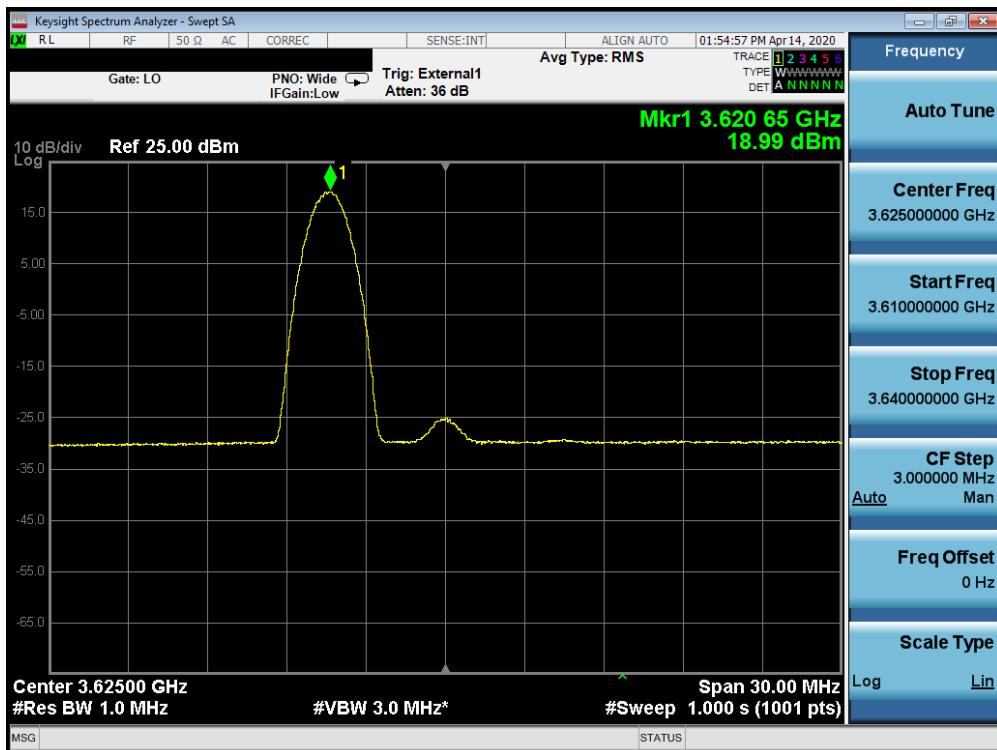


Plot 7-71. Peak Power Spectral Density Plot (B48 – 10.0MHz 16-QAM – Mid Channel RB: 1 RB, Offset: 0)


FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	 NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 52 of 97

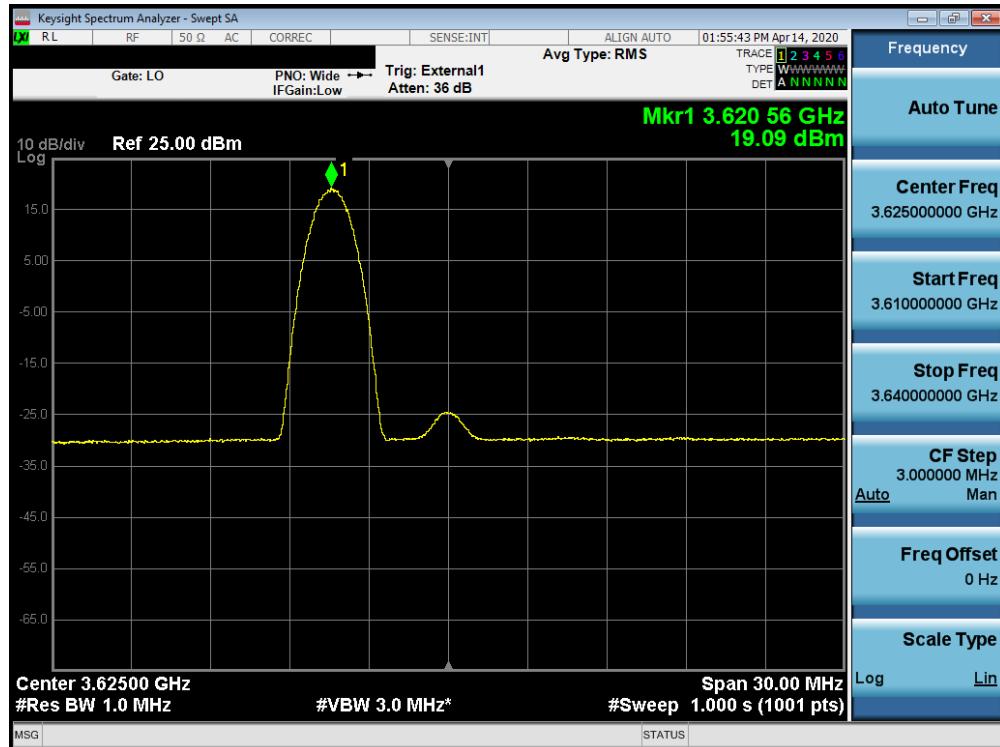


Plot 7-72. Peak Power Spectral Density Plot (B48 – 10.0MHz 64-QAM – Mid Channel RB: 1 RB, Offset: 0)

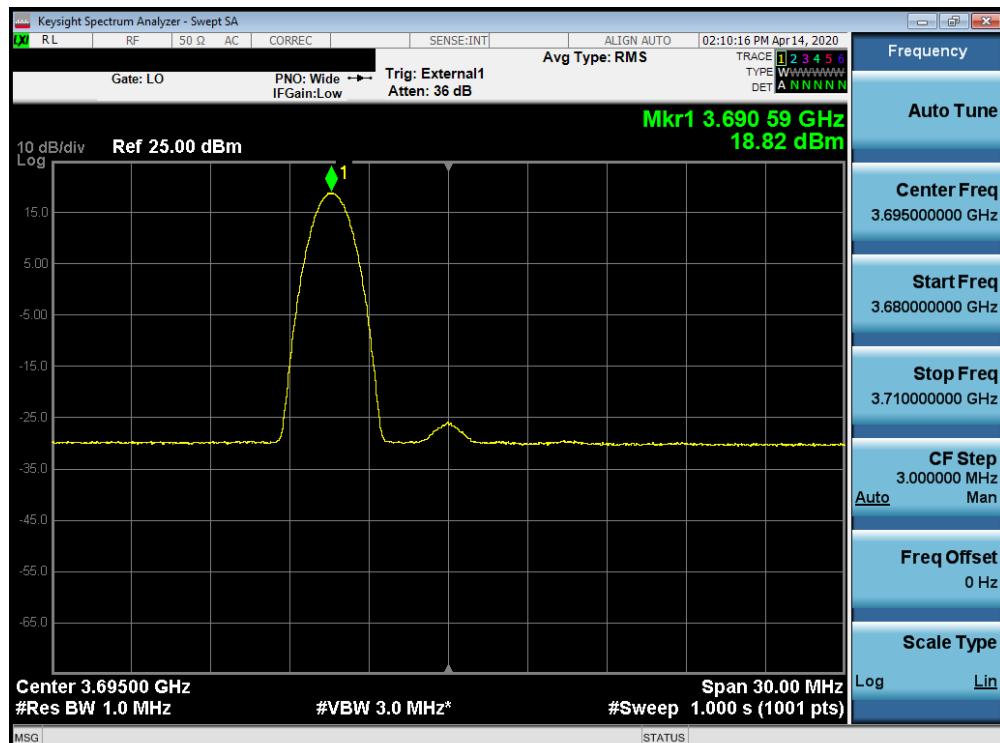


Plot 7-73. Peak Power Spectral Density Plot (B48 – 10.0MHz QPSK – High Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310503-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 53 of 97

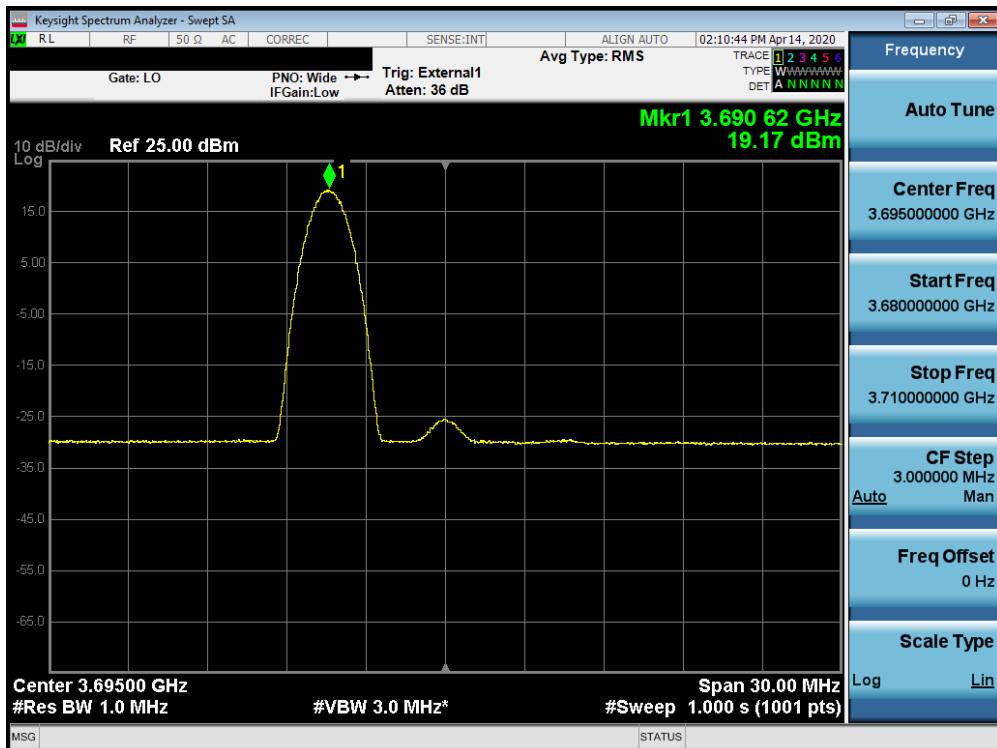


Plot 7-74. Peak Power Spectral Density Plot (B48 – 10.0MHz 16-QAM – High Channel RB: 1 RB, Offset: 0)

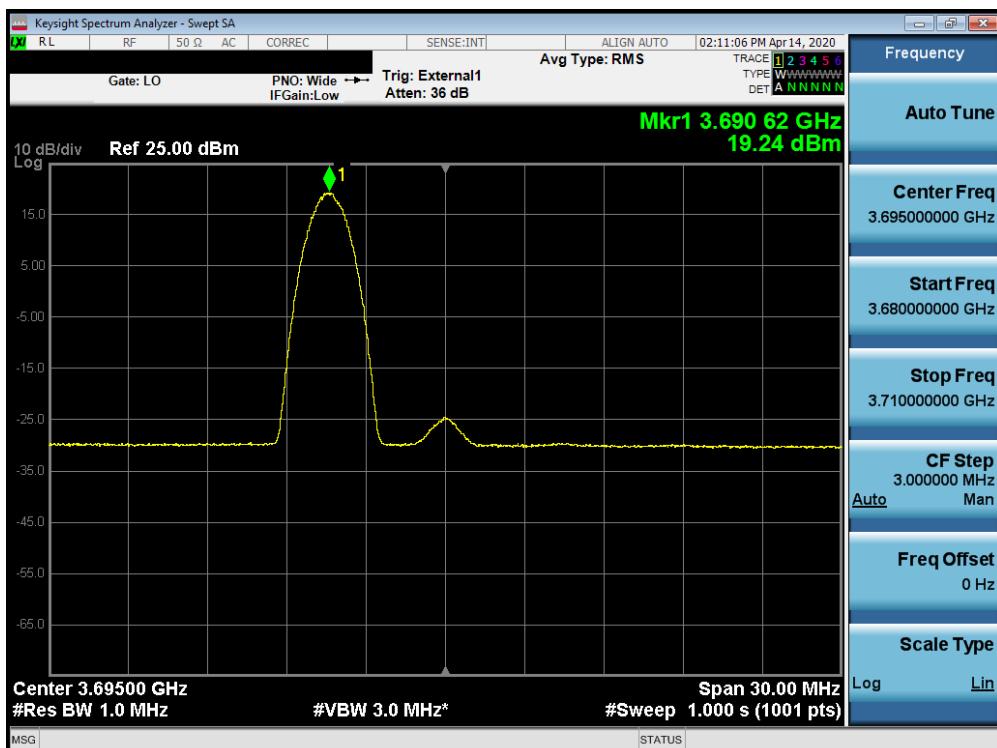


Plot 7-75. Peak Power Spectral Density Plot (B48 – 10.0MHz 64-QAM – High Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 54 of 97

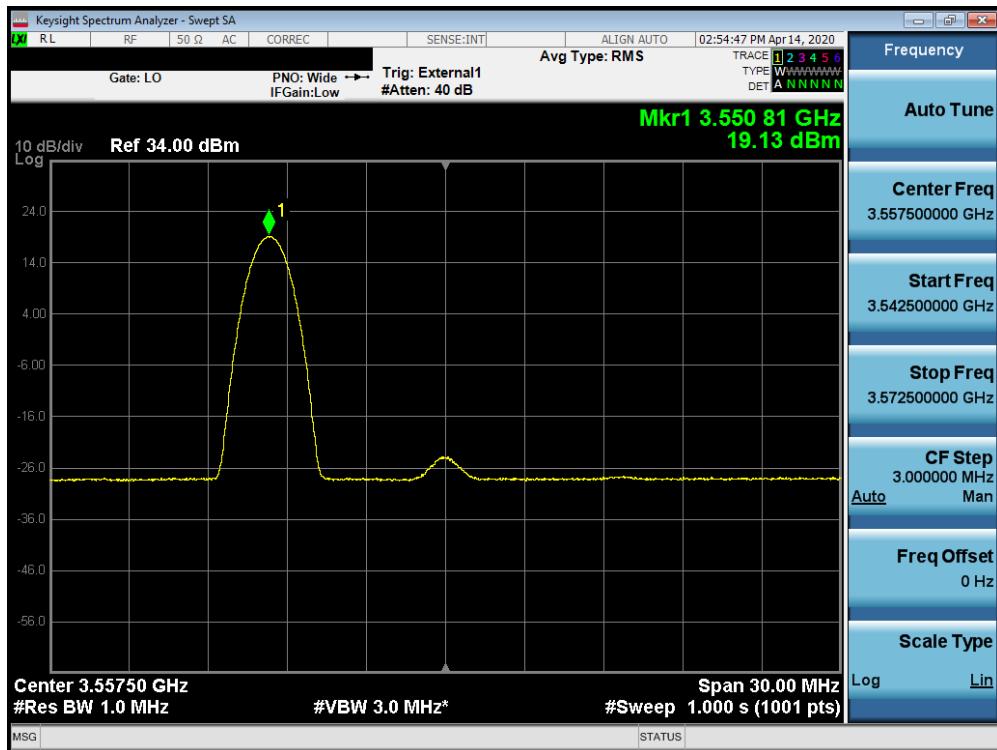


Plot 7-76. Peak Power Spectral Density Plot (B48 – 15.0MHz QPSK – Low Channel RB: 1 RB, Offset: 0)

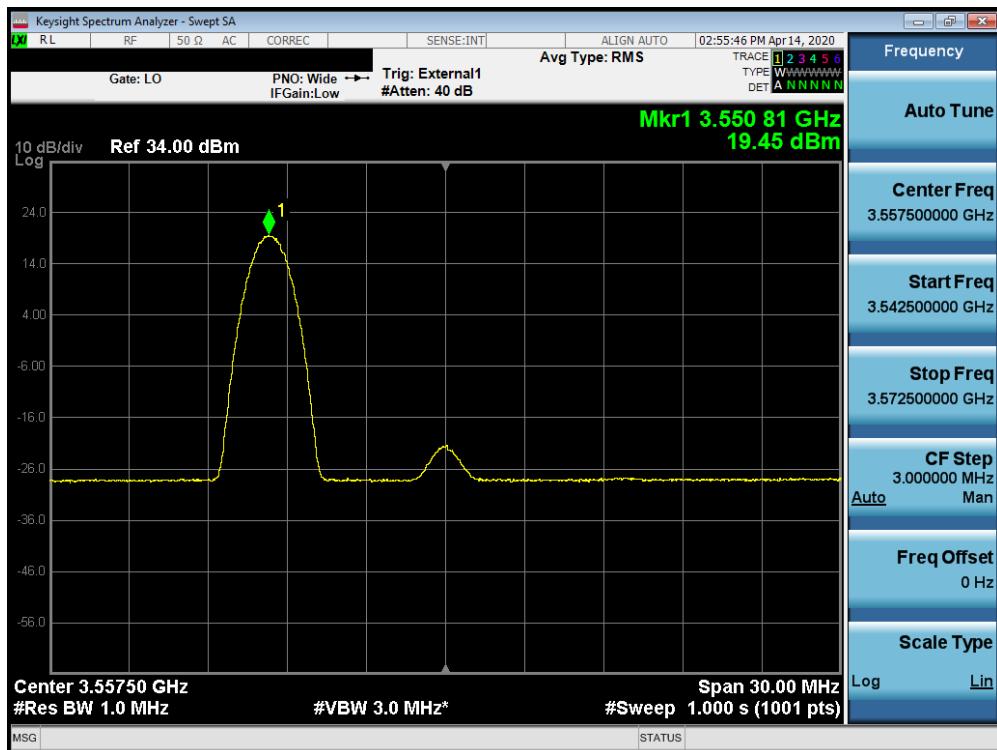


Plot 7-77. Peak Power Spectral Density Plot (B48 – 15.0MHz 16-QAM – Low Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 55 of 97

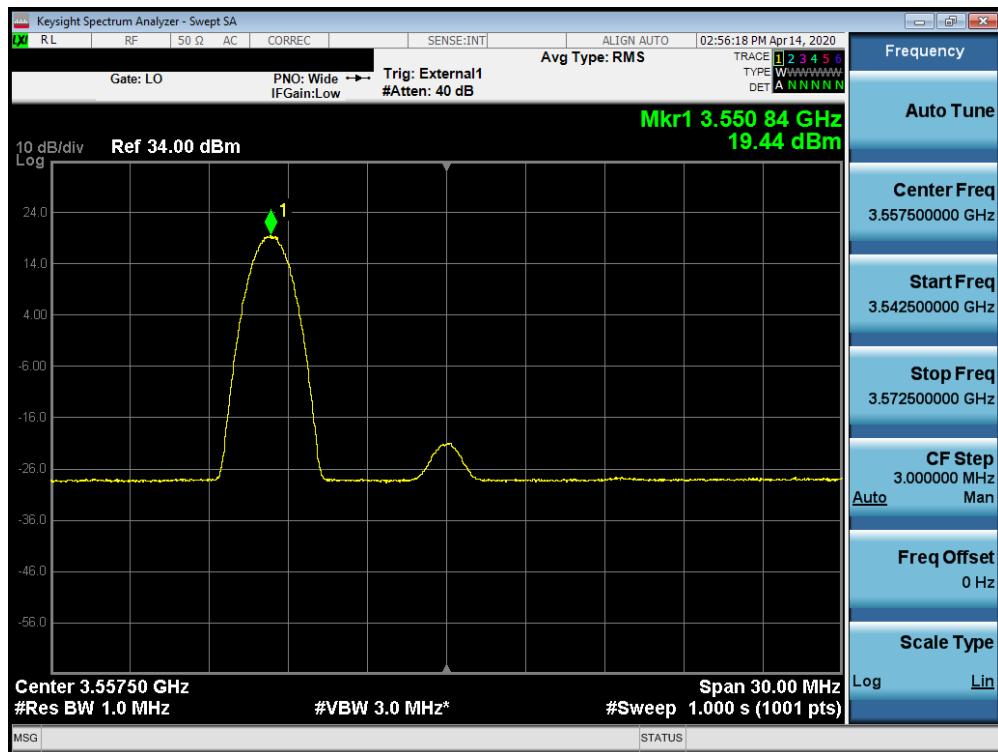


Plot 7-78. Peak Power Spectral Density Plot (B48 – 15.0MHz 64-QAM – Low Channel RB: 1 RB, Offset: 0)

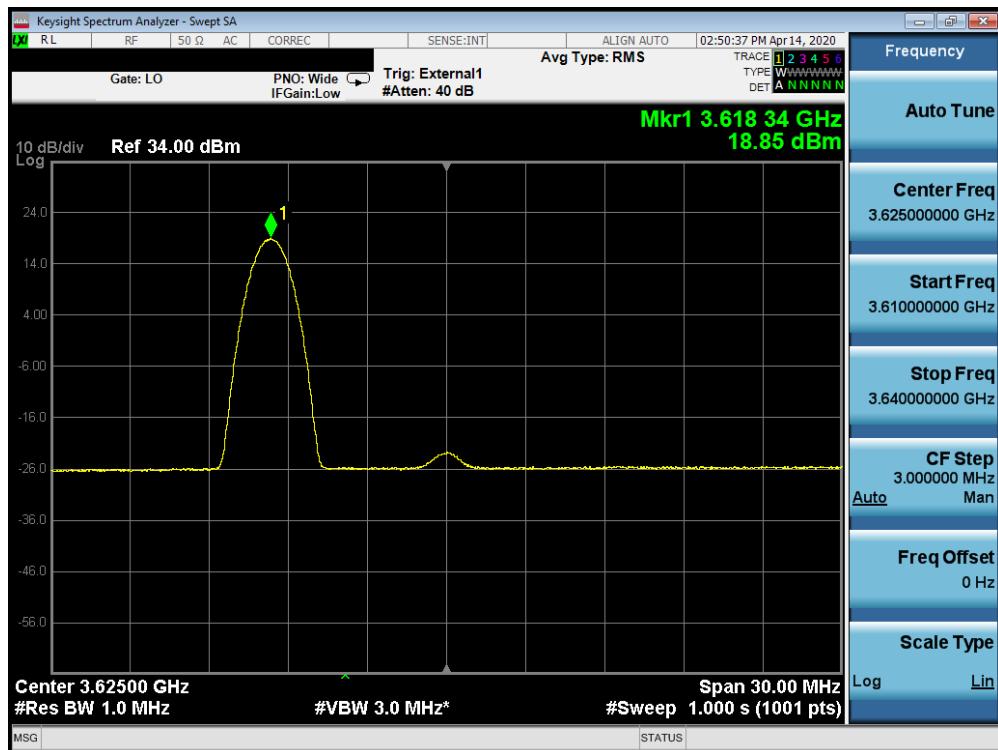


Plot 7-79. Peak Power Spectral Density Plot (B48 – 15.0MHz QPSK – Mid Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 56 of 97

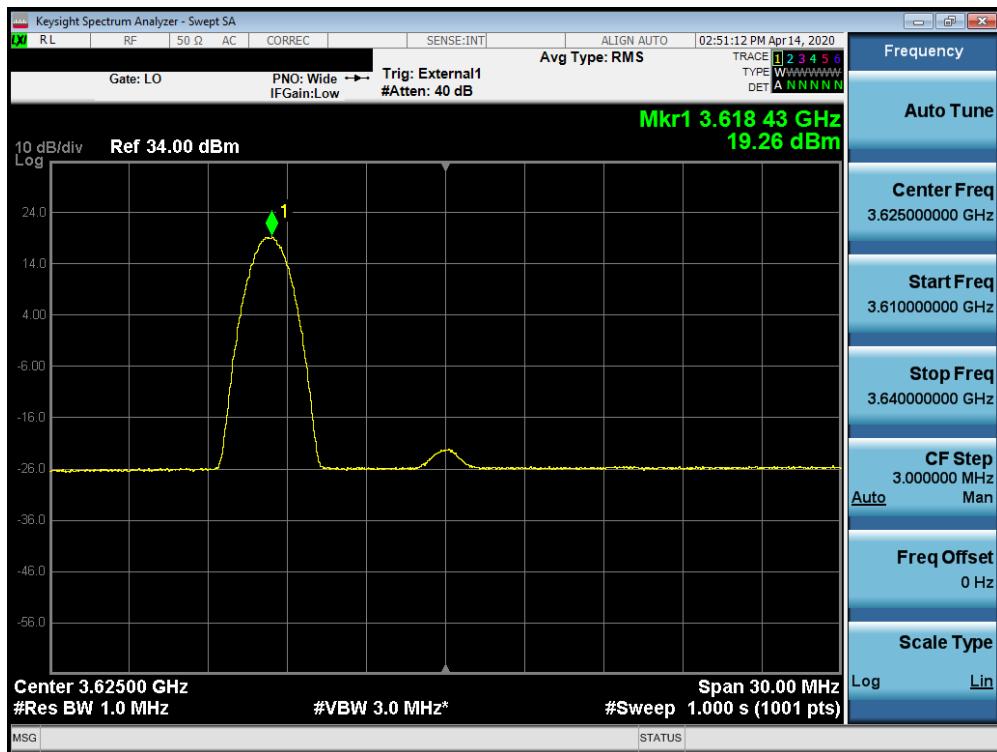


Plot 7-80. Peak Power Spectral Density Plot (B48 – 15.0MHz 16-QAM – Mid Channel RB: 1 RB, Offset: 0)

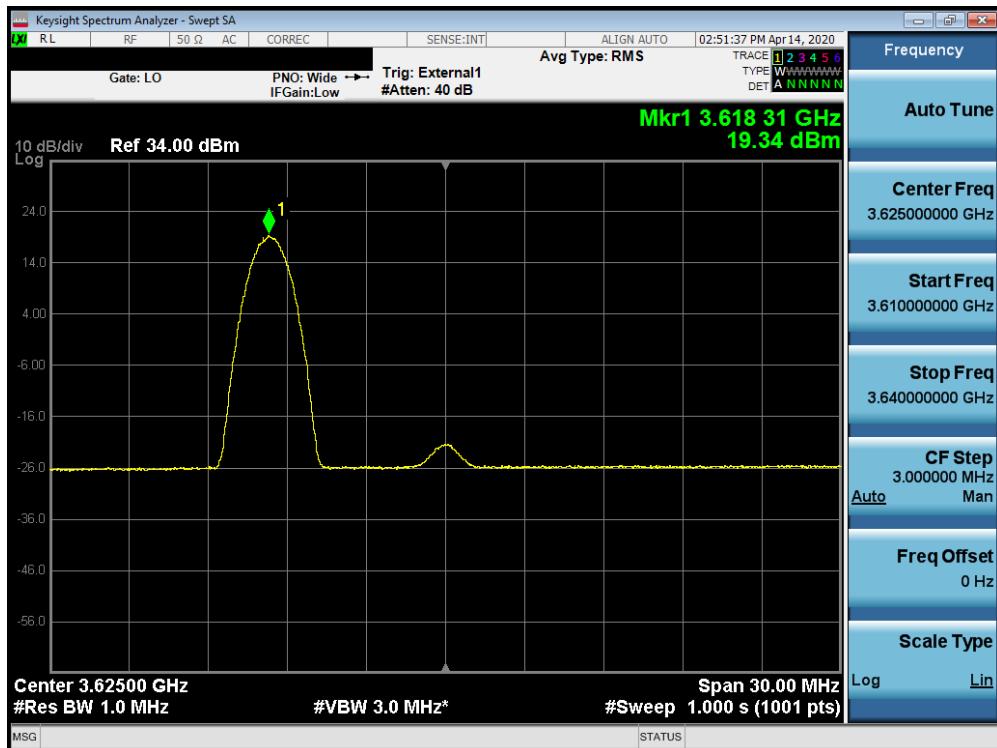


Plot 7-81. Peak Power Spectral Density Plot (B48 – 15.0MHz 64-QAM – Mid Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 57 of 97

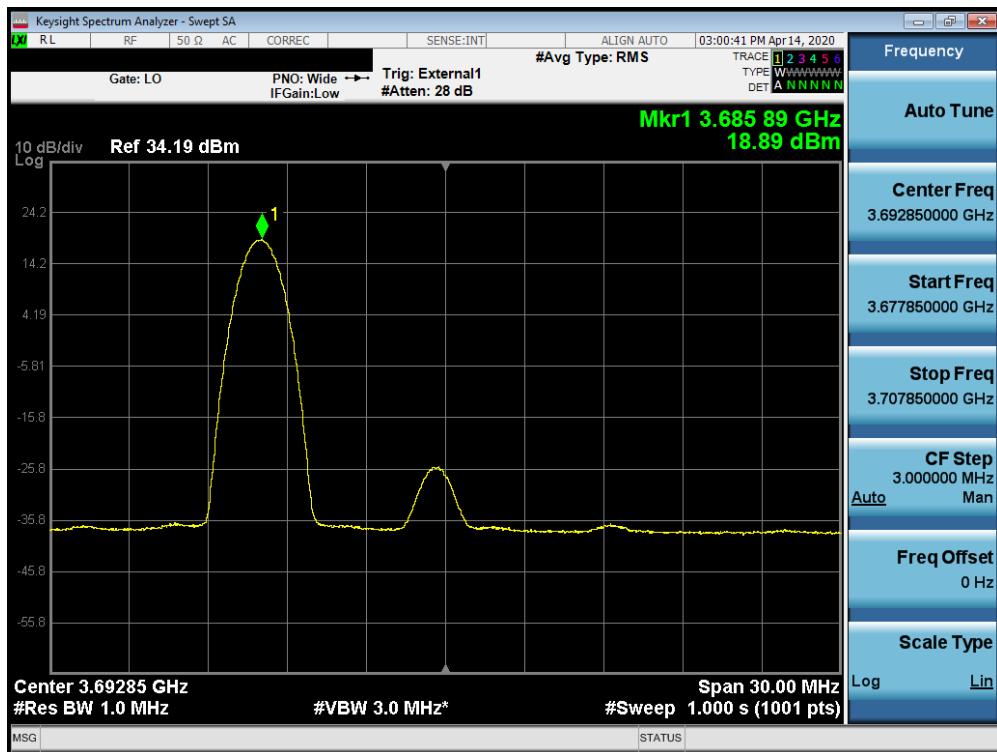


Plot 7-82. Peak Power Spectral Density Plot (B48 – 15.0MHz QPSK – High Channel RB: 1 RB, Offset: 0)

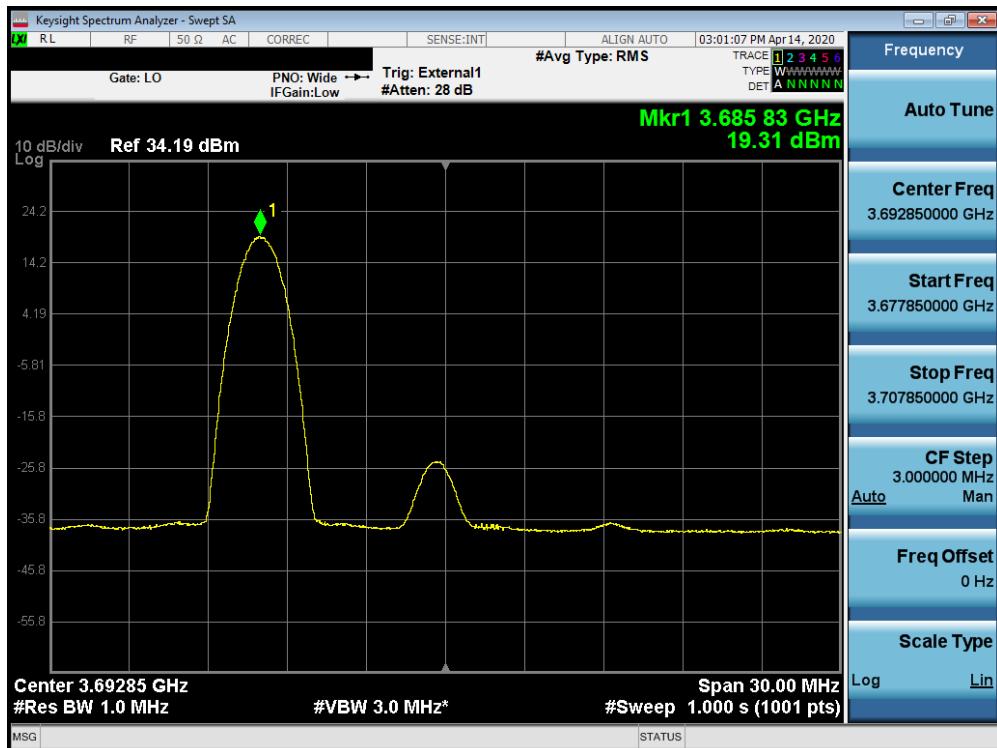


Plot 7-83. Peak Power Spectral Density Plot (B48 – 15.0MHz 16-QAM – High Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 58 of 97

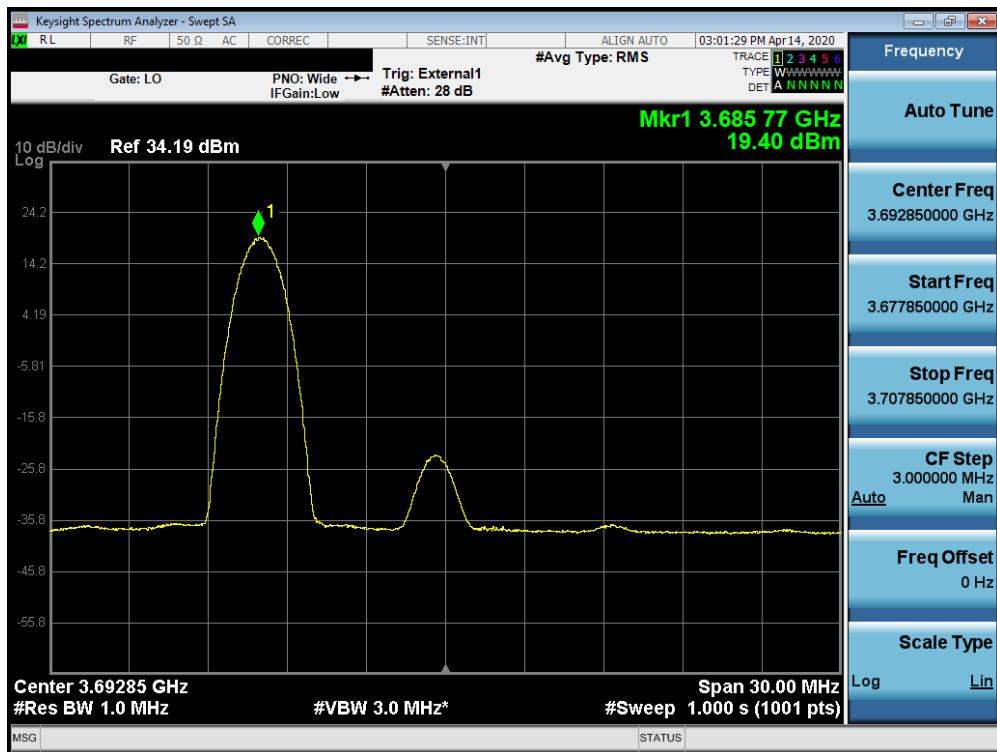


Plot 7-84. Peak Power Spectral Density Plot (B48 – 15.0MHz 64-QAM – High Channel RB: 1 RB, Offset: 0)

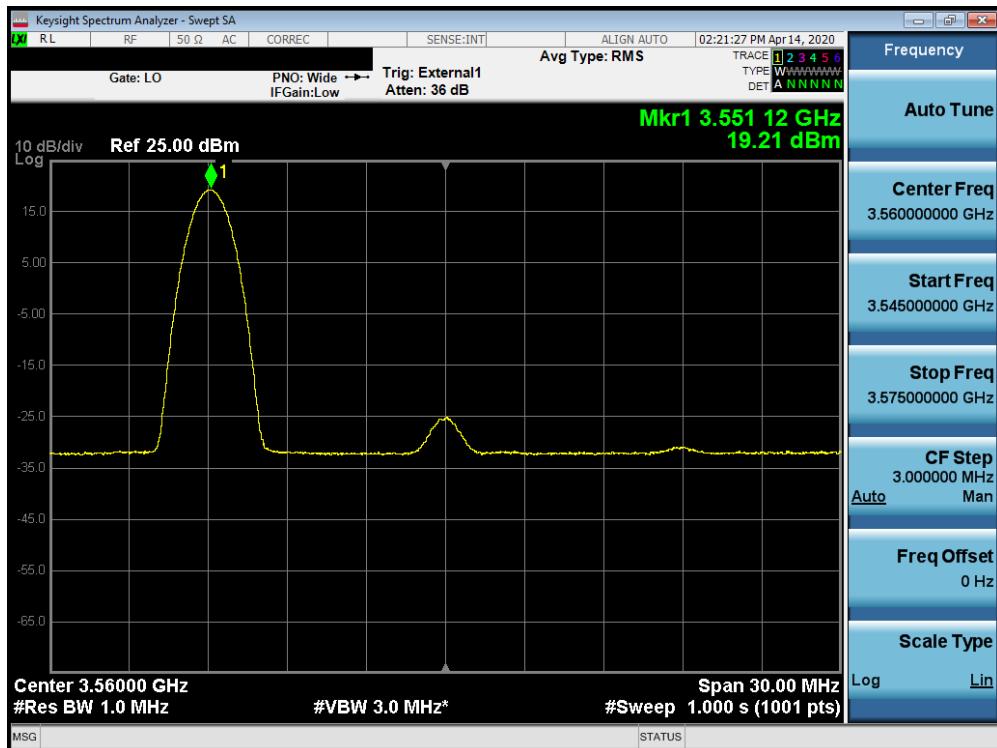


Plot 7-85. Peak Power Spectral Density Plot (B48 – 20.0MHz QPSK – Low Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 59 of 97

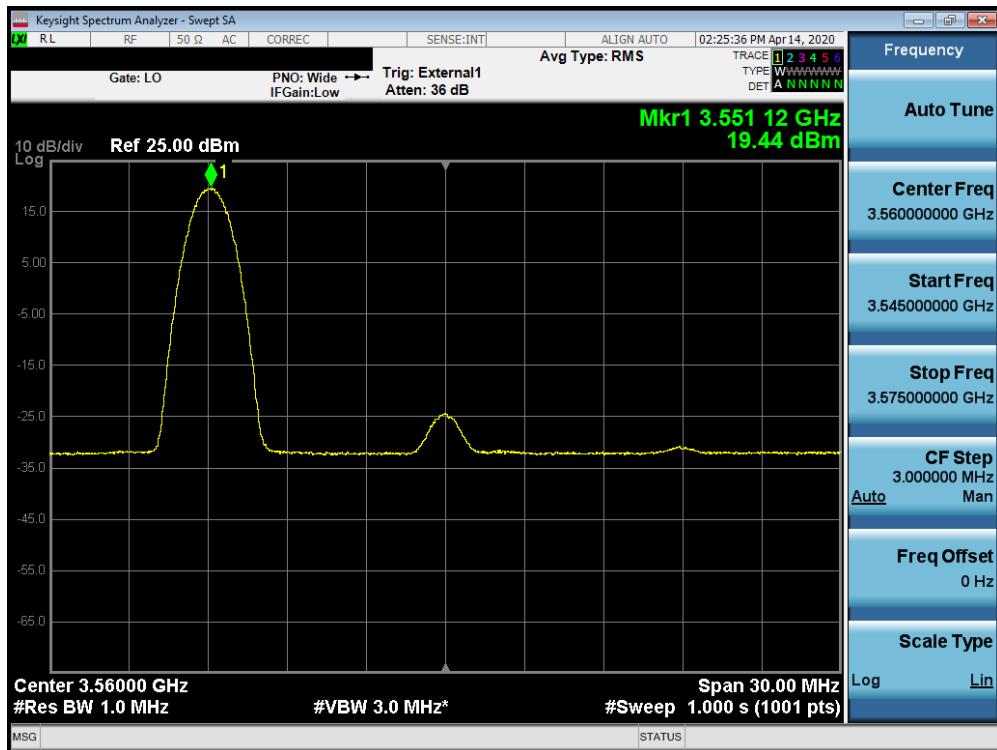


Plot 7-86. Peak Power Spectral Density Plot (B48 – 20.0MHz 16-QAM – Low Channel RB: 1 RB, Offset: 0)

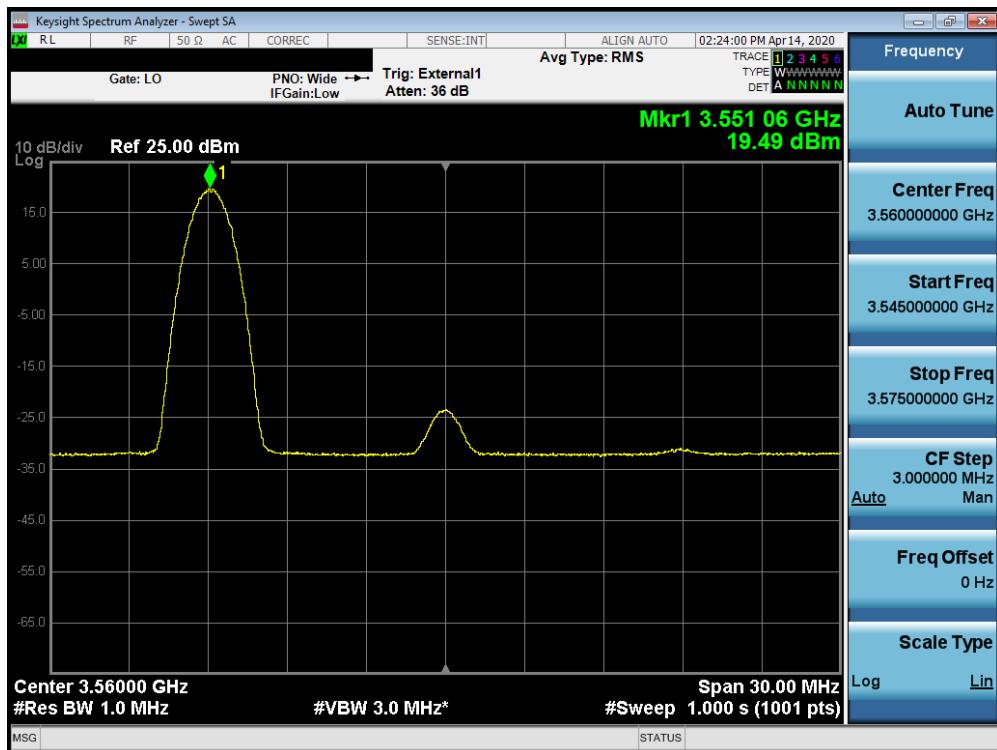


Plot 7-87. Peak Power Spectral Density Plot (B48 – 20.0MHz 64-QAM – Low Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST [®] Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 60 of 97

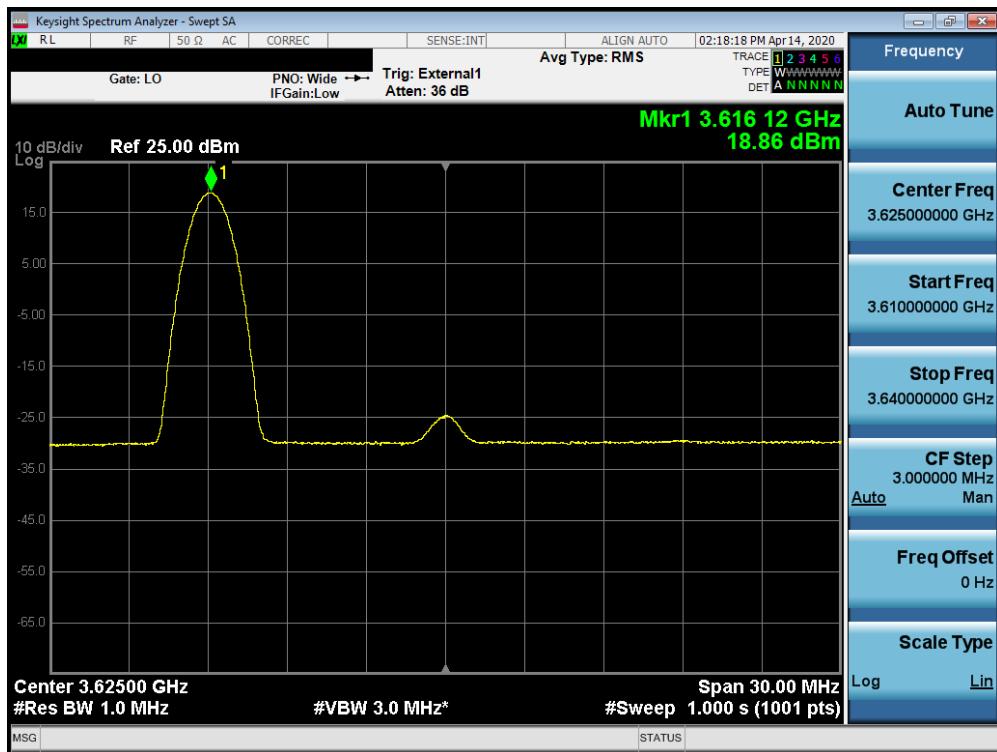


Plot 7-88. Peak Power Spectral Density Plot (B48 – 20.0MHz QPSK – Mid Channel RB: 1 RB, Offset: 0)

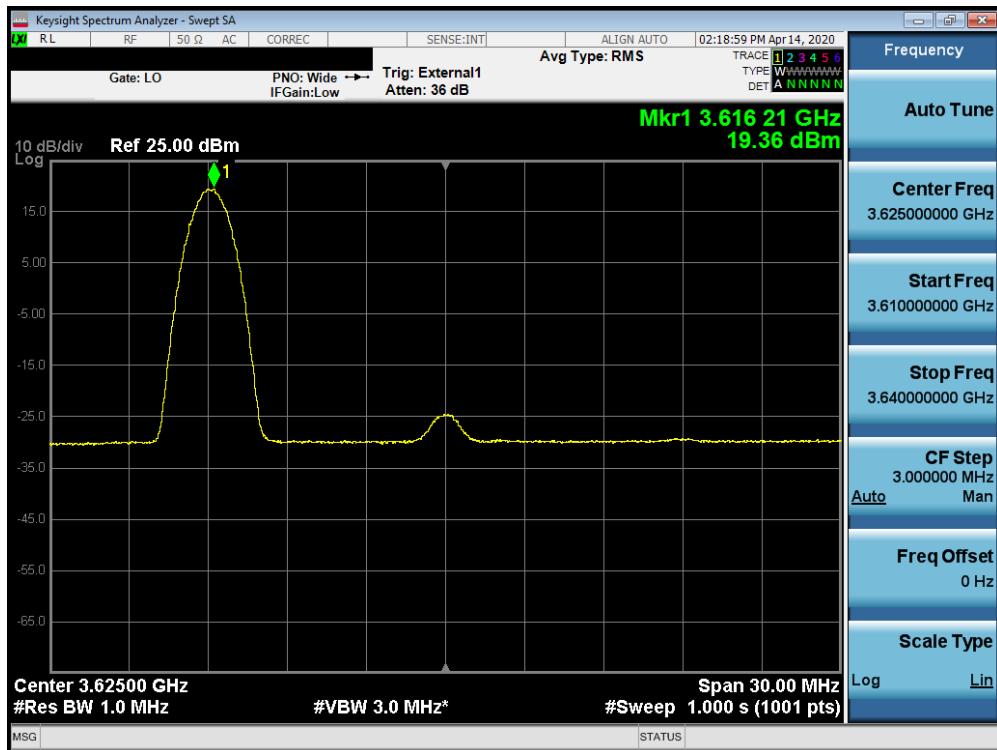


Plot 7-89. Peak Power Spectral Density Plot (B48 – 20.0MHz 16-QAM – Mid Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 61 of 97

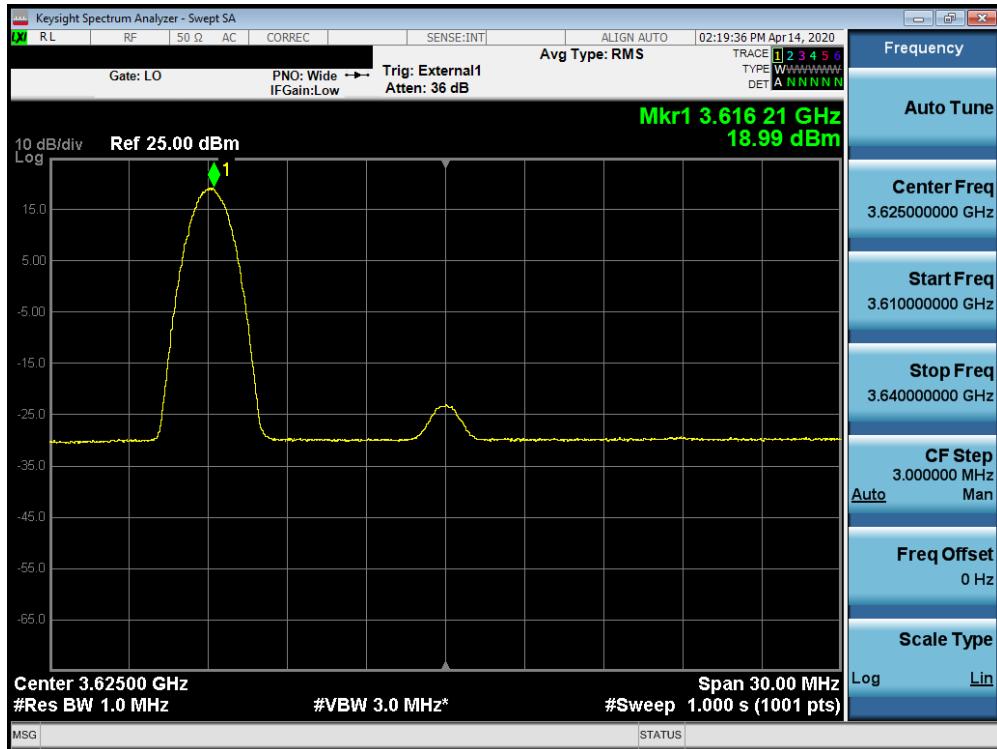


Plot 7-90. Peak Power Spectral Density Plot (B48 – 20.0MHz 64-QAM – Mid Channel RB: 1 RB, Offset: 0)

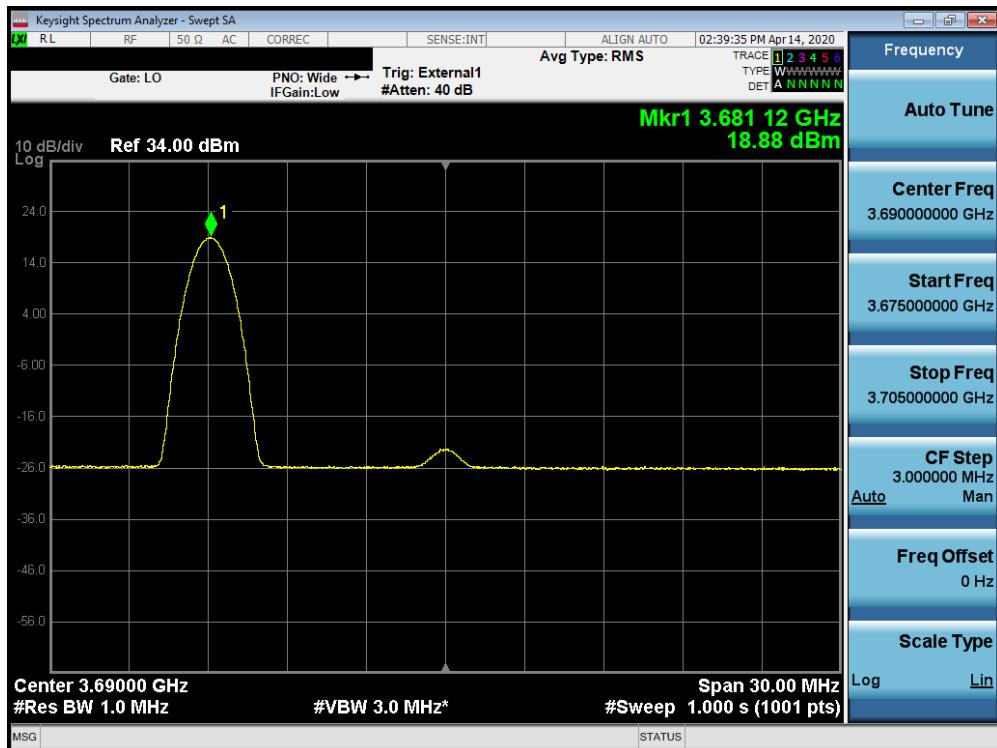


Plot 7-91. Peak Power Spectral Density Plot (B48 – 20.0MHz QPSK – High Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 62 of 97

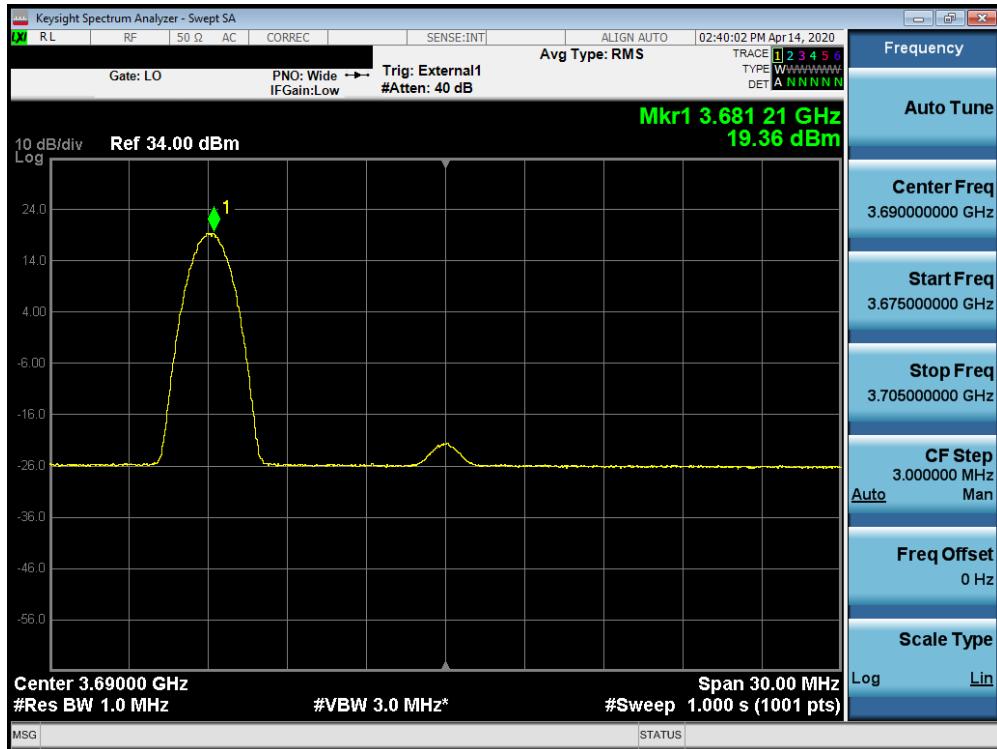

Plot 7-92. Peak Power Spectral Density Plot (B48 – 20.0MHz 16-QAM – High Channel RB: 1 RB, Offset: 0)

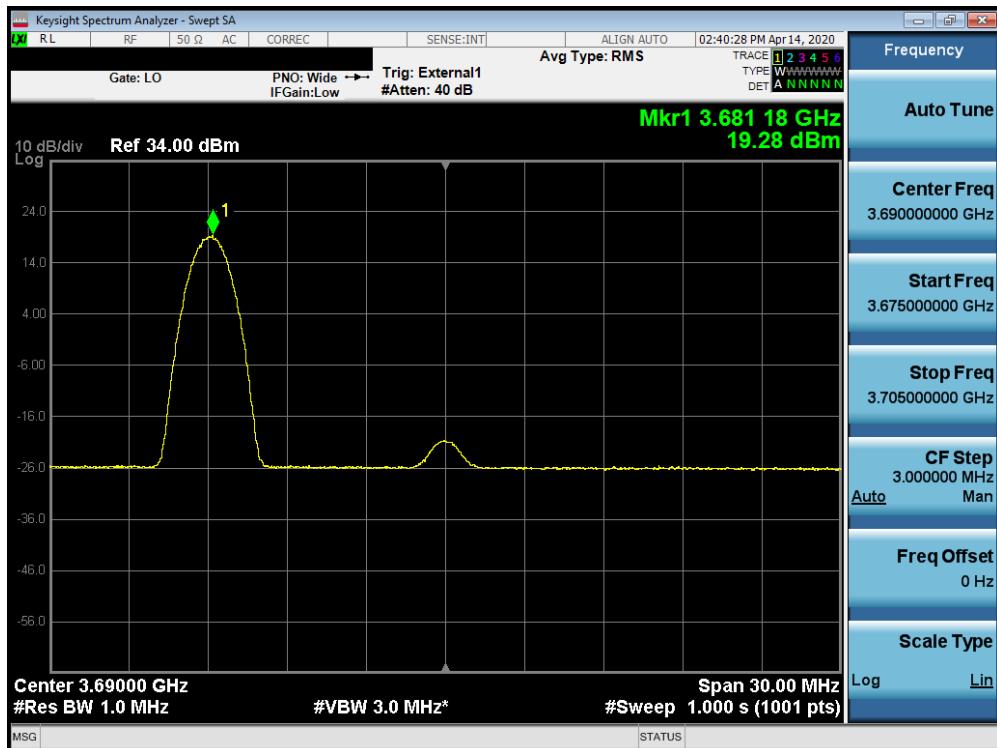

Plot 7-93. Peak Power Spectral Density Plot (B48 – 20.0MHz 64-QAM – High Channel RB: 1 RB, Offset: 0)

FCC ID: XIA-CFW2132	 PCTEST Proud to be part of 		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router		Page 63 of 97

7.6 Peak-Average Ratio

§96.41(g)

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect two million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed.
6. An RF-Burst triggering method ensured measurement in the on time of the signal.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. Test Instrument & Measurement Setup

Test Notes


None

FCC ID: XIA-CFW2132	PCTEST [®] Proud to be part of element		MEASUREMENT REPORT (CERTIFICATION)	NetCommWireless	Approved by: Quality Manager
Test Report S/N: 1M2003310053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router			Page 64 of 97


© 2020 PCTEST

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V1.0 12/17/2018

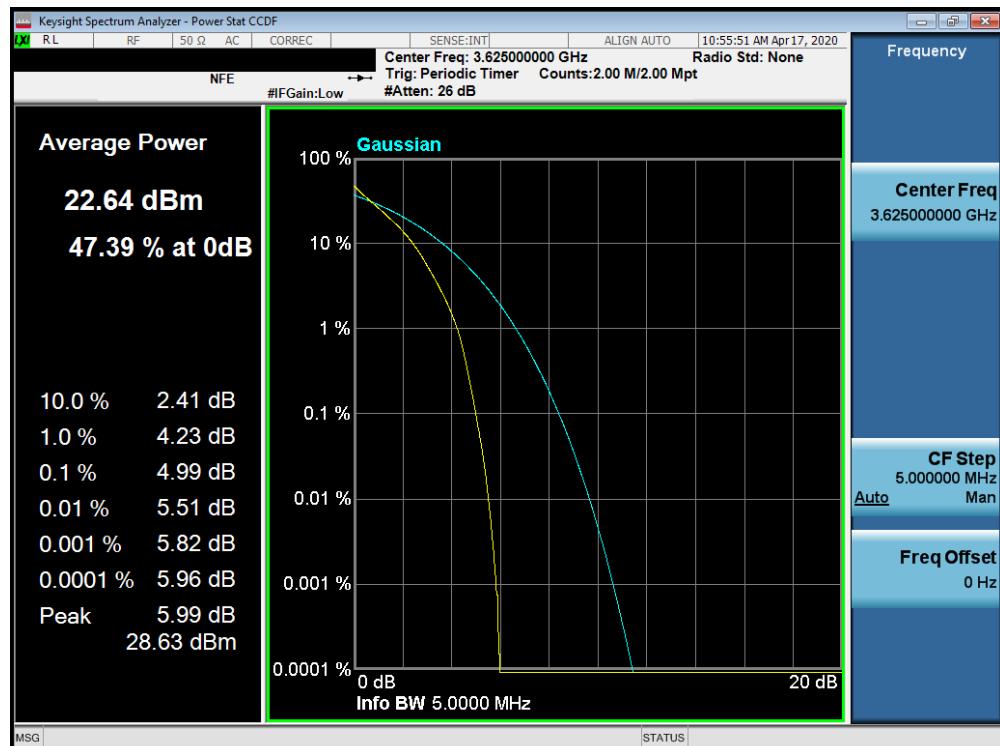


Plot 7-94. PAR Plot (Band 48 – 5.0MHz QPSK – Full RB Configuration)

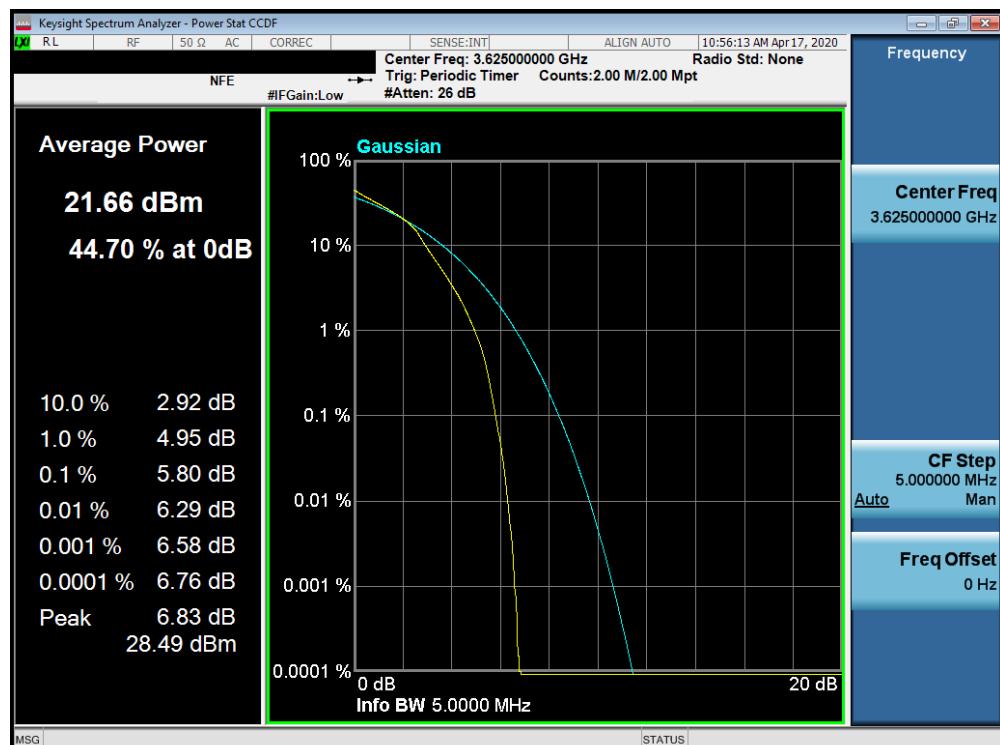


Plot 7-95. PAR Plot (Band 48 – 5.0MHz 16-QAM – Full RB Configuration)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 65 of 97

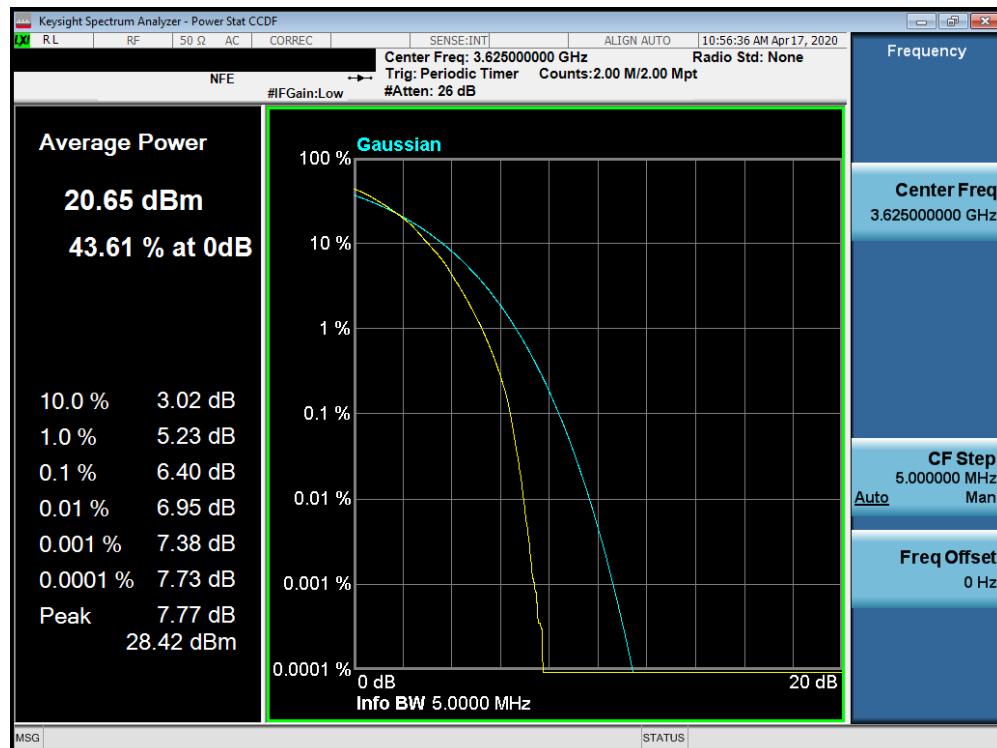


Plot 7-96. PAR Plot (Band 48 – 5.0MHz 64-QAM – Full RB Configuration)

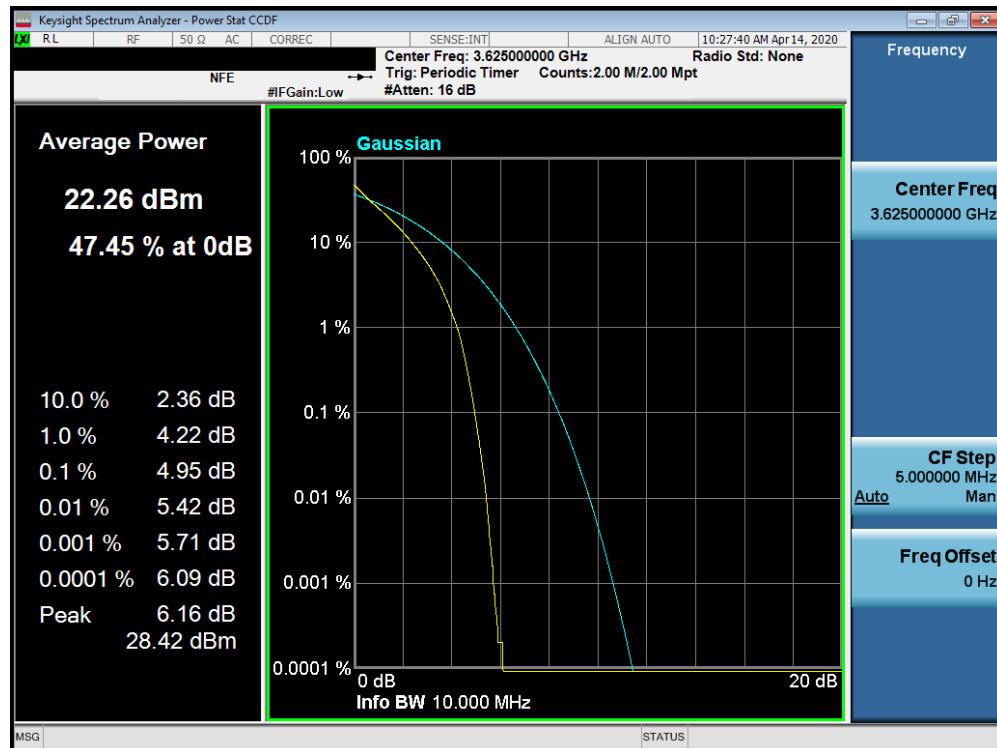


Plot 7-97. PAR Plot (Band 48 – 10.0MHz QPSK – Full RB Configuration)

FCC ID: XIA-CFW2132	PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 66 of 97

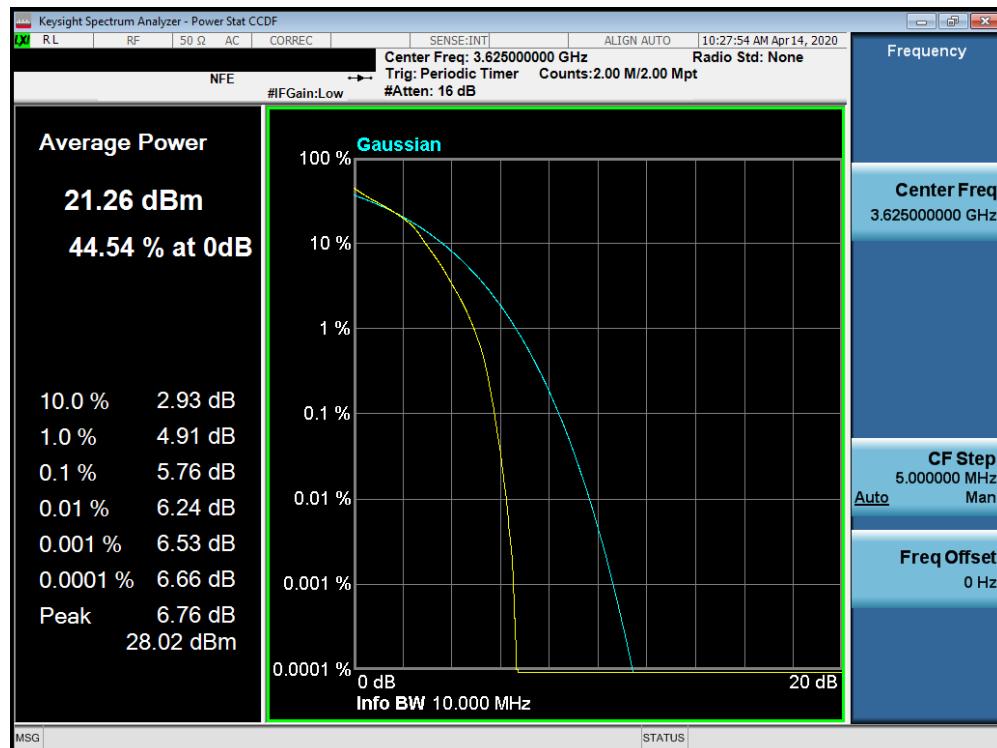

Plot 7-98. PAR Plot (Band 48 – 10.0MHz 16-QAM – Full RB Configuration)

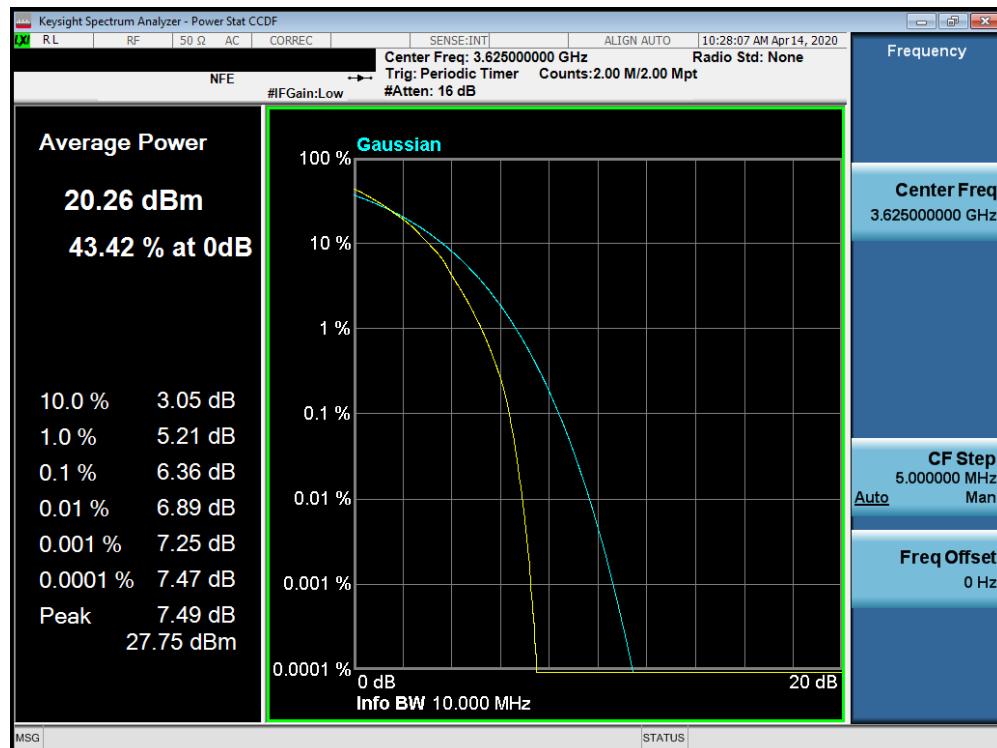

Plot 7-99. PAR Plot (Band 48 – 10.0MHz 64-QAM – Full RB Configuration)

FCC ID: XIA-CFW2132	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M200331053-01-R1.XIA	Test Dates: 3/31 - 5/15/2020	EUT Type: Outdoor LTE Router	Page 67 of 97