

Report No.: SZEM110800302201

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,

Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: sgs_internet_operations@sgs.com Page:

FCC REPORT

Application No: SZEM1108003022RF

Applicant: CHINFAI (HK) TECHNOLOGY CO., LIMITED

Product Name: BLUETOOTH KEYBOARD

Operation Frequency: 2.402GHz to 2.480GHz

FCC ID: XJ4KB6135

Standards: FCC CFR Title 47 Part 15 Subpart C

Date of Receipt: 2011-08-16

Date of Test: 2011-08-16 to 2011-09-26

Date of Issue: 2011-10-27

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM110800302201

Page: 2 of 48

2 Contents

			Page
1	CC	OVER PAGE	1
2	CC	ONTENTS	2
		EST SUMMARY	
3			
4	GF	ENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF E.U.T.	
	4.3	E.U.T OPERATION MODE.	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST FACILITY	7
	4.6	TEST LOCATION	7
	4.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
	4.8	TEST INSTRUMENTS LIST	8
5	TE	EST RESULTS AND MEASUREMENT DATA	10
	5.1	Antenna requirement:	10
	5.2	CONDUCTED EMISSIONS	11
	5.3	CONDUCTED PEAK OUTPUT POWER	14
	5.4	20dB Occupy Bandwidth	
	5.5	CARRIER FREQUENCIES SEPARATION	
	5.6	HOPPING CHANNEL NUMBER	
	5.7	DWELL TIME	
	5.8	BAND EDGE	
	5.9	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	5.11	RADIATED EMISSION	
	•	11.1 Radiated emission below 1GHz	
	•	11.2 Transmitter emission above 1GHz	
	5. 1	11.3 Band edge (Radiated Emission)	41-48



Report No.: SZEM110800302201

Page: 3 of 48

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.



Report No.: SZEM110800302201

Page: 4 of 48

4 General Information

4.1 Client Information

Applicant:	CHINFAI (HK) TECHNOLOGY CO., LIMITED
Address of Applicant:	Building 2C-2D, Yingfeng industrial Part, Sanhe economic development Zone, Huiyang District, Huizhou City, Guangdong Province, China
Manufacturer/Factory:	CHINFAI (HK) TECHNOLOGY CO., LIMITED
Address of Manufacturer /Factory:	Building 2C-2D, Yingfeng industrial Part, Sanhe economic development Zone, Huiyang District, Huizhou City, Guangdong Province, China

4.2 General Description of E.U.T.

Product Name:	BLUETOOTH KEYBOARD
Model No.:	KB-6135
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK
Antenna Type:	Integral
Antenna gain:	2.0dBi
Power supply:	PC USB port supply (charging)
	Battery: 3.7V lithium battery



Report No.: SZEM110800302201

Page: 5 of 48

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The highest channel	2480MHz



Report No.: SZEM110800302201

Page: 6 of 48

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1004 mbar
Test mode:	
Charge + transmitting:	Keep the EUT in Transmitting mode. And PC charging to EUT.
Transmitting:	Keep the EUT in Transmitting mode.

4.4 Description of Support Units

The EUT was tested with associated equipment as below.

Description	Manufacturer	Model No.	
PC	DELL	OPTIPLEX 755	
LCD-displaying	DELL	E1909WF	
MOUSE	DELL	MOC5110	
PC	DELL	OPTIDLEX 330	
LCD-displaying	DELL	SP2208WFPT	
MOUSE	DELL	MOC5110	
Coder	HengTong ELECTRON	HT4000	
Printer	Canon	BJC-1000SP	
Mobile	Nokia	Nokia 6300	

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800302201

Page: 7 of 48

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, March 16, 2011

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800302201

Page: 8 of 48

4.8 Test Instruments list

RE i	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29		
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2011-11-09		
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2011-11-09		
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2011-11-09		
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26		
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2011-10-27		
11	Band filter	Amindeon	82346	SEL0094	2012-05-26		

Con	Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2012-06-10			
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2011-10-26			
3	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2012-05-26			
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2012-05-26			
5	Coaxial Cable	SGS	N/A	SEL0024	2012-05-29			



Report No.: SZEM110800302201

Page: 9 of 48

RF conducted						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2011-10-27	
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29	

General used equipment							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2011-11-04		
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-03-10		
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18		



Report No.: SZEM110800302201

Page: 10 of 48

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.0dBi.

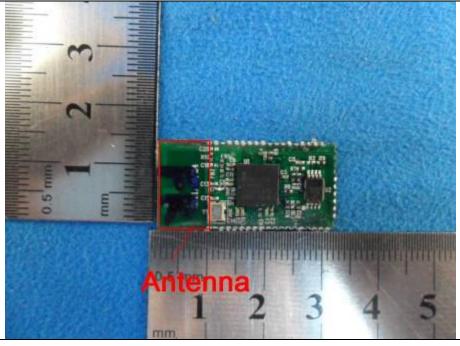





Report No.: SZEM110800302201

Page: 11 of 48

5.2 Conducted Emissions

 Conducted Emissions				
Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Class / Severity:	Class B			
Limit:	Fraguency range (MHz)	Frequency range (MHz) Limit (dBuV) Quasi-peak Average		
	,			
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
Test procedure	* Decreases with the logarithm			
	The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.			
Test setup:	Reference Plane			
	AUX Equipment E.U Test table/Insulation pla Remarkc E.U.T: Equipment Under Test LISN: Line Impedence Stabilizatio Test table height=0.8m		er — AC power	
Test Instruments:	Refer to section 4.8 for details.			
Test mode:	Charge + transmitting mode			
Test results:	Pass			
	I			

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM110800302201

Page: 12 of 48

Live line:

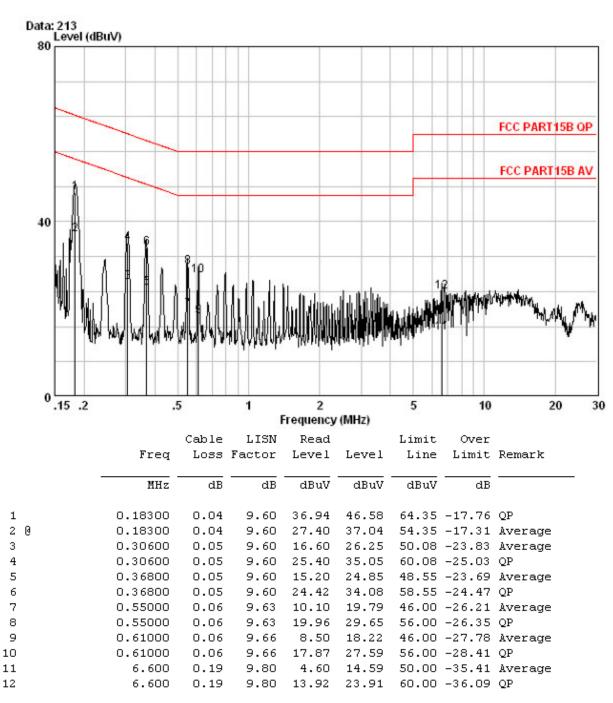

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM110800302201

Page: 13 of 48

Neutral line:

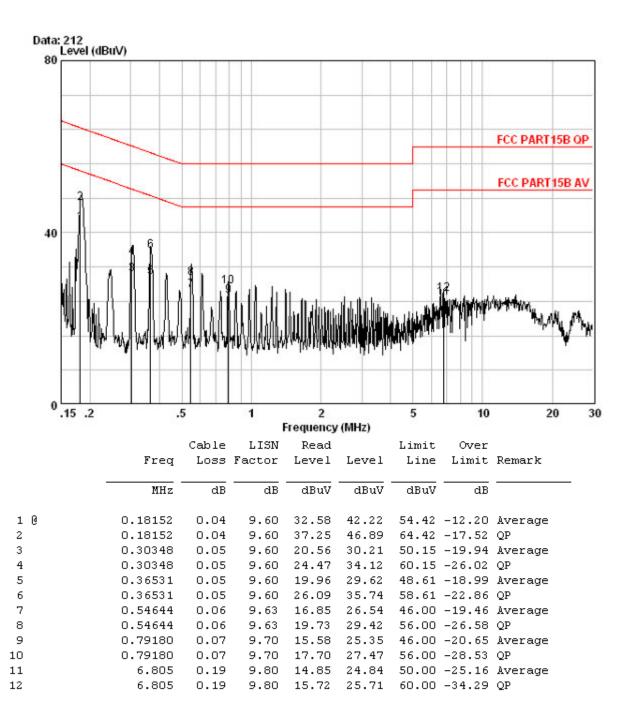

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM110800302201

Page: 14 of 48

5.3 Conducted Peak Output Power

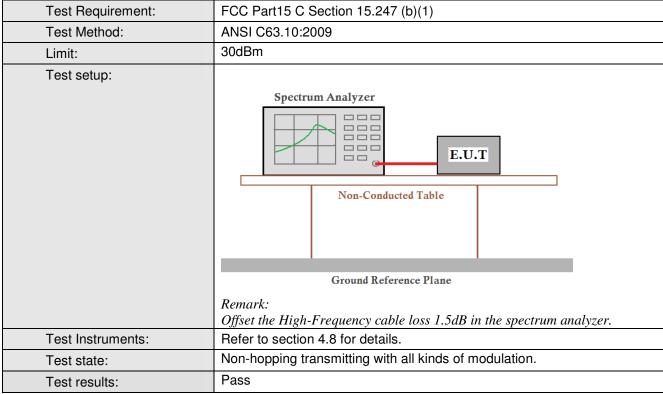

Measurement Data

GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result	
Lowest	-2.32	30.00	Pass	
Middle	-2.54	30.00	Pass	
Highest	-3.36	30.00	Pass	




Report No.: SZEM110800302201


Page: 15 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

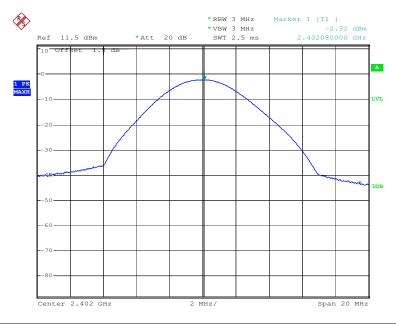

Test mode: GFSK Test channel: Middle

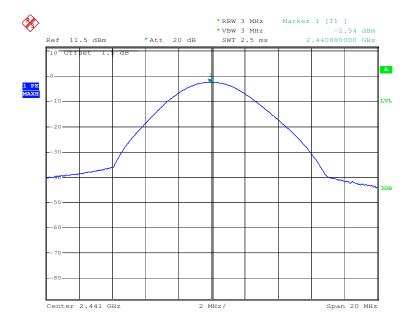




Report No.: SZEM110800302201

Page: 16 of 48

Test mode: GFSK Test channel: Highest

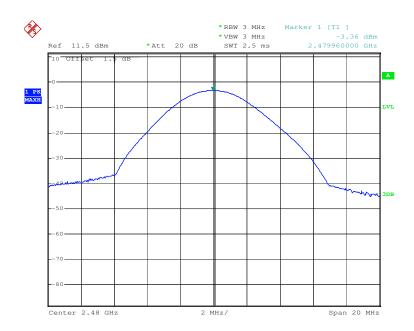



Report No.: SZEM110800302201

Page: 17 of 48

5.4 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	NA	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Non-hopping transmitting with all kind of modulation.	
Test results:	Pass	

Measurement Data

Test channel			
Lowest	Middle	Highest	
1134kHz	1134kHz	1128 kHz	




Report No.: SZEM110800302201


Page: 18 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

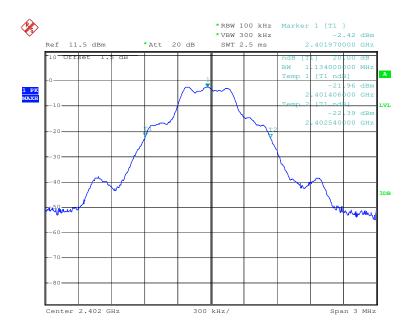

Test mode: GFSK Test channel: Middle

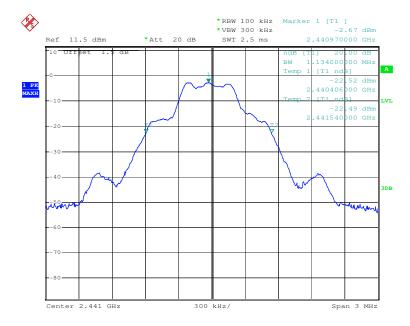




Report No.: SZEM110800302201

Page: 19 of 48

Test mode: GFSK Test channel: Highest

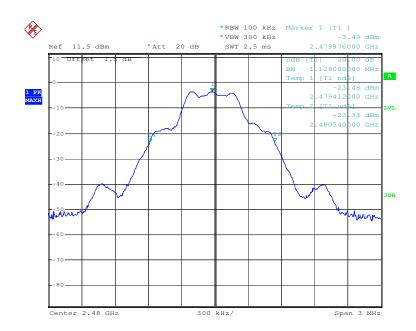



Report No.: SZEM110800302201

Page: 20 of 48

5.5 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test state:	Hopping transmitting with all kind of modulation.		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Test Instruments:	Refer to section 4.8 for details		
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)		
Test results:	Pass		





Report No.: SZEM110800302201

Page: 21 of 48

Measurement Data

GFSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1000	≥752	Pass		
Middle	1004	≥752	Pass		
Highest	1000	≥752	Pass		

Note: According to section 5.4,

Mode	20dB bandwidth (kHz)	Limit (kHz)	
Mode	(worse case)	(Carrier Frequencies Separation)	
GFSK	1128	752	




Report No.: SZEM110800302201


Page: 22 of 48

Test plot as follows:

Test mode: GFSK Test channel: Lowest

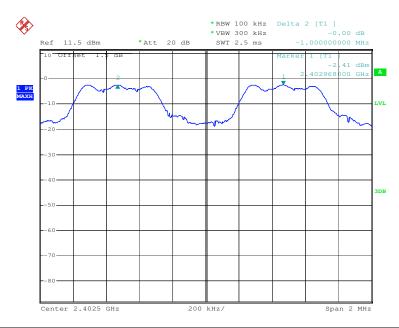

Test mode: GFSK Test channel: Middle

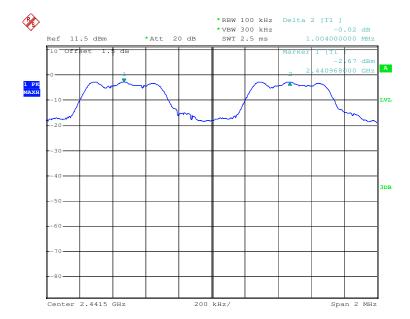




Report No.: SZEM110800302201

Page: 23 of 48

Test mode: GFSK Test channel: Highest

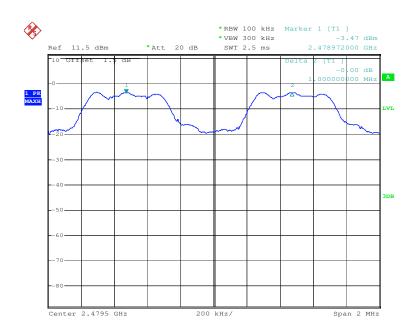



Report No.: SZEM110800302201

Page: 24 of 48

5.6 Hopping Channel Number


ord response charmes			
Test Requirement:	FCC Part15 C Section 15.247 (b)		
Test Method:	ANSI C63.10:2009		
Limit:	75channels		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Test Instruments:	Refer to section 4.8 for details		
Test state:	Hopping transmitting with all kind of modulation.		
Test results:	Pass		

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥75

Test plot as follows

Test mode:	GESK		

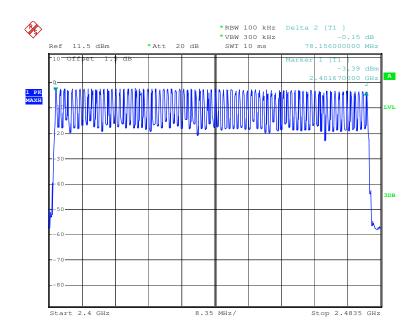



Report No.: SZEM110800302201

Page: 25 of 48

5.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Limit:	0.4 Second		
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
-	Ground Reference Plane		
Test Instruments:	Refer to section 4.8 for details.		
Test state:	Hopping transmitting with all kind of modulation.		
Test results:	Pass		

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)		
	DH1	0.1440	0.4		
GFSK	DH3	0.2736	0.4		
	DH5	0.3179	0.4		

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow

DH1 time slot=0.450(ms)*(1600/ (2*79))*31.6=0.1440ms

DH3 time slot=1.710(ms)*(1600/ (4*79))*31.6=0.2736ms

DH5 time slot=2.980(ms)*(1600/ (6*79))*31.6=0.3179ms





Report No.: SZEM110800302201


Page: 26 of 48

Test plot as follows

Test mode: GFSK Test Packet: DH1

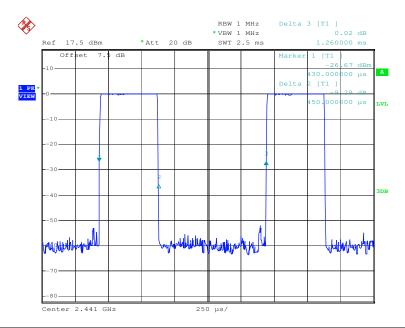



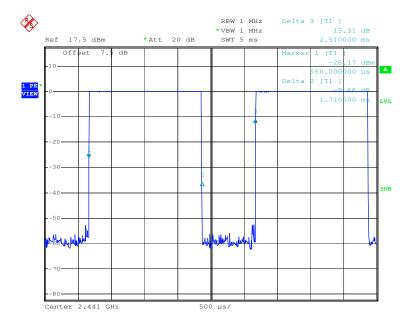




Report No.: SZEM110800302201

Page: 27 of 48

Test mode: GFSK Test Packet: DH5

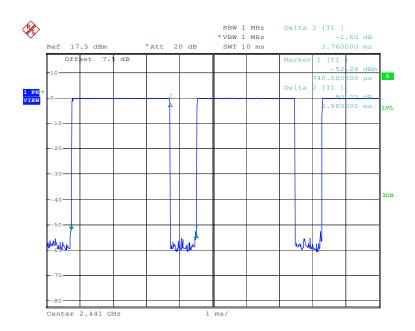



Report No.: SZEM110800302201

Page: 28 of 48

5.8 Band Edge

FCC Part15 C Section 15.247 (d)		
ANSI C63.10:2009		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Refer to section 4.8 for details. Non hopping transmitting and Hopping transmitting with all kinds of modulation. Pass		





Report No.: SZEM110800302201

Page: 29 of 48

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
1 001 111000.	GI OIX	i oot onamon.	1 2011001

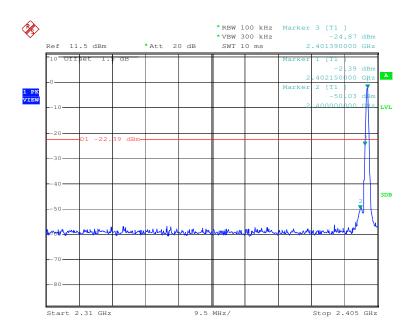

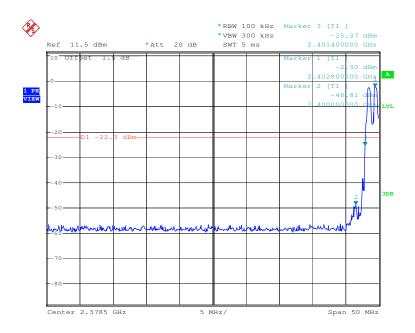





Report No.: SZEM110800302201

Page: 30 of 48

Test mode: GFSK Test channel: Highest

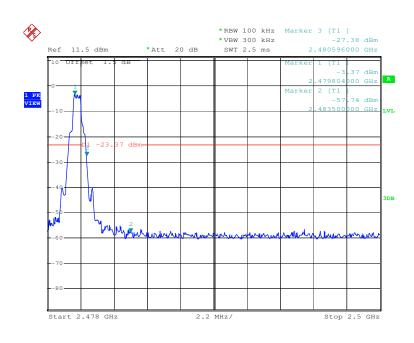

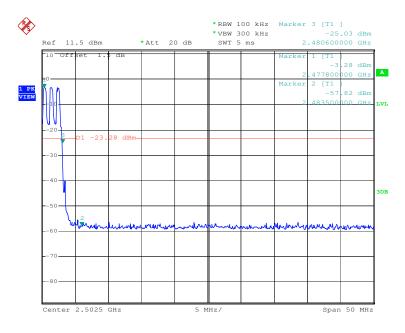





Report No.: SZEM110800302201

Page: 31 of 48

5.9 RF Antenna Conducted spurious emissions


Test Requirement:	FCC Part15 C Section 15.247 (d)		
Test Method:	ANSI C63.10:2009		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dE below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.		
Test setup:			
	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:		
Test lestruments	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.8 for details.		
Test results:	Pass		




Report No.: SZEM110800302201

Page: 32 of 48

Test mode: GFSK Test channel: Lowest

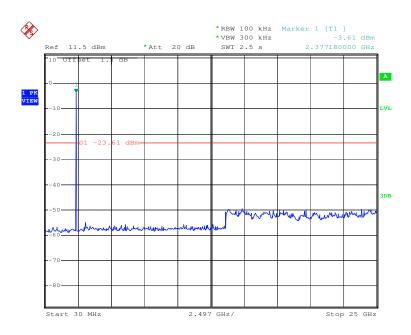

Test mode: GFSK Test channel: Middle

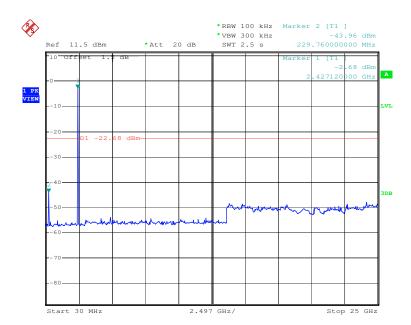




Report No.: SZEM110800302201

Page: 33 of 48

Test mode: GFSK Test channel: Highest

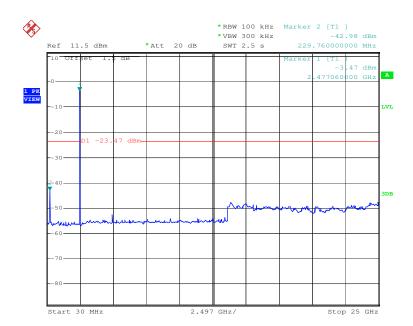



Report No.: SZEM110800302201

Page: 34 of 48

5.10Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM110800302201

Page: 35 of 48

5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	, , , , , , , , , , , , , , , , , , ,				
·	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
	710070 10112	Peak	1MHz	10Hz	Average Value
Limit:	r				
'	Freque	ncy	Limit (dBuV/	m @3m)	Remark
	30MHz-8		40.0)	Quasi-peak Value
	88MHz-21		43.5	5	Quasi-peak Value
	216MHz-9		46.0		Quasi-peak Value
	960MHz-	1GHz	54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
Test Procedure:					
	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.				
Test Instruments:	Refer to section 4.8 for details.				



Report No.: SZEM110800302201

Page: 36 of 48

Test mode: Test results:	Charge + transmitting mode, Transmitting mode Pre-scan was performed at the EUT in above modes, and then found the Charge + transmitting mode was the worst case. Only the worst case data was displayed. Pass
Test setup:	Antenna Tower Search Antenna RF Test Receiver Ground Plane Above 1GHz Antenna Tower Horn Antenna Spectrum Analyzer Amplifier

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: SZEM110800302201

Page: 37 of 48

5.11.1 Radiated emission below 1GHz

Horizontal:

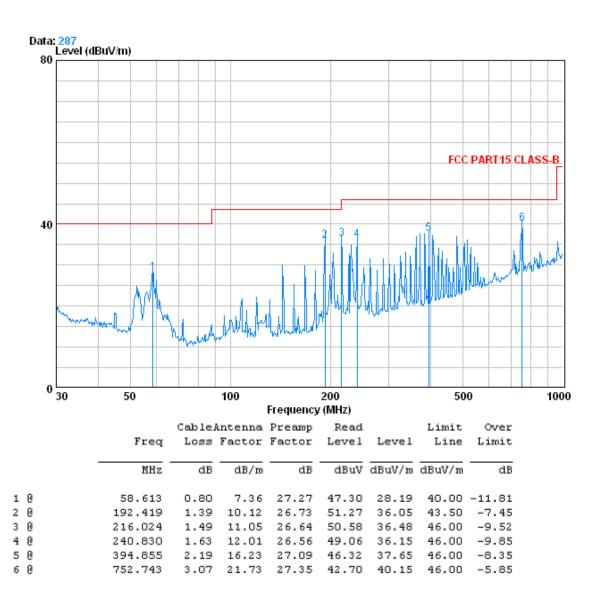


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800302201

Page: 38 of 48

Vertical:

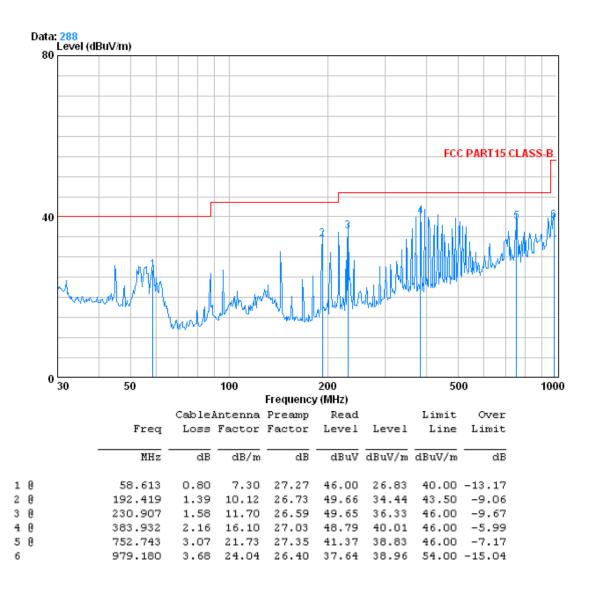



Test mode:

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800302201

Remark:

Peak

Page: 39 of 48

5.11.2 Transmitter emission above 1GHz

GFSK

Test mode:		GFSK	Tes	t channel:	Lowest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4701.250	4.62	34.87	41.56	49.11	47.04	74.00	-26.96	Vertical
6957.250	5.50	35.85	40.08	49.68	50.95	74.00	-23.05	Vertical
7791.500	6.22	36.00	39.38	49.21	52.05	74.00	-21.95	Vertical
8825.500	6.16	36.45	38.47	47.36	51.50	74.00	-22.50	Vertical
10435.250	6.08	38.22	37.63	45.74	52.41	74.00	-21.59	Vertical
11939.250	6.45	38.83	38.25	46.70	53.73	74.00	-20.27	Vertical
4795.250	4.68	34.73	41.63	49.28	47.06	74.00	-26.94	Horizontal
7521.250	6.15	36.00	39.61	48.44	50.98	74.00	-23.02	Horizontal
9119.250	6.12	36.74	38.22	46.31	50.95	74.00	-23.05	Horizontal
10106.250	6.00	37.84	37.49	45.42	51.77	74.00	-22.23	Horizontal
11234.250	6.28	38.45	37.96	46.28	53.05	74.00	-20.95	Horizontal
12162.500	6.51	39.07	38.35	46.60	53.83	74.00	-20.17	Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4842.250	4.71	34.65	41.65	48.53	46.24	74.00	-27.76	Vertical
6064.250	5.14	35.78	40.86	49.61	49.67	74.00	-24.33	Vertical
7415.500	6.02	35.97	39.69	47.88	50.18	74.00	-23.82	Vertical
8778.500	6.17	36.43	38.52	46.88	50.96	74.00	-23.04	Vertical
10388.250	6.07	38.16	37.61	45.46	52.08	74.00	-21.92	Vertical
12162.500	6.51	39.07	38.35	46.62	53.85	74.00	-20.15	Vertical
4783.500	4.68	34.73	41.61	49.59	47.39	74.00	-26.61	Horizontal
5923.250	5.10	35.59	40.99	50.36	50.06	74.00	-23.94	Horizontal
7756.250	6.22	36.00	39.39	49.40	52.23	74.00	-21.77	Horizontal
9906.500	5.98	37.61	37.53	45.60	51.66	74.00	-22.34	Horizontal
11516.250	6.35	38.42	38.07	46.53	53.23	74.00	-20.77	Horizontal
12362.250	6.56	39.26	38.43	45.99	53.38	74.00	-20.62	Horizontal

Test channel: Middle



Report No.: SZEM110800302201

Page: 40 of 48

Test mode: GFSK	Test channel:	Highest	Remark:	Peak
-----------------	---------------	---------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4971.500	4.76	34.43	41.75	49.07	46.51	74.00	-27.49	Vertical
6287.500	5.20	36.04	40.68	49.68	50.24	74.00	-23.76	Vertical
7568.250	6.19	36.00	39.56	48.99	51.62	74.00	-22.38	Vertical
9577.500	5.99	37.29	37.83	46.40	51.85	74.00	-22.15	Vertical
11739.500	6.40	38.64	38.17	46.74	53.61	74.00	-20.39	Vertical
12538.500	6.61	39.42	38.50	46.40	53.93	74.00	-20.07	Vertical
4983.250	4.77	34.43	41.77	50.38	47.81	74.00	-26.19	Horizontal
6675.250	5.30	36.13	40.33	50.01	51.11	74.00	-22.89	Horizontal
8731.500	6.17	36.39	38.55	47.65	51.66	74.00	-22.34	Horizontal
10470.500	6.09	38.26	37.64	45.91	52.62	74.00	-21.38	Horizontal
11610.250	6.37	38.50	38.11	46.34	53.10	74.00	-20.90	Horizontal
12174.250	6.51	39.07	38.35	46.29	53.52	74.00	-20.48	Horizontal

Remark:

- 1. The disturbance above 13 GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.






Report No.: SZEM110800302201

Page: 41 of 48

5.11.3 Band edge (Radiated Emission)

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak
------------	--------------	---------------	--------	---------	------

Vertical:

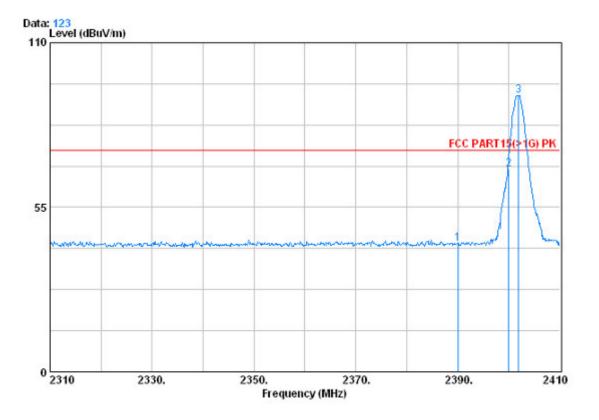


	Freq			Preamp Factor			Limit		Remark
	MHz	dB	dB/m	——dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	2.98	32.51	39.85	47.15	42.79	74.00	-31.21	Peak
2	2400.000	2.98	32.51	39.86	72.20	67.83	74.00	-6.17	Peak
3 X	2401.900	2.98	32.51	39.86	96.71	92.35	74.00	18.35	Peak



Report No.: SZEM110800302201

Page: 42 of 48

Horizontal:

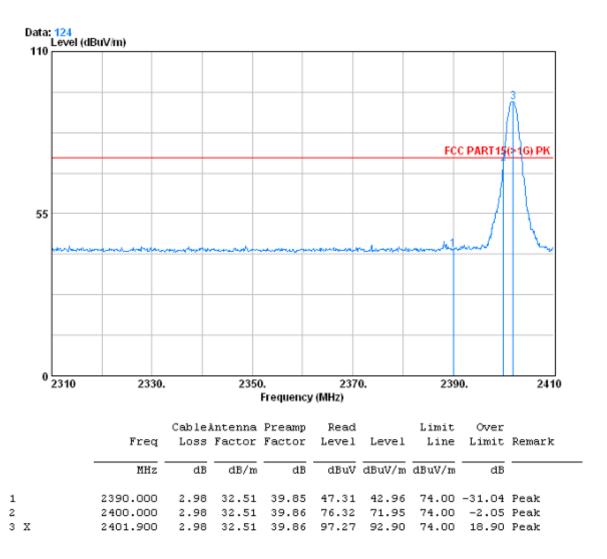

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM110800302201

Page: 43 of 48

Test mode: Transmitting	Test channel:	Lowest	Remark:	Average
-------------------------	---------------	--------	---------	---------

Vertical:

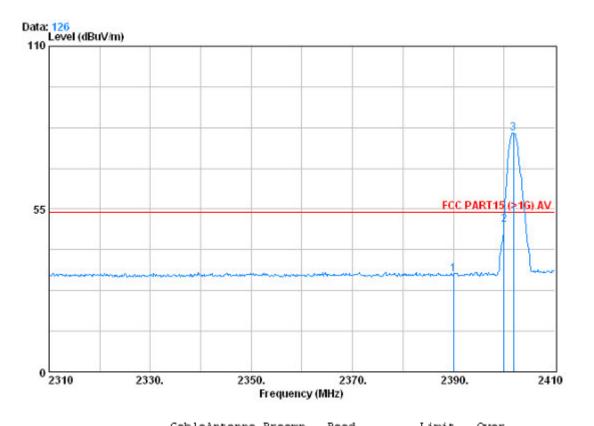


		capie	intenna	rreamp	Keaa		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	-								
	1517-	-170	-4D /	-12	-1577	-170 - 177 / · · ·	-2T27 /	-17	
	MHz	dB	dB/m	ав	asuv	dBuV/m	asuv/m	dB	
1	2390.000	2.98	32.51	39.85	37.34	32.99	54.00	-21.01	Peak
2	2400.000	2.98	32.51	39.86	54.18	49.81	54.00	-4.19	Peak
3 0	2401.800	2.98	32.51	39.86	85.01	80.64	54.00	26.64	Peak



Report No.: SZEM110800302201

Page: 44 of 48

Horizontal:

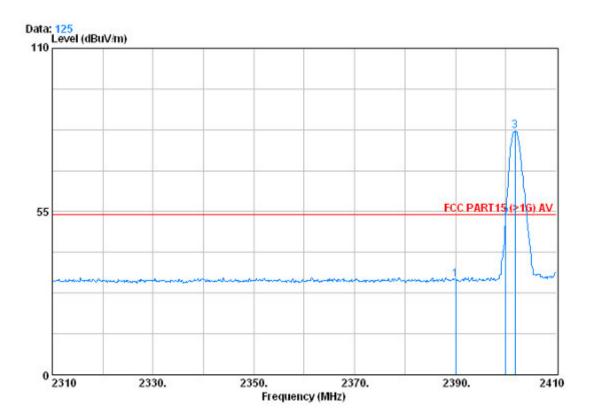

Cable.	Àntenna	Preamp	Read		Limit	Over	
Loss	Factor	Factor	Level	Level	Line	Limit	Remark
——dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
2.98	32.51	39.85	36.55	32.20	54.00	-21.80	Peak
	Loss dB 2.98 2.98	Loss Factor dB dB/m 2.98 32.51 2.98 32.51	Loss Factor Factor dB dB/m dB 2.98 32.51 39.85 2.98 32.51 39.86	Loss Factor Factor Level dB dB/m dB dBuV 2.98 32.51 39.85 36.55 2.98 32.51 39.86 57.12	dB dB/m dB dBuV dBuV/m 2.98 32.51 39.85 36.55 32.20 2.98 32.51 39.86 57.12 52.75	Loss Factor Factor Level Level Line dB dB/m dB dBuV dBuV/m dBuV/m 2.98 32.51 39.85 36.55 32.20 54.00 2.98 32.51 39.86 57.12 52.75 54.00	Loss Factor Factor Level Level Line Limit




Report No.: SZEM110800302201

Page: 45 of 48

Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak

Vertical:

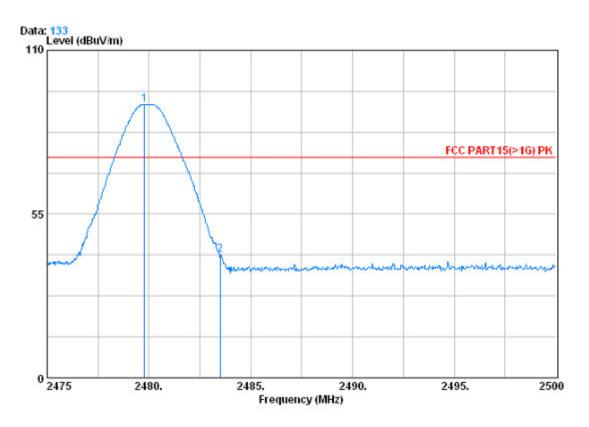


		Cablekntenna 1		Preamp Read			Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
	*****	GLD.	CLD, III	ab	abav	CLD CLV / III	abav, m	G,D	
1 X	2479.775	3.03	32.67	39.92	96.05	91.83	74.00	17.83	Peak
2	2483.500	3.03	32.67	39.92	45.57	41.35	74.00	-32.65	Peak



Report No.: SZEM110800302201

Page: 46 of 48

Horizontal:

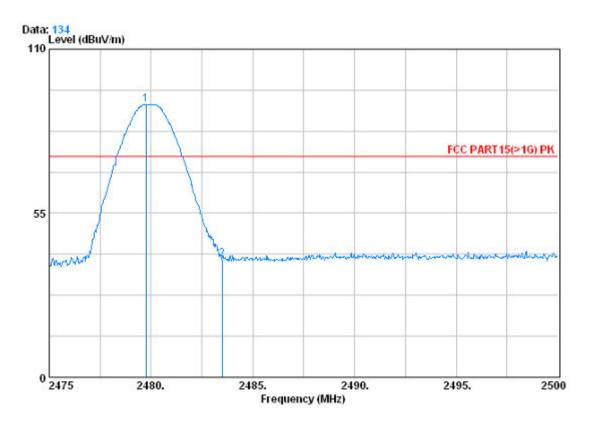

		Cablei	lntenna	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 X	2479.750	3.03	32.67	39.92	95.74	91.52	74.00	17.52	Peak
2	2483.500	3.03	32.67	39.92	43.79	39.57	74.00	-34.43	reak




Report No.: SZEM110800302201

Page: 47 of 48

Test mode: T	Fransmitting	Test channel:	Highest	Remark:	Average
--------------	--------------	---------------	---------	---------	---------

Vertical:

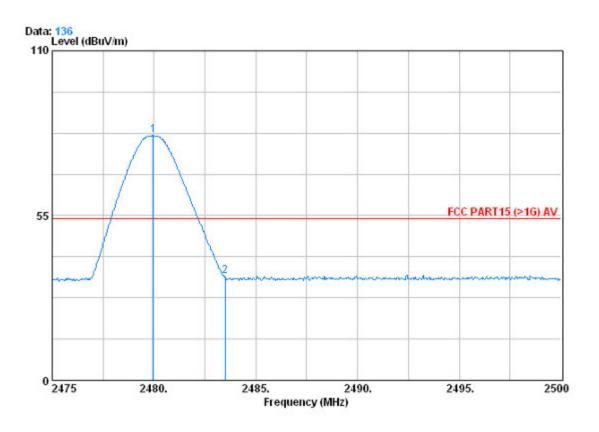


	Freq			Preamp Factor				Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 @ 2	2479.950 2483.500			39.92 39.92					



Report No.: SZEM110800302201

Page: 48 of 48

Horizontal:

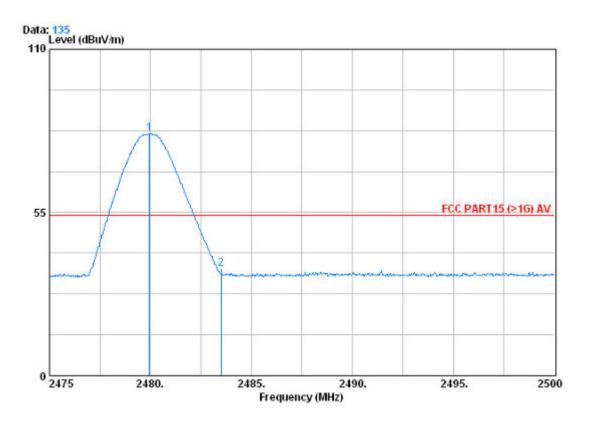

	С	ablek	ntenna	Preamp	Read		Limit	Over		
	Freq	Loss 1	Factor	Factor	Level	Level	Line	Limit	Remark	
	-									
	MHz	dB	dB/m	-dB	dBuV	dBuV/m	dBuV/m	dB		
			0.27 1.11	az	azar	OLD OLD / III	CLD CLT / III	ab		
									n 1-	
Z4	479.950	3.03	32.67	39.92	85.69	81.47	54.00	27.47	Peak	
24	483.500	3.03	32.67	39.92	40.26	36.04	54.00	-17.96	Peak	
	479.950	3.03	32.67	39.92	85.69	81.47	54.00	27.47		