



198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology

Development District, Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

Email: [sgs\\_internet\\_operations@sgs.com](mailto:sgs_internet_operations@sgs.com)

**FEDERAL COMMUNICATIONS COMMISSION**

Registration number: 282399

Report No.: GZEM110900330601

Page: 1 of 26

FCC ID: XJJCHANGCHENG2

## TEST REPORT

<b>Application No.:</b>	GZEM1109003306RF
<b>Applicant:</b>	CHANGCHENG PLASTIC FACTORY
<b>FCC ID:</b>	XJJCHANGCHENG2
<b>Product Name:</b>	REMOTE CONTROL HELICOPTER SERIES
<b>Product Description:</b>	Radio control toys with 2.4 GHz as carrier
<b>Model No.:</b>	9958, 9978, 9988, 9998, 9968, 9938, 9928, H995 *
*	Please refer to section 3 of this report for details
<b>Standards:</b>	FCC PART 15 Subpart C: 2010 section 15.249
<b>Date of Receipt:</b>	2011-09-02
<b>Date of Test:</b>	2011-09-05 to 2011-10-18
<b>Date of Issue:</b>	2011-10-21
<b>Test Result :</b>	<b>Pass*</b>

\* In the configuration tested, the EUT complied with the standards specified above.

Strong Yao  
Manager



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2011-10-21		Original

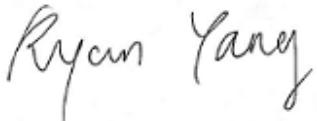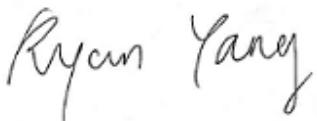Authorized for issue by:			
Tested By	 (Ryan Yang) / Project Engineer	2011-09-05 to 2011-10-18	Date
Prepared By	 (Ryan Yang) / Project Engineer	2011-10-20	Date
Checked By	 Strong Yao/ Reviewer	2011-10-21	Date

### 3 Test Summary

Test	Test Requirement	Test method	Result
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS **
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.6 and 6.7	PASS **
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.9	PASS

**Remark:**

EUT: In this whole report EUT means Equipment Under Test.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radio Frequency.

ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.

\*\* The EUT passed Field Strength of Fundamental and Field Strength of Unwanted Emissions tests after retest.

♣ Model No.: 9958, 9978, 9988, 9998, 9968, 9938, 9928, H995

According to the confirmation from the applicant, since the electrical circuit design, layout, components used and internal wiring were identical for the above items, only difference being the color and appearance.

Therefore only one item **9958** was tested in this report.

## 4 Contents

<b>1</b>	<b>COVER PAGE</b>	<b>1</b>
<b>2</b>	<b>VERSION</b>	<b>2</b>
<b>3</b>	<b>TEST SUMMARY</b>	<b>3</b>
<b>4</b>	<b>CONTENTS</b>	<b>4</b>
<b>5</b>	<b>GENERAL INFORMATION</b>	<b>5</b>
5.1	Client Information	5
5.2	General Description of E.U.T.	5
5.3	Details of E.U.T.	5
5.4	Description of Support Units	5
5.5	Other Information Requested by the Customer	5
5.6	Deviation from Standards	5
5.7	Test Location	5
<b>6</b>	<b>EQUIPMENT USED DURING TEST</b>	<b>7</b>
<b>7</b>	<b>TEST RESULTS</b>	<b>8</b>
7.1	E.U.T. Operation	8
7.2	Antenna Requirement	10
7.3	Field Strength of Fundamental& Field Strength of Unwanted Emissions	11
7.4	Occupied Bandwidth & Band Edge	23

## 5 General Information

### 5.1 Client Information

Applicant: CHANGCHENG PLASTIC FACTORY  
Address of Applicant: South Port Section, Chenglai Road, Chenghai District, Shantou City, Guangzhou, China

### 5.2 General Description of E.U.T.

Product Name: REMOTE CONTROL HELICOPTER SERIES  
Model No.: 9958, 9978, 9988, 9998, 9968, 9938, 9928, H995

### 5.3 Details of E.U.T.

Operating Frequency 2402MHz~2480MHz  
Type of Modulation: GFSK  
Number of Channels 16  
Channel Separation: 5MHz  
Antenna Type Integral antenna  
Antenna gain: 0 dBi  
Function: The EUT had been fixed three channels, and the Tx generated carrier 2402MHz, 2442MHz, and 2480MHz to control helicopter.  
Power Supply: DC 9.0V (1.5V size "AA" batteries x 6 )  
Power cord: N/A

### 5.4 Description of Support Units

The EUT has been tested as an independent unit.

### 5.5 Other Information Requested by the Customer

None.

### 5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

The EUT passed Field Strength of Fundamental and Field Strength of Unwanted Emissions tests after retest

### 5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,  
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

## 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460 and C-2584)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460 and C-2584 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.

## 6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2012-09-06	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2012-01-17	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2012-06-01	1Y
EMC0514	Coaxial cable	SGS	N/A	N/A	2011-12-08	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2012-10-20	1Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2011-12-20	1Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2011-12-20	1Y
EMC2026	Horn Antenna 1-18GHz	R&S	BBHA 9120D	9120D-841	2012-10-20	1Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2012-08-29	1Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2012-01-17	1Y
EMC0049	Amplifier	Agilent	8447D	2944A10862	2012-04-21	1Y
EMC0075	310N Amplifier	Sonama	310N	272683	2012-08-29	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2011-11-17	1Y
EMC2041	Broad-Band Horn Antenna(14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONI	BBHA 9170	9170-375	2012-06-01	1Y
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	2012-05-10	2Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0006	DMM	Fluke	73	70681569	2011-12-16	1Y
EMC0007	DMM	Fluke	73	70671122	2011-12-16	1Y

## 7 Test Results

### 7.1 E.U.T. Operation

**Power supply:** DC 9.0V  
**Temperature:** 20.0 -25.0 °C  
**Humidity:** 38-50 % RH  
**Atmospheric Pressure:** 1000 -1010 mbar

**Test frequencies and frequency range:** According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

#### Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

#### Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified

EUT channels and frequencies list:

Channel	Frequency
0	2402
1	2407
2	2412
3	2417
4	2422
5	2427
6	2432
7	2437
8	2442
9	2447
10	2452
11	2457
12	2462
13	2467
14	2472
15	2480

Test frequencies are the lowest channel: 0 channel(2402 MHz), middle channel: 8 channel(2442 MHz) and highest channel: 15 channel(2480 MHz)

## 7.2 Antenna Requirement

### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to

Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### EUT Antenna

The antenna is an integral antenna and no consideration of replacement. The best case gain of the antenna is 0 dBi.

**Test result: The unit does meet the FCC requirements.**

### 7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m @ 3m)	Field Strength of Harmonics (dB $\mu$ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency range is in the frequency band of the EUT is 2402MHz ~ 2480MHz.

The limit for Average field strength dB $\mu$ V/m for the fundamental frequency = 94.0 dB $\mu$ V/m.

The limit for Peak field strength dB $\mu$ V/m for the fundamental frequency = 114.0 dB $\mu$ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB $\mu$ V/m for the harmonics = 54.0 dB $\mu$ V/m.

The limit for peak field strength dB $\mu$ V/m for the harmonics = 74.0 dB $\mu$ V/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dB $\mu$ V/m in 15.209. Here the limit for the other emission is 54.0 dB $\mu$ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.6 and 6.7

Status Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z three axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 30 MHz – 25 GHz for transmitting mode.

Test instrumentation resolution bandwidth  
120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 26 GHz)

**Test Procedure:**

## 1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT, During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

## 2) 30 MHz to 1 GHz emissions:


For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

## 3) 1 GHz to 25 GHz emissions:


For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

**Test Configuration:**


## 1) 9 kHz to 30 MHz emissions:

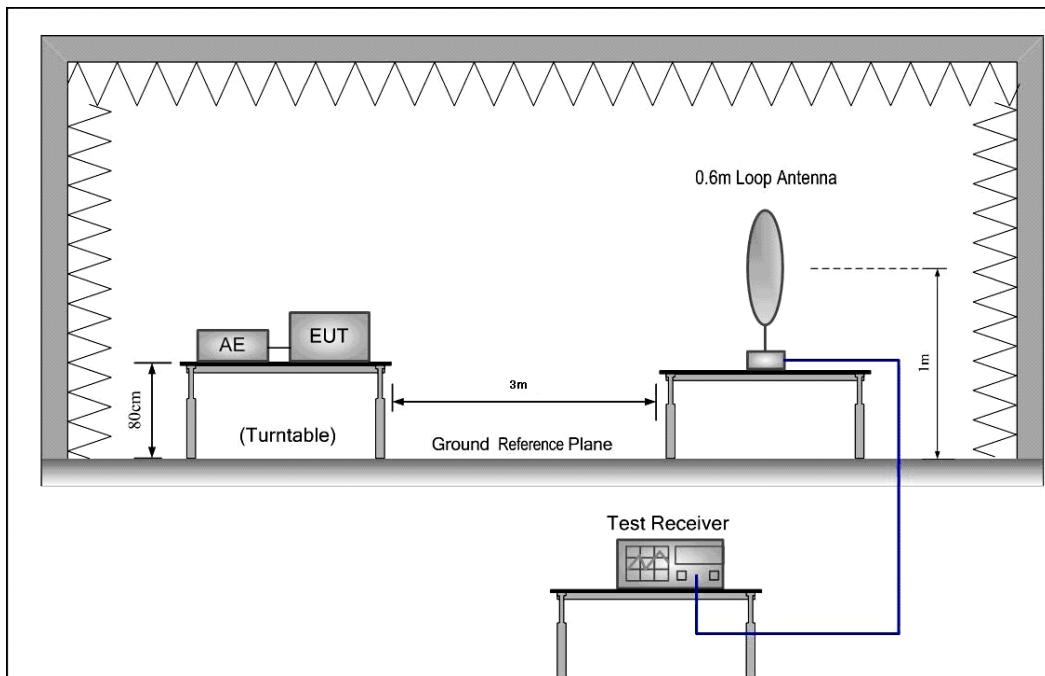

## 2) 30 MHz to 1 GHz emissions:

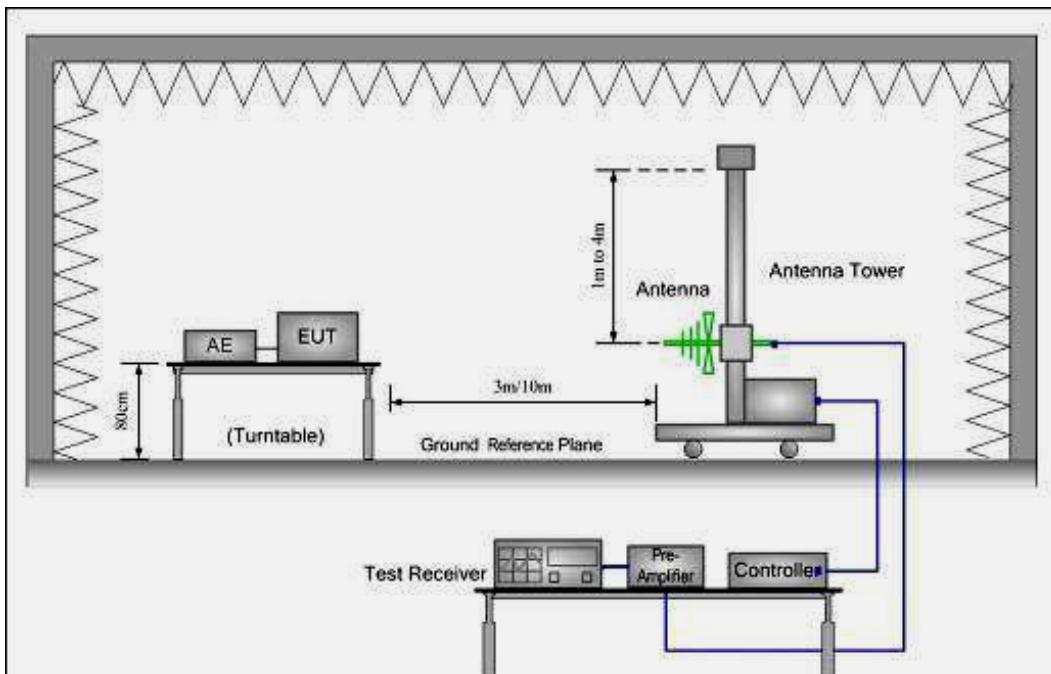

## 3) 1 GHz to 25 GHz emissions:

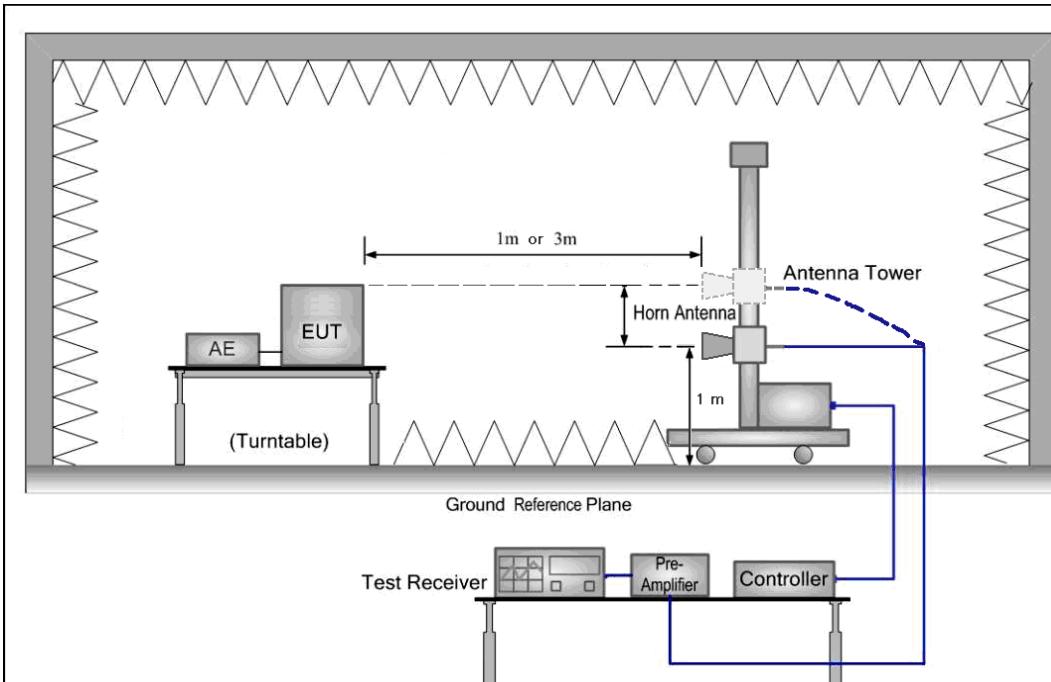

The field strength is calculated by adding the Antenna Factor, Cable Loss & Per-amplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor

**Test at low Channel in transmitting status**

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

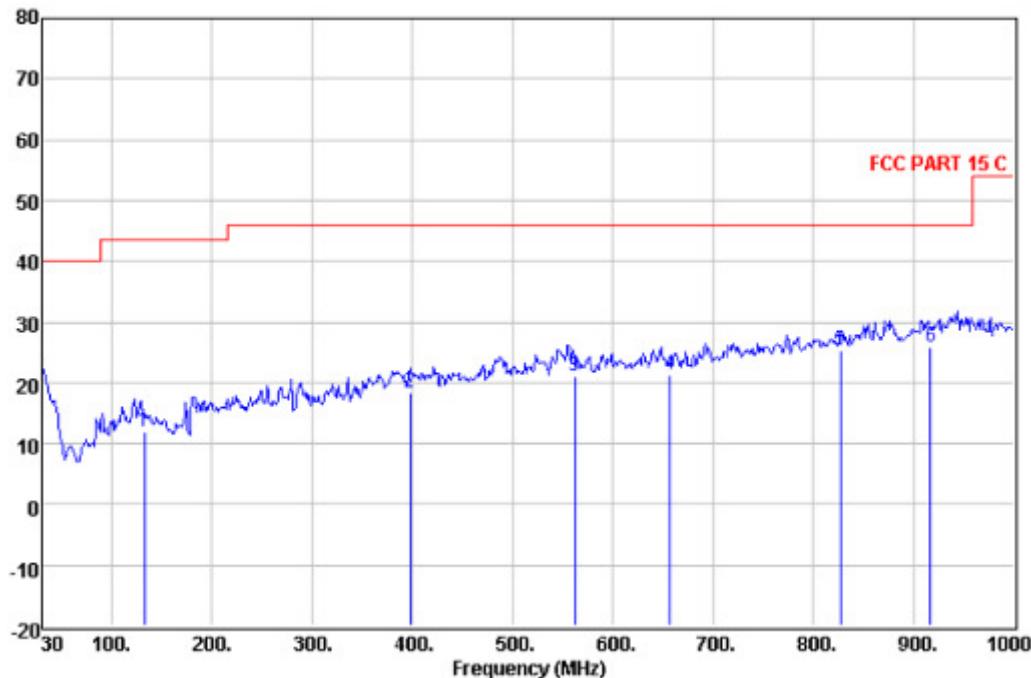
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable Preamp		Over Limit	Line Remark	
	Level	Factor	Loss	Factor			
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB	dB $\mu$ V/m
131.850	26.35	11.89	1.13	27.50	11.87	-31.63	43.50 QP
397.630	28.07	15.90	2.08	27.75	18.30	-27.70	46.00 QP
561.560	28.42	18.40	2.53	28.25	21.10	-24.90	46.00 QP
656.620	28.02	18.64	2.71	28.09	21.28	-24.72	46.00 QP
827.340	28.98	20.58	3.20	27.36	25.40	-20.60	46.00 QP
917.550	28.15	20.97	3.53	26.77	25.88	-20.12	46.00 QP

**Horizontal:**

Peak scan

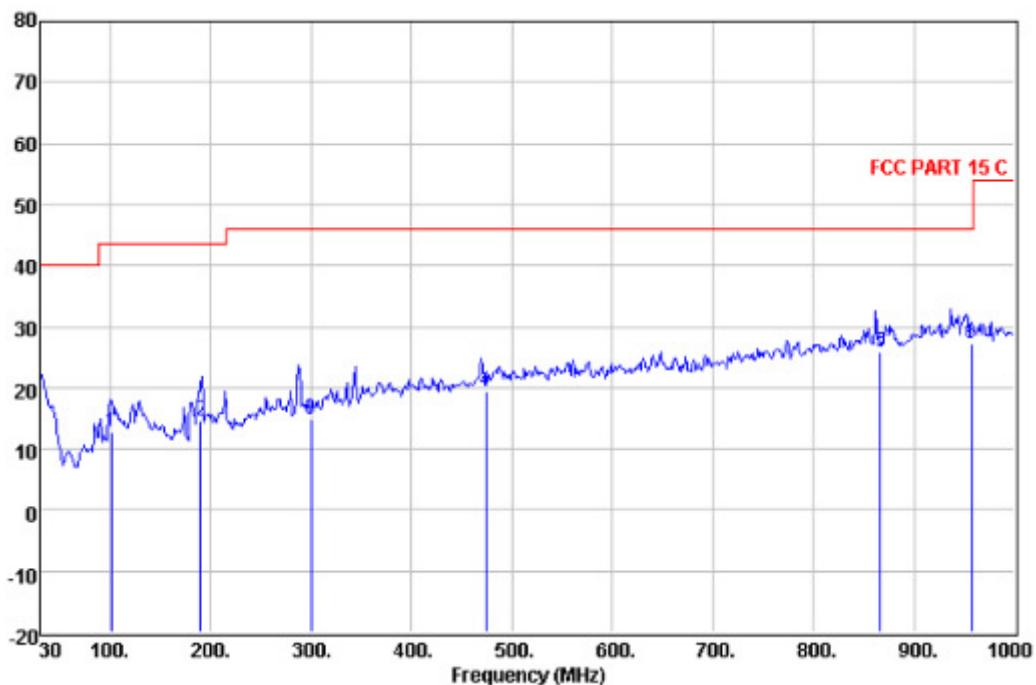Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq MHz	Read	Antenna Level	Cable Factor	Preamp Loss	Over Level	Limit	Line Remark
	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB	dB $\mu$ V/m
101.360	28.36	11.03	1.01	27.67	12.73	-30.77	43.50 QP
190.060	32.06	8.40	1.28	27.27	14.47	-29.03	43.50 QP
300.010	27.48	12.60	1.81	27.07	14.82	-31.18	46.00 QP
474.299	27.95	17.17	2.31	27.97	19.46	-26.54	46.00 QP
866.840	28.85	20.63	3.36	27.03	25.81	-20.19	46.00 QP
956.890	29.30	21.23	3.62	26.85	27.30	-18.70	46.00 QP

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

**Peak Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2402.00	93.88	35.04	27.58	6.14	92.56	114.00	V
4805.50	52.52	34.30	31.53	8.98	58.73	74.00	V
6642.00	45.00	34.30	34.52	16.86	62.08	74.00	V
7206.00	47.79	34.30	36.47	12.32	62.28	74.00	V
2402.00	85.39	35.04	27.58	6.14	84.07	114.00	H
3653.00	44.93	34.43	29.22	9.03	48.75	74.00	H
4805.00	52.71	34.30	31.53	8.98	58.92	74.00	H
7206.00	46.01	34.30	36.47	12.32	60.50	74.00	H

**Average Measurement:**


Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2402.00	61.32	35.04	27.58	6.14	60.00	94.00	V
4805.50	40.80	34.30	31.53	8.98	47.01	54.00	V
6642.00	32.67	34.30	34.52	16.86	49.75	54.00	V
7206.00	34.48	34.30	36.47	12.32	48.97	54.00	V
2402.00	64.11	35.04	27.58	6.14	62.79	94.00	H
3653.00	37.30	34.43	29.22	9.03	41.12	54.00	H
4805.00	42.35	34.30	31.53	8.98	48.56	54.00	H
7206.00	34.49	34.30	36.47	12.32	48.98	54.00	H

**Test at middle Channel in transmitting status**

30 MHz~1 GHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement

Vertical:

Peak scan

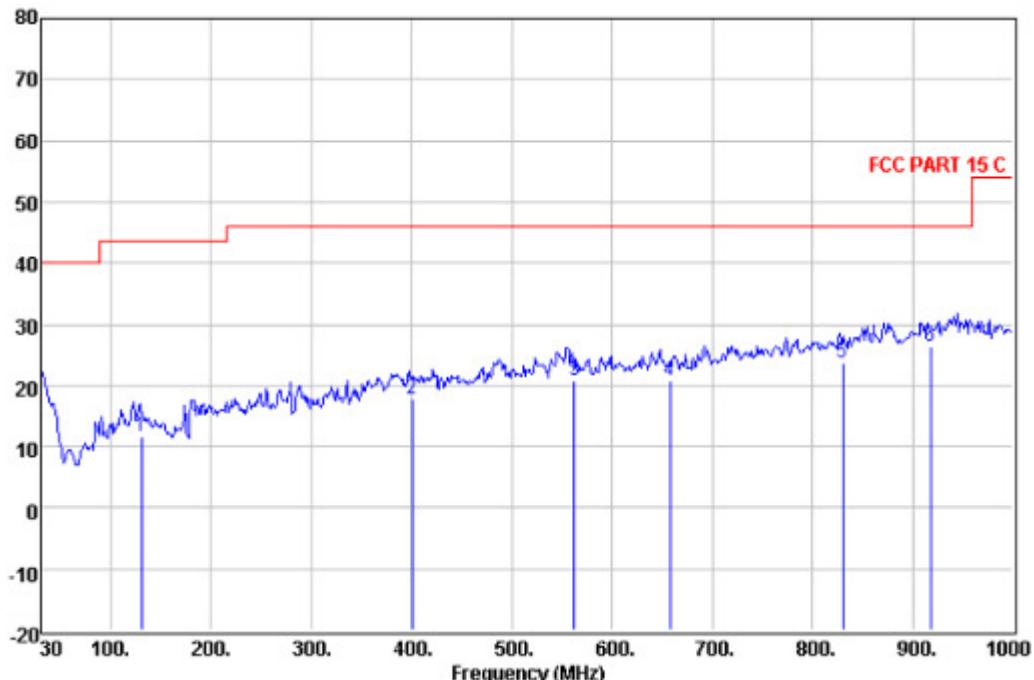
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable		Preamp	Over	Limit	Line	Remark
	Level	Factor	Loss	Factor					
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB	dB $\mu$ V/m		
130.520	26.04	11.97	1.13	27.51	11.63	-31.87	43.50	QP	
400.960	27.59	16.00	2.08	27.77	17.90	-28.10	46.00	QP	
562.380	28.16	18.40	2.53	28.26	20.83	-25.17	46.00	QP	
657.800	27.50	18.62	2.71	28.08	20.75	-25.25	46.00	QP	
830.150	27.37	20.60	3.22	27.36	23.83	-22.17	46.00	QP	
918.100	28.66	21.00	3.53	26.77	26.42	-19.58	46.00	QP	

**Horizontal:**

Peak scan

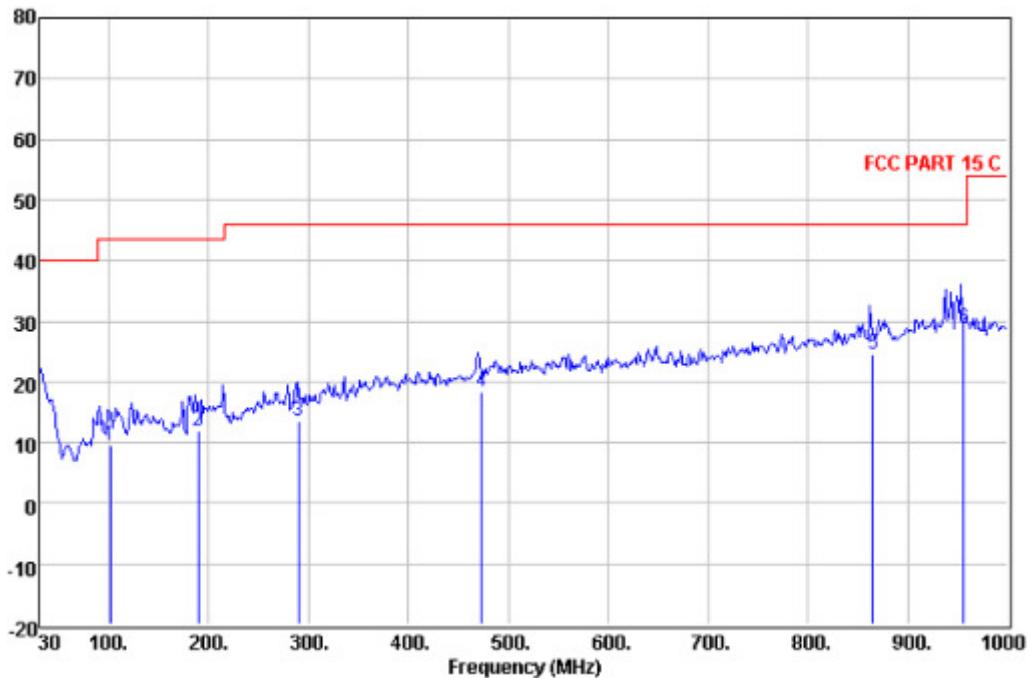Level (dB $\mu$ V/m)

## Quasi-peak measurement

Freq MHz	Read	Antenna Level	Cable Factor	Preamp Loss	Over Level	Limit	Line	Remark
	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB	dB $\mu$ V/m	
100.810	25.15	10.97	1.00	27.68	9.44	-34.06	43.50	QP
189.080	29.40	8.39	1.28	27.28	11.79	-31.71	43.50	QP
289.960	26.16	12.70	1.77	27.08	13.55	-32.45	46.00	QP
473.290	26.83	17.17	2.29	27.97	18.32	-27.68	46.00	QP
865.280	27.47	20.63	3.36	27.03	24.43	-21.57	46.00	QP
956.240	30.86	21.23	3.62	26.85	28.86	-17.14	46.00	QP

1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

**Peak Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2442.00	93.64	35.01	27.57	6.24	92.44	114.00	V
3254.00	46.45	34.60	28.53	8.18	48.56	74.00	V
4885.00	51.11	34.30	31.58	8.63	57.02	74.00	V
7326.00	45.88	34.30	36.51	12.23	60.32	74.00	V
2442.00	88.65	35.01	27.57	6.24	87.45	114.00	H
3310.00	46.75	34.58	28.36	8.52	49.05	74.00	H
4885.00	50.96	34.30	31.58	8.63	56.87	74.00	H
7206.00	45.25	34.30	36.47	12.32	59.74	74.00	H

**Average Measurement:**


Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2442.00	73.40	35.01	27.57	6.24	72.20	94.00	V
3254.00	36.90	34.60	28.53	8.18	39.01	54.00	V
4885.00	31.11	34.30	31.58	8.63	37.02	54.00	V
7326.00	35.76	34.30	36.51	12.23	50.20	54.00	V
2442.00	65.05	35.01	27.57	6.24	63.85	94.00	H
3310.00	34.95	34.58	28.36	8.52	37.25	54.00	H
4885.00	32.57	34.30	31.58	8.63	38.48	54.00	H
7206.00	35.69	34.30	36.47	12.32	50.18	54.00	H

**Test at high Channel in transmitting status**

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

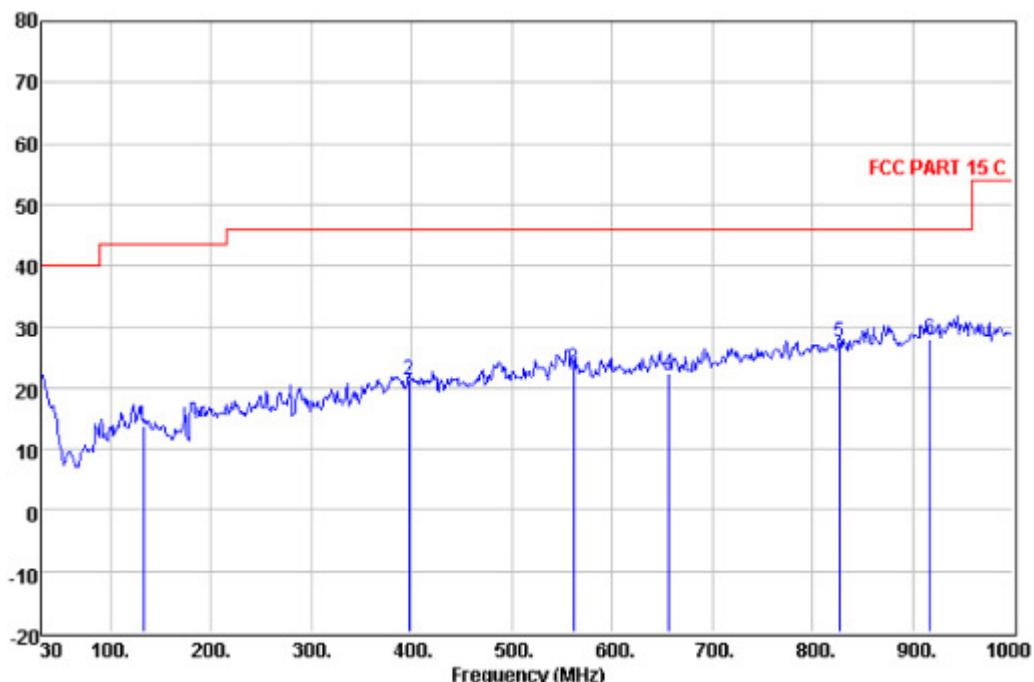
Level (dB $\mu$ V/m)

Quasi-peak measurement

Freq	ReadAntenna		Cable Preamp		Over Limit	Line Remark	
	Level	Factor	Loss	Factor			
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB	dB $\mu$ V/m
131.850	28.35	11.89	1.13	27.50	13.87	-29.63	43.50 QP
397.630	31.07	15.90	2.08	27.75	21.30	-24.70	46.00 QP
561.560	30.42	18.40	2.53	28.25	23.10	-22.90	46.00 QP
656.620	29.02	18.64	2.71	28.09	22.28	-23.72	46.00 QP
827.340	30.98	20.58	3.20	27.36	27.40	-18.60	46.00 QP
917.550	30.15	20.97	3.53	26.77	27.88	-18.12	46.00 QP

**Horizontal:**

Peak scan

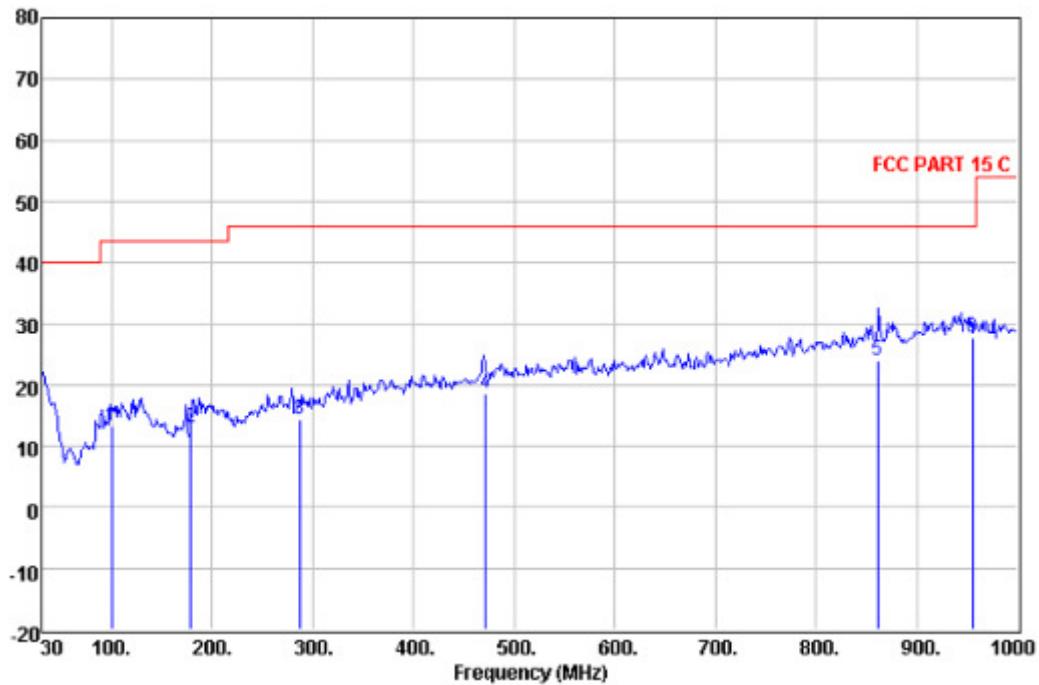Level (dB $\mu$ V/m)

## Quasi-peak measurement

Freq	ReadAntenna		Cable		Over	Limit	Line	Remark
	Level	Factor	Loss	Preamp				
MHz	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB	dB $\mu$ V/m	
99.540	29.19	10.73	1.00	27.68	13.24	-30.26	43.50	QP
178.650	31.29	7.68	1.26	27.31	12.92	-30.58	43.50	QP
286.540	27.17	12.46	1.76	27.09	14.30	-31.70	46.00	QP
471.170	27.08	17.10	2.29	27.97	18.50	-27.50	46.00	QP
861.240	27.14	20.50	3.33	27.06	23.91	-22.09	46.00	QP
955.700	29.65	21.23	3.61	26.85	27.64	-18.36	46.00	QP

**1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.****Peak & Average Measurement****Peak Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2480.00	92.06	34.99	27.56	6.27	90.90	114.00	V
4290.00	45.83	34.30	30.38	9.36	51.27	74.00	V
4955.00	51.33	34.30	31.68	8.28	56.99	74.00	V
7440.00	46.47	34.30	36.60	12.14	60.91	74.00	V
2480.00	86.74	34.99	27.56	6.27	85.58	114.00	H
3268.00	46.76	34.59	28.46	8.18	48.81	74.00	H
4955.00	51.01	34.30	31.68	8.28	56.67	74.00	H
7440.00	45.74	34.30	36.60	12.14	60.18	74.00	H

**Average Measurement:**

Frequency (MHz)	Reading Level (dB $\mu$ V)	Preamp factor (dB)	Antenna factors (dB/m)	Cable loss (dB)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Antenna polarization
2480.00	79.60	34.99	27.56	6.27	78.44	94.00	V
4290.00	35.25	34.30	30.38	9.36	40.69	54.00	V
4955.00	43.72	34.30	31.68	8.28	49.38	54.00	V
7440.00	35.95	34.30	36.60	12.14	50.39	54.00	V
2480.00	66.98	34.99	27.56	6.27	65.82	94.00	H
3268.00	38.01	34.59	28.46	8.18	40.06	54.00	H
4955.00	44.49	34.30	31.68	8.28	50.15	54.00	H
7440.00	35.36	34.30	36.60	12.14	49.80	54.00	H

**Remark:**

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.

- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

**Test result: The unit does meet the FCC requirements.**

## 7.4 Occupied Bandwidth & Band Edge

Test Requirement: FCC Part 15 C section 15.249


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Test Method: ANSI C63.10: Clause 6.9


Operation within the band 2.400 to 2.4835 GHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.


### 1. Test in the lowest frequency 2.402 GHz

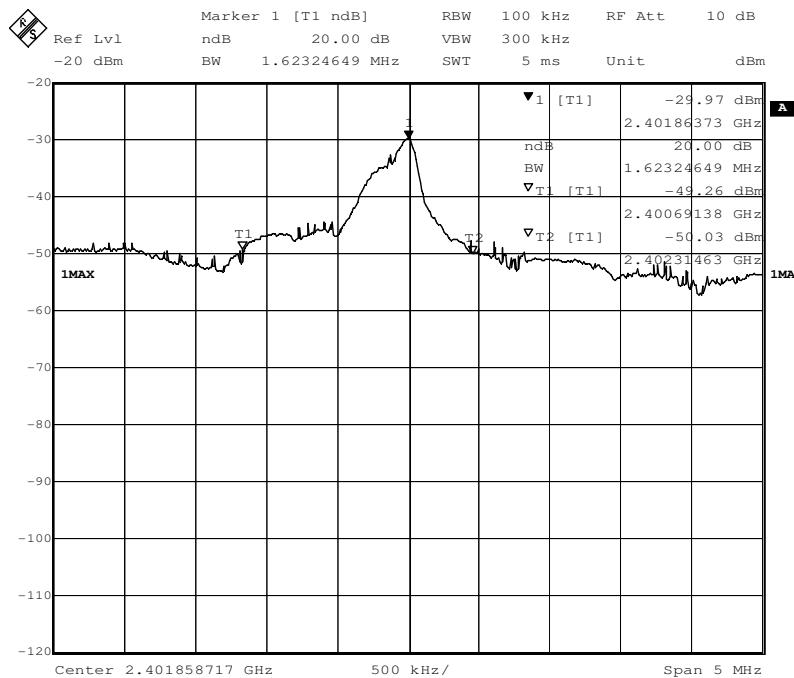

## 2. Test in the middle frequency 2.442 GHz

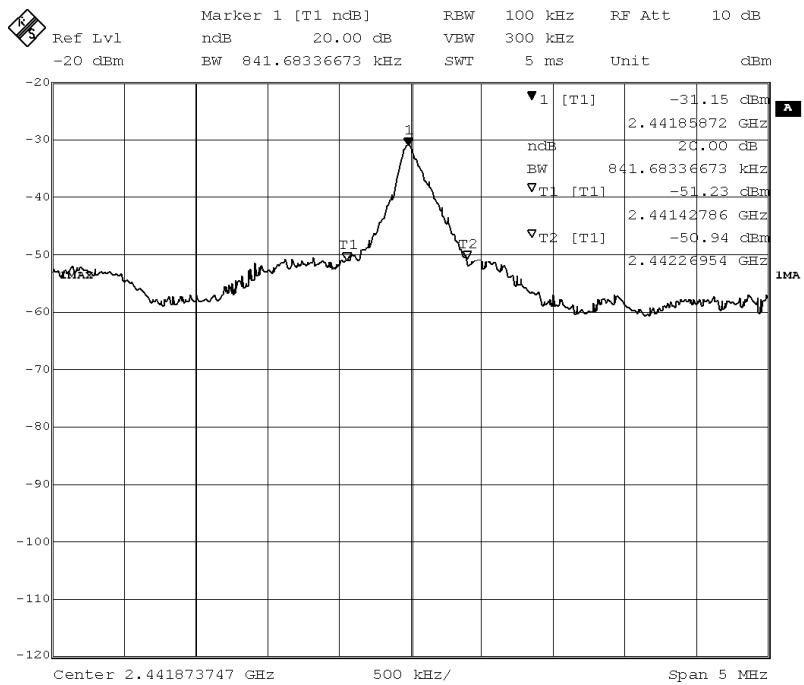


## 3. Test in the highest frequency 2.480 GHz

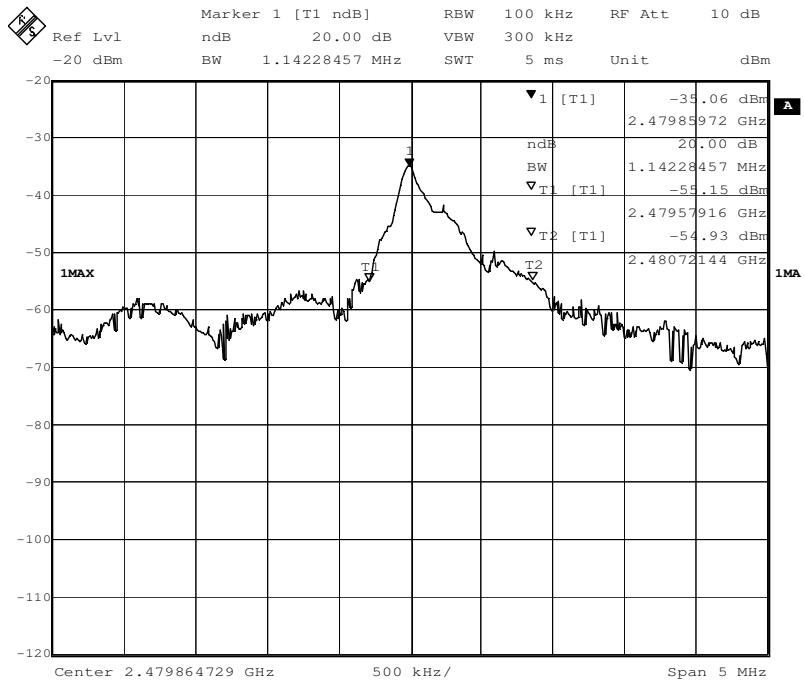

**The Band Edge Emission as below:**

Band Edge 2.4 GHz

Detector mode: Peak

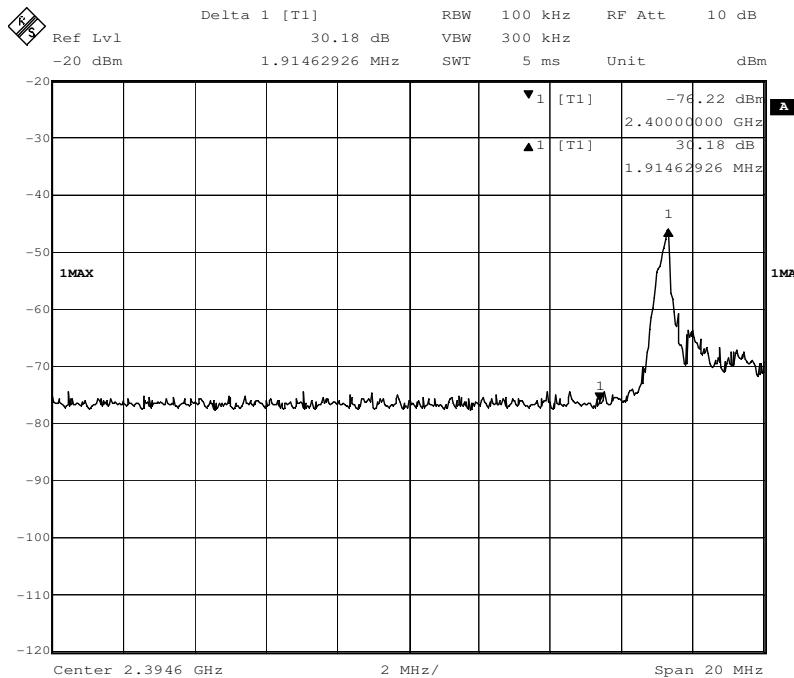


For 2.400 GHz band edge checked with 2.402 GHz frequency operated, the delta shown at the plots are 30.18 dB for peak detector mode

With the peak value 92.56 dB $\mu$ V/m and average value at 62.79 dB $\mu$ V/m for the fundamental, the spurious emission level at 2.400 GHz were 62.38 dB $\mu$ V/m for peak and 32.61 dB $\mu$ V/m for average which is below the limit 74.0 dB $\mu$ V/m for peak and 54.0 dB $\mu$ V/m for average.

Highest Band Edge 2.4835GHz

Detector mode: Peak

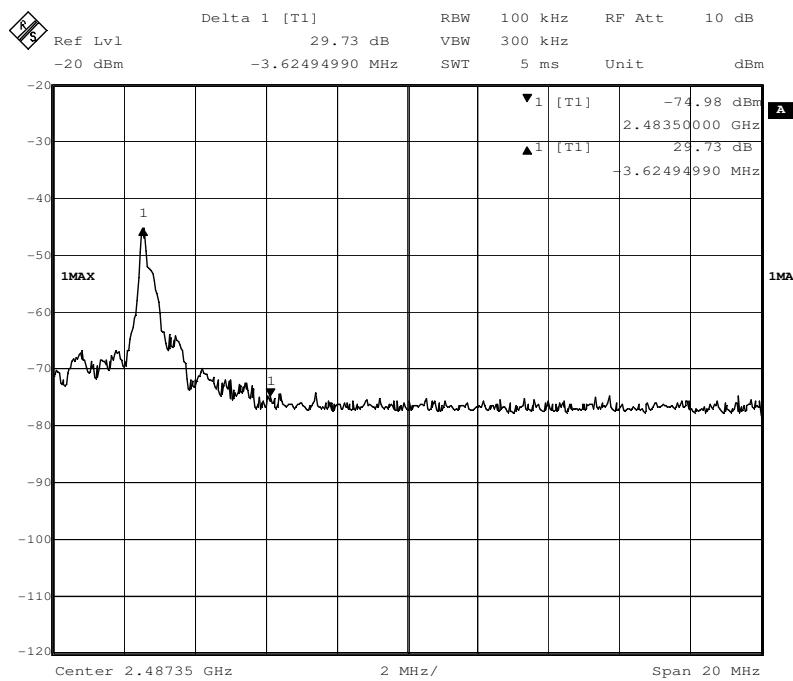

For 2.4835 GHz bandage checked with 2.482 GHz frequency operated, the delta shown at the plots are 29.73 dB for peak detector mode.

With the peak value 90.90 dB $\mu$ V/m and average value at 78.44 dB $\mu$ V/m for the fundamental, the spurious emission level at 2.4835 GHz were 60.72 dB $\mu$ V/m for peak and 48.26 dB $\mu$ V/m for average. It is below the limit 74.0 dB $\mu$ V/m for peak and 54.0 dB $\mu$ V/m for average.

The test result for the Emissions radiated outside of the specified frequency bands; please refer to the section 7.2.1 of this report.

**The results: The unit does meet the FCC requirements.**

**End of the report**