

The Testcenter facility 'Dosimetric Test Lab' within IMST GmbH is accredited by the German National 'Deutsche Akkreditierungsstelle GmbH (DAkkS)' for testing according to the scope as listed in the accreditation certificate: D-PL-12139-01-00.

SAR Evaluation Report	
EUT Information	
Manufacturer	INGENICO
Model Name	Desk/5000
FCC ID	XKB-D5000CLWIBT
IC number	2586D-D5000CLWIBT
EUT Type	Payment terminal / Hand-held device
Prepared by	
Testing Laboratory	IMST GmbH, Test Center Carl-Friedrich-Gauß-Str. 2 – 4 47475 Kamp-Lintfort Germany
Prepared for	
Applicant	INGENICO Avenue de la Gare Rovaltain TGV - BP 25156 26958 Valence Cedex 9 France
Test Specification	
Standard Applied	FCC CFR 47 § 2.1093; IEEE 1528-2013 and the published KDB procedures
Exposure Category	General Public / Uncontrolled Exposure
Usage Configuration	Extremity Exposure Configuration
Report Information	
Data Stored	60320_6170078_XKB-D5000
Issue Date	February 24, 2017
Revision Date	February 28, 2017
Revision Number	1
Remarks	This report relates only to the item(s) evaluated. This report shall not be reproduced, except in its entirety, without the prior written approval of IMST GmbH. The results and statements contained in this report reflect the evaluation for the certain model described above. The manufacturer is responsible for ensuring that all production devices meet the intent of the requirements described in this report.

Table of Contents

1	Subject of Investigation and Test Results	3
1.1	<i>Technical Data of EUT</i>	3
1.2	<i>Antenna Configuration</i>	3
1.3	<i>Test Specification / Normative References</i>	4
1.4	<i>Attestation of Test Results</i>	4
2	Exposure Criteria and Limits	5
2.1	<i>Distinction between Exposed Population, Duration of Exposure and Frequencies</i>	5
2.2	<i>Distinction between Maximum Permissible Exposure and SAR Limits</i>	5
3	Measurement Procedure	6
3.1	<i>General Requirement</i>	6
3.2	<i>Phantom Requirements</i>	6
3.3	<i>Information for IEEE 802.11 (Wi-Fi) Transmitters</i>	6
3.4	<i>Measurement Variability</i>	7
4	The Measurement System	8
4.1	<i>Phantoms</i>	9
4.2	<i>E-Field-Probes</i>	10
4.3	<i>Measurement Procedure</i>	11
5	System Verification and Test Conditions	12
5.1	<i>Date of Testing</i>	12
5.2	<i>Environment Conditions</i>	12
5.3	<i>Tissue Simulating Liquid Recipes</i>	12
5.4	<i>Tissue Parameters</i>	13
5.5	<i>Simplified Performance Checking</i>	13
6	SAR Measurement Conditions and Results	13
6.1	<i>Test Conditions</i>	13
6.2	<i>Tune-Up Information</i>	14
6.3	<i>Measured Output Power for WLAN 2.4 GHz</i>	14
6.4	<i>Measured Output Power for WLAN 5 GHz</i>	15
6.5	<i>Standalone SAR Test Exclusion</i>	17
6.6	SAR Test Consideration	18
6.7	<i>SAR Results</i>	19
7	Simultaneous Transmission Consideration	20
8	Administrative Measurement Data	21
8.1	<i>Calibration of Test Equipment</i>	21
8.2	<i>Uncertainty Assessment</i>	22
9	Report History	24
Appendices		25
Appendix A - Pictures		26
Appendix B - SAR Distribution Plots		30
Appendix C - System Verification Plots		32
Appendix D - Certificates of Conformity		35
Appendix E - Calibration Certificates for DAEs		37
Appendix F - Calibration Certificates for E-Field Probes		42
Appendix G - Calibration Certificates for Dipoles		53

1 Subject of Investigation and Test Results

1.1 Technical Data of EUT

Product Specifications	
IMEI / SN	160587313331013301015984
Operation Mode	IEEE 802.11 (2,4 GHz and 5 GHz), BT Classic 4.1
Frequency Band	2.4 GHz, 5.3GHz and 5.6GHz
Usage Configuration	Extremity Exposure Configuration
Antenna Type	integrated (1xWLan, 1xBT)
Max. Output Power	see chapter 6.2
Power Supply	DC 8V (4A)
Used Accessory	-
Notes:	

1.2 Antenna Configuration

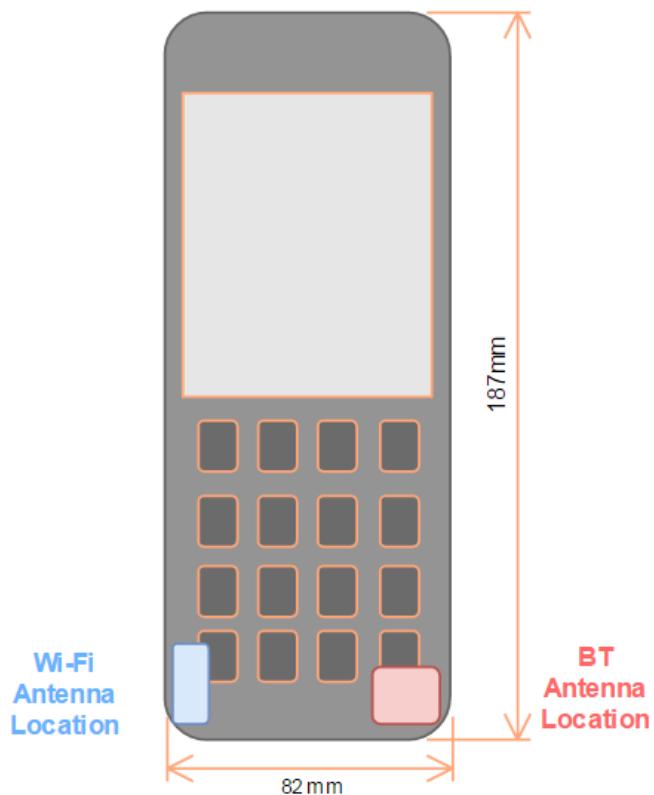


Fig. 1: Antenna location of the EUT.

1.3 Test Specification / Normative References

The tests documented in this report were performed according to the standards and rules described below.

Test Specifications		
Test Standard / Rule	Description	Issue Date
<input checked="" type="checkbox"/> IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.	June 14, 2013
<input type="checkbox"/> FCC CFR 47 § 2.1091	Code of Federal Regulations; Title 47. Radiofrequency radiation exposure evaluation: Mobile Devices .	October 01, 2010
<input checked="" type="checkbox"/> FCC CFR 47 § 2.1093	Code of Federal Regulations; Title 47. Radiofrequency radiation exposure evaluation: Portable Devices .	October 01, 2010
<input checked="" type="checkbox"/> RSS-102, Issue 5	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	March, 2015
Measurement Methodology KDB		
<input checked="" type="checkbox"/> KDB 865664 D01 v01r04	SAR measurement 100 MHz to 6 GHz	August 07, 2015
<input checked="" type="checkbox"/> KDB 865664 D02 v01r01	Exposure Reporting	October 23, 2015
Product KDB		
<input checked="" type="checkbox"/> KDB 447498 D01 v06	General RF Exposure Guidance	October 23, 2015
Technology KDB		
<input checked="" type="checkbox"/> KDB 248227 D01 v02r02	802.11 Wi-Fi SAR	October 23, 2015

1.4 Attestation of Test Results

Highest Measured SAR _{10g} [W/kg]								
Band	Frequency [MHz]	CH	Exposure Edge of EUT	Gap [mm]	Pic. No.	Highest Reported SAR _{10g} [W/kg]	Extremity Exposure SAR _{10g} Limit W/kg	
U-NII-2C IEEE 802.11 a	5500	100	Left	0	4	0.569	4.0	PASS

Notes: To establish a connection at a specific channel and with maximum output power, engineering test software has been used.

All measured SAR results and configurations are shown in chapter 6.7 on page 19.

Simultaneous Transmission Scenario [W/kg]						
Exposure Edge of EUT	Highest Reported SAR _{10g} Values			Σ SAR _{10g}		
	Bluetooth	WLAN 2.4 GHz	WLAN 5 GHz			
Left	0.00	0.045	-	0.045	PASS	
Left	0.00	-	0.569	0.569	PASS	

Prepared by: 

Dessislava Patrishkova
Test Engineer

Reviewed by: 

Alexander Rahn
Quality Assurance

2 Exposure Criteria and Limits

In the USA the FCC exposure criteria [KDB 865664] are based on the withdrawn IEEE Standard C95.1-1999 [IEEE C95.1-1999].

General population / uncontrolled environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces.

Occupational / controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. For exposure in controlled environments higher field strengths are admissible.

Human Exposure Limits				
Condition	Uncontrolled Environment (General Population)		Controlled Environment (Occupational)	
	SAR Limit [W/kg]	Mass Avg.	SAR Limit [W/kg]	Mass Avg.
SAR averaged over the whole body mass	0.08	whole body	0.4	whole body
Peak spatially-averaged SAR for the head, neck and trunk	1.6	1 g of tissue*	8.0	1 g of tissue*
Peak spatially-averaged SAR in the limbs	4.0	10 g of tissue*	20.0	10 g of tissue*

Note: *Defined as a tissue volume in the shape of a cube

Table 1: SAR limits.

In this report the comparison between the FCC exposure limits and the measured data is made using the spatial peak SAR; the power level of the device under test guarantees that the whole body averaged SAR is not exceeded.

2.1 Distinction between Exposed Population, Duration of Exposure and Frequencies

The American Standard [IEEE C95.1-1999] distinguishes between controlled and uncontrolled environment. Controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. Uncontrolled environments are locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces. For exposure in controlled environments higher field strengths are admissible. In addition the duration of exposure is considered.

Due to the influence of frequency on important parameters, as the penetration depth of the electromagnetic fields into the human body and the absorption capability of different tissues, the limits in general vary with frequency.

2.2 Distinction between Maximum Permissible Exposure and SAR Limits

The biological relevant parameter describing the effects of electromagnetic fields in the frequency range of interest is the specific absorption rate SAR (dimension: power/mass). It is a measure of the power absorbed per unit mass. The SAR may be spatially averaged over the total mass of an exposed body or its parts. The SAR is calculated from the r.m.s. electric field strength E inside the human body, the conductivity σ and the mass density ρ of the biological tissue:

$$SAR = \sigma \frac{E^2}{\rho} = c \frac{\partial T}{\partial t} \Big|_{t \rightarrow 0+} . \quad (1)$$

The specific absorption rate describes the initial rate of temperature rise $\partial T / \partial t$ as a function of the specific heat capacity c of the tissue. A limitation of the specific absorption rate prevents an excessive heating of the human body by electromagnetic energy.

As it is sometimes difficult to determine the SAR directly by measurement (e.g. whole body averaged SAR), the standard specifies more readily measurable maximum permissible exposures in terms of external electric E and magnetic field strength H and power density S , derived from the SAR limits. The limits for E , H and S have been fixed so that even under worst case conditions, the limits for the specific absorption rate SAR are not exceeded.

For the relevant frequency range the maximum permissible exposure may be exceeded if the exposure can be shown by appropriate techniques to produce SAR values below the corresponding limits.

3 Measurement Procedure

3.1 General Requirement

The test shall be performed in a laboratory with an environment which avoids influence on SAR measurements by ambient EM sources and any reflection from the environment itself. The ambient temperature shall be in the range of 20°C to 26°C and 30-70% humidity. All tests have been conducted according the latest version of all relevant KDBs.

3.1.1 Extremity exposure conditions

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e. hands, wrist, feet and ankles, may require extremity SAR evaluation according to chapter 4.2.3 of KDB 447498 D01.

3.2 Phantom Requirements

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

3.3 Information for IEEE 802.11 (Wi-Fi) Transmitters

For both DSSS and OFDM wireless modes an initial test position must be established for each applicable exposure configuration using either:

- Design implementation defined by the manufacturer, or
- Investigative results by the test lab based on:
 - Exclusions based on the distance from the antenna to the surface, or
 - Highest measured SAR from the area-scan-only measurements on all applicable test positions at the Initial Test Configuration, if found to require SAR tests.

Then, the initial test position procedure defines the required complete SAR scan measurements on each exposure configuration as following:

- When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurements is not required for the remaining test positions in that configuration as well as 802.11 transmission mode combinations within the frequency or aggregated band.
- When the reported SAR of the initial test position is > 0.4 W/kg, further SAR measurements is required in the initial test position or next closest/smallest test separation distance based on manufacturer justification, on the following highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
- When the reported SAR for all initial and subsequent test positions is > 0.8 W/kg, further SAR measurements is required on these positions on the subsequent next highest measured output power channels, until the reported SAR is ≤ 1.2 W/kg or all required channels have been tested.

For OFDM transmission configurations in 2.4 GHz and 5 GHz bands, it is important to determine SAR Initial Test Configuration for each stand alone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units. The procedure is as following:

- Highest output power channel is chosen; if there are channels with same maximum output power then the closest to the mid-band frequency is preferred. If there are more than one channel with same maximum output power and same distance to the mid-band frequency, then the channel with the higher frequency is preferred.
- When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel in the subsequent test configuration.

Along with the initial test position reduction guidelines, the following procedures are also applied to SAR measurement requirements when multiple OFDM configurations are supported:

- When the reported SAR of the initial test configuration with the highest output power channel is > 0.8 W/kg, further SAR measurements is required for next highest output power channel in the initial test configuration, until the reported SAR is ≤ 1.2 W/kg or all required channels have been tested.
- When the reported SAR of the subsequent test configuration with the highest output power channel is > 1.2 W/kg, further SAR measurements is required for next highest output power channel in this test configuration, until the reported SAR is ≤ 1.2 W/kg or all required channels have been tested.
- When the reported SAR of the subsequent test configuration is > 1.2 W/kg, further SAR measurements for the following subsequent test configurations are required.

3.4 Measurement Variability

According KDB 865664 repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4 The Measurement System

DASY is an abbreviation of „Dosimetric Assessment System“ and describes a system that is able to determine the SAR distribution inside a phantom of a human being according to different standards. The DASY4 system consists of the following items as shown in Fig: 2. Additionally, Fig: 3 shows the equipment, similar to the installations in other laboratories.

- Fully compliant with all current measurement standards as stated in Fig. 4
- High precision robot with controller
- Measurement server (for surveillance of the robot operation and signal filtering)
- Data acquisition electronics DAE (for signal amplification and filtering)
- Field probes calibrated for use in liquids
- Electro-optical converter EOC (conversion from the optical into a digital signal)
- Light beam (improving of the absolute probe positioning accuracy)
- Two SAM phantoms filled with tissue simulating liquid
- DASY4 software
- SEMCAD

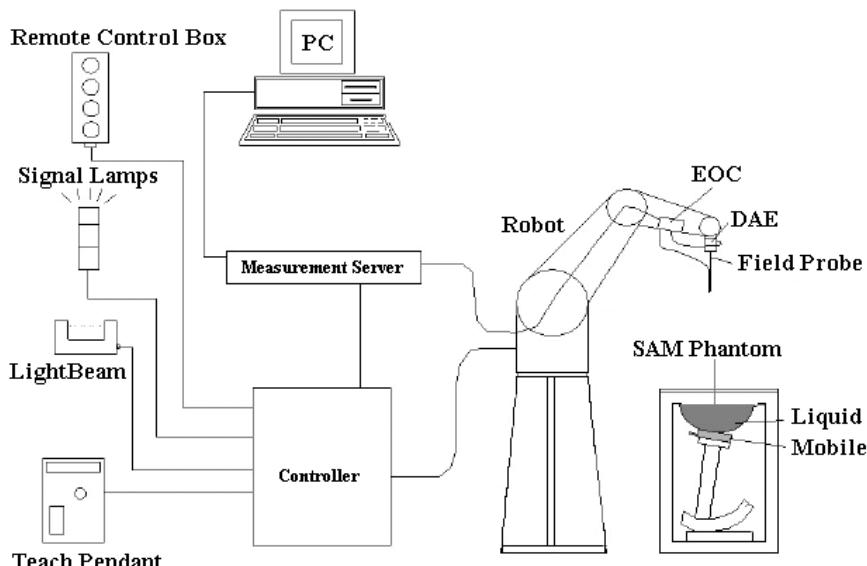


Fig. 2: The DASY4 measurement system.



Fig. 3: The measurement set-up with two SAM phantoms containing tissue simulating liquid.

The EUT operating at the maximum power level is placed by a non-metallic device holder (delivered from Schmid & Partner) in the above described positions at a shell phantom of a human being. The distribution of the electric field strength E is measured in the tissue simulating liquid within the shell phantom. For this miniaturised field probes with high sensitivity and low field disturbance are used. Afterwards the corresponding SAR values are calculated with the known electrical conductivity σ and the mass density ρ of the tissue in the SEMCAD FDTD software. The software is able to determine the averaged SAR values (averaging region 1 g or 10 g) for compliance testing.

The measurements are done by two scans: first a coarse scan determines the region of the maximum SAR, afterwards the averaged SAR is measured in a second scan within the shape of a cube.

4.1 Phantoms

TWIN SAM PHANTOM V4.0	
	Specific Anthropomorphic Mannequin defined in IEEE 1528 and IEC 62209-1 and delivered by Schmid & Partner Engineering AG. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. The details and the Certificate of conformity can be found in Fig. 5.
Shell Thickness	$2 \pm 0.2 \text{ mm}$ ($6 \pm 0.2 \text{ mm}$ at ear point)
Dimensions	Length: 1000 mm; Width: 500 mm Height: adjustable feet
Filling Volume	approx. 25 liters

4.2 E-Field-Probes

For the measurements the Dosimetric E-Field Probes ET3DV6R or EX3DV4 with following specifications are used. They are manufactured and calibrated in accordance with FCC and IEEE 1528-2013 recommendations annually by Schmid & Partner Engineering AG.

ET3DV6R	
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system (ET3DV6 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Dimensions	Overall length: 337 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm
Frequency	10 MHz to 2.3 GHz Linearity: ± 0.2 dB (30 MHz to 2.3 GHz)
Directivity	Axial isotropy: ± 0.2 dB in TSL (rotation around probe axis) Spherical isotropy: ± 0.4 dB in TSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Calibration Range	450 MHz / 750 MHz / 900 MHz / 1750 MHz / 1900 MHz / 1950 MHz for head and body simulating liquid

EX3DV4	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	Axial isotropy: ± 0.3 dB in TSL (rotation around probe axis) Spherical isotropy: ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Calibration Range	1950 MHz / 2450 MHz / 2600 MHz / 3500 MHz / 5200 MHz / 5300 MHz / 5600 MHz / 5800 MHz for head and body simulating liquid

4.3 Measurement Procedure

The following steps are used for each test position:

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile phone and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location (P1). This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with resolution settings for area scan and zoom scan according KDB 865664 D01 as shown in Table 2.
- The used extrapolation and interpolation routines are all based on the modified Quadratic Shepard's method [DASY4].
- Repetition of the E-field measurement at the fixed location (P1) and repetition of the whole procedure if the two results differ by more than $\pm 0.21\text{dB}$.

		$\leq 3 \text{ GHz}$	$\geq 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.
Maximum zoom scan spatial resolution: $\Delta X_{\text{Zoom}}, \Delta Y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta Z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta Z_{\text{Zoom}}(1): \text{between 1}^{\text{st}} \text{ two points closest to phantom surface}$	$\leq 4 \text{ mm}$
		$\Delta Z_{\text{Zoom}}(n>1): \text{between subsequent points}$	$\leq 1.5 \cdot \Delta Z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium: see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz

Table 2: Parameters for SAR scan procedures.

5 System Verification and Test Conditions

5.1 Date of Testing

Date of Testing				
Band		Frequency [MHz]	Date of System Check	Date of SAR Measurement
IEEE 802.11 / WLAN 2,4 GHz	Body	2450	February 10, 2017	February 10, 2017
IEEE 802.11 / WLAN 5 GHz	Body	5250 / 5600	February 22, 2017	February 22-23, 2017

Table 3: Date of testing.

5.2 Environment Conditions

Environment Conditions		
Ambient Temperature[°C]	Liquid Temperature [°C]	Humidity [%]
22.0 ± 2	22.0 ± 2	40.0 ± 5
Notes: To comply with the required noise level (less than 12 mW/kg) periodically measurements without a DUT were conducted.		

Table 4: Environment Conditions.

5.3 Tissue Simulating Liquid Recipes

Tissue Simulating Liquid									
Frequency Range [MHz]	Water [%]	Sugar [%]	Cellulose [%]	Salt [%]	Preventol [%]	DGBE [%]	Triton X/100 [%]	TWEEN 80 [%]	GERMABEN [%]
Head Tissue									
<input type="checkbox"/> 300	37.1	56.1	0.9	5.8	0.2	-	-	-	-
<input type="checkbox"/> 450	38.9	56.9	0.3	3.8	0.1	-	-	-	-
<input type="checkbox"/> 835	40.3	57.9	0.2	1.4	0.2	-	-	-	-
<input type="checkbox"/> 900	40.3	57.9	0.2	1.4	0.2	-	-	-	-
<input type="checkbox"/> 1800	55.2	-	-	0.3	-	44.5	-	-	-
<input type="checkbox"/> 1900	55.4	-	-	0.1	-	44.5	-	-	-
<input type="checkbox"/> 2450	55.0	-	-	-	-	45.0	-	-	-
<input type="checkbox"/> 2600	54.8	-	-	0.1	-	45.1	-	-	-
<input type="checkbox"/> 5000 - 6000	65.5	-	-	-	-	17.2	17.25	-	-
Body Tissue									
<input type="checkbox"/> 450	46.2	51.2	0.2	2.3	0.1	-	-	-	-
<input type="checkbox"/> 835	52.4	45.0	1.0	1.5	0.1	-	-	-	-
<input type="checkbox"/> 900	50.8	48.2	-	0.9	0.1	-	-	-	-
<input type="checkbox"/> 1800	70.2	-	-	0.4	-	29.4	-	-	-
<input type="checkbox"/> 1900	69.8	-	-	0.2	-	30.0	-	-	-
<input checked="" type="checkbox"/> 2450	68.6	-	-	-	-	31.4	-	-	-
<input type="checkbox"/> 2600	68.1	-	-	0.1	-	31.8	-	-	-
<input checked="" type="checkbox"/> 5000 - 6000	79.7	-	-	-	-	-	-	20.0	0.3

Table 5: Recipes of the tissue simulating liquid.

5.4 Tissue Parameters

For the measurement of the following parameters the Speag DAK-3.5 dielectric probe kit is used, representing the open-ended coaxial probe measurement procedure.

Tissue Simulating Liquids								
Band	Frequency [MHz]	Channel	Permittivity			Conductivity		
			Measured	Target	Delta	Measured	Target	Delta
			ϵ'	ϵ'	+/- 5 [%]	σ [S/m]	σ [S/m]	+/- 5 [%]
WLAN 2.4 GHz	2450	System Check	51.7	52.7	-1.9	1.96	1.95	0.7
	2412	1	51.9	52.8	-1.7	1.91	1.91	0.1
	2437	6	51.7	52.7	-1.9	1.95	1.94	0.8
	2462	11	51.7	52.7	-1.9	1.98	1.96	0.7
WLAN 5 GHz U-NII-2A	5250.0	System Check	50.4	48.9	2.9	5.41	5.36	1.0
	5300.0	60	50.2	48.9	2.8	5.50	5.42	1.5
WLAN 5 GHz U-NII-2C	5600.0	System Check	49.5	48.5	2.2	5.96	5.77	3.3
	5500.0	100	49.8	48.6	2.4	5.80	5.65	2.6
	5660.0	132	49.4	48.4	2.1	6.06	5.84	3.9
	5700.0	140	49.3	48.3	2.1	6.12	5.88	4.0
Notes: -								

Table 6: Parameters of the tissue simulating liquid.

5.5 Simplified Performance Checking

The simplified performance check was realized using the dipole validation kit. The input power of the dipole antenna was 250 mW (CW signal) and it was placed under the flat part of the SAM phantom. The target and measured results are listed in the table 7 and shown in Appendix C - System Verification Plots. The target values were adopted from the calibration certificates found also in the appendix.

System Check Results									
Frequency [MHz]	Tissue	Dipole	Dipole SN	SAR _{1g} [W/kg]			SAR _{10g} [W/kg]		
				Measured	Target	Delta [%]	Measured	Target	Delta [%]
2450	Body	D2450V2	709	13.4	13.08	-2.9	6.10	6.18	-1.3
5250	Body	D5GHzV2	1028	18.5	19.43	-4.8	5.22	5.45	-4.2
5600	Body	D5GHzV2	1028	19.8	20.6	-3.9	5.56	5.70	-2.5

Table 7: Dipole target and measured results.

6 SAR Measurement Conditions and Results

6.1 Test Conditions

Test Conditions					
Band	TX Range [MHz]	RX Range [MHz]	Used Channels	Crest Factor	Phantom
WLAN 2.4 GHz	2412.0 – 2462.0	2412.0 – 2462.0	1, 6, 11	1	SAM Twin Phantom V4.0
WLAN 5 GHz U-NII-2A	5260.0 – 5320.0	5260.0 – 5320.0	60	1	
WLAN 5 GHz U-NII-2C	5500.0 – 5700.0	5500.0 – 5700.0	100, 132, 140	1	

Table 8: Used channels and crest factors during the test.

6.2 Tune-Up Information

Tune-Up Information					
Band	Mode	Frequency [MHz]	Nominal Target Power [dBm]	Power Tolerance [dB]	Max. Tune-Up Tolerance Limit [dBm]
Bluetooth	4.1	2402 - 2480	0	+/-3	3
WLAN 2.4 GHz	b	2412 – 2462	13	+/-2	15
	g		13	+/-2	15
	n HT20		13	+/-2	15
	n HT40		13	+/-2	15
WLAN 5 GHz	a	5180 – 5320	11	+/-2	13
	n HT20		11	+/-2	13
	n HT40		11	+/-2	13
U-NII-1 U-NII-2A	a	5500 - 5700	14	+/-2	16
	n HT20		14	+/-2	16
	n HT40		14	+/-2	16
U-NII-2C	a	5500 - 5700	14	+/-2	16
	n HT20		14	+/-2	16
	n HT40		14	+/-2	16

Table 9: Maximum transmit output power values declared by the manufacturer.

6.3 Measured Output Power for WLAN 2.4 GHz

Measurements for IEEE 802.11 b/g/n has been performed with test software settings for power level 13 (PWL) supported by the device and provided by the manufacturer.

Max. Averaged Output Power (RMS) [dBm]									
Mode	Frequency [MHz]	CH	Data Rate [Mbit/s]						
			1	2	5.5	11	PWL 13		
2.4 GHz Range									
b	2412	1	13.2						
	2437	6	13.0						
	2462	11	13.6	13.6	13.5		13.8		
Mode	Frequency [MHz]	CH	Data Rate [Mbit/s]						
			6.0	9	12	18	24	36	48
g	2412	1	12.0						
	2437	6	12.7						
	2462	11	13.0						
Mode	Frequency [MHz]	CH	MCS Index No.						
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6
n HT20	2412	1	11.9						
	2437	6	12.7						
	2462	11	12.7						
n HT40	2437	6	12.1						

Table 10: Conducted output power values for IEEE 802.11 b/g/n.

6.4 Measured Output Power for WLAN 5 GHz

Measurements for IEEE 802.11 a/n has been performed with test software settings for power level 11 (PWL) supported by the device and provided by the manufacturer.

		Max. Averaged Output Power (RMS) [dBm]									
Mode	Frequency [MHz]	Data Rate [Mbit/s]									
		CH	6.0	9	12	18	24	36	48	54	
5.2 - 5.3 GHz Range		PWL 11									
a U-NII-1	5180	36	11.9								
	5200	40	11.9								
	5220	44	11.2								
	5240	48	11.2								
a U-NII-2A	5260	52	11.6								
	5280	56	11.6								
	5300	60	12.3	12.0	12.0	12.2	12.1	12.1	12.2	12.2	
	5320	64	12.3								
5.5 - 5.7 GHz Range		PWL 11									
a U-NII-2C	5500	100	15.9	15.7	15.8	15.8	15.6	15.5	15.7	15.6	
	5560	112	14.7								
	5580	116	14.5								
	5640	128	14.6								
	5660	132	14.7	14.3	14.3	14.2	14.1	14.0	14.0	14.1	
	5680	136	14.5								
	5700	140	14.5								

Table 11: Conducted output power values for IEEE 802.11 a - 5 GHz.

Max. Averaged Output Power (RMS) [dBm]								
Mode	Frequency [MHz]	CH	Data Rate [Mbit/s]					
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5
5.2 - 5.3 GHz Range			PWL 11					
n - HT20 U-NII-1	5180	36	11.7					
	5200	40	11.8					
	5220	44	11.2					
	5240	48	11.1					
n - HT20 U-NII-2A	5260	52	11.5					
	5280	56	11.5					
	5300	60	12.2	12.0	12.1	12.2	12.2	12.3
	5320	64	12.2					12.3
5.5 - 5.7 GHz Range			PWL 11					
a U-NII-2C	5500	100	15.8					
	5560	112	14.7					
	5580	116	14.5					
	5640	128	14.4					
	5660	132	13.4					
	5680	136	13.1					
	5700	140	13.0					
5.2 - 5.3 GHz Range			PWL 11					
n - HT40 U-NII-1	5190	38	11.5					
	5230	46	10.8					
n - HT40 U-NII-2A	5270	54	11.1					
	5310	62	11.9					
5.5 - 5.7 GHz Range			PWL 11					
n - HT40 U-NII-2C	5510	102	15.5					
	5550	110	14.4					
	5590	118	14.3					
	5630	126	14.0					
	5670	134	12.9					
	5690	138	12.7					

Table 12: Conducted output power values for IEEE 802.11 n - 5 GHz.

6.5 Standalone SAR Test Exclusion

SAR test exclusion is determined for the EUT according to KDB 447498 D01v05 with 1g SAR exclusion thresholds for 100 MHz to 6GHz at test separation distances ≤ 50 mm determined by:

$$[(\text{max power of channel, incl. tune-up tolerance, mW}) / (\text{min test separation distance, mm})] * [\sqrt{f(\text{GHz})}]$$

≤ 3.0 for 1g SAR and ≤ 7.5 for 10g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Standalone SAR Test Exclusion								
Mode	Frequency [MHz]	Distance [mm]	P _{avg} [dBm]	P _{avg} [mW]	Calculated Values	Exclusion Threshold SAR 10g	Testing Exclusion	Testing Required
						Extremity		
BT	2480	5	3	2.00	0.6	≤ 7.5	YES	NO
WLAN	2450	5	15	31.62	9.9	≤ 7.5	NO	YES
	5250	5	13	19.95	9.1	≤ 7.5	NO	YES
	5600	5	16	39.81	18.8	≤ 7.5	NO	YES

Table 13: Standalone SAR test exclusion for the applicable transmitter.

When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas the standalone SAR must be estimated according to KDB 447498 in order to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) * [\sqrt{f(\text{GHz})}/x]$ W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

- 0.4 W/kg for 1g SAR and 1.0 W/kg for 10g SAR. when the test separation distance is > 50 mm

6.6 SAR Test Consideration

Desk/5000 from INGENICO is a device intended to be used in the hands. The table below shows the SAR test exclusion consideration for the applicable modes against the different device edges with the relevant distances.

The 1g and 10g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max power of channel, incl. tune-up tolerance, } mW) / (\text{min test separation distance, } mm)] * [\sqrt{f(\text{GHz})}]$$

≤ 3.0 for 1g SAR and ≤ 7.5 for 10g extremity SAR

When the minimum test separation distance is < 5 mm a distance of 5mm is applied to determine SAR test exclusion.

At 100 MHz to 6GHz and a test separation distance of > 50 mm, the SAR test exclusion threshold is determined according to the following and illustrated in Appendix B of KDB 447498 D01:

- $[(\text{Power allowed at numeric threshold for } 50 \text{ mm}) + (\text{test separation distance} - 50\text{mm}) * (f(\text{MHz})/150)] \text{ mW}$ at 100 MHz to 1500 MHz
- $[(\text{Power allowed at numeric threshold for } 50 \text{ mm}) + (\text{test separation distance} - 50\text{mm}) * 10] \text{ mW}$ at 1500 MHz to 6 GHz

Transmission Scenario for Test Exclusion Considerations					
Exposure Edge of the EUT	Antenna	Extremity Exposure			
		Bluetooth	WLAN 2.4 GHz	WLAN 5 GHz	WLAN 5 GHz
	Mode	BDR / GFSK	IEEE 802.11 b/g/n	IEEE 802.11 a/n	IEEE 802.11 a/n
	Frequency [GHz]	2.402	2.412	5.180	5.500
	Frame Avg. Power [dBm]	3.0	15.0	13.0	16.0
	Frame Avg. Power [mW]	2.0	31.6	20.0	39.8
Back	Antenna to user [mm]	10.0	10.0	10.0	10.0
	SAR exclusion threshold	0.3	4.9	4.5	9.3
	SAR testing required?	no	no	no	yes
	Estimated SAR [W/kg]	0.02	0.26	0.24	measured
Front	Antenna to user [mm]	5.0	5.0	5.0	5.0
	SAR exclusion threshold	0.6	9.8	9.1	18.7
	SAR testing required?	no	yes	yes	yes
	Estimated SAR [W/kg]	0.03	measured	measured	measured
Left	Antenna to user [mm]	40.0	2.0	2.0	2.0
	SAR exclusion threshold	0.1	24.6	22.7	46.7
	SAR testing required?	no	yes	yes	yes
	Estimated SAR [W/kg]	0.00	measured	measured	measured
Right	Antenna to user [mm]	2.0	50.0	50.0	50.0
	SAR exclusion threshold	1.5	1.0	0.9	1.9
	SAR testing required?	no	no	no	no
Top	Antenna to user [mm]	130.0	125.0	125.0	125.0
	SAR exclusion threshold	1042.0 mW	991.5 mW	914.8 mW	909.9 mW
	SAR testing required?	no	no	no	no
Bottom	Antenna to user [mm]	15.0	15.0	15.0	15.0
	SAR exclusion threshold	0.2	3.3	3.0	6.2
	SAR testing required?	No	no	no	no

Table 14: SAR test exclusion consideration for the applicable modes against different device edges.

6.7 SAR Results

The tables below contain the measured SAR values averaged over a mass of 10g. SAR assessment was conducted in the worst case configuration with output power values according to Table 9 - 12.

According KDB 447498 D01 V05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

- Scaling Factor = tune-up limit power (mW) / RF power (mW)
- Reported SAR = measured SAR * scaling factor

Furthermore, testing of other required channels within the operating mode of frequency band is not required when the reported SAR for the mid-band or highest output power channel is ≤ 0.4 W/kg for transmission band ≥ 200 MHz.

SAR Measurement Results in Extremity Configurations												
Band	Freq. [MHz]	CH	Edge of EUT	Gap [mm]	Pic. No.	Measured SAR10g [W/kg]	Power Drift [dB]	Output Power [dBm]		Tune-Up Scaling Factor	Reported SAR10g [W/kg]	Plot No.
								Measured	Limit			
IEEE 802.11 b 2.4 GHz	2462	11	Front	0	3	0.014	0.101	13.6	15.0	1.380	0.014	-
			Left	0	4	0.023	0.192	13.6	15.0	1.380	0.032	-
	2412	1	Left	0	4	0.030	0.075	13.2	15.0	1.514	0.045	1
	2437	6	Left	0	4	0.024	0.196	13.0	15.0	1.585	0.038	-
IEEE 802.11 a U-NII-2A	5300	60	Front	0	3	0.139	-0.047	12.3	13.0	1.175	0.163	-
	5300	60	Left	0	4	0.203	-0.177	12.3	13.0	1.175	0.239	-
IEEE 802.11 a U-NII-2C	5500	100	Front	0	3	0.171	0.082	15.9	16.0	1.023	0.175	-
	5500	100	Left	0	4	0.556	-0.155	15.9	16.0	1.023	0.569	2
	5500	100	Back	0	5	0.259	-0.185	15.94	16.04	1.0234	0.2654	-
	5660	132	Left	0	4	0.246	-0.162	14.74	16.04	1.3494	0.3324	-
	5700	140	Left	0	4	0.188	-0.068	14.5	16.0	1.413	0.266	-

Notes: Since the measured max SAR is < 2.0 W/kg measurement variability assessment according to KDB 865664 is not applicable.

Table 15: SAR measurement results.

To control the output power stability during the SAR test the used DASY4 system calculates the power drift by measuring the e-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in the above tables labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

7 Simultaneous Transmission Consideration

According to KDB 447498, the following table gives an overview about the Σ SAR for simultaneous transmitting modes. When Σ SAR > 1.6 W/kg. a SAR test exclusion is determined by the SAR to peak location separation ratio.

The ratio is determined by $(\text{SAR1} + \text{SAR2})^{1.5}/R_i$ rounded to two decimal digits and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. Where R_i is the separation distance between the peak SAR locations for the antenna pair in mm. When SAR is measured for both antennas in a pair the peak location separation distance is computed by the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the area scans or extrapolated peak SAR locations in the zoom scans as appropriate.

Simultaneous Transmission Scenario [W/kg]					
Exposure Edge of EUT	Highest Reported SAR_{10g} Values			Σ SAR	SPLSR Analysis
	Bluetooth	WLAN 2.4 GHz	WLAN 5 GHz		
Left	0.00	0.045	-	0.045	NO
Left	0.00	-	0.569	0.569	NO

Note: Estimated SAR values marked in blue

Table 16: Simultaneous transmission consideration for the applicable modes against different device edges for BT and WLAN transmissions.

8 Administrative Measurement Data

8.1 Calibration of Test Equipment

Test Equipment Overview					
Test Equipment	Manufacturer	Model	Serial Number	Last Calibration	Next Calibration
DASY System Components					
<input checked="" type="checkbox"/> Software Versions DASY4	SPEAG	V4.7	N/A	N/A	N/A
<input checked="" type="checkbox"/> Software Versions SEMCAD	SPEAG	V1.8	N/A	N/A	N/A
<input type="checkbox"/> Dosimetric E-Field Probe	SPEAG	ET3DV6R	1579	02/2016	02/2018
<input type="checkbox"/> Dosimetric E-Field Probe	SPEAG	ET3DV6R	1669	02/2017	02/2018
<input checked="" type="checkbox"/> Dosimetric E-Field Probe	SPEAG	EX3DV4	3536	09/2016	09/2017
<input type="checkbox"/> Dosimetric E-Field Probe	SPEAG	EX3DV4	3860	09/2015	09/2017
<input type="checkbox"/> Data Acquisition Electronics	SPEAG	DAE 3	335	02/2017	02/2018
<input checked="" type="checkbox"/> Data Acquisition Electronics	SPEAG	DAE 4	631	09/2016	09/2017
<input checked="" type="checkbox"/> Phantom	SPEAG	SAM	1059	N/A	N/A
<input checked="" type="checkbox"/> Phantom	SPEAG	SAM	1176	N/A	N/A
<input type="checkbox"/> Phantom	SPEAG	SAM	1340	N/A	N/A
<input type="checkbox"/> Phantom	SPEAG	SAM	1341	N/A	N/A
<input type="checkbox"/> Phantom	SPEAG	ELI4	1004	N/A	N/A
Dipoles					
<input type="checkbox"/> System Validation Dipole	SPEAG	D450V2	1014	03/2015	03/2018
<input type="checkbox"/> System Validation Dipole	SPEAG	D835V2	470	03/2015	03/2018
<input type="checkbox"/> System Validation Dipole	SPEAG	D900V2	006	11/2015	11/2018
<input type="checkbox"/> System Validation Dipole	SPEAG	D1640V2	311	09/2015	09/2018
<input type="checkbox"/> System Validation Dipole	SPEAG	D1750V2	1005	03/2015	03/2018
<input type="checkbox"/> System Validation Dipole	SPEAG	D1900V2	535	03/2015	03/2018
<input checked="" type="checkbox"/> System Validation Dipole	SPEAG	D2450V2	709	11/2015	11/2018
<input type="checkbox"/> System Validation Dipole	SPEAG	D2600V2	1019	11/2015	11/2018
<input checked="" type="checkbox"/> System Validation Dipole	SPEAG	D5GHzV2	1028	06/2014	06/2017
Material Measurement					
<input checked="" type="checkbox"/> Network Analyzer	Agilent	E5071C	MY46103220	07/2015	07/2017
<input checked="" type="checkbox"/> Dielectric Probe Kit	SPEAG	DAK-3.5	1234	01/2016	01/2018
<input checked="" type="checkbox"/> Thermometer	LKMelectronic	DTM3000	3511	01/2016	01/2018
Power Meters and Sensors					
<input type="checkbox"/> Power Meter	Agilent	E4416A	GB41050414	02/2015	02/2017
<input type="checkbox"/> Power Sensor	Agilent	E9301H	US40010212	03/2015	03/2017
<input type="checkbox"/> Power Meter	Agilent	E4417A	GB41050441	02/2015	02/2017
<input type="checkbox"/> Power Sensor	Agilent	E9301A	MY41495584	03/2015	03/2017
<input checked="" type="checkbox"/> Power Meter	Anritsu	ML2488A	6K00002319	06/2016	06/2018
<input checked="" type="checkbox"/> Power Sensor	Anritsu	MA2490A	6K00002078	06/2016	06/2018
<input checked="" type="checkbox"/> Power Sensor	Anritsu	ML2472A	002122	06/2016	06/2018
<input checked="" type="checkbox"/> Power Meter	Anritsu	MA2472A	990365	06/2016	06/2018
RF Sources					
<input checked="" type="checkbox"/> Network Analyzer	Agilent	E5071C	MY46103220	07/2015	07/2017
<input checked="" type="checkbox"/> RF Generator	Rohde & Schwarz	SM300	100142	N/A	N/A
Amplifiers					
<input checked="" type="checkbox"/> Amplifier 10 MHz – 4200 MHz	Mini Circuits	ZHL-42-42W	D080504-1	N/A	N/A
<input checked="" type="checkbox"/> Amplifier 2 GHz – 6 GHz	Ciao Wireless	CA26-451	37452	N/A	N/A
Radio Tester					
<input type="checkbox"/> Radio Communication Tester	Anritsu	MT8815B	6200576536	04/2016	04/2018
<input type="checkbox"/> Radio Communication Tester	Anritsu	MT8820C	6200918336	04/2016	04/2018
Notes: Used test equipment for measurement is checked above.					

Table 17: Calibration of test equipment.

8.2 Uncertainty Assessment

Uncertainty Budget for SAR Measurements according to IEEE 1528-2013 (300 MHz - 6 GHz)							
Error Sources	Uncertainty Value [± %]	Probability Distribution	Divisor	ci	ci	Standard Uncertainty [± %]	vi² or veff
Measurement System				1g	10g	1g	10g
Probe calibration	6.7	Normal	1	1	1	6.7	6.7
Axial isotropy	0.3	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.1	0.1
Hemispherical isotropy	1.3	Rectangular	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.5	0.5
Boundary effects	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	0.3	Rectangular	$\sqrt{3}$	1	1	0.2	0.2
System detection limit	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
Modulation response	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3
Readout electronics	0.3	Normal	1	1	1	0.3	0.3
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration time	1.4	Rectangular	$\sqrt{3}$	1	1	0.8	0.8
RF ambient conditions - noise	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7
RF ambient conditions - refl.	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe positioner mech. tol.	0.4	Rectangular	$\sqrt{3}$	1	1	0.2	0.2
Probe positioning	2.9	Rectangular	$\sqrt{3}$	1	1	1.7	1.7
Algorithms for max SAR eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3
Test Sample Related							
Test sample positioning	2.9	Normal	1	1	1	2.9	2.9
Device holder uncertainty	3.6	Normal	1	1	1	3.6	3.6
SAR drift measurement (< 0.2 dB)	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7
SAR scaling	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2
Phantom and Set-up							
Phantom uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3
SAR correction for perm./cond.	1.9	Normal	1	1	0.84	1.9	1.6
Liquid conductivity (meas.)	1.5	Normal	1	0.78	0.71	1.2	1.1
Liquid permittivity (meas.)	1.2	Normal	1	0.23	0.26	0.3	0.3
Liquid conductivity temp. unc.	2.9	Rectangular	$\sqrt{3}$	0.78	0.71	1.3	1.2
Liquid permittivity temp. unc.	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.3
Combined Standard Uncertainty						10.4	10.3
Coverage Factor for 95%						kp=2	
Expanded Standard Uncertainty						20.8	20.7
Notes: Worst case probe calibration uncertainty has been applied for all available probes and frequencies.							

Table 18: Uncertainty budget for SAR measurements.

Uncertainty Budget for SAR System Validation according to IEEE 1528-2013 (300 MHz - 6 GHz)							
Error Sources	Uncertainty Value [± %]	Probability Distribution	Divisor	ci	ci	Standard Uncertainty [± %]	vi² or veff
Measurement System				1g	10g	1g	10g
Probe calibration	6.7	Normal	1	1	1	6.7	6.7
Axial isotropy	0.3	Rectangular	$\sqrt{3}$	1	1	0.1	0.1
Hemispherical isotropy	1.3	Rectangular	$\sqrt{3}$	0	0	0.0	0.0
Boundary effects	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	0.3	Rectangular	$\sqrt{3}$	1	1	0.2	0.2
System detection limit	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
Modulation response	0.0	Rectangular	$\sqrt{3}$	0	0	0.0	0.0
Readout electronics	0.3	Normal	1	1	1	0.3	0.3
Response time	0.0	Rectangular	$\sqrt{3}$	0	0	0.0	0.0
Integration time	0.0	Rectangular	$\sqrt{3}$	0	0	0.0	0.0
RF ambient conditions - noise	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions - refl.	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. tol.	0.4	Rectangular	$\sqrt{3}$	1	1	0.2	0.2
Probe positioning	2.9	Rectangular	$\sqrt{3}$	1	1	1.7	1.7
Algorithms for max SAR eval.	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3
Validation Dipole							
Dev. of exp. dipole from num.	5.0	Normal	1	1	1	5.0	5.0
Input power and SAR drift (< 0.2 dB)	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7
Dipole axis to liquid distance (< 2deg)	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2
Phantom and Set-up							
Phantom uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3
SAR correction for perm./cond.	1.9	Normal	1	1	0.84	1.9	1.6
Liquid conductivity (meas.)	1.5	Normal	1	0.78	0.71	1.2	1.1
Liquid permittivity (meas.)	1.2	Normal	1	0.23	0.26	0.3	0.3
Liquid conductivity temp. unc.	2.9	Rectangular	$\sqrt{3}$	0.78	0.71	1.3	1.2
Liquid permittivity temp. unc.	1.8	Rectangular	$\sqrt{3}$	0.23	0.26	0.2	0.3
Combined Standard Uncertainty						10.0	10.0
Coverage Factor for 95%						kp=2	
Expanded Standard Uncertainty						20.0	19.9
Notes: Worst case probe calibration uncertainty has been applied for all available probes and frequencies.							

Table 19: Uncertainty budget for SAR system validation.

9 Report History

Revision History				
Revision	Description of Revision	Date	Revised Page	Revised By
/	Initial Release	February 24, 2017	-	-
1	IC number corrected	February 28, 2017	1, 25	AR

END OF THE SAR REPORT

Please refer to separated appendix file for the following data:

- Appendix A - Pictures
- Appendix B - SAR Distribution Plots
- Appendix C - System Verification Plots
- Appendix D – Certificates of Conformity
- Appendix E – Calibration Certificates for DAEs
- Appendix F – Calibration Certificates for E-Field Probes
- Appendix G – Calibration Certificates for Dipoles