



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: INGENICO

Address: 9 Avenue de la gare - Rovaltain TGV, BP25156, Valence Cedex9, 26958 ,
France

FCC ID: XKB-DX4CLWBT
Product Name: Smart POS Terminal

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR221157034-00C

Date Of Issue: 2023/2/28

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	8
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS.....	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS.....	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	16
3.2.5 Corrected Amplitude & Margin Calculation.....	16
3.3 20 DB BANDWIDTH.....	17
3.3.1 Applicable Standard.....	17
3.3.2 EUT Setup.....	17
3.3.3 Test Procedure	17
3.4 CHANNEL SEPARATION	18
3.4.1 Applicable Standard.....	18
3.4.2 EUT Setup.....	18
3.4.3 Test Procedure	18
3.5 NUMBER OF HOPPING FREQUENCY	19
3.5.1 Applicable Standard.....	19
3.5.2 EUT Setup.....	19
3.5.3 Test Procedure	19
3.6 TIME OF OCCUPANCY(DWELL TIME).....	20
3.6.1 Applicable Standard.....	20
3.6.2 EUT Setup.....	20
3.6.3 Test Procedure	20

3.7 PEAK OUTPUT POWER.....21
3.7.1 Applicable Standard.....21
3.7.2 EUT Setup.....21
3.7.3 Test Procedure21
3.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....22
3.8.1 Applicable Standard.....22
3.8.2 EUT Setup.....22
3.8.3 Test Procedure22
3.9 ANTENNA REQUIREMENT.....23
3.9.1 Applicable Standard.....23
3.9.2 Judgment.....23
4. TEST DATA AND RESULTS 24
4.1 AC LINE CONDUCTED EMISSIONS.....24
4.2 RADIATION SPURIOUS EMISSIONS37
4.3 20 DB EMISSION BANDWIDTH:53
4.4 CHANNEL SEPARATION:57
4.5 NUMBER OF HOPPING FREQUENCY:61
4.6 TIME OF OCCUPANCY(DWELL TIME):.....63
4.7 PEAK CONDUCTED OUTPUT POWER:67
4.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:68
5. RF EXPOSURE EVALUATION 75
5.1 APPLICABLE STANDARD.....75

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR221157034-00C	Original Report	2023/2/28

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart POS Terminal
EUT Model:	AXIUM DX4000
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	6.69 dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	5Vdc from adapter or 7.4Vdc from battery
Serial Number:	1SN1-8, 1SMJ-7
EUT Received Date:	2022/11/30
EUT Received Status:	Good

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
...
...
..	...	78	2480
39	2441	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2402
Middle	2441
Highest	2480

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
FPC	50	2.4~2.5GHz	3.7 dBi

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter 1#	KLEC	SW-0983
Adapter 2#	Jiangxi Jian Aohai Technology Co., Ltd.	A319-050200U-US2
Adapter 3#	Shenzhen Flypower Technology Co., Ltd.	PS10UA050K2000UU
USB Cable	Unknown	Unknown

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	QRCT		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
GFSK	8	8	8
$\pi/4$ -DQPSK	8	8	8
8DPSK	8	8	8

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB cable	Yse	No	1	EUT	Adapter

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

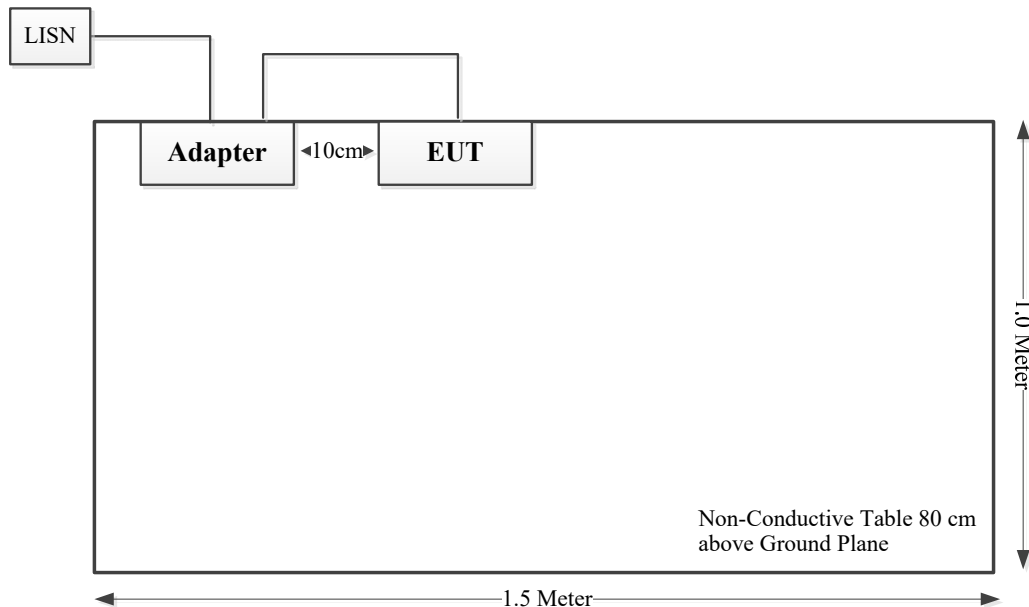

Spurious Emissions:

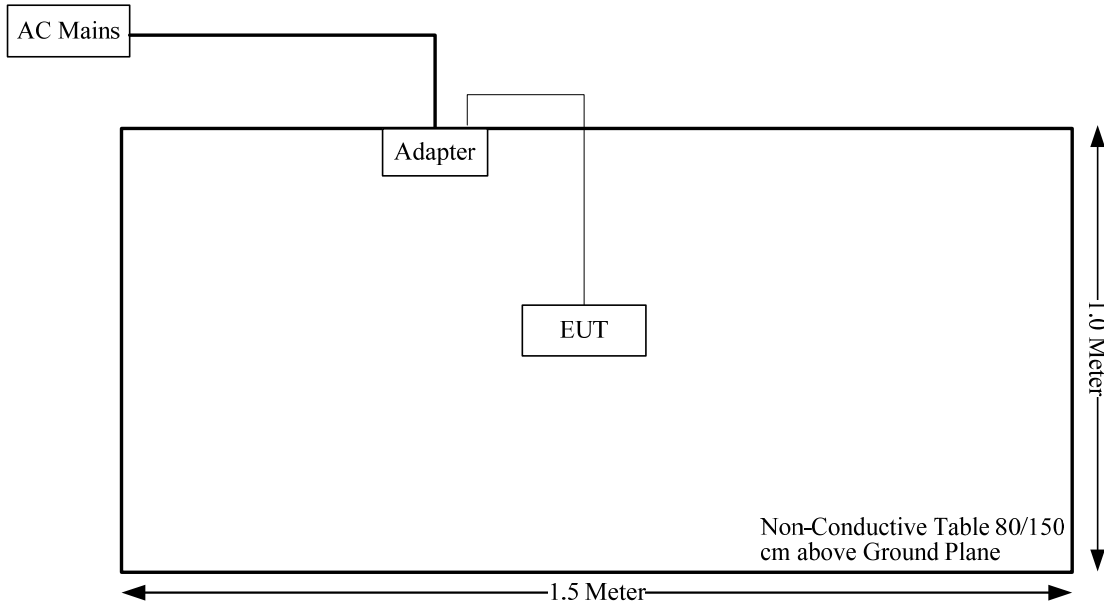

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC line conducted emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious emissions	Compliant
FCC §15.247(a)(1)	20 dB bandwidth	Compliant
FCC §15.247(a)(1)	Channel separation	Compliant
FCC §15.247(a)(1)(iii)	Number of hopping Frequency	Compliant
FCC §15.247(a)(1)(iii)	Time of occupancy (dwell time)	Compliant
FCC §15.247(b)(1)	Peak output power measurement	Compliant
FCC §15.247(d)	Band edges	Compliant
FCC §15.203	Antenna requirement	Compliant
§15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

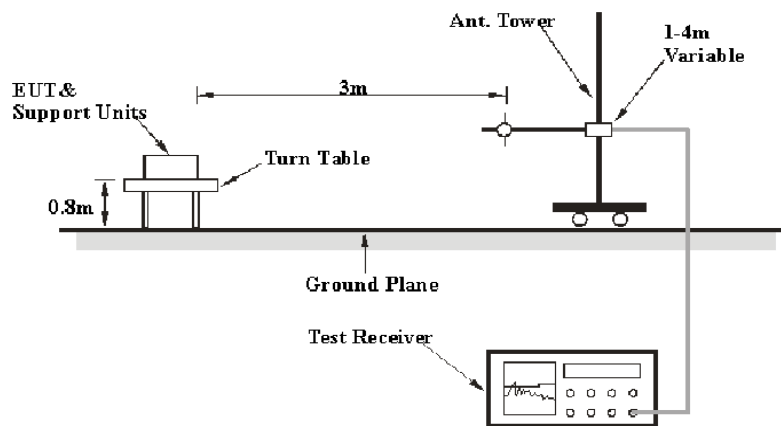

Above 1GHz:

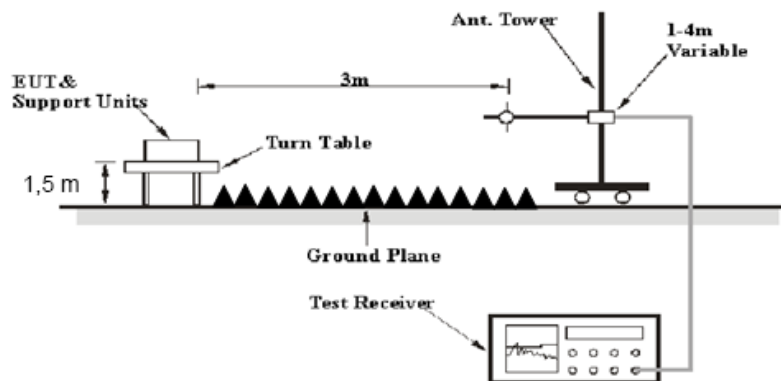

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.3.2 EUT Setup

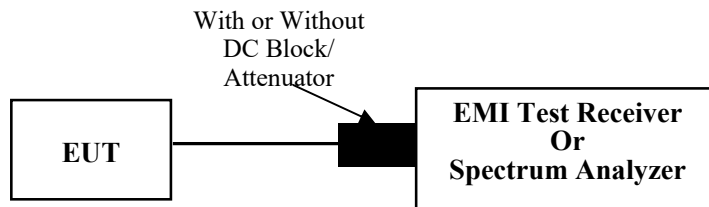

3.3.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.


3.4 Channel Separation

3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.4.2 EUT Setup

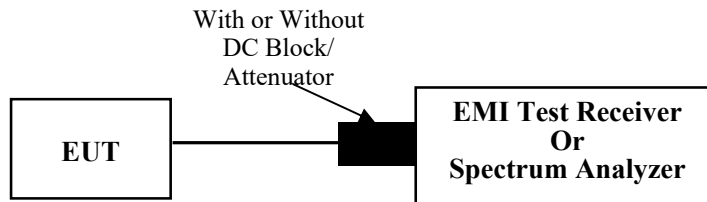

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) \geq RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


3.5 Number Of Hopping Frequency

3.5.1 Applicable Standard

FCC §15.247 (a)(1)(iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 EUT Setup

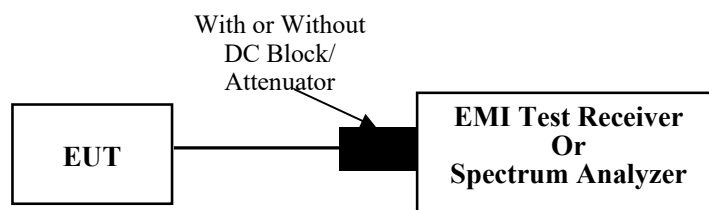

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize


It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

3.6 Time Of Occupancy(Dwell Time)

3.6.1 Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.6.2 EUT Setup

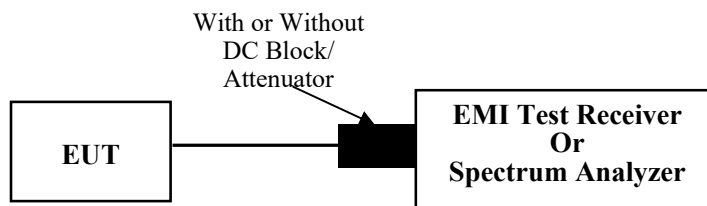

3.6.3 Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.


3.7 Peak Output Power

3.7.1 Applicable Standard

FCC §15.247 (b)(1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

3.7.2 EUT Setup

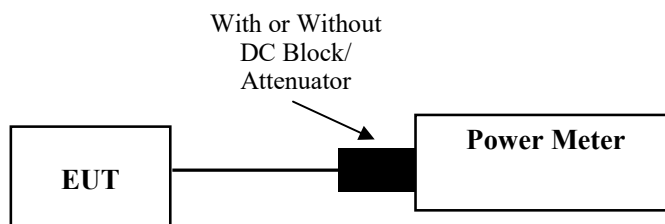

3.7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
2. Add a correction factor to the display.


3.8 100 kHz Bandwidth of Frequency Band Edge

3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.8.2 EUT Setup

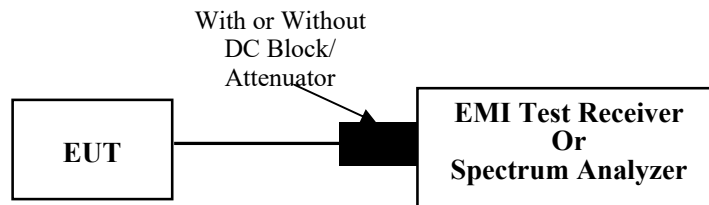

3.8.3 Test Procedure

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	1SN1-8, 1SMJ-7	Test Date:	2022/12/2
Test Site:	CE	Test Mode:	Transmitting(BDR low channel was the worst)
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.6	Relative Humidity: (%)	38	ATM Pressure: (kPa)	101.6
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022/04/01	2023/03/31
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Adapter 1# + IPS:

Test Mode: Transmitting
 Port: Line
 Note:


Date: 2022-12-02

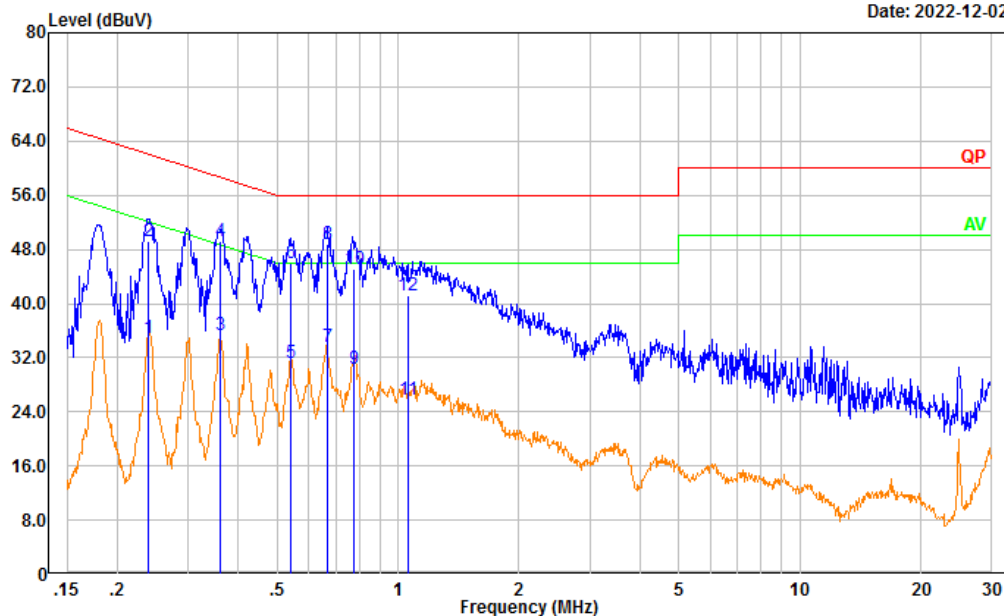

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.239	25.34	9.61	34.95	52.14	17.19	Average
2	0.239	39.65	9.61	49.26	62.14	12.88	QP
3	0.361	25.78	9.61	35.39	48.70	13.31	Average
4	0.361	39.65	9.61	49.26	58.70	9.44	QP
5	0.539	21.60	9.61	31.21	46.00	14.79	Average
6	0.539	36.37	9.61	45.98	56.00	10.02	QP
7	0.667	23.98	9.62	33.60	46.00	12.40	Average
8	0.667	39.19	9.62	48.81	56.00	7.19	QP
9	0.777	20.83	9.62	30.45	46.00	15.55	Average
10	0.777	35.53	9.62	45.15	56.00	10.85	QP
11	1.055	16.27	9.62	25.89	46.00	20.11	Average
12	1.055	31.51	9.62	41.13	56.00	14.87	QP

Test Mode: Transmitting
 Port: neutral
 Note:

Date: 2022-12-02

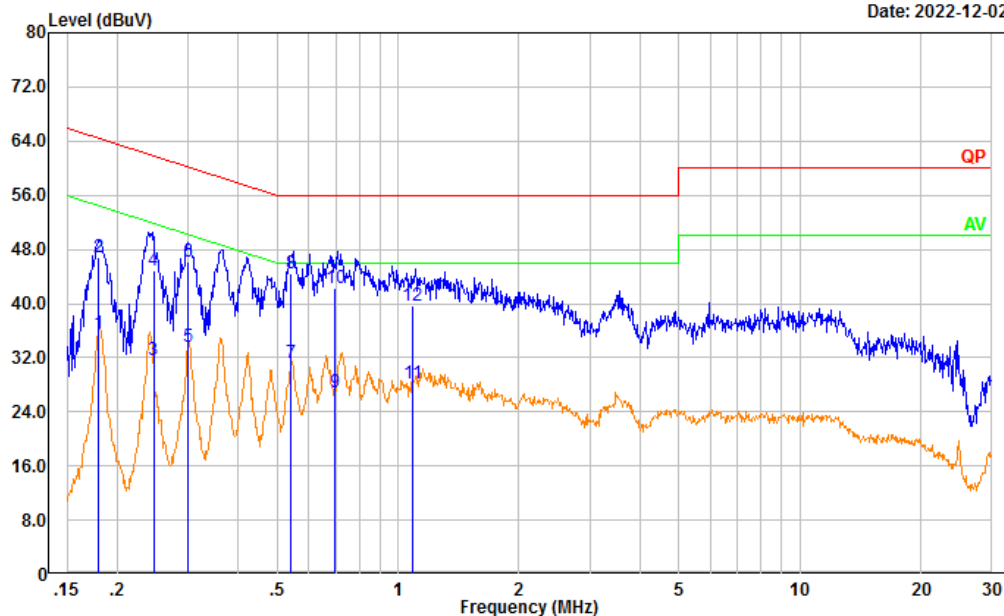


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.180	26.04	9.61	35.65	54.48	18.83	Average
2	0.180	37.26	9.61	46.87	64.48	17.61	QP
3	0.246	22.15	9.61	31.76	51.88	20.12	Average
4	0.246	35.37	9.61	44.98	61.88	16.90	QP
5	0.301	23.91	9.61	33.52	50.22	16.70	Average
6	0.301	36.58	9.61	46.19	60.22	14.03	QP
7	0.543	21.68	9.61	31.29	46.00	14.71	Average
8	0.543	34.74	9.61	44.35	56.00	11.65	QP
9	0.695	17.35	9.62	26.97	46.00	19.03	Average
10	0.695	32.61	9.62	42.23	56.00	13.77	QP
11	1.082	18.58	9.62	28.20	46.00	17.80	Average
12	1.082	30.00	9.62	39.62	56.00	16.38	QP

Adapter 2# + IPS:

Test Mode: Transmitting
 Port: Line
 Note:


Date: 2022-12-02

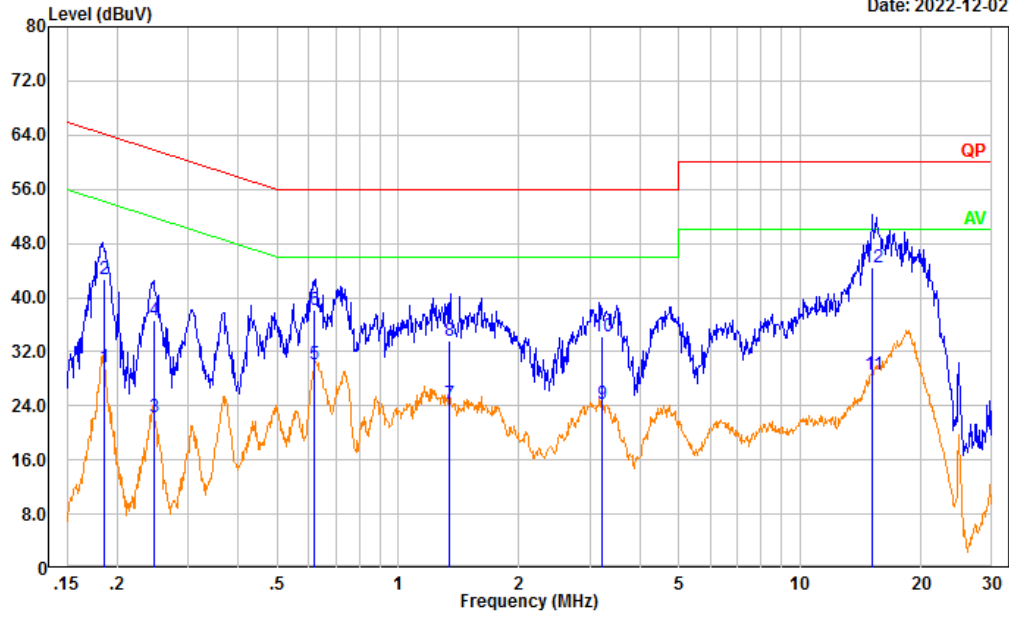

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.185	20.15	9.61	29.76	54.25	24.49	Average
2	0.185	33.14	9.61	42.75	64.25	21.50	QP
3	0.247	12.74	9.61	22.35	51.87	29.52	Average
4	0.247	27.08	9.61	36.69	61.87	25.18	QP
5	0.620	20.49	9.62	30.11	46.00	15.89	Average
6	0.620	28.61	9.62	38.23	56.00	17.77	QP
7	1.342	14.60	9.62	24.22	46.00	21.78	Average
8	1.342	24.09	9.62	33.71	56.00	22.29	QP
9	3.211	14.60	9.65	24.25	46.00	21.75	Average
10	3.211	24.55	9.65	34.20	56.00	21.80	QP
11	15.151	18.93	9.69	28.62	50.00	21.38	Average
12	15.151	34.85	9.69	44.54	60.00	15.46	QP


Test Mode: Transmitting
 Port: neutral
 Note:

Date: 2022-12-02

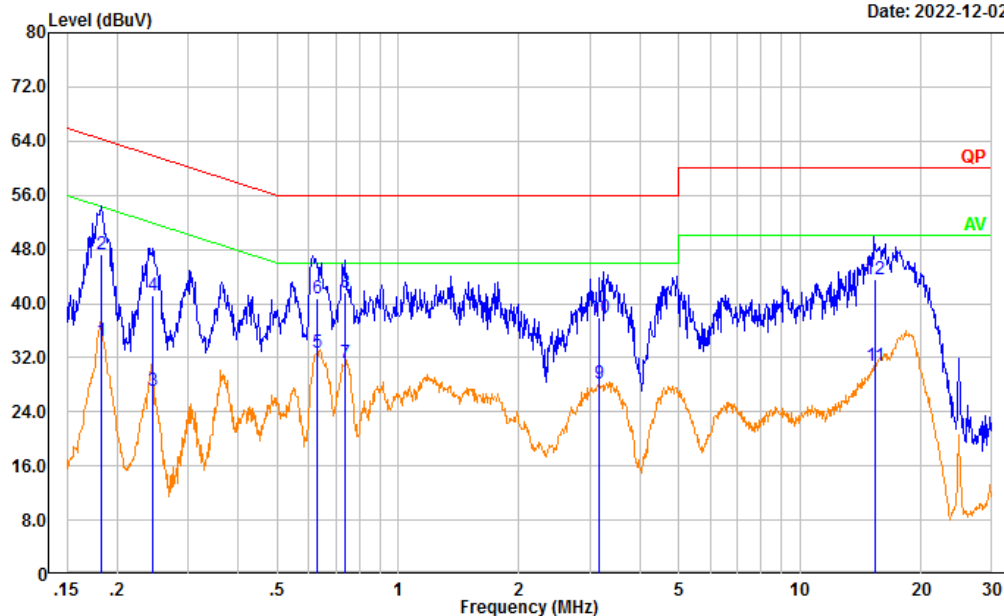


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.183	24.89	9.61	34.50	54.36	19.86	Average
2	0.183	37.60	9.61	47.21	64.36	17.15	QP
3	0.245	17.48	9.61	27.09	51.93	24.84	Average
4	0.245	31.57	9.61	41.18	61.93	20.75	QP
5	0.628	23.01	9.62	32.63	46.00	13.37	Average
6	0.628	31.11	9.62	40.73	56.00	15.27	QP
7	0.739	21.66	9.62	31.28	46.00	14.72	Average
8	0.739	31.99	9.62	41.61	56.00	14.39	QP
9	3.159	18.45	9.65	28.10	46.00	17.90	Average
10	3.159	28.20	9.65	37.85	56.00	18.15	QP
11	15.322	21.20	9.69	30.89	50.00	19.11	Average
12	15.322	33.91	9.69	43.60	60.00	16.40	QP

Adapter 3# + IPS:

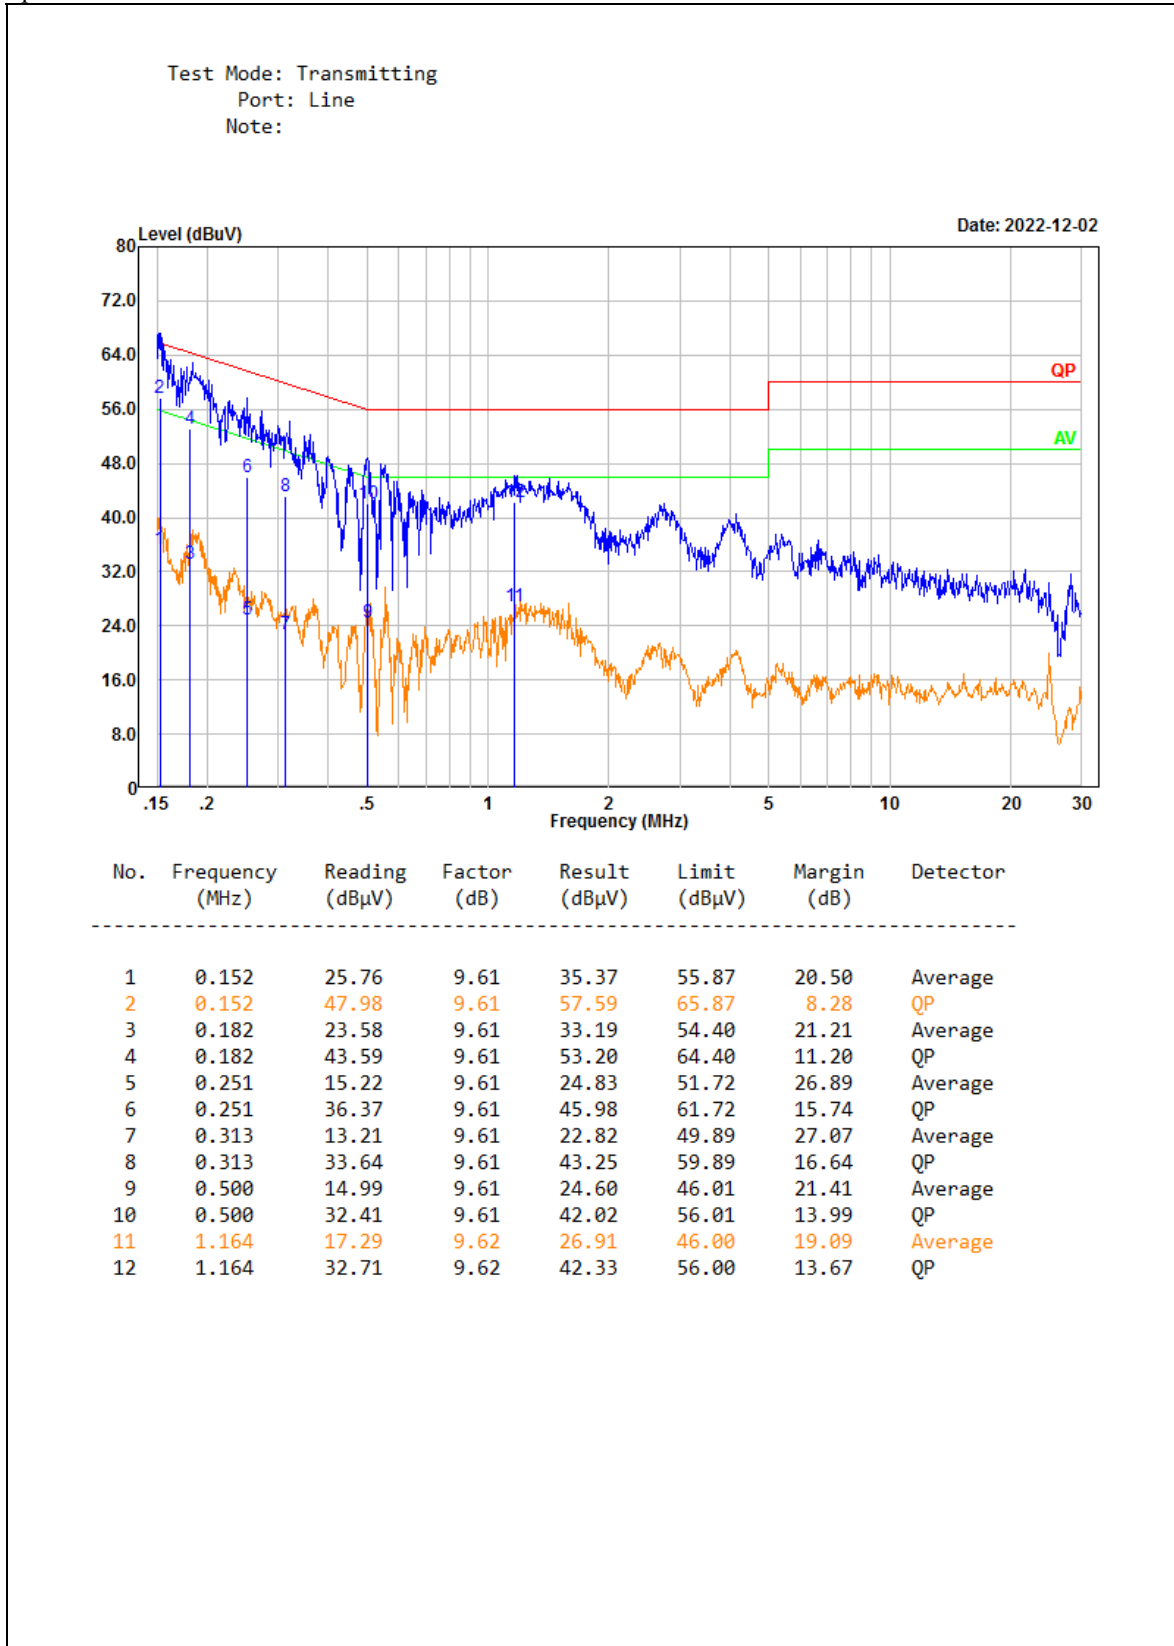


Test Mode: Transmitting
 Port: neutral
 Note:

Date: 2022-12-02

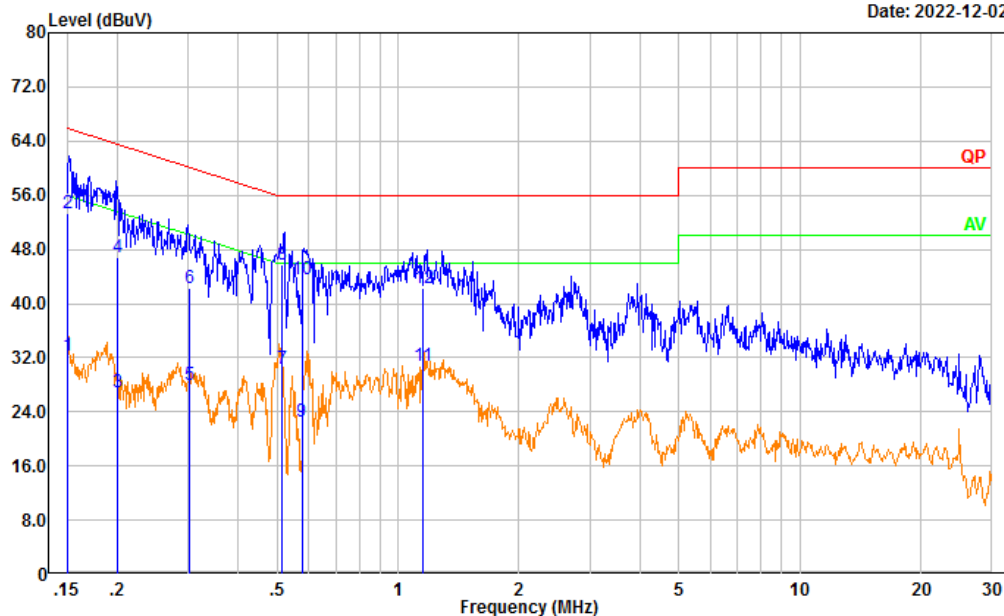


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	22.69	9.61	32.30	55.97	23.67	Average
2	0.151	43.65	9.61	53.26	65.97	12.71	QP
3	0.201	17.29	9.61	26.90	53.58	26.68	Average
4	0.201	37.30	9.61	46.91	63.58	16.67	QP
5	0.302	18.30	9.61	27.91	50.20	22.29	Average
6	0.302	32.66	9.61	42.27	60.20	17.93	QP
7	0.516	20.65	9.61	30.26	46.00	15.74	Average
8	0.516	36.09	9.61	45.70	56.00	10.30	QP
9	0.576	12.98	9.62	22.60	46.00	23.40	Average
10	0.576	33.97	9.62	43.59	56.00	12.41	QP
11	1.154	21.14	9.62	30.76	46.00	15.24	Average
12	1.154	32.69	9.62	42.31	56.00	13.69	QP

Adapter 1# + TN:

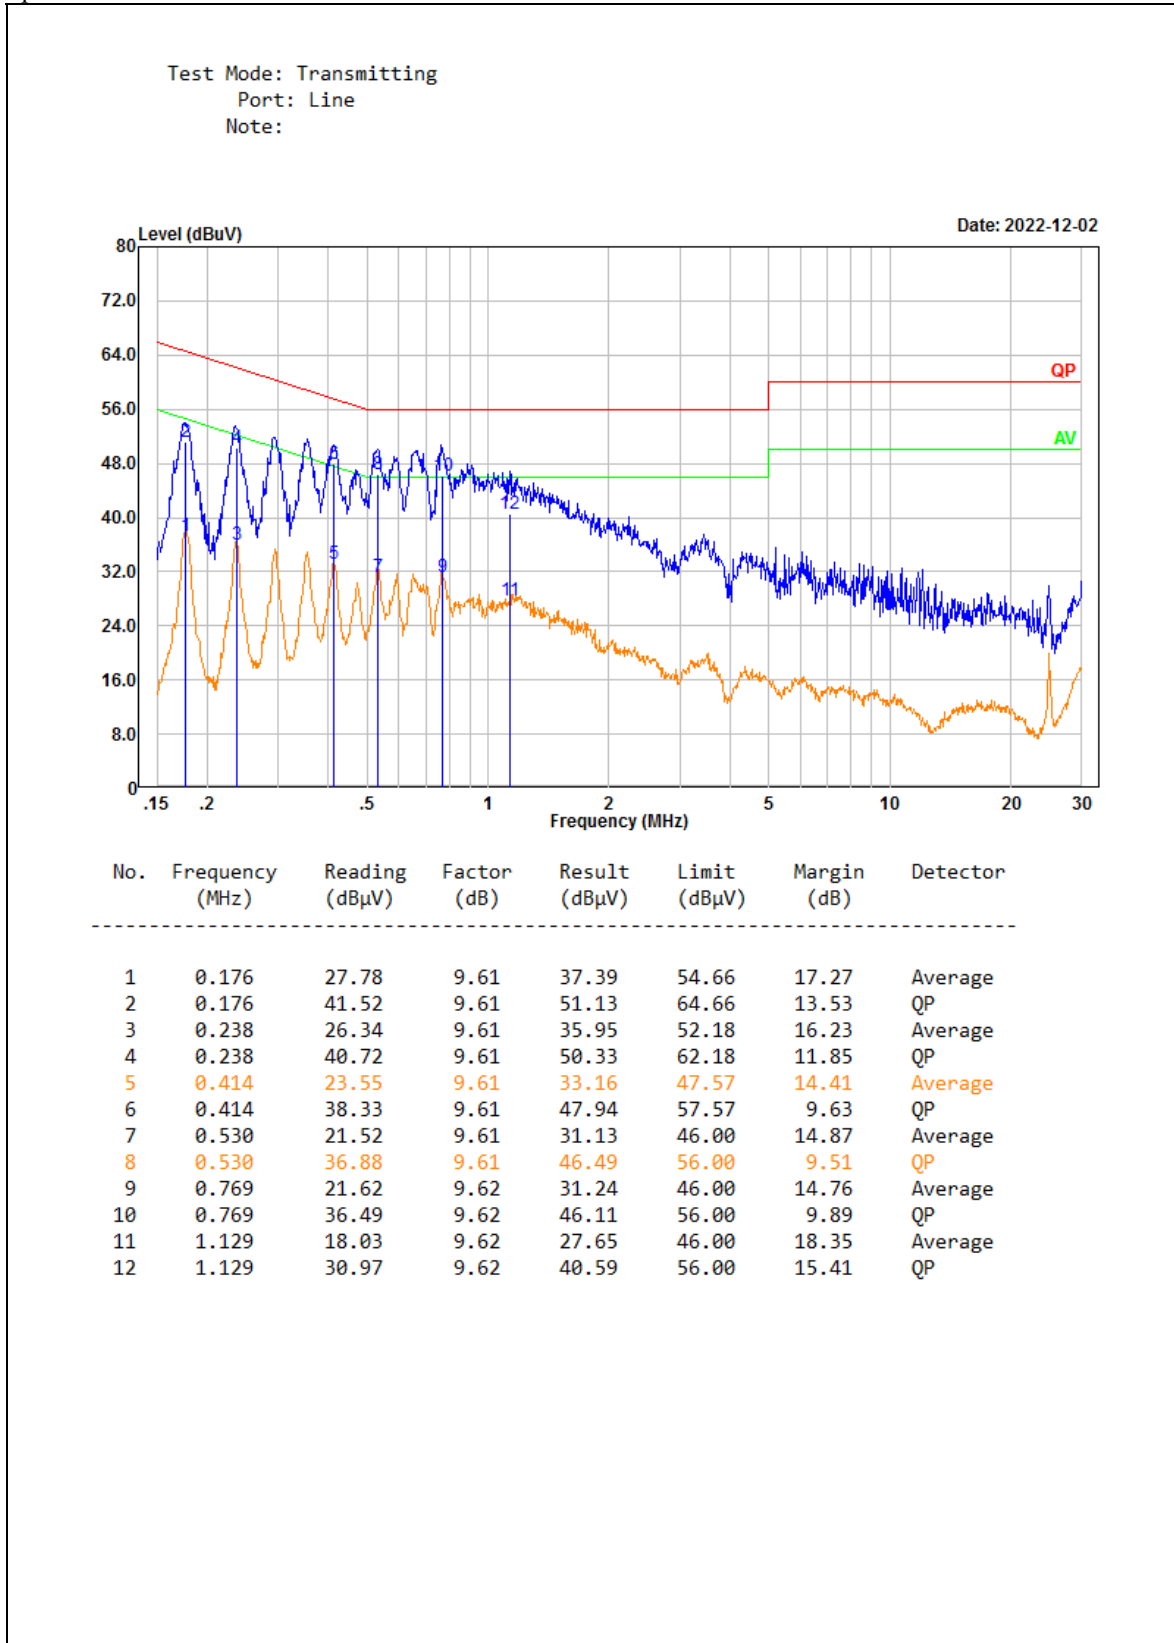


Test Mode: Transmitting
 Port: neutral
 Note:

Date: 2022-12-02

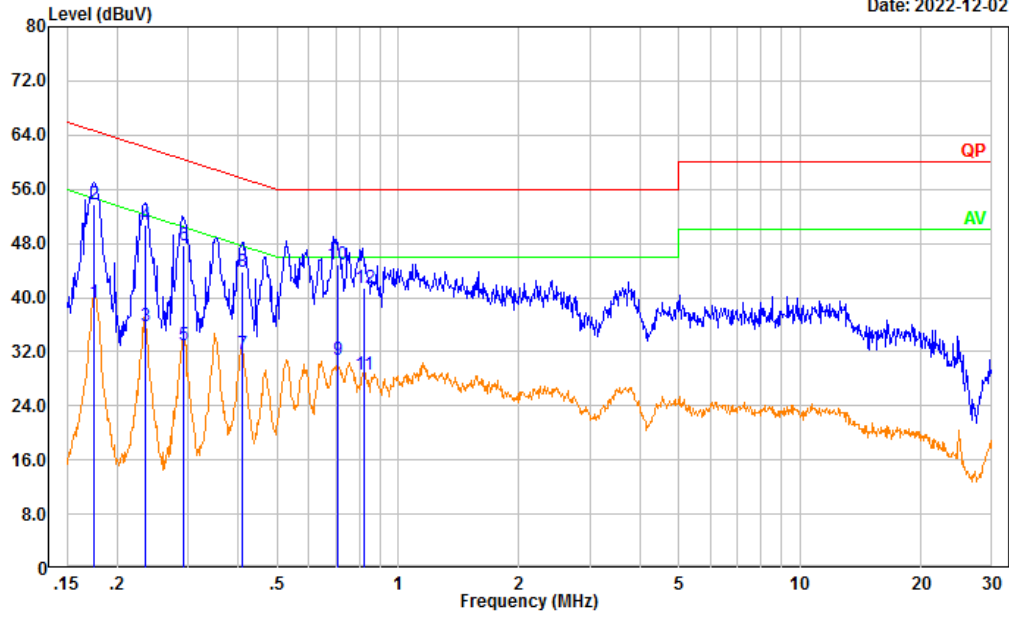


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.176	29.58	9.61	39.19	54.68	15.49	Average
2	0.176	44.15	9.61	53.76	64.68	10.92	QP
3	0.235	26.08	9.61	35.69	52.26	16.57	Average
4	0.235	41.12	9.61	50.73	62.26	11.53	QP
5	0.292	23.41	9.61	33.02	50.47	17.45	Average
6	0.292	38.14	9.61	47.75	60.47	12.72	QP
7	0.410	22.14	9.61	31.75	47.66	15.91	Average
8	0.410	34.19	9.61	43.80	57.66	13.86	QP
9	0.705	21.14	9.62	30.76	46.00	15.24	Average
10	0.705	35.30	9.62	44.92	56.00	11.08	QP
11	0.821	18.92	9.62	28.54	46.00	17.46	Average
12	0.821	31.80	9.62	41.42	56.00	14.58	QP

Adapter 2# + TN:

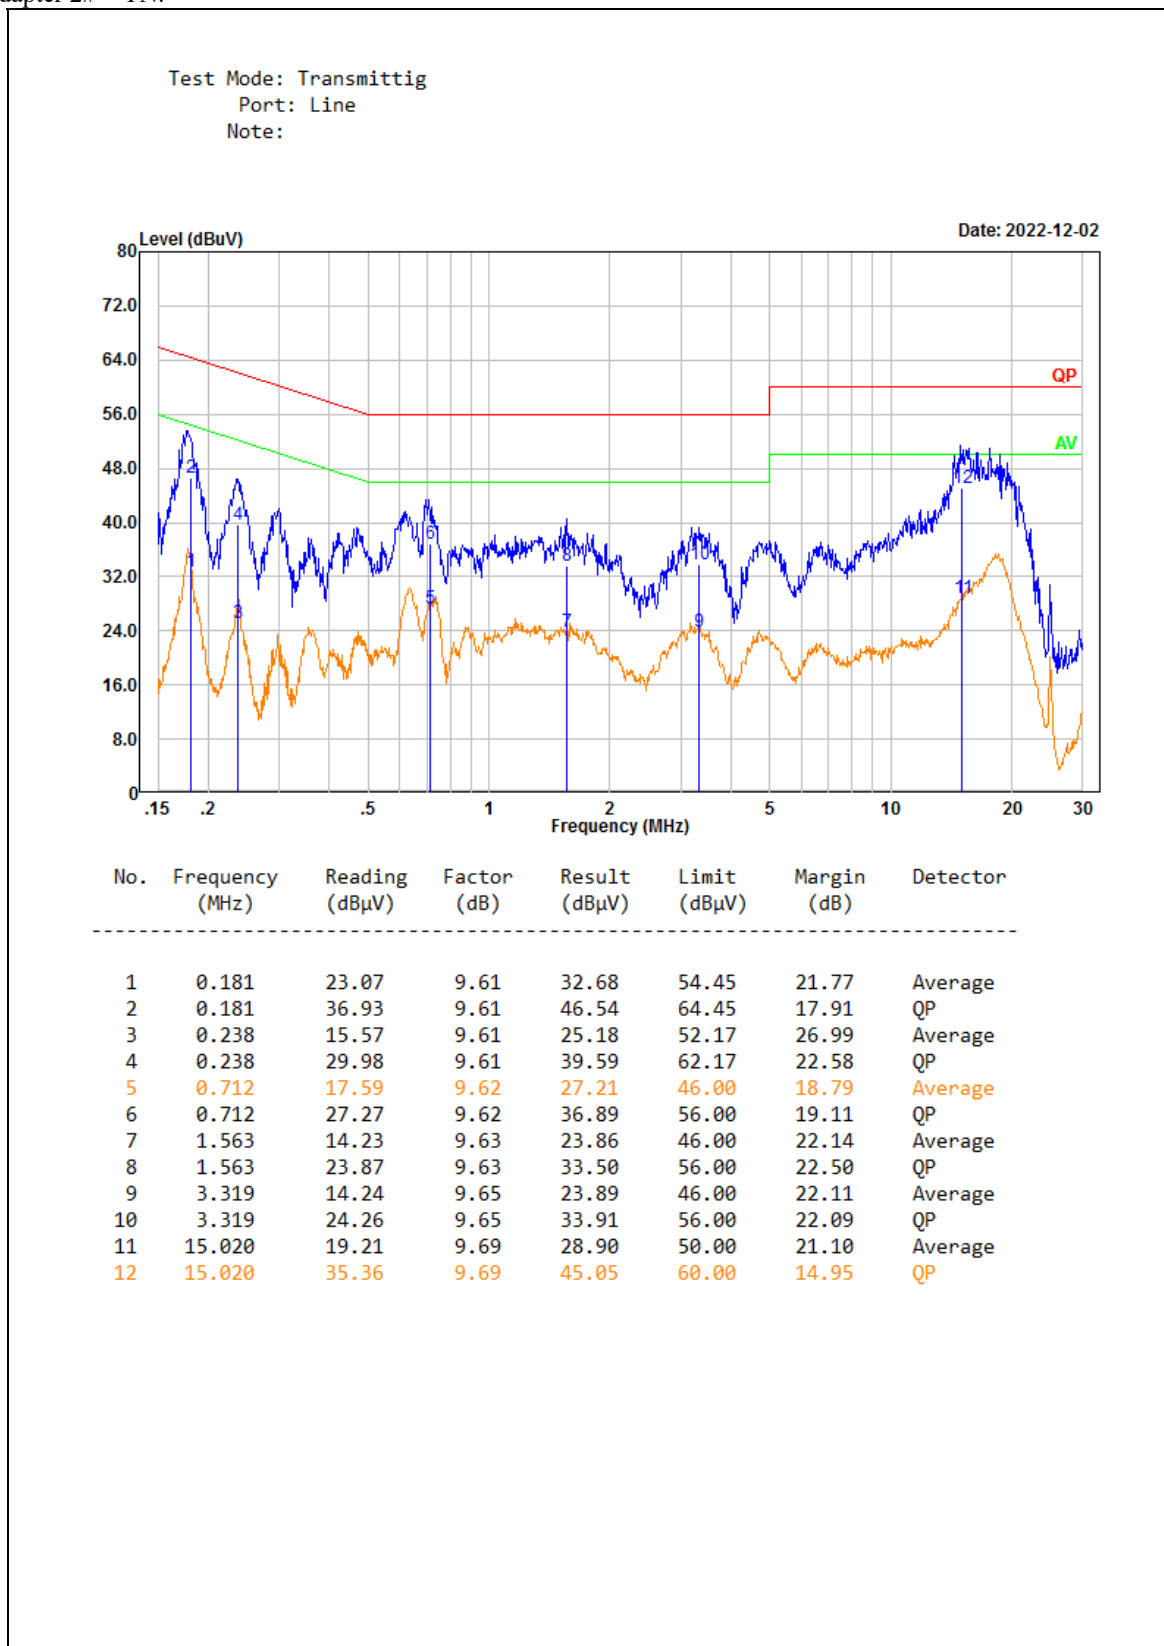


Test Mode: Transmitting
 Port: neutral
 Note:

Date: 2022-12-02

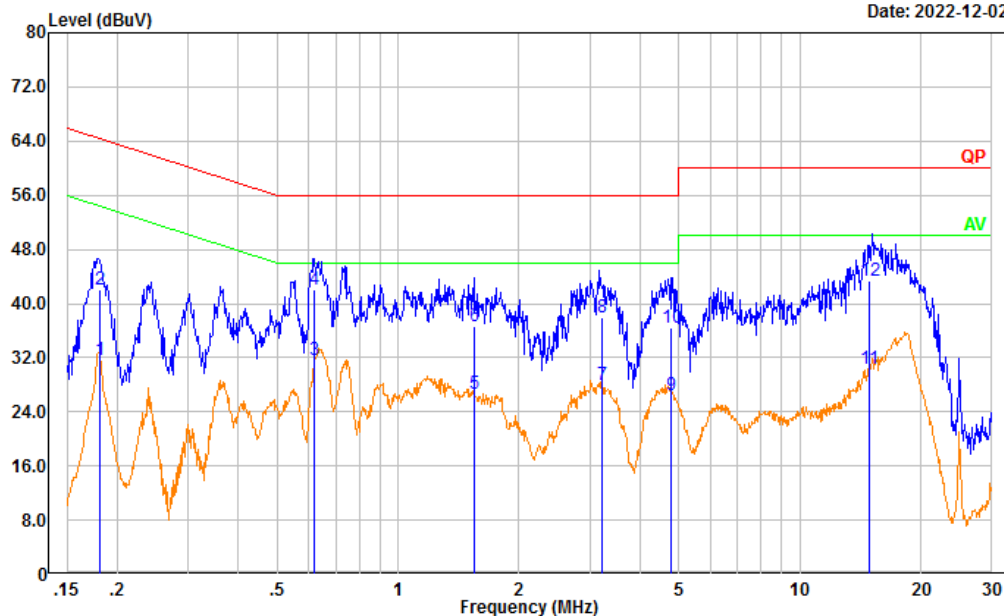


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.181	22.04	9.61	31.65	54.44	22.79	Average
2	0.181	32.35	9.61	41.96	64.44	22.48	QP
3	0.620	21.95	9.62	31.57	46.00	14.43	Average
4	0.620	32.44	9.62	42.06	56.00	13.94	QP
5	1.551	17.02	9.63	26.65	46.00	19.35	Average
6	1.551	26.93	9.63	36.56	56.00	19.44	QP
7	3.205	18.23	9.65	27.88	46.00	18.12	Average
8	3.205	28.39	9.65	38.04	56.00	17.96	QP
9	4.778	16.83	9.66	26.49	46.00	19.51	Average
10	4.778	26.74	9.66	36.40	56.00	19.60	QP
11	14.877	20.72	9.69	30.41	50.00	19.59	Average
12	14.877	33.59	9.69	43.28	60.00	16.72	QP

Adapter 3# + TN:

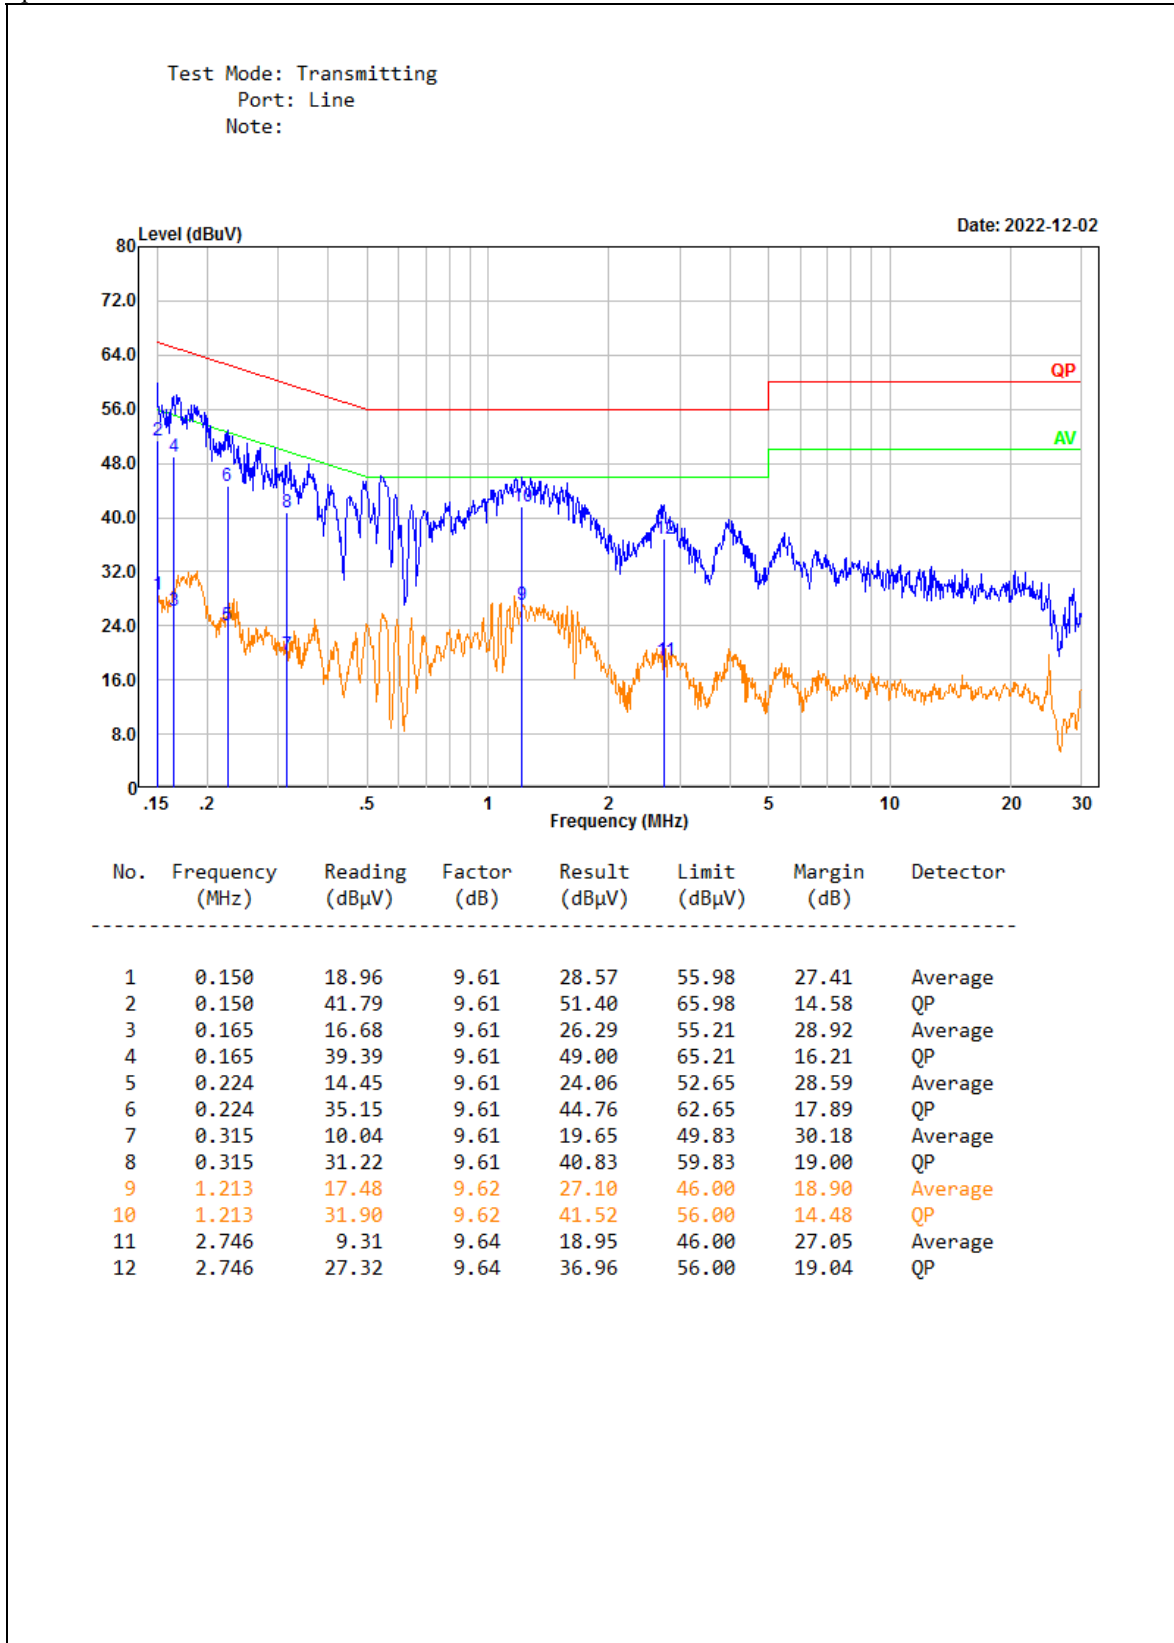

Test Mode: Transmitting
 Port: neutral
 Note:

Date: 2022-12-02

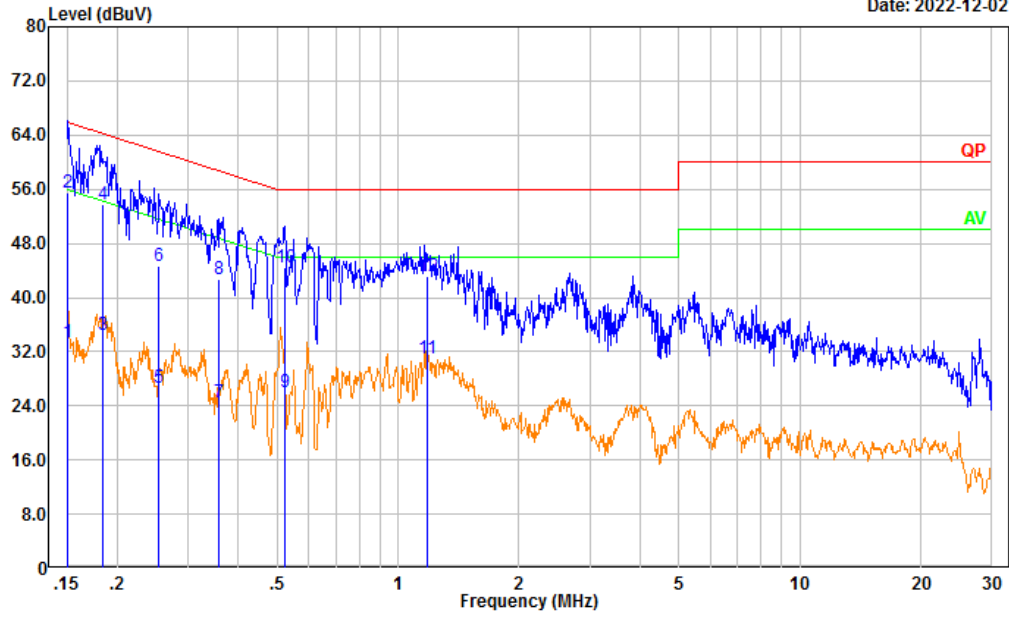

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.151	23.77	9.61	33.38	55.95	22.57	Average
2	0.151	45.81	9.61	55.42	65.95	10.53	QP
3	0.184	24.80	9.61	34.41	54.32	19.91	Average
4	0.184	44.11	9.61	53.72	64.32	10.60	QP
5	0.253	17.10	9.61	26.71	51.66	24.95	Average
6	0.253	35.15	9.61	44.76	61.66	16.90	QP
7	0.358	14.83	9.61	24.44	48.77	24.33	Average
8	0.358	33.11	9.61	42.72	58.77	16.05	QP
9	0.521	16.44	9.61	26.05	46.00	19.95	Average
10	0.521	34.92	9.61	44.53	56.00	11.47	QP
11	1.179	21.30	9.62	30.92	46.00	15.08	Average
12	1.179	33.44	9.62	43.06	56.00	12.94	QP

4.2 Radiation Spurious Emissions

Serial Number:	1SN1-8, 1SMJ-7	Test Date:	2022/12/14 ~2022/12/16
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Carl Xue, Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22~22.4	Relative Humidity: (%)	48~51	ATM Pressure: (kPa)	101.2~101.8
----------------------	---------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
AH	Preamplifier	PAM-1840VH	190	2022/11/09	2023/11/08
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2022/08/07	2023/08/06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022/08/07	2023/08/06

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X, Y, Z Axis according to C63.10 Figure 8, the worst orientation was photographed and it's data was recorded.

1) 30MHz-1GHz(BDR Low channel was the worst)
Adapter 1# + IPS:

Test Mode: Transmitting
 Polarization: horizontal
 Note:


Date: 2022-12-16

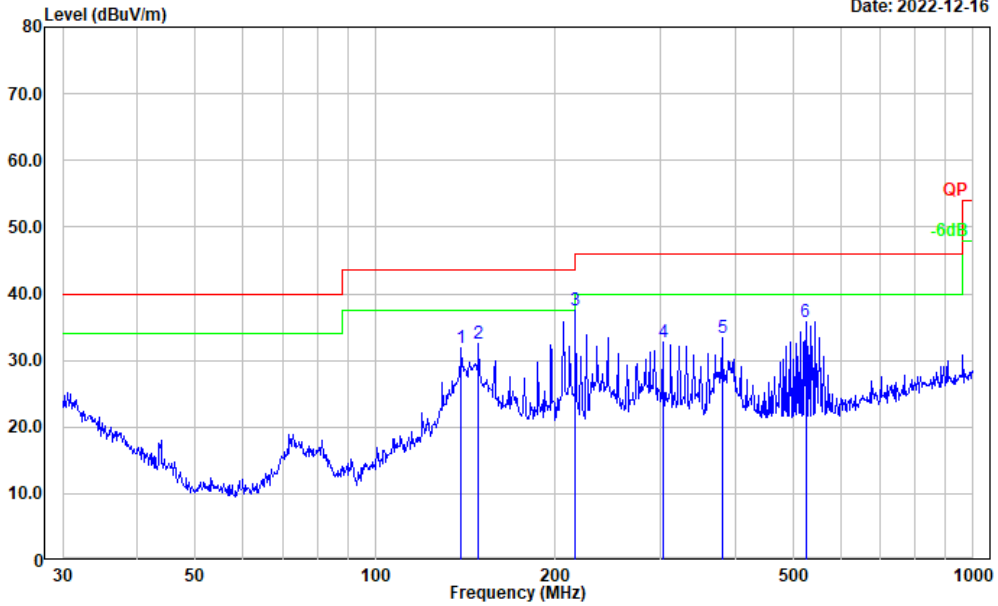

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	139.361	43.75	-11.83	31.92	43.50	11.58	Peak
2	148.963	44.53	-12.00	32.53	43.50	10.97	Peak
3	216.024	50.10	-12.65	37.45	46.00	8.55	Peak
4	302.481	43.26	-10.61	32.65	46.00	13.35	Peak
5	379.914	42.54	-9.10	33.44	46.00	12.56	Peak
6	524.554	41.69	-5.89	35.80	46.00	10.20	Peak

Test Mode: Transmitting
 Polarization: vertical
 Note:


Date: 2022-12-16

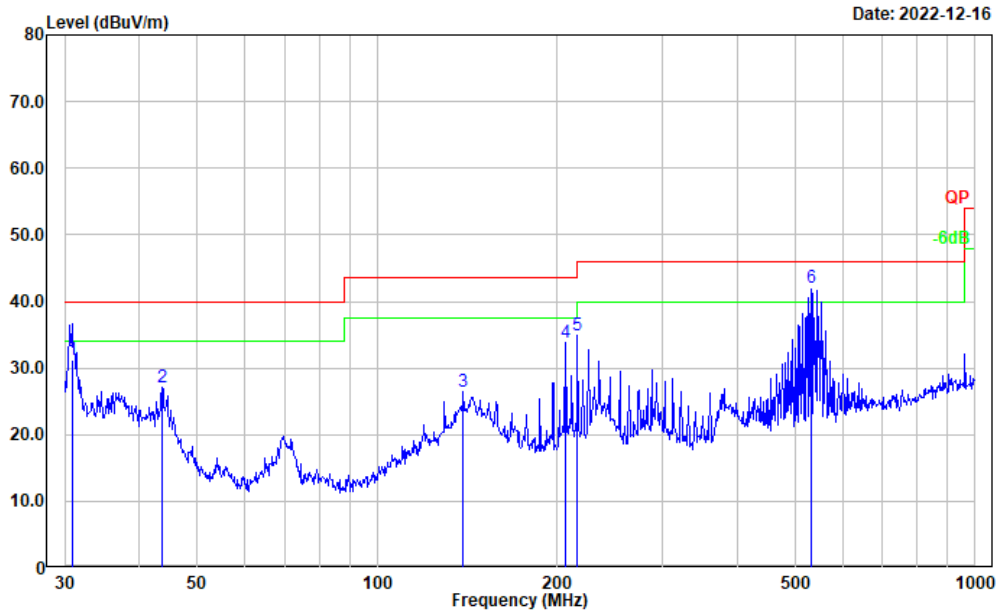

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.879	35.41	-4.28	31.13	40.00	8.87	QP
2	43.659	40.47	-13.46	27.01	40.00	12.99	Peak
3	139.361	38.24	-11.83	26.41	43.50	17.09	Peak
4	206.398	46.25	-12.39	33.86	43.50	9.64	Peak
5	216.024	47.57	-12.65	34.92	46.00	11.08	Peak
6	532.809	48.01	-5.98	42.03	46.00	3.97	QP

Adapter 1# + TN:


Test Mode: Transmitting
 Polarization: horizontal
 Note:

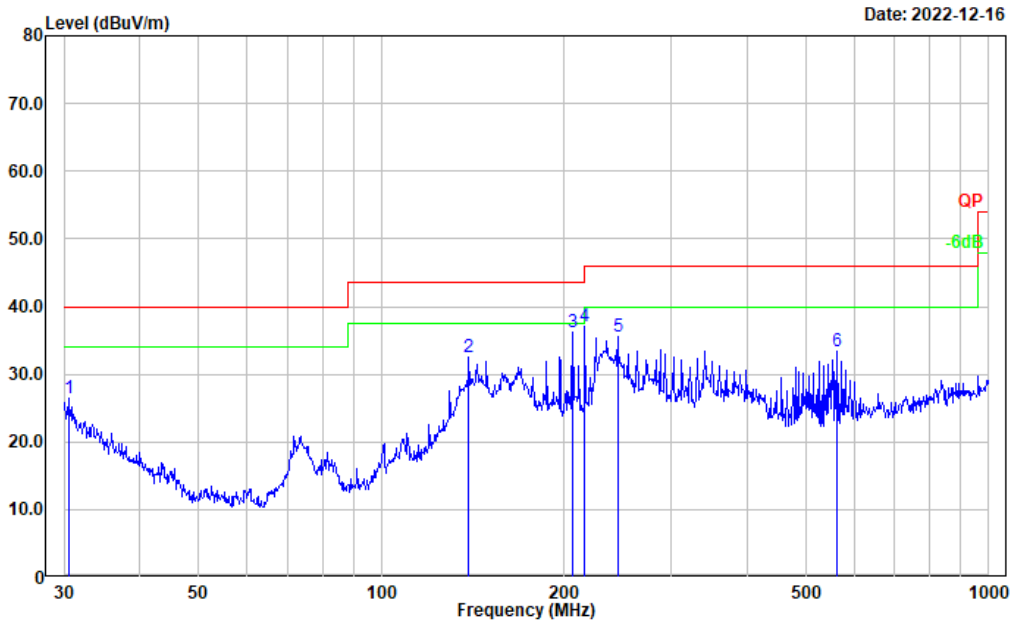

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	30.43	-4.00	26.43	40.00	13.57	Peak
2	139.361	44.33	-11.83	32.50	43.50	11.00	Peak
3	206.398	48.56	-12.39	36.17	43.50	7.33	Peak
4	216.024	49.69	-12.65	37.04	46.00	8.96	Peak
5	245.090	48.53	-12.97	35.56	46.00	10.44	Peak
6	562.662	39.01	-5.63	33.38	46.00	12.62	Peak

Test Mode: Transmitting
 Polarization: vertical
 Note:

Date: 2022-12-16

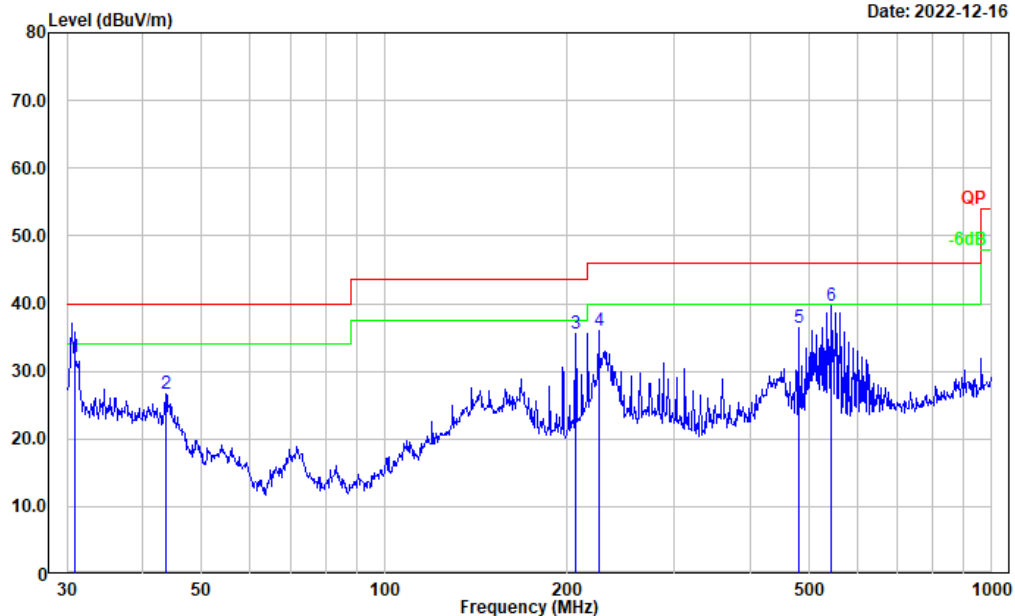


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.865	36.39	-4.26	32.13	40.00	7.87	QP
2	43.659	40.07	-13.46	26.61	40.00	13.39	Peak
3	206.398	48.03	-12.39	35.64	43.50	7.86	Peak
4	225.308	48.80	-12.87	35.93	46.00	10.07	Peak
5	480.528	42.76	-6.25	36.51	46.00	9.49	Peak
6	543.274	45.51	-5.89	39.62	46.00	6.38	Peak

Adapter 2# + IPS:

Test Mode: Transmitting
 Polarization: horizontal
 Note:


Date: 2022-12-16

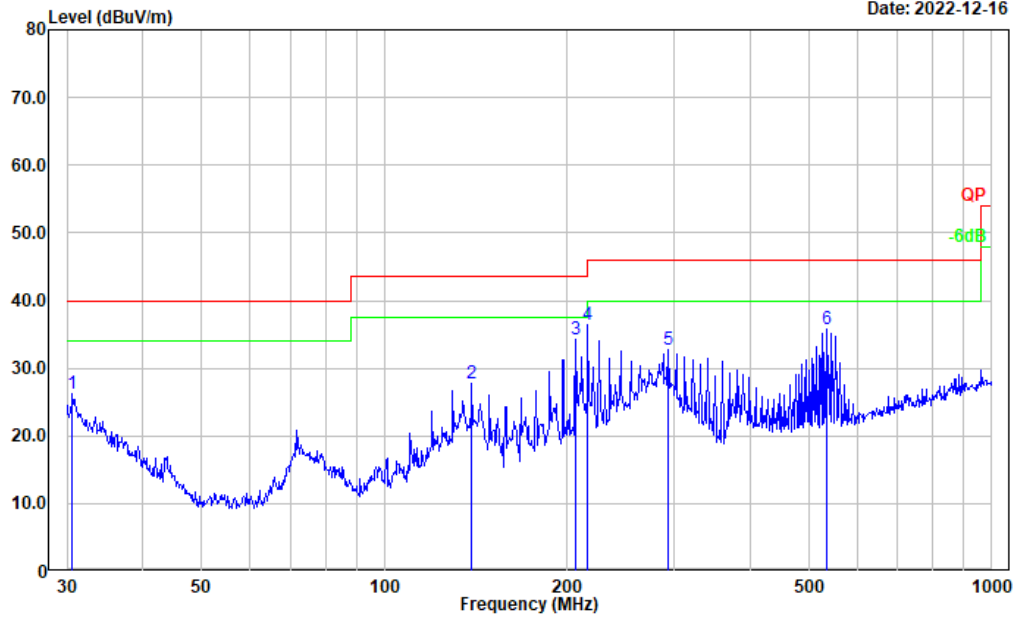

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	30.39	-4.09	26.30	40.00	13.70	Peak
2	139.361	39.51	-11.83	27.68	43.50	15.82	Peak
3	206.398	46.71	-12.39	34.32	43.50	9.18	Peak
4	216.024	48.99	-12.65	36.34	46.00	9.66	Peak
5	293.084	43.50	-10.87	32.63	46.00	13.37	Peak
6	533.832	41.81	-6.00	35.81	46.00	10.19	Peak

Test Mode: Transmitting
 Polarization: vertical
 Note:

Date: 2022-12-16

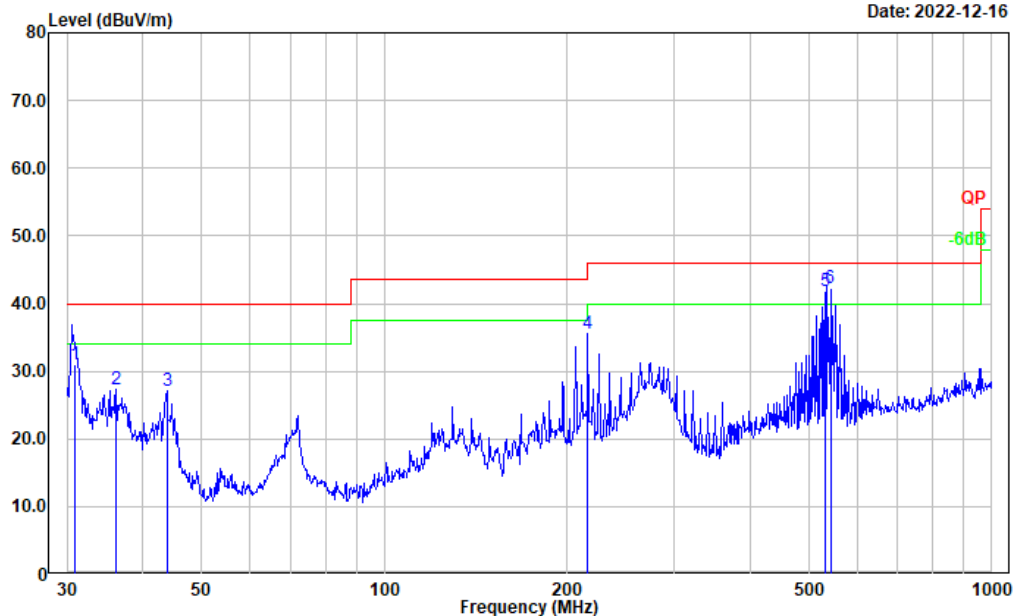


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.882	35.32	-4.28	31.04	40.00	8.96	QP
2	36.127	35.75	-8.34	27.41	40.00	12.59	Peak
3	43.812	40.69	-13.56	27.13	40.00	12.87	Peak
4	216.024	48.12	-12.65	35.47	46.00	10.53	Peak
5	532.809	47.91	-5.98	41.93	46.00	4.07	QP
6	542.406	48.19	-5.91	42.28	46.00	3.72	QP

Adapter 2# + TN:

Test Mode: Transmitting
 Polarization: horizontal
 Note:


Date: 2022-12-16

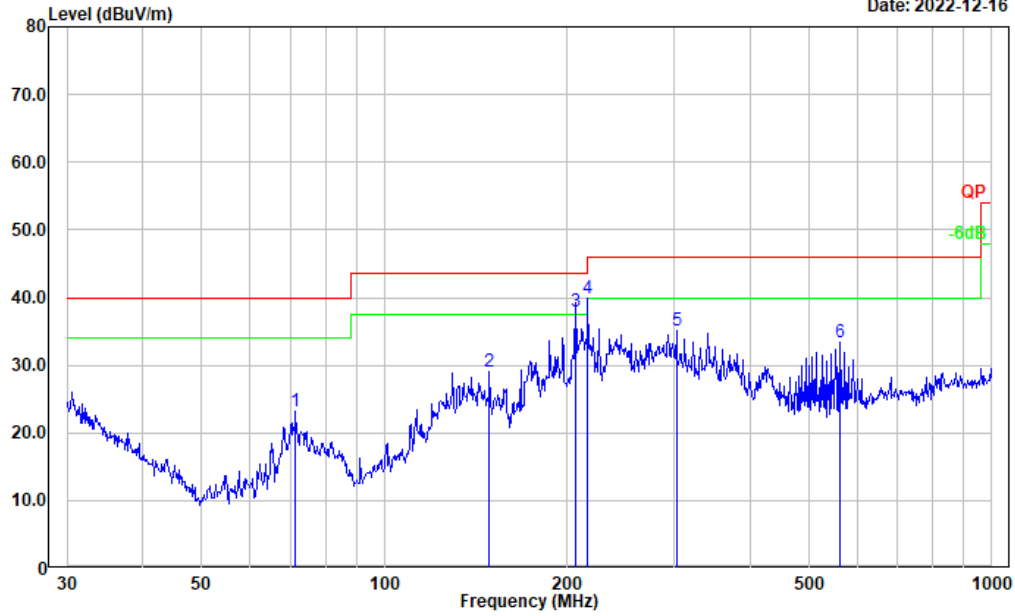

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	71.330	39.84	-16.61	23.23	40.00	16.77	Peak
2	148.963	41.07	-12.00	29.07	43.50	14.43	Peak
3	206.406	50.27	-12.39	37.88	43.50	5.62	QP
4	216.024	52.53	-12.65	39.88	46.00	6.12	Peak
5	302.481	45.67	-10.61	35.06	46.00	10.94	Peak
6	562.662	38.96	-5.63	33.33	46.00	12.67	Peak

Test Mode: Transmitting
 Polarization: vertical
 Note:

Date: 2022-12-16

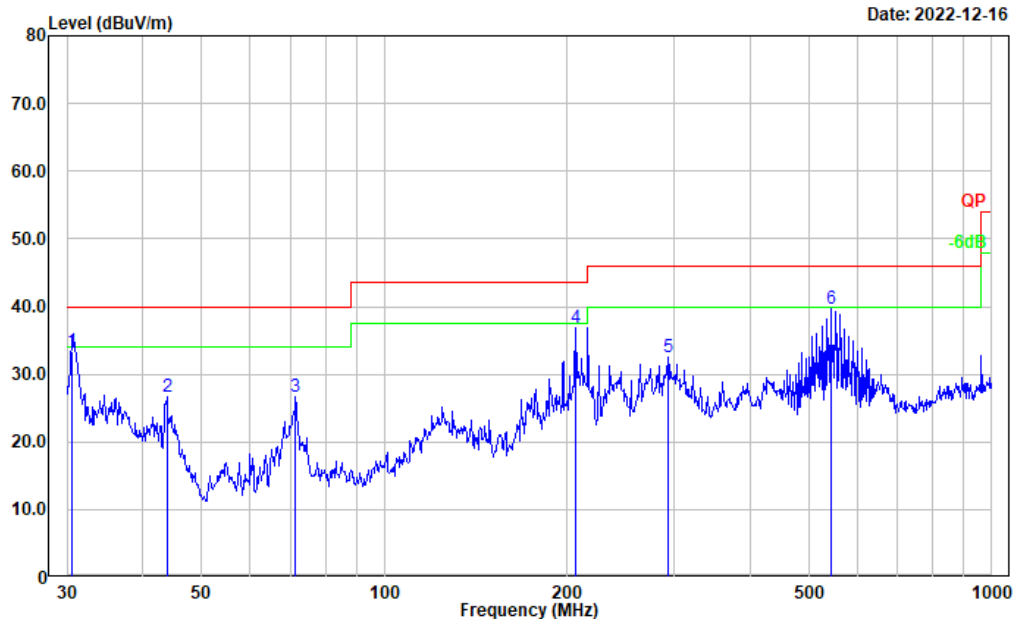


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	30.617	37.50	-4.07	33.43	40.00	6.57	QP
2	43.812	40.31	-13.56	26.75	40.00	13.25	Peak
3	71.330	43.37	-16.61	26.76	40.00	13.24	Peak
4	206.398	49.33	-12.39	36.94	43.50	6.56	Peak
5	293.084	43.40	-10.87	32.53	46.00	13.47	Peak
6	543.274	45.59	-5.89	39.70	46.00	6.30	Peak

Adapter 3# + IPS:

Test Mode: Transmitting
 Polarization: horizontal
 Note:


Date: 2022-12-16

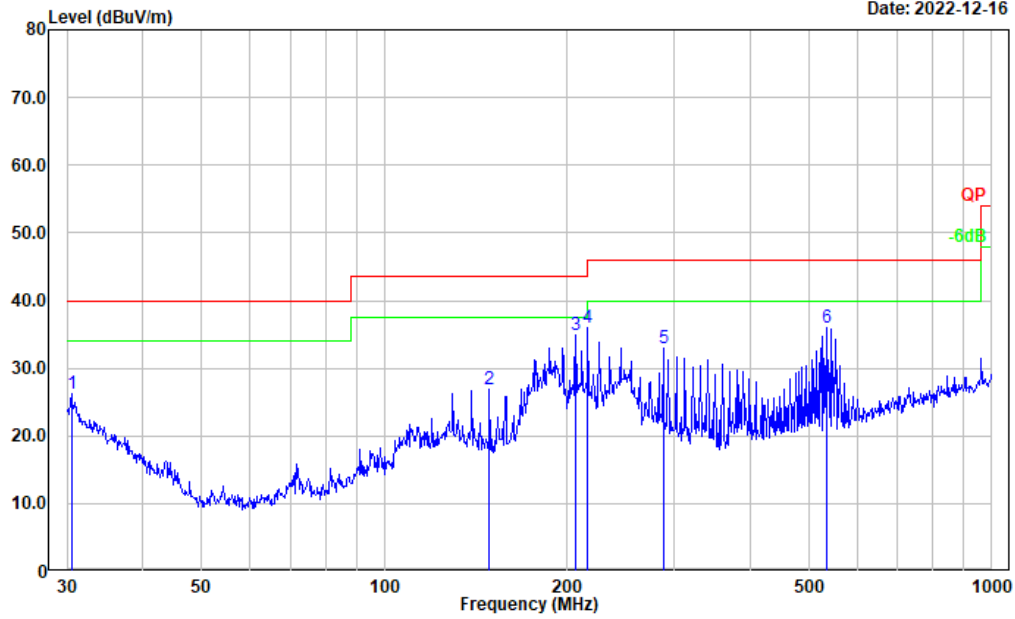

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	30.27	-4.00	26.27	40.00	13.73	Peak
2	148.963	38.89	-12.00	26.89	43.50	16.61	Peak
3	206.398	47.28	-12.39	34.89	43.50	8.61	Peak
4	216.024	48.56	-12.65	35.91	46.00	10.09	Peak
5	287.990	44.13	-11.16	32.97	46.00	13.03	Peak
6	533.832	41.97	-6.00	35.97	46.00	10.03	Peak

Test Mode: Transmitting
 Polarization: vertical
 Note:


Date: 2022-12-16

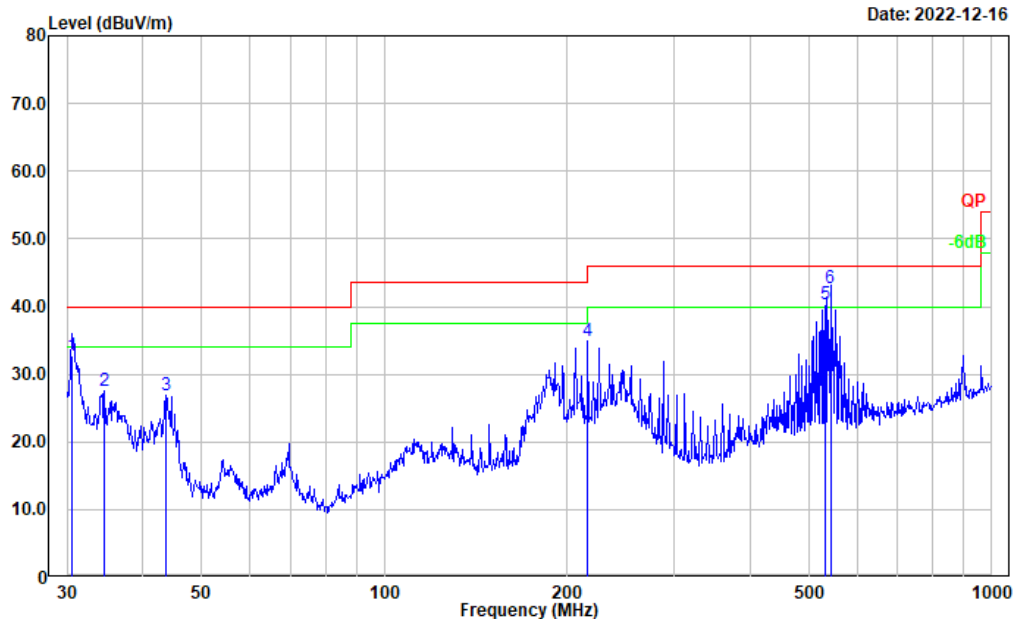

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.647	36.92	-4.09	32.83	40.00	7.17	QP
2	34.639	34.74	-7.19	27.55	40.00	12.45	Peak
3	43.659	40.32	-13.46	26.86	40.00	13.14	Peak
4	216.024	47.53	-12.65	34.88	46.00	11.12	Peak
5	532.787	46.20	-5.98	40.22	46.00	5.78	QP
6	542.406	48.53	-5.91	42.62	46.00	3.38	QP

Adapter 3# + TN:


Test Mode: Transmitting
 Polarization: horizontal
 Note:

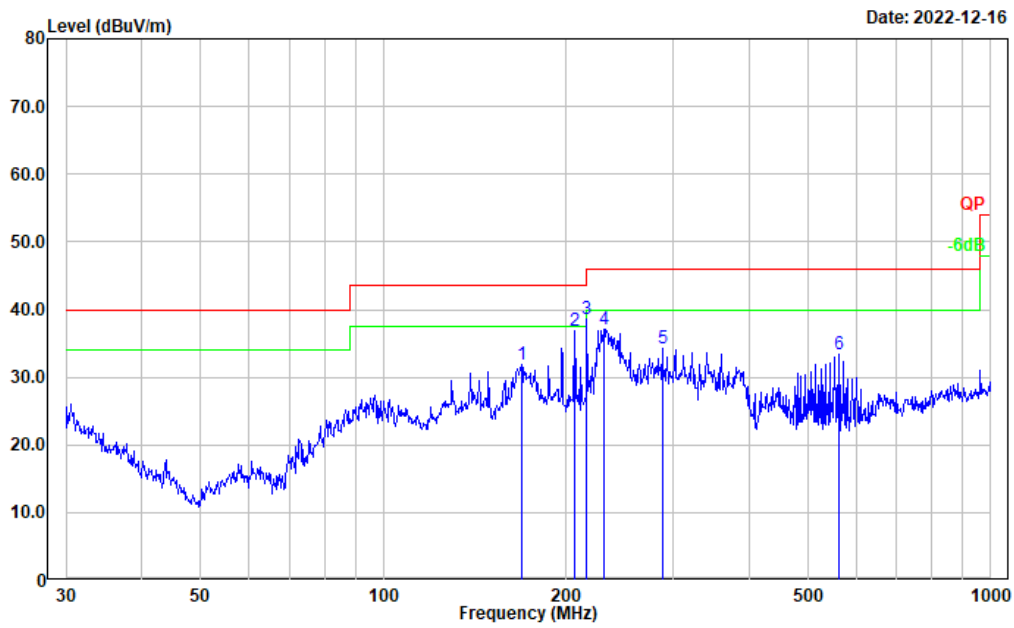

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	169.005	44.70	-12.87	31.83	43.50	11.67	Peak
2	206.398	49.32	-12.39	36.93	43.50	6.57	Peak
3	216.024	51.24	-12.65	38.59	46.00	7.41	Peak
4	230.907	50.10	-13.01	37.09	46.00	8.91	Peak
5	287.990	45.38	-11.16	34.22	46.00	11.78	Peak
6	562.662	39.02	-5.63	33.39	46.00	12.61	Peak

Test Mode: Transmitting
 Polarization: vertical
 Note:

Date: 2022-12-16

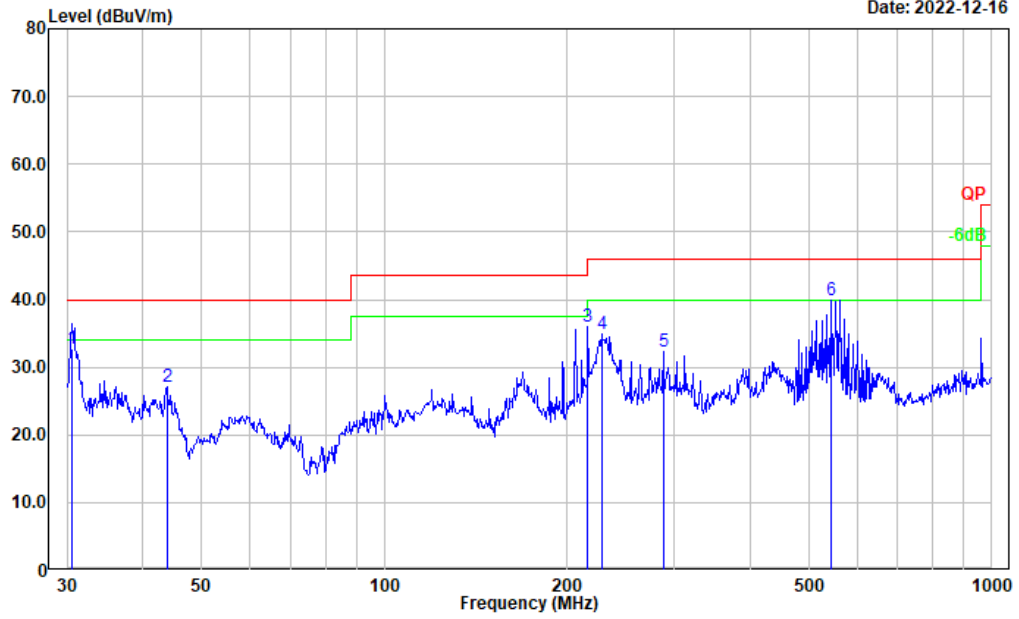


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.641	36.73	-4.09	32.64	40.00	7.36	QP
2	43.812	40.56	-13.56	27.00	40.00	13.00	Peak
3	216.024	48.63	-12.65	35.98	46.00	10.02	Peak
4	227.691	47.83	-12.93	34.90	46.00	11.10	Peak
5	287.990	43.38	-11.16	32.22	46.00	13.78	Peak
6	543.274	45.73	-5.89	39.84	46.00	6.16	Peak


2) 1-25GHz(Adapter 3# + IPS was the worst):*BDR Mode(GFSK) was the worst:*

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2402.000	68.99	PK	H	31.51	100.50	N/A	N/A
2402.000	57.07	AV	H	31.51	88.58	N/A	N/A
2402.000	67.40	PK	V	31.51	98.91	N/A	N/A
2402.000	56.23	AV	V	31.51	87.74	N/A	N/A
2390.000	26.58	PK	H	31.46	58.04	74.00	15.96
2390.000	13.87	AV	H	31.46	45.33	54.00	8.67
4804.000	33.71	PK	H	10.91	44.62	74.00	29.38
4804.000	21.36	AV	H	10.91	32.27	54.00	21.73
7206.000	34.18	PK	H	14.22	48.40	74.00	25.60
7206.000	22.09	AV	H	14.22	36.31	54.00	17.69
Middle Channel: 2441 MHz							
2441.000	67.43	PK	H	31.61	99.04	N/A	N/A
2441.000	56.17	AV	H	31.61	87.78	N/A	N/A
2441.000	64.30	PK	V	31.61	95.91	N/A	N/A
2441.000	53.20	AV	V	31.61	84.81	N/A	N/A
4882.000	33.90	PK	H	11.07	44.97	74.00	29.03
4882.000	21.45	AV	H	11.07	32.52	54.00	21.48
7323.000	34.26	PK	H	14.80	49.06	74.00	24.94
7323.000	22.13	AV	H	14.80	36.93	54.00	17.07
High Channel: 2480 MHz							
2480.000	64.76	PK	H	31.64	96.40	N/A	N/A
2480.000	53.98	AV	H	31.64	85.62	N/A	N/A
2480.000	62.53	PK	V	31.64	94.17	N/A	N/A
2480.000	51.41	AV	V	31.64	83.05	N/A	N/A
2483.500	27.67	PK	H	31.64	59.31	74.00	14.69
2483.500	14.29	AV	H	31.64	45.93	54.00	8.07
4960.000	34.79	PK	H	11.23	46.02	74.00	27.98
4960.000	22.40	AV	H	11.23	33.63	54.00	20.37
7440.000	33.93	PK	H	15.26	49.19	74.00	24.81
7440.000	21.47	AV	H	15.26	36.73	54.00	17.27

Worst Test plots(BDR Middle channel was the worst)

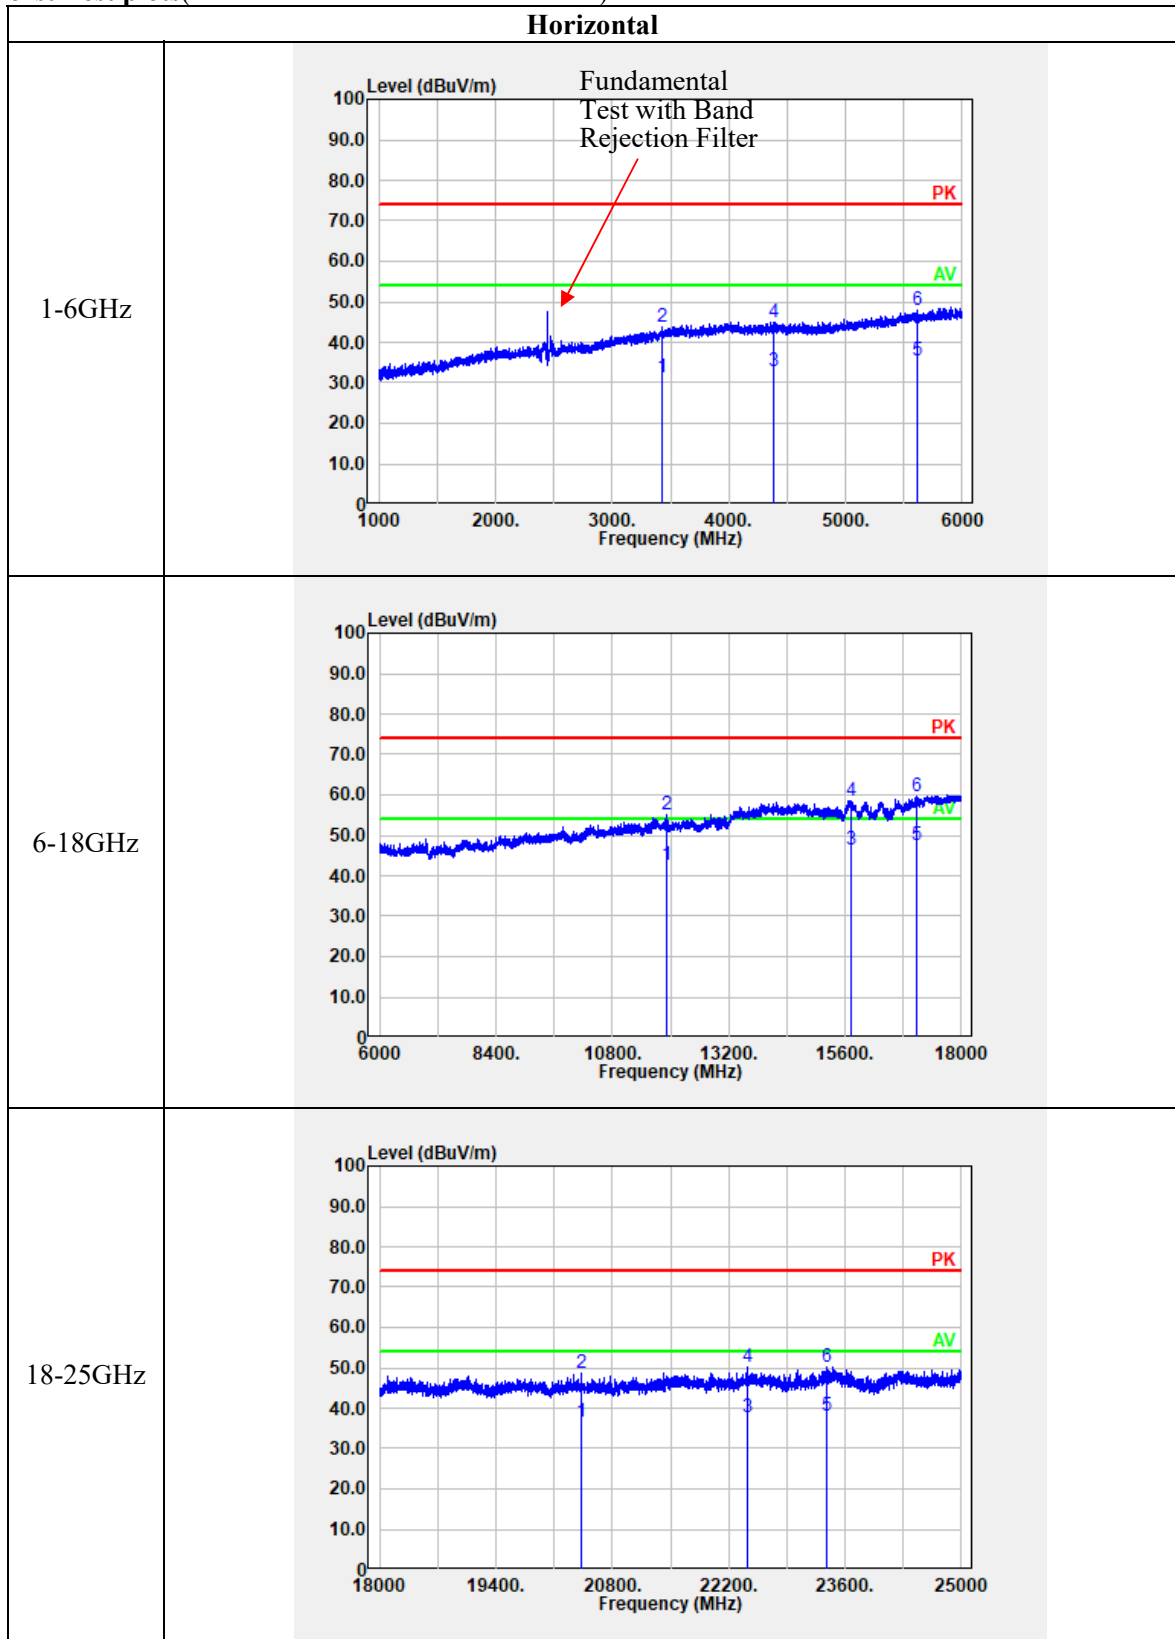

Vertical

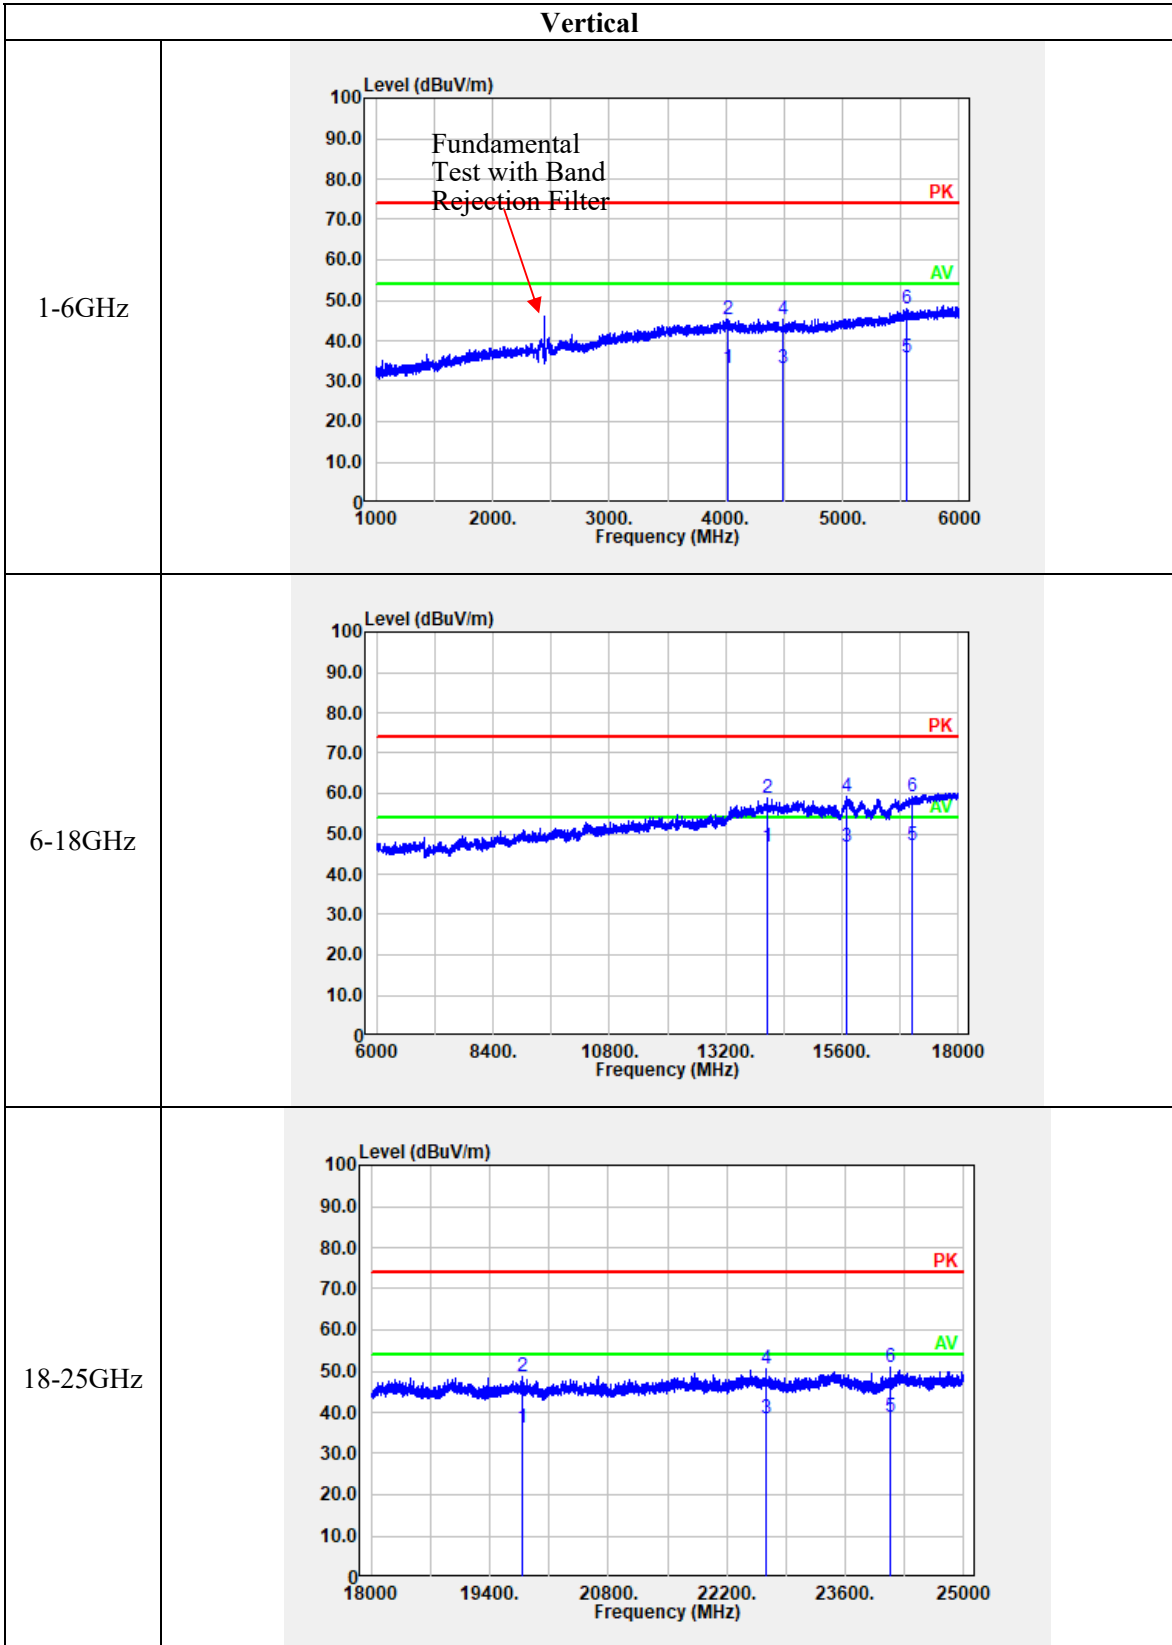

4.3 20 dB Emission Bandwidth:

Serial Number:	1SN1-8	Test Date:	2022/12/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Lowest	2402	0.916
	Middle	2441	0.920
	Highest	2480	0.924
EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.252
	Middle	2441	1.248
	Highest	2480	1.252
EDR Mode (8DPSK)	Lowest	2402	1.208
	Middle	2441	1.208
	Highest	2480	1.208

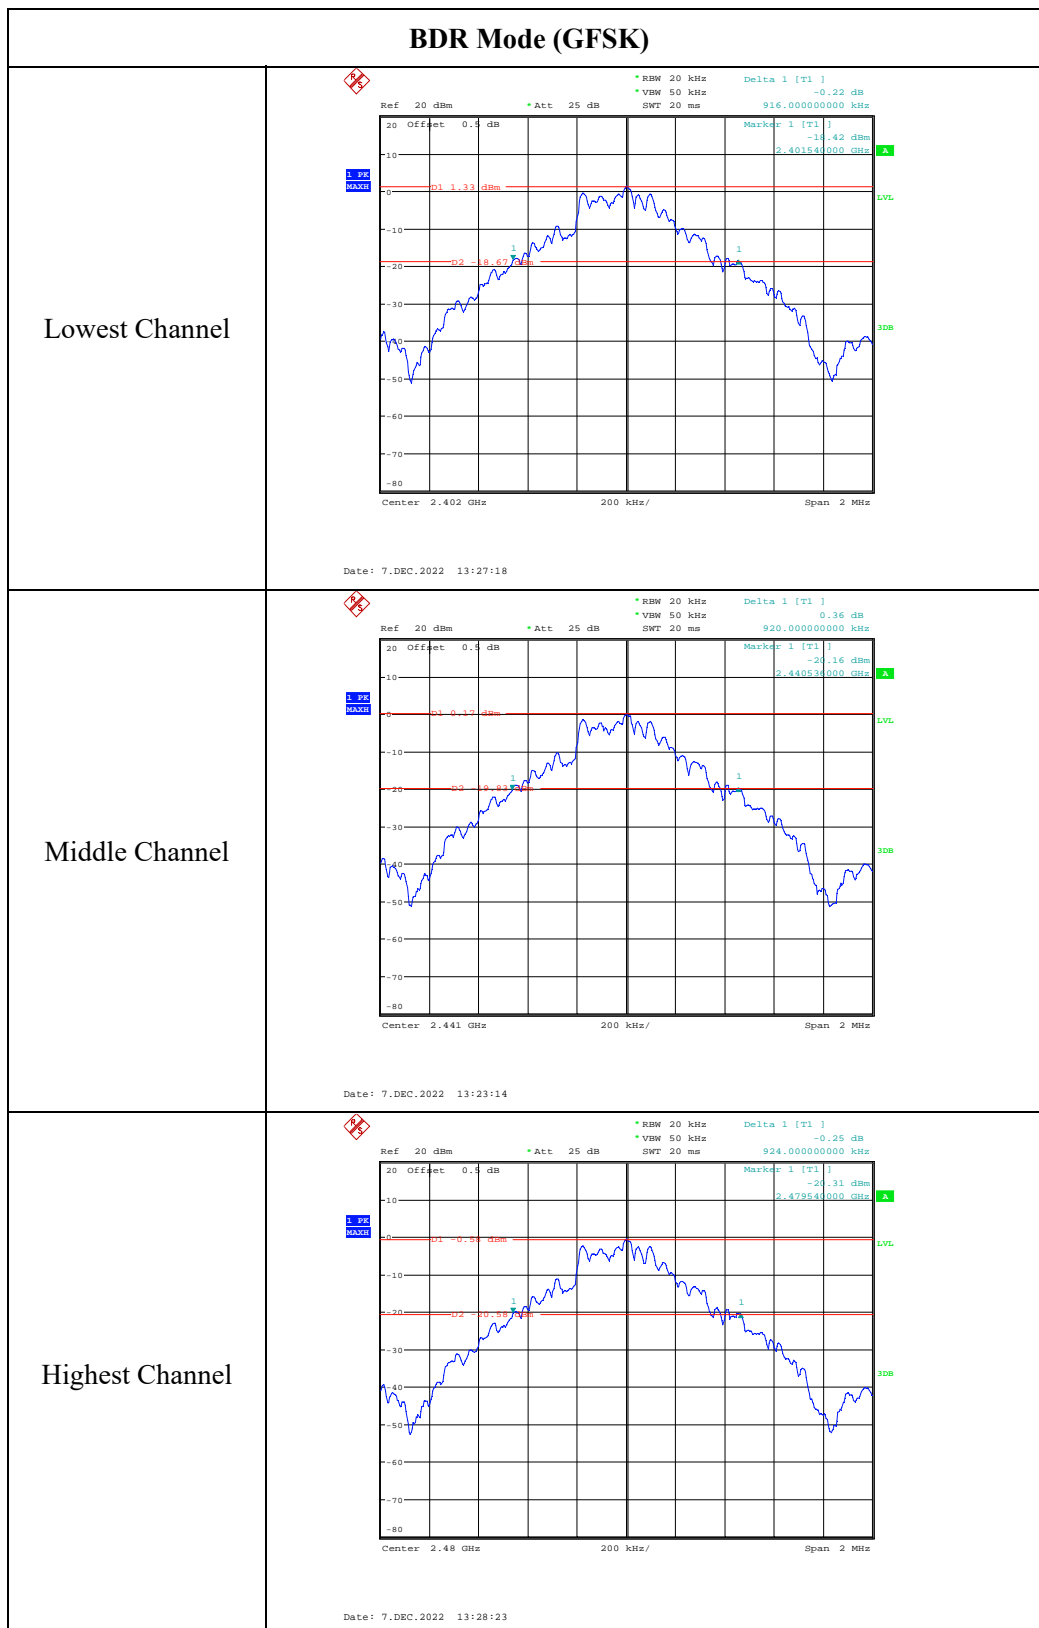

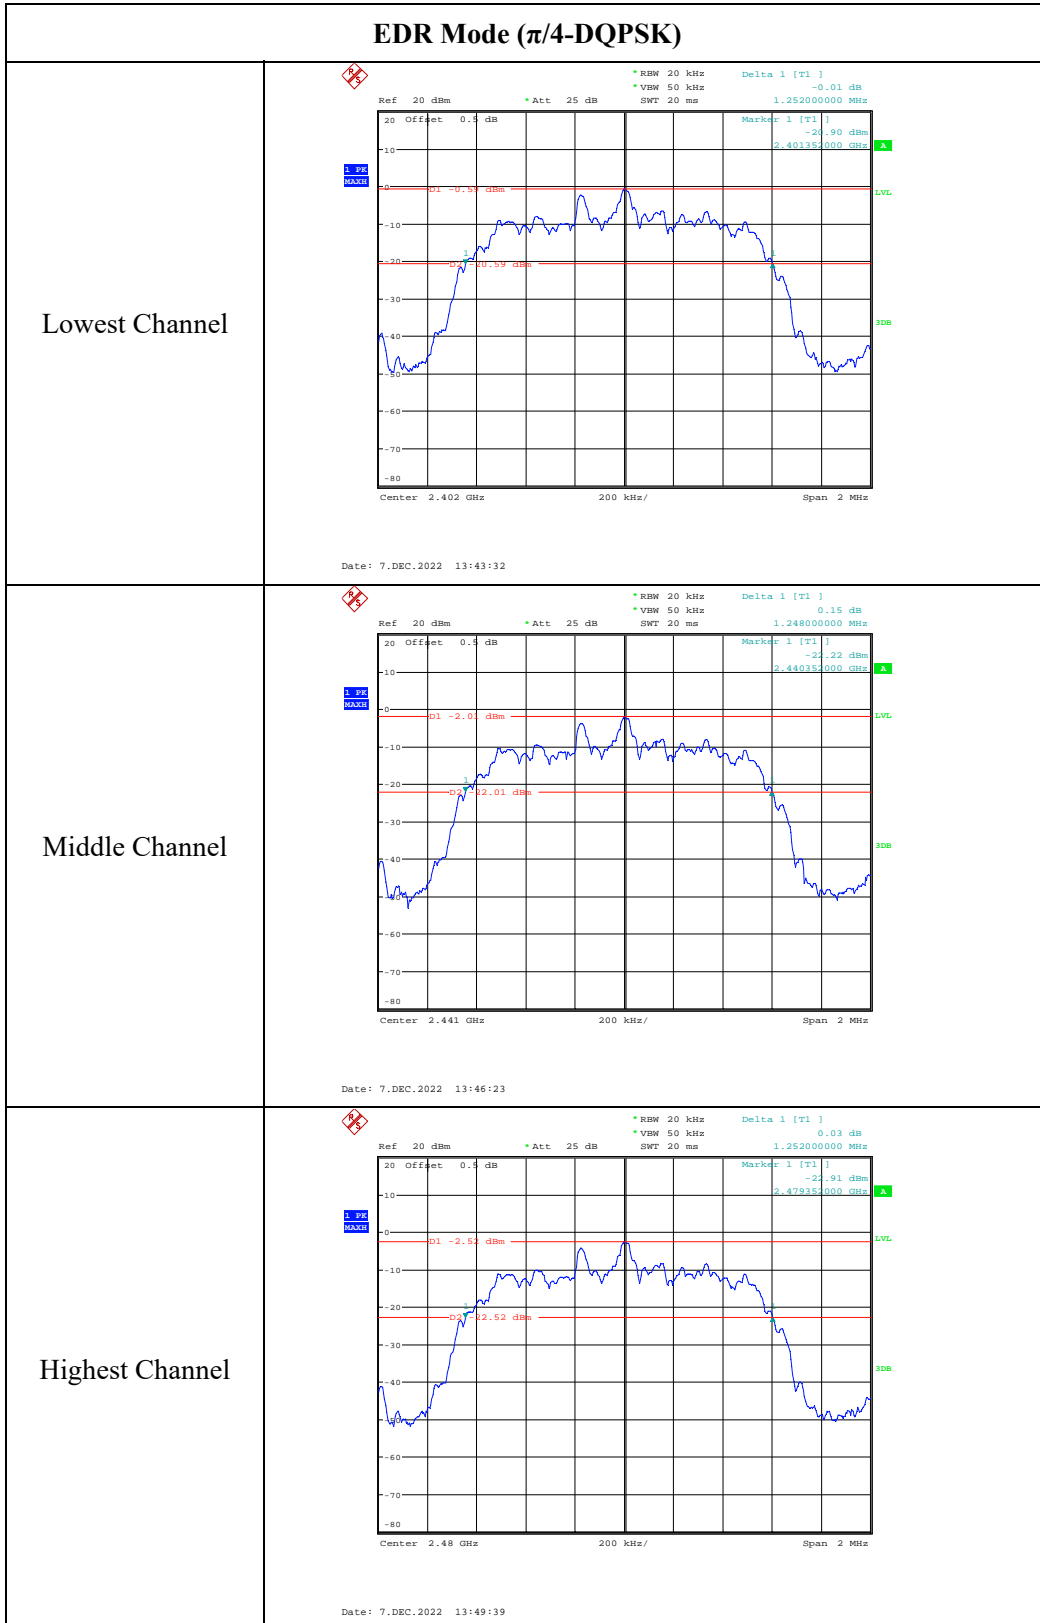

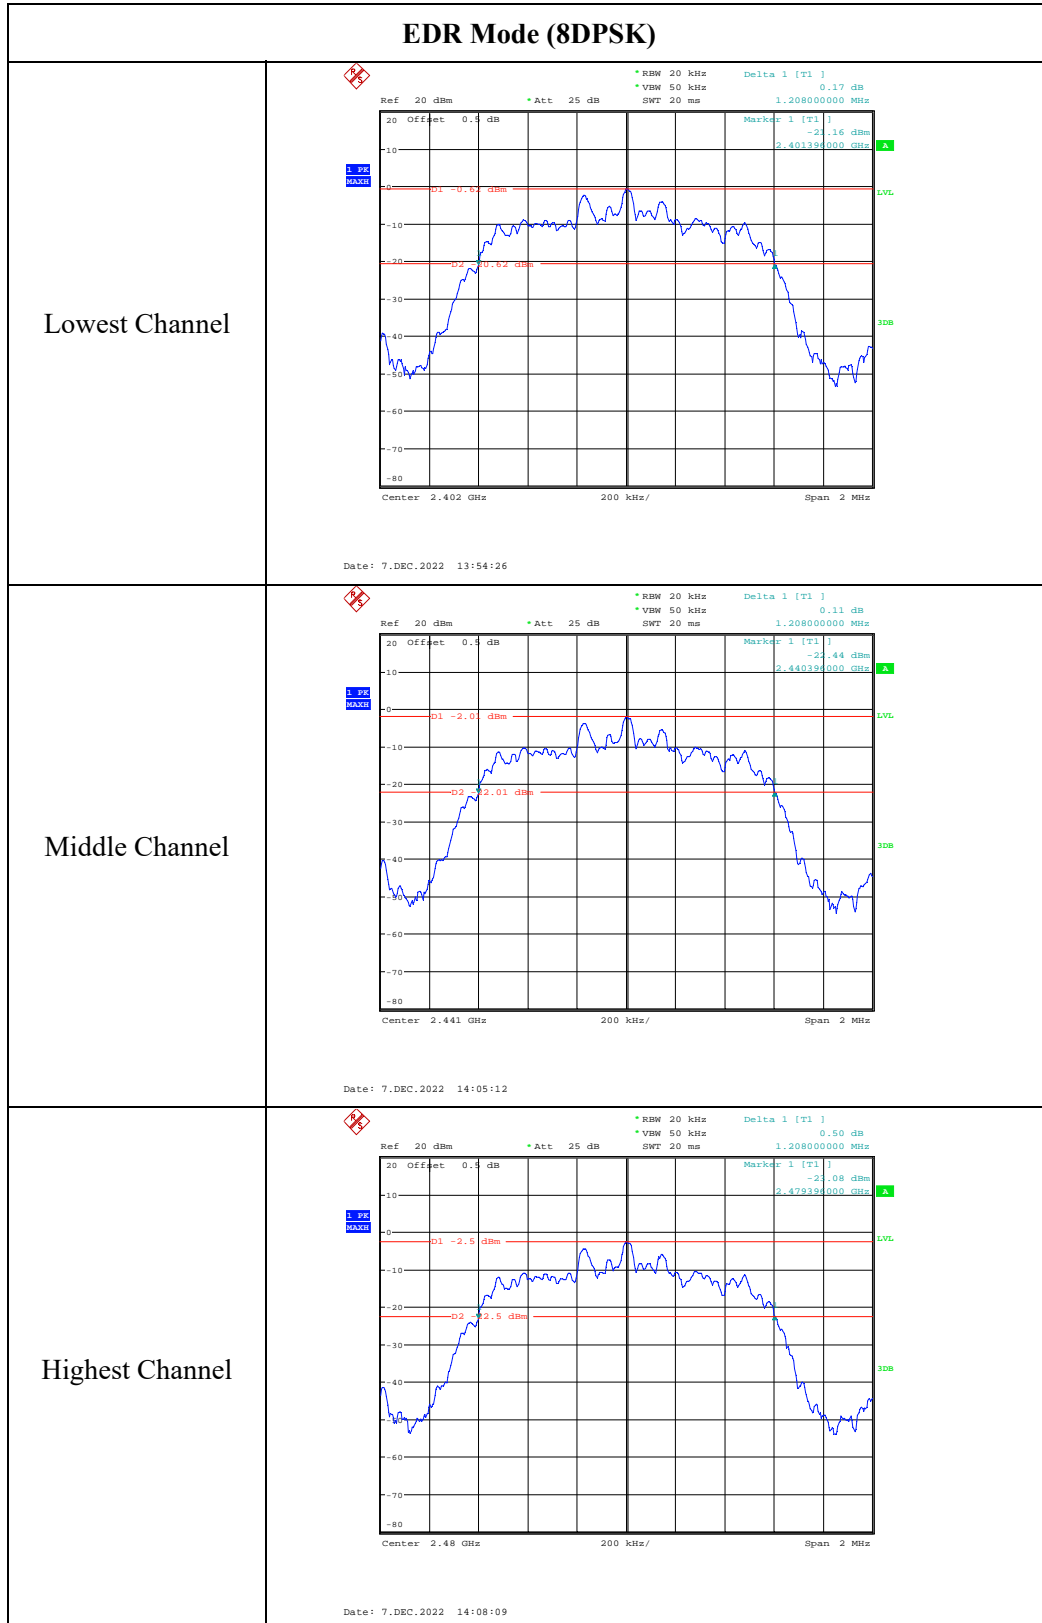

4.4 Channel Separation:

Serial Number:	1SN1-8	Test Date:	2022/12/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:




Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:




Test Modes	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
BDR Mode (GFSK)	2402	1.002	0.611
	2441	1.002	0.613
	2480	1.002	0.616
EDR Mode ($\pi/4$ -DQPSK)	2402	1.002	0.835
	2441	1.002	0.832
	2480	1.002	0.835
EDR Mode (8DPSK)	2402	0.996	0.805
	2441	1.002	0.805
	2480	1.008	0.805

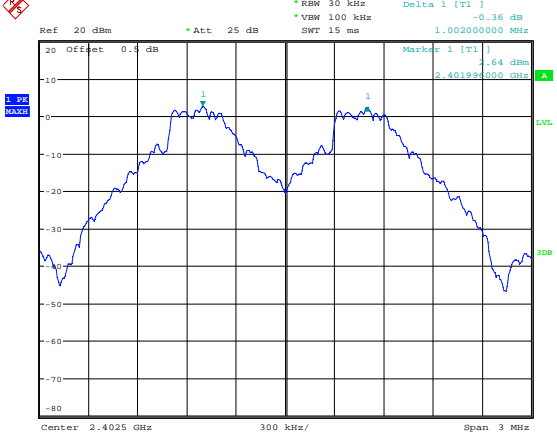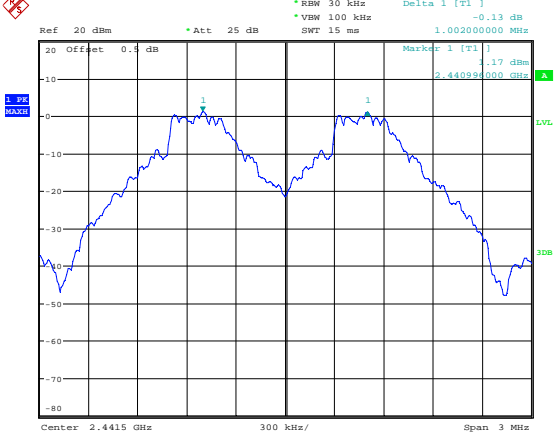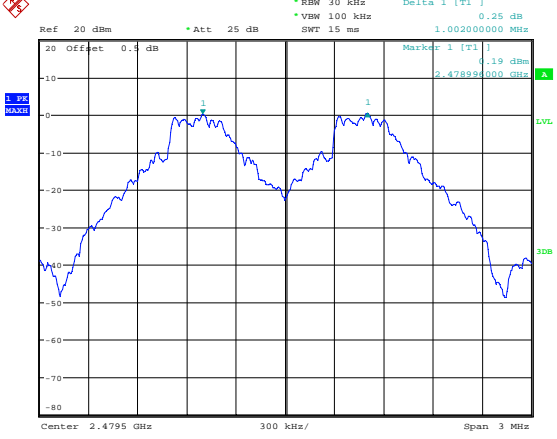BDR Mode (GFSK)
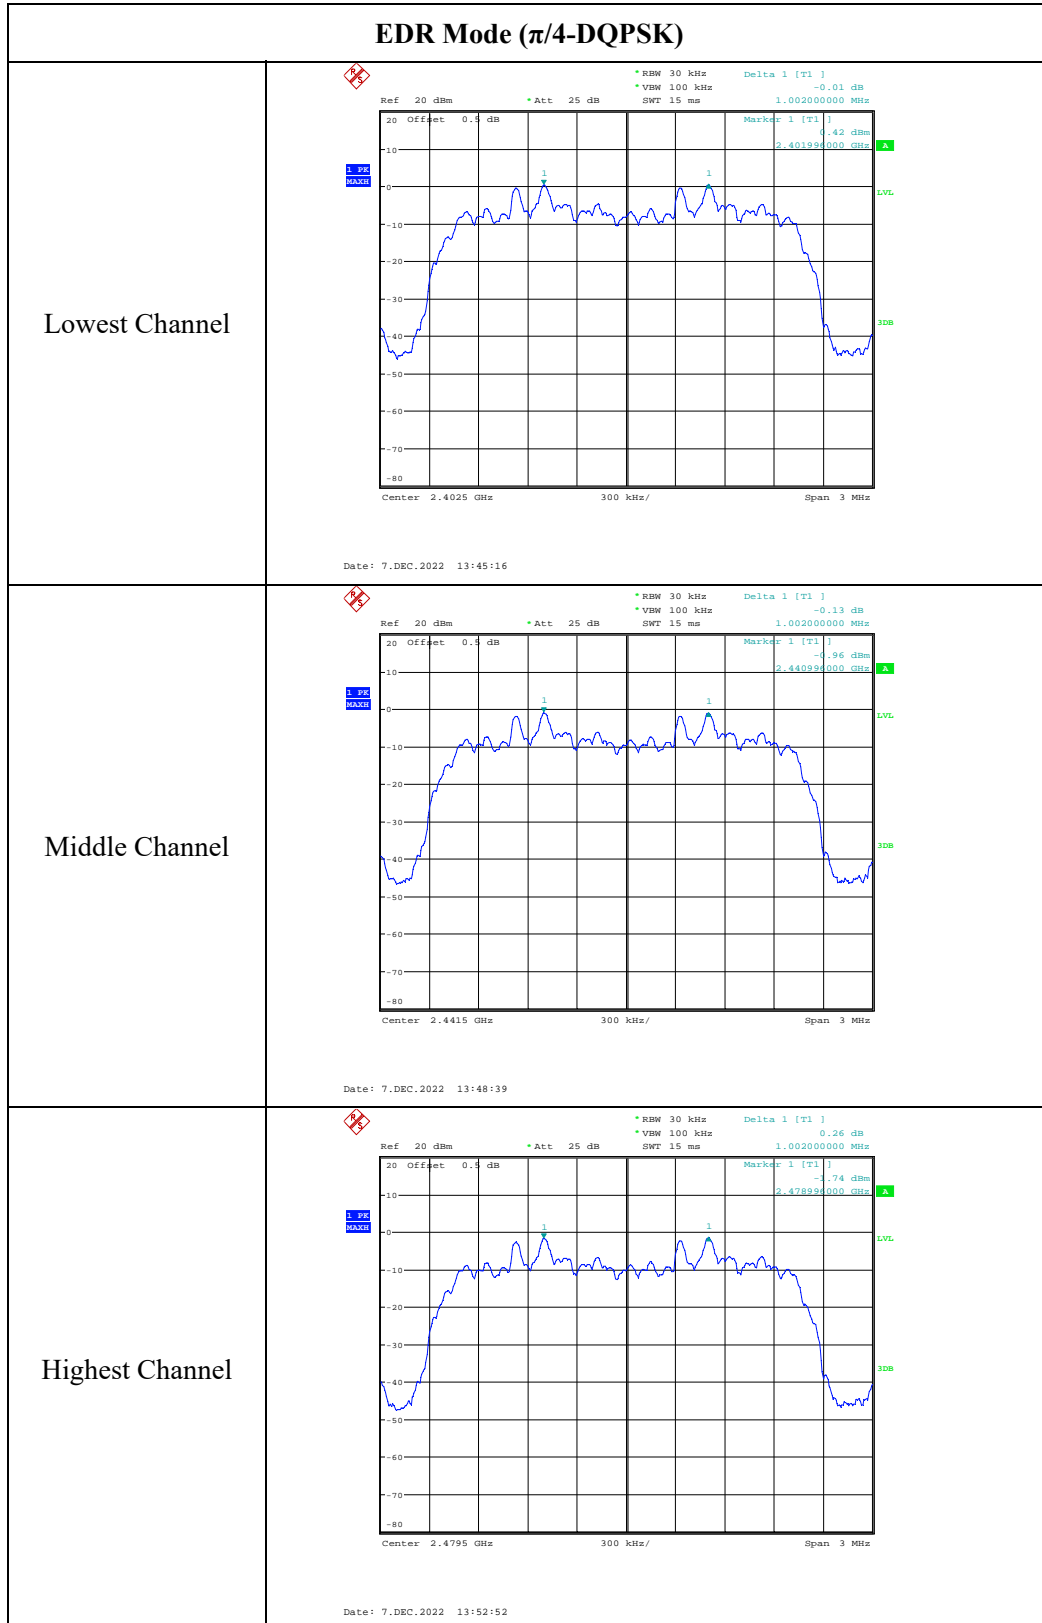
<p>Lowest Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.36 dB *VBM 100 kHz 1.002000000 MHz SWT 15 ms</p> <p>Marker 1 [T1] 1.64 dBm 2.401990000 GHz</p> <p>Center 2.4025 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 7.DEC.2022 13:21:28</p>
<p>Middle Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] -0.13 dB *VBM 100 kHz 1.002000000 MHz SWT 15 ms</p> <p>Marker 1 [T1] 1.17 dBm 2.440990000 GHz</p> <p>Center 2.4415 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 7.DEC.2022 13:25:13</p>
<p>Highest Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 30 kHz Delta 1 [T1] 0.25 dB *VBM 100 kHz 1.002000000 MHz SWT 15 ms</p> <p>Marker 1 [T1] 1.19 dBm 2.478990000 GHz</p> <p>Center 2.4795 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 7.DEC.2022 13:42:03</p>



EDR Mode (8DPSK)

<p>Lowest Channel</p>	 <p>Date: 7.DEC.2022 13:56:52</p>
<p>Middle Channel</p>	 <p>Date: 7.DEC.2022 14:07:11</p>
<p>Highest Channel</p>	 <p>Date: 7.DEC.2022 14:09:59</p>

4.5 Number Of Hopping Frequency:

Serial Number:	1SN1-8	Test Date:	2022/12/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Frequency Range (MHz)	Number of Hopping Channel	Limits
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15


Number of Hopping Channel

**BDR Mode
(GFSK)**

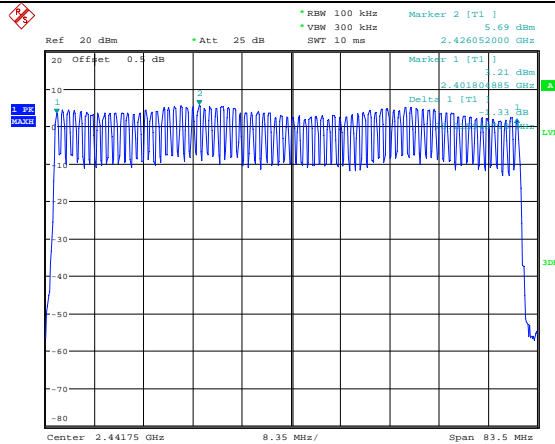


Date: 7.DEC.2022 14:44:22

**EDR Mode
($\pi/4$ -DQPSK)**

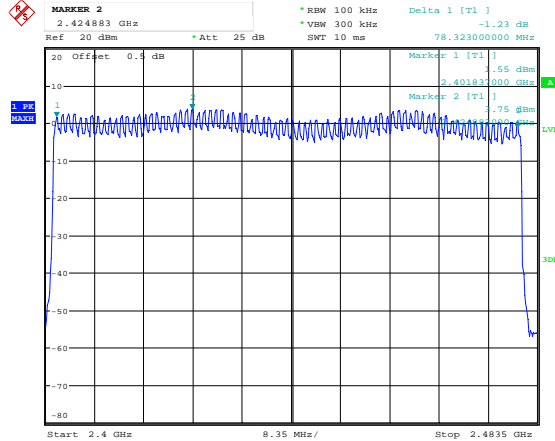

Date: 7.DEC.2022 14:54:12

**EDR Mode
(8DPSK)**

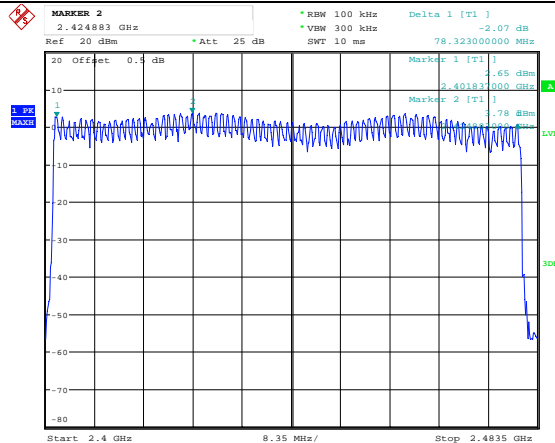

Date: 7.DEC.2022 15:01:35

4.6 Time Of Occupancy(Dwell Time):

Serial Number:	1SN1-8	Test Date:	2022/12/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.408	0.131	0.400
	DH3	2441	1.673	0.268	0.400
	DH5	2441	2.955	0.315	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.411	0.132	0.400
	2DH3	2441	1.678	0.268	0.400
	2DH5	2441	2.933	0.313	0.400
EDR Mode (8DPSK)	3DH1	2441	0.410	0.131	0.400
	3DH3	2441	1.673	0.268	0.400
	3DH5	2441	2.944	0.314	0.400

Note:


DH1:Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s

DH3:Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s

DH5:Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s


BDR Mode (GFSK)

DH1:

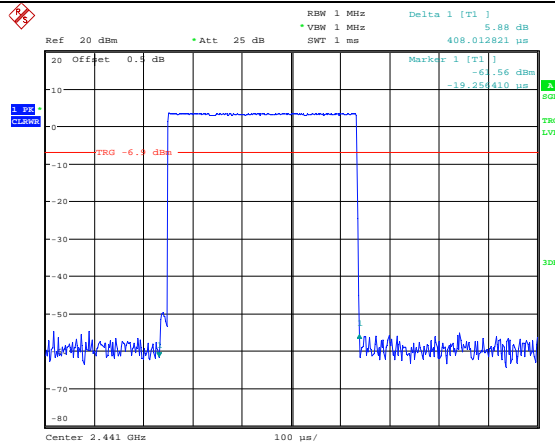


Date: 7.DEC.2022 15:07:15

DH3:

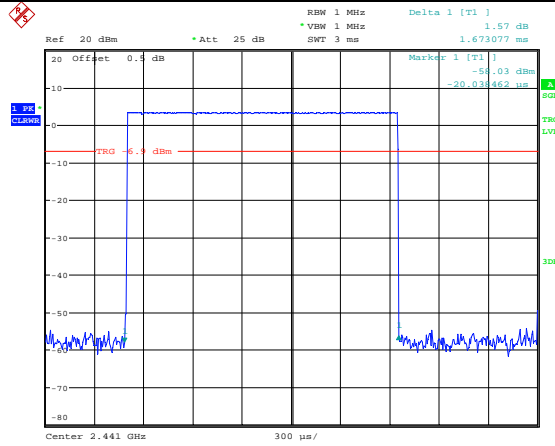

Date: 7.DEC.2022 15:09:30


DH5:

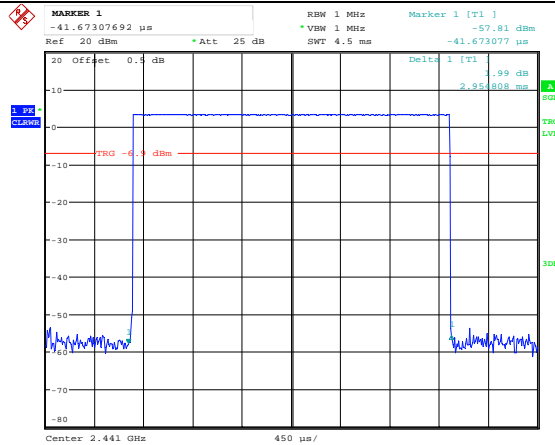

Date: 7.DEC.2022 15:14:17


EDR Mode ($\pi/4$ -DQPSK)

2DH1:

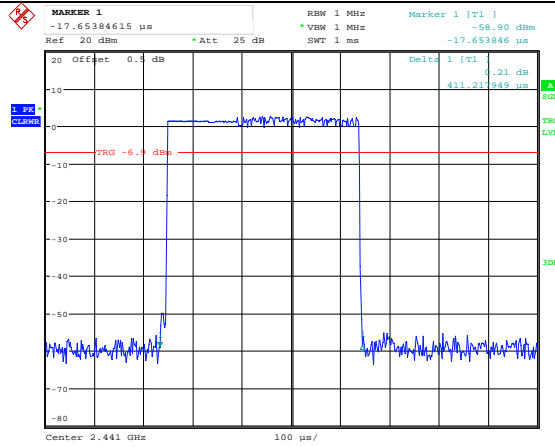


Date: 7.DEC.2022 15:05:52

2DH3:

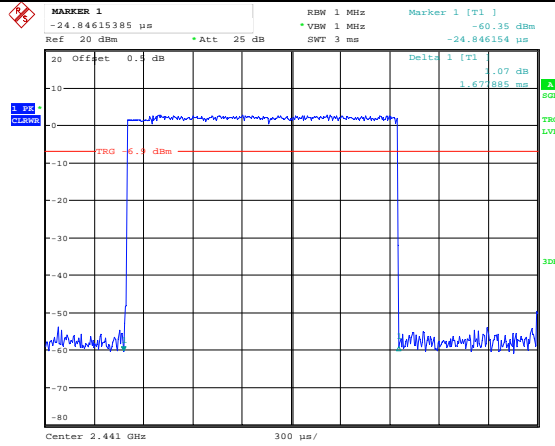

Date: 7.DEC.2022 15:10:16


2DH5:

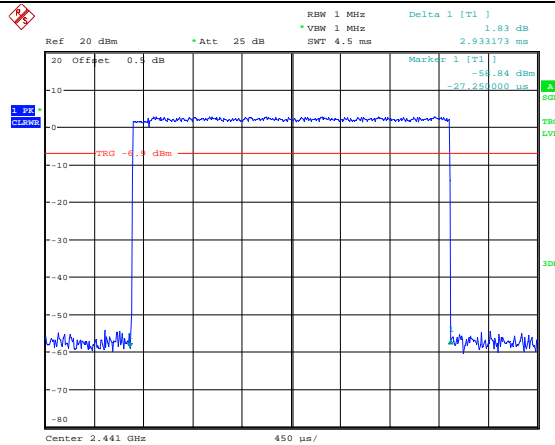

Date: 7.DEC.2022 15:13:26


EDR Mode (8DPSK)

3DH1:

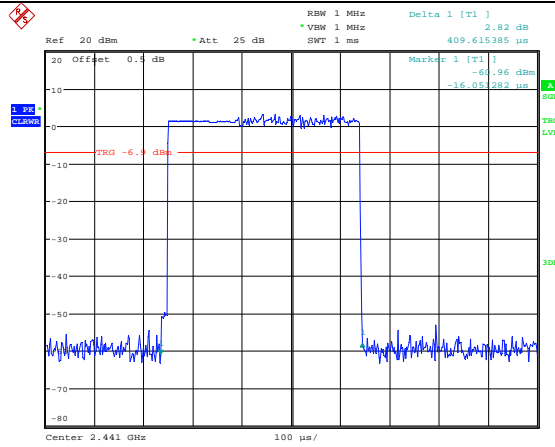


Date: 7.DEC.2022 15:04:29

3DH3:

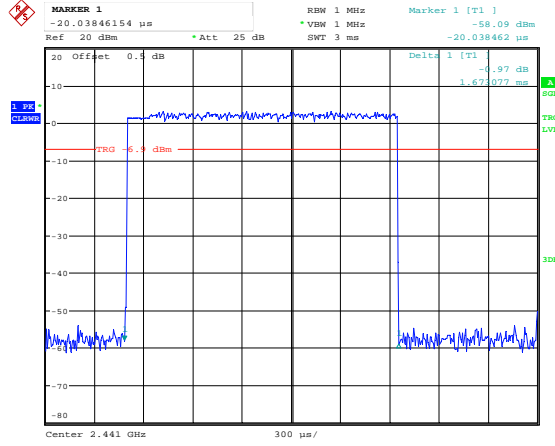

Date: 7.DEC.2022 15:10:59

3DH5:

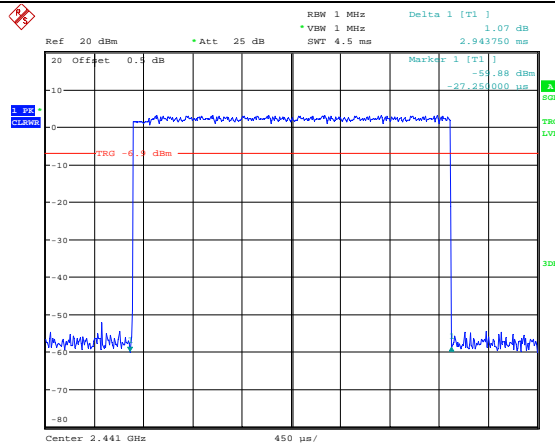

Date: 7.DEC.2022 15:12:36

4.7 Peak Conducted Output Power:

Serial Number:	1SN1-8	Test Date:	2022/12/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022/7/15	2023/07/14

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
BDR Mode (GFSK)	2402	5.12	21
	2441	3.68	21
	2480	2.93	21
	2426	6.69	21
EDR Mode ($\pi/4$ -DQPSK)	2402	4.79	21
	2441	3.37	21
	2480	2.92	21
	2425	5.26	21
EDR Mode (8DPSK)	2402	5.27	21
	2441	3.87	21
	2480	3.36	21
	2425	5.89	21

4.8 100 kHz Bandwidth of Frequency Band Edge:

Serial Number:	1SN1-8	Test Date:	2022/12/7
Test Site:	RF	Test Mode:	Transmitting
Tester:	Claire Liu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Hopping Mode, BDR Mode (GFSK)

**Band Edge,
Left Side**

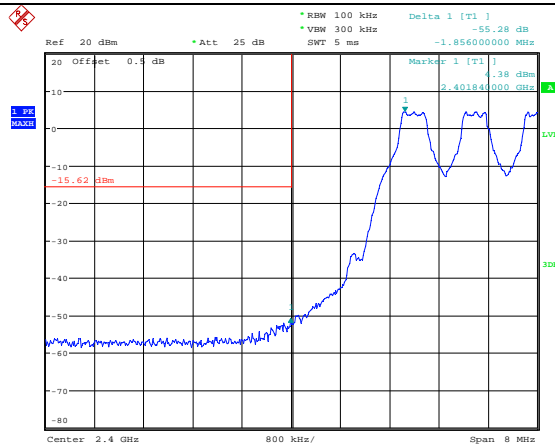

Date: 7.DEC.2022 14:33:19


**Band Edge,
Right Side**

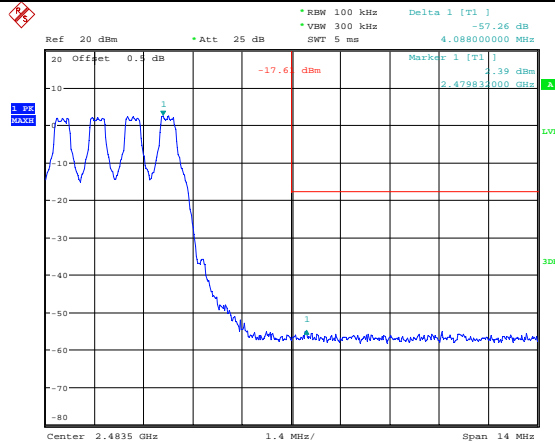


Date: 7.DEC.2022 14:31:40

Hopping Mode, EDR Mode ($\pi/4$ -DQPSK)

**Band Edge,
Left Side**

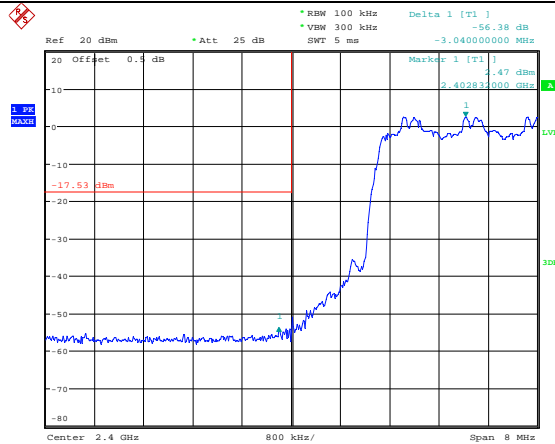


**Band Edge,
Right Side**

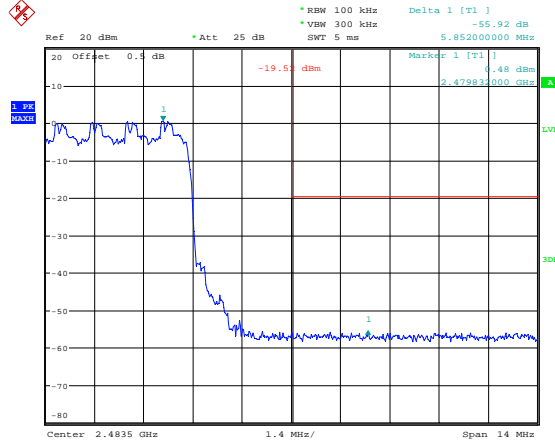


Hopping Mode, EDR Mode (8DPSK)

**Band Edge,
Left Side**

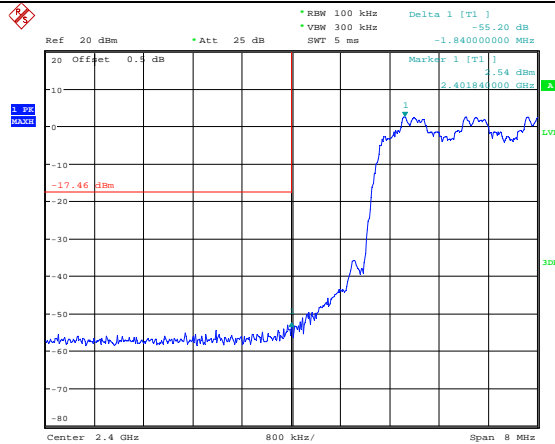

Date: 7.DEC.2022 14:16:17


**Band Edge,
Right Side**

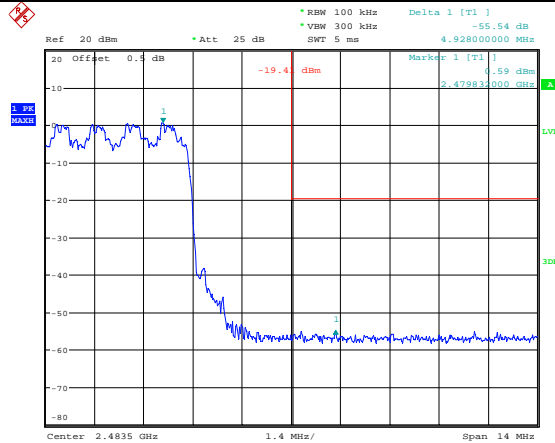

Date: 7.DEC.2022 14:13:47


BDR Mode (GFSK)

**Band Edge,
Left Side**

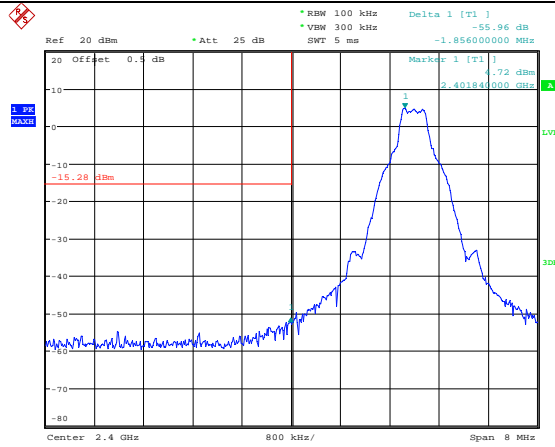

Date: 7.DEC.2022 13:18:42


**Band Edge,
Right Side**

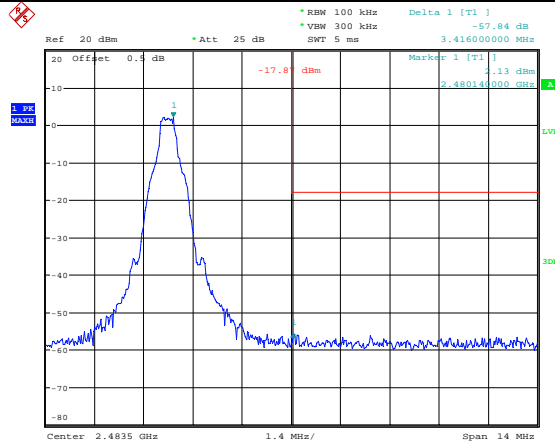

Date: 7.DEC.2022 13:40:56


EDR Mode ($\pi/4$ -DQPSK)

**Band Edge,
Left Side**

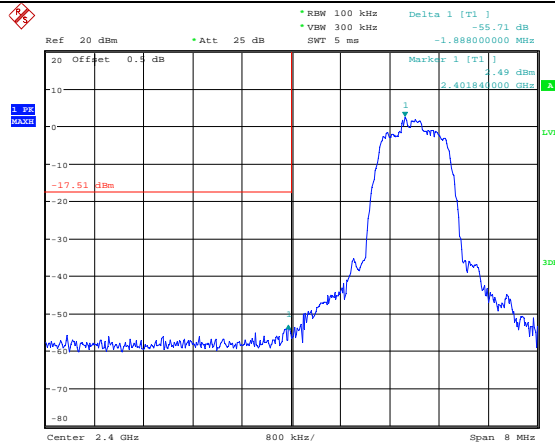

Date: 7.DEC.2022 13:44:17


**Band Edge,
Right Side**

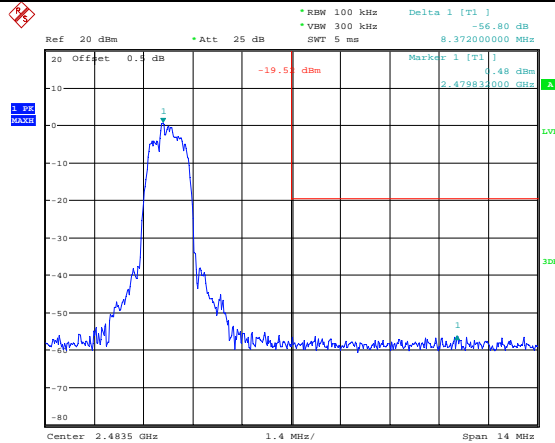

Date: 7.DEC.2022 13:50:24


EDR Mode (8DPSK)

**Band Edge,
Left Side**

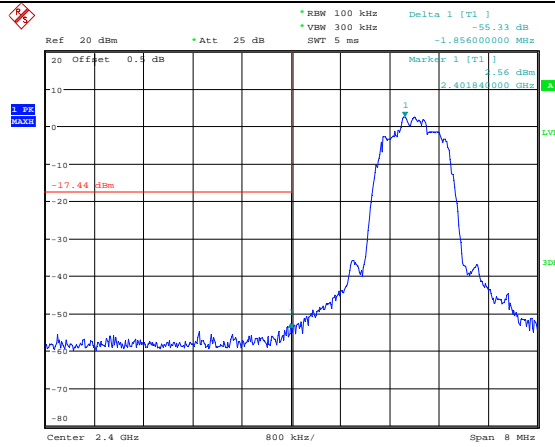

Date: 7.DEC.2022 14:20:20

**Band Edge,
Right Side**

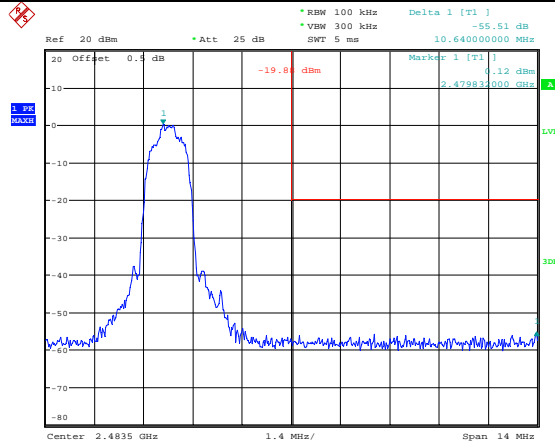

Date: 7.DEC.2022 14:21:11

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

5.2 Measurement Result

The max conducted power including tune-up tolerance is 7.0 dBm (5.0 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 5.0/5 \cdot (\sqrt{2.480}) = 1.6 < 3.0$

Result: Compliance. The stand-alone SAR evaluation is not necessary.

===== END OF REPORT =====