

FCC 47 CFR PART 15 SUBPART C INDUSTRY CANADA RSS-210 ISSUE 8

CERTIFICATION TEST REPORT

FOR

Terminal

MODEL NUMBER: IWL252


FCC ID: XKB-IWLTBB IC: 2586D-IWLTBB

REPORT NUMBER: 10343507B

ISSUE DATE: August 18, 2014

Prepared for
Ingenico SA
9, Avenue de la gare
Rovaltain TGV
26958 Valence Cedex 9 - France

Prepared by
UL LLC
333 Pfingsten Rd.
Northbrook, IL 60062
TEL: (847) 272-8800



Revision History

Rev.	Issue Date	Revisions	Revised By
	08/18/14	Initial Issue	M.Ferrer

TABLE OF CONTENTS

1.	AT	TESTATION OF TEST RESULTS	5
2.	TES	ST METHODOLOGY	6
3.	FAG	CILITIES AND ACCREDITATION	6
4.	CA	LIBRATION AND UNCERTAINTY	6
4	4.1.	MEASURING INSTRUMENT CALIBRATION	6
4	4.2.	SAMPLE CALCULATION	6
4	4.3.	MEASUREMENT UNCERTAINTY	6
5.	EQ	UIPMENT UNDER TEST	7
	5.1.	DESCRIPTION OF EUT	
	5.2.	MAXIMUM OUTPUT POWER	7
	5.3.	DESCRIPTION OF AVAILABLE ANTENNAS	7
	5. <i>4</i> .	WORST-CASE CONFIGURATION AND MODE	
	5.5.	DESCRIPTION OF TEST SETUP	
6.		ST AND MEASUREMENT EQUIPMENT	
7.	ON	TIME AND DUTY CYCLE	11
	7.1.	ON TIME AND DUTY CYCLE RESULTS	11
-	7.2.	DUTY CYCLE PLOTS	12
8.	AN [.]	TENNA PORT TEST RESULTS	13
ě	3.1.	BASIC DATA RATE GFSK MODULATION	13
	8.1.	.1. 20 dB AND 99% BANDWIDTH	13
	8.1.		
	8.1.		
	8.1. g 1	.4. AVERAGE TIME OF OCCUPANCY	
	8.1.		
	8.1.		
ě	3.2.	ENHANCED DATA RATE QPSK MODULATION	43
	8.2.		
ð	3.3.		
	8.3.		
	8.3.		
		.3. OUTPUT POWER	
	8.3.		
۵	DΛ	DIATED TEST RESULTS	67
,	9.1.	LIMITS AND PROCEDURE Page 3 of 94	67
		Page 3 OF 94	

DATE: August 18, 2014

IC: 2586D-IWLTBB

9.	TRANSMITTER ABOVE 1 GHz	68
9.3.	WORST-CASE BELOW 1 GHz	82
9.4.	DIGITAL DEVICE BELOW 1 GHz	84
10.	AC POWER LINE CONDUCTED EMISSIONS	87
11	SETUP PHOTOS	88

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Ingenico SA

9, Avenue de la gare

Rovaltain TGV

26958 Valence Cedex 9 - France

EUT DESCRIPTION: Bluetooth Transmitter

MODEL: IWL252

SERIAL NUMBER: N/A

DATE TESTED: June 1, 2014 – August 15, 2014

APPLICABLE STANDARDS

STANDARD TEST RESULTS

CFR 47 Part 15 Subpart C

Pass

INDUSTRY CANADA RSS-210 Issue 8 Annex 8

Pass

INDUSTRY CANADA RSS-GEN Issue 3

Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

Tested By:

BART MUCHA Staff Engineer

UL Verification Services Inc.

MICHAEL FERRER Program Manager

UL Verification Services Inc.

Page 5 of 94

FORM NO: CCSUP4701G

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 333 Pfingsten Road, Northbrook, IL 60062 USA.

UL NBK is accredited by NVLAP, Laboratory Code 100414-0.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Sample Calculations

Radiated Field Strength and Conducted Emissions data contained within this report is calculated on the following basis:

Field Strength (dBuV/m) = Meter Reading (dBuV) + AF (dB/m) - Gain (dB) + Cable Loss (dB) Conducted Voltage (dBuV) = Meter Reading (dBuV) + Cable Loss (dB) + LISN IL (dB) Conducted Current (dBuA) = Meter Reading (dBuV) + Cable Loss (dB) - Transducer Factor (dBohms)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test	Range	Equipment	Uncertainty k=2
Radiated Emissions	30-200MHz	Bicon 10m Horz	4.27dB
Radiated Emissions	30-200MHz	Bicon 10m Vert	4.28dB
Radiated Emissions	200-1000MHz	LogP 10m Horz	3.33dB
Radiated Emissions	200-1000MHz	LogP 10m Vert	3.39dB
Radiated Emissions	1-6GHz	Horn	5.02dB
Radiated Emissions	6-18GHz	Horn	5.34dB
Radiated Emissions	18-26GHz	Horn	6.60dB
Conducted Ant Port	30MHz-26GHz	Spectrum Analyzer	2.94

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth transceiver which also contains RFID. RFID testing is covered under 10343507B. The unit is battery powered and BT transmitter will only operate in battery mode. When the EUT is placed in the charging base, the BT transmitter gets disabled and EUT will communicated via Ethernet or USB.

The radio module is manufactured by Ingenico.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range	Mode	Output Power	Output Power
(MHz)		(dBm)	(mW)
2402 - 2480	Basic GFSK	4.14	2.59
2402 - 2480	Enhanced QPSK	2.33	1.71
2402 - 2480	Enhanced 8PSK	2.78	1.90

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an IFA antenna, with a maximum gain of 1.1 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

DH5 was determined to have the highest output power and 3DH5 was determined to have the largest OCBW.

REPORT NO: 10343507B DATE: August 18, 2014 IC: 2586D-IWLTBB FCC ID: XLB-IWLTBB

5.5. **DESCRIPTION OF TEST SETUP**

SUPPORT EQUIPMENT

Use	Product Type	Manufacturer	Model	Comments		
EUT	Terminal	Ingenico	IWL252	None		
EUT	Base	Ingenico	IWL200	None		
EUT Power Supply		Ingenico	192011331	None		
EUT Battery Intenico L01J44006 None						
Note: EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment, or SIM - Simulator (Not Subjected to Test)						

I/O CABLES

Port #	Name	Type*	Cable Max. >3m (Y/N)	Cable Shielded (Y/N)	Comments
0	Enclosure	N/E	_		None
1	Mains	AC	Υ	N	None
2	USB	Ю	Υ	Υ	None
3	Ethernet	TP	Y	N	None
4	Phone	TP	Y	N	None

Note:

AC = AC Power Port DC = DC Power Port

N/E = Non-Electrical

= Signal Input or Output Port (Not Involved in Process Control) I/O

TP = Telecommunication Ports


TEST SETUP

The EUT contains transmitter internal and is the end product. The EUT was put into a BT mode to communicate with a BT call box. The call box was used to set channels, modulations and hopping modes.

Config #1 is EUT in BT mode and battery powered

Config #2 is EUT in digital mode and AC powered via charging base

SETUP DIAGRAM FOR TESTS

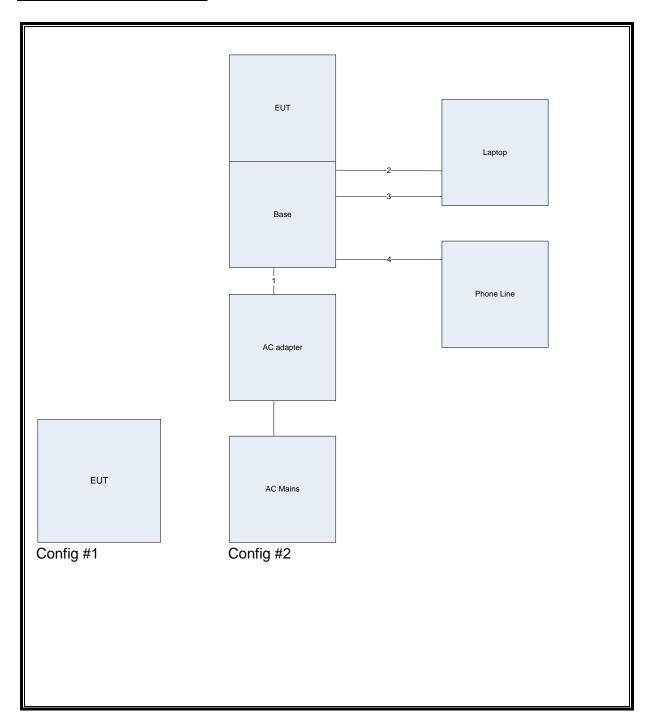

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Description	Manufacturer	Model	Asset	Cal Date	Cal Due
EMI Test Receiver	Rohde & Schwarz	ESU	EMC4323	20131220	20141231
Bicon Antenna	Chase	VBA6106A	EMC4078	20140401	20150401
Log-P Antenna	Schaffner	UPA6109	EMC4313	20131003	20141003
Spectrum Analyzer	Rhode & Schwarz	FSEK	EMC4182	20131217	20141231
Antenna Array	UL	BOMS	EMC4276	20121227	20141231
EMI Test Receiver	Agilent	N9030A	EMC4360	20131221	20141221
Antenna	ETS	1003	N/A	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC4328	20131215	20141231
LISN	Solar	8602-50-TS-50-N	EMC4052	20140116	20150116
LISN	Solar	8602-50-TS-50-N	EMC4064	20140116	20150116

7. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.

PROCEDURE


KDB 558074 Zero-Span Spectrum Analyzer Method.


7.1. ON TIME AND DUTY CYCLE RESULTS

Mode ON Time		Period	Duty Cycle	Duty	Duty Cycle	1/B
	В		х	Cycle	Correction Factor	Minimum VBW
	(msec)	(msec)	(linear)	(%)	(dB)	(kHz)
2.4 GHz band (Hopping C	N)					
Bluetooth GFSK	5.820	100	0.058	5.82%	24.70	N/A
Bluetooth 8PSK	5.050	100	0.051	5.05%	25.93	N/A

7.2. DUTY CYCLE PLOTS

HOPPING ON

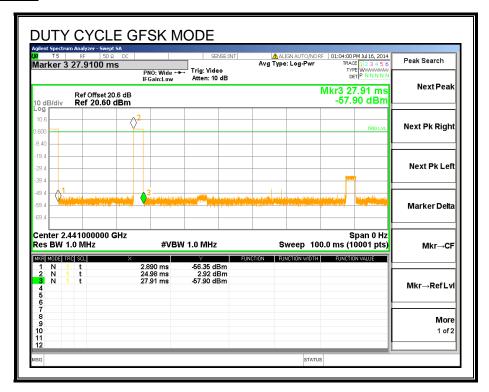

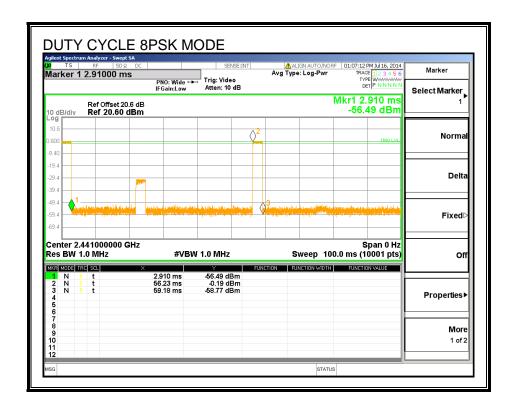

8. ANTENNA PORT TEST RESULTS

8.1. BASIC DATA RATE GFSK MODULATION

8.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency 20 dB Bandwidtl		99% Bandwidth
	(MHz)	(kHz)	(kHz)
Low	2402	943.6	864.83
Middle	2441	941.5	871
High	2480	942.7	868.57

20 dB AND 99% BANDWIDTH



DATE: August 18, 2014 IC: 2586D-IWLTBB

868.57 kHz

-14.785 kHz

952.5 kHz

OBW Power

x dB

99.00 %

-20.00 dB

STATUS

Transmit Freq Error

x dB Bandwidth

Sample >

Man

DATE: August 18, 2014 IC: 2586D-IWLTBB

8.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

Page 17 of 94

HOPPING FREQUENCY SEPARATION

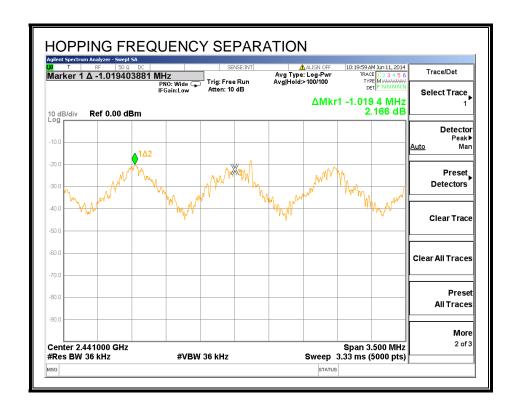

8.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

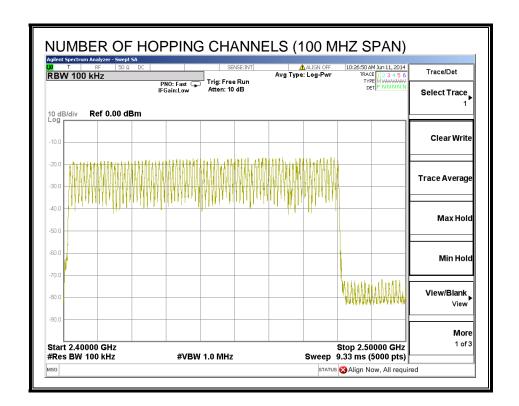

DATE: August 18, 2014 IC: 2586D-IWLTBB

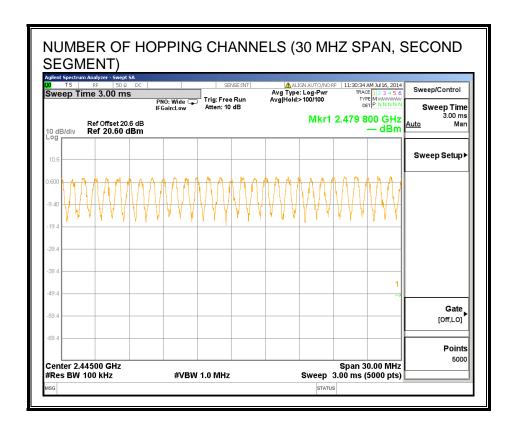

STATUS

DATE: August 18, 2014 IC: 2586D-IWLTBB

8.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to 10 * (# of pulses in 0.8 s) * pulse width.


RESULTS

DH Packet	Pulse Width	Number of Pulses in	Average Time of Occupancy	Limit	Margin
	(msec)	3.16	(sec)	(sec)	(sec)
		seconds			
GFSK Norma	ıl Mode				
DH1	0.398	32	0.127	0.4	-0.273
DH3	1.656	14	0.232	0.4	-0.168
DH5	2.905	12	0.349	0.4	-0.051


PULSE WIDTH - DH1

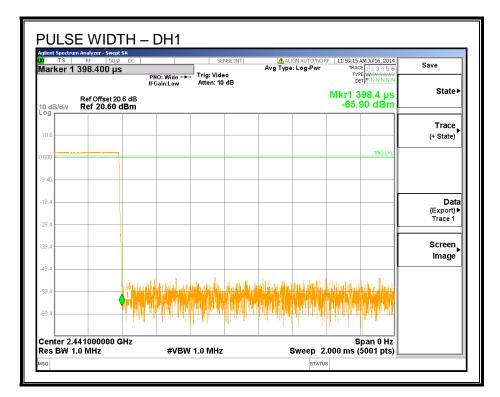


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

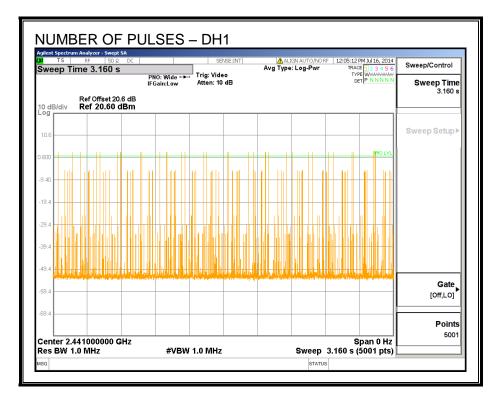


PULSE WIDTH – DH3

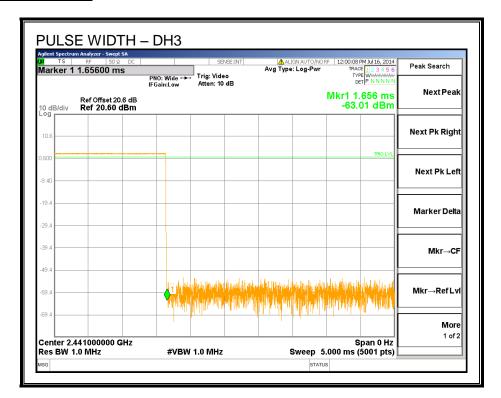


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH3

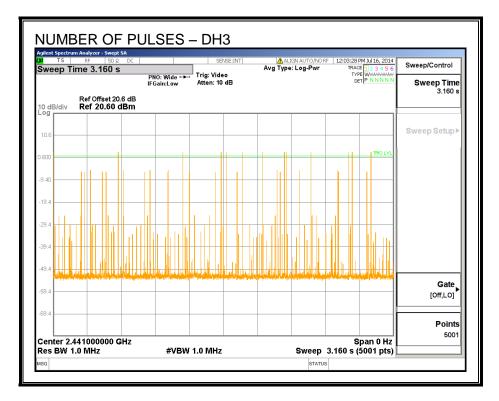

PULSE WIDTH – DH5

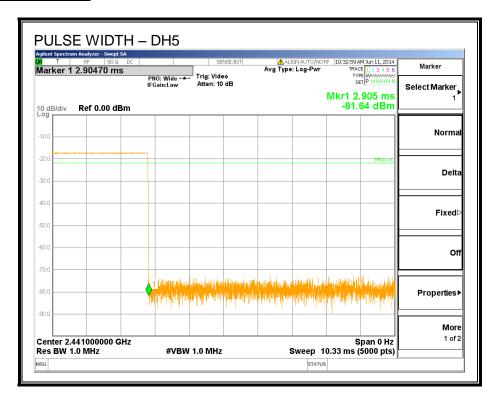

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5

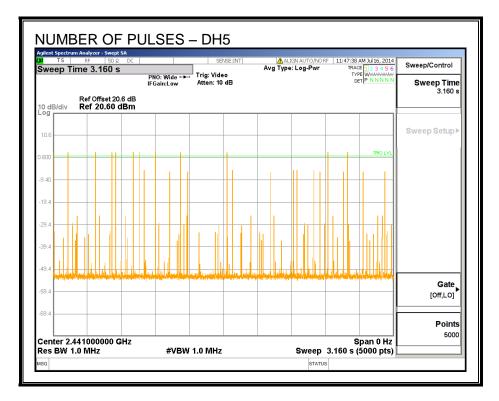

8.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency	Output Power	Limit	Margin
	(MHz)	(dBm)	(dBm)	(dB)
Low	2402	0.89	30	-29.11
Middle	2441	3.45	30	-26.55
High	2480	4.14	30	-25.86

OUTPUT POWER

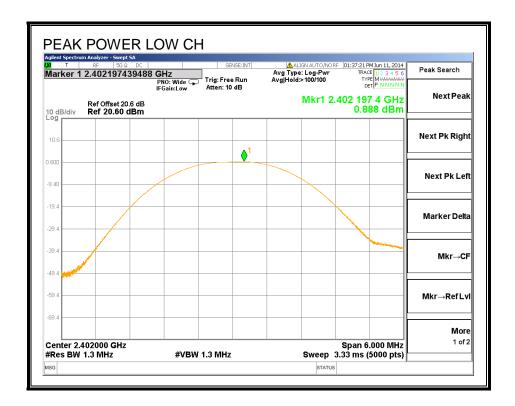

DATE: August 18, 2014 IC: 2586D-IWLTBB

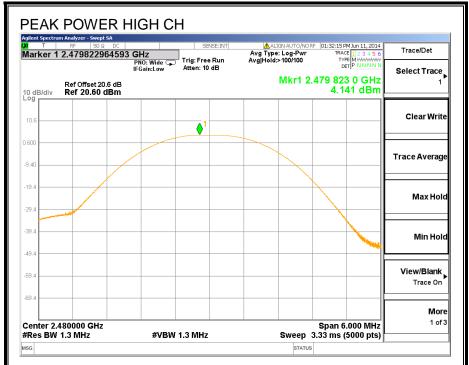

DATE: August 18, 2014

8.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 20.6 dB (including 20 dB pad and 0.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency	Average Power
	(MHz)	(dBm)
Low	2402	-2.94
Middle	2441	-0.73
High	2480	0.23

8.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

SPURIOUS EMISSIONS, LOW CHANNEL

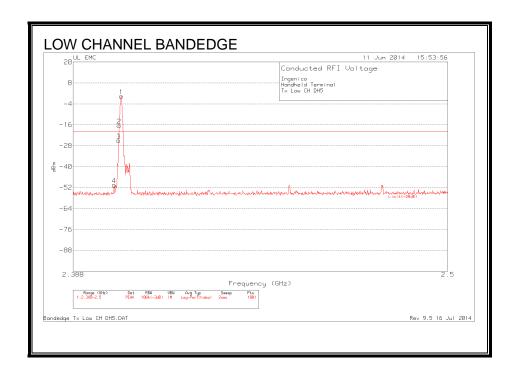


Ingenico Handheld Terminal Tx Low CH DH5


		Test	Meter				Corrected			
Marker		Frequenc	Reading(d		dBuV to	Cable	Reading		Ma	rgin
No.		y (GHz)	BuV)	Detector	dBm	Factor	dBm	Limit	(dB)
	1	2.4021	86.76	PK	-107	20.6	0.36	-	-	
	2	2.4014	69.92	PK	-107	20.6	-16.48	-	-	
	3	2.4013	61.31	PK	-107	20.6	-25.09	-	-	
	4	2.4	35.88	PK	-107	20.6	-50.52	-19.6	4	-30.88

PK - Peak detector

FORM NO: CCSUP4701G

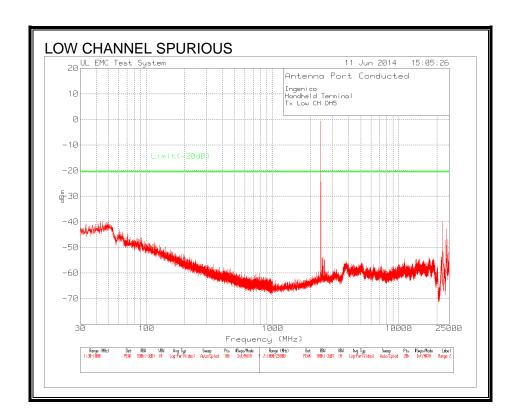


SPURIOUS EMISSIONS, MID CHANNEL

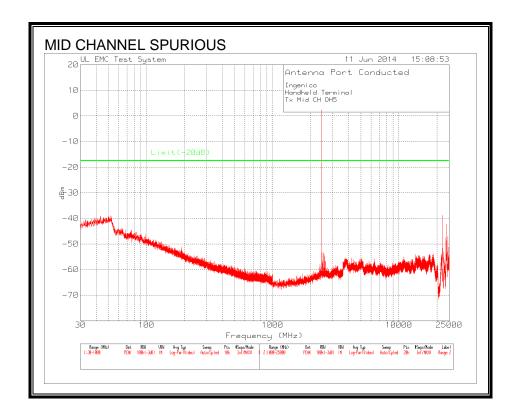

This report shall not be reproduced except in full, without the written approval of UL LLC.

SPURIOUS EMISSIONS, HIGH CHANNEL

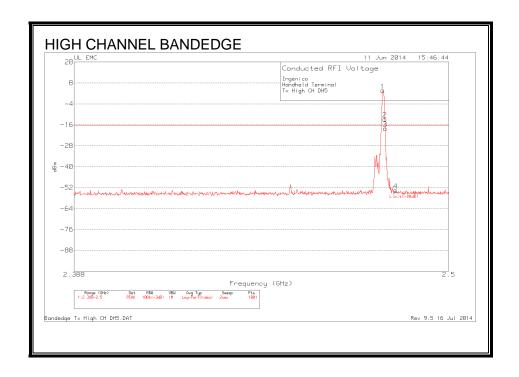


Ingenico Handheld Terminal Tx High CH DH5


		Test	Meter				Corrected		
Marker		Frequency	Reading(d		dBuV to	Cable	Reading		Margin
No.		(GHz)	BuV)	Detector	dBm	Factor dB	dBm	Limit	(dB)
	1	2.4798	90.08	PK	-107	20.6	3.68	-	-
	2	2.4805	73.63	PK	-107	20.6	-12.77	-	-
	3	2.4806	68.3	PK	-107	20.6	-18.1	-	-
	4	2.4838	32.77	PK	-107	20.6	-53.63	-16.32	-37.31

PK - Peak detector

FORM NO: CCSUP4701G TEL: (847) 272-8800

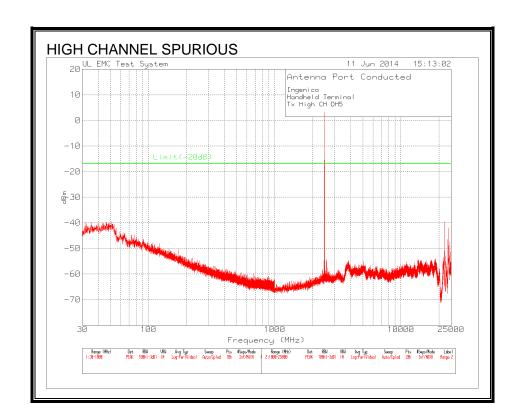

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

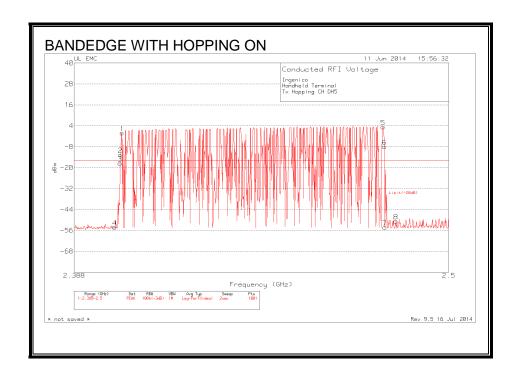

Ingenico Handheld Terminal Tx Hopping CH DH5

		Test	Meter				Corrected			
Marker		Frequency	Reading(d		dBuV to	Cable	Reading		Ma	rgin
No.		(GHz)	BuV)	Detector	dBm	Factor dB	dBm	Limit	(dB	5)
	1	2.402	86.3	PK	-107	20.6	-0.1	-	-	
	2	2.4016	73.77	PK	-107	20.6	-12.63	-	-	
	3	2.4014	68.86	PK	-107	20.6	-17.54	-	-	
	4	2.3999	32.2	PK	-107	20.6	-54.2	-16.05		-38.15
	5	2.48	89.74	PK	-107	20.6	3.34	-	-	
	6	2.4804	78.39	PK	-107	20.6	-8.01	-	-	
	7	2.4805	32.13	PK	-107	20.6	-54.27	-	-	
	8	2.4839	35.68	PK	-107	20.6	-50.72	-16.05		-34.67

PK - Peak detector

FORM NO: CCSUP4701G

REPORT NO: 10343507B DATE: August 18, 2014 IC: 2586D-IWLTBB FCC ID: XLB-IWLTBB

8.2. **ENHANCED DATA RATE QPSK MODULATION**

8.2.1. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency	Output Power	Limit	Margin	
	(MHz)	(dBm)	(dBm)	(dB)	
Low	2402	-1.70	30	-31.70	
Middle	2441	1.20	30	-28.80	
High	2480	2.33	30	-27.67	

OUTPUT POWER

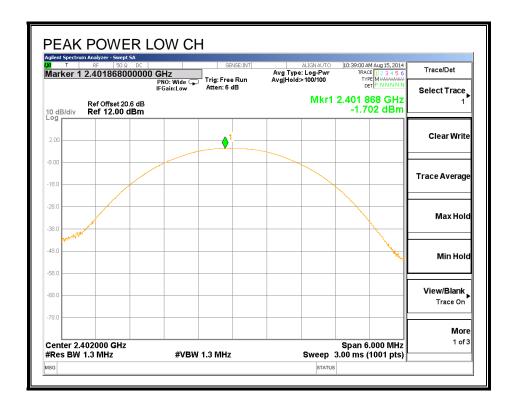

DATE: August 18, 2014 IC: 2586D-IWLTBB

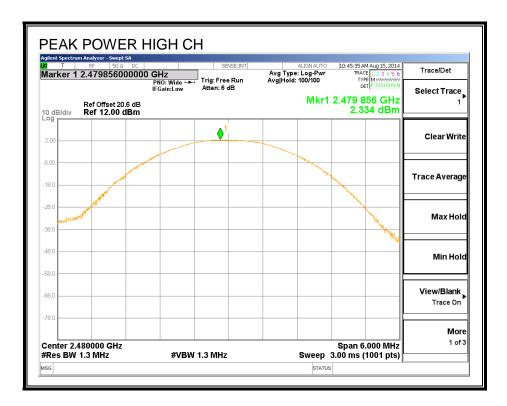

8.3. ENHANCED DATA RATE 8PSK MODULATION

8.3.1. 20 dB AND 99% BANDWIDTH

<u>LIMIT</u>

None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency	20 dB Bandwidth	99% Bandwidth
	(MHz)	(kHz)	(kHz)
Low	2402	1.273	1.1705
Middle	2441	1.282	1.1815
High	2480	1.279	1.173

20 dB AND 99% BANDWIDTH

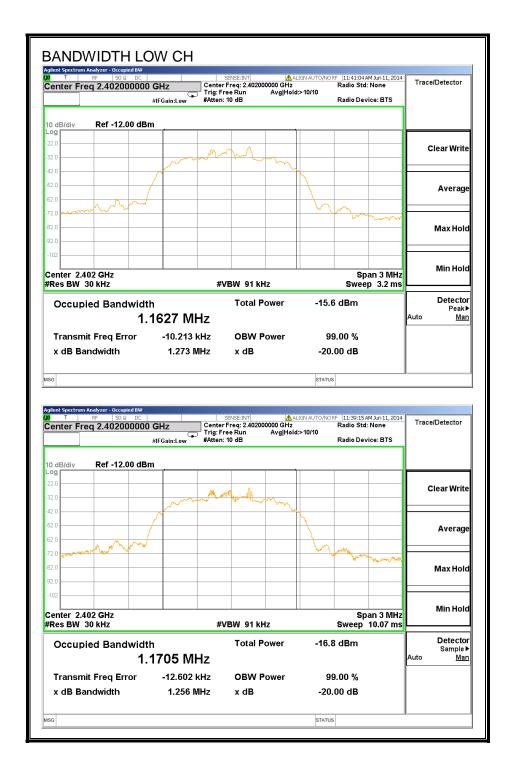

DATE: August 18, 2014 IC: 2586D-IWLTBB

DATE: August 18, 2014 IC: 2586D-IWLTBB

8.3.2. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

RESULTS


8PSK (EDR) Mode

DH Packet	H Packet Pulse		Average	Limit	Margin	
	Width	Pulses in	Time of			
	(msec)	3.16	(sec)	(sec)	(sec)	
	,	seconds	, ,	, ,		
DH1	0.4146	32	0.133	0.4	-0.267	
DH3	1.663	17	0.283	0.4	-0.117	
DH5	2.915	13	0.379	0.4	-0.021	


PULSE WIDTH - DH1

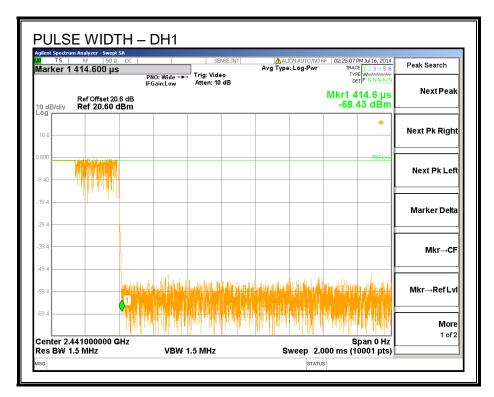


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

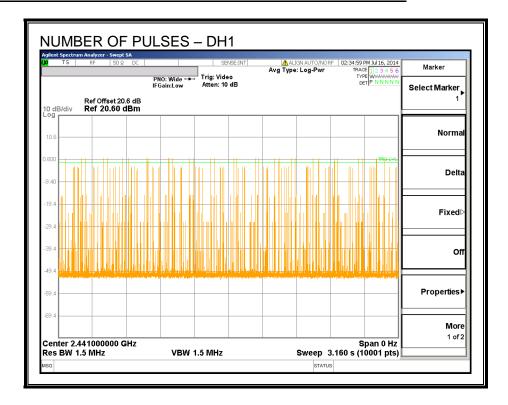


PULSE WIDTH – DH3

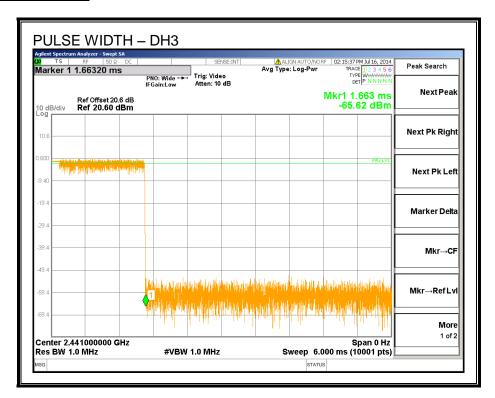


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH3

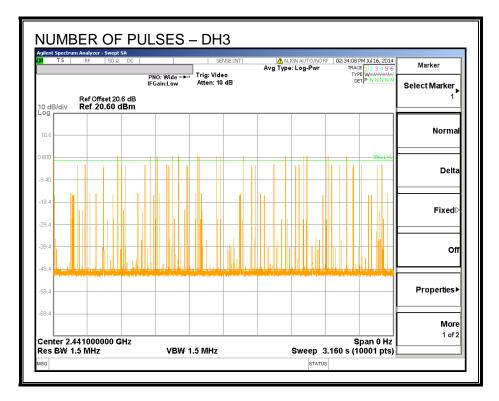

PULSE WIDTH – DH5

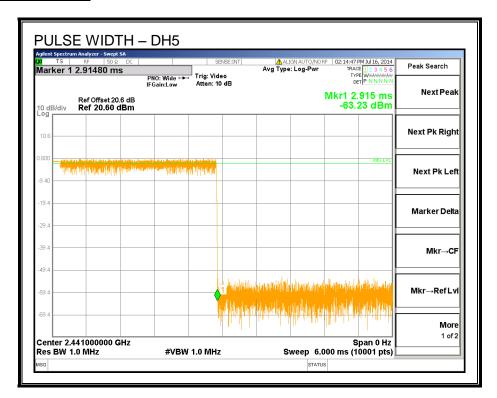

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5

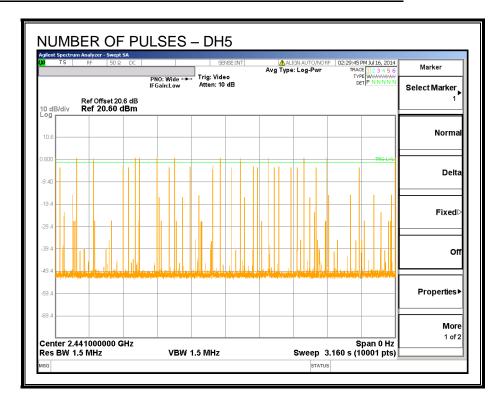

8.3.3. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS


Channel	Frequency	Output Power	Limit	Margin	
	(MHz)	(dBm)	(dBm)	(dB)	
Low	2402	-1.25	30	-31.25	
Middle	2441	1.64	30	-28.36	
High	2480	2.78	30	-27.22	

FORM NO: CCSUP4701G

OUTPUT POWER

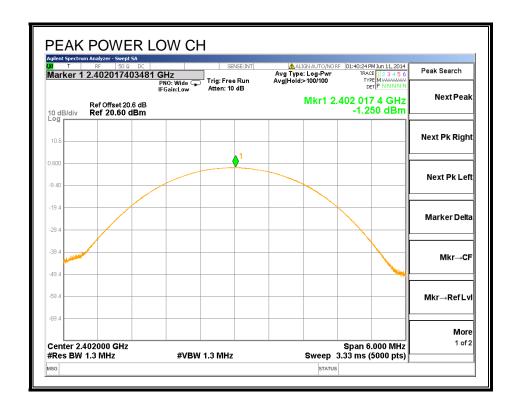

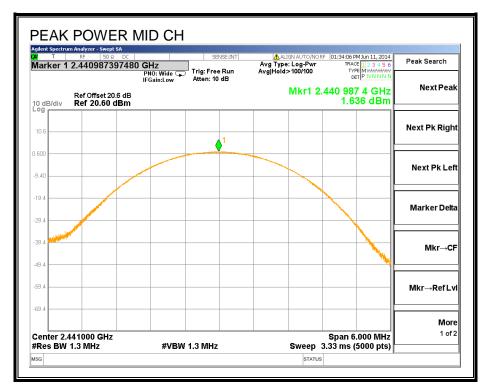

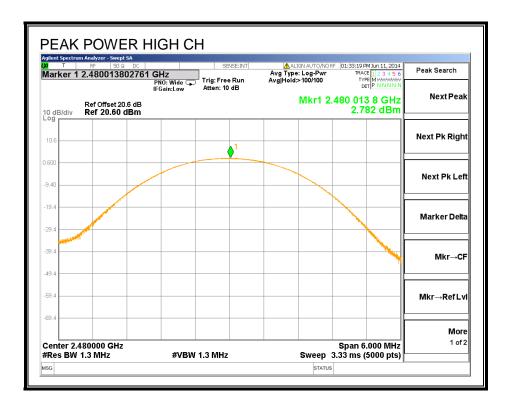

8.3.4. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 20.6dB (including 20 dB pad and 0.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency	Average Power		
	(MHz)	(dBm)		
Low	2402	-8.33		
Middle	2441	-5.32		
High	2480	-3.43		

8.3.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

SPURIOUS EMISSIONS, LOW CHANNEL

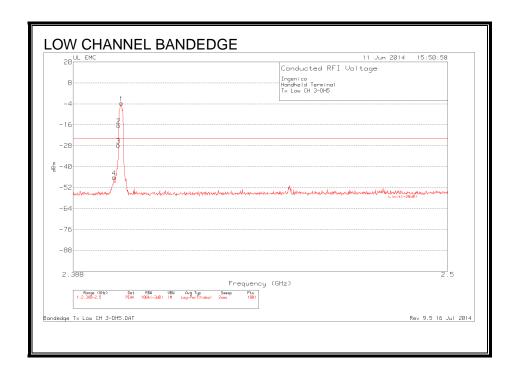

Ingenico Handheld Terminal Tx Low CH 3-DH5


		Test	Meter				Corrected		
Marker		Frequency	Reading(d		dBuV to	Cable	Reading		Margin
No.		(GHz)	BuV)	Detector	dBm	Factor dB	dBm	Limit	(dB)
	1	2.4021	82.72	PK	-107	20.6	-3.68	-	-
	2	2.4013	70.03	PK	-107	20.6	-16.37	-	-
	3	2.4012	58.62	PK	-107	20.6	-27.78	-	-
	4	2.4	40.28	PK	-107	20.6	-46.12	-23.68	-22.44

PK - Peak detector

FORM NO: CCSUP4701G

This report shall not be reproduced except in full, without the written approval of UL LLC.

SPURIOUS EMISSIONS, HIGH CHANNEL

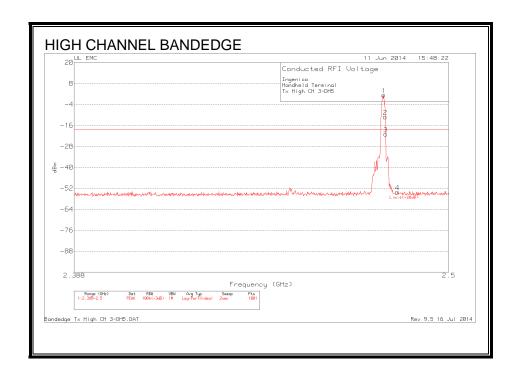

Ingenico Handheld Terminal Tx High CH 3-DH5

	٦	Гest	Meter				Corrected		
Marker	F	requenc	Reading(d		dBuV to	Cable	Reading		Margin
No.	}	/ (GHz)	BuV)	Detector	dBm	Factor dB	dBm	Limit	(dB)
	1	2.4802	87.81	PK	-107	20.6	1.41	-	-
	2	2.4806	75.28	PK	-107	20.6	-11.12	-	-
	3	2.4807	65.44	PK	-107	20.6	-20.96	-	-
	4	2.4843	32.3	PK	-107	20.6	-54.1	-18.59	-35.51

PK - Peak detector

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON



Ingenico Handheld Terminal Tx Hopping CH 3-DH5

		Test	Meter				Corrected		
Marker		Frequenc	Reading(d		dBuV to	Cable	Reading		Margin
No.		y (GHz)	BuV)	Detector	dBm	Factor dB	dBm	Limit	(dB)
	1	2.4018	79.81	PK	-107	20.6	-6.59	-	-
	2	2.4013	70.55	PK	-107	20.6	-15.85	-	-
	3	2.4012	57.3	PK	-107	20.6	-29.1	-	-
	4	2.3995	36.97	PK	-107	20.6	-49.43	-18.66	-30.77
	5	2.4794	83.56	PK	-107	20.6	-2.84	-	-
	6	2.4796	69.16	PK	-107	20.6	-17.24	-	-
	7	2.4797	66.1	PK	-107	20.6	-20.3	-	-
	8	2.484	33.13	PK	-107	20.6	-53.27	-18.66	-34.61

PK - Peak detector

FORM NO: CCSUP4701G TEL: (847) 272-8800

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m		
30 - 88	100	40		
88 - 216	150	43.5		
216 - 960	200	46		
Above 960	500	54		

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

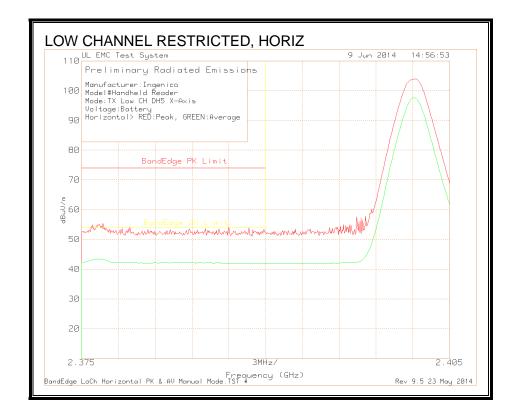


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

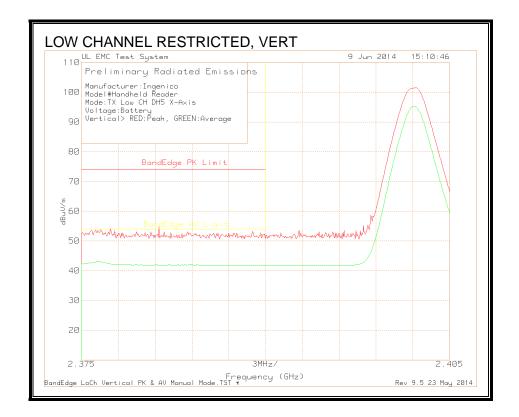


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

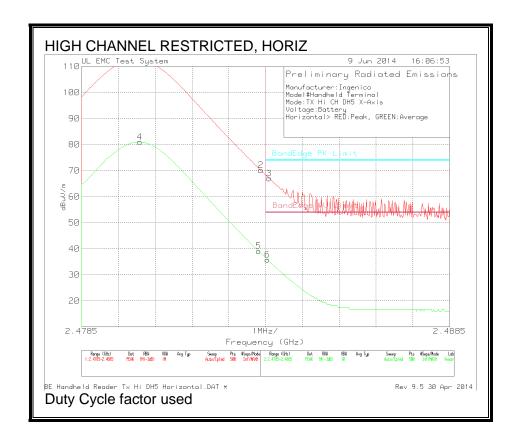

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

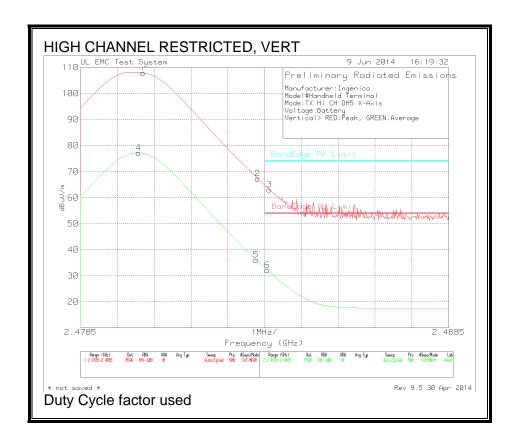

HARMONICS AND SPURIOUS EMISSIONS

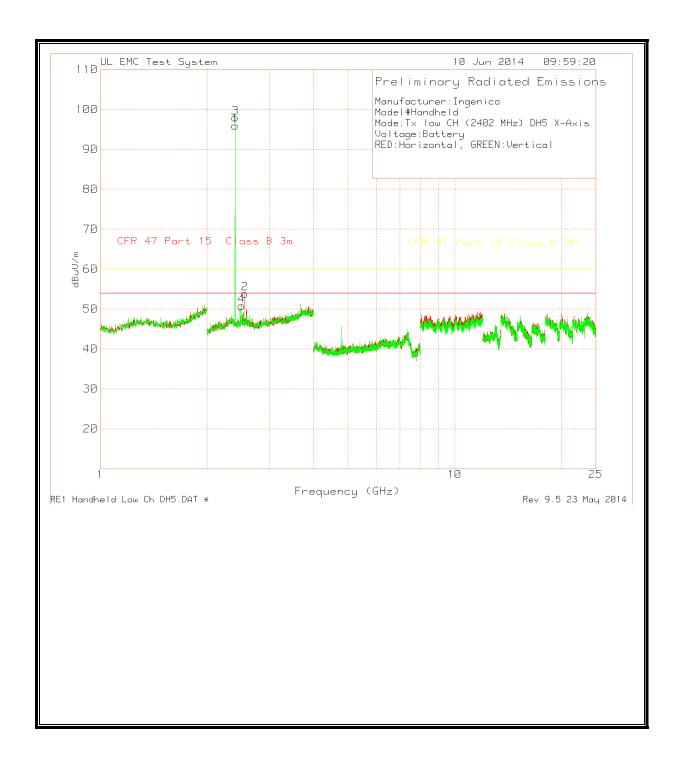

Manufacturer:Ingenico Model#Handheld Mode:Tx low CH (2402 MHz) DH5 X-Axis Voltage:Battery RED:Horizontal, GREEN:Vertical

	Test	Meter		Antenna		Corrected	CFR 47				
	Frequency	Reading(d		Factor	Gain/Loss	Reading	Part 15	Margin	Azimuth	Height	
Marker No.	(GHz)	BuV)	Detector	dB/m	(dB)	dBuV/m	Limit	(dB)	[Degs]	[cm]	Polarity
1	2.4024	69.58	PK	21.8	4.54	95.92	54	41.92	0-360	150) H
2	2.5586	27.34	PK	22.2	4.34	53.88	54	-0.12	0-360	150) H
3	2.4024	71.6	PK	21.8	4.54	97.94	54	43.94	0-360	150) V
4	2.5045	24.36	PK	22.1	4.33	50.79	54	-3.21	0-360	150) V


PK - Peak detector

Test	Meter		Antenna			Corrected	CFR 47				
Frequency	Reading		Factor	Gain/Loss	Duty Cycle	Reading	Part 15	Margin	Azimuth	Height	
(GHz)	(dBuV)	Detector	dB/m	(dB)	dB	dBuV/m	Limit	(dB)	[Degs]	[cm]	Polarity
2.5581	33.81	. PK	22.2	4.34	0	60.35	74	-13.65	290	100	Н
2.5581	25.16	i LnAv	22.2	4.34	-24.6	27.1	54	-26.9	290	100	Н

PK - Peak detector

LnAv - Linear (voltage) average detector

HARMONICS AND SPURIOUS EMISSIONS

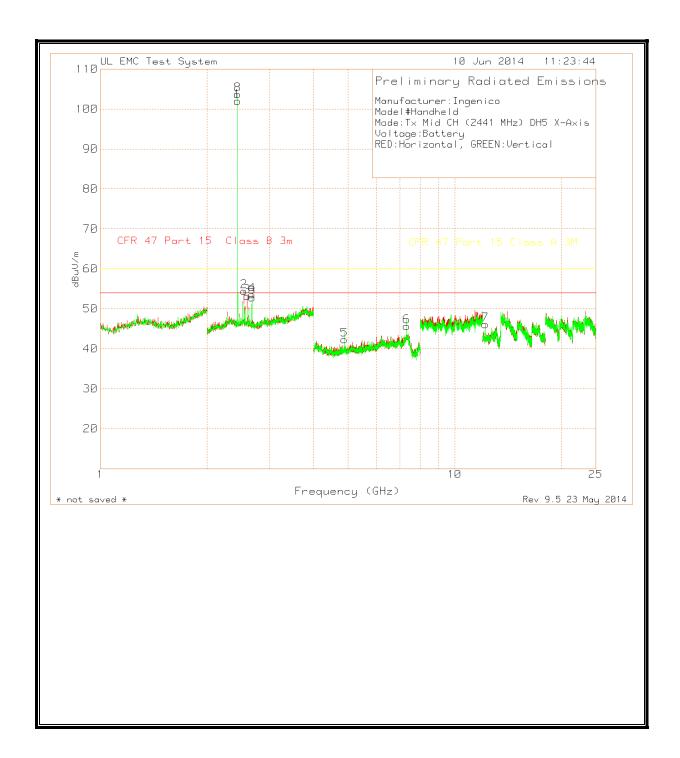

Manufacturer:Ingenico Model#Handheld Mode:Tx Mid CH (2441 MHz) DH5 X-Axis Voltage:Battery RED:Horizontal, GREEN:Vertical

	Test	Meter		Antenna		Corrected	CFR 47				
	Frequency	Reading(d		Factor	Gain/Loss	Reading	Part 15	Margin	Azimuth	Height	
Marker No.	(GHz)	BuV) [Detector	dB/m	(dB)	dBuV/m	Limit	(dB)	[Degs]	[cm]	Polarity
1	2.4404	75.58 F	PΚ	21.9	4.5	101.98	54	47.98	0-360	150	Н
2	2.5445	27.86 F	PΚ	22.2	4.36	54.42	54	0.42	0-360	150	Н
3	2.5966	26.44 F	PΚ	22.3	4.43	53.17	54	-0.83	0-360	150	Н
4	* 2.6807	27.03 F	PΚ	22.1	4.44	53.57	54	-0.43	0-360	150	Н
5	* 4.8804	64.73 F	PΚ	27.7	-50.11	42.32	54	-11.68	0-360	150	Н
6	* 7.3237	60.74 F	PΚ	30.6	-45.71	45.63	54	-8.37	0-360	150	Н
7	* 12.2041	52.24 F	PΚ	39.4	-45.52	46.12	54	-7.88	0-360	100	Н
8	2.4404	77.3 F	PΚ	21.9	4.5	103.7	54	49.7	0-360	150	V
9	* 2.6807	26.29 F	PΚ	22.1	4.44	52.83	54	-1.17	0-360	150	V

^{* -} indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Test	Meter		Antenna			Corrected	CFR 47			
Frequency	Reading		Factor	Gain/Loss	Duty Cycle	Reading	Part 15	Margin	Azimuth	Height
(GHz)	(dBuV)	Detector	dB/m	(dB)	dB	dBuV/m	Limit	(dB)	[Degs]	[cm] Polarity
2.5447	35.76	PK	22.2	4.36	0	62.32	74	-11.68	292	100 H
2.5451	27.78	LnAv	22.2	4.35	-24.6	29.73	54	-24.27	292	100 H
2.5968	34.35	PK	22.3	4.44	0	61.09	74	-12.91	290	115 H
2.597	25.86	LnAv	22.3	4.44	-24.6	28	54	-26	290	115 H
* 2.681	37.12	PK	22.1	4.44	0	63.66	74	-10.34	287	110 H
* 2.6811	28.95	LnAv	22.1	4.44	-24.6	30.89	54	-23.11	287	110 H
* 2.681	34.8	PK	22.1	4.44	0	61.34	74	-12.66	216	111 V
* 2.681	26.06	LnAv	22.1	4.44	-24.6	28	54	-26	216	111 V

PK - Peak detector

LnAv - Linear (voltage) average detector

FORM NO: CCSUP4701G

HARMONICS AND SPURIOUS EMISSIONS

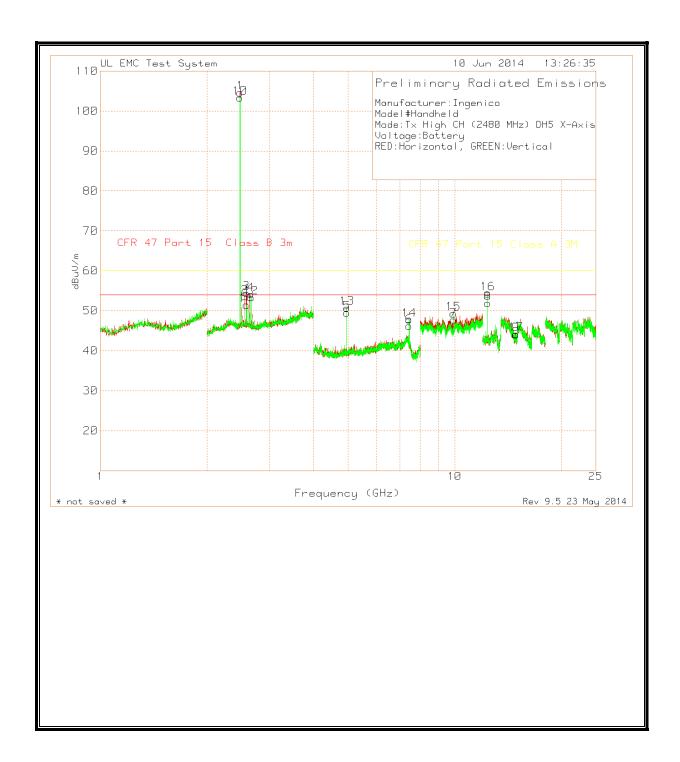

Manufacturer:Ingenico Model#Handheld Mode:Tx High CH (2480 MHz) DH5 X-Axis Voltage:Battery RED:Horizontal, GREEN:Vertical

	Test	Meter	Antenna		Corrected	CFR 47				
	Frequency	Reading(d	Factor	Gain/Loss	Reading	Part 15	Margin	Azimuth	Height	
Marker No.	(GHz)	BuV) Detector	dB/m	(dB)	dBuV/m	Limit	(dB)	[Degs]	[cm]	Polarity
1	2.4785	78.27 PK	22	4.34	104.61	54	50.61	0-360	150) H
2	2.5586	27.02 PK	22.2	4.34	53.56	54	-0.44	0-360	150) H
3	2.5846	27.8 PK	22.3	4.38	54.48	54	0.48	0-360	150) H
4	* 2.6607	27.55 PK	22.2	4.38	54.13	54	0.13	0-360	150) H
5	* 4.9605	72.24 PK	27.8	-50.5	49.54	54	-4.46	0-360	150) H
6	* 7.4417	62.41 PK	30.5	-46.7	46.21	54	-7.79	0-360	150) H
7	9.919	60.43 PK	36.4	-49.06	47.77	54	-6.23	0-360	150) H
8	* 12.3992	57.34 PK	39.4	-44.82	51.92	54	-2.08	0-360	100) H
9	14.8784	41.96 PK	39.8	-37.69	44.07	54	-9.93	0-360	100) H
10	2.4785	76.98 PK	22	4.34	103.32	54	49.32	0-360	150	V
11	2.5846	24.78 PK	22.3	4.38	51.46	54	-2.54	0-360	150	V
12	* 2.6627	26.73 PK	22.2	4.4	53.33	54	-0.67	0-360	150	V
13	* 4.9605	73.44 PK	27.8	-50.5	50.74	54	-3.26	0-360	150	V
14	* 7.4397	63.86 PK	30.6	-46.7	47.76	54	-6.24	0-360	150	V
15	9.921	61.94 PK	36.4	-49.04	49.3	54	-4.7	0-360	150	V
16	* 12.3992	59.74 PK	39.4	-44.82	54.32	54	0.32	0-360	100	V
17	14.8874	42.11 PK	39.8	-37.71	44.2	54	-9.8	0-360	100	V

^{* -} indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Test	Meter	Antenna			Corrected	CFR 47			
Frequency	Reading	Factor	Gain/Loss	Duty Cycle	Reading	Part 15	Margin	Azimuth	Height
(GHz)	(dBuV) Detector	dB/m	(dB)	dB	dBuV/m	Limit	(dB)	[Degs]	[cm] Polarity
* 2.662	36.95 PK	22.2	4.39	0	63.54	74	-10.46	292	110 H
* 2.662	28.84 LnAv	22.2	4.39	-24.6	30.83	54	-23.17	292	110 H
* 2.6621	34.55 PK	22.2	4.39	0	61.14	74	-12.86	215	113 V
* 2.662	25.96 LnAv	22.2	4.39	-24.6	27.95	54	-26.05	215	113 V
* 4.9597	77.28 PK	27.8	-50.5	0	54.58	74	-19.42	152	100 H
* 4.96	69.39 LnAv	27.8	-50.5	-24.6	22.09	54	-31.91	152	100 H
* 4.9596	80.67 PK	27.8	-50.5	0	57.97	74	-16.03	326	102 V
* 4.96	72.82 LnAv	27.8	-50.5	-24.6	25.52	54	-28.48	326	102 V
* 12.3993	65.69 PK	39.4	-44.81	0	60.28	74	-13.72	17	100 H
* 12.3995	52.59 LnAv	39.4	-44.81	-24.6	22.58	54	-31.42	17	100 H
* 12.399	65.96 PK	39.4	-44.82	0	60.54	74	-13.46	305	100 V
* 12.3996	54.11 LnAv	39.4	-44.81	-24.6	24.1	54	-29.9	305	100 V


PK - Peak detector

LnAv - Linear (voltage) average detector

REPORT NO: 10343507B FCC ID: XLB-IWLTBB


9.2.2. ENHANCED DATA RATE 8PSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

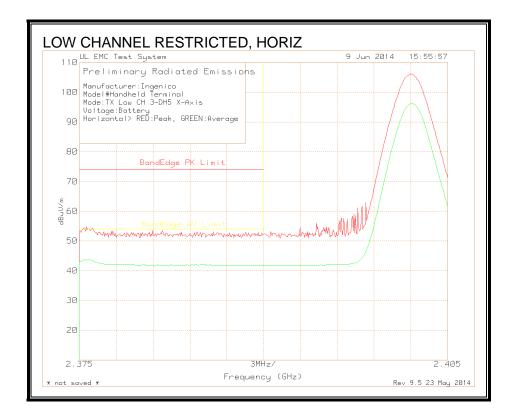


DATE: August 18, 2014 IC: 2586D-IWLTBB


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

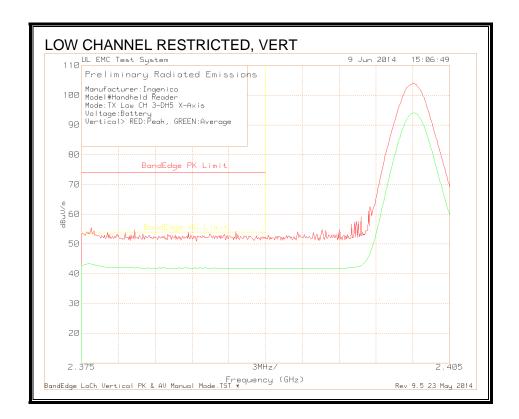

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

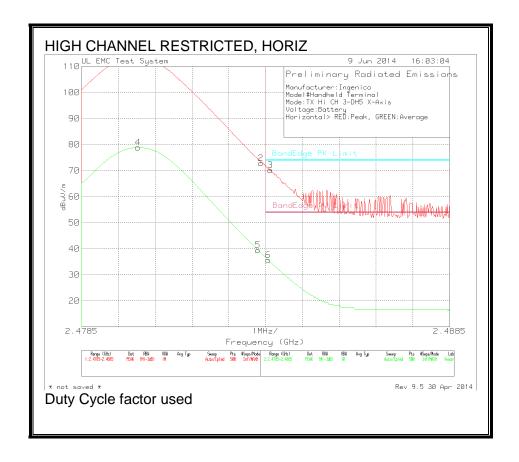


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

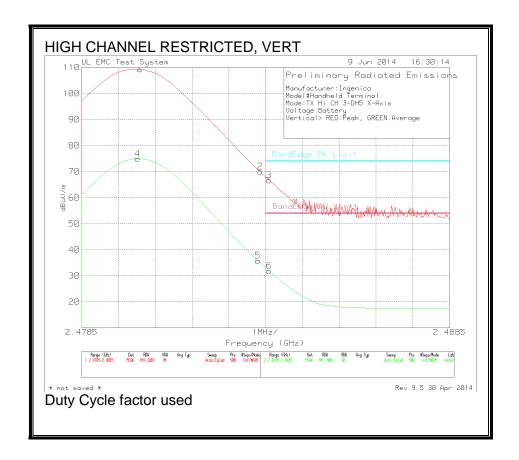


9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

DATE: August 18, 2014 IC: 2586D-IWLTBB

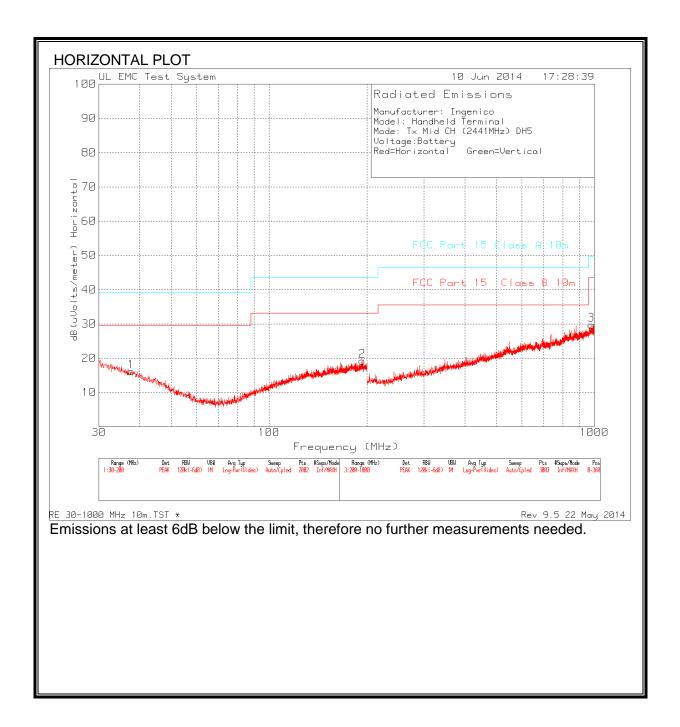

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

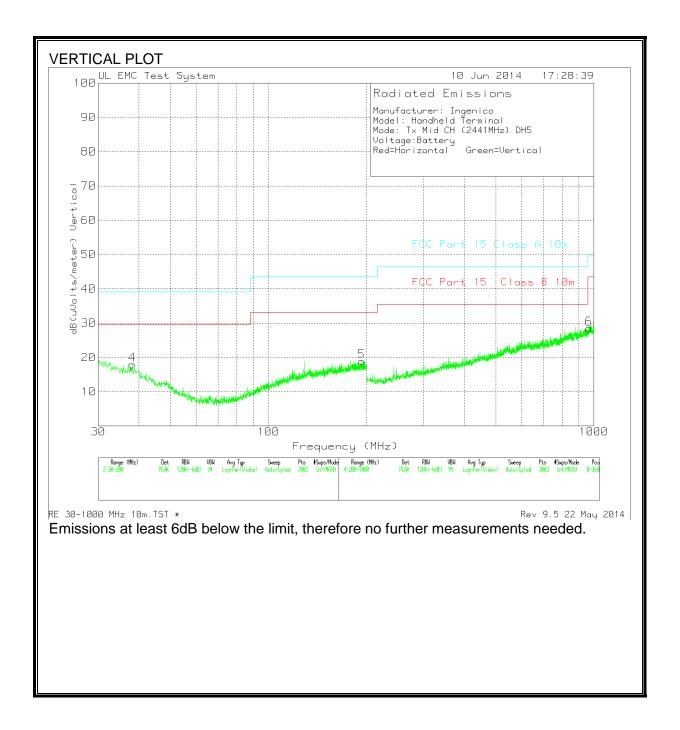


REPORT NO: 10343507B FCC ID: XLB-IWLTBB

9.4.


DIGITAL DEVICE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (DIGITAL DEVICE, HORIZONTAL)

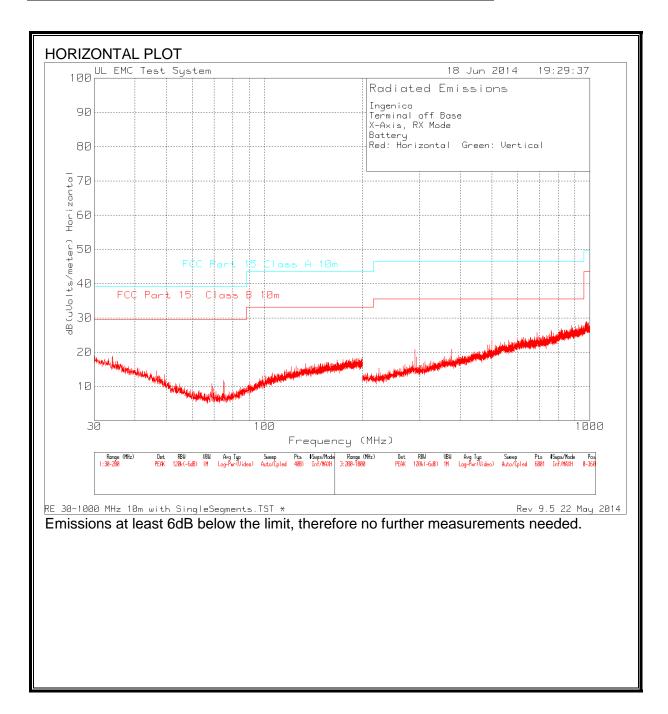

DATE: August 18, 2014 IC: 2586D-IWLTBB

SPURIOUS EMISSIONS 30 TO 1000 MHz (DIGITAL DEVICE, VERTICAL)

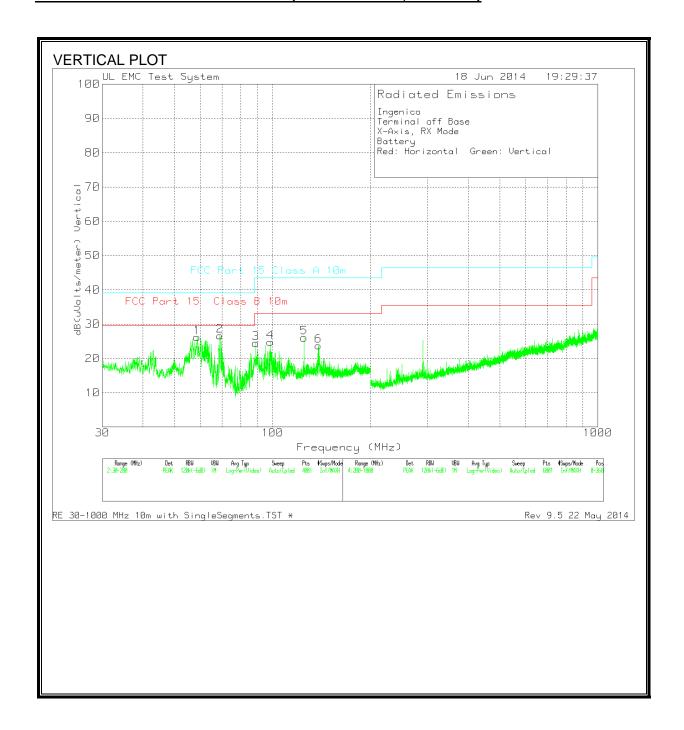

DATE: August 18, 2014 IC: 2586D-IWLTBB

This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL DATA

Ingenico Terminal off Base X-Axis, RX Mode Battery

Red: Horizontal Green: Vertical

							Corrected					
	-	Гest	Meter		Antenna		Reading	FCC Part				
Marker	- 1	Frequency	Reading(Factor	Cable	dB(uVolts/	15 Class A	Margin	Azimuth	Height	
No.	((MHz)	dBuV)	Detector	dB/m	Factor	meter)	10m	(dB)	[Degs]	[cm]	Polarity
	1	58.645	49.07	PK	7.2	-30.1	26.17	39.08	-12.91	0-360	2	49 V
	2	68.9725	50.45	PK	6.2	-30	26.65	39.08	-12.43	0-360	2	49 V
	3	88.8625	45.57	PK	8.8	-29.9	24.47	43.52	-19.05	0-360	2	49 V
	4	98.425	44.3	PK	10.4	-29.9	24.8	43.52	-18.72	0-360		99 V
	5	125.03	42.31	PK	13.5	-29.7	26.11	43.52	-17.41	0-360		99 V
	6	138 4175	39 13	PK	14.3	-29.7	23 73	43 52	-19 79	0-360		99 V

PK - Peak detector

REPORT NO: 10343507B DATE: August 18, 2014 IC: 2586D-IWLTBB FCC ID: XLB-IWLTBB

AC POWER LINE CONDUCTED EMISSIONS 10.

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)				
	Quasi-peak	Average			
0.15-0.5	66 to 56 °	56 to 46 *			
0.5-5	56	46			
5-30	60	50			

Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

The Terminal unit will not transmit BT while on charger, therefore no tests were performed.