

Measurement Results

No.1-3734/21-01-06_Annex_MR_A1

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test/s performed:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Information	4
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	5
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	7
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode	9
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	11
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	13
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode	15
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	17
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	19
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode	21
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	23
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	25
FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode	27
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	29
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	33
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode	37
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	41
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	45
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode	49
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	53
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	57
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode	61
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	65
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	69
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode	73
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode	77
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode	79
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode	81
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode	83
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode	85
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode	87
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode	89
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode	91
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode	93
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode	95
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode	97
FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode	99
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode	101
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode	103
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode	105
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode	107
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode	109
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode	111

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode	113
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode	115
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode	117
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode	119
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode	121
FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 b mode	123
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	125
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	128
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT40 mode	131
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	134
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	137
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 n-HT20 mode	140
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	143
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	146
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 g mode	149
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	152
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	155
FCC 15.247 # TX spurious conducted 20dBc ~ WLAN2G4 b mode	158

EUT Information

EUT DEFINITION	
Manufacturer	Ingenico Group
Type	Xtra module
Serial Number	NI
Setup Number	1.0
Version SW	NI
Version FW	NI
Version HW	NI
Comment 1	
Comment 2	
Temperature [°C] Min	0
Temperature [°C] Nom	20
Temperature [°C] Max	40
Voltage [V] Min	5
Voltage [V] Nom	5
Voltage [V] Max	5

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 10:59:52
Ambit Temp [°C] Humidity [rel%]	28.3 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2452 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.44	dBm	INFO
Ref. Frequency	---	---	2448.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.56 11.18 10
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	36552	kHz	PASS

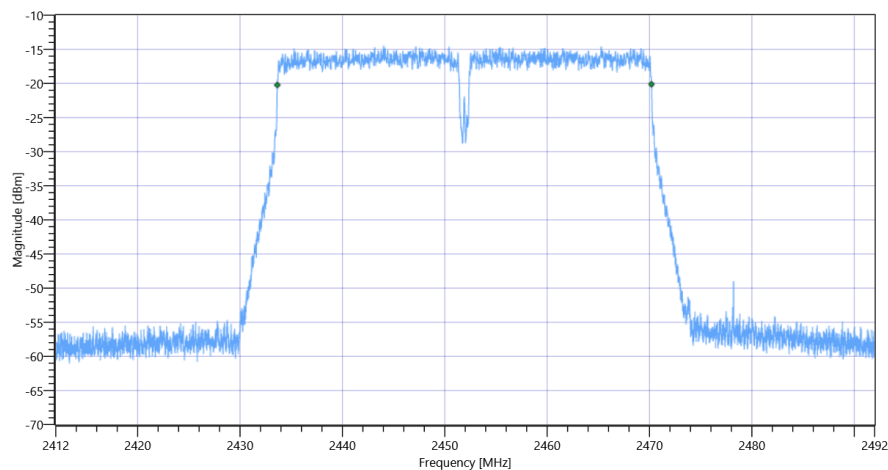

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

Test References

TC Start	05.07.2022 10:45:57
Ambit Temp [°C] Humidity [rel%]	28.3 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.16	dBm	INFO
Ref. Frequency	---	---	2447.190	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.84 11.15 10
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	36520	kHz	PASS

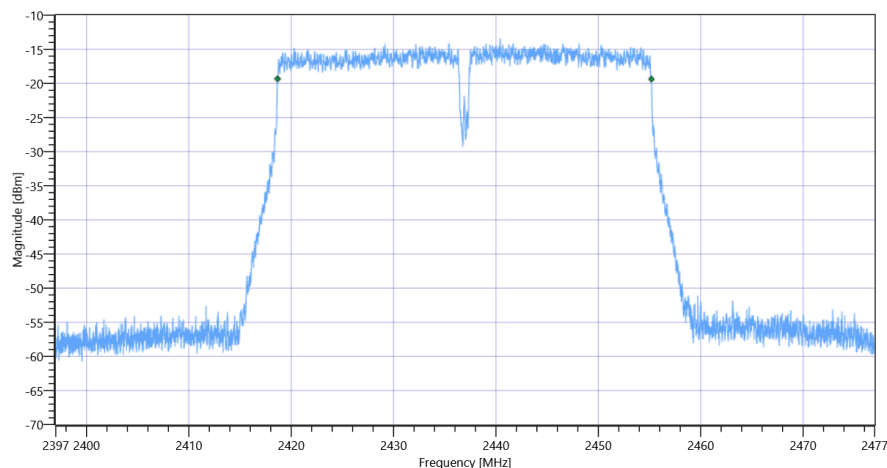

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 10:31:14
Ambit Temp [°C] Humidity [rel%]	28.1 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2422 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-2.85	dBm	INFO
Ref. Frequency	---	---	2437.680	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.15 11.13 10
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	36368	kHz	PASS

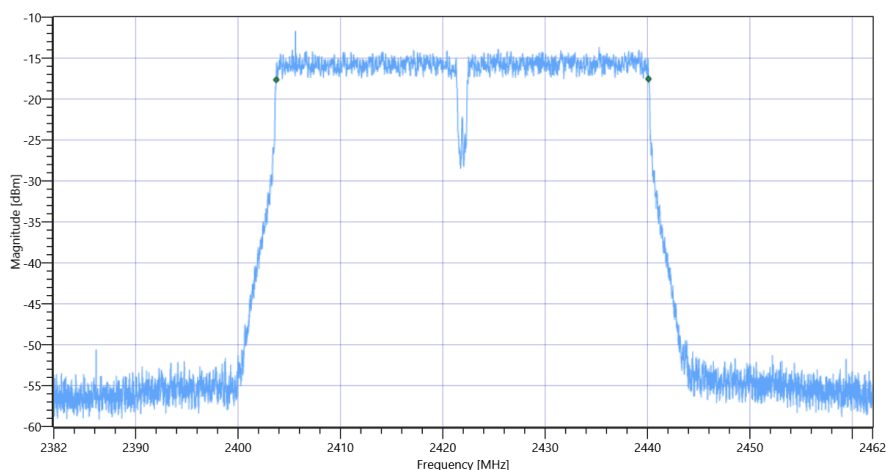

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 10:16:15
Ambit Temp [°C] Humidity [rel%]	28.0 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.81	dBm	INFO
Ref. Frequency	---	---	2469.490	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.81 11.19 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	17800	kHz	PASS

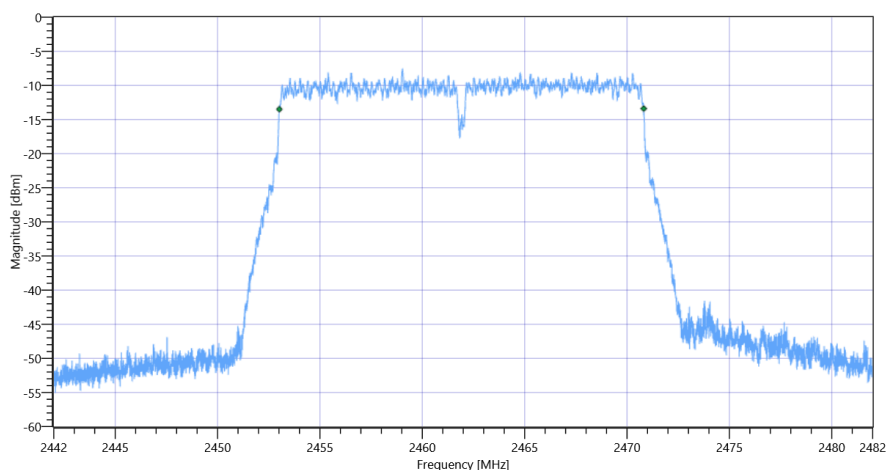

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 09:55:41
Ambit Temp [°C] Humidity [rel%]	27.7 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.82	dBm	INFO
Ref. Frequency	---	---	2441.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.82 11.15 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	17800	kHz	PASS

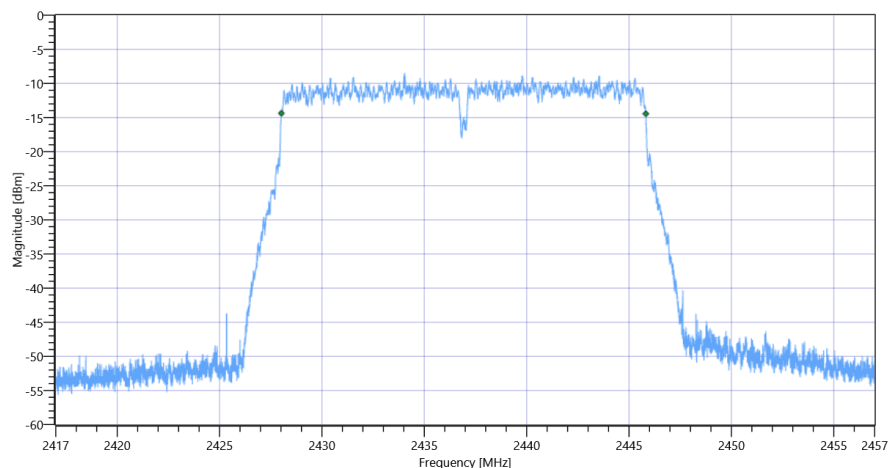

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 09:32:52
Ambit Temp [°C] Humidity [rel%]	27.6 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.40	dBm	INFO
Ref. Frequency	---	---	2404.310	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.40 11.11 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	17600	kHz	PASS

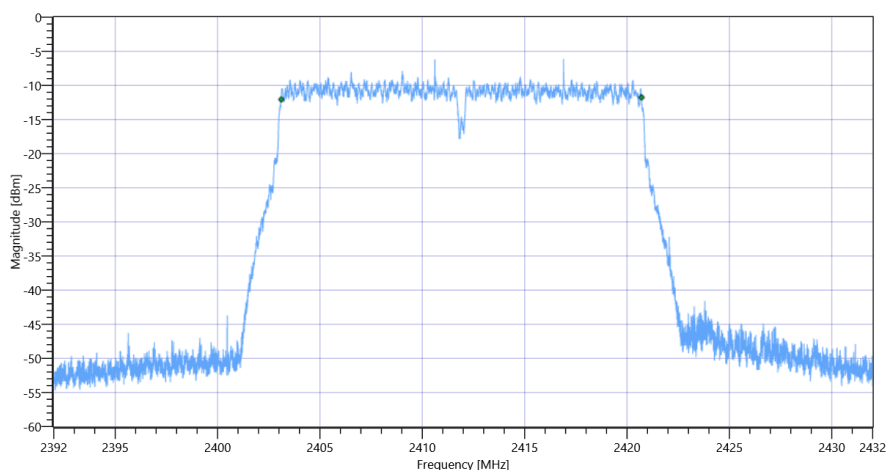

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 09:19:35
Ambit Temp [°C] Humidity [rel%]	27.4 35
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	3.15	dBm	INFO
Ref. Frequency	---	---	2463.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.15 11.19 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16364	kHz	PASS

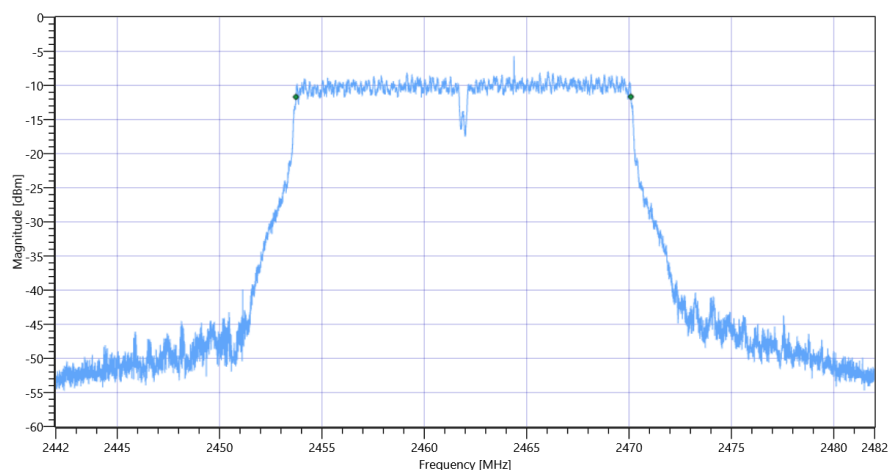

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 09:06:18
Ambit Temp [°C] Humidity [rel%]	27.2 36
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.03	dBm	INFO
Ref. Frequency	---	---	2439.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.03 11.15 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16536	kHz	PASS

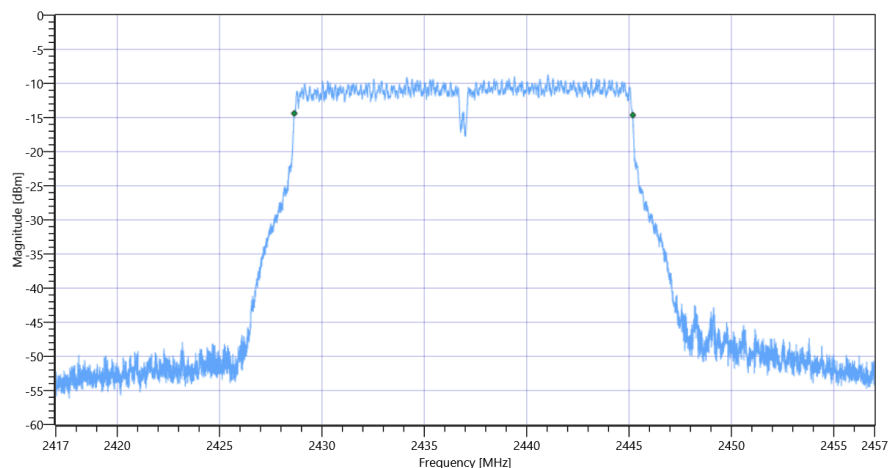

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 08:44:39
Ambit Temp [°C] Humidity [rel%]	26.9 37
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.07	dBm	INFO
Ref. Frequency	---	---	2418.190	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.07 11.11 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	16540	kHz	PASS

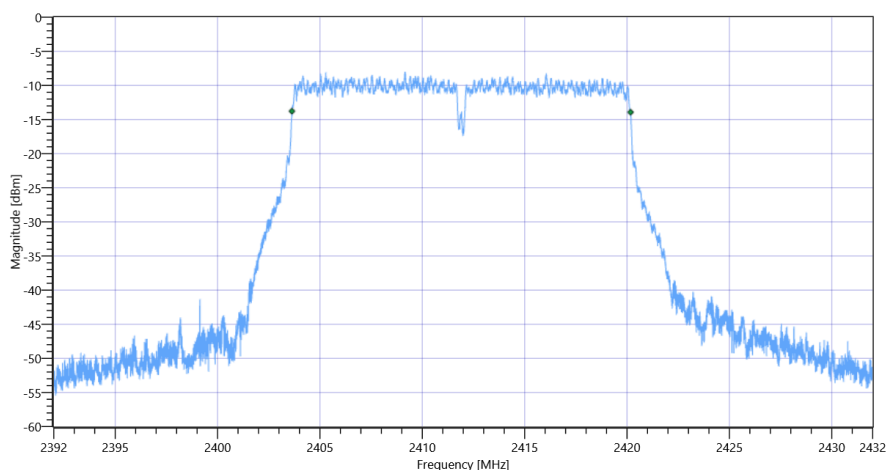

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

Test References

TC Start	05.07.2022 08:18:42
Ambit Temp [°C] Humidity [rel%]	26.5 37
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.97	dBm	INFO
Ref. Frequency	---	---	2463.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.97 11.19 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	10052	kHz	PASS

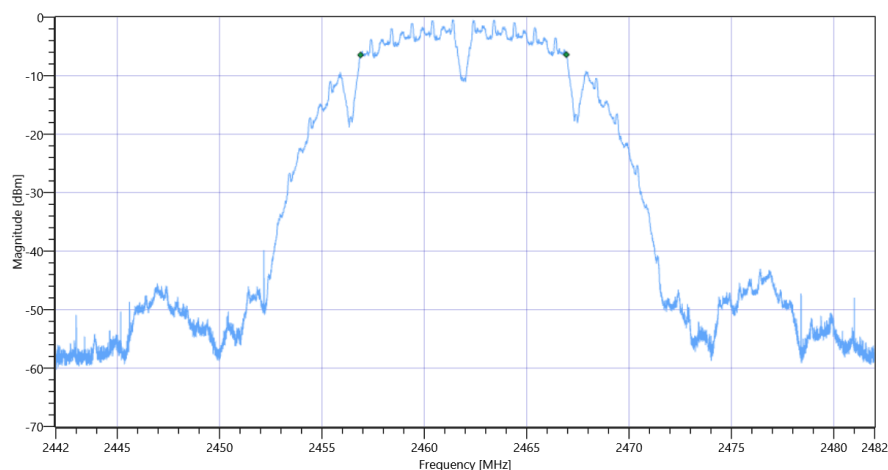

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

Test References	
TC Start	05.07.2022 08:06:08
Ambit Temp [°C] Humidity [rel%]	26.2 38
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.16	dBm	INFO
Ref. Frequency	---	---	2438.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.16 11.15 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	10044	kHz	PASS

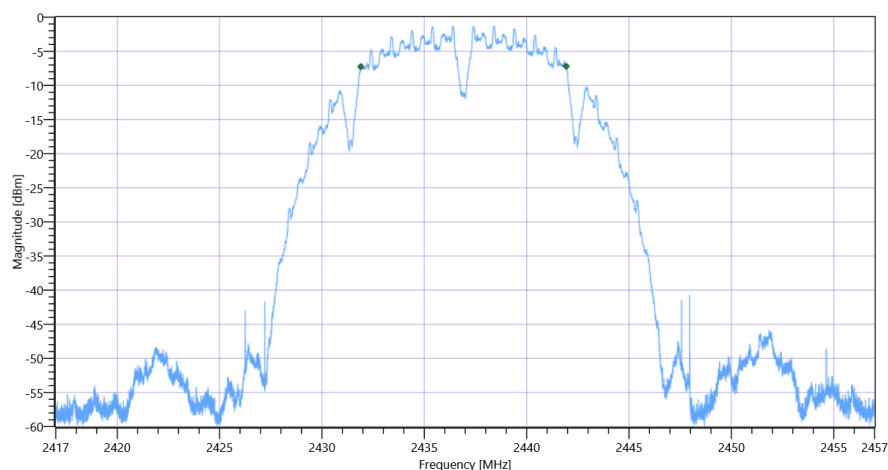

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

Test References	
TC Start	05.07.2022 07:52:10
Ambit Temp [°C] Humidity [rel%]	25.6 40
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.49	dBm	INFO
Ref. Frequency	---	---	2410.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.49 11.11 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	10036	kHz	PASS

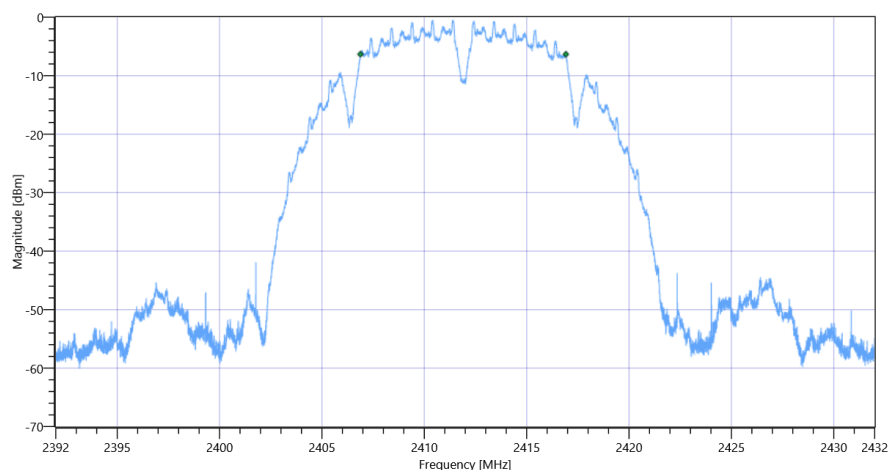

FCC 15.247 # Bandwidth 6dB DTS ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

Test References

TC Start	05.07.2022 11:01:12
Ambit Temp [°C] Humidity [rel%]	28.3 33
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2452 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.80	dBm	INFO
Ref. Frequency	---	---	2454.000	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.20 11.18 10
Start [MHz] Stop [MHz]	2412.000 2492.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36956.304	kHz	INFO
T1 99%	2400.000000	---	2433.5538	MHz	PASS
T2 99%	---	2483.500000	2470.5101	MHz	PASS

Plot: Bandwidth only

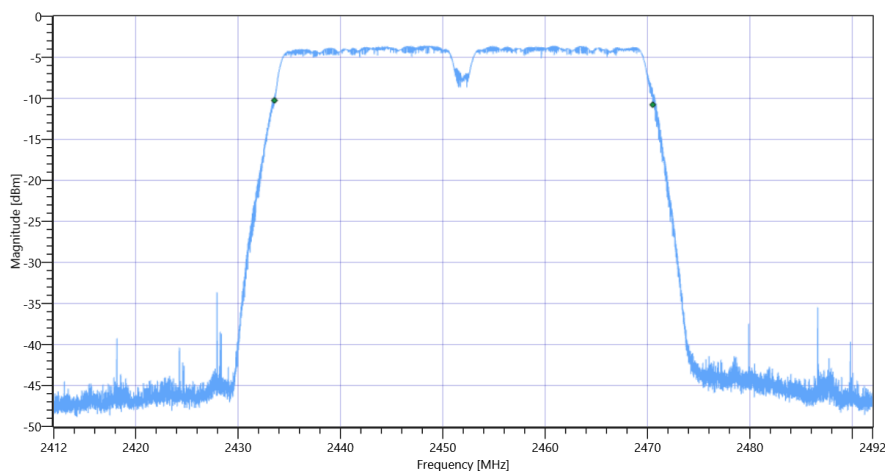


Plot: Bandwidth within Band

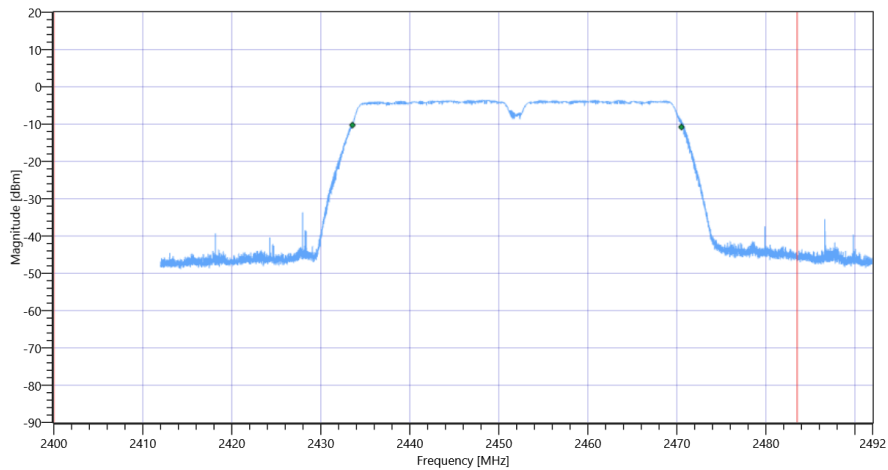

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40896	kHz	INFO
T1 20dB	2400.000000	---	2431.4800	MHz	PASS
T2 20dB	---	2483.500000	2472.3760	MHz	PASS

Plot: Bandwidth only

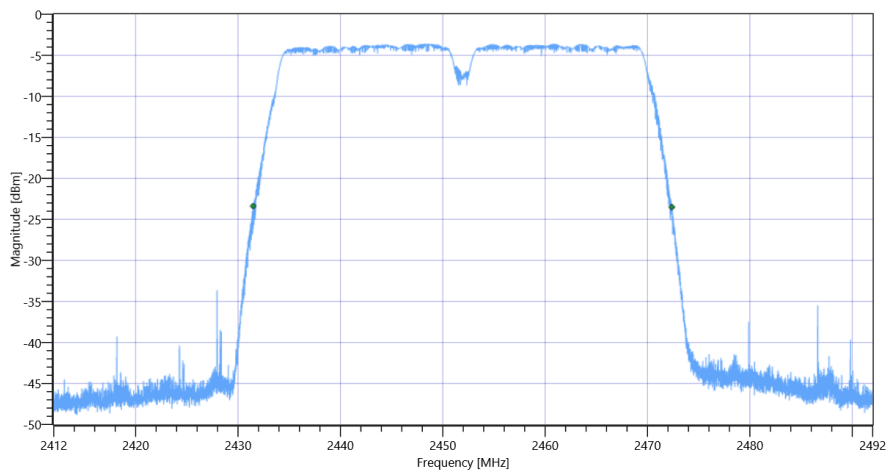

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode 20dB

Plot: Bandwidth within Band

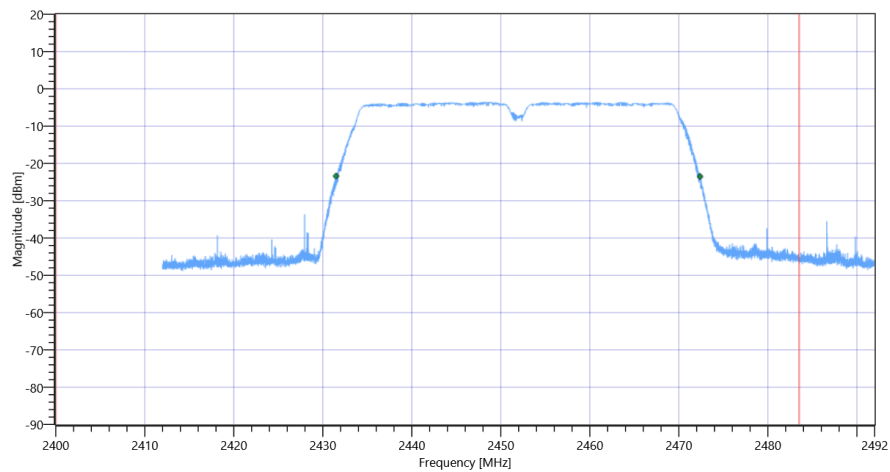

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

Test References

TC Start	05.07.2022 10:47:17
Ambit Temp [°C] Humidity [rel%]	28.3 32
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.30	dBm	INFO
Ref. Frequency	---	---	2444.890	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.70 11.15 10
Start [MHz] Stop [MHz]	2397.000 2477.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	36924.308	kHz	INFO
T1 99%	2400.000000	---	2418.5698	MHz	PASS
T2 99%	---	2483.500000	2455.4942	MHz	PASS

Plot: Bandwidth only

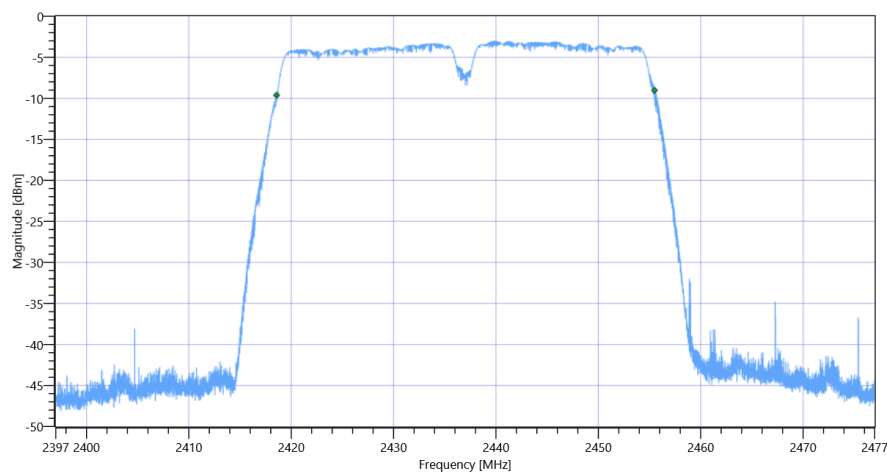


Plot: Bandwidth within Band

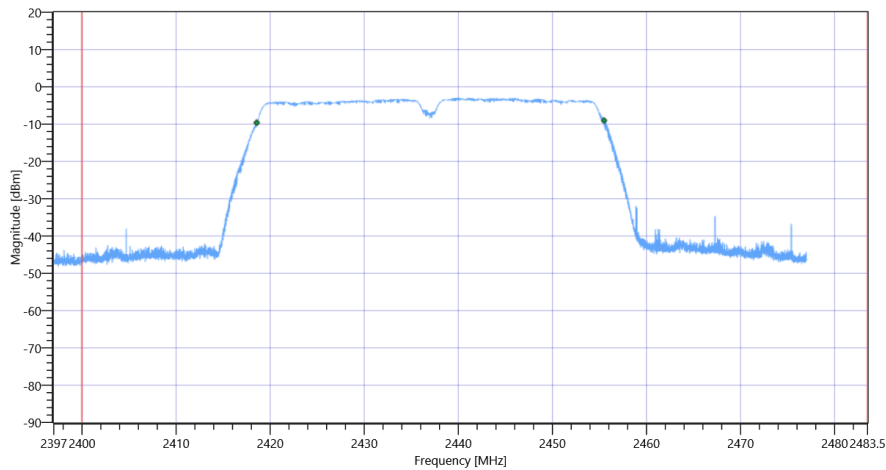

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40768	kHz	INFO
T1 20dB	2400.000000	---	2416.5360	MHz	PASS
T2 20dB	---	2483.500000	2457.3040	MHz	PASS

Plot: Bandwidth only

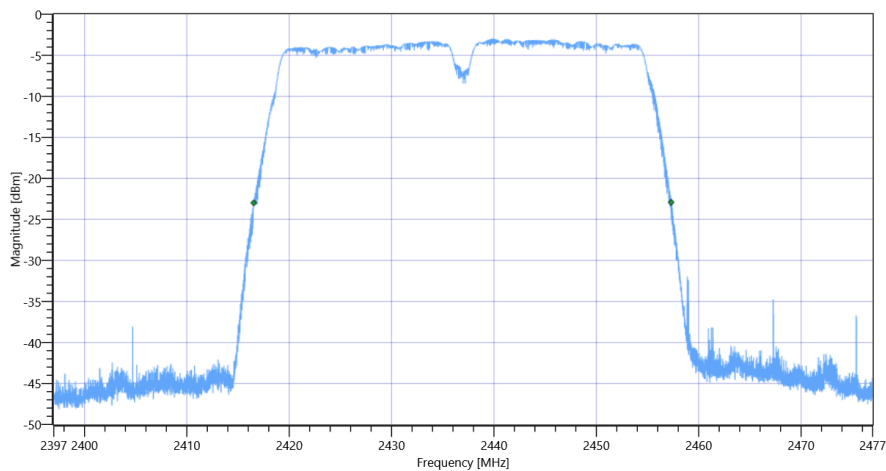

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode 20dB

Plot: Bandwidth within Band

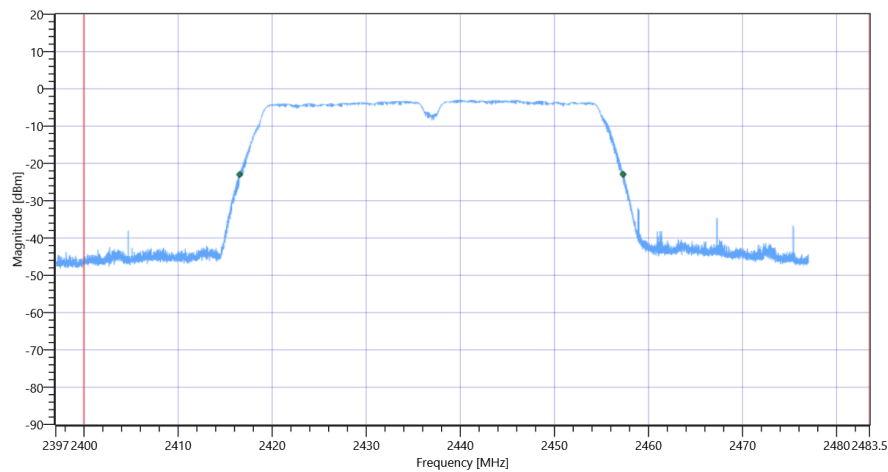

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

Test References

TC Start	05.07.2022 10:32:34
Ambit Temp [°C] Humidity [rel%]	28.1 33
System Version	3.2.0.2
Test Specification	FCC 15.247, ISSED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2422 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.06	dBm	INFO
Ref. Frequency	---	---	2412.510	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.94 11.13 10
Start [MHz] Stop [MHz]	2382.000 2462.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	37052.295	kHz	INFO
T1 99%	2400.000000	---	2403.4819	MHz	PASS
T2 99%	---	2483.500000	2440.5341	MHz	PASS

Plot: Bandwidth only

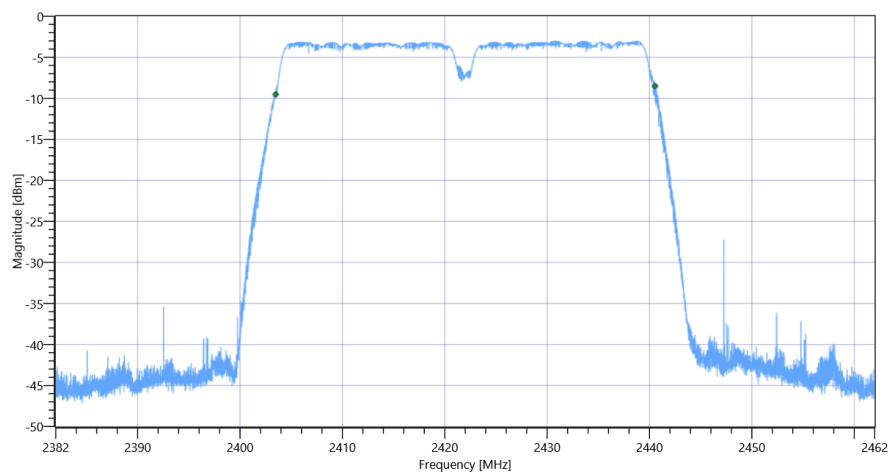


Plot: Bandwidth within Band

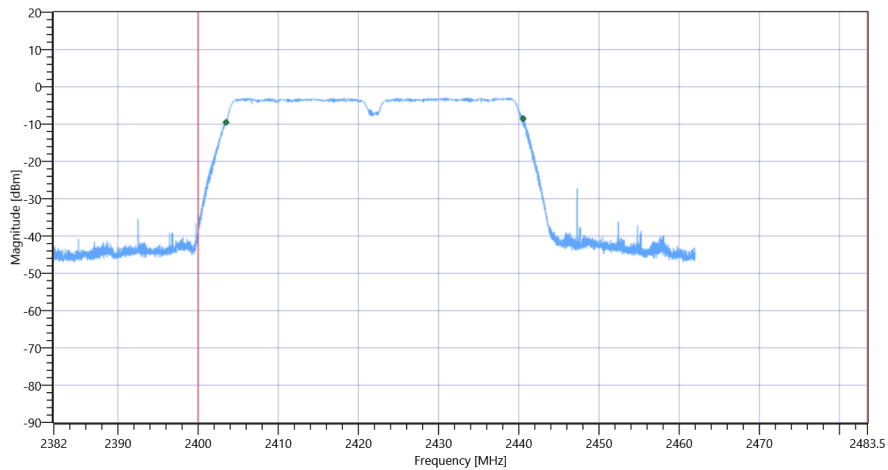

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	40968	kHz	INFO
T1 20dB	2400.000000	---	2401.4320	MHz	PASS
T2 20dB	---	2483.500000	2442.4000	MHz	PASS

Plot: Bandwidth only

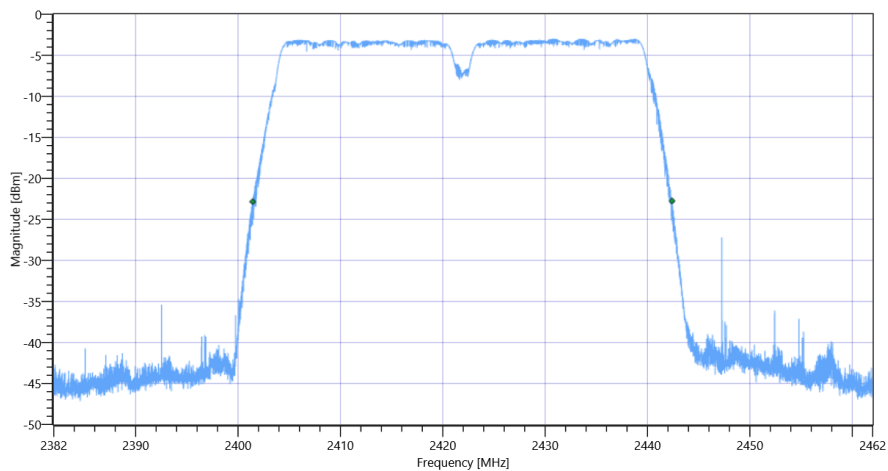

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode 20dB

Plot: Bandwidth within Band

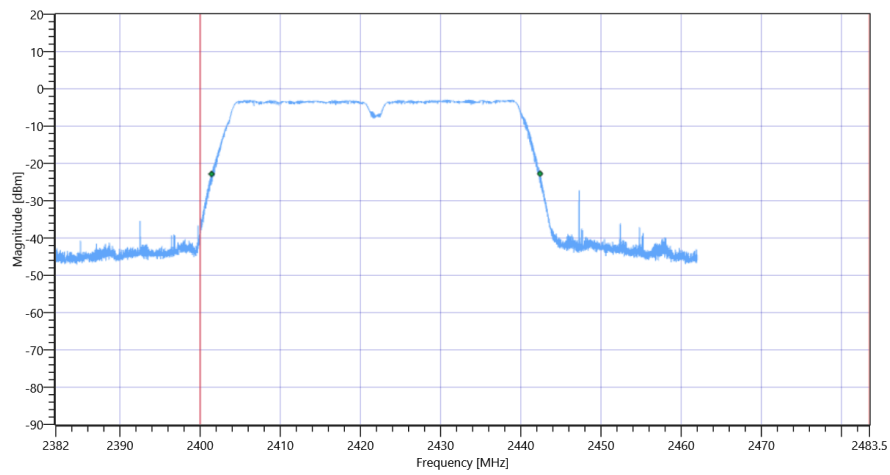

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

Test References

TC Start	05.07.2022 10:17:36
Ambit Temp [°C] Humidity [rel%]	27.9 33
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.97	dBm	INFO
Ref. Frequency	---	---	2466.100	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.97 11.19 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	18186.181	kHz	INFO
T1 99%	2400.000000	---	2452.8489	MHz	PASS
T2 99%	---	2483.500000	2471.0351	MHz	PASS

Plot: Bandwidth only

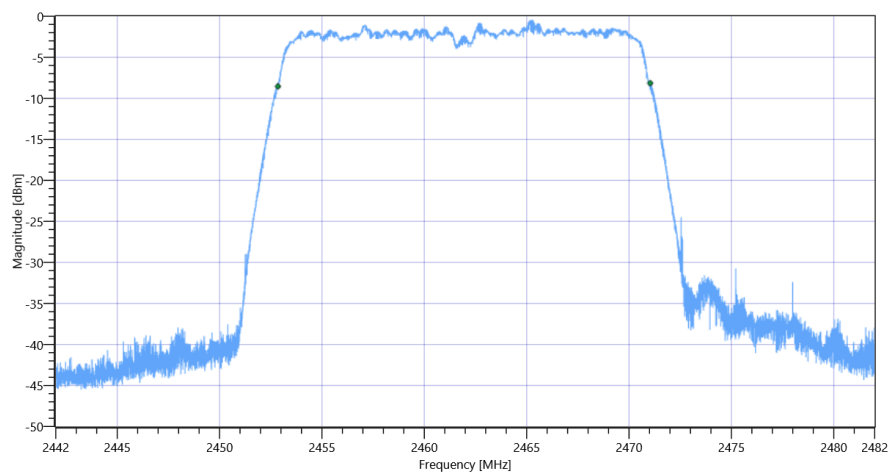

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 99PCT


Plot: Bandwidth within Band

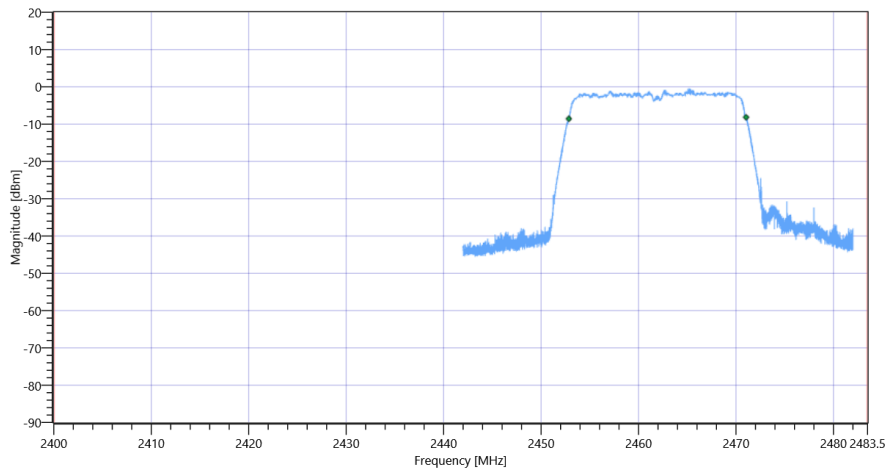

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	20032	kHz	INFO
T1 20dB	2400.000000	---	2451.9080	MHz	PASS
T2 20dB	---	2483.500000	2471.9400	MHz	PASS

Plot: Bandwidth only

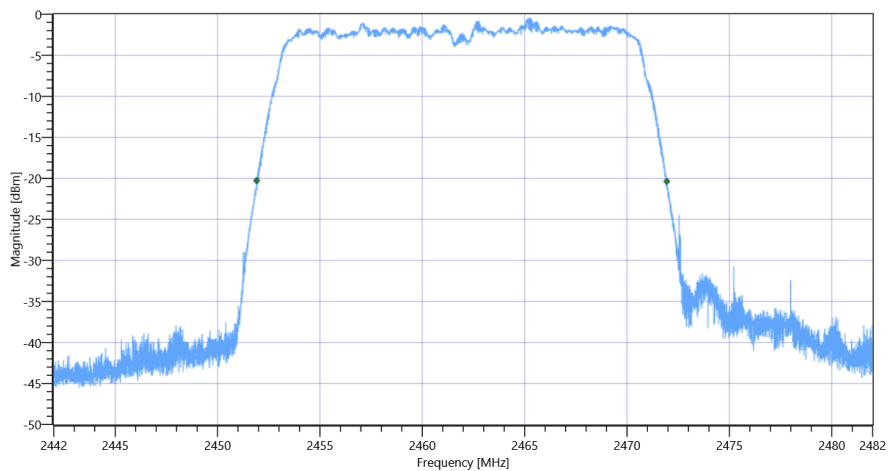

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 20dB

Plot: Bandwidth within Band

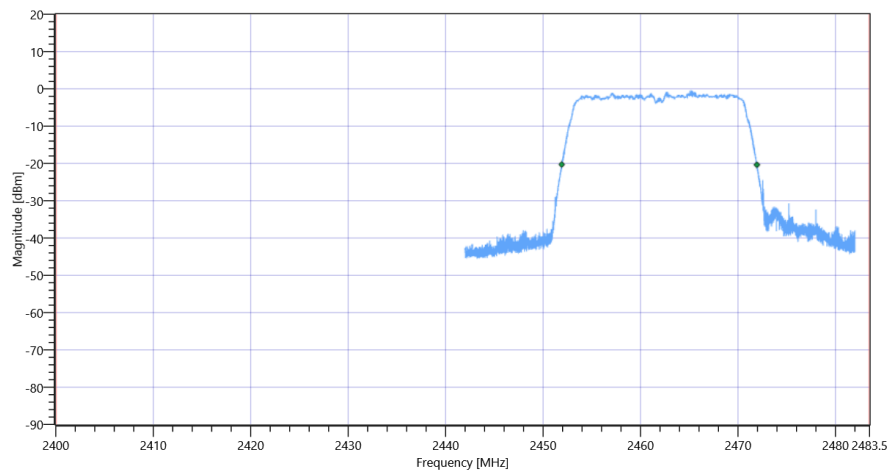

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

Test References

TC Start	05.07.2022 09:57:02
Ambit Temp [°C] Humidity [rel%]	27.7 34
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.04	dBm	INFO
Ref. Frequency	---	---	2440.800	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.04 11.15 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	18154.185	kHz	INFO
T1 99%	2400.000000	---	2427.8689	MHz	PASS
T2 99%	---	2483.500000	2446.0231	MHz	PASS

Plot: Bandwidth only

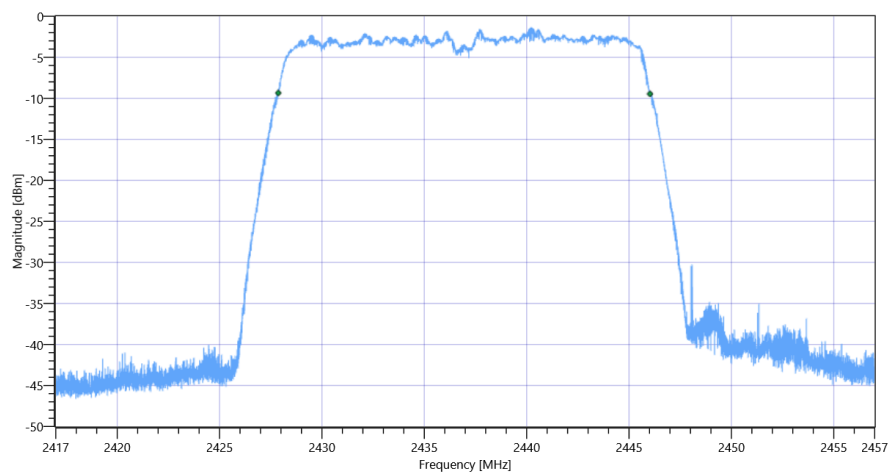

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 99PCT


Plot: Bandwidth within Band

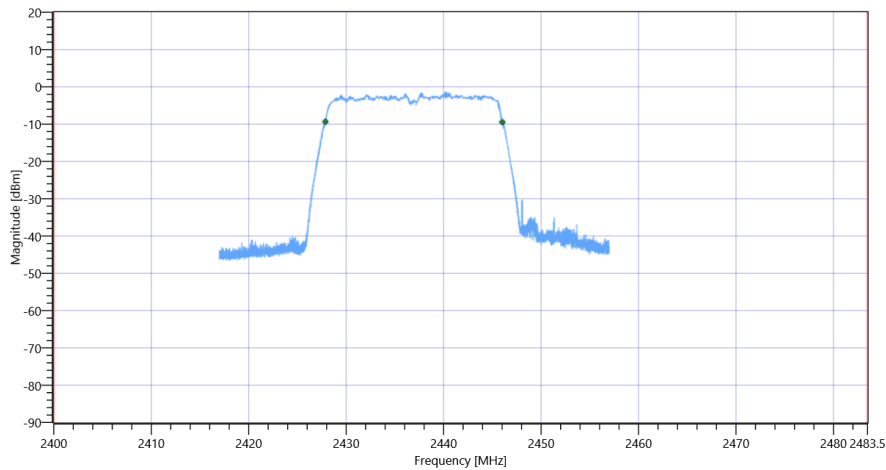

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	20012	kHz	INFO
T1 20dB	2400.000000	---	2426.9200	MHz	PASS
T2 20dB	---	2483.500000	2446.9320	MHz	PASS

Plot: Bandwidth only

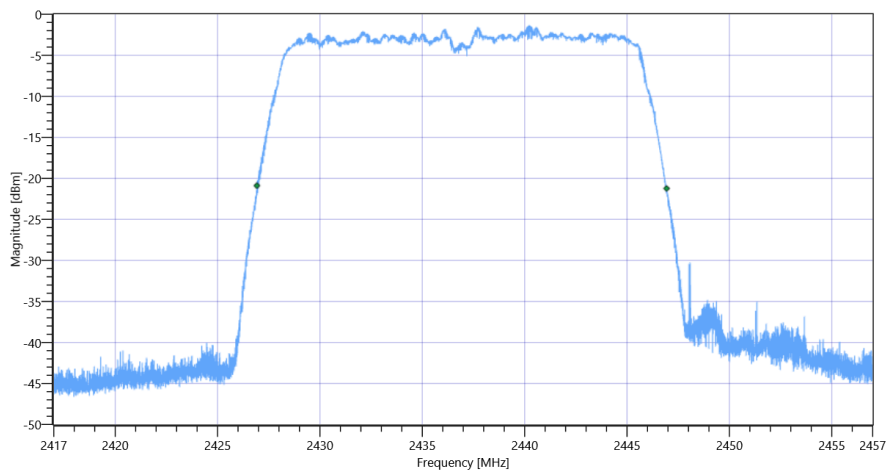

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 20dB

Plot: Bandwidth within Band

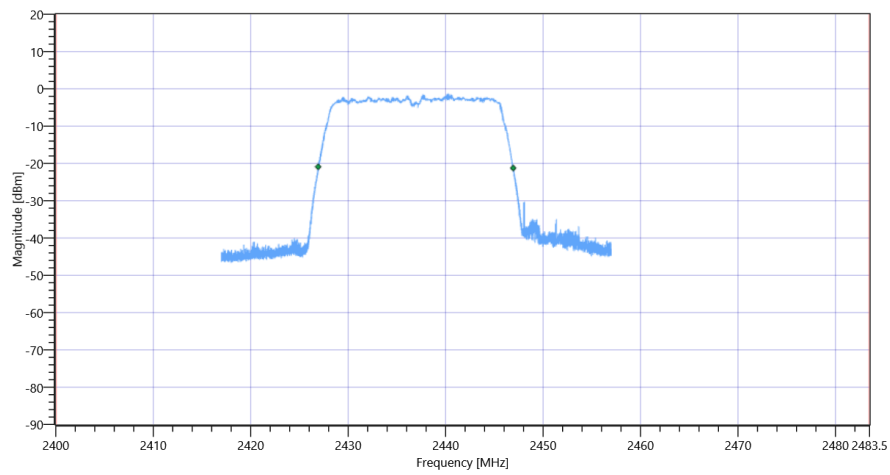

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

Test References

TC Start	05.07.2022 09:34:13
Ambit Temp [°C] Humidity [rel%]	27.6 34
System Version	3.2.0.2
Test Specification	FCC 15.247, ISSED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.31	dBm	INFO
Ref. Frequency	---	---	2409.100	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.31 11.11 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	18182.182	kHz	INFO
T1 99%	2400.000000	---	2402.8169	MHz	PASS
T2 99%	---	2483.500000	2420.9991	MHz	PASS

Plot: Bandwidth only

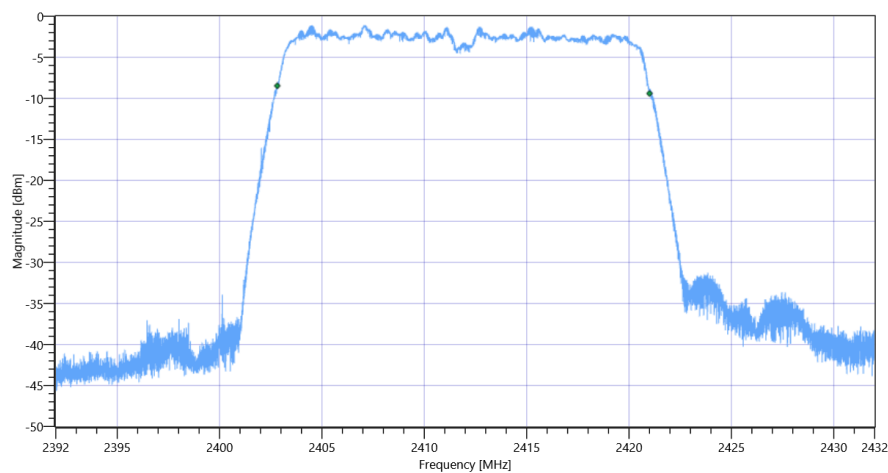


Plot: Bandwidth within Band

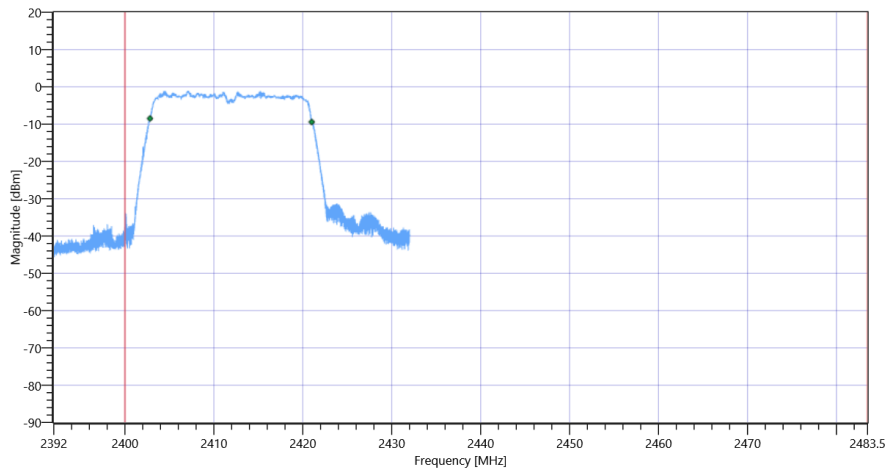

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	20060	kHz	INFO
T1 20dB	2400.000000	---	2401.8640	MHz	PASS
T2 20dB	---	2483.500000	2421.9240	MHz	PASS

Plot: Bandwidth only

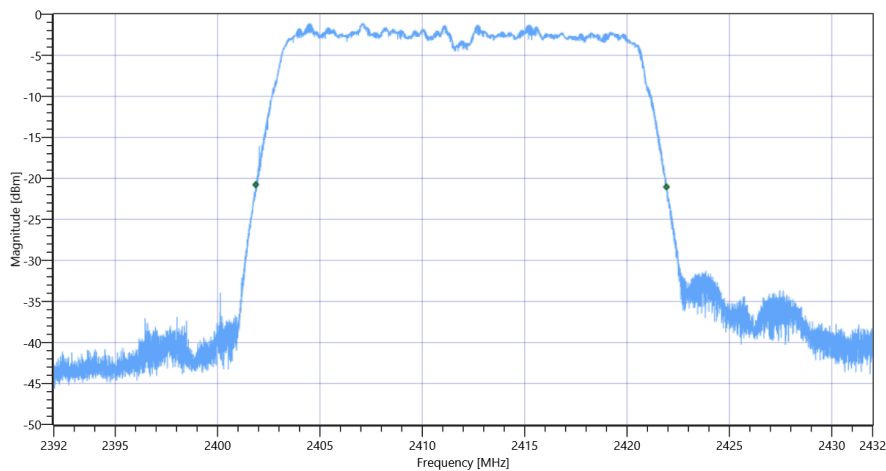

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode 20dB

Plot: Bandwidth within Band

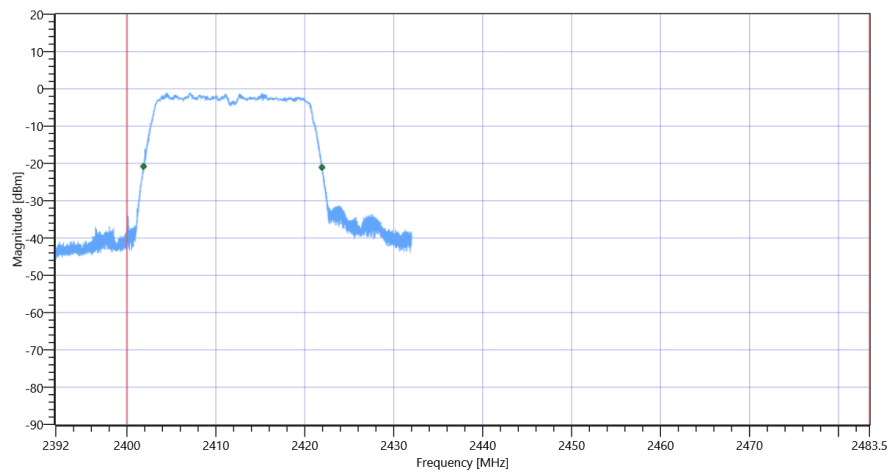

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

Test References

TC Start	05.07.2022 09:20:55
Ambit Temp [°C] Humidity [rel%]	27.4 35
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.67	dBm	INFO
Ref. Frequency	---	---	2463.700	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.67 11.19 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17266.273	kHz	INFO
T1 99%	2400.000000	---	2453.2609	MHz	PASS
T2 99%	---	2483.500000	2470.5271	MHz	PASS

Plot: Bandwidth only

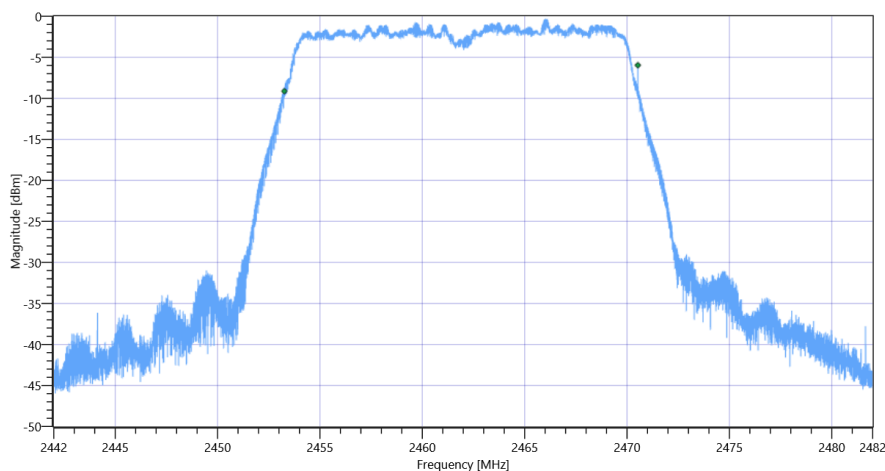

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 99PCT


Plot: Bandwidth within Band

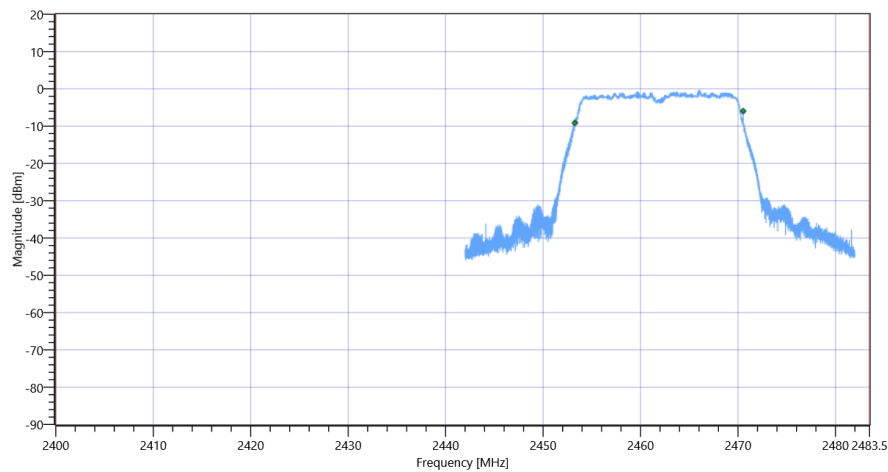

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19744	kHz	INFO
T1 20dB	2400.000000	---	2452.0480	MHz	PASS
T2 20dB	---	2483.500000	2471.7920	MHz	PASS

Plot: Bandwidth only

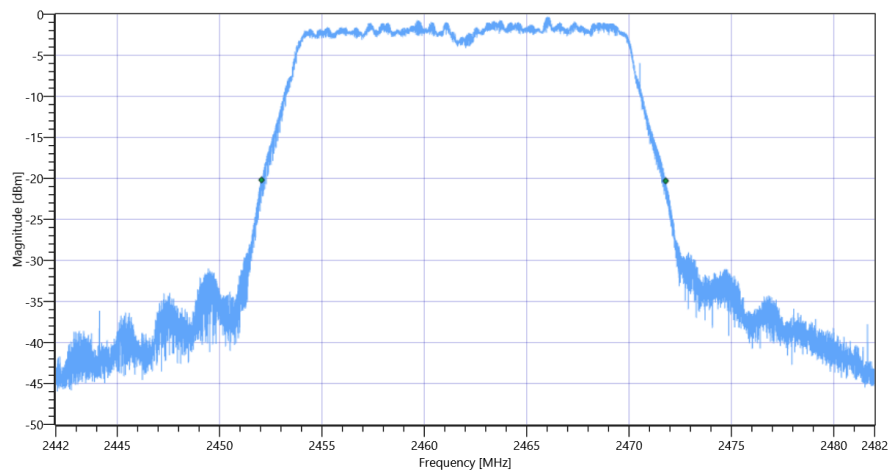

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 20dB

Plot: Bandwidth within Band

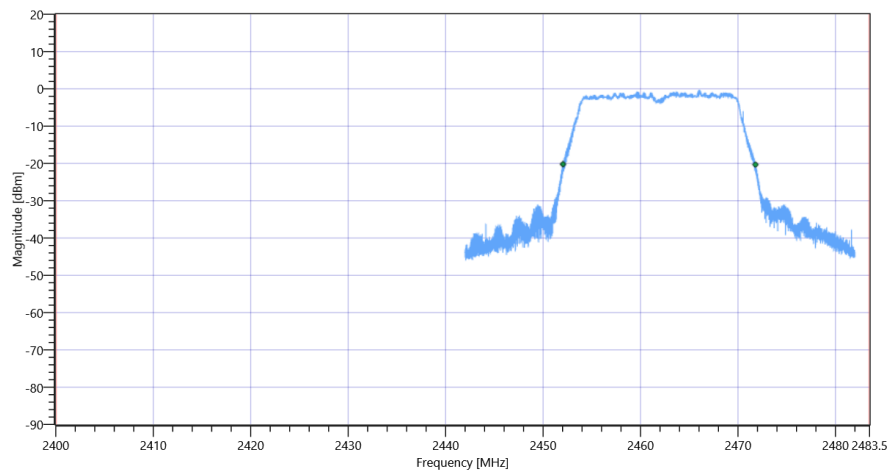

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 09:07:38
Ambit Temp [°C] Humidity [rel%]	27.3 36
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.64	dBm	INFO
Ref. Frequency	---	---	2440.800	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.64 11.15 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17222.278	kHz	INFO
T1 99%	2400.000000	---	2428.2849	MHz	PASS
T2 99%	---	2483.500000	2445.5071	MHz	PASS

Plot: Bandwidth only

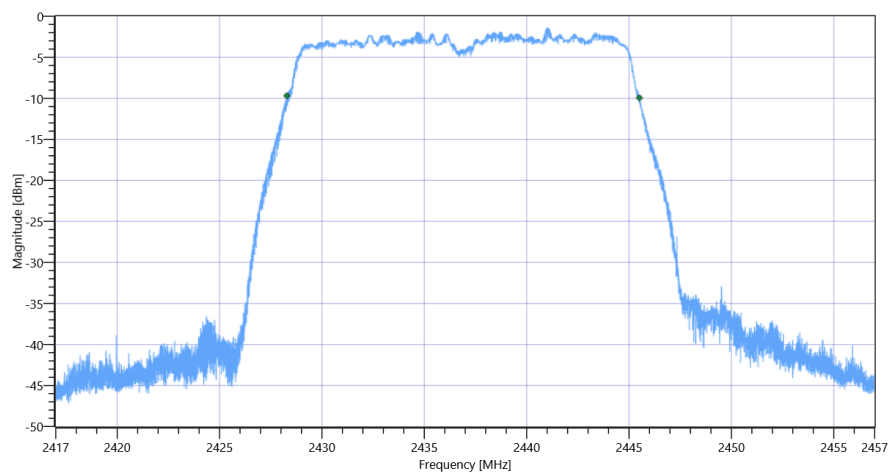

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 99PCT


Plot: Bandwidth within Band

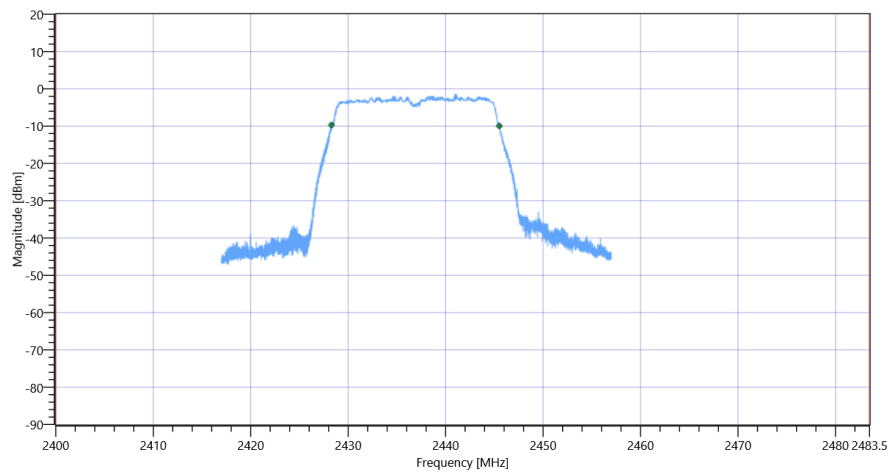

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19640	kHz	INFO
T1 20dB	2400.000000	---	2427.1240	MHz	PASS
T2 20dB	---	2483.500000	2446.7640	MHz	PASS

Plot: Bandwidth only

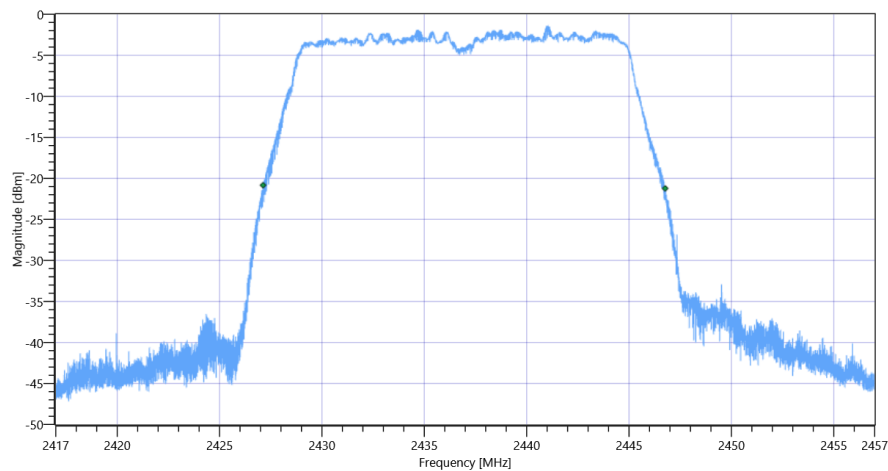

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 20dB

Plot: Bandwidth within Band

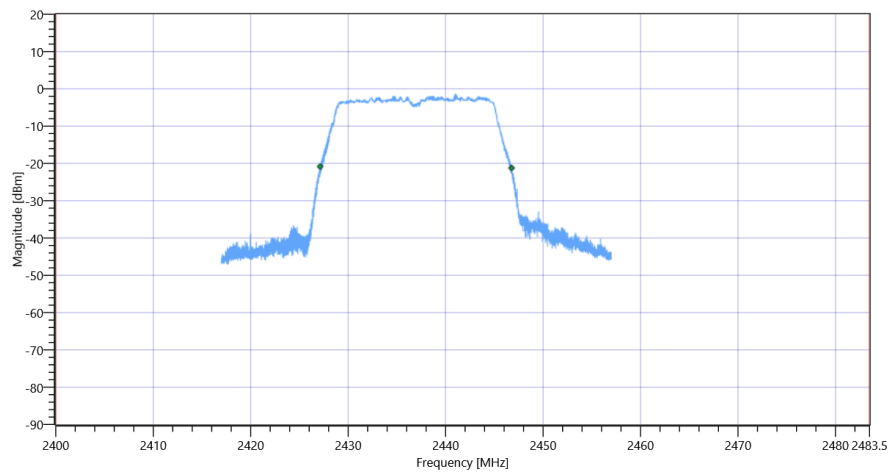

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 08:46:00
Ambit Temp [°C] Humidity [rel%]	27.0 37
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.60	dBm	INFO
Ref. Frequency	---	---	2408.700	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.60 11.11 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	17266.273	kHz	INFO
T1 99%	2400.000000	---	2403.2289	MHz	PASS
T2 99%	---	2483.500000	2420.4952	MHz	PASS

Plot: Bandwidth only

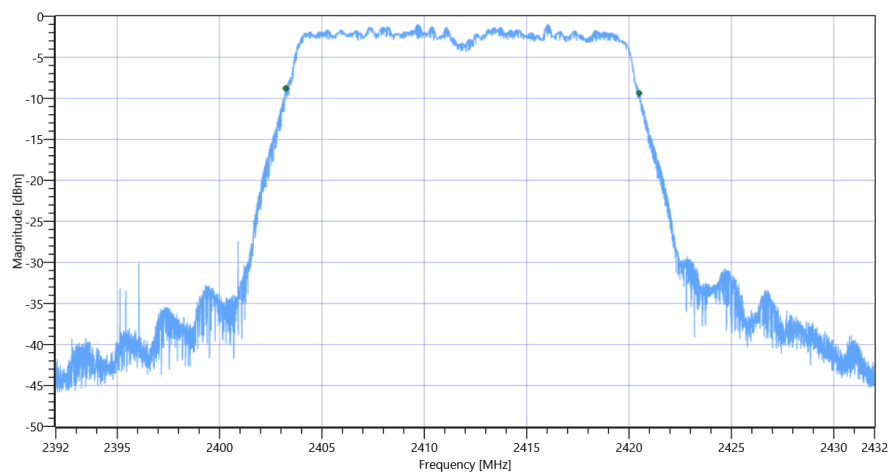

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 99PCT


Plot: Bandwidth within Band

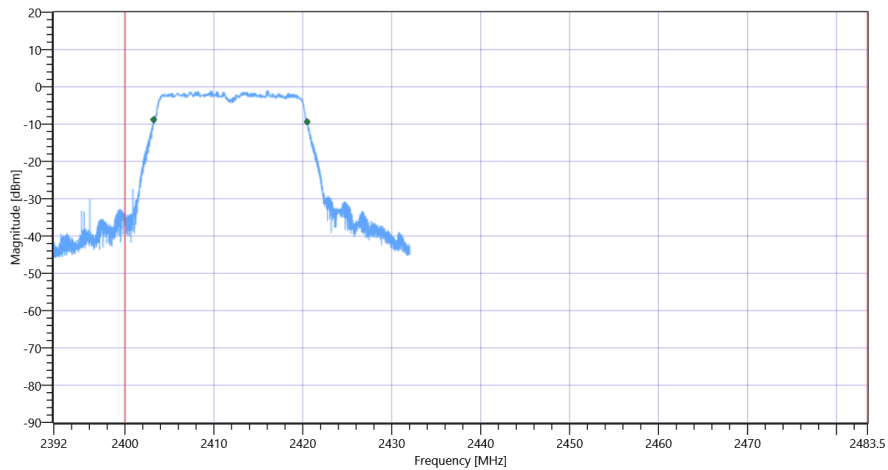

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	19720	kHz	INFO
T1 20dB	2400.000000	---	2402.0200	MHz	PASS
T2 20dB	---	2483.500000	2421.7400	MHz	PASS

Plot: Bandwidth only

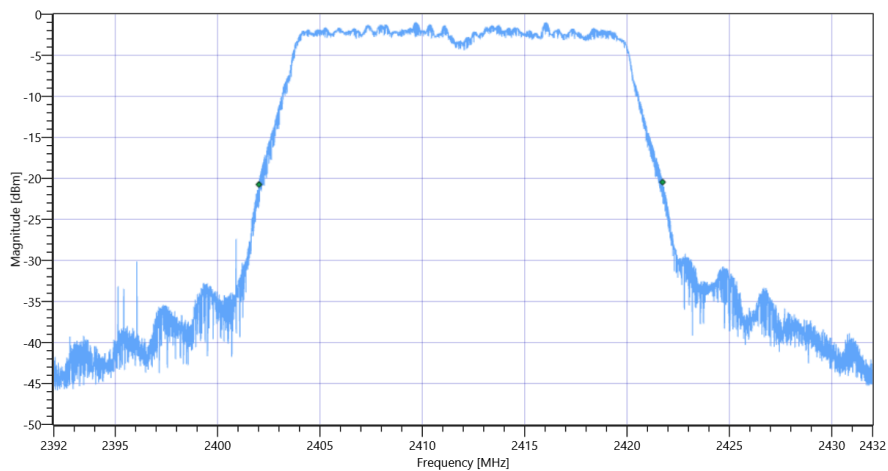

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode 20dB

Plot: Bandwidth within Band

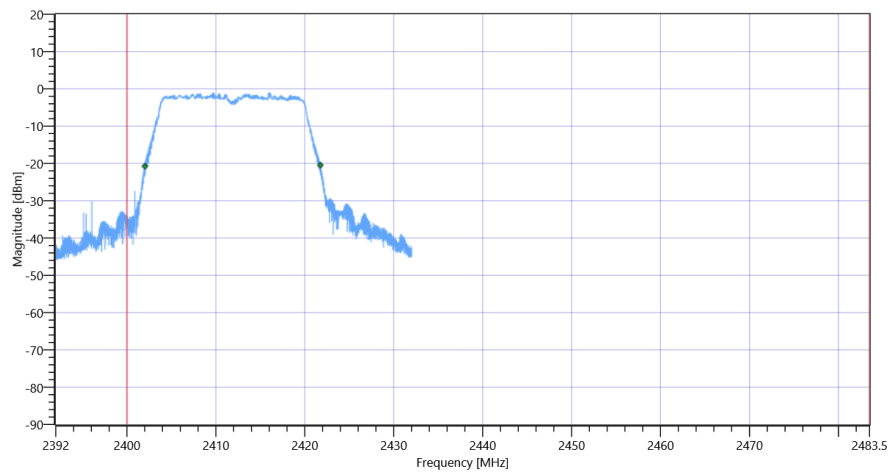

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 g mode

General verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

Test References

TC Start	05.07.2022 08:20:02
Ambit Temp [°C] Humidity [rel%]	26.6 37
System Version	3.2.0.2
Test Specification	FCC 15.247, ISED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2462 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.84	dBm	INFO
Ref. Frequency	---	---	2460.500	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.84 11.19 15
Start [MHz] Stop [MHz]	2442.000 2482.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	13566.643	kHz	INFO
T1 99%	2400.000000	---	2455.1807	MHz	PASS
T2 99%	---	2483.500000	2468.7473	MHz	PASS

Plot: Bandwidth only

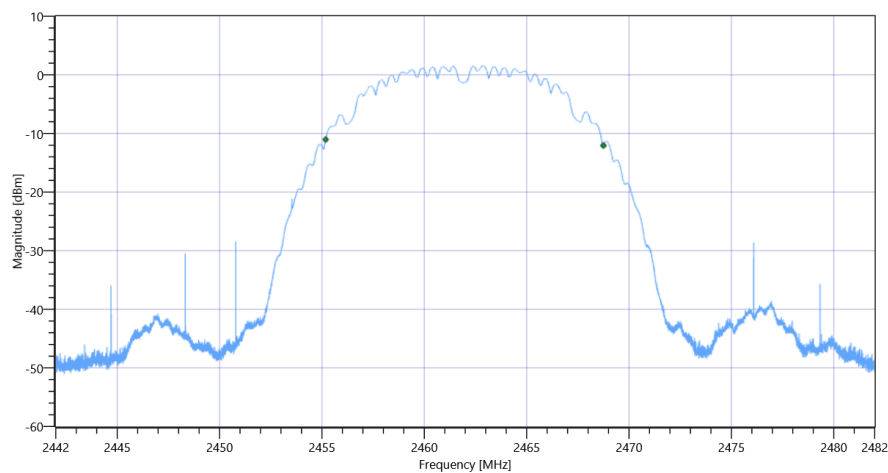

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 99PCT


Plot: Bandwidth within Band

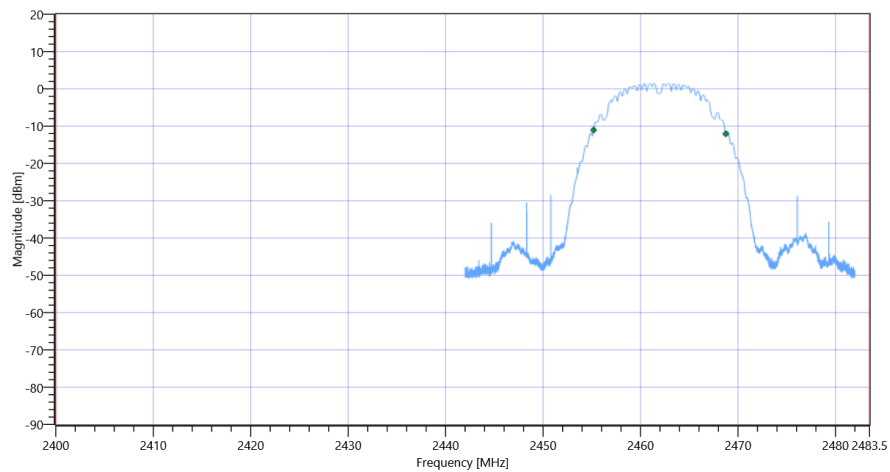

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15816	kHz	INFO
T1 20dB	2400.000000	---	2454.1200	MHz	PASS
T2 20dB	---	2483.500000	2469.9360	MHz	PASS

Plot: Bandwidth only

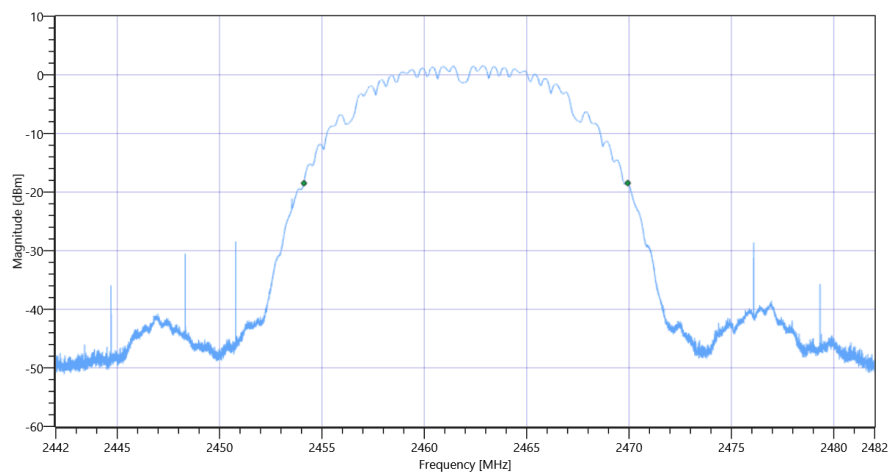

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 20dB

Plot: Bandwidth within Band

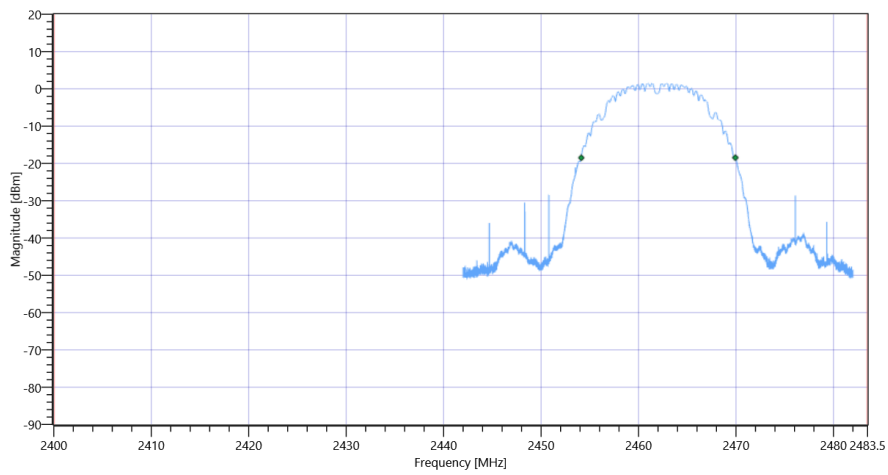

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

Test References

TC Start	05.07.2022 08:07:27
Ambit Temp [°C] Humidity [rel%]	26.3 38
System Version	3.2.0.2
Test Specification	FCC 15.247, ISSED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2437 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.46	dBm	INFO
Ref. Frequency	---	---	2438.300	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.46 11.15 15
Start [MHz] Stop [MHz]	2417.000 2457.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	13486.651	kHz	INFO
T1 99%	2400.000000	---	2430.2207	MHz	PASS
T2 99%	---	2483.500000	2443.7073	MHz	PASS

Plot: Bandwidth only

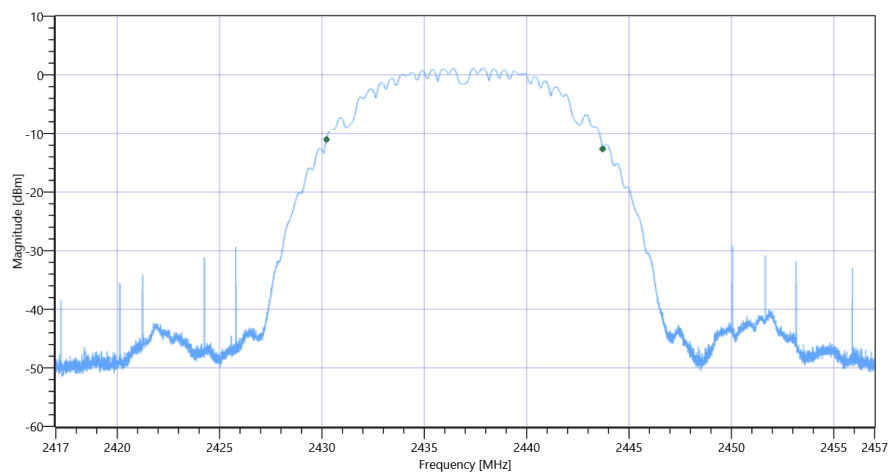

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 99PCT


Plot: Bandwidth within Band

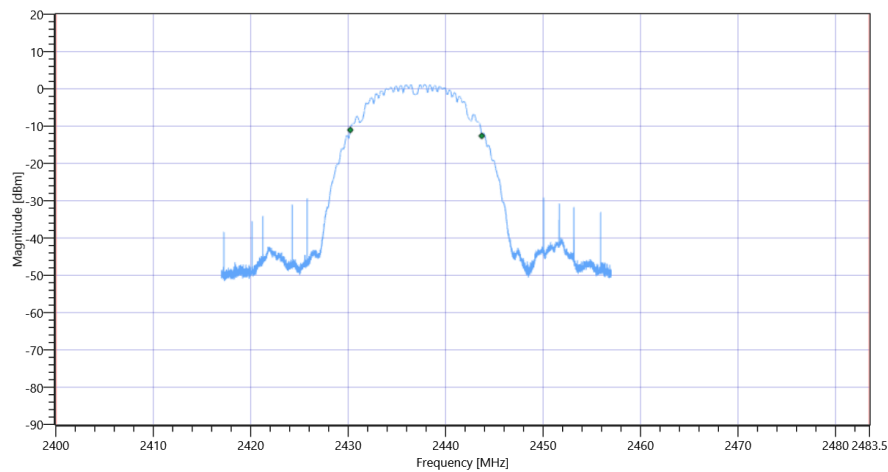


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15592	kHz	INFO
T1 20dB	2400.000000	---	2429.1400	MHz	PASS
T2 20dB	---	2483.500000	2444.7320	MHz	PASS

Plot: Bandwidth only

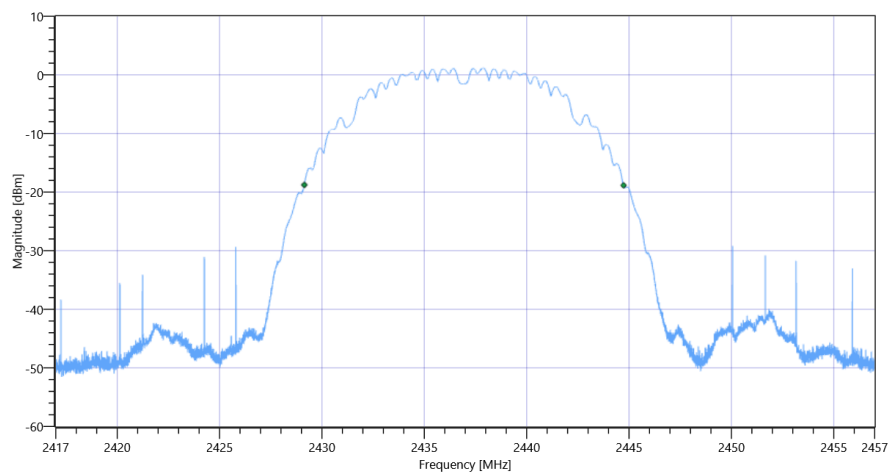

Plot: Bandwidth within Band

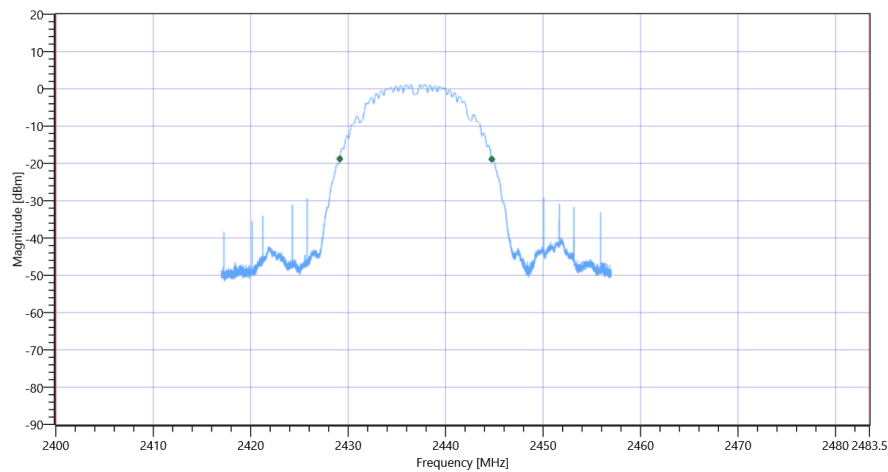

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

Test References

TC Start	05.07.2022 07:53:31
Ambit Temp [°C] Humidity [rel%]	25.7 39
System Version	3.2.0.2
Test Specification	FCC 15.247, ISSED RSS247 -
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	4.70	dBm	INFO
Ref. Frequency	---	---	2410.500	MHz	INFO


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.70 11.11 15
Start [MHz] Stop [MHz]	2392.000 2432.000
RBW [MHz] VBW [MHz]	0.500000 2.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	13514.649	kHz	INFO
T1 99%	2400.000000	---	2405.1327	MHz	PASS
T2 99%	---	2483.500000	2418.6473	MHz	PASS

Plot: Bandwidth only

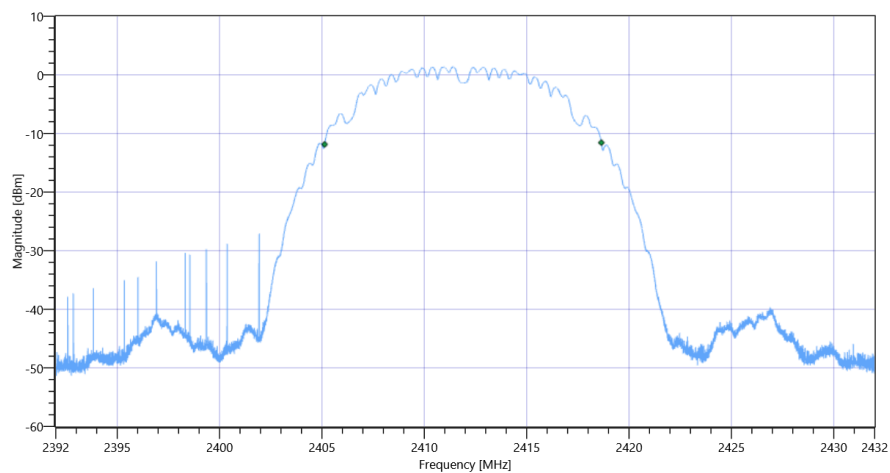

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 99PCT


Plot: Bandwidth within Band

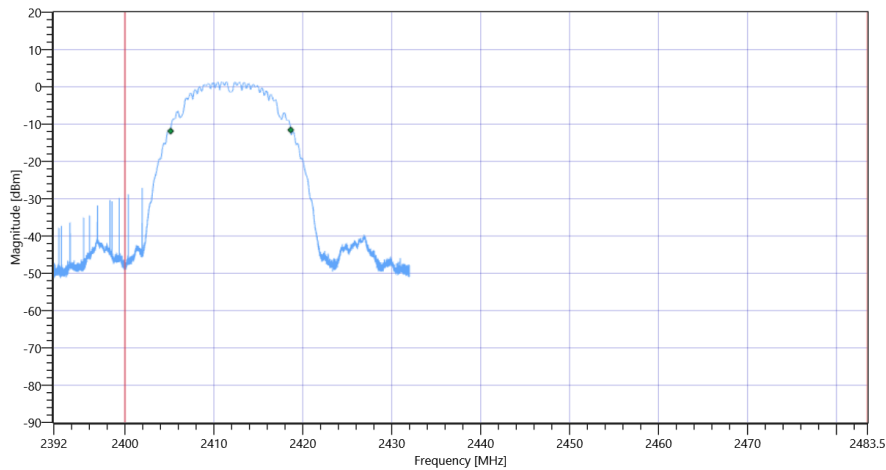

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode


RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	15608	kHz	INFO
T1 20dB	2400.000000	---	2404.0960	MHz	PASS
T2 20dB	---	2483.500000	2419.7040	MHz	PASS

Plot: Bandwidth only

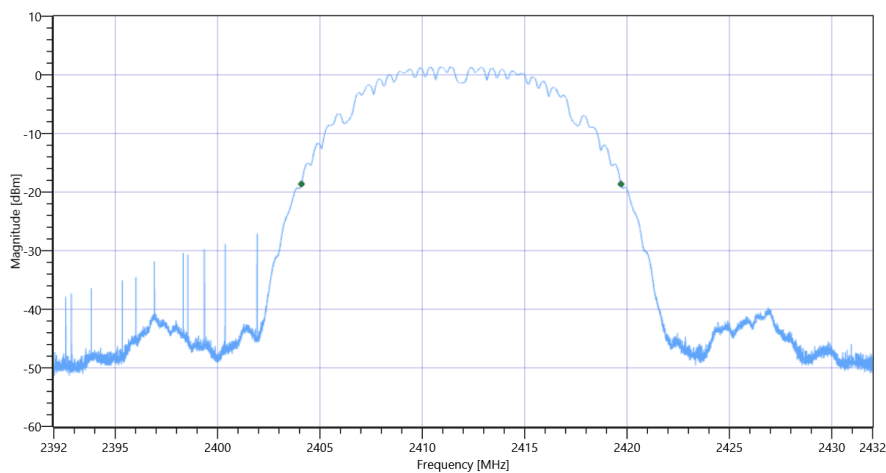

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode 20dB

Plot: Bandwidth within Band

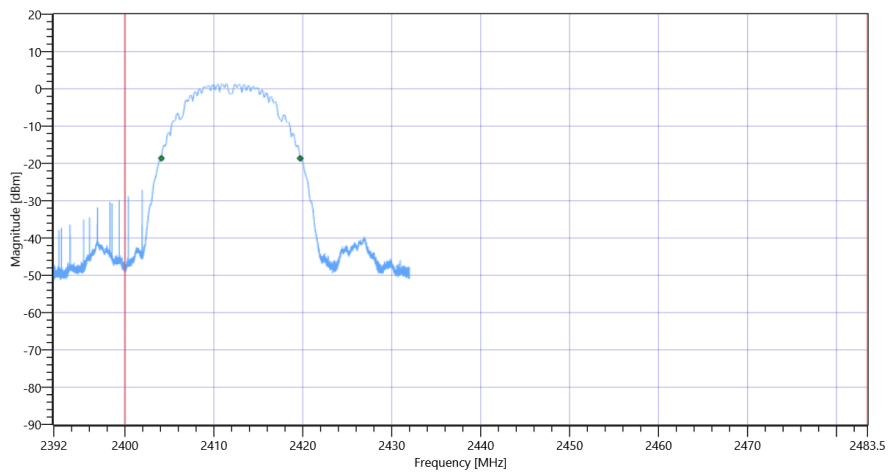

FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ WLAN2G4 b mode

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 11:10:25
Ambit Temp [°C] Humidity [rel%]	28.4 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2452 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	9.56	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 10:56:29
Ambit Temp [°C] Humidity [rel%]	28.3 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2437 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	10.47	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 10:41:45
Ambit Temp [°C] Humidity [rel%]	28.1 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT40 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2422 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	10.55	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 10:26:46
Ambit Temp [°C] Humidity [rel%]	28.0 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2462 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	14.15	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 10:06:11
Ambit Temp [°C] Humidity [rel%]	27.8 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2437 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	13.46	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 09:43:24
Ambit Temp [°C] Humidity [rel%]	27.5 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 n-HT20 mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2412 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	13.59	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 09:30:05
Ambit Temp [°C] Humidity [rel%]	27.5 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2462 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	15.16	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 09:16:46
Ambit Temp [°C] Humidity [rel%]	27.4 35
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2437 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	14.22	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 08:55:08
Ambit Temp [°C] Humidity [rel%]	27.2 36
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2412 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	14.54	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode

Test References	
TC Start	05.07.2022 08:29:10
Ambit Temp [°C] Humidity [rel%]	26.8 37
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2462 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	13.14	dBm	PASS

General verdict

PASS

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode

Test References	
TC Start	05.07.2022 08:16:33
Ambit Temp [°C] Humidity [rel%]	26.4 38
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2437 MHz

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.23	dBm	PASS
General verdict			PASS		

FCC 15.247 # Maximum peak conducted output power PM DTS ~ WLAN2G4 b mode

Test References	
TC Start	05.07.2022 08:02:37
Ambit Temp [°C] Humidity [rel%]	26.0 38
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.3 PKPM1 Peak-reading Power Meter Method
TC Version	0.0.1
My Description	FCC 15.247 Max Peak Output Power Powermeter Conducted DTS - WLAN2G4 b mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 b mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - PowerMeter

Test Equipment	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	
Power sensor,Keysight Technologies,U2042XA,MY58020014,A.02.06	

Test at TX 2412 MHz

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Found Peak cond.	---	---	12.99	dBm	PASS

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 11:00:26
Ambit Temp [°C] Humidity [rel%]	28.3 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2452 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.72	dBm	INFO
Ref. Frequency	---	---	2447.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.28 11.18 10
Start [MHz] Stop [MHz]	2422.000 2482.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-26.53	dBm/3KHz	PASS

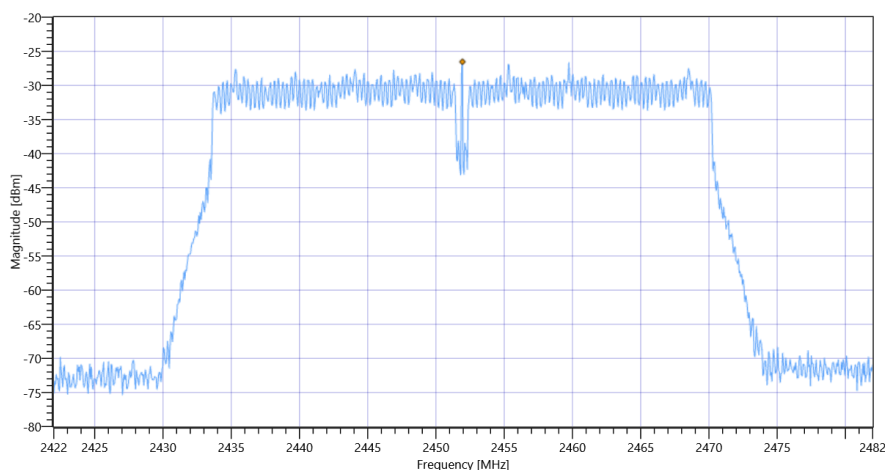

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 10:46:31
Ambit Temp [°C] Humidity [rel%]	28.3 32
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.01	dBm	INFO
Ref. Frequency	---	---	2442.190	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.99 11.15 10
Start [MHz] Stop [MHz]	2407.000 2467.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-25.41	dBm/3KHz	PASS

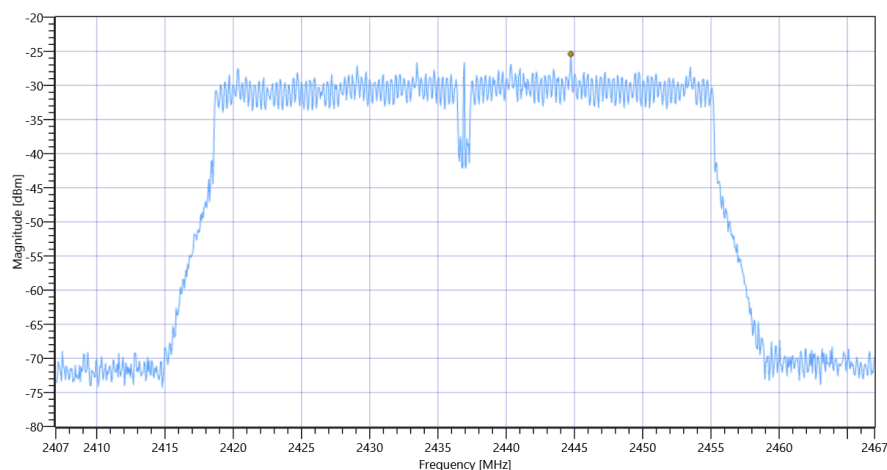

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode

Test References	
TC Start	05.07.2022 10:31:48
Ambit Temp [°C] Humidity [rel%]	28.0 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 nHT40_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT40 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2422 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	-3.03	dBm	INFO
Ref. Frequency	---	---	2412.410	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.97 11.13 10
Start [MHz] Stop [MHz]	2392.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-25.21	dBm/3KHz	PASS

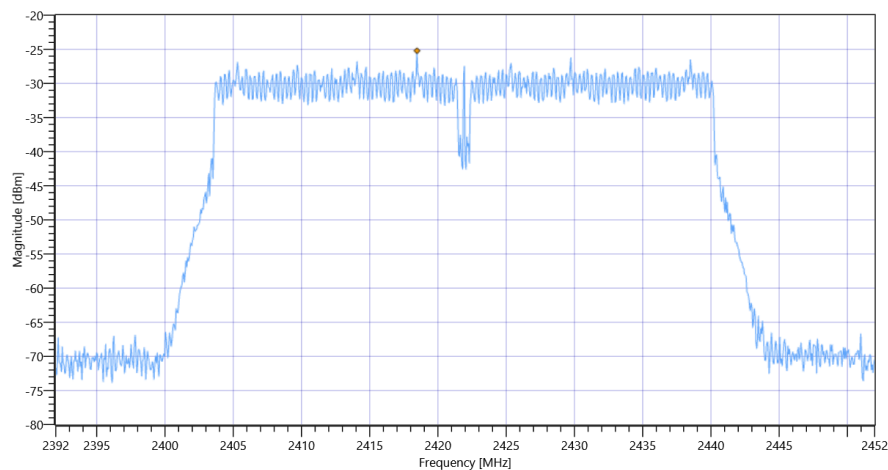

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT40 mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 10:16:52
Ambit Temp [°C] Humidity [rel%]	27.9 33
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2462 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.77	dBm	INFO
Ref. Frequency	---	---	2464.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.77 11.19 15
Start [MHz] Stop [MHz]	2447.000 2477.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-21.69	dBm/3KHz	PASS

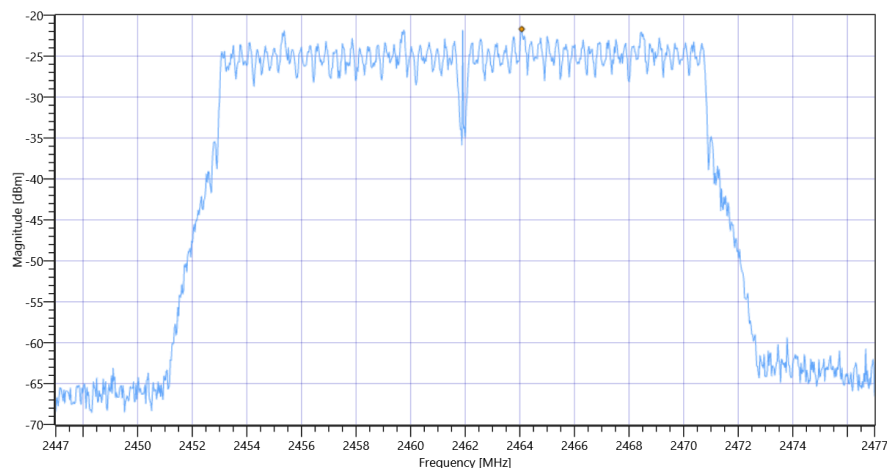

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode

Test References	
TC Start	05.07.2022 09:56:18
Ambit Temp [°C] Humidity [rel%]	27.7 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	

Test at TX 2437 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	1.97	dBm	INFO
Ref. Frequency	---	---	2441.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.97 11.15 15
Start [MHz] Stop [MHz]	2422.000 2452.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-20.07	dBm/3KHz	PASS

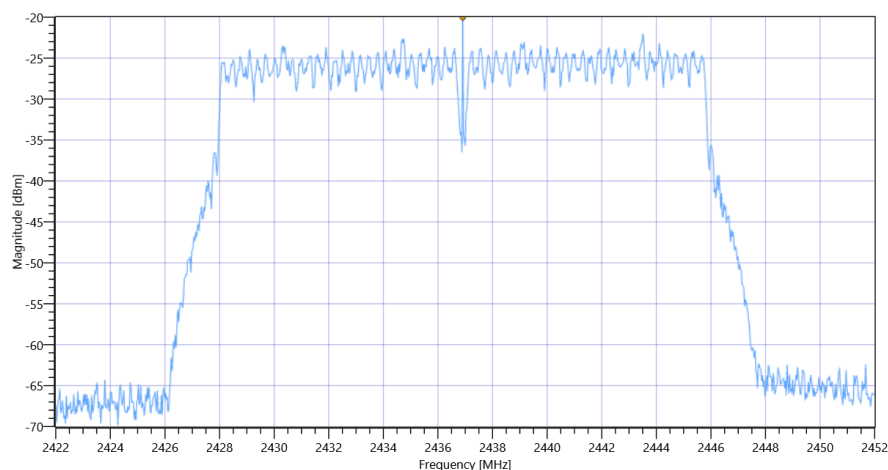

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode

Test References

TC Start	05.07.2022 09:33:29
Ambit Temp [°C] Humidity [rel%]	27.6 34
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 nHT20_mode
Add. Information	

EUT Common Settings WLAN2G4

Number of Antenna Ports	1
User Interaction	No

Test Parameter

Technology to test	WLAN2G4 n-HT20 mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2412 MHz

RESULT: Reference Power cond.


Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Ref. Power 1MHz/1MHz cond.	---	---	2.36	dBm	INFO
Ref. Frequency	---	---	2414.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.36 11.11 15
Start [MHz] Stop [MHz]	2397.000 2427.000
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-21.74	dBm/3KHz	PASS

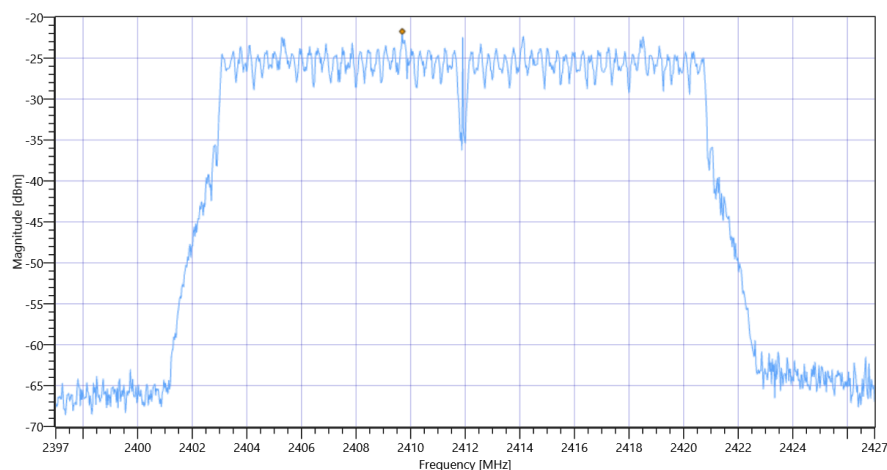

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 n-HT20 mode

General verdict

PASS

FCC 15.247 # Peak power spectral density DTS ~ WLAN2G4 g mode

Test References	
TC Start	05.07.2022 09:20:11
Ambit Temp [°C] Humidity [rel%]	27.4 35
System Version	3.2.0.2
Test Specification	FCC 15.247 -
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - WLAN2G4 g mode
Add. Information	

EUT Common Settings WLAN2G4	
Number of Antenna Ports	1
User Interaction	No

Test Parameter	
Technology to test	WLAN2G4 g mode
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.5
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment	
Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60	
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI	