

Page: 1 of 79

# Hearing Aid Compatibility (HAC) **TEST REPORT**

### <For RF-Emission measurement>

Applicant Name	INGENICO	
Address of Applicant	1 rue Claude Chappe BP346. 07503 Guilherand-Grange: France	
EUT Name	POS terminal	
Model Number	iPA280	
Date of receive	2009.03.27	
Date of Test(s)	2009.10.23	
Date of Issue	2009.11.17	

Standards:

ANSI C63.19-2007

FCC RULE PART(S): 47 CFR PART 20.19(B)

**HAC CATEGORY:** M4 (M Category)

In the configuration tested, the EUT complied with the standards specified above. Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronics & Communication Laboratory or testing done by SGS Taiwan Electronics & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronics & Communication Laboratory in writing.

Vicky Wrang			(Lobert Change		
Tested by :			Approved by:		0
Ricky Huang			Robert Chang		
Asst Supervisor	Date:	2009/11/17	Tech Manager	Date:	2009/11/17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document-instance.htm">www.sgs.com/terms\_e-document-instance.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for me exercises all their cipits and oplications under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 2 of 79

## **Table of Contents**

1. Introduction	3
<ol> <li>Introduction</li></ol>	4
3. Details of Applicant	4
4. Description of EUT	4
5. Test Environment	<u>5</u>
6. System Specifications of DASY4	5
7. Measurement Procedure	
8. System Verification	9
9. Probe Modulation Factor	10
10. Test Standards and Limits	13
11. Instruments List	
12. Summary of Results	15
13. Measurement Data	15
14. SYSTEM Verification	16
15. DAE & Probe Calibration certificate	40
16. Uncertainty Analysis	68
17. System Validation from Original equipment supplier	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Page: 3 of 79

### 1. Introduction

The purpose of the Hearing Aid Compatibility extension is to enable measurements of the near electric and magnetic fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2007

FCC has granted a request for waiver of the HAC rules in section 20.19 for dual band GSM handsets. The waiver has specific conditions, as stated in the order (FCC 05-166) and expires 1 August 2006.

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

a) Radio frequency (RF) measurements of the near-field electric and magnetic fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing

Hence, the following are measurements made for the WD:

- a) RF E-Field emissions
- b) RF H-Field emissions

The measurement plane is parallel to, and 1.5cm in front of, the reference plane.

Applications for certification of equipment operation under part 20, that a manufacturer is seeking to certify as hearing aid compatible, as set forth in §20.19 of that part, shall include a statement indication compliance with the test requirements of §20.19 and indicating the appropriate U-rating for the equipment. The manufacturer of the equipment shall be responsible for maintaining the test results.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/authentication">www.sgs.com/terms e-document.html</a>. Alternation of liability is described as an original within the immission of liability is the treated as an original within the immission of liability is the treated as an original to a transaction of the company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer crising all their pripates and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.

No.134. Wu Kung Road. Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279



Page: 4 of 79

# 2. Testing Laboratory

Company Name	SGS Taiwan Ltd. Electronics & Communication Laboratory	
Company address	134, Wu Kung Road, Wuku Industrial Zone Taipei,	
	Taiwan, R.O.C.	
Telephone	+886-2-2299-3279	
Fax	+886-2-2298-0488	
Website	http://www.tw.sgs.com/	

# 3. Details of Applicant

Applicant Name	INGENICO
Applicant Address	1 rue Claude Chappe BP346. 07503 Guilherand-Granges – France
Contact Person	Marc Delorme
TEL	+33475816887
Fax	+33475810287
E-mail	marc.delorme@ingenico.com

# 4. Description of EUT

EUT Name	POS terminal	
FCC ID	XKBIPA280	
Model Name	iPA280	
Brand Name	ingenico	
Freq. of Operation	GSM /GPRS/EDGE/802.11b+g	
TAC Code	354060011503830	
Definition	Production unit	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 5 of 79

Channel Number	GSM 850	GSM1900
(ARFCN)	128- 251	512- 810
Maximum Output	GSM 850	GSM1900
Power Setting (dBm)	32.8dbm	28.9dbm

### 5. Test Environment

Ambient Temperature	22.2° C
Relative Humidity	<60 %

# 6. System Specifications of DASY4

6.1 Measurement system Diagram for SPEAG Robotic

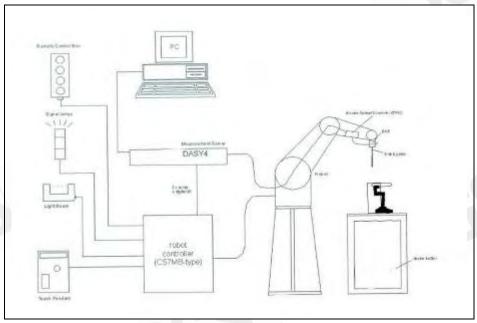


Fig 1. The SPEAG Robotic Diagram

The DASY4 system for performing compliance tests consists of the following items:

· A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> endocument. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer/sign all their rights and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 6 of 79

(DAE).

- E and H Field probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- · DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch phantom.
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

### 6.2 E and H Field Probe

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material	
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )	14 15
Frequency	100 MHz to $>$ 6 GHz (extended to 20 MHz for MRI), Linearity: $\pm$ 0.2 dB (100 MHz to 3 GHz)	ER3DV6 E-Field Probe
Directivity	± 0.2 dB in air (rotation around probe axis)  ± 0.4 dB in air (rotation normal to probe axis)	
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.	.5 mm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms\_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_www.s parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 7 of 79

Application	General near-field measurements up to 6 GHz
	Field component measurements
	Fast automatic scanning in phantoms

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)		
Frequency	200 MHz to 3 GHz (absolute accuracy ± 6.0%, k=2); Output linearized  H3DV6 H-Field Probe		
Directivity	± 0.2 dB (spherical isotropy error)		
Dynamic Range	10 mA/m to 2 A/m at 1 GHz		
E-Field Interference	< 10% at 3 GHz (for plane wave)		
Dimensions	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm		
Application	General magnetic near-field measurements up to 3 GHz (in air or liquids) Field component measurements Surface current measurements Low interaction with the measured field		

### 6.3 Test Arch

0.0 1031711011		
	Enables easy and well defined positioning of the phone and validation dipoles as well as	
	simple teaching of the robot.	
	length: 370 mm width: 370 mm	
	height: 370 mm	
	3	Test Arch

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is obe treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document\_issues\_established">www.sgs.com/terms\_end\_conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms\_end\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms\_end\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms\_end\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms\_end\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms\_end\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a>) and Terms and Conditions for Electronic document is sues established therein. Even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document document document is a transaction form exercising all their rights and obli

www.tw.sgs.com



Page: 8 of 79

### 6.4 Phone Holder

Description	Supports accurate and reliable positioning of any phone Effect on near field <+/- 0.5 dB	
		Phone Holder

### 7. Measurement Procedure

The following illustrate a typical RF emissions test scan over a wireless communications device:

- 1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
- 2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 3. the WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
- 4. the center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
- 5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
- 6. The measurement system measured the field strength at the reference location.
- 7. Measurements at 2mm increments in the  $5 \times 5$  cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

written permission of the Company. 原非芳有說明,瓜菜店給果僅到剛紀人樣而具具,同時几樣而僅深值以不。今來官六處學公司青旭市刊,不可可以復聚。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/authentication">www.sgs.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate the transaction document from a variable to the property of the transaction document. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 9 of 79


8. The system performed a drift evaluation by measuring the field at the reference location.

9. Steps 1-8 were done for both the E and H-Field measurements.

# 8. System Verification

A dipole antenna meeting the requirements given in C63.19 was placed in the position normally occupied by the WD.

The length of the dipole was scanned with both E-field and H-field probes and the maximum values for each were recorded.

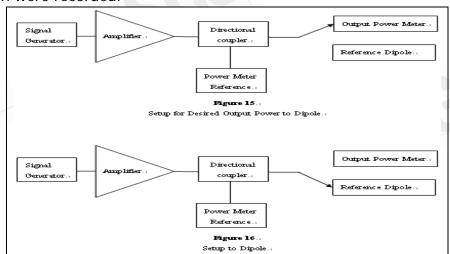

For E-Field Scan

Mode	Frequency	Input	Measured	Target	Measured
Mode	(MHz)	Power(dBm)	Value(V/m)	Value(V/m)	Date
CW	835	20	169.4	168.7	2009/10/23
Mode	Frequency (MHz)	Input Power(dBm)	Measured Value(V/m)	Target Value(V/m)	Measured Date
CW	1880	20	134.9	138.3	2009/10/23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

whiten permission of the Company. 原并为有规则,证料合格界量到期达人体的具具,同时正体的重体型分类。平铁合木腔平公司青国市刊,不可即对模裂。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/authentication">www.sgs.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate the transaction document in the property of t parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 10 of 79

#### For H-Field Scan

Mode	Frequency	Input	Measured	Target	Measured
Mode	rrequeries	Power	Value(A/m)	Value(A/m)	Date
CW	835	20	0.446	0.457	2009/10/23
Mode	Fraguanay	Input	Measured	Target	Measured
Mode	Frequency	Power	Value(A/m)	Value(A/m)	Date
CW	1880	20	0.470	0.463	2009/10/23

### 9. Probe Modulation Factor

The measurement setup for determination of the PMF is given in DASY4 manual section 28.2. The following points describe the installation, the measurement procedure and the evaluation.

- 1. Install the field probe in the DASY4 window setup.
- 2. Mount a validation dipole for the appropriate frequency band under the Test Arch. Move the probe manually to a point of high field strength for the specific field type. The probe may be very close to the dipole and might even touch it. During the fine adjustment of the probe with a signal applied to the dipole, read the x, y and z channel amplitudes in a multimeter job. They should all show a similar amplitude.
- 3. For comparing the peak amplitudes of modulated and CW signal, the same spectrum analyzer settings are required. The signal path (and setup geometry) between spectrum analyzer and probe must not be changed during the evaluation of the PMF! Only signal type and amplitudes as well as DASY4 settings may be varied.

Spectrum analyzer settings:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

written permission of the Company. 除非另有說明,此報告結果僅對測記之標品負責,同時此樣品僅保單切大。本報告未經本公司書面計可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="www.sgs.com/authentication">www.sgs.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 11 of 79

- Center Frequency: nominal center frequency of channel
- · Span: zero
- Resolution bandwidth >= emission bandwidth
- Video bandwidth = 20dB
- Detection: RMS detection
- Trigger: Video or IF trigger, adjusted to give a stable display of the transmission
- Sweep rate: Set to show a complete tranmission cycle
- Line max hold may be used temporarily to ease the peak reading.
- 4. Define a DASY4 document and set the procedure properties (frequency as above, modulation frequency and crest factor for the modulated signal) according to the measured signal. Define a multimeter job (continuous mode) for the field reading. The probe shall not move. A predefined document is available.
- 5. Define a DASY4 document with a procedure for the evaluation of the CW signal (frequency, modulation frequency = 0, crest factor = 1) with a multimeter job.

The HAC measurement procedure is as follows:

- 6. Prepare the evaluation sheet for the installed field probe, frequency and modulation type.
- 7. Modulated signal measurement: Connect the modulated signal using the appropriate frequency via the cable to the setup. Do not move the setup between the following measurements.
- 8. Run the multimeter job in the procedure with the corresponding modulation setting in continuous mode.
- 9. Adjust the signal amplitude to achieve the the desired field level display in the multimeter. (A number of levels over the full dynamic range of the probe in the desired range shall be set, including the values read during the WD scans.)
- 10. Read the total field for the modulated signal.
- 11. Read the peak envelope signal on the spectrum analyzer.
- 12. Repeat these readings for other amplitude settings.
- 13. Switch the signal source off and verify that the ambient and instrumentation noise level is at least 10dB lower (a factor of 3 in field).
- 14. CW measurement: Change the signal to CW at the same center frequency, without touching or moving dipole or probe in the setup.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> endocument. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer/sign all their rights and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 12 of 79

- 15. Adjust the CW signal amplitude to a similar range of peak levels on the spectrum analyzer.
- 16. Run the multimeter in the CW procedure in continuous mode.
- 17. Read the multimeter total field display.
- 18. Read the signal on the spectrum analyzer.
- 19. Repeat these readings for other amplitude settings.
- 20. Select the correct type of predefined Excel calculation sheet and insert the readings into the appropriate measurement columns. Conversion from linear DASY readings to logarithmic will be automatically made. The diagrams contain fitting curves for the logarithmic quantities. CW and E-field values will be fitted by linear trend lines, H-field values by quadratic.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> endocument. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer/sign all their rights and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 13 of 79

## 10. Test Standards and Limits

The measurements were performed to ensure compliance to the ANSI C63.19-2007 standard,

J ( G. ) ( G. )			
Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

Taiwan Ltd.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 14 of 79

# 11. Instruments List

				I
Manufacturer	Device	Туре	Serial number	Date of last calibration
Schmid & Partner	E-Field and H-Field	ER3DV6	2306	Apr.27.2009
Engineering AG	Probe	H3DV6	6142	Apr.27.2009
Schmid & Partner Engineering AG	835&1880 MHz System Validation Dipole In Air	CD835V3 CD1880V3	1052 1044	Apr.22.2009 Apr.22.2009
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE4	547	Jan.20.2009
Schmid & Partner Engineering AG	Software	DASY 4 V4.7 Build 80	N/A	Calibration isn't necessary
Agilent	Dielectric Probe Kit	85070D	US01440168	Calibration isn't necessary
Agilent	Dual-directional coupler	778D	50313	Aug.26.2009
Agilent	RF Signal Generator	8648D	3847M00432	May.25.2009
Agilent	Power Sensor	U2001B	MY48100169	Apr.09.2009
R&S	Radio Communication Test	CMU200	109326	Mar.17.2009
Schmid & Partner Engineering AG	Test Arch SD HAC	P01	1047	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 15 of 79

# 12. Summary of Results

### E-Field

E-Field Emission	Channel	Modulation Factor	Conducte d Power at BS (dBm)	Measured Drift(%)	Time Avg. Field (V/m)	RESULT	Excl Blocks per 4.3.1.2.2
	128	2.84	32.8	-0.0008	112.1	M4	689
GSM850	190	2.84	32.7	0.045	101.4	M4	689
	251	2.84	32.7	-0.016	90.1	M4	689
E-Field Emission	Channel	Modulation Factor	Conducte d Power at BS (dBm)	Measured Drift(%)	Time Avg. Field (V/m)	RESULT	Excl Blocks per 4.3.1.2.2
	512	2.89	28.9	-0.047	42.3	M4	689
GSM1900	661	2.89	28.6	-0.009	39.5	M4	689
161	810	2.89	28.4	0.041	37.4	M4	689

### H-Filed

H-Field Emission	Channel	Modulation Factor	Conducte d Power at BS (dBm)	Measured Drift(%)	Time Avg. Field (A/m)	RESULT	Excl Blocks per 4.3.1.2.2
	128	2.99	32.8	-0.041	0.206	M4	147
GSM850	190	2.99	32.7	0.041	0.187	M4	147
C	251	2.99	32.7	-0.028	0.173	M4	147
H-Field Emission	Channel	Modulation Factor	Conducte d Power at BS (dBm)	Measured Drift(%)	Time Avg. Field (A/m)	RESULT	Excl Blocks per 4.3.1.2.2
	512	2.69	28.9	-0.026	0.078	M4	789
GSM900	661	2.69	28.6	-0.0064	0.074	M4	789
	810	2.69	28.4	0.043	0.072	M4	478

t (886-2) 2299-3279



Page: 16 of 79

### 13. Measurement Data

Date/Time: 2009/10/23 01:26:16

# HAC\_E\_GSM 850\_CH128

### DUT: iPA280;

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 112.1 V/m

Probe Modulation Factor = 2.84

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 44.0 V/m; Power Drift = -0.008 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak E-field in V/m

	Grid 2	Grid 3
97.3 M4	109.7 M4	109.3 M4
		Grid 6
100.8 M4	112.1 M4	111.4 M4
Grid 7	Grid 8	Grid 9


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms\_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_www.s parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 17 of 79

# 100.5 M4 <mark>111.0 M4 110.8 M4</mark>

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
AC	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
167	-5	266.1 - 473.2	0.8 - 1.43
	1		0 ( 10=
M3	0	199.5 - 354.8	0.6 - 1.07
M3	-5	199.5 - 354.8 149.6 - 266.1	0.6 - 1.07 0.45 - 0.8
M3 M4	1		

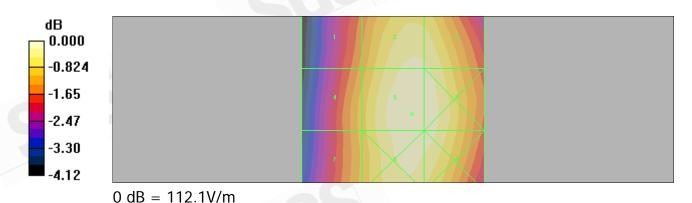

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 18 of 79

Date/Time: 2009/10/23 02:39:04

# HAC\_E\_GSM 850\_CH190

### DUT: iPA280;

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

### **DASY4** Configuration:

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 101.4 V/m

Probe Modulation Factor = 2.84

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 39.7 V/m; Power Drift = 0.045 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak E-field in V/m

Grid 1	Grid 2	Grid 3
85.5 M4	98.5 M4	98.4 M4
Grid 4	Grid 5	Grid 6
89.6 M4	101.4 M4	101.3 M4
Grid 7	Grid 8	Grid 9
89.8 M4	101.0 M4	100.3 M4


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 19 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

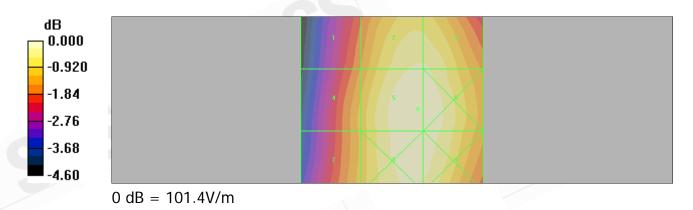

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Page: 20 of 79

Date/Time: 2009/10/23 03:09:12

# HAC\_E\_GSM 850\_CH251

### DUT: iPA280;

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

### **DASY4** Configuration:

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 90.1 V/m

Probe Modulation Factor = 2.84

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 35.8 V/m; Power Drift = -0.016 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak E-field in V/m

Grid 1	Grid 2	Grid 3
78.1 M4	87.8 M4	87.4 M4
Grid 4	Grid 5	Grid 6
81.4 M4	90.1 M4	89.7 M4
Grid 7	Grid 8	Grid 9
80 9 M4	89.6 M4	89 2 M4


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 21 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	< 0.45

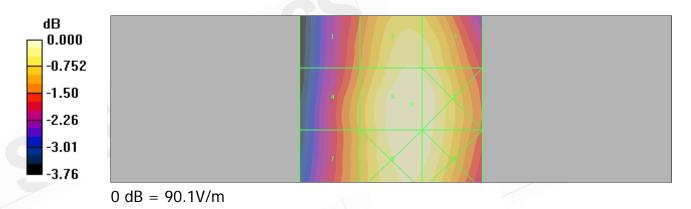

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 22 of 79

Date/Time: 2009/10/23 08:13:59

# HAC\_H\_GSM 850\_CH128

### DUT: iPA280;

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### **DASY4** Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - measurement discance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.206 A/m

Probe Modulation Factor = 2.99

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.059 A/m; Power Drift = -0.041 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.261 M4	0.205 M4	0.142 M4
Grid 4	Grid 5	Grid 6
0.246 M4	0.197 M4	0.139 M4
Grid 7	Grid 8	Grid 9
0.270 M4	0.206 M4	0.142 M4


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 23 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

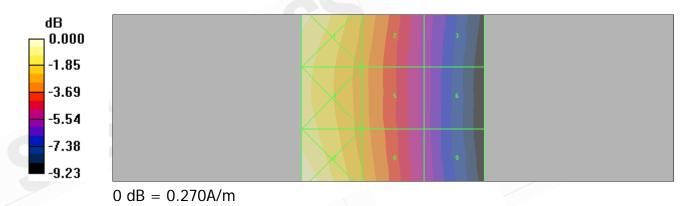

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 24 of 79

Date/Time: 2009/10/23 08:36:45

# HAC\_H\_GSM 850\_CH190

### DUT: iPA280;

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### **DASY4** Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - measurement discance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.187 A/m

Probe Modulation Factor = 2.99

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 0.052 A/m; Power Drift = 0.041 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.235 M4	0.187 M4	0.132 M4
Grid 4	Grid 5	Grid 6
0.216 M4	0.175 M4	0.125 M4
Grid 7	Grid 8	Grid 9
0.239 M4	0.183 M4	0.126 M4


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 25 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
		100 5 254.0	0.6 - 1.07
M3	0	199.5 - 354.8	0.0 - 1.07
M3	-5	149.6 - 266.1	
M3 M4			0.6 - 1.07 0.45 - 0.8 <0.6

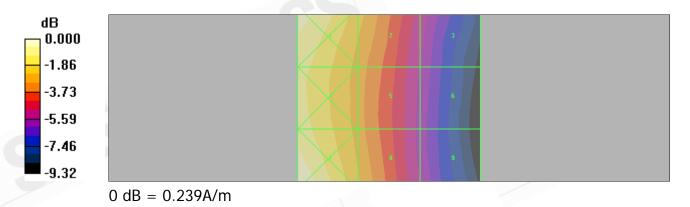

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Page: 26 of 79

Date/Time: 2009/10/23 08:59:56

# HAC\_H\_GSM 850\_CH251

### DUT: iPA280;

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### **DASY4** Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - measurement discance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.173 A/m

Probe Modulation Factor = 2.99

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.046 A/m; Power Drift = -0.028 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.220 M4	0.173 M4	0.121 M4
Grid 4	Grid 5	Grid 6
0.196 M4	0.159 M4	0.113 M4
Grid 7	Grid 8	Grid 9
0.214 M4	0.162 M4	0.108 M4


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 27 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

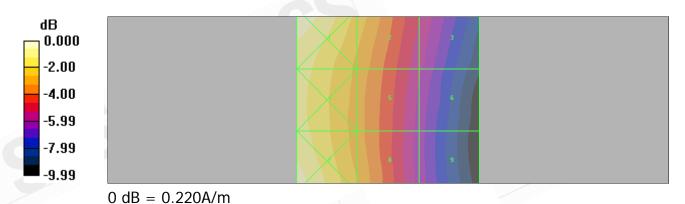

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279



Page: 28 of 79

Date/Time: 2009/10/23 04:58:11

# HAC\_E\_GSM 1900\_CH512

### DUT: iPA280;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

### **DASY4** Configuration:

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 42.3 V/m

Probe Modulation Factor = 2.89

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 20.9 V/m; Power Drift = -0.047 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak E-field in V/m

Grid 1	Grid 2	Grid 3
30.4 M4	37.3 M4	37.0 M4
Grid 4	Grid 5	Grid 6
36.2 M4	42.3 M4	42.0 M4
Grid 7	Grid 8	Grid 9
40.6 M4	45.4 M4	44.5 M4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


whiten permission of the Company. 原非为有规则,证料合格界量到期达人族的具具,同时正族的重张面对文。本教自大型中面,不可能的模裂。

This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgsonsite.com/authentication">www.sgsonsite.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 29 of 79

Emissions (A/m) >
0 / 1 07
0.6 - 1.07
0.45 - 0.8
0.34 - 0.6
0.25 - 0.45
0.19 - 0.34
0.14 - 0.25
<0.19
<0.14
missions (A/m) <
1.91 - 3.39
1.43 - 2.54
1.07 - 1.91
0.8 - 1.43
0.6 - 1.07
0.6 - 1.07 0.45 - 0.8 <0.6

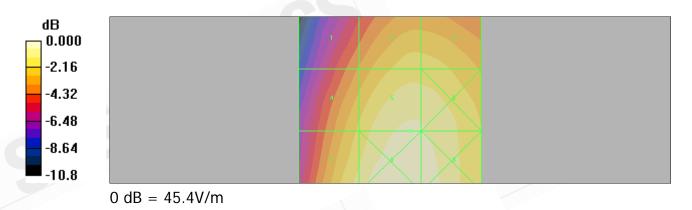

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 30 of 79

Date/Time: 2009/10/23 05:26:39

# HAC\_E\_GSM 1900\_CH661

### DUT: iPA280;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

### **DASY4** Configuration:

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 39.5 V/m

Probe Modulation Factor = 2.89

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 17.8 V/m; Power Drift = -0.009 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak E-field in V/m

Grid 1	Grid 2	Grid 3
25.4 M4	33.8 M4	33.9 M4
Grid 4	Grid 5	Grid 6
32.2 M4	39.5 M4	39.5 M4
Grid 7	Grid 8	Grid 9
34.5 M4	41.1 M4	40.6 M4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


whiten permission of the Company. 原非为有规则,证料合格界量到期达人族的具具,同时正族的重张面对文。本教自大型中面,不可能的模裂。

This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgsonsite.com/authentication">www.sgsonsite.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 31 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category		Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	_	/04 4400	
	0	631 - 1122	1.91 - 3.39
	-5	631 - 1122 473.2 - 841.4	1.91 - 3.39 1.43 - 2.54
M2	_		
M2	-5	473.2 - 841.4	1.43 - 2.54
M2 M3	-5 0	473.2 - 841.4 354.8 - 631	1.43 - 2.54 1.07 - 1.91
	-5 0 -5	473.2 - 841.4 354.8 - 631 266.1 - 473.2	1.43 - 2.54 1.07 - 1.91 0.8 - 1.43
	-5 0 -5	473.2 - 841.4 354.8 - 631 266.1 - 473.2 199.5 - 354.8	1.43 - 2.54 1.07 - 1.91 0.8 - 1.43 0.6 - 1.07

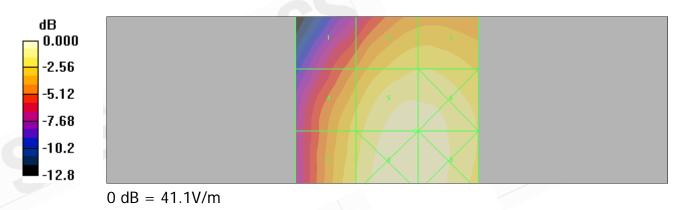

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 32 of 79

Date/Time: 2009/10/23 05:51:25

# HAC\_E\_GSM 1900\_CH810

### DUT: iPA280;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

### **DASY4** Configuration:

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER3DV6 - measurement distance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 37.4 V/m

Probe Modulation Factor = 2.89

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 13.6 V/m; Power Drift = 0.041 dB

Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak E-field in V/m

Grid 1	Grid 2	Grid 3
	33.6 M4	
Grid 4	Grid 5	Grid 6
29.5 M4	37.4 M4	37.4 M4
Grid 7	Grid 8	Grid 9
29.6 M4	37.3 M4	37.3 M4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


whiten permission of the Company. 原非为有规则,证料合格界量到期达人族的具具,同时正族的重张面对文。本教自大型中面,不可能的模裂。

This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgsonsite.com/authentication">www.sgsonsite.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 33 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

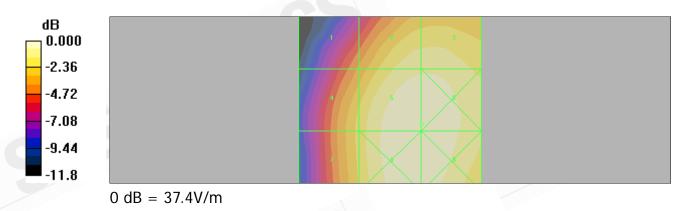

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 34 of 79

Date/Time: 2009/10/23 11:20:36

# HAC\_H\_GSM 1900\_CH512

### DUT: iPA280;

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### **DASY4** Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - measurement discance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.078 A/m

Probe Modulation Factor = 2.69

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.030 A/m; Power Drift = -0.026 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.063 M4	0.064 M4	0.060 M4
Grid 4	Grid 5	Grid 6
0.078 M4	0.078 M4	0.071 M4
Grid 7	Grid 8	Grid 9
0.108 M4	0.097 M4	0.079 M4


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

written permission of the Company. 除非另有說明,此報告結果僅對測記之標品負責,同時此樣品僅保單切大。本報告未經本公司書面計可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="www.sgs.com/authentication">www.sgs.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 35 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category		Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

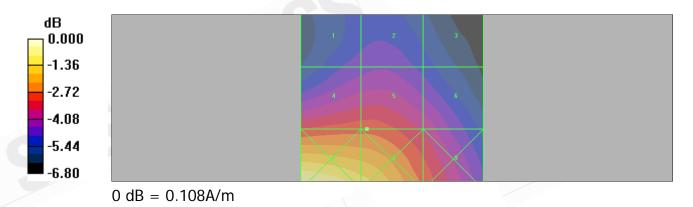

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 36 of 79

Date/Time: 2009/10/23 11:43:51

# HAC\_H\_GSM 1900\_CH661

### DUT: iPA280;

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### **DASY4** Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - measurement discance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.074 A/m

Probe Modulation Factor = 2.69

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.027 A/m; Power Drift = -0.064 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.066 M4	0.067 M4	0.064 M4
Grid 4	Grid 5	Grid 6
0.074 M4	0.072 M4	0.065 M4
	1	0.065 M4 Grid 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


whiten permission of the Company. 原非为有规则,证料合格界量到期达人族的具具,同时正族的重张面对文。本教自大型中面,不可能的模裂。

This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgsonsite.com/authentication">www.sgsonsite.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 37 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

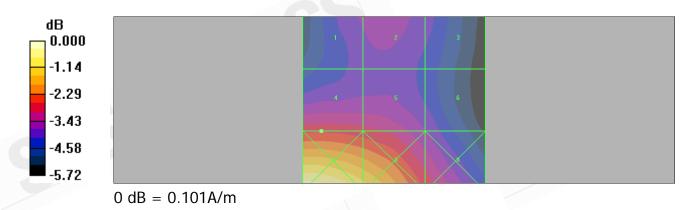

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 38 of 79

Date/Time: 2009/10/23 12:11:51

# HAC\_H\_GSM 1900\_CH810

### DUT: iPA280;

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### DASY4 Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 - measurement discance from the probe sensor center to the Device = 15mm/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.072 A/m

Probe Modulation Factor = 2.69

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 0.023 A/m; Power Drift = 0.043 dB Hearing Aid Near-Field Category: M4 (AWF -5 dB)

#### Peak H-field in A/m

	Grid 1	Grid 2	Grid 3
	0.072 M4	0.072 M4	0.064 M4
	Grid 4	Grid 5	Grid 6
	0.070 M4	0.065 M4	0.055 M4
1	Grid 7	Grid 8	Grid 9
	0.085 M4	0.079 M4	0.063 M4

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

whiten permission of the Company. 原非为有规则,证料合格界量到期达人族的具具,同时正族的重张面对文。本教自大型中面,不可能的模裂。


This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgsonsite.com/authentication">www.sgsonsite.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 39 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	< 0.45

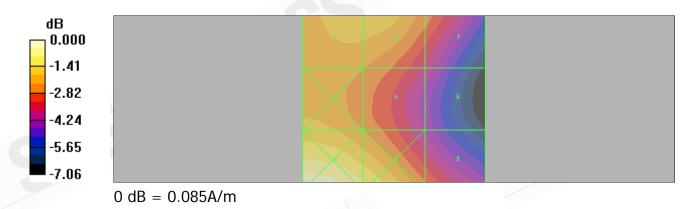

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 40 of 79

# 14. System Verification

Date/Time: 2009/10/23 01:23:01

# HAC\_E\_Dipole\_835MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - ER probe center 10mm above CD835 Dipole/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 169.4 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 150.3 V/m; Power Drift = -0.004 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

#### Peak E-field in V/m


Grid 1	Grid 2	Grid 3
168.1 M4	169.4 M4	167.3 M4
Grid 4	Grid 5	Grid 6
104.7 M4	105.5 M4	102.2 M4
Grid 7	Grid 8	Grid 9
266.0 M3	275.6 M3	253.9 M3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms\_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/authentication">www.sgs.com/terms\_e-document.html</a>. Alternation of liability is described as an original within the immost of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for me exercision all their priots and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 41 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
			< 0.45

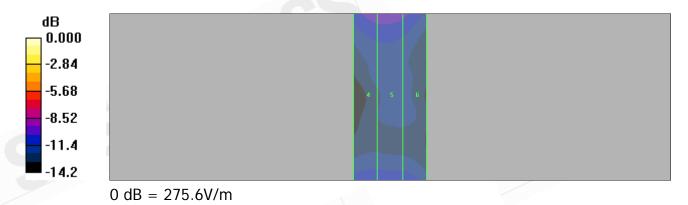

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document-instance-i parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 42 of 79

Date/Time: 2009/10/23 07:22:04

## HAC\_H\_Dipole\_835MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### **DASY4** Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

# H Scan - H3DV6 probe center 10mm above CD835 Dipole/Hearing Aid

Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.446 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 0.471 A/m; Power Drift = -0.005 dB Hearing Aid Near-Field Category: M4 (AWF 0 dB)

#### Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.390 M4	0.417 M4	0.393 M4
Grid 4	Grid 5	Grid 6
0.420 M4	0.446 M4	0.426 M4
Grid 7	Grid 8	Grid 9
0.353 M4	0.378 M4	0.367 M4


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

written permission of the Company. 除非另有說明,此報告結果僅對測記之標品負責,同時此樣品僅保單切大。本報告未經本公司書面計可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="www.sgs.com/authentication">www.sgs.com/authentication</a>. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 43 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category	AWF (dB)	Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

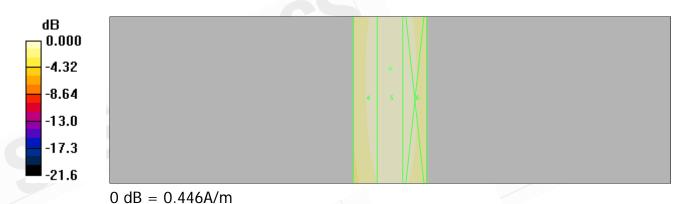

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 44 of 79

Date/Time: 2009/10/23 04:13:29

# HAC\_H\_Dipole\_1880MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: E Dipole Section

### **DASY4** Configuration:

Probe: ER3DV6 - SN2306; ConvF(1, 1, 1); Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

# E Scan - ER probe center 10mm above CD1880 Dipole/Hearing Aid

Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 134.9 V/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, 354.7 mm

Reference Value = 187.4 V/m; Power Drift = 0.013 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

#### Peak E-field in V/m


Grid 1	Grid 2	Grid 3
133.1 M2	134.9 M2	131.7 M2
Grid 4	Grid 5	Grid 6
98.5 M3	99.0 M3	94.6 M3
Grid 7	Grid 8	Grid 9
156.2 M2	163.9 M2	160.2 M2

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document-its-test-report/">www.sgs.com/terms\_e-document.htm</a>). Alter between the treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document-its-test-report/">www.sgs.com/terms\_e-document-its-test-report/</a> and Terms\_e-document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate report the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 45 of 79

Category	AWF (dB)	Limits for E-Field Emissions (V/m) > 960MHz	Limits for H-Field Emissions (A/m) > 960MHz
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.14 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.14
Category		Limits for E-Field Emissions (V/m) < 960MHz	Limits for H-Field Emissions (A/m) < 960 MHz
M1	0	631 - 1122	1.91 - 3.39
	-5	473.2 - 841.4	1.43 - 2.54
M2	0	354.8 - 631	1.07 - 1.91
	-5	266.1 - 473.2	0.8 - 1.43
M3	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M4	0	<199.5	<0.6
	-5	<149.6	<0.45

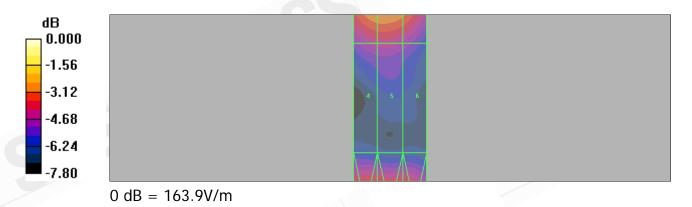

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 46 of 79

Date/Time: 2009/10/23 10:37:34

### DUT: HAC-Dipole 1880MHz;

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\varepsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Phantom section: H Dipole Section

### DASY4 Configuration:

Probe: H3DV6 - SN6142; ; Calibrated: 2009/4/27

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn547; Calibrated: 2009/1/20

Phantom: HAC Test Arch 4.6; Type: SD HAC P01 BA;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### H Scan - H3DV6 probe center 10mm above CD1880 Dipole/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.470 A/m

Probe Modulation Factor = 1.00

Device Reference Point: 0.000, 0.000, 354.7 mm Reference Value = 0.473 A/m; Power Drift = 0.004 dB

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

#### Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.383 M2	0.441 M2	0.441 M2
Grid 4	Grid 5	Grid 6
0.408 M2	0.470 M2	0.470 M2
Grid 7	Grid 8	Grid 9
0.357 M2	0.419 M2	0.421 M2


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms\_e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/authentication">www.sgs.com/terms\_e-document.html</a>. Alternation of liability is described as an original within the immost of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for me exercision all their priots and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 47 of 79

Emissions (A/m) >
0 / 1 07
0.6 - 1.07
0.45 - 0.8
0.34 - 0.6
0.25 - 0.45
0.19 - 0.34
0.14 - 0.25
<0.19
<0.14
missions (A/m) <
1.91 - 3.39
1.43 - 2.54
1.07 - 1.91
0.8 - 1.43
0.6 - 1.07
0.6 - 1.07 0.45 - 0.8 <0.6

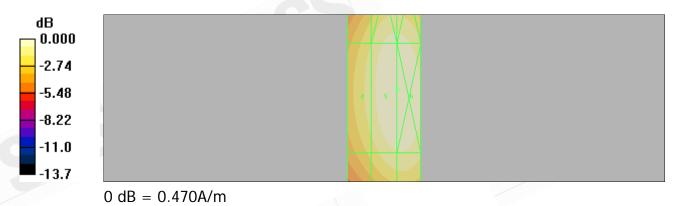

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 48 of 79

### 15. DAE & Probe Calibration certificate

Calibration Laboratory of Schmid & Partner Engineering AG eughausstrasse 43, 8004 Zurich, Switzerland





Service suisse d'étalonnage

S C Servizio svizzero di taratura

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Accreditation No.: SCS 108

Multilateral Agreement for the recognition of calibration certificates

Certificate No: DAE4-547\_Jan09

SGS (Auden) **CALIBRATION CERTIFICATE** DAE4 - SD 000 D04 BJ - SN: 547 Calibration procedure(s) QA CAL-06.v12 Calibration procedure for the data acquisition electronics (DAE) January 19, 2009 In Tolerance This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Cal Date (Certificate No.) Scheduled Calibration Primary Standards ID# SN: 6295803 Fluke Process Calibrator Type 702 30-Sep-08 (No: 7673) Sep-09 Sep-09 Keithley Multimeter Type 2001 SN: 0810278 30-Sep-08 (No: 7670) Check Date (in house) Scheduled Check Secondary Standards Calibrator Box V1.1 SE UMS 006 AB 1004 06-Jun-08 (in house check) In house check: Jun-09 Daniel Hess Technicia R&D Director Approved by: Fin Bomholt . V. Bl Lund Issued: January 20, 2009 This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: DAE4-547 Jan09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279



Page: 49 of 79

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS (Auden)

Accreditation No.: SCS 108

Certificate No: ER3-2306\_Apr09

**CALIBRATION CERTIFICATE** 

ER3DV6 - SN:2306 Object

Calibration procedure(s) QA CAL-02.v5

Calibration procedure for E-field probes optimized for close near field

evaluations in air

April 27, 2009 Calibration date

In Tolerance Condition of the calibrated item

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI) The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

rimary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
ower meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
ower sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ER3DV6	SN: 2328	1-Oct-08 (No. ER3-2328_Oct08)	Oct-09
DAE4	SN: 789	19-Dec-08 (No. DAE4-789_Dec08)	Dec-09
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
letwork Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09
	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	Soft May
		X	116
approved by:	Niels Kuster	Quality Manager	1.1205

Certificate No: ER3-2306 Apr09

Page 1 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 f (886-2) 2298-0488

This calibration certificate shall not be reproduced except in full without written approval of the laboratory



Page: 50 of 79

### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





C

Schweizerischer Kalibrierdienst

Service suisse d'étalonnage Servizio svizzero di taratura **Swiss Calibration Service** 

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

NORMx,y,z sensitivity in free space DCP diode compression point Polarization φ φ rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at

measurement center), i.e.,  $\vartheta$  = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot

coordinate system

#### Calibration is Performed According to the Following Standards:

a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 for XY sensors and 9 = 90 for Z sensor (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart).
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- Spherical isotropy (3D deviation from isotropy): in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: ER3-2306\_Apr09

Page 2 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> endocument. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer/sign all their rights and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 51 of 79

ER3DV6 SN:2306

April 27, 2009

# Probe ER3DV6

SN:2306

Manufactured:

December 17, 2002

Last calibrated: Recalibrated:

April 17, 2008 April 27, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: ER3-2306\_Apr09

Page 3 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 52 of 79

ER3DV6 SN:2306

April 27, 2009

### DASY - Parameters of Probe: ER3DV6 SN:2306

1.27 ± 10.1 % (k=2)

Sensitivity in Free Space [μV/(V/m)<sup>2</sup>]

Diode Compression<sup>A</sup>

NormX 1.11 ± 10.1 % (k=2) NormY 1.13 ± 10.1 % (k=2) DCP X 96 mV DCP Y 96 mV

99 mV

DCP Z

NormZ Frequency Correction

> X 0.0 0.0 7 0.0

Sensor Offset (Probe Tip to Sensor Center)

> 2.5 mm 2.5 mm Z 2.5 mm

Connector Angle -226°

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

t (886-2) 2299-3279

Certificate No: ER3-2306\_Apr09

Page 4 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi

parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

numerical linearization parameter; uncertainty not required




Page: 53 of 79

ER3DV6 SN:2306

April 27, 2009

### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: ER3-2306\_Apr09

Page 5 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279





Page: 54 of 79

ER3DV6 SN:2306


April 27, 2009


### Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$





### Receiving Pattern ( $\phi$ ), $\vartheta = 90^{\circ}$





Certificate No: ER3-2306 Apr09

Page 6 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279




Page: 55 of 79




April 27, 2009

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$

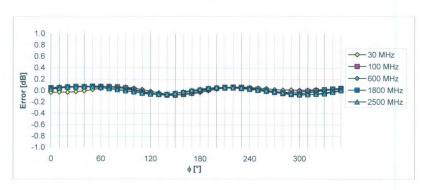

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^{\circ}$

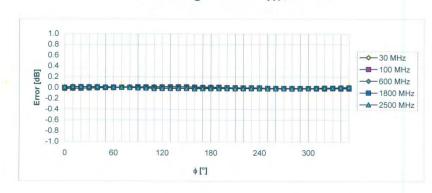

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: ER3-2306\_Apr09

Page 7 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279




Page: 56 of 79


ER3DV6 SN:2306

April 27, 2009

### Dynamic Range f(E-field)

(Waveguide R22, f = 1800 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: ER3-2306\_Apr09

Page 8 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279




Page: 57 of 79

ER3DV6 SN:2306

April 27, 2009

### **Deviation from Isotropy in Air** Error $(\phi, \vartheta)$ , f = 900 MHz

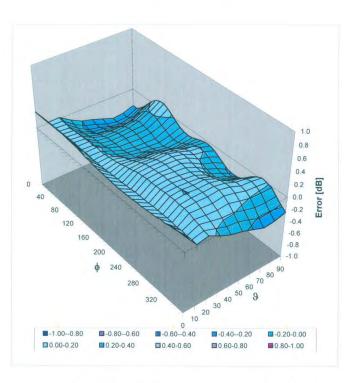

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: ER3-2306\_Apr09

Page 9 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

t (886-2) 2299-3279 www.tw.sgs.com



Page: 58 of 79

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS (Auden)

Certificate No: H3-6142\_Apr09

Accreditation No.: SCS 108

S

S

#### **CALIBRATION CERTIFICATE** H3DV6 - SN:6142 Object Calibration procedure(s) QA CAL-03.v5 Calibration procedure for H-field probes optimized for close near field evaluations in air Calibration date April 27, 2009 In Tolerance This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI) The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards Cal Date (Certificate No.) Scheduled Calibration Apr-10 Power meter E4419B GB41293874 1-Apr-09 (No. 217-01030) MY41495277 Power sensor E4412A 1-Apr-09 (No. 217-01030) Apr-10 Power sensor E4412A MY41498087 1-Apr-09 (No. 217-01030) Apr-10 Reference 3 dB Attenuator SN: S5054 (3c) 31-Mar-09 (No. 217-01026) Mar-10 Reference 20 dB Attenuator SN: S5086 (20b) 31-Mar-09 (No. 217-01028) Mar-10 Reference 30 dB Attenuator SN: S5129 (30b) 31-Mar-09 (No. 217-01027) Mar-10 Reference Probe H3DV6 SN: 6182 1-Oct-08 (No. H3-6182\_Oct08) Oct-09 DAE4 SN: 789 19-Dec-08 (No. DAE4-789\_Dec08) Dec-09 Secondary Standards Check Date (in house) Scheduled Check US3642U01700 RF generator HP 8648C 4-Aug-99 (in house check Oct-07) 18-Oct-01 (in house check Oct-08) In house check: Oct-09 Network Analyzer HP 8753E US37390585 In house check: Oct-09 Function Calibrated by Katja Pokovic Technical Manager Niels Kuster Quality Manager Approved by:

Certificate No: H3-6142 Apr09

Page 1 of 9

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> endocument. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer/sign all their rights and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號

Issued: April 27, 2009



Page: 59 of 79

#### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

NORMx,y,z sensitivity in free space DCP diode compression point Polarization  $\phi$ φ rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at

measurement center), i.e., 9 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot

coordinate system

#### Calibration is Performed According to the Following Standards:

a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

#### Methods Applied and Interpretation of Parameters:

- X, Y, Z\_a0a1a2: Assessed for E-field polarization  $\theta = 90$  for XY sensors and  $\theta = 0$  for Z sensor (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
- X, Y, Z(f) a0a1a2= X, Y, Z a0a1a2\* frequency response (see Frequency Response Chart).
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- Spherical isotropy (3D deviation from isotropy): in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the X\_a0a1a2 (no uncertainty required).

Certificate No: H3-6142\_Apr09

Page 2 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> endocument. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer/sign all their rights and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 60 of 79

H3DV6 SN:6142

April 27, 2009



SN:6142

Manufactured: Last calibrated: Recalibrated:

July 3, 2002 April 21, 2008 April 27, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: H3-6142\_Apr09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms and conditions.htm">www.sgs.com/terms and conditions.htm</a>) and Terms and Conditions for Electronic Documents is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms.htm">www.sgs.com/terms and condit



Page: 61 of 79

H3DV6 SN:6142

April 21, 2008



SN:6142

Manufactured: Last calibrated: Recalibrated:

July 3, 2002 April 20, 2007 April 21, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: H3-6142\_Apr06

Page 3 of 8

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_end\_conditions.htm">www.sgs.com/terms\_end\_conditions.htm</a>) and Terms and Conditions for Electronic Documents (www.sgs.com/terms\_end\_conditions.htm) and Terms and Conditions for Electronic document is sues established therein. Even if printed this electronic document is solved at a more interesting and within the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is a document is a document in the limitation of the control of this document is a document in the limitation of the control of this document is a document in the limitation of the control of the control of the control of this document is a document in the limitation of the control of this document is a document in the limitation of the control of the control of this document is a document in the limitation of the limita



Page: 62 of 79

H3DV6 SN:6142

April 27, 2009

#### DASY - Parameters of Probe: H3DV6 SN:6142

Sensitivity in Free Space [A/m / √(µV)]

	a0 a	a1	a2		
X	2.743E-03	-1.034E-4	-1.138E-5	± 5.1	% (k=2)
Y	2.722E-03	-1.151E-4	1.011E-5	± 5.1	% (k=2)
Z	3.121E-03	-3.459E-4	4.339E-5	± 5.1	% (k=2)

#### Diode Compression<sup>1</sup>

DCP X	<b>82</b> mV
DCP Y	<b>89</b> mV
DCP Z	82 mV

Sensor Offset (Probe Tip to Sensor Center)

X	3.0 mm
Υ	3.0 mm
Z	3.0 mm

Connector Angle -248

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

numerical linearization parameter: uncertainty not required

t (886-2) 2299-3279

Certificate No: H3-6142\_Apr09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the limitations of liability, indemnification and jurisdictional issues es




Page: 63 of 79

H3DV6 SN:6142

April 27, 2009

### Frequency Response of H-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: H3-6142 Apr09

Page 5 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279





Page: 64 of 79

#### H3DV6 SN:6142


April 27, 2009


### Receiving Pattern ( $\phi$ ), $\theta$ = 90°





### Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$





Certificate No: H3-6142\_Apr09

Page 6 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279




Page: 65 of 79

#### H3DV6 SN:6142


April 27, 2009

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^{\circ}$

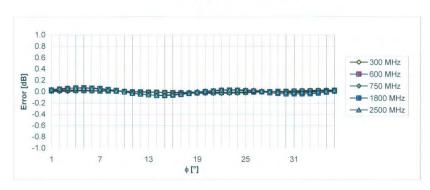

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$

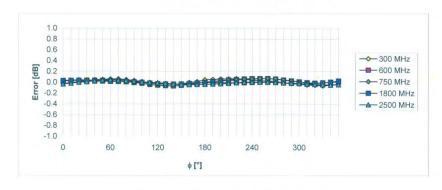

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

Certificate No: H3-6142\_Apr09

Page 7 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279




Page: 66 of 79


#### H3DV6 SN:6142

April 27, 2009

### Dynamic Range f(H-field)

(Waveguide R22, f = 1800 MHz)





Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: H3-6142 Apr09

Page 8 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279




Page: 67 of 79

#### H3DV6 SN:6142

April 27, 2009

### **Deviation from Isotropy in Air** Error $(\phi, \vartheta)$ , f = 900 MHz

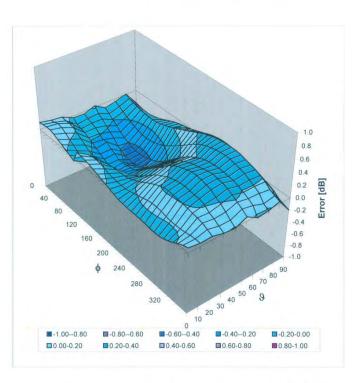

Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: H3-6142\_Apr09

Page 9 of 9

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

t (886-2) 2299-3279



Page: 68 of 79

# 16. Uncertainty Analysis

### HAC-Extension Setup Performance Test Using SPEAG Calibration Dipoles

Error Description	Uncertainty value	Prob. Dist.	Div.	$(c_i)$	$(c_i)$ $\Pi$	Std. Unc.	Std. Unc
Measurement System							
Probe Calibration	15.1%	N	1	1	1	1.5.1 %	±5.1%
Axial Isotropy	14.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7 %
Sensor Displacement	116.5%	R	$\sqrt{3}$	1	0.145	±9.5%	±1.4%
Boundary Effects	±2.4 %	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Scaling to Peak Envelope Power	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
System Detection Limit	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Readout Electronics	±0.3%	У	1	1	1	±0.3%	±0.3 %
Response Time	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Integration Time	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
RF Ambient Conditions	13.0%	R	$\sqrt{3}$	1	1	+1.7%	11.7%
RF Reflections	16.0%	R	$\sqrt{3}$	1	1	±3.5 %	+3.5 %
Probe Positioner	±1.2%	R	$\sqrt{3}$	1	0.67	±0.7%	±0.5 %
Probe Positioning	±4.7%	R	$\sqrt{3}$	.1	0.67	±2.7%	±1.8%
Extrap. and Interpolation	11.0%	R	$\sqrt{3}$	1	J	10.6%	10.6%
Dipole Related							
Distance Dipole - Scanning Plane	±5.2%	R.	$\sqrt{3}$	1	0.3	±3.0%	±0.9 %
Input power	±4.7%	N	1	1	1	±4.7%	=4.7%
Combined Std. Uncertainty		4 - 4				±13.7 %	±9.3 %
Expanded Std. Uncertainty or						27.4 %	18.6 %
Expanded Std. Uncertainty or	ı Field					=13.7 %	±9.3 %

Table 28.1: Uncertainty budget for HAC setup performance test. The budget is valid for the frequency range 800 MHz - 3 GHz and represents a worst-case analysis with respect to power uncertainty of the field. Some of the parameters are dependent on the user situations and need adjustment according to the actual laboratory conditions.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi parties to a transaction from exercising all their rights and obligations under the transaction documents.

No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號 t (886-2) 2299-3279 www.tw.sgs.com



Page: 69 of 79

# 17. System Validation from Original equipment supplier

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura **Swiss Calibration Service** 

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

SGS (Auden)

Accreditation No.: SCS 108

Certificate No: CD835V3-1052\_Apr09

C

**CALIBRATION CERTIFICATE** CD835V3 - SN: 1052 Calibration procedure(s) QA CAL-20.v4 Calibration procedure for dipoles in air April 22, 2009 In Tolerance This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70% Calibration Equipment used (M&TE critical for calibration) ID# Cal Date (Certificate No.) Scheduled Calibration Primary Standards GB37480704 08-Oct-08 (No. 217-00898) Power meter EPM-442A Oct-09 Power sensor HP 8481A US37292783 08-Oct-08 (No. 217-00898) Oct-09 Probe ER3DV6 SN: 2336 22-Dec-08 (No. ER3-2336 Dec08) Dec-09 22-Dec-08 (No. H3-6065\_-Dec08) Dec-09 Probe H3DV6 SN: 6065 DAE4 SN: 781 20-Feb-09 (No. DAE4-781\_Feb09) Feb-10 Secondary Standards Check Date (in house) Scheduled Check Power meter R&S NRP SN: 101748 23-Sep-08 (in house check Dec-08) In house check: Dec-10 Power sensor R&S NRP-Z91 SN: 100711 25-Aug-08 (in house check Dec-08) In house check: Dec-10 Power sensor R&S NRP-Z91 SN: 100712 25-Aug-08 (in house check Dec-08) In house check: Dec-10 US37390585 Network Analyzer HP 8753E 18-Oct-01 (in house check Oct-08) In house check: Oct-09 RF generator E4433B MY 41310391 03-Nov-04 (in house check Oct-07) Calibrated by: Mike Meili Laboratory Technician Approved by: Issued: April 27, 2009 This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: CD835V3-1052 Apr09

Page 1 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm) and Terms and Conditions for Electronic Documents (<a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> endocument. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> even if printed this electronic document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for meyer/sign all their rights and obligations under the transaction documents. parties to a transaction from exercising all their rights and obligations under the transaction documents.



Page: 70 of 79

#### 3.3.2 DASY4 H-field Result

Date/Time: 21.04.2009 12:38:12

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1052

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used:  $\sigma=0$  mho/m,  $\epsilon_r=1$ ;  $\rho=1$  kg/m³

Phantom section: RF Section Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: H3DV6 - SN6065; ; Calibrated: 22.12.2008

Sensor-Surface: (Fix Surface)

Electronics: DAE4 Sn781; Calibrated: 20.02.2009

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - measurement distance from the probe sensor center to CD835 Dipole =

10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.457 A/m


Probe Modulation Factor = 1.00 Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.486 A/m; Power Drift = -0.014 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.380 M4	0.403 M4	0.383 M4
Grid 4	Grid 5	Grid 6
0.427 M4	<b>0.457 M4</b>	0.437 M4
Grid 7	Grid 8	Grid 9
0.378 M4	0.409 M4	<b>0.391 M4</b>



0 dB = 0.457 A/m

Certificate No: CD835V3-1052 Apr09

Page 5 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 71 of 79

#### 3.3.3 DASY4 E-field Result

Date/Time: 22.04.2009 13:19:44

Test Laboratory: SPEAG Lab 2

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1052 Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used:  $\sigma=0$  mho/m,  $\epsilon_r=1$ ;  $\rho=1000$  kg/m³ Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

#### DASY4 Configuration:


- Probe: ER3DV6 SN2336; ConvF(1, 1, 1); Calibrated: 22.12.2008
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.02.2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### E Scan - measurement distance from the probe sensor center to CD835 Dipole =

10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm Maximum value of peak Total field = 168.7 V/m Probe Modulation Factor = 1.00 Device Reference Point: 0.000, 0.000, -6.30 mm Reference Value = 109.0 V/m; Power Drift = -0.002 dB Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
162.3 M4	168.3 M4	164.0 M4
Grid 4	Grid 5	Grid 6
86.8 M4	89.2 M4	86.0 M4
Grid 7	Grid 8	Grid 9
161.9 M4	168.7 M4	163.6 M4



0 dB = 168.7 V/m

Certificate No: CD835V3-1052\_Apr09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

Taiwan Ltd.



Page: 72 of 79

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Service suisse d'étalonnage C Servizio svizzero di taratura **Swiss Calibration Service** 

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Cartificate No. CD1880V3-1044 Apr09

Accreditation No.: SCS 108

Object	CD1880V3 - S	N: 1044	
Calibration procedure(s)	QA CAL-20.v4 Calibration pro	cedure for dipoles in air	
Calibration date:	April 22, 2009	· · · · · · · · · · · · · · · · · · ·	
Condition of the calibrated item	In Tolerance		
Calibration Equipment used (M& Primary Standards Power meter EPM-442A	ID # GB37480704	Cal Date (Certificate No.)	Scheduled Calibration Oct-09
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Probe ER3DV6	SN: 2336	22-Dec-08 (No. ER3-2336_Dec08)	Dec-09
Probe H3DV6	SN: 6065	22-Dec-08 (No. H3-6065Dec08)	Dec-09
DAE4	SN 781	20-Feb-09 (No. DAE4-781_Feb09)	Feb-10
	1,5 #	Check Date (in house)	Scheduled Check
Secondary Standards	ID#	Check Date (iii house)	
	SN: 101748	23-Sep-08 (in house check Dec-08)	In house check: Dec-10
Power meter R&S NRP Power sensor R&S NRP-Z91	SN: 101748 SN: 100711	23-Sep-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08)	In house check: Dec-10 In house check: Dec-10
Power meter R&S NRP Power sensor R&S NRP-Z91 Power sensor R&S NRP-Z91	SN: 101748 SN: 100711 SN: 100712	23-Sep-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08)	In house check: Dec-10 In house check: Dec-10 In house check: Dec-10
Power meter R&S NRP Power sensor R&S NRP-Z91 Power sensor R&S NRP-Z91 Network Analyzer HP 8753E	SN: 101748 SN: 100711 SN: 100712 US37390585	23-Sep-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 18-Oct-01 (in house check Oct-08)	In house check: Dec-10 In house check: Dec-10 In house check: Dec-10 In house check: Oct-09
Power meter R&S NRP Power sensor R&S NRP-Z91 Power sensor R&S NRP-Z91 Network Analyzer HP 8753E	SN: 101748 SN: 100711 SN: 100712	23-Sep-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08)	In house check: Dec-10 In house check: Dec-10 In house check: Dec-10
Power meter R&S NRP Power sensor R&S NRP-Z91 Power sensor R&S NRP-Z91 Network Analyzer HP 8753E	SN: 101748 SN: 100711 SN: 100712 US37390585	23-Sep-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 18-Oct-01 (in house check Oct-08)	In house check: Dec-10 In house check: Dec-10 In house check: Dec-10 In house check: Oct-09
Secondary Standards Power meter R&S NRP Power sensor R&S NRP-Z91 Power sensor R&S NRP-Z91 Network Analyzer HP 8753E RF generator E4433B  Calibrated by:	SN: 101748 SN: 100711 SN: 100712 US37390585 MY 41310391	23-Sep-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 18-Oct-01 (in house check Oct-08) 22-Nov-04 (in house check Oct-07)	In house check: Dec-10 In house check: Dec-10 In house check: Dec-10 In house check: Oct-09 In house check: Oct-09
Power meter R&S NRP Power sensor R&S NRP-Z91 Power sensor R&S NRP-Z91 Network Analyzer HP 8753E RF generator E4433B	SN: 101748 SN: 100711 SN: 100712 US37390585 MY 41310391	23-Sep-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 25-Aug-08 (in house check Dec-08) 18-Oct-01 (in house check Oct-08) 22-Nov-04 (in house check Oct-07)  Function	In house check: Dec-10 In house check: Dec-10 In house check: Dec-10 In house check: Oct-09 In house check: Oct-09 Signature

Certificate No: CD1880V3-1044 Apr09

Page 1 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 73 of 79

#### 3.3.2 DASY4 H-Field Result

Date/Time: 21.04.2009 15:31:24

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1044 Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used:  $\sigma=0$  mho/m,  $\epsilon_r=1$ ;  $\rho=1$  kg/m³

Phantom section: RF Section

Measurement Standard: DASY4 (High Precision Assessment)

#### DASY4 Configuration:

- Probe: H3DV6 SN6065; ; Calibrated: 22.12.2008
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.02.2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - measurement distance from the probe sensor center to CD1880 Dipole =


10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm Maximum value of peak Total field = 0.463 A/m

Probe Modulation Factor = 1.00 Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.490 A/m; Power Drift = -0.003 dB Hearing Aid Near-Field Category: M2 (AWF 0 dB)

Peak H-field in A/m

Grid 1	Grid 2	Grid 3
0.404 M2	0.421 M2	0.399 M2
Grid 4	Grid 5	Grid 6
0.444 M2	0.463 M2	0.438 M2
Grid 7	Grid 8	Grid 9
0.406 M2	0.427 M2	0.402 M2



0 dB = 0.463 A/m

Certificate No: CD1880V3-1044 Apr09

Page 5 of 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (<a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for the representation of the property of parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號



Page: 74 of 79

#### 3.3.3 DASY4 E-Field Result

Date/Time: 22.04.2009 14:56:09

Test Laboratory: SPEAG Lab 2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1044 Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used:  $\sigma=0$  mho/m,  $\epsilon_r=1$ ;  $\rho=1000$  kg/m³

Phantom section: RF Section Measurement Standard: DASY4 (High Precision Assessment)

#### DASY4 Configuration:


- Probe: ER3DV6 SN2336; ConvF(1, 1, 1); Calibrated: 22.12.2008
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 20.02.2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - measurement distance from the probe sensor center to CD1880 Dipole =

10mm/Hearing Aid Compatibility Test (41x181x1):
Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 138.3 V/m
Probe Modulation Factor = 1.00
Device Reference Point: 0.000, 0.000, -6.30 mm Reference Value = 155.4 V/m; Power Drift = 0.019 dB Hearing Aid Near-Field Category: M2 (AWF 0 dB)

#### Peak E-field in V/m

Grid 1	Grid 2	Grid 3
132.8 M2	137.9 M2	134.6 M2
Grid 4	Grid 5	Grid 6
89.3 M3	91.9 M3	88.1 M3
Grid 7	Grid 8	Grid 9
131.5 M2	138.3 M2	133.9 M2



0 dB = 138.3 V/m

Certificate No: CD1880V3-1044\_Apr09

Page 6 of 6

# End of 1st part of report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service (www.sgs.com/terms and conditions.htm) and Terms and Conditions for Electronic Documents (www.sgs.com/terms—e-document.htm). Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. Even if printed this electronic document is to be treated as an original within the meaning of UCP 600 article 20b. The authenticity of this document may be verified at <a href="https://www.sgs.com/terms-energy-treen-company-stream-reflects-the-Company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-findings-at-the-treen-company-st-finding-at-the-treen-company-st-finding-company-st-findi

t (886-2) 2299-3279

parties to a transaction from exercising all their rights and obligations under the transaction documents.

SGS Taiwan Ltd. No.134, Wu Kung Road, Wuku Industrial Zone, Taipei County, Taiwan /台北縣五股工業區五工路 134 號