

## TEST REPORT

Report Number: 3184686ATL-001

July 21, 2009


**Product Designation: AFDT (Remote)**

Standard: FCC 15.249 - Operation within the bands 902-928 MHz, 2400-2483.5 MHz,  
5725-5875 MHZ, and 24.0-24.25 GHz.  
RSS-210, Issue 7, 2007

Tested by:  
Intertek Testing Services NA Inc.  
1950 Evergreen Blvd., Suite 100  
Duluth, GA 30096

Client:  
Siemens Energy & Automation  
100 Technology Drive  
Alpharetta, GA 30005  
Contact: Kevin Miller  
Phone: 770.326.2476  
Fax: 770.326.2091

Tests performed by:



Chris D. Capelle  
Senior Project Engineer

Report reviewed by:



Jeremy O. Pickens  
EMC Department Manager

All services undertaken are subject to the following general policy: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST, or any agency of the US Government.

## 1.0 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 3.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complies with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

## 2.0 Test Summary

Section	Test Full Name	Test Date	Result
4.0	System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)		
5.0	Overview of EUT (Low Power Transmitters) (FCC 15C - EUT Overview)	07/07/2009	
6.0	Duty Cycle Determination (FCC 15A - 15.35(c))	07/07/2009	
7.0	Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)	07/07/2009	PASS
NA	Conducted emissions on AC power lines (Conducted Emissions) was waived due to the device was battery-powered.		
NA	15.249(b): Requirements for fixed, point-to-point operation (FCC 15C - 15.249(b)) was waived due to requirement not applicable.		
NA	Additional provisions to the general radiated emission limitations. (FCC 15C - 15.215) was waived due to requirement not applicable.		

### 3.0 Description of Equipment Under Test

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Remote Transmitter	Siemens Energy & Automation	AFDT	Not Labeled

EUT receive date:	7/7/2009
EUT receive condition:	Good

Description of EUT provided by Client:


The Arc Fault Diagnostic Tool is used on a residential service panel and must be installed and used by a qualified electrician. Also, this device is to be installed only on a single phase 120VAC grounded system. This device is used to determine if there are arcs on a electrical circuit branch and transmit a reading to the handheld unit.

Description of EUT exercising:

EUT was battery powered, once powered EUT transmitted as intended.

**4.0 System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)****Method:**

Record the details of EUTcabling, document the support equipment, and show the interconnections in a block diagram.

**Drawing:**

Setup Diagram

**4.0 System setup including cable interconnection details, support equipment and simplified block diagram. (System Setup)****Data:**

EUT Cabling						
ID	Description	Length	Shielding	Ferrites	Connection	
					From	To
	none					

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
none			

## 5.0 Overview of EUT (Low Power Transmitters) (FCC 15C - EUT Overview)

**Method:**

Complete the overview spreadsheet.

Related Submittal(s) Grants: This report is for use with an application for certification of a low power transmitter. One transmitter is included in the application.

**Data:**

Applicant	Siemens Energy & Automation 100 Technology Drive Alpharetta, GA 30005
Trade Name & Model No.	AFDT (Remote Transmitter)
FCC Identifier	TBD
Frequency Range (MHz)	2400-2483.5 MHz
Antenna Type (15.203)	External
Manufacturer name & address	Siemens Energy & Automation 100 Technology Drive Alpharetta, GA 30005

Related Submittals and Grants:	This report is for use with an application for certification of a low power transmitter. One transmitter is included in the application.
Additions, deviations and exclusions from standards	none

## 6.0 Duty Cycle Determination (FCC 15A - 15.35(c))

### Method:

(c) Unless otherwise specified, e.g. §15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

Determine the period of the pulse train, T, in mSec and record the results. T is defined as the time from the beginning of one pulse train to the beginning of the next pulse train.

Count the number of different types of pulses, N and record the results.


For each of the different types of pulses, count the number of occurrences within one pulse train.

Use the Duty Cycle Correction Factor, DCCF, from the results table and use it to adjust the field strength measurements recorded for radiated emissions.

### Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Spectrum Analyzer, 20Hz-40GHz	Rohde & Schwarz	FSEK30	200062	10/10/2008	10/10/2009


### Plot:

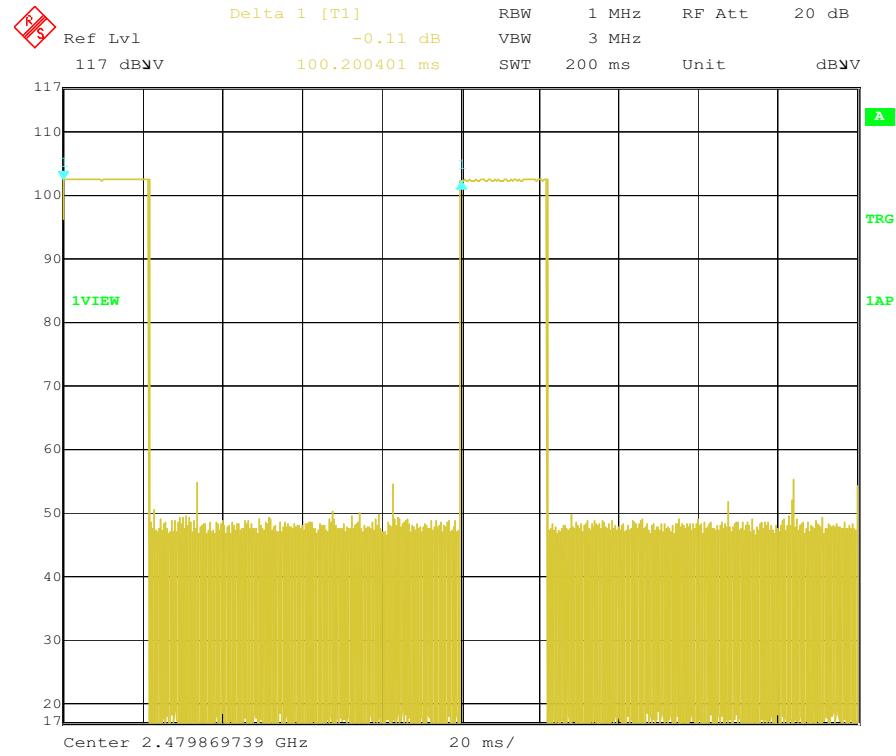

Total Time

## 6.0 Duty Cycle Determination (FCC 15A - 15.35(c))

### Plot:

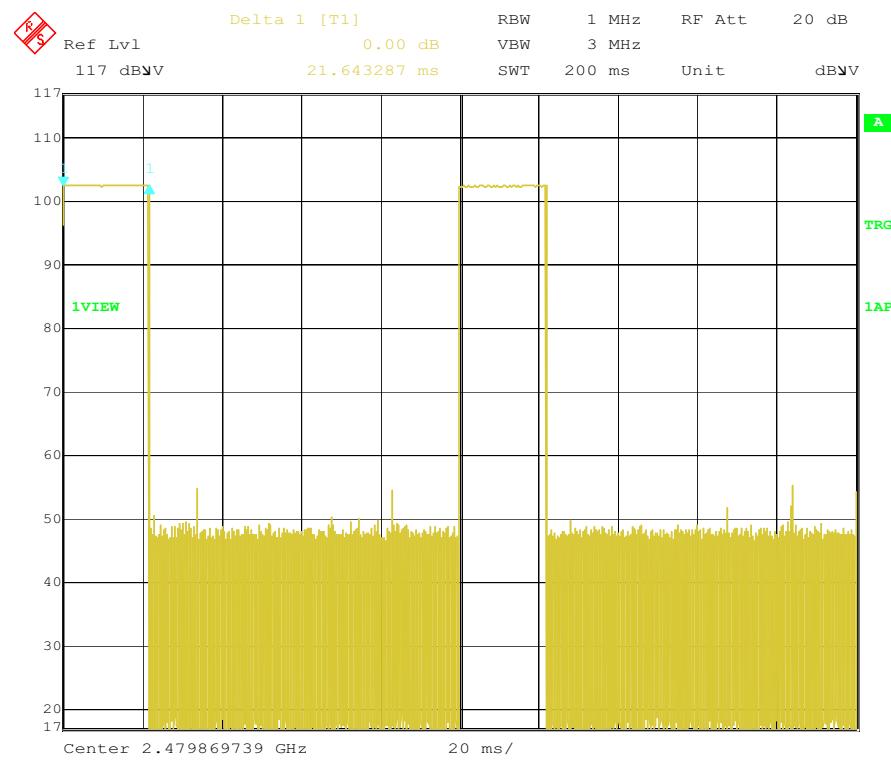

On Time

## 6.0 Duty Cycle Determination (FCC 15A - 15.35(c))

## Data:

Duration of Pulse Train, T (mSec): 100.2  
 Averaging Interval, A<sub>I</sub> (mSec): 100  
 Number of different Pulses, N: 1

	Number (#P <sub>x</sub> )	Pulse Width, mSec (PW <sub>x</sub> )	Product (#P <sub>x</sub> )*(PW <sub>x</sub> )
Pulse Width 1	1	21.64	21.64
Pulse Width 2			
Pulse Width 3			
Pulse Width 4			
Pulse Width 5			
Pulse Width 6			
Pulse Width 7			
Pulse Width 8			
Pulse Width 9			
Pulse Width 10			

Duty Cycle: 0.2164  
 Duty Cycle Correction Factor, dB: -13.3

$$T_{on} = (PW_1 * \#P_1) + (PW_2 * \#P_2) + \dots + (PW_n * \#P_n)$$

$$DutyCycle = T_{on} \div A_I$$

$$DCCF = 20 * \log_{10}(DutyCycle)$$

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)

### Method:

Measurements shall be performed with a quasi-peak detector instrument that meets the requirements of Section One of CISPR 16.

#### Bandwidths:

30 MHz to 1000 MHz: 120 kHz RBW and 1 MHz VBW

Above 1000 MHz: 1 MHz RBW and 3 MHz VBW

#### Detectors:

Equal to or less than 1000 MHz: CISPR quasi-peak detector (alternative: peak detector)

Above 1000 MHz: Average detector (applies to average limit)

Above 1000 MHz: Peak detector (applies to peak limit)

#### Limits:

Equal to or less than 1000 MHz, the limits are specified as quasi-peak. If a peak detector is used, the limit does not change.

Above 1000 MHz, the limits are specified as average. The peak limit is 20 dB above the average limit. Both peak and average measurements are required to be reported.

#### Frequency range of radiated measurements

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1) through (a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

#### Measurement antenna requirements:

Below 30 MHz - Loop antenna

30 to 1000 MHz - Biconical, Log Periodic, or equivalent

Above 1000 MHz - Horn or equivalent

Measurements of the radiated field are made with the antenna located at a distance of 3 or 10 meters from the EUT. The limit applied to the measurement shall be appropriate for the test distance. The test distance shall be indicated in the results section.

The EUT shall be arranged and connected with cables terminated in accordance with the product specification.

Exploratory tests should be carried out while varying the cable positions to determine the maximum or near-maximum emission level. During manipulation, cables shall not be placed under or on top of the system test components unless such placement is required by the inherent equipment design.

The antenna shall be adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth shall be varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) shall be varied during the measurements to find the maximum field-strength readings.

If the EUT is handheld, it shall be oriented in each of its orthogonal axes.

If the EUT is intended for tabletop use, it shall be placed on a table whose top is 0.8m above the ground plane. The table shall be constructed of non-conductive materials. Its dimensions are at least 1m by 1.5m, but may be extended for larger EUT.

If EUT is floor standing, the EUT was placed on a horizontal metal ground plane and isolated from the ground plane by up to 12 mm of insulating material.

Equipment setup for radiated disturbance tests shall follow the guidelines of ANSI C63.4:2003.

#### TEST SITE

The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096.

### Test Equipment Used:

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Antenna, BiLog, 20-2000MHz	Chase	CBL6112B	211386	09/26/2008	09/26/2009


**7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)****Test Equipment Used:**

Description:	Manufacturer:	Model:	Asset Number:	Cal Date:	Cal Due:
Antenna, Horn, <18 GHz	EMCO	3115	BOX-HORN1	08/08/2008	08/08/2009
Cable E201, 18 GHz, N, 3m	Megaphase	TM18 NKNK 118	E201	01/29/2009	01/29/2010
Cable E402, 40 GHz, 2.9, 9"	Megaphase	TM40 K1K1 9	E402	06/08/2009	06/08/2010
Cable E404, 40 GHz, 2.9, 2m	Megaphase	TM40 K1K1 80	E404	06/08/2009	06/08/2010
Cable MP3, 18 GHz, N, 10m	Megaphase	G919-NKNK-394	MP3	05/04/2009	05/04/2010
Cable ST1, 7m, N-N, 18 GHz	Storm Products Co.	PR90-206-7MTR	ST1	01/23/2009	01/23/2010
EMI Receiver	Hewlett Packard	8546A	211505	01/12/2009	01/12/2010
Excel spreadsheet for radiated emissions	Software	Excel - RE Worksh	SW004	12/08/2008	12/08/2009
Preamplifier, 10 MHz to 2000 MHz, 27 dB gain	Mini-Circuits	ZKL-2	200074	10/20/2008	10/20/2009
Preamplifier, 18-40GHz, 29 dB Gain	Miteq	JS41800400-30-5P	200106	09/02/2008	09/02/2009
Preamplifier, 20 MHz to 18 GHz, 40 dB	A.H. Systems	PAM-0118	200108	04/07/2009	04/07/2010
Spectrum Analyzer, 20Hz-40GHz	Rohde & Schwarz	FSEK30	200062	10/10/2008	10/10/2009

**Results: The sample tested was found to Comply.**

**7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)**

**Photo:**

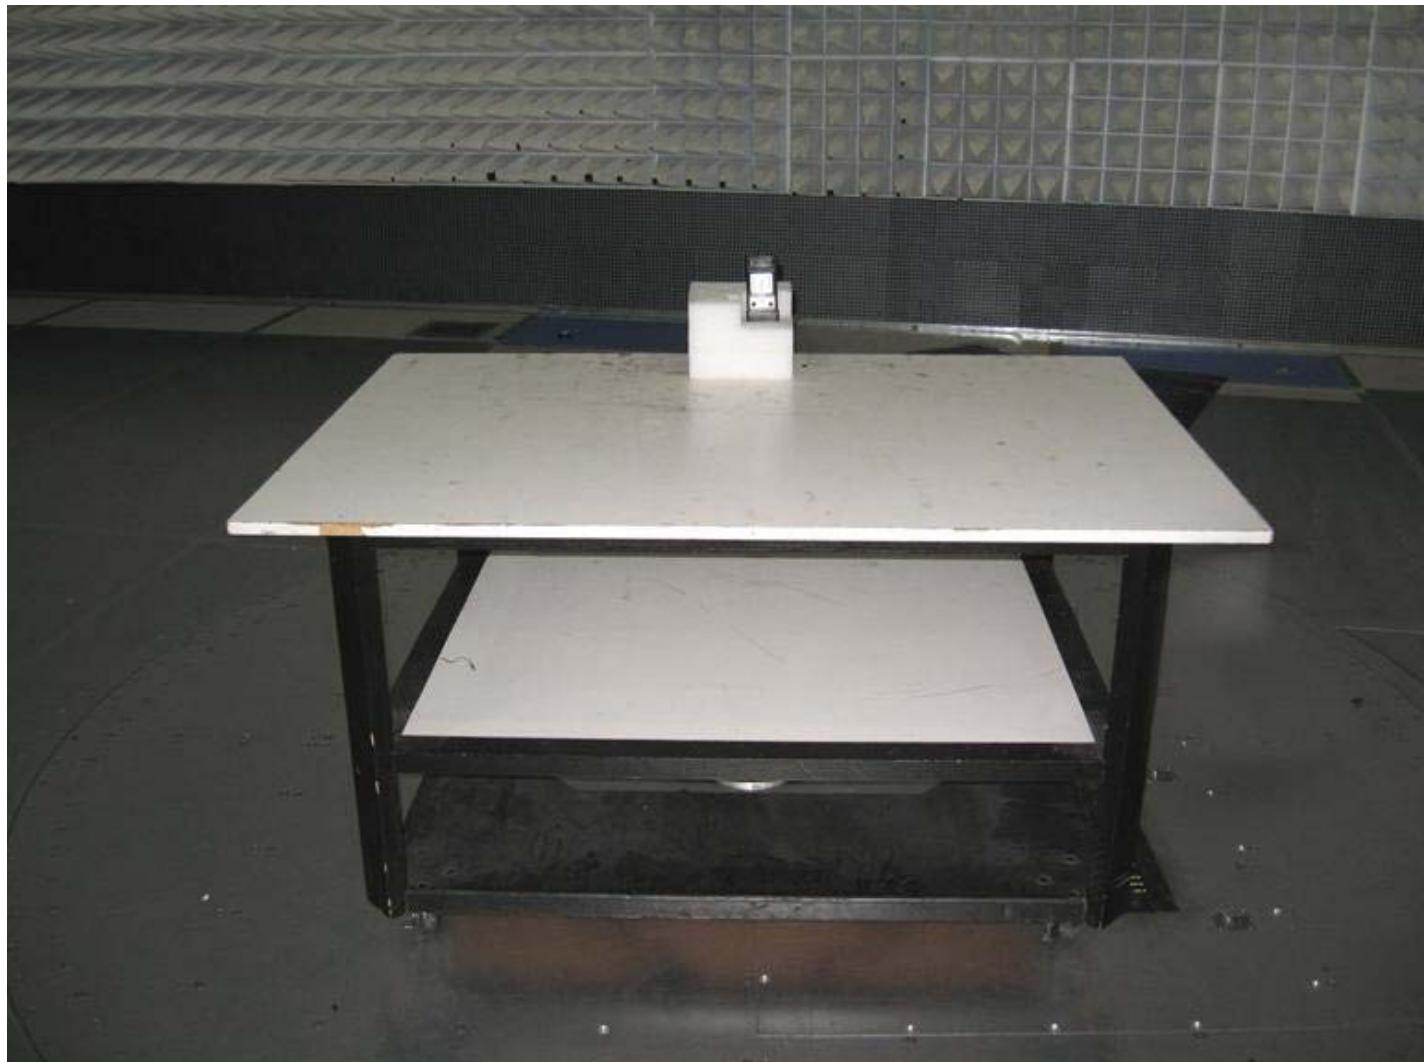

Test Setup

**7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)**


**Photo:**



Test Setup

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)


Plot:

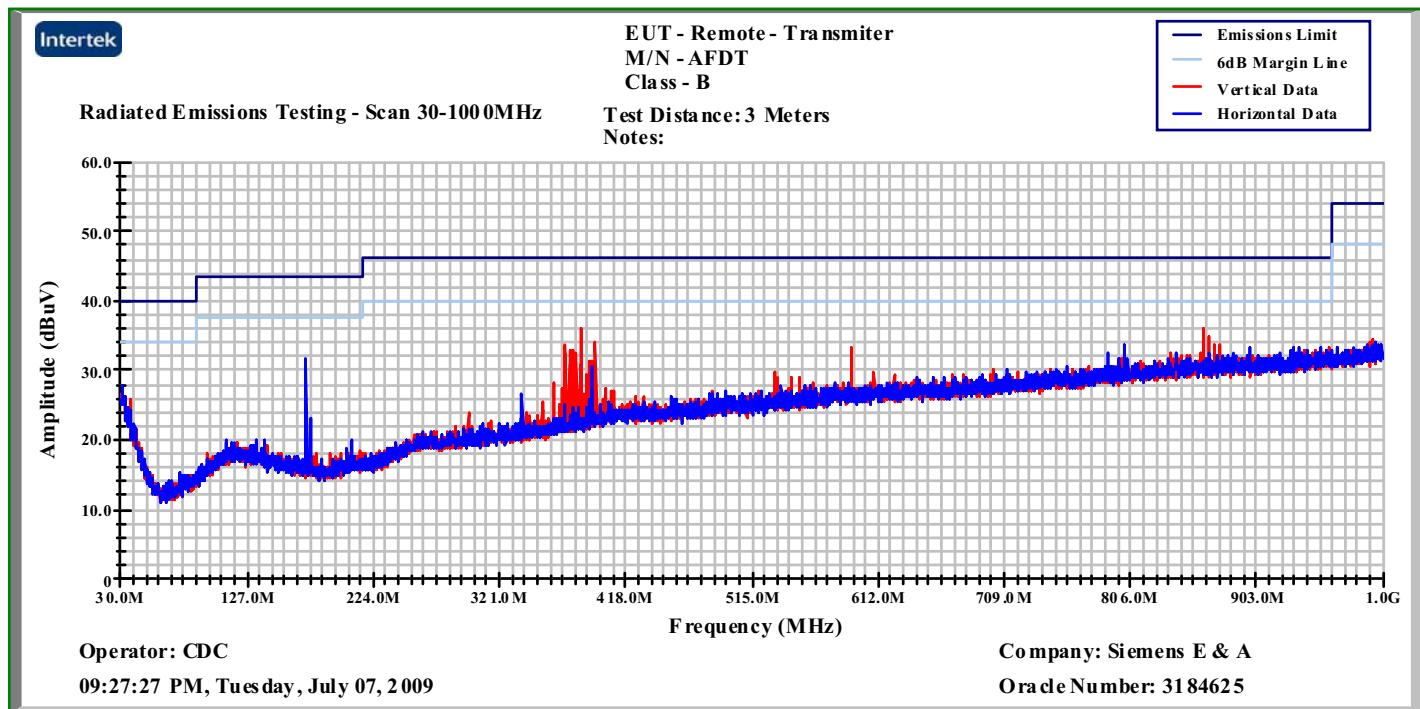


Peak Plot - 30-1000MHz

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)

Plot:

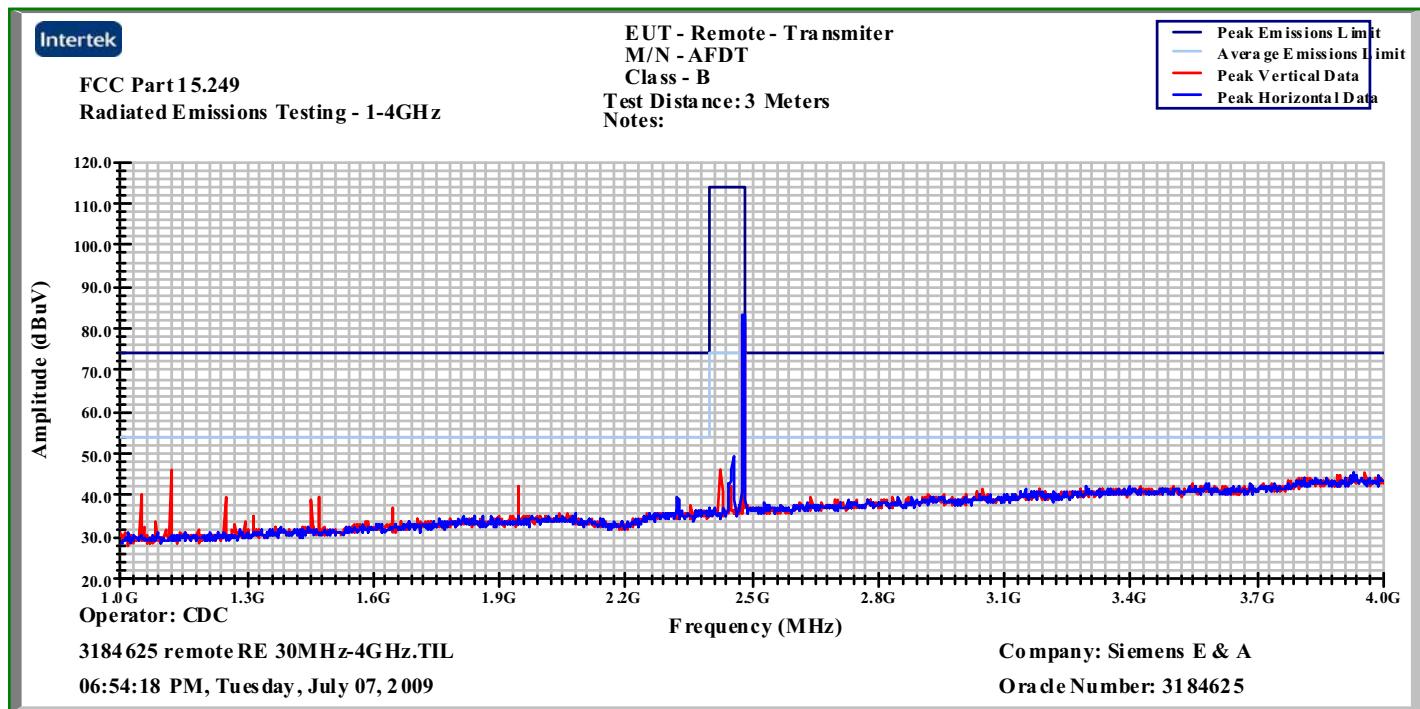


Peak Plot - 1-4GHz

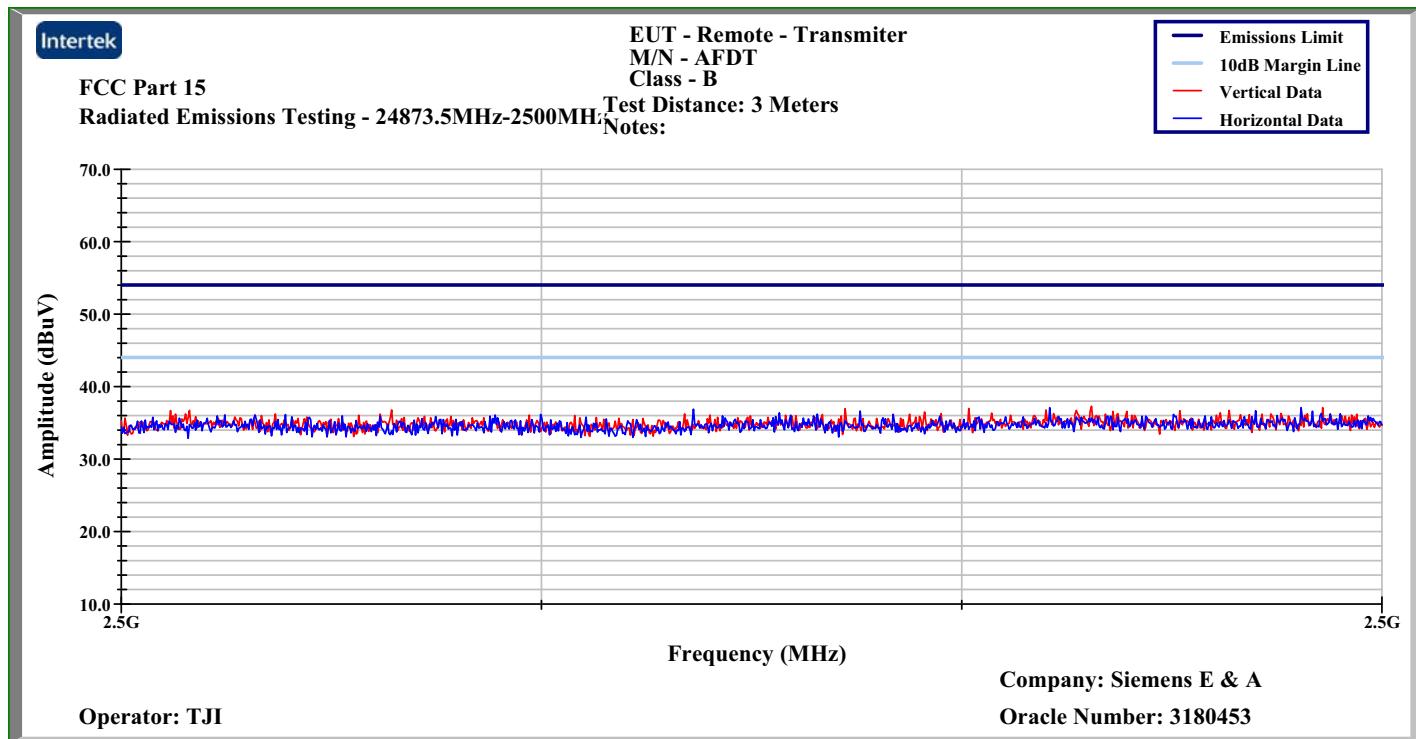**7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)****Plot:**

Band-edge Plot (2483.5 MHz - 2500 MHz)

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)


Plot:

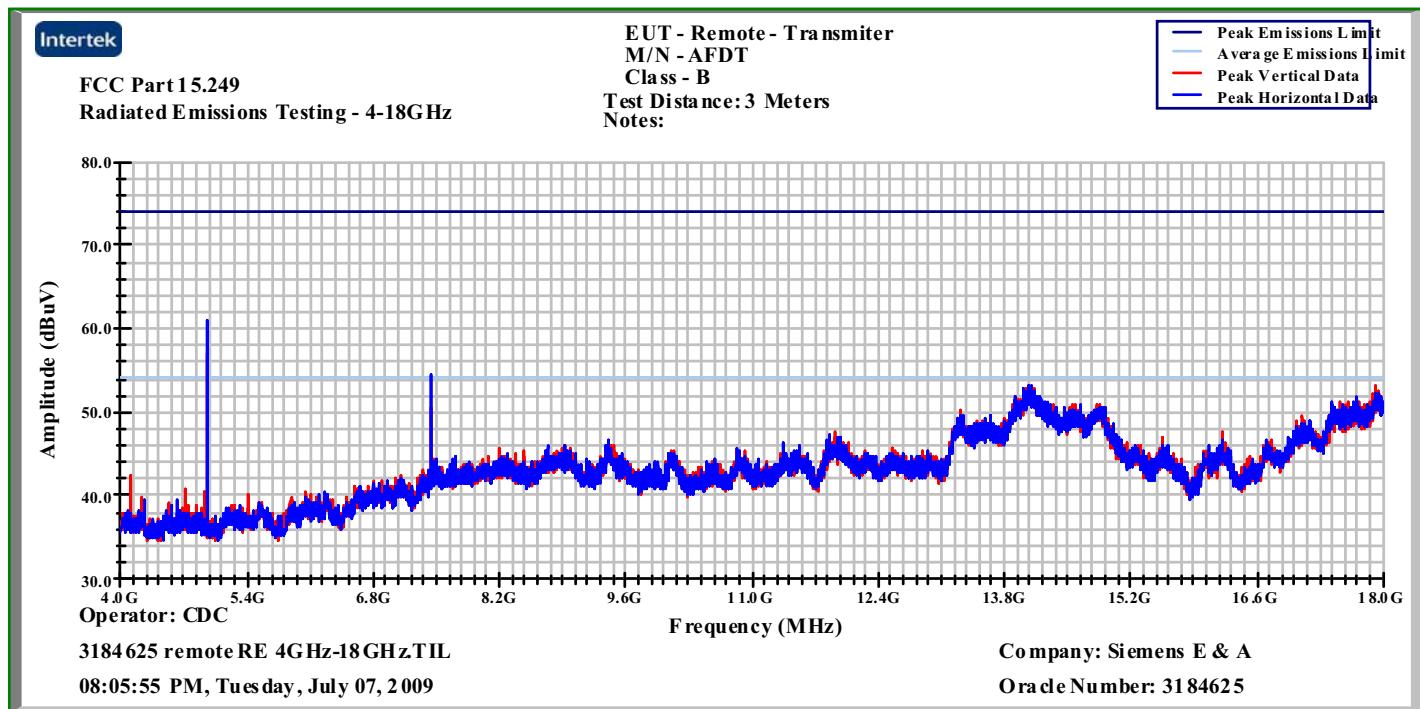

Peak Plot - 4-18GHz

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)

Plot:

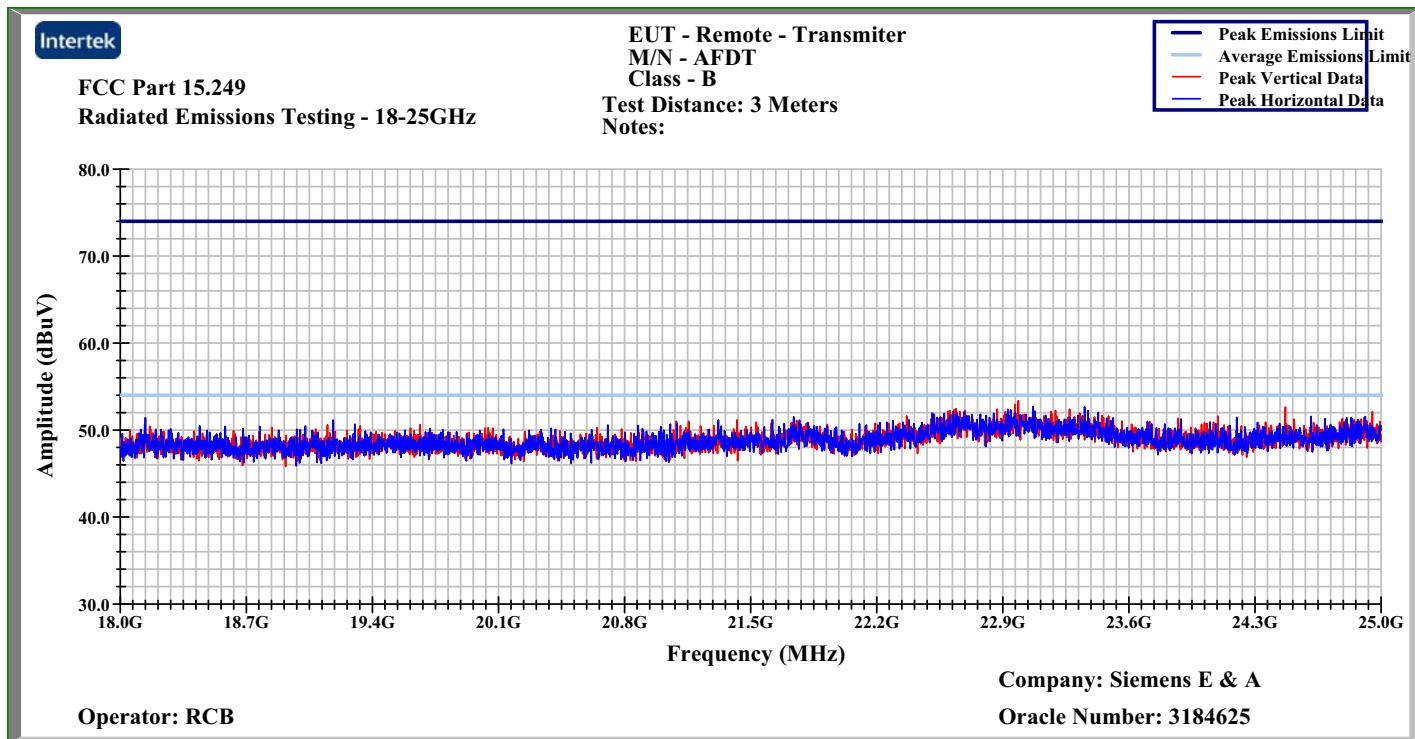

Peak Plot - 18-25GHz

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)

## Data:

Date: 07/07/2009

Test Distance (m): 3

Frequency Range (MHz): 30-1000

Limit: FCC15 Class B-3m

Input power: 120VAC, 60Hz

Modifications for compliance (y/n): n

A	B	C	D	E	F	G	H	I	J
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Detectors / Bandwidths Det/RBW/VBW
H	173.000	41.2	11.6	2.8	28.0	27.6	43.5	-15.9	Pk/120k/300k
V	374.630	42.3	15.8	4.1	27.9	34.4	46.0	-11.6	Pk/120k/300k
V	377.380	39.5	15.9	4.2	27.9	31.6	46.0	-14.4	Pk/120k/300k
V	379.880	40.8	16.0	4.2	27.9	33.1	46.0	-12.9	Pk/120k/300k
V	572.130	33.3	19.0	5.1	27.8	29.6	46.0	-16.4	Pk/120k/300k
V	858.000	32.0	21.3	6.5	27.4	32.4	46.0	-13.6	Pk/120k/300k
Calculations		G=C+D+E-F			I=G-H				

Tabular Data - 30-1000MHz

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)

## Data:

Frequency Range (MHz): 1000-4000  
 Input power: 120VAC, 60Hz

Test Distance (m): 3  
 Modifications for compliance (y/n): n

## Notes:

A	B	C	D	E	F	G	H	I	J	K
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Duty Cycle Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Axis / Detector
H	2479.941	94.4	27.3	8.0	40.6	0.0	89.1	114.0	-24.9	XP
H	2479.941	94.4	27.3	8.0	40.6	13.3	75.8	94.0	-18.2	XA
V	2479.941	83.7	27.1	8.0	40.6	0.0	78.2	114.0	-35.8	XP
V	2479.941	83.7	27.1	8.0	40.6	13.3	64.9	94.0	-29.1	XA
H	2479.941	99.8	27.3	8.0	40.6	0.0	94.5	114.0	-19.6	YP
H	2479.941	99.8	27.3	8.0	40.6	13.3	81.2	94.0	-12.9	YA
V	2479.941	80.4	27.1	8.0	40.6	0.0	74.9	114.0	-39.1	YP
V	2479.941	80.4	27.1	8.0	40.6	13.3	61.6	94.0	-32.4	YA
H	2479.941	84.7	27.3	8.0	40.6	0.0	79.4	114.0	-34.6	ZP
H	2479.941	84.7	27.3	8.0	40.6	13.3	66.1	94.0	-27.9	ZA
V	2479.941	97.8	27.1	8.0	40.6	0.0	92.2	114.0	-21.8	ZP
V	2479.941	97.8	27.1	8.0	40.6	13.3	78.9	94.0	-15.1	ZA
Calculations		G=C+D+E-F		I=G-H						

Tabular Data - 1-4GHz

## 7.0 Radiated emissions (E-field) for low power intentional radiators. (Radiated Emissions LPD)

## Data:

Date: 07/07/2009

Limit: 15\_249-3m

Frequency Range (MHz): 4000-18000

Test Distance (m): 3

Input power: 120VAC, 60Hz

Modifications for compliance (y/n): n

A	B	C	D	E	F	G	H	I	J	K
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Duty Cycle Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Axis / Detector
H	4959.544	57.3	32.2	12.0	41.1	0.0	60.4	74.0	-13.6	X / P
H	4959.544	57.3	32.2	12.0	41.1	13.3	47.1	54.0	-6.9	X / P
V	4959.544	57.5	32.3	12.0	41.1	0.0	60.7	74.0	-13.3	X / P
V	4959.544	57.5	32.3	12.0	41.1	13.3	47.4	54.0	-6.6	X / P
H	4959.544	57.3	32.2	12.0	41.1	0.0	60.4	74.0	-13.6	Y / P
H	4959.544	57.3	32.2	12.0	41.1	13.3	47.1	54.0	-6.9	Y / P
V	4959.544	54.7	32.3	12.0	41.1	0.0	57.9	74.0	-16.1	Y / P
V	4959.544	54.7	32.3	12.0	41.1	13.3	44.6	54.0	-9.4	Y / P
H	4959.544	55.2	32.2	12.0	41.1	0.0	58.3	74.0	-15.7	Z / P
H	4959.544	55.2	32.2	12.0	41.1	13.3	45.0	54.0	-9.0	Z / P
V	4959.544	60.2	32.3	12.0	41.1	0.0	63.4	74.0	-10.6	Z / P
V	4959.544	60.2	32.3	12.0	41.1	13.3	50.1	54.0	-3.9	Z / P
H	7439.490	47.9	35.1	16.3	39.1	0.0	60.2	74.0	-13.8	X / P
H	7439.490	47.9	35.1	16.3	39.1	13.3	46.9	54.0	-7.1	X / P
V	7439.490	46.4	35.0	16.3	39.1	0.0	58.6	74.0	-15.4	X / P
V	7439.490	46.4	35.0	16.3	39.1	13.3	45.3	54.0	-8.7	X / P
H	7439.490	47.0	35.1	16.3	39.1	0.0	59.3	74.0	-14.7	Y / P
H	7439.490	47.0	35.1	16.3	39.1	13.3	46.0	54.0	-8.0	Y / P
V	7439.490	45.7	35.0	16.3	39.1	0.0	57.9	74.0	-16.1	Y / P
V	7439.490	45.7	35.0	16.3	39.1	13.3	44.6	54.0	-9.4	Y / P
H	7439.490	46.4	35.1	16.3	39.1	0.0	58.7	74.0	-15.3	Z / P
H	7439.490	46.4	35.1	16.3	39.1	13.3	45.4	54.0	-8.6	Z / P
V	7439.490	48.1	35.0	16.3	39.1	0.0	60.3	74.0	-13.7	Z / P
V	7439.490	48.1	35.0	16.3	39.1	13.3	47.0	54.0	-7.0	Z / P
<b>Calculations</b>	G=C+D+E-F			I=G-H						

Tabular Data - 4-18GHz