



A D T

FCC TEST REPORT

REPORT NO.: RF990414C05

MODEL NO.: FS-GF801

RECEIVED: Apr. 14, 2010

TESTED: Apr. 28 ~ May 05, 2010

ISSUED: May 11, 2010

APPLICANT: Favite Inc.

ADDRESS: No. 176, Taihe Road, Jhubei City, Hsinchu
County 30267, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Testing Laboratory
2021



Table of Contents

1. CERTIFICATION.....	4
2. SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY.....	5
3. GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4 DESCRIPTION OF SUPPORT UNITS	10
4. TEST TYPES AND RESULTS	11
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....	11
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD.....	13
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 CONDUCTED EMISSION MEASUREMENT	28
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	28
4.2.2 TEST INSTRUMENTS.....	28
4.2.3 TEST PROCEDURES	29
4.2.4 DEVIATION FROM TEST STANDARD.....	29
4.2.5 TEST SETUP.....	30
4.2.6 EUT OPERATING CONDITIONS	30
4.2.7 TEST RESULTS	31
4.3 NUMBER OF HOPPING FREQUENCY USED	37
4.3.1 LIMIT OF HOPPING FREQUENCY USED.....	37
4.3.2 TEST INSTRUMENTS.....	37
4.3.3 TEST PROCEDURES	37
4.3.4 DEVIATION FROM TEST STANDARD.....	38
4.3.5 TEST SETUP.....	38
4.3.6 TEST RESULTS	38
4.4 DWELL TIME ON EACH CHANNEL	40
4.4.1 LIMIT OF DWELL TIME USED	40
4.4.2 TEST INSTRUMENTS.....	40
4.4.3 TEST PROCEDURES	40
4.4.4 DEVIATION FROM TEST STANDARD.....	40
4.4.5 TEST SETUP.....	40



A D T

4.4.6 TEST RESULTS	41
4.5 CHANNEL BANDWIDTH	43
4.5.1 LIMITS OF CHANNEL BANDWIDTH	43
4.5.2 TEST INSTRUMENTS	43
4.5.3 TEST PROCEDURE	43
4.5.4 DEVIATION FROM TEST STANDARD	43
4.5.5 TEST SETUP	43
4.5.6 EUT OPERATING CONDITION	44
4.5.7 TEST RESULTS	44
4.6 HOPPING CHANNEL SEPARATION	45
4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION	45
4.6.2 TEST INSTRUMENTS	45
4.6.3 TEST PROCEDURES	45
4.6.4 DEVIATION FROM TEST STANDARD	45
4.6.5 TEST SETUP	45
4.6.6 TEST RESULTS	46
4.7 MAXIMUM OUTPUT POWER	47
4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	47
4.7.2 TEST INSTRUMENTS	47
4.7.3 TEST PROCEDURES	47
4.7.4 DEVIATION FROM TEST STANDARD	47
4.7.5 TEST SETUP	47
4.7.6 EUT OPERATING CONDITION	48
4.7.7 TEST RESULTS	48
4.8 BAND EDGES MEASUREMENT	49
4.8.1 LIMITS OF BAND EDGES MEASUREMENT	49
4.8.2 TEST INSTRUMENTS	49
4.8.3 TEST PROCEDURE	49
4.8.4 DEVIATION FROM TEST STANDARD	49
4.8.5 EUT OPERATING CONDITION	49
4.8.6 TEST RESULTS	50
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	53
6. INFORMATION ON THE TESTING LABORATORIES	54
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	55



A D T

1. CERTIFICATION

PRODUCT: 8-port RFID Smart Reader (902-928MHz)

BRAND: FAVITE

MODEL: FS-GF801

APPLICANT: Favite Inc.

TESTED: Apr. 28 ~ May 05, 2010

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: FS-GF801) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Polly Chien , DATE : May 11, 2010
Polly Chien / Specialist

**TECHNICAL
ACCEPTANCE** : Long Chen , DATE : May 11, 2010
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , DATE : May 11, 2010
Gary Chang / Assistant Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -7.75dB at 0.200MHz.
15.247(a)(1)(i)	Number of Hopping Frequency Used Spec.: At least 50 channels	PASS	Meet the requirement of limit.
15.247(a)(1)(i)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 20 second	PASS	Meet the requirement of limit.
15.247(a)(1)(i)	1. Hopping Channel Separation Spec.: Min. 25 kHz or 20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)(2)	Maximum Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.2dB at 70.73MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is SMA not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted Emission	150kHz ~ 30MHz	2.44 dB
Radiated emissions	150MHz ~ 200MHz	3.34 dB
	200MHz ~ 1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	8-port RFID Smart Reader (902-928MHz)
MODEL NO.	FS-GF801
FCC ID	XLG-FS-GF801
POWER SUPPLY	19 Vdc
MODULATION TYPE	PR-ASK
TRANSFER RATE	640Kbps
OPERATING FREQUENCY	902.75 ~ 927.25MHz
NUMBER OF CHANNEL	50
CHANNEL SPACING	500kHz
OUTPUT POWER	959.4mW
ANTENNA TYPE	Patch antenna with 5.85dBi gain
ANTENNA CONNECTOR	SMA
DATA CABLE	1m shielded SMA cable without core 1m non-shielded USB cable without core
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	AC adapter, Patch antenna (brand: FAVITE, model: FS-GA204)

NOTE:

1. The EUT was powered by the following adapter:

BRAND:	FSP GROUP INC.
MODEL:	FSP065-AAB
INPUT:	100-240Vac, 50-60Hz, 1.5A
OUTPUT:	19Vdc, 3.42A
POWER LINE:	AC: 1.8 m shielded cable without core DC: 1.8 m shielded cable with one core


2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

50 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	902.75	17	911.25	34	919.75
1	903.25	18	911.75	35	920.25
2	903.75	19	912.25	36	920.75
3	904.25	20	912.75	37	921.25
4	904.75	21	913.25	38	921.75
5	905.25	22	913.75	39	922.25
6	905.75	23	914.25	40	922.75
7	906.25	24	914.75	41	923.25
8	906.75	25	915.25	42	923.75
9	907.25	26	915.75	46	924.25
10	907.75	27	916.25	44	924.75
11	908.25	28	916.75	45	925.25
12	908.75	29	917.25	49	925.75
13	909.25	30	917.75	47	926.25
14	909.75	31	918.25	48	926.75
15	910.25	32	918.75	49	927.25
16	910.75	33	919.25		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

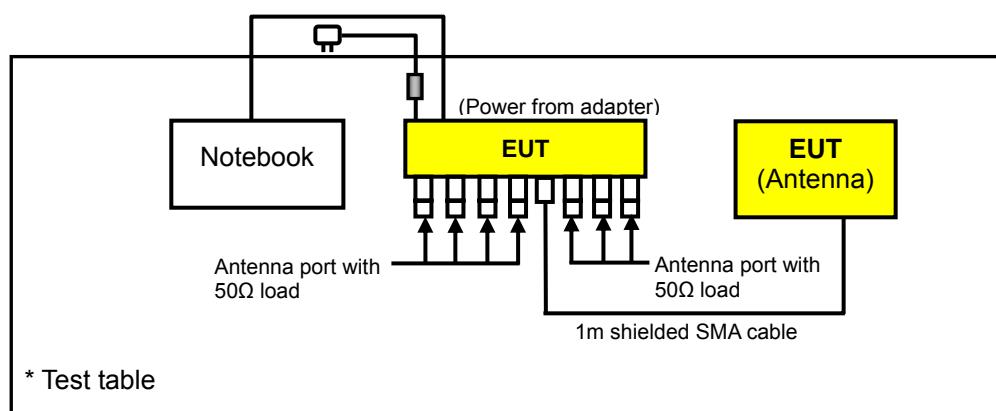

* The EUT has 8 tx ports and supports tx diversity function, but only one port can transmit at a time.
 After pretest of conducted power and spurious emission, tx port 4 is the worst port .Therefore, set EUT to transmit through tx port4 for final test.



A D T

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
-	✓	✓	✓	✓	-

Where RE≥1G: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Kbps)
-	0 to 49	0, 25, 49	PR-ASK	640Kbps

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Kbps)
-	0 to 49	0, 25, 49	PR-ASK	640Kbps

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
-	0 to 49	0, 25, 49	PR-ASK	640Kbps



A D T

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Kbps)
-	0 to 49	0, 25, 49	PR-ASK	640Kbps

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 66%RH, 1012 hPa	120Vac, 60Hz	Brad Wu
RE<1G	25deg. C, 66%RH, 1012 hPa	120Vac, 60Hz	Brad Wu
	23deg. C, 65%RH, 1016 hPa	120Vac, 60Hz	Brad Wu
PLC	25deg. C, 66%RH, 1010 hPa	120Vac, 60Hz	Dean Wang
APCM	25deg. C, 66%RH, 1012 hPa	120Vac, 60Hz	Brad Wu



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP05L	12130898320	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8m USB connector, w/o core.

NOTE: All power cords of the above support units are non-shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jul. 06, 2009	Jul. 05, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100076	May 26, 2009	May 25, 2010
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 27, 2010	Apr. 26, 2011
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jul. 01, 2009	Jun. 30, 2010
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2009	Dec. 24, 2010
Preamplifier Agilent	8447D	2944A10633	Nov. 10, 2009	Nov. 09, 2010
Preamplifier Agilent	8449B	3008A01964	Nov. 09, 2009	Nov. 08, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 13, 2009	May 12, 2010
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 13, 2009	May 12, 2010
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

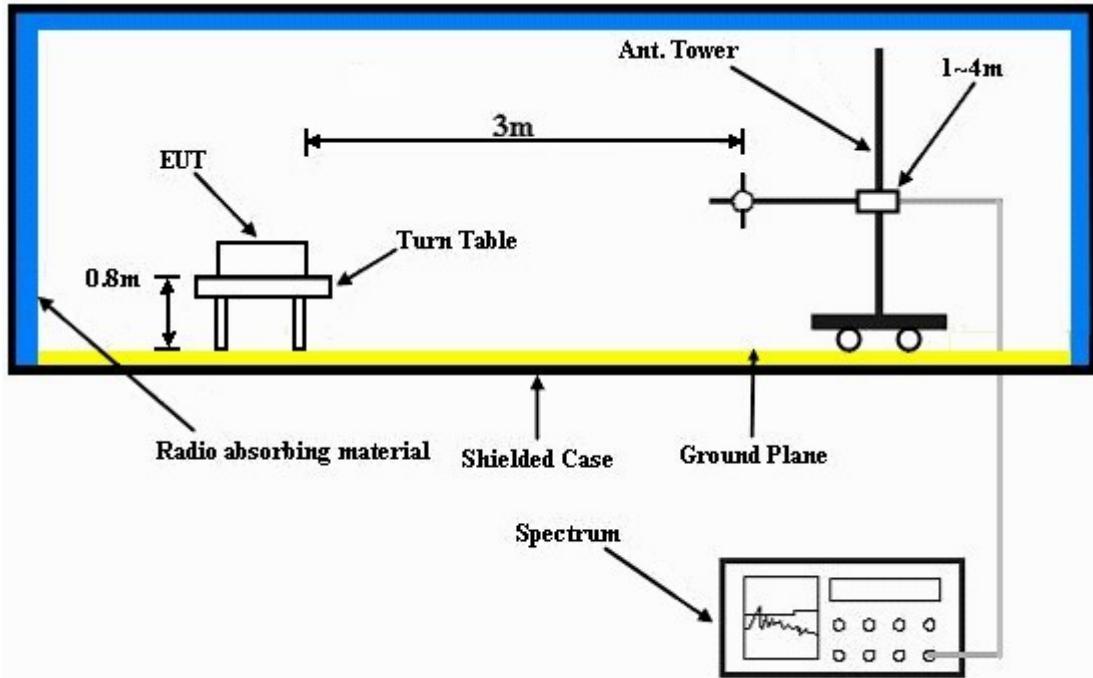

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the system in full functions.



A D T

4.1.7 TEST RESULTS

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 0		FREQUENCY RANGE Below 1GHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 66%RH 1012 hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#902.00	70.5 PK	115.5	-45.0	1.09 H	168	42.5	28.0
2	#902.00	44.9 AV	101.9	-57.0	1.09 H	168	16.9	28.0
3	*902.75	135.5 PK			1.09 H	168	107.5	28.0
4	*902.75	121.9 AV			1.09 H	168	93.9	28.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#902.00	68.3 PK	113.4	-45.1	1.36 V	185	40.3	28.0
2	#902.00	42.7 AV	99.8	-57.1	1.36 V	185	14.7	28.0
3	*902.75	133.4 PK			1.36 V	185	105.4	28.0
4	*902.75	119.8 AV			1.36 V	185	91.8	28.0

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency
 6. “#”: The radiated frequency is out the restricted band.
 7. The average value of fundamental frequency and harmonics is calculated by using formula as below
- Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
- 20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
- Therefore
- Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
- Please see page 24 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 25	FREQUENCY RANGE	Below 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1012 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*915.25	135.2 PK			1.10 H	168	107.0	28.2
2	*915.25	121.4 AV			1.10 H	168	93.2	28.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*915.25	133.0 PK			1.35 V	186	104.8	28.2
2	*915.25	119.2 AV			1.35 V	186	91.0	28.2

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency
 6. The average value of fundamental frequency and harmonics is calculated by using formula as below
Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
Please see page 24 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 49	FREQUENCY RANGE	Below 1GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1012 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*927.25	134.3 PK			1.06 H	170	106.0	28.3
2	*927.25	120.5 AV			1.06 H	170	92.2	28.3
3	#928.00	71.2 PK	114.3	-43.1	1.06 H	170	42.9	28.3
4	#928.00	43.7AV	100.5	-56.8	1.06 H	170	15.4	28.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*927.25	132.2 PK			1.31 V	182	103.9	28.3
2	*927.25	118.4 AV			1.31 V	182	90.1	28.3
3	#928.00	68.7 PK	112.2	-43.5	1.31 V	182	40.4	28.3
4	#928.00	42.3 AV	98.4	-56.1	1.31 V	182	14.0	28.3

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency
6. “#”: The radiated frequency is out the restricted band.
7. The average value of fundamental frequency and harmonics is calculated by using formula as below

$$\text{Average} = \text{Reading value of RBW=1MHz and VBW=10Hz} + 20 \log (\text{duty cycle of normal operation})$$

$$20 \log (\text{duty cycle of normal operation}) = 20 \log (22.6 \text{ ms} / 100 \text{ ms}) = -12.9 \text{ dB}$$

$$\text{Therefore}$$

$$\text{Average} = \text{Reading value of RBW=1MHz and VBW=10Hz} - 12.9 \text{ dB}$$

$$\text{Please see page 24 for plotted duty.}$$



A D T

ABOVE 1GHz DATA

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1805.50	52.6 PK	115.5	-62.9	1.17 H	55	23.80	28.80
2	#1805.50	37.2 AV	101.9	-64.7	1.17 H	55	8.40	28.80
3	2708.25	59.5 PK	74.0	-14.5	1.03 H	65	28.00	31.50
4	2708.25	43.8 AV	54.0	-10.2	1.03 H	65	12.30	31.50
5	3611.00	62.8 PK	74.0	-11.2	1.00 H	99	29.80	33.00
6	3611.00	46.9 AV	54.0	-7.1	1.00 H	99	13.90	33.00
7	4513.75	51.8 PK	74.0	-22.2	1.01 H	279	16.20	35.60
8	4513.75	30.7 AV	54.0	-23.3	1.01 H	279	-4.90	35.60
9	5416.50	51.9 PK	74.0	-22.1	1.03 H	41	14.60	37.30
10	5416.50	29.3 AV	54.0	-24.7	1.03 H	41	-8.00	37.30
11	#6319.25	56.4 PK	115.5	-59.1	1.08 H	41	16.80	39.60
12	#6319.25	36.9 AV	101.9	-65.0	1.08 H	41	-2.70	39.60
13	#7222.00	56.1 PK	115.5	-59.4	1.47 H	42	13.70	42.40
14	#7222.00	34.4 AV	101.9	-67.5	1.47 H	42	-8.00	42.40
15	8124.75	57.7 PK	74.0	-16.3	1.06 H	7	13.70	44.00
16	8124.75	35.9 AV	54.0	-18.1	1.06 H	7	-8.10	44.00
17	9027.50	58.9 PK	74.0	-15.1	1.25 H	243	13.70	45.20
18	9027.50	34.5 AV	54.0	-19.5	1.25 H	243	-10.70	45.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "#": The radiated frequency is out the restricted band.
 6. The average value of fundamental frequency and harmonics is calculated by using formula as below
Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
Please see page 24 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1012 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1805.50	59.9 PK	113.4	-53.5	1.01 V	180	31.10	28.80
2	#1805.50	44.4 AV	99.8	-55.4	1.01 V	180	15.60	28.80
3	2708.25	62.9 PK	74.0	-11.1	1.03 V	15	31.40	31.50
4	2708.25	47.4 AV	54.0	-6.6	1.03 V	15	15.90	31.50
5	3611.00	67.7 PK	74.0	-6.3	1.00 V	161	34.70	33.00
6	3611.00	51.6 AV	54.0	-2.4	1.00 V	161	18.60	33.00
7	4513.75	55.1 PK	74.0	-18.9	1.09 V	156	19.50	35.60
8	4513.75	36.7 AV	54.0	-17.3	1.09 V	156	1.10	35.60
9	5416.50	55.7 PK	74.0	-18.3	1.35 V	42	18.40	37.30
10	5416.50	35.8 AV	54.0	-18.2	1.35 V	42	-1.50	37.30
11	#6319.25	61.4 PK	113.4	-52.0	1.02 V	313	21.80	39.60
12	#6319.25	43.7 AV	99.8	-56.1	1.02 V	313	4.10	39.60
13	#7222.00	58.7 PK	113.4	-54.7	1.01 V	354	16.30	42.40
14	#7222.00	39.3 AV	99.8	-60.5	1.01 V	354	-3.10	42.40
15	8124.75	63.8 PK	74.0	-10.2	1.00 V	334	19.80	44.00
16	8124.75	44.2 AV	54.0	-9.8	1.00 V	334	0.20	44.00
17	9027.50	62.1 PK	74.0	-11.9	1.03 V	342	16.90	45.20
18	9027.50	41.2 AV	54.0	-12.8	1.03 V	342	-4.00	45.20

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "#": The radiated frequency is out the restricted band.
 6. The average value of fundamental frequency and harmonics is calculated by using formula as below
Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
Please see page 24 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 25	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1012 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1830.50	52.3 PK	115.2	-62.9	1.15 H	59	23.50	28.80
2	#1830.50	36.9 AV	101.4	-64.5	1.15 H	59	8.10	28.80
3	2745.75	62.7 PK	74.0	-11.3	1.01 H	63	31.10	31.60
4	2745.75	47.0 AV	54.0	-7.0	1.01 H	63	15.40	31.60
5	3661.00	62.2 PK	74.0	-11.8	1.00 H	102	29.00	33.20
6	3661.00	46.2 AV	54.0	-7.8	1.00 H	102	13.00	33.20
7	4576.25	50.3 PK	74.0	-23.7	1.00 H	283	14.50	35.80
8	4576.25	29.3 AV	54.0	-24.7	1.00 H	283	-6.50	35.80
9	#5491.50	53.4 PK	115.2	-61.8	1.02 H	47	16.00	37.40
10	#5491.50	30.9 AV	101.4	-70.5	1.02 H	47	-6.50	37.40
11	#6406.75	55.1 PK	115.2	-60.1	1.03 H	52	15.20	39.90
12	#6406.75	35.5 AV	101.4	-65.9	1.03 H	52	-4.40	39.90
13	7322.00	58.7 PK	74.0	-15.3	1.12 H	38	16.10	42.60
14	7322.00	37.6 AV	54.0	-16.4	1.12 H	38	-5.00	42.60
15	8237.25	53.5 PK	74.0	-20.5	1.02 H	11	9.50	44.00
16	8237.25	32.0 AV	54.0	-22.0	1.02 H	11	-12.00	44.00
17	9152.50	60.5 PK	74.0	-13.5	1.16 H	229	15.00	45.50
18	9152.50	36.4 AV	54.0	-17.6	1.16 H	229	-9.10	45.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "#": The radiated frequency is out the restricted band.
 6. The average value of fundamental frequency and harmonics is calculated by using formula as below
Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
Please see page 24 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 25	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1012 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1830.50	58.7 PK	110.0	-51.3	1.03 V	182	29.90	28.80
2	#1830.50	43.8 AV	99.2	-55.4	1.03 V	182	15.00	28.80
3	2745.75	66.0 PK	74.0	-8.0	1.00 V	15	34.40	31.60
4	2745.75	50.5 AV	54.0	-3.5	1.00 V	15	18.90	31.60
5	3661.00	66.7 PK	74.0	-7.3	1.00 V	159	33.50	33.20
6	3661.00	50.9 AV	54.0	-3.1	1.00 V	159	17.70	33.20
7	4576.25	54.0 PK	74.0	-20.0	1.07 V	168	18.20	35.80
8	4576.25	34.7 AV	54.0	-19.3	1.07 V	168	-1.10	35.80
9	#5491.50	56.6 PK	110.0	-53.4	1.31 V	37	19.20	37.40
10	#5491.50	37.4 AV	99.2	-61.8	1.31 V	37	0.00	37.40
11	#6406.75	60.5 PK	110.0	-49.5	1.01 V	312	20.60	39.90
12	#6406.75	42.0 AV	99.2	-57.2	1.01 V	312	2.10	39.90
13	7322.00	60.1 PK	74.0	-13.9	1.00 V	348	17.50	42.60
14	7322.00	42.5 AV	54.0	-11.5	1.00 V	348	-0.10	42.60
15	8237.25	60.3 PK	74.0	-13.7	1.18 V	332	16.30	44.00
16	8237.25	38.7 AV	54.0	-15.3	1.18 V	332	-5.30	44.00
17	9152.50	62.5 PK	74.0	-11.5	1.00 V	354	17.00	45.50
18	9152.50	43.0 AV	54.0	-11.0	1.00 V	354	-2.50	45.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "#": The radiated frequency is out the restricted band.
 6. The average value of fundamental frequency and harmonics is calculated by using formula as below
Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
Please see page 24 for plotted duty.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 49	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1012 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1854.50	47.4 PK	114.3	-66.9	1.08 H	107	18.60	28.80
2	#1854.50	30.6 AV	100.5	-69.9	1.08 H	107	1.80	28.80
3	2781.75	62.0 PK	74.0	-12.0	1.02 H	67	30.30	31.70
4	2781.75	46.2 AV	54.0	-7.8	1.02 H	67	14.50	31.70
5	3709.00	56.7 PK	74.0	-17.3	1.27 H	101	23.30	33.40
6	3709.00	40.4 AV	54.0	-13.6	1.27 H	101	7.00	33.40
7	4636.25	47.5 PK	74.0	-26.5	1.03 H	252	11.60	35.90
8	4636.25	24.0 AV	54.0	-30.0	1.03 H	252	-11.90	35.90
9	#5563.50	53.8 PK	114.3	-60.5	1.37 H	43	16.30	37.50
10	#5563.50	32.1 AV	100.5	-68.4	1.37 H	43	-5.40	37.50
11	#6490.75	56.6 PK	114.3	-57.7	1.73 H	40	16.40	40.20
12	#6490.75	37.0 AV	100.5	-63.5	1.73 H	40	-3.20	40.20
13	7418.00	59.5 PK	74.0	-14.5	1.53 H	133	16.70	42.80
14	7418.00	38.4 AV	54.0	-15.6	1.53 H	133	-4.40	42.80
15	8345.25	56.9 PK	74.0	-17.1	1.10 H	10	12.80	44.10
16	8345.25	33.0 AV	54.0	-21.0	1.10 H	10	-11.10	44.10
17	#9272.50	57.8 PK	114.3	-56.5	1.00 H	16	12.00	45.80
18	#9272.50	32.7 AV	100.5	-67.8	1.00 H	16	-13.10	45.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "#": The radiated frequency is out the restricted band.
 6. The average value of fundamental frequency and harmonics is calculated by using formula as below
Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
Please see page 24 for plotted duty.



A D T



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 49	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1012 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#1854.50	54.5 PK	112.2	-57.7	1.01 V	159	25.70	28.80
2	#1854.50	39.4 AV	98.4	-59.0	1.01 V	159	10.60	28.80
3	2781.75	66.9 PK	74.0	-7.1	1.19 V	339	35.20	31.70
4	2781.75	50.9 AV	54.0	-3.1	1.19 V	339	19.20	31.70
5	3709.00	66.2 PK	74.0	-7.8	1.40 V	2	32.80	33.40
6	3709.00	50.7 AV	54.0	-3.3	1.40 V	2	17.30	33.40
7	4636.25	51.7 PK	74.0	-22.3	1.00 V	344	15.80	35.90
8	4636.25	31.8 AV	54.0	-22.2	1.00 V	344	-4.10	35.90
9	#5563.50	55.4 PK	112.2	-56.8	1.19 V	46	17.90	37.50
10	#5563.50	34.6 AV	98.4	-63.8	1.19 V	46	-2.90	37.50
11	#6490.75	58.7 PK	112.2	-53.5	1.08 V	331	18.50	40.20
12	#6490.75	39.5 AV	98.4	-58.9	1.08 V	331	-0.70	40.20
13	7418.00	65.4 PK	74.0	-8.6	1.84 V	346	22.60	42.80
14	7418.00	46.7 AV	54.0	-7.3	1.84 V	346	3.90	42.80
15	8345.25	58.9 PK	74.0	-15.1	1.72 V	347	14.80	44.10
16	8345.25	38.9 AV	54.0	-15.1	1.72 V	347	-5.20	44.10
17	#9272.50	62.8 PK	112.2	-49.4	1.00 V	353	17.00	45.80
18	#9272.50	42.1 AV	98.4	-56.3	1.00 V	353	-3.70	45.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "#": The radiated frequency is out the restricted band.
 6. The average value of fundamental frequency and harmonics is calculated by using formula as below
Average = Reading value of RBW=1MHz and VBW=10Hz + 20 log (duty cycle of normal operation)
20 log (duty cycle of normal operation) = 20 log (22.6 ms / 100 ms) = -12.9 dB
Therefore
Average=Reading value of RBW=1MHz and VBW=10Hz -12.9 dB
Please see page 24 for plotted duty.



A D T

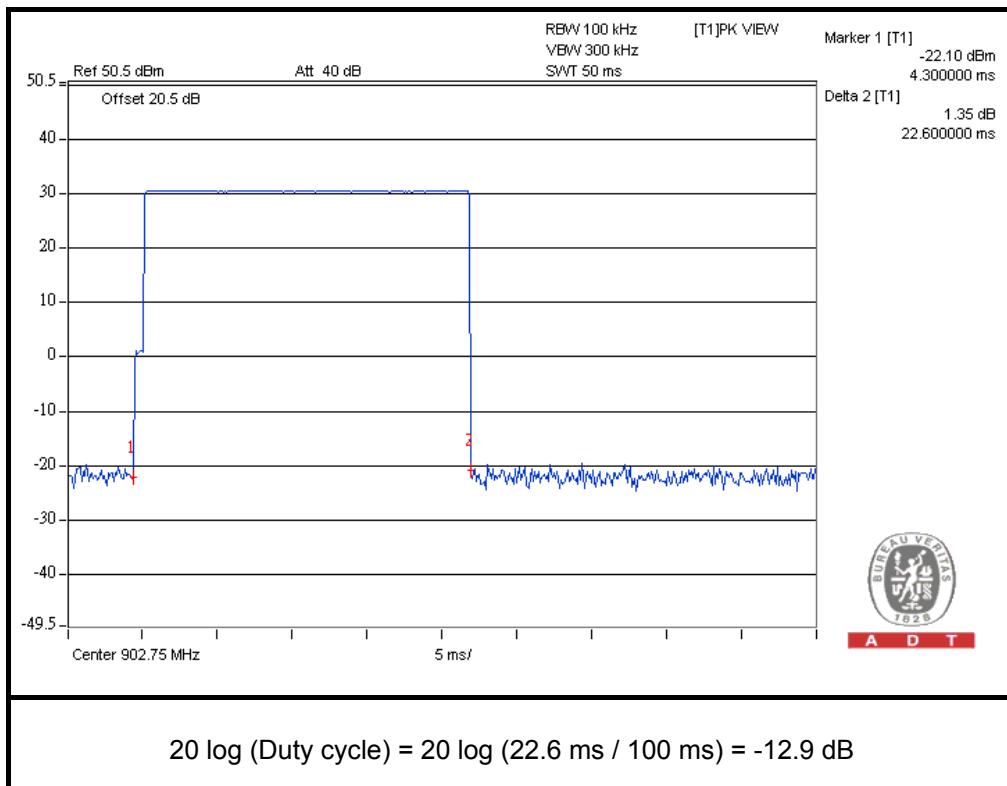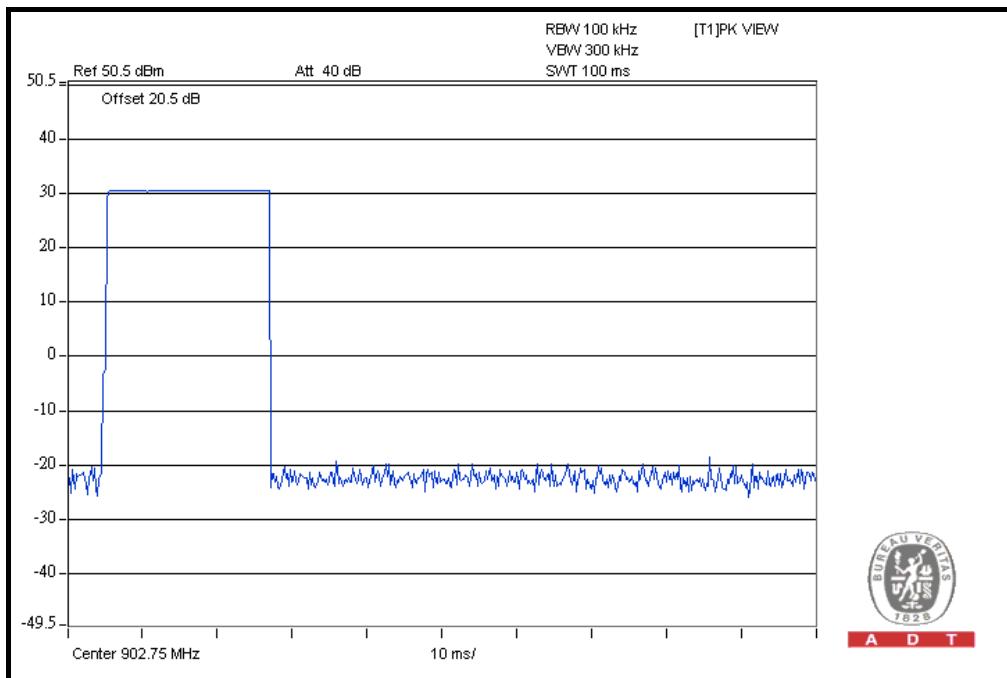

$$20 \log (\text{Duty cycle}) = 20 \log (22.6 \text{ ms} / 100 \text{ ms}) = -12.9 \text{ dB}$$



A D T

BELOW 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 0		FREQUENCY RANGE Below 1000MHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION Quasi-Peak
ENVIRONMENTAL CONDITIONS		23deg. C, 65%RH 1016 hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.73	32.1 QP	40.0	-7.9	2.00 H	334	19.20	12.90
2	201.00	33.3 QP	43.5	-10.2	1.50 H	124	22.70	10.60
3	288.49	31.7 QP	46.0	-14.3	1.00 H	340	17.90	13.80
4	541.25	43.3 QP	46.0	-2.7	2.00 H	55	22.00	21.30
5	799.84	38.3 QP	46.0	-7.7	1.00 H	52	12.20	26.10
6	883.44	33.1 QP	46.0	-12.9	1.00 H	202	5.50	27.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	34.4 QP	40.0	-5.6	1.00 V	217	19.60	14.80
2	70.73	37.0 QP	40.0	-3.0	1.50 V	43	24.10	12.90
3	105.73	37.2 QP	43.5	-6.3	1.00 V	10	25.60	11.60
4	543.19	41.8 QP	46.0	-4.2	2.00 V	259	20.40	21.40
5	704.57	32.2 QP	46.0	-13.8	1.50 V	10	7.10	25.10
6	889.28	35.6 QP	46.0	-10.4	1.00 V	103	7.90	27.70

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 25	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1016 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.73	32.5 QP	40.0	-7.5	1.50 H	115	19.60	12.90
2	175.72	33.5 QP	43.5	-10.0	2.00 H	133	20.30	13.20
3	288.49	32.2 QP	46.0	-13.8	1.00 H	337	18.40	13.80
4	560.69	38.8 QP	46.0	-7.2	1.00 H	94	17.10	21.70
5	718.18	32.4 QP	46.0	-13.6	1.00 H	82	7.10	25.30
6	799.84	35.7 QP	46.0	-10.3	1.00 H	319	9.60	26.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	35.0 QP	40.0	-5.0	1.00 V	199	20.20	14.80
2	70.73	37.8 QP	40.0	-2.2	1.50 V	121	24.90	12.90
3	105.73	37.0 QP	43.5	-6.5	2.00 V	79	25.40	11.60
4	339.04	33.7 QP	46.0	-12.3	2.00 V	121	18.20	15.50
5	556.80	37.0 QP	46.0	-9.0	1.50 V	16	15.40	21.60
6	799.84	37.0 QP	46.0	-9.0	2.00 V	94	10.90	26.10

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 49	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 65%RH 1016 hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.73	36.8 QP	40.0	-3.2	2.00 H	157	23.90	12.90
2	216.55	33.0 QP	46.0	-13.0	1.00 H	52	21.40	11.60
3	399.31	31.7 QP	46.0	-14.3	1.50 H	106	13.60	18.10
4	558.75	31.8 QP	46.0	-14.2	1.00 H	97	10.10	21.70
5	731.79	31.9 QP	46.0	-14.1	1.00 H	328	6.50	25.40
6	799.84	37.4 QP	46.0	-8.6	1.00 H	37	11.30	26.10
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	34.6 QP	40.0	-5.4	1.50 V	202	19.80	14.80
2	70.73	37.6 QP	40.0	-2.4	2.00 V	106	24.70	12.90
3	105.73	38.5 QP	43.5	-5.0	2.00 V	10	26.90	11.60
4	558.75	32.3 QP	46.0	-13.7	1.50 V	112	10.60	21.70
5	795.95	37.0 QP	46.0	-9.0	2.00 V	1	11.00	26.00
6	957.33	36.8 QP	46.0	-9.2	1.00 V	106	8.20	28.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 24, 2009	Sep. 23, 2010
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2009	Dec. 30, 2010
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Aug. 24, 2009	Aug. 23, 2010
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 29, 2009	Jul. 28, 2010
Software ADT	ADT_Cond_V7.3.7	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

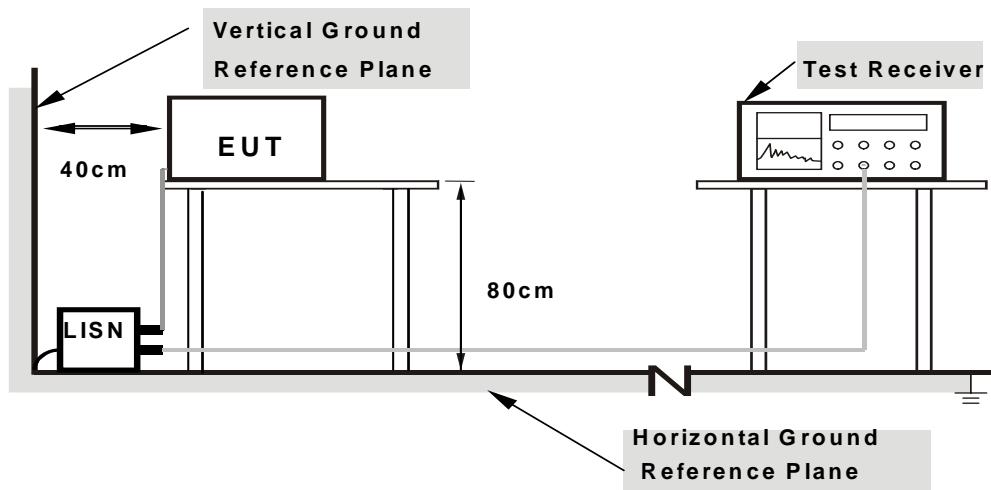

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA

CHANNEL	Channel 0	6dB BANDWIDTH	9kHz
PHASE	Line 1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
		(dB)								
1	0.201	0.16	54.94	42.81	55.10	42.97	63.58	53.58	-8.48	-10.61
2	0.267	0.17	46.92	-	47.09	-	61.20	51.20	-14.12	-
3	0.334	0.17	39.74	-	39.91	-	59.36	49.36	-19.45	-
4	0.466	0.19	34.52	-	34.71	-	56.58	46.58	-21.87	-
5	4.921	0.35	31.83	-	32.18	-	56.00	46.00	-23.82	-
6	19.806	0.68	36.49	-	37.17	-	60.00	50.00	-22.83	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

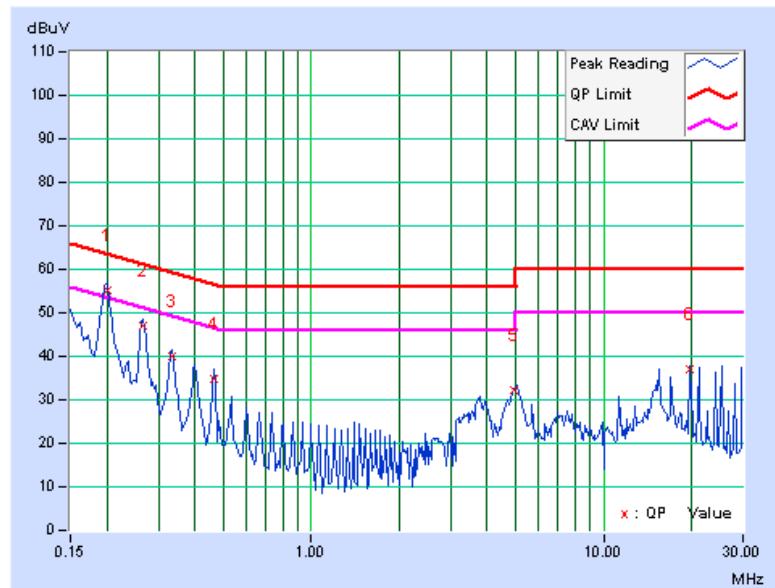

CHANNEL	Channel 0	6dB BANDWIDTH	9kHz
PHASE	Line 2		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.200	0.13	55.75	43.73	55.88	43.86	63.63	53.63	-7.75	-9.77
2	0.267	0.14	47.26	-	47.40	-	61.20	51.20	-13.80	-
3	0.334	0.15	40.16	-	40.31	-	59.36	49.36	-19.05	-
4	0.466	0.17	33.95	-	34.12	-	56.58	46.58	-22.46	-
5	4.789	0.37	34.10	-	34.47	-	56.00	46.00	-21.53	-
6	25.488	0.85	35.63	-	36.48	-	60.00	50.00	-23.52	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

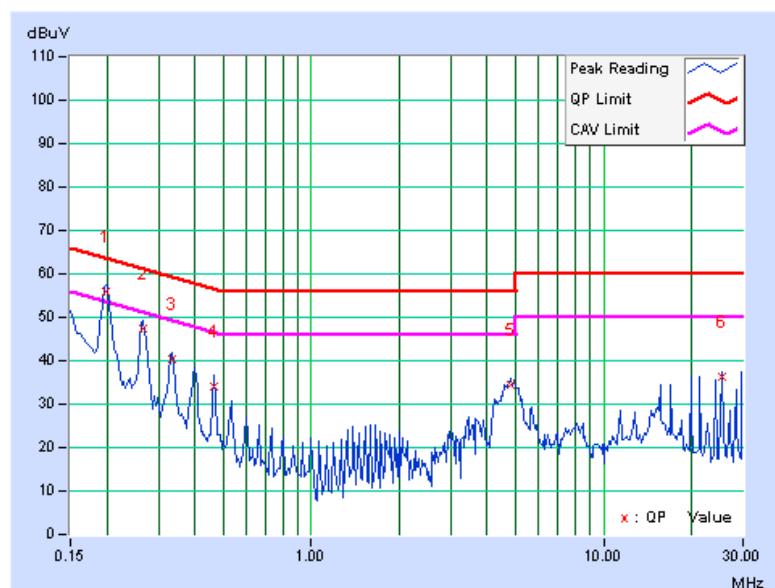

CHANNEL	Channel 25	6dB BANDWIDTH	9kHz
PHASE	Line 1		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)			
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.16	54.72	42.09	54.88	42.25	63.58	53.58	-8.70	-11.33
2	0.267	0.17	46.21	-	46.38	-	61.20	51.20	-14.83	-
3	0.334	0.17	39.02	-	39.19	-	59.36	49.36	-20.17	-
4	0.400	0.18	34.94	-	35.12	-	57.85	47.85	-22.73	-
5	4.854	0.35	29.89	-	30.24	-	56.00	46.00	-25.76	-
6	21.201	0.67	36.21	-	36.88	-	60.00	50.00	-23.12	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

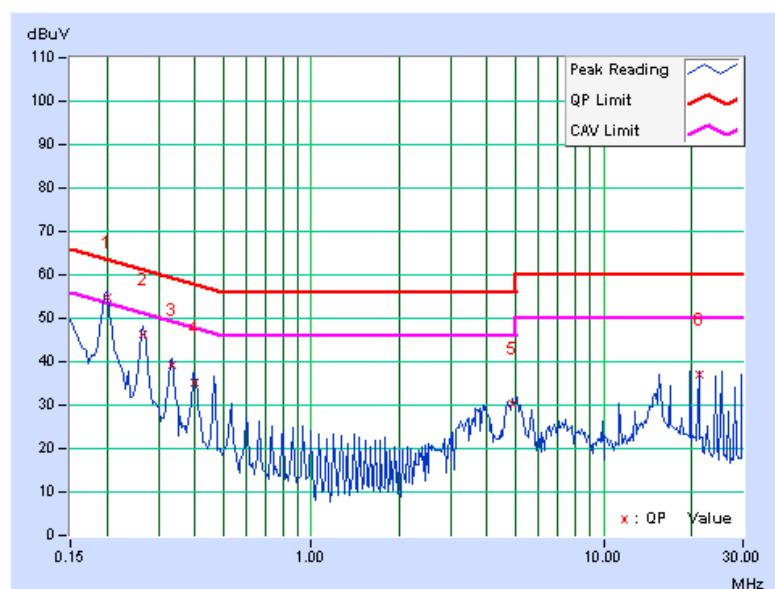


CHANNEL	Channel 25	6dB BANDWIDTH	9kHz
PHASE	Line 2		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.201	0.13	54.74	42.45	54.87	42.58	63.58	53.58	-8.71	-11.00
2	0.267	0.14	46.60	-	46.74	-	61.20	51.20	-14.46	-
3	0.334	0.15	39.50	-	39.65	-	59.36	49.36	-19.71	-
4	0.400	0.16	35.54	-	35.70	-	57.85	47.85	-22.15	-
5	4.789	0.37	33.35	-	33.72	-	56.00	46.00	-22.28	-
6	19.794	0.91	34.89	-	35.80	-	60.00	50.00	-24.20	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

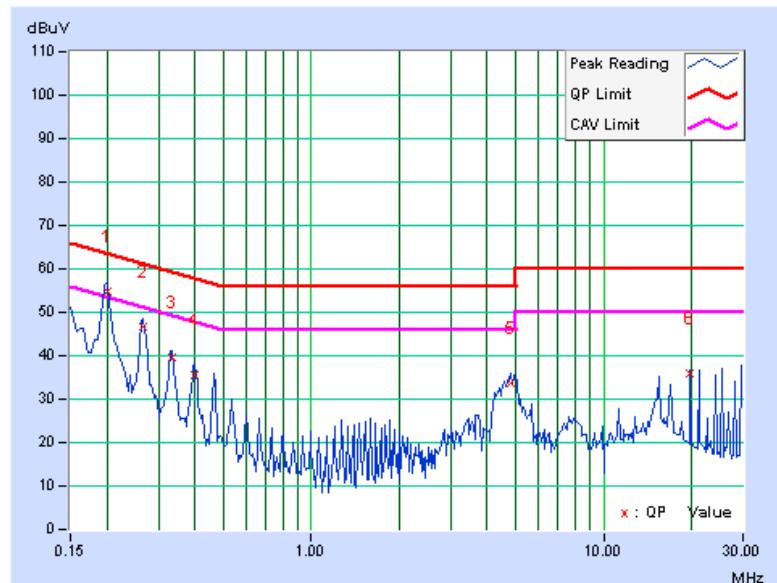

CHANNEL	Channel 49	6dB BANDWIDTH	9kHz
PHASE	Line 1		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)			
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.201	0.16	53.62	41.14	53.78	41.30	63.58	53.58	-9.80	-12.28
2	0.267	0.17	45.59	-	45.76	-	61.20	51.20	-15.45	-
3	0.334	0.17	38.64	-	38.81	-	59.36	49.36	-20.55	-
4	0.400	0.18	34.76	-	34.94	-	57.85	47.85	-22.91	-
5	4.923	0.35	31.18	-	31.53	-	56.00	46.00	-24.47	-
6	19.780	0.68	36.26	-	36.94	-	60.00	50.00	-23.06	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

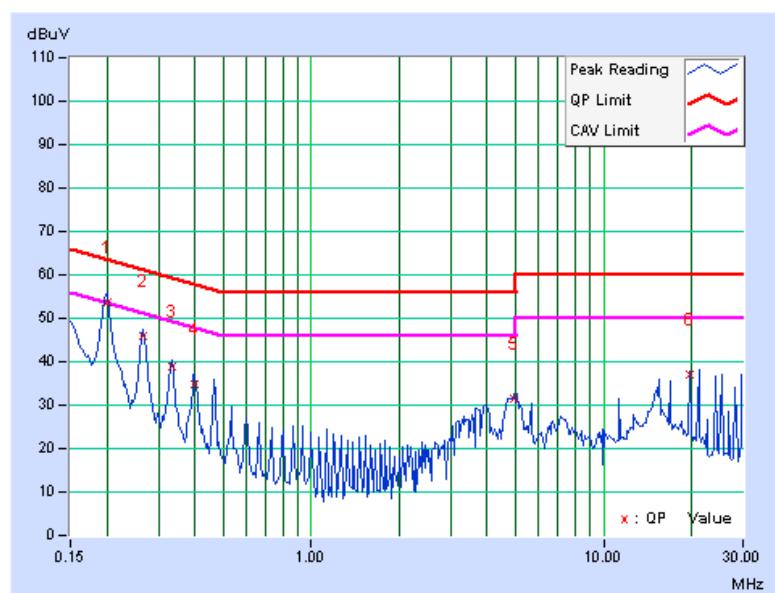

CHANNEL	Channel 49	6dB BANDWIDTH	9kHz
PHASE	Line 2		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.201	0.13	54.08	41.64	54.21	41.77	63.58	53.58	-9.37	-11.81
2	0.267	0.14	45.83	-	45.97	-	61.20	51.20	-15.23	-
3	0.335	0.15	38.15	-	38.30	-	59.33	49.33	-21.03	-
4	0.400	0.16	35.08	-	35.24	-	57.85	47.85	-22.61	-
5	4.789	0.37	33.90	-	34.27	-	56.00	46.00	-21.73	-
6	19.781	0.91	34.67	-	35.58	-	60.00	50.00	-24.42	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

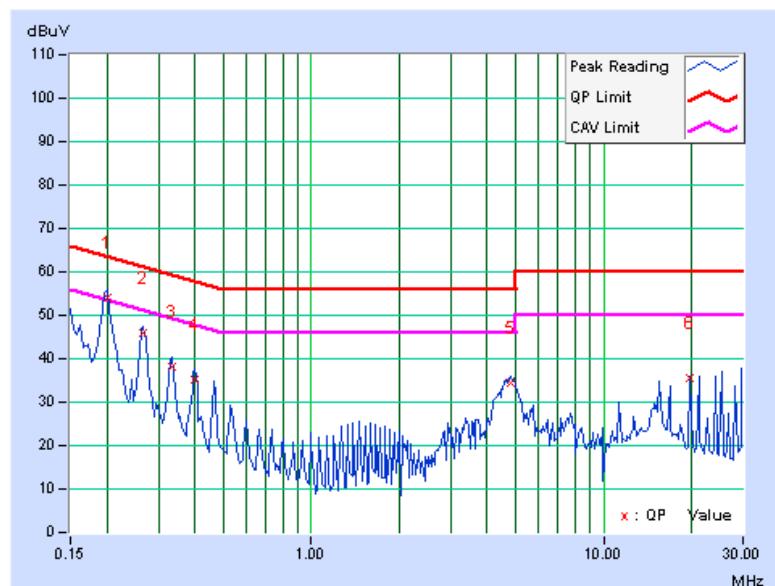



4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 50 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP




4.3.6 TEST RESULTS

There are 50 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T

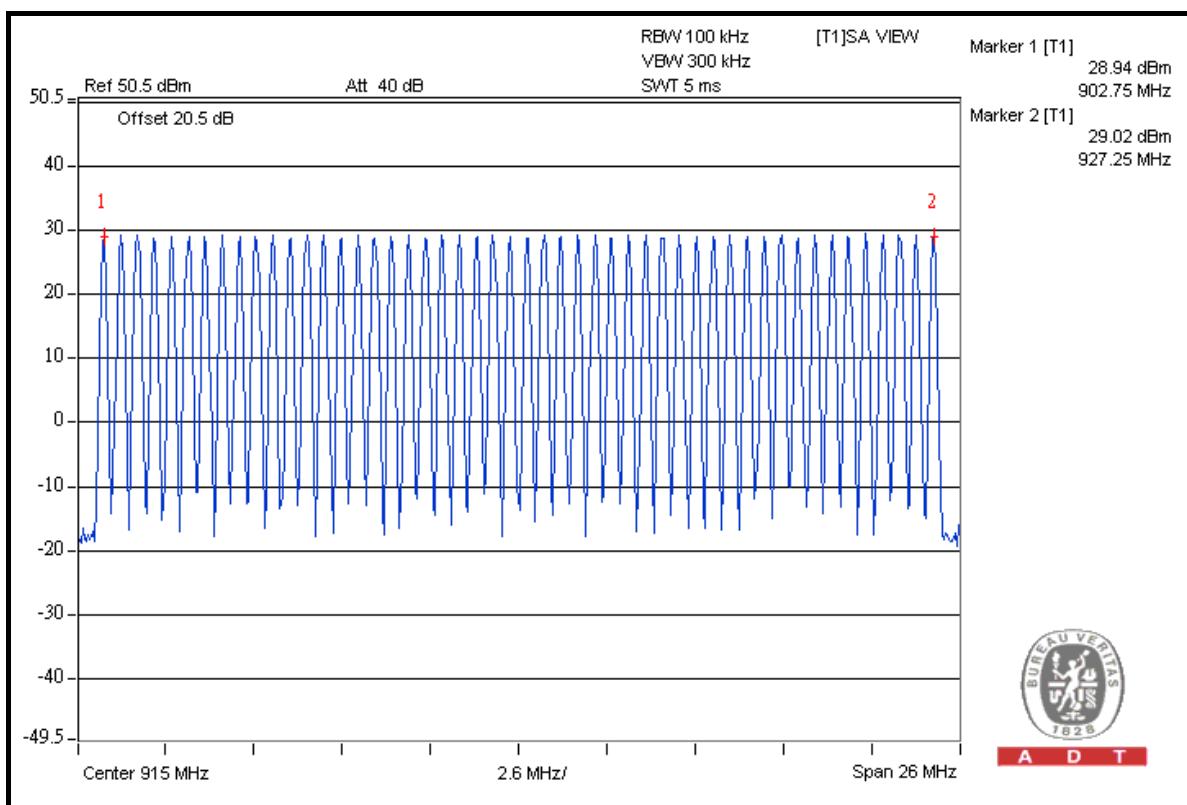



4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

Same as 4.3.5.



A D T



4.4.6 TEST RESULTS

Length of transmission time (ms)	TX Burst of 20s period	Result	Limit
22.6	17	384.2ms / 20s	400ms / 20s

NOTE: Test plots of the transmitting time slot are shown on next page.



A D T

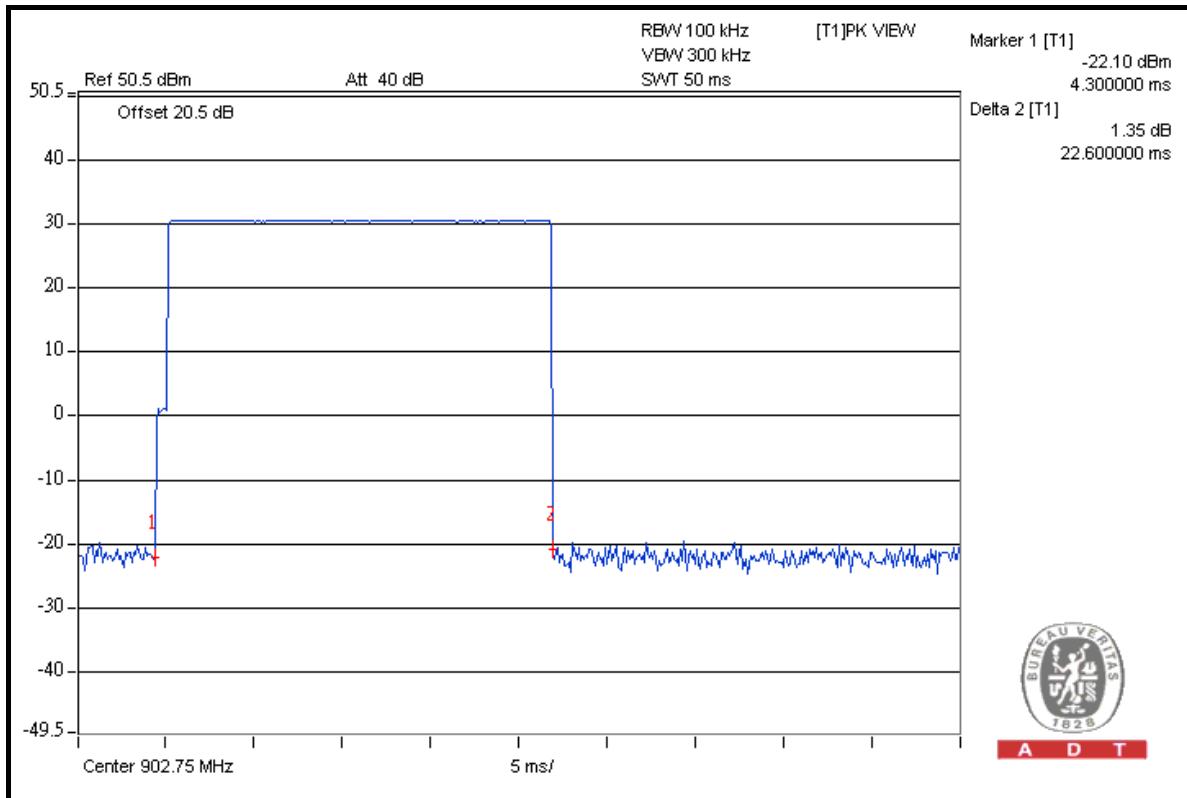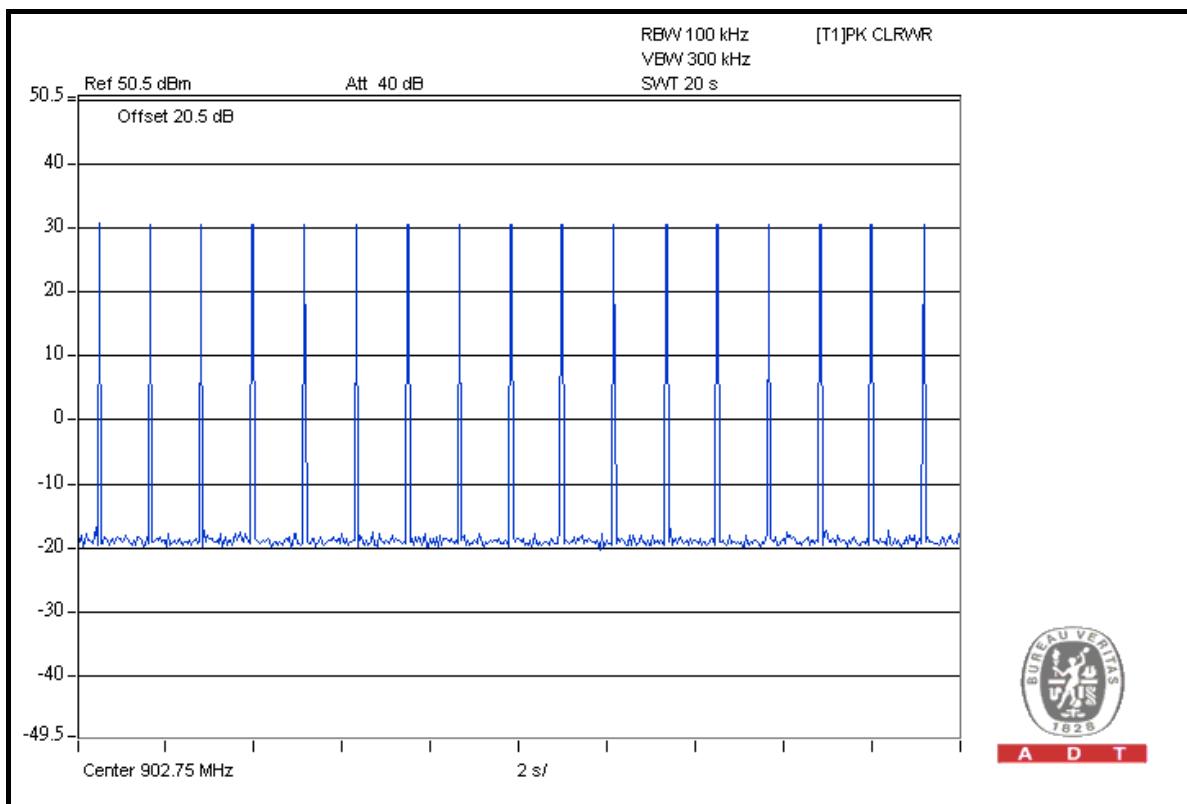



4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

The 20 dB bandwidth of the hopping channel shall be less than 250 kHz.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.

4.5.5 TEST SETUP

Same as 4.3.5.


4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)	LIMIT (kHz)
0	902.75	62.0	250
25	915.25	57.0	250
49	927.25	60.0	250

CH 0

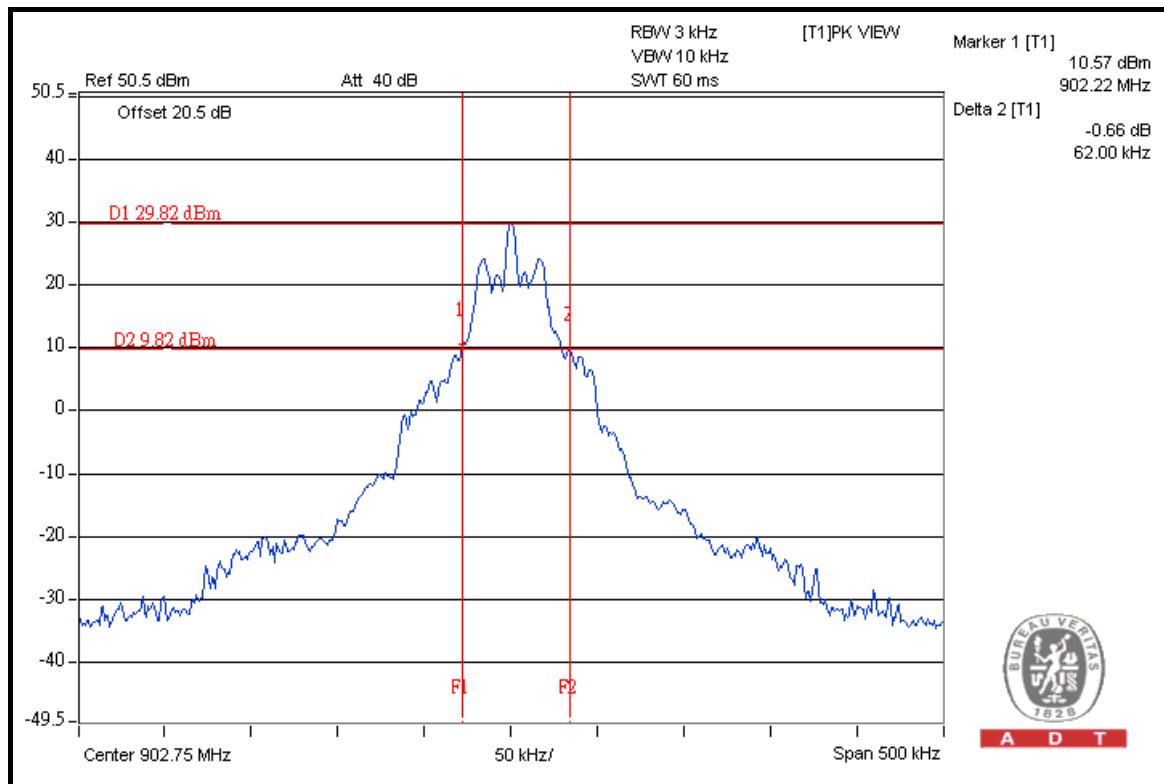



4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.


4.6.5 TEST SETUP

Same as 4.3.5

4.6.6 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (kHz)	MINIMUM LIMIT (kHz)	PASS / FAIL
0	902.75	504.0	62.0	PASS
25	915.25	500.0	57.0	PASS
49	927.25	502.0	60.0	PASS

CH 0

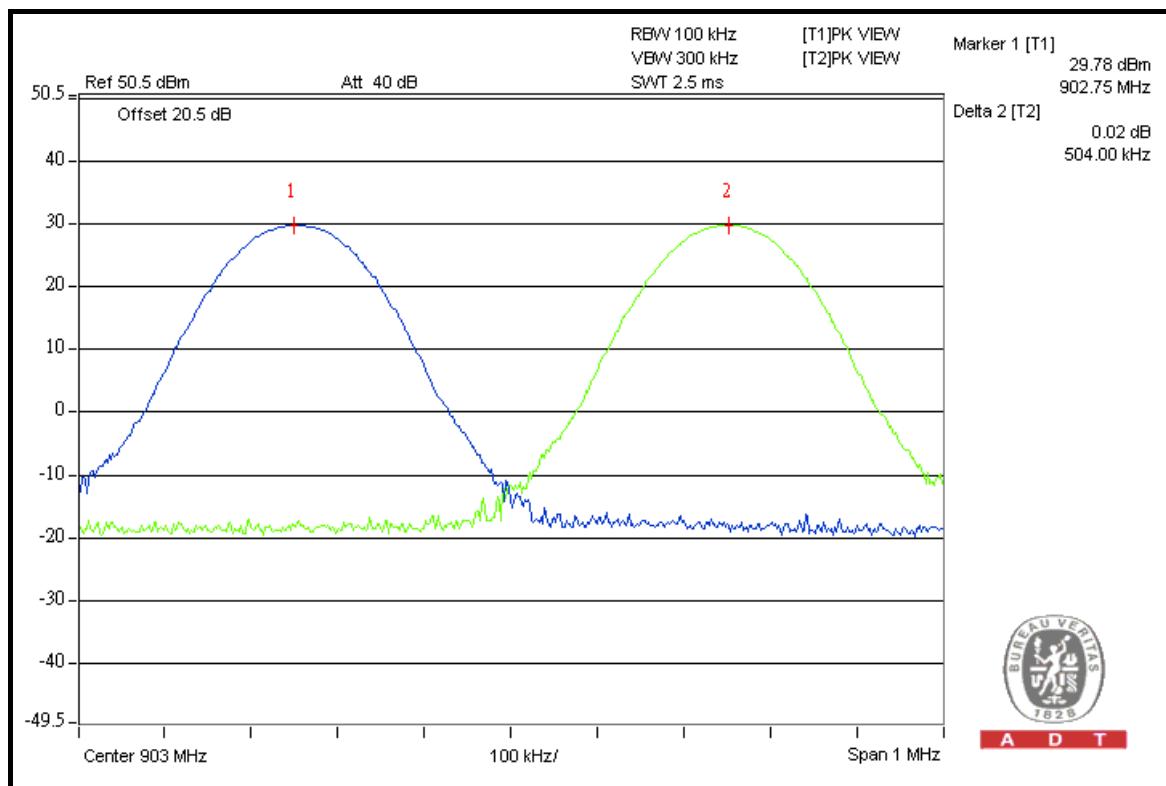



4.7 MAXIMUM OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 30dBm.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1MHz RBW and 3 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

Same as 4.3.5.


4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	POWER OUTPUT (mW)	POWER OUTPUT (dBm)	POWER LIMIT (dBm)	PASS/FAIL
0	902.75	959.4	29.8	30	PASS
25	915.25	957.2	29.8	30	PASS
49	927.25	959.4	29.8	30	PASS

CH 0

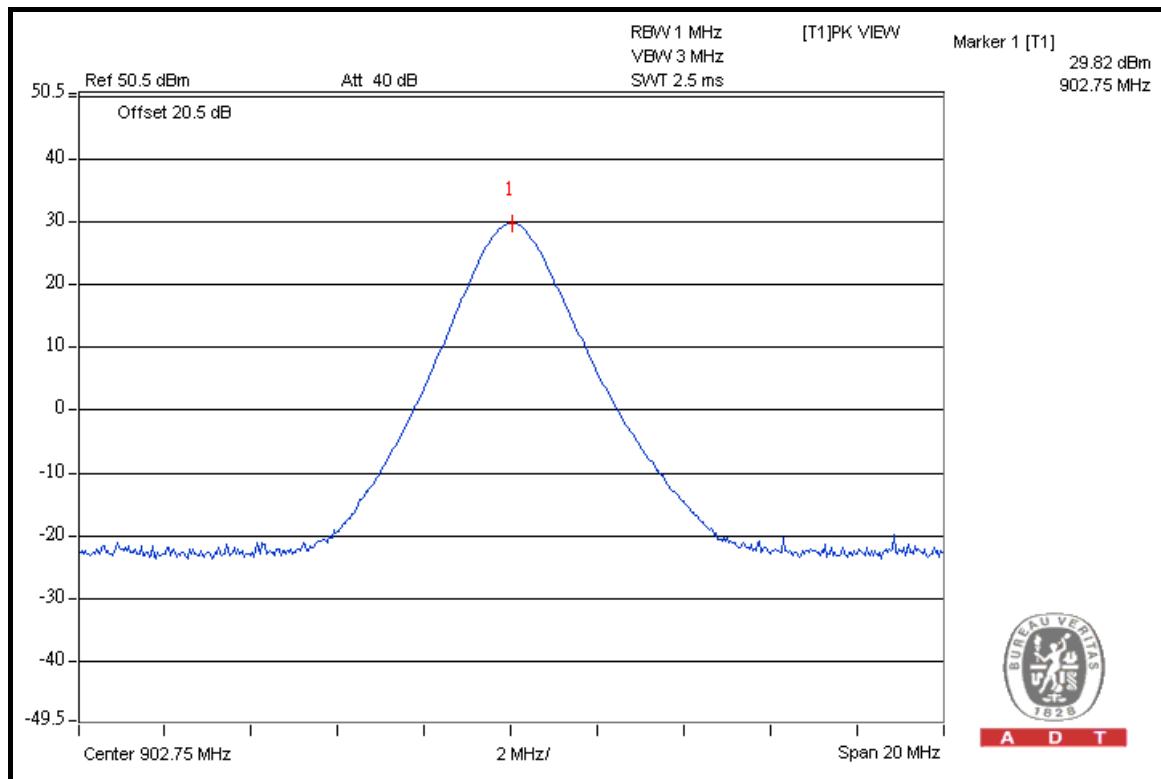



4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 / 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest and highest channel frequencies individually.



A D T

4.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH OUT OF BAND (dBuV/m)	LIMIT (dBuV/m)
902.72 (PK)	135.5	46.26	89.24	115.5
902.72 (AV)	-	-	77.04	101.9



FREQUENCY (MHz)	FUNDAMENTAL EMISSION (dBuV/m)	DELTA (dB)	MAXIMUM FIELD STRENGTH OUT OF BAND (dBuV/m)	LIMIT (dBuV/m)
927.25 (PK)	134.3	46.44	87.86	114.3
927.25 (AV)	-	-	75.66	100.5

NOTE:

1. Delta = Amplitude between the peak of the fundamental and the peak of the band edge emission. Please check following 2 pages.
2. Maximum field strength out of band (PK value) = Fundamental emission (PK value) – Delta.
3. Average value =Peak value + 20 Log (duty cycle) = Peak value – 12.2dB.
4. The average value of fundamental frequency is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:
$$20 \log (\text{Duty cycle}) = 20 \log (24.5 \text{ ms} / 100 \text{ ms}) = -12.2 \text{ dB}$$





A D T

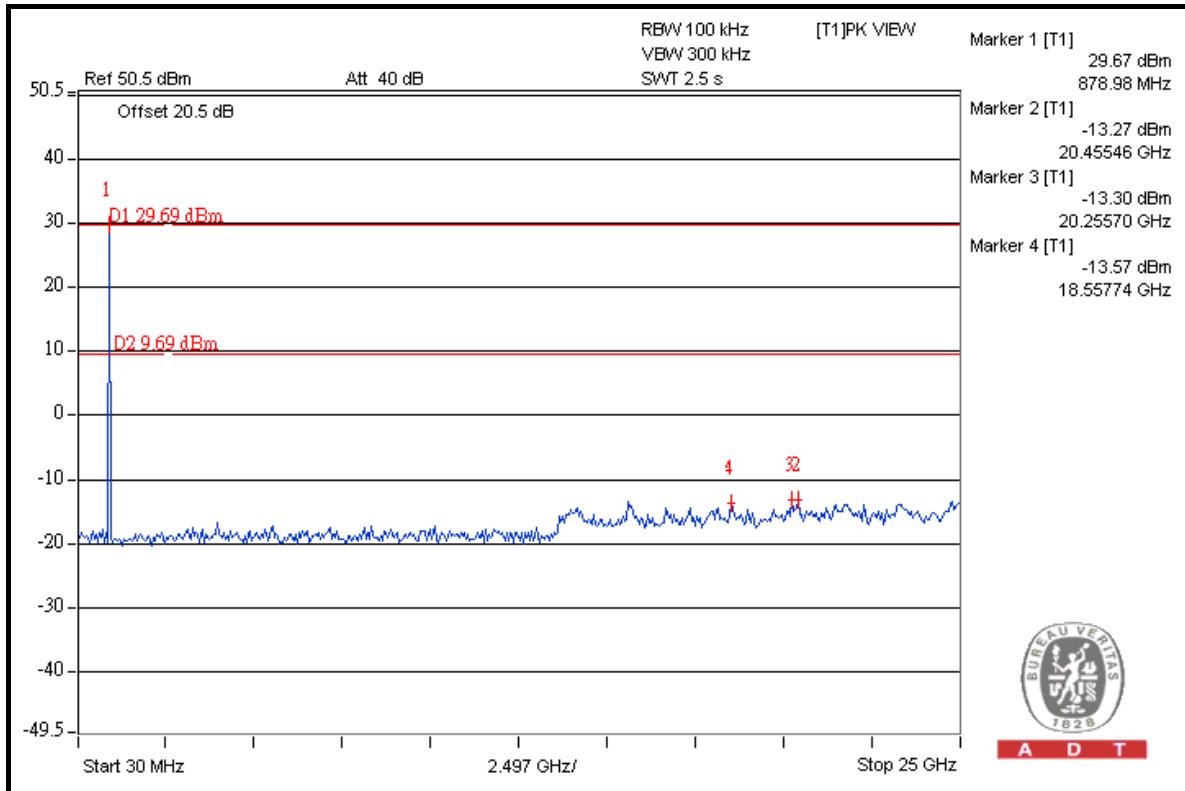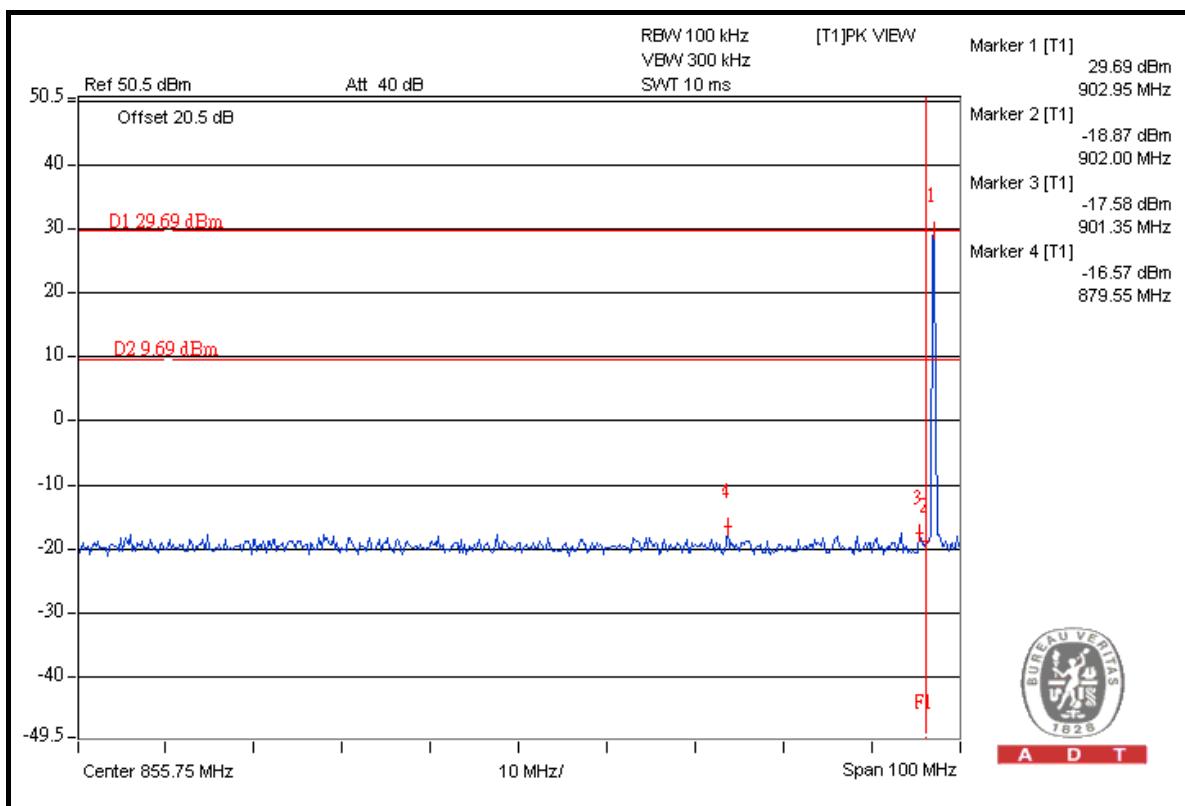



A D T

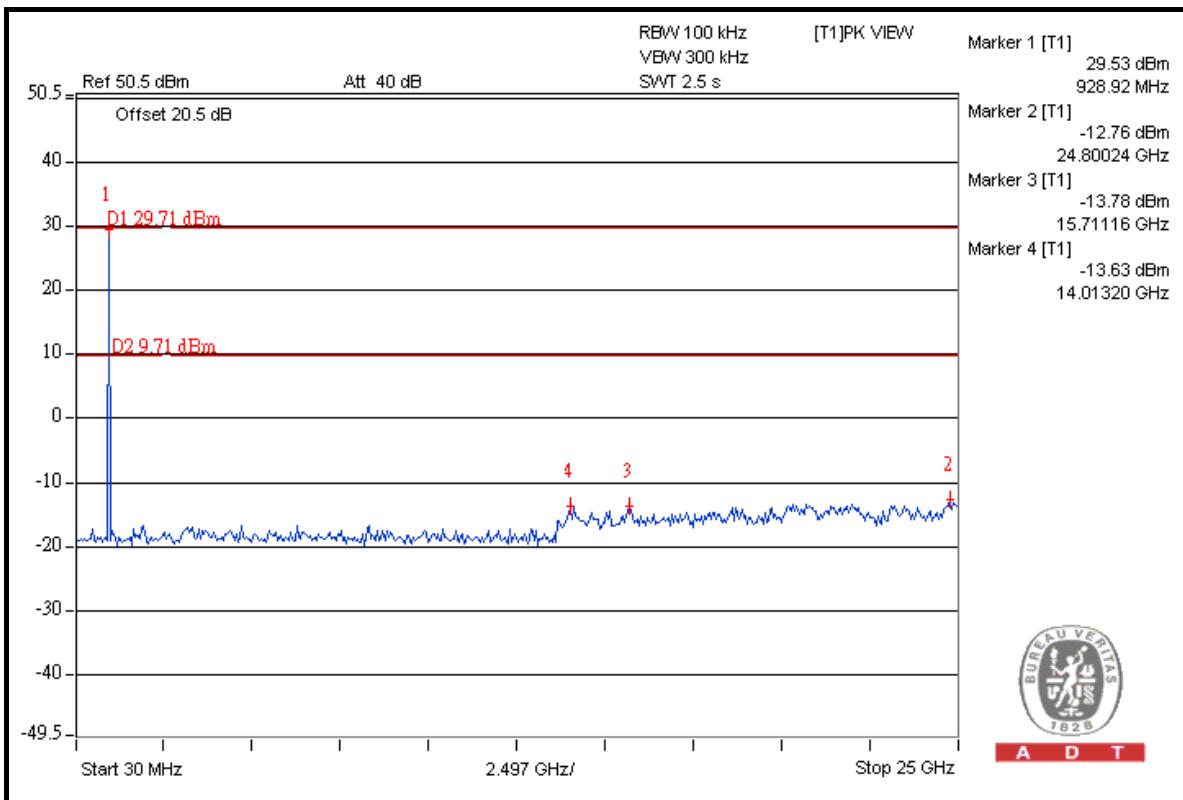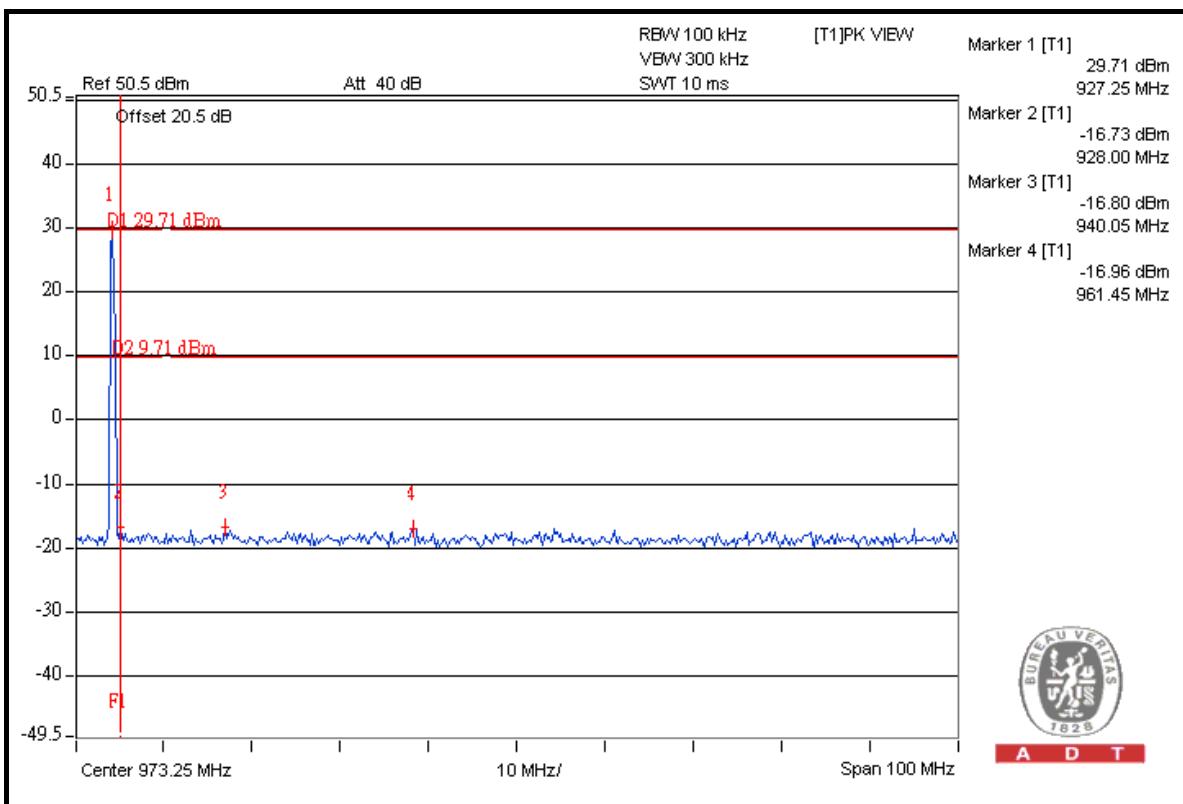



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---