



FCC SAR

TEST REPORT

of

EFT-POS

Model Name: PS400
Brand Name: 
Brand Name: SAND
Report No.: SH10040042S01
FCC ID: XLHPS400-1101

prepared for

Shanghai Sand Information Technology System Co., Ltd
Building 22, Germs Park, NO. 487 Tianlin Road, Shanghai China



Shenzhen Electronic Product Quality Testing Center
Morlab Laboratory

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



Bluetooth®

CTIA Authorized Test Lab
LAB CODE 20081223-00

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant, it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.



GENERAL SUMMARY

| | | | |
|-----------------|---|--------------|--|
| Product Name | EFT-POS | Model | PS400 |
| Brand Name | SAND | Carrier | Li Hongbing |
| Quantity of EUT | One | Manufacturer | Shanghai Sand Information Technology System Co., Ltd |
| Standard(s) | <p>ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fieldst.</p> <p>IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.</p> <p>OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.</p> <p>KDB Publication 447498:Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Polices</p> <p>Tracking number : 923471</p> | | |
| Conclusion | <p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.</p> <p>General Judgment: Pass</p> | | |
| | Date of issue: Feb. 18. 2011 | | |
| Comment | <p>TX Freq. Band: 824.20-848.80MHz(GSM850) 1850.20-1909.80 MHz(PCS1900)</p> <p>RX Freq. Band:869.20-893.80 MHz(GSM850) 1930.20-1989.80 MHz(PCS1900)</p> <p>Antenna Character : build inside</p> <p>The test result only responds to the measured sample.</p> | | |

Tested by: Shi Feng, Date: 2011.3.11

Checked by: Zhang Jun, Date: 2011.3.11

Approved by: Wei Bei, Date: 2011.3.11




TABLE OF CONTENT

| | | |
|----------|--|-----------|
| 1 | GENERAL CONDITIONS..... | 4 |
| 2 | ADMINISTRATIVE DATA..... | 5 |
| 2.1 | IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY | 5 |
| 2.2 | IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION(S) | 5 |
| 2.3 | ORGANIZATION ITEM | 5 |
| 2.4 | IDENTIFICATION OF APPLICANT..... | 5 |
| 3 | EQUIPMENT UNDER TEST (EUT)..... | 6 |
| 4 | OPERATIONAL CONDITIONS DURING TEST | 7 |
| 4.1 | SCHEMATIC TEST CONFIGURATION | 7 |
| 4.2 | SAR MEASUREMENT SYSTEM | 7 |
| 4.2.1 | <i>Robot system specification</i> | 8 |
| 4.2.2 | <i>Probe Specification</i> | 8 |
| | ISOTROPIC E-FIELD PROBE SPECIFICATION..... | 10 |
| | BOUNDARY DETECTION UNIT AND PROBE MOUNTING DEVICE | 10 |
| | DAQ-PAQ (ANALOG TO DIGITAL ELECTRONICS)..... | 11 |
| 4.2.3 | <i>Phantoms, Device Holder and Simulant Liquid</i> | 12 |
| | ALSAS UNIVERSAL WORKSTATION..... | 13 |
| | UNIVERSAL DEVICE POSITIONER..... | 13 |
| 4.2.4 | <i>SAR measurement procedure</i> | 14 |
| 4.2.5 | <i>Validation Test Using Flat Phantom</i> | 15 |
| | VALIDATION Dipoles | 15 |
| | <i>Validation Result</i> | 16 |
| 4.2.6 | <i>Measurement Procedure</i> | 16 |
| 4.2.7 | <i>Description of Interpolation/Extrapolation Scheme</i> | 17 |
| 5 | CHARACTERISTICS OF THE TEST | 17 |
| 5.1.1 | <i>Applicable Limit Regulations</i> | 17 |
| 5.1.2 | <i>Applicable Measurement Standards</i> | 17 |
| 6 | LABORATORY ENVIRONMENT | 18 |
| 7 | TEST RESULTS | 19 |
| 7.1 | EXPLAIN | 19 |
| 7.2 | DIELECTRIC PERFORMANCE..... | 19 |
| 7.3 | CONDUCTED POWER | 19 |
| 7.4 | SUMMARY OF MEASUREMENT RESULTS | 20 |
| 7.5 | CONCLUSION | 20 |
| 8 | MEASUREMENT UNCERTAINTIES..... | 21 |
| 9 | MAIN TEST INSTRUMENTS..... | 23 |
| | ANNEX A- ACCREDITATION CERTIFICATE..... | 24 |



| | |
|----------------------------------|----|
| ANNEX B- TEST LAYOUT | 26 |
| ANNEX C- SAMPLE PHOTOGRAPHS..... | 30 |
| ANNEX D- GRAPH TEST RESULTS..... | 31 |

1 GENERAL CONDITIONS

This report only refers to the item that has undergone the test. This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

This document is only valid if complete; no partial reproduction can be made without written approval of Shenzhen Morlab Communications Technology Co., Ltd.

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Shenzhen Morlab Communications Technology Co., Ltd. and the Accreditation Bodies, if it applies.



2 Administrative Date

2.1 Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co.,Ltd.
Department: Testing Department
Address: 3Fl, Electronic Testing Building, ShaHe Road, NanShan District, Shenzhen, P. R. China
Telephone: +86 755 86130268
Fax: +86 755 86130218
Responsible Test Lab Managers: Mr. Shu Luan

2.2 Identification of the Responsible Testing Location(s)

Company Name: Shenzhen Electronic Product Quality Testing Center Morlab Laboratory
Address: 3Fl, Electronic Testing Building, ShaHe Road, NanShan District, Shenzhen, P. R. China

2.3 Organization Item

Morlab Report No.: SH10040042S01
Morlab Project Leader: Mr. Zhang Jun
Morlab Responsible for Accreditation scope: Mrs. Wei Bei
Start of Testing: 2011-2-18
End of Testing: 2011-2-18

2.4 Identification of Applicant

Company Name: Shanghai Sand Information Technology System Co., Ltd
Address: Building 22, Germs Park, NO. 487 Tianlin Road, Shanghai China
Contact person: Xu Hai
Telephone: 86-021-24016333*8169
Fax: 86-021-33675001

2.5 Identification of Manufacture

Company Name: Shanghai Sand Information Technology System Co., Ltd
Address: Building 22, Germs Park, NO. 487 Tianlin Road, Shanghai China

Notes: This data is based on the information offered by the applicant.



3 Equipment Under Test (EUT)

3.1. Identification of the Equipment under Test

Product Name: EFT-POS

Brand name: SAND

Model No: PS400

General description:

| | |
|-----------------------|-------------------------------|
| Test frequency | GPRS 850/1900 |
| Accessories | Charger, Battery, |
| Battery Model | NLB465082H-2S |
| Battery specification | 7.4V 2000 mAh |
| Battery Manufacture | Narada Power Source Co., Ltd. |
| Antenna type | GSM/PCS:Integrated |

3.2. Identification of all used Test Sample of the Equipment under Test

| EUT Code | Serial Number | Hardware Version | Software Version | IMEI |
|----------|---------------|------------------|------------------|------|
| #1 | N.A | V3.1 | 20101230 | / |

NOTE:

1. The EUT is production unit. The EUT consists of Hand-Held Terminal Set and normal options: Charger, Lithium Battery as listed above.
2. Please refer to Appendix C for the photographs of the EUT. For a more detailed features description of the EUT, please refer to its User's Manual.
3. Testing for General Population/Uncontrolled limits.

4 OPERATIONAL CONDITIONS DURING TEST

4.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The TCH is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

4.2 SAR Measurement System

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies and FDTD order to provide a platform which is repeatable with minimum uncertainty.

Applications Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently is available up to 6 GHz in simulated tissue.



4.2.1 Robot system specification

ALSAS-10U utilizes a six articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelop. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.




| | |
|--------------------------------------|-----------------------------------|
| Robot/Controller Manufacturer | Thermo CRS |
| Number of Axis | Six independently controlled axis |
| Positioning Repeatability | 0.05mm |
| Controller Type | Single phase Pentium based C500C |
| Robot Reach | 710mm |
| Communication | RS232 and LAN compatible |

4.2.2 Probe Specification

The isotropic E-Field probe has been fully calibrated and assessed for isotropic, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. A number of methods is used for calibrating probes, and these are outlined in the table below:

| Calibration Frequency | Air Calibration | Tissue Calibration |
|-----------------------|-----------------|--------------------|
| 850MHZ | TEM Cell | Temperature |
| 1900MHZ | TEM Cell | Temperature |

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

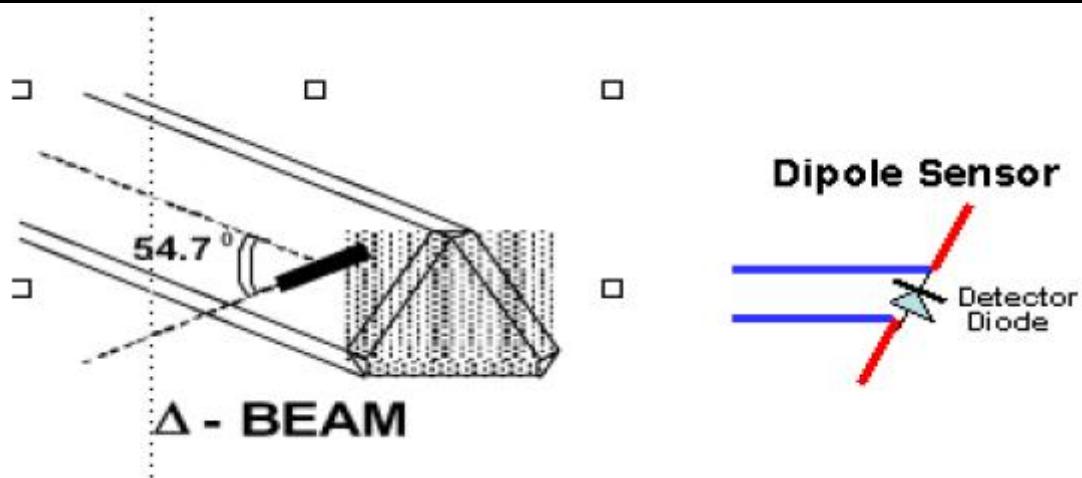

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$



Isotropic E-Field Probe Specification

| | |
|--------------------------------------|--|
| Calibration in Air | Frequency Dependent Below 2GHz Calibration in air performed in a TEM Cell Above 2GHz Calibration in air performed in waveguide |
| Sensitivity | 0.70 μ V/(V/m) ² to 0.85 μ V/(V/m) ² |
| Dynamic Range | 0.0005 W/kg to 100W/kg |
| Isotropic Response | Better than 0.2dB |
| Diode Compression point (DCP) | Calibration for Specific Frequency |
| Probe Tip Radius | < 5mm |
| Sensor Offset | 1.56 (+/- 0.02mm) |
| Probe Length | 290mm |
| Video Bandwidth | @ 500 Hz: 1dB @1.02 KHz: 3dB |
| Boundary Effect | Less than 2% for distance greater than 2.4mm |
| Spatial Resolution | Diameter less than 5mm Compliant with Standards |

Boundary detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detecting during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, &Z). The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connected to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)


ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5μ V to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via a RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

| | |
|--------------------------|---|
| ADC | 12 Bit |
| Amplifier Range | 20mV to 200mV and 150mV to 800mV |
| Field Integration | Local Co-Processor utilizing proprietary integration algorithms |
| Number of Input Channels | 4 in total 3 dedicated and 1 spare |
| Communication | Packet data via RS232 |

4.2.3 Phantoms, Device Holder and Simulant Liquid

4.2.3.1 Sam Phantom

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

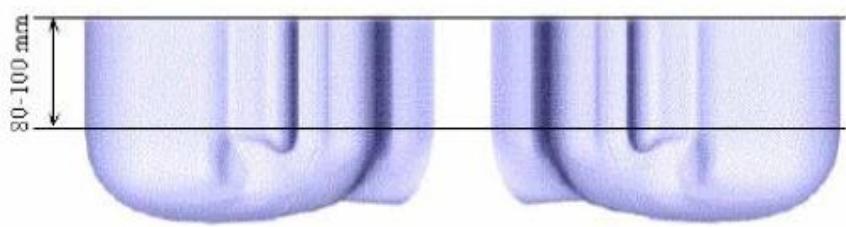

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software. The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



Device and Dipole Holder

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurement using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt movements for head SAR analysis. Overall uncertainty for measurements has been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.



4.2.3.2 Tissue Simulating Liquids

There is no simulating liquids that can cover all frequency bands. Therefore, our system is using different liquids for the measured band as explained bellows.


The parameters of the simulating solution strongly influence the SAR values. The different normalization organizations have defined adapted solutions for the each mobile system.

2.45GHz Liquid: is made of de-ionized water, Glycol monobutyl and NaCl, reconstituting the electric properties of human tissues at 2450MHz

Several measurement systems are available for measuring the dielectric parameters.

Antennessa has developed its own software, based on a coaxial probe. This method allows measurement of liquid permittivity between 300 MHz and 6GHz.

4.2.4 SAR measurement procedure

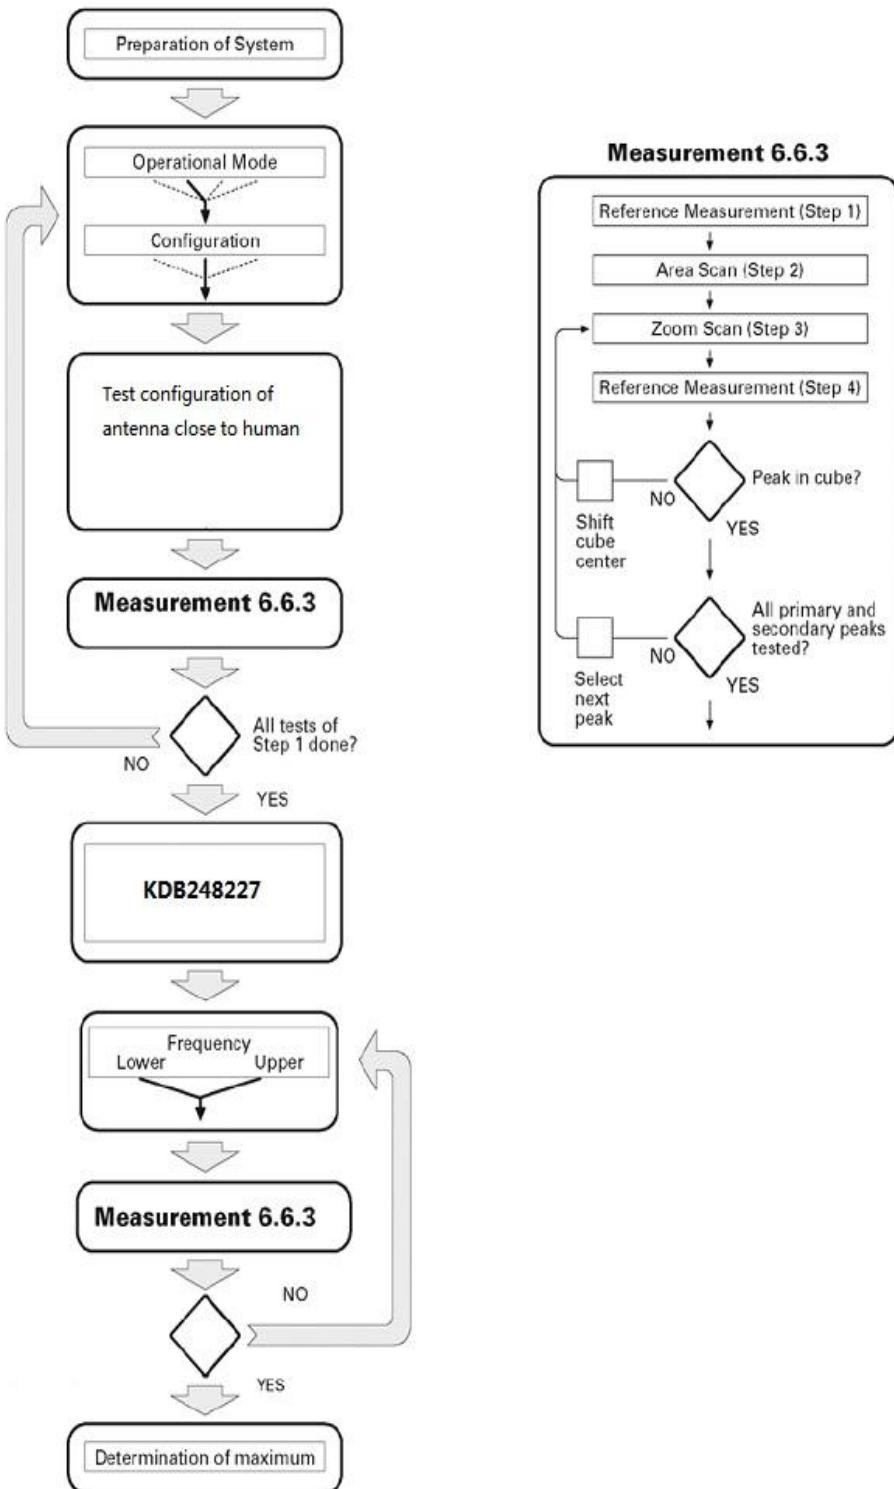


After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between

these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE P1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.


4.2.5 Validation Test Using Flat Phantom

The following procedure, recommended for performing validation tests using flat phantom is based on the procedures described in the IEEE standard P1528. Setup according to the setup diagram below:

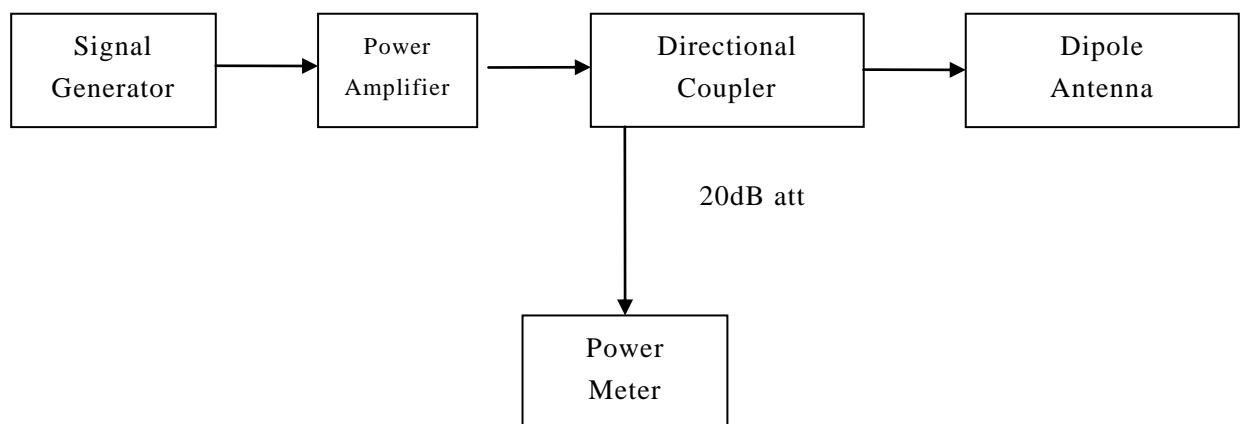

4.2.5.1 Setting up the Box Phantom for Validation Testing

Validation Dipoles

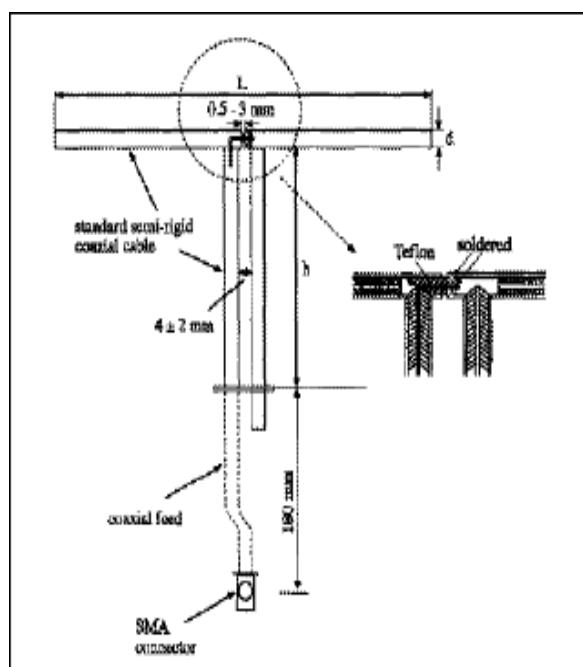

The dipoles used are based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. The table below provides details for the mechanical and electrical specifications for the dipoles.

| Frequency | L(mm) | h(mm) | d(mm) |
|-----------|-------|-------|-------|
| 850MHZ | 161 | 89.8 | 3.6 |
| 1900MHZ | 67.1 | 38.9 | 3.6 |

Validation Result

System Performance Check at 850MHz & 1900MHz

Validation Kit: ASL-D-850-S-2

| Frequency(MHz) | Description | SAR(W/Kg) 1g | SAR(W/Kg) 10g | Tissue Temp.(°C) |
|----------------|---------------------------|--------------|---------------|------------------|
| 835MHz Body | Reference result | 9.5 | 6.2 | N/A |
| | Value(1W) 2011-2-18 | 9.752 | 5.932 | 20.7 |
| | Value(0.25W) 2011-2-18 | 2.438 | 1.483 | 20.7 |

Validation Kit: ASL-D-1900-S-2

| Frequency(MHz) | Description | SAR(W/Kg) 1g | SAR(W/Kg) 10g | Tissue Temp.(°C) |
|-----------------|---------------------------|--------------|---------------|------------------|
| 1900MHz Body | Reference result | 39.7 | 20.5 | N/A |
| | Value(1W) 2011-2-18 | 39.432 | 19.62 | 20.7 |
| | Value(0.25W) 2011-2-18 | 9.858 | 4.904 | 20.7 |

Note: Validation SAR values are normalized to 1W forward power

4.2.6 Measurement Procedure

The following steps are used for each test position

Establish a call with the maximum output power with a base station simulator. The connection between the mobile phone and the base station simulator is established via air interface.

Measurement of the local E-field distribution is done with a grid of 8 to 16mm*8 to 16mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are

extrapolated. With these values the area of the maximum SAR is calculated by an interpolating scheme.

Around this point, a cube of 30*30*30mm or 32*32*32mm is assessed by measuring 5 or 8*5 or 8*4 or 5mm. With these data, the peak spatial-average SAR value can be calculated.

4.2.7 Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is base on a fourth-order least square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8mm. to obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1gram requires a very fine resolution in the three-dimensional scanned data array.

5 CHARACTERISTICS OF THE TEST

5.1.1 Applicable Limit Regulations

ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.1.2 Applicable Measurement Standards

IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

KDB Publication 447498: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Polices

6 LABORATORY ENVIRONMENT

Table: The Ambient Conditions during SAR Test

| | |
|---|--------------------------|
| Temperature | Min. =15 °C, Max. =30 °C |
| Relative humidity | Min. =30%, Max. =70% |
| Ground system resistance | <0.5Ω |
| Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards. | |

7 TEST RESULTS

7.1 Explain

The EUT has been tested under the operating conditions.

7.2 Dielectric Performance

For body-worn measurements, the device was tested against flat phantom representing the user body.

Under measurement phone was put on in the belt holder.

Table : Dielectric Performance of Body Tissue Simulating Liquid

| Temperature: 23.0~23.8 °C, humidity: 54~60%. | | | |
|--|-----------|-------------------------|-----------------------------|
| / | Frequency | Permittivity ϵ | Conductivity σ (S/m) |
| Target value | 835 MHz | 55.2 | 0.97 |
| Validation value (Feb 18) | 835 MHz | 55.37 | 0.98 |
| Target value | 1900 MHz | 53.30 | 1.52 |
| Validation value (Feb 18) | 1900 MHz | 53.28 | 1.50 |

7.3 Conducted Power

The conducted power for GPRS 850/1900 is as following:

| GSM 850 GPRS | Averaged Power (dBm) | | | | | | |
|------------------|----------------------|-------|-------|-----------|-------|-------|-------|
| | 128 | 190 | 251 | | 128 | 190 | 251 |
| 1 Txslot | 32.17 | 32.01 | 31.83 | -9.03 dBm | 23.14 | 22.98 | 22.80 |
| 2 Txslots | 32.02 | 31.87 | 31.62 | -6.02 dBm | 26.00 | 25.85 | 25.60 |
| GSM 1900 GPRS | Averaged Power (dBm) | | | | | | |
| | 512 | 661 | 810 | | 512 | 661 | 810 |
| 1 Txslot | 29.61 | 29.49 | 29.31 | -9.03 dBm | 20.58 | 20.46 | 20.28 |
| 2 Txslots | 29.27 | 29.11 | 29.04 | -6.02 dBm | 23.25 | 23.09 | 23.02 |

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 1 Txslots for GPRS.

7.4 Summary of Measurement Results

Table 1: SAR Values (GPRS 850 Body)

| Temperature: 21.0~23.5 °C, Relative Humidity: 60~65%. | | |
|---|---------------------------|-------------------|
| Limit of SAR (W/kg) | 1 g Average | |
| | 1.6 | |
| Test Configuration | Measurement Result (W/kg) | |
| | 1 g Average(W/kg) | Power Drift(%) |
| Front side Towards Phantom Middle Channel | 0.073 | 1.794 |
| Back side Towards Phantom Middle Channel | 0.056 | -1.588 |
| Top side Towards Phantom Middle Channel | 0.128 | 2.409 |
| Right side Towards Phantom Low Channel | 0.315 | 3.994 |
| Right side Towards Phantom Middle Channel | 0.428 | -0.542 |
| Right side Towards Phantom High Channel | 0.333 | 0.151 |

Table 2: SAR Values (GPRS 1900 Body)

| Temperature: 21.0~23.5 °C, Relative Humidity: 60~65%. | | |
|---|---------------------------|-------------------|
| Limit of SAR (W/kg) | 1 g Average | |
| | 1.6 | |
| Test Configuration | Measurement Result (W/kg) | |
| | 1 g Average(W/kg) | Power Drift(%) |
| Front side Towards Phantom Middle Channel | 0.060 | 2.128 |
| Back side Towards Phantom Middle Channel | 0.149 | -0.596 |
| Top side Towards Phantom Middle Channel | 0.214 | 2.130 |
| Right side Towards Phantom Low Channel | 1.047 | -2.779 |
| Right side Towards Phantom Middle Channel | 1.001 | -2.660 |
| Right side Towards Phantom High Channel | 1.443 | 2.229 |

Remark: Please refer to ANNEX B for the test setup photos.

7.5 Conclusion

Peak Spatial-Average Specific Absorption Rate (SAR) of this portable wireless device has been measured in all configurations requested by the relevant standards cited in Clause 5.2 of this report. SAR values are below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

8 Measurement Uncertainties

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

| Source of Uncertainty | Tolerance Value | Probability Distribution | Divisor | ci1 (1-g) | ci1 (10-g) | Standard Uncertainty (1-g) % | Standard Uncertainty (10-g) % |
|---|-----------------|--------------------------|------------|----------------|----------------|------------------------------|-------------------------------|
| Measurement System | | | | | | | |
| Probe Calibration | 3.5 | normal | 1 | 1 | 1 | 3.5 | 3.5 |
| Axial Isotropy | 3.7 | rectangular | $\sqrt{3}$ | $(1-cp)^{1/2}$ | $(1-cp)^{1/2}$ | 1.5 | 1.5 |
| Hemispherical Isotropy | 10.9 | rectangular | $\sqrt{3}$ | \sqrt{cp} | \sqrt{cp} | 4.4 | 4.4 |
| Boundary Effect | 1.0 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Linearity | 4.7 | rectangular | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 |
| Detection Limit | 1.0 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Readout Electronics | 1.0 | normal | 1 | 1 | 1 | 1.0 | 1.0 |
| Response Time | 0.8 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 |
| Integration Time | 1.7 | rectangular | $\sqrt{3}$ | 1 | 1 | 1.0 | 1.0 |
| RF Ambient Condition | 3.0 | rectangular | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 |
| Probe Positioner Mech. | 0.4 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.2 | 0.2 |
| Restriction | | | | | | | |
| Probe Positioning with respect to Phantom Shell | 2.9 | rectangular | $\sqrt{3}$ | 1 | 1 | 1.7 | 1.7 |
| Extrapolation and Integration | 3.7 | rectangular | $\sqrt{3}$ | 1 | 1 | 2.1 | 2.1 |



| | | | | | | | |
|--|-----|-------------|------------|-----|-----|------|------|
| Test Sample Positioning | 4.0 | normal | 1 | 1 | 1 | 4.0 | 4.0 |
| Device Holder Uncertainty | 2.0 | normal | 1 | 1 | 1 | 2.0 | 2.0 |
| Drift of Output Power | 0.6 | rectangular | $\sqrt{3}$ | 1 | 1 | 0.3 | 0.3 |
| Phantom and Setup | | | | | | | |
| Phantom Uncertainty(shape & thickness tolerance) | 3.4 | rectangular | $\sqrt{3}$ | 1 | 1 | 2.0 | 2.0 |
| Liquid Conductivity(target) | 5.0 | rectangular | $\sqrt{3}$ | 0.7 | 0.5 | 2.0 | 1.4 |
| Liquid Conductivity(meas.) | 0.0 | normal | 1 | 0.7 | 0.5 | 0.0 | 0.0 |
| Liquid Permittivity(target) | 5.0 | rectangular | $\sqrt{3}$ | 0.6 | 0.5 | 1.7 | 1.4 |
| Liquid Permittivity(meas.) | 2.4 | normal | 1 | 0.6 | 0.5 | 1.4 | 1.2 |
| Combined Uncertainty | | RSS | | | | 9.3 | 9.2 |
| Combined Uncertainty (coverage factor=2) | | Normal(k=2) | | | | 18.7 | 18.3 |



9 MAIN TEST INSTRUMENTS

| Instrument | Manufacture | Model No. | Serial No. | Last Calibration |
|--|---------------|----------------|------------|--------------------------------|
| Universal Work Station | Aprel | ALS-UWS | 100-00154 | Jun.2010 |
| Data Acquisition Package | Aprel | ALS-DAQ-PAQ-3 | 110-00215 | Jun.2010 |
| Probe Mounting Device and Boundary Detection Sensor System | Aprel | ALS-PMDPS-3 | 120-00265 | Jun.2010 |
| Miniature E-Field Probe | Aprel | ALS-E-020 | 273-B | Sept.2010 |
| Left ear SAM Phantom | Aprel | ALS-P-SAM-L | 130-00312 | N/A |
| Right ear SAM Phantom | Aprel | ALS-P-SAM-R | 140-00362 | N/A |
| Universal SAM Phantom | Aprel | ALS-P-SU-1 | 150-00410 | N/A |
| Reference Validation Dipole 835MHz | Aprel | ALS-D-835-S-2 | 180-00565 | 19 th February 2011 |
| Reference Validation Dipole 1900MHz | Aprel | ALS-D-1900-S-2 | 210-00716 | 19 th February 2011 |
| Dielectric Probe Kit | Aprel | ALS-PR-DIEL | 260-00955 | N/A |
| Device Holder 2.0 | Aprel | ALS-H-E-SET-2 | 170-00506 | N/A |
| SAR software | Aprel | ALS-SAR-AL-10 | Ver.2.3.6 | N/A |
| CRS C500C Controller | Thermo | ALS-C500 | RCF0504291 | N/A |
| CRS F3 Robot | Aprel | ALS-F3-SW | N/A | N/A |
| Power Amplifier | Mini-Circuit | SN0974 | 040306 | N/A |
| Directional Coupler | Agilent | 778D-012 | N/A | N/A |
| Universal Radio Communication Tester | Rohde&Schwarz | CMU200 | 104845 | Jan.11 |
| Vector Network | Anritsu | MS4623B | N/A | Nov.10 |
| Signal Generator | Agilent | E8257D | N/A | Jan.11 |
| Power Meter | Rohde&Schwarz | NRP | N/A | Jan.11 |



Report No: SH10040042S01

ANNEX A- Accreditation Certificate

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

EFT-POS

REPORT NO: SH10040042S01

Type Name: PS400

Hardware Version: V3.1
Software Version: 20101230

Accreditation Certificate





China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(No. CNAS L1659)

China National Accreditation Service for Conformity Assessment has accredited

Shenzhen Electronic Product Quality Testing Center

Electronic Testing Building, Shahe Road, Xili, Nanshan District,

Shenzhen, Guangdong, China

to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.

The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.

Date of Issue: 2009-09-29

Date of Expiry: 2012-09-28

Date of Initial Accreditation: 1999-08-03



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment(CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation systems for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA), and the signatory to Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).



Report No: SH10040042S01

ANNEX B- Test Layout

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

EFT-POS

REPORT NO: SH10040042S01

Type Name: PS400

Hardware Version: V3.1

Software Version: 20101230

Test Layout

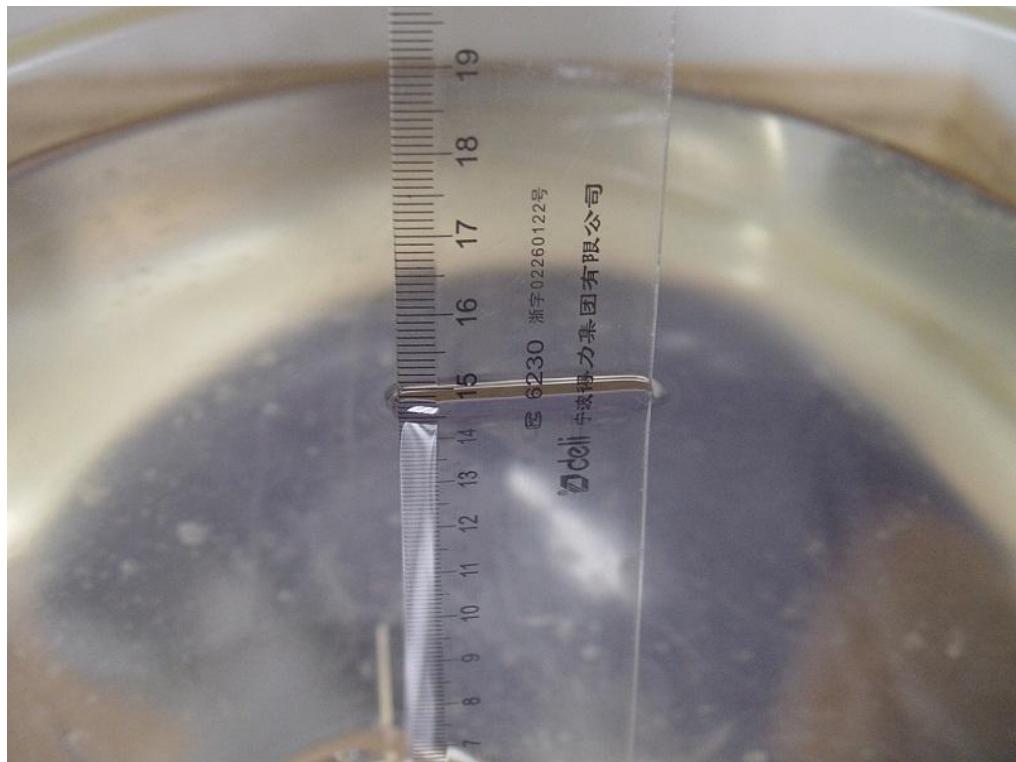


Figure B.1 Depth of Simulating Liquid in SAM Head Phantom

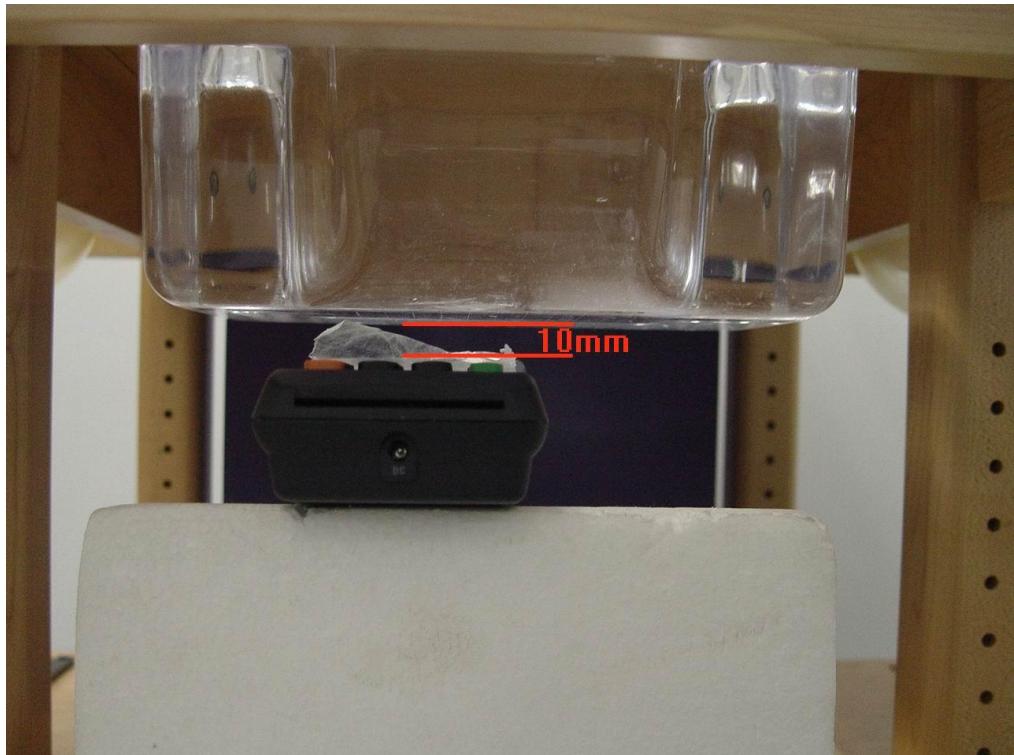


Figure B.2 EUT Front side Towards phantom



Figure B.3 EUT Back side Towards phantom



Figure B.4 EUT Top side Towards phantom

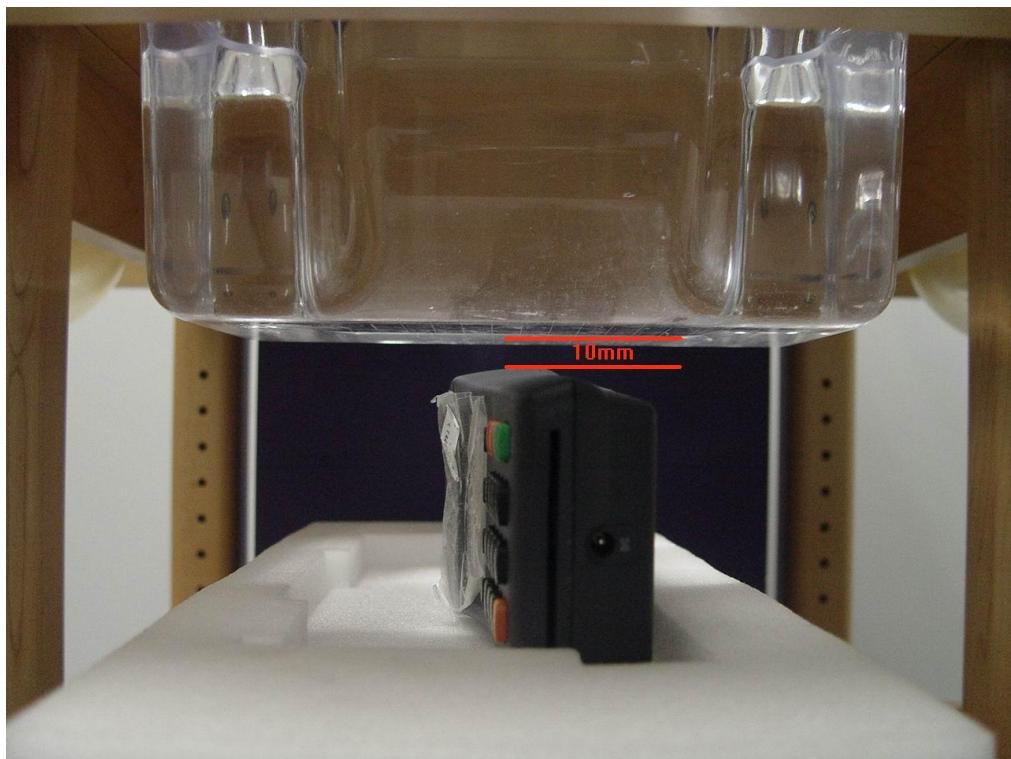


Figure B.5 EUT Right side Towards phantom



Figure B.6 The antenna location and distance



Report No: SH10040042S01

ANNEX C- Sample Photographs

of
Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

EFT-POS

REPORT NO: SH10040042S01

Type Name: PS400

Hardware Version: V3.1

Software Version: 20101230



Photograph of the Equipment under Test



Report No: SH10040042S01

ANNEX D- Graph Test Results

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

EFT-POS

REPORT NO: SH10040042S01

Type Name: PS400

Hardware Version: V3.1



Software Version: 20101230

Graph Test Results



GPRS 850 Front side Towards Phantom Middle(190ch)



| | |
|---|--|
| Frequency (MHz) | 836.610021 |
| Relative permitivity (real part) | 55.37 |
| Conductivity (S/m) | 0.98 |
| Variation (%) | 1.79 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 6 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liquiud:20.7°C |
| Data | 2011-2-18 |

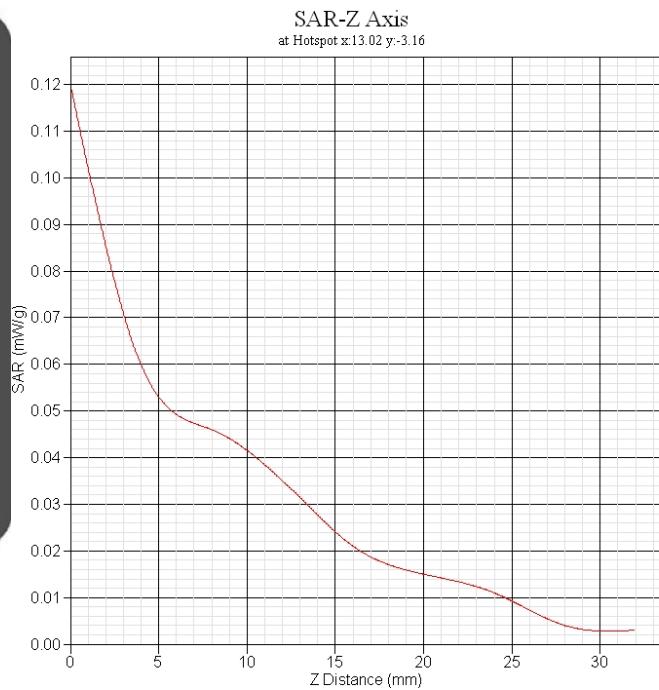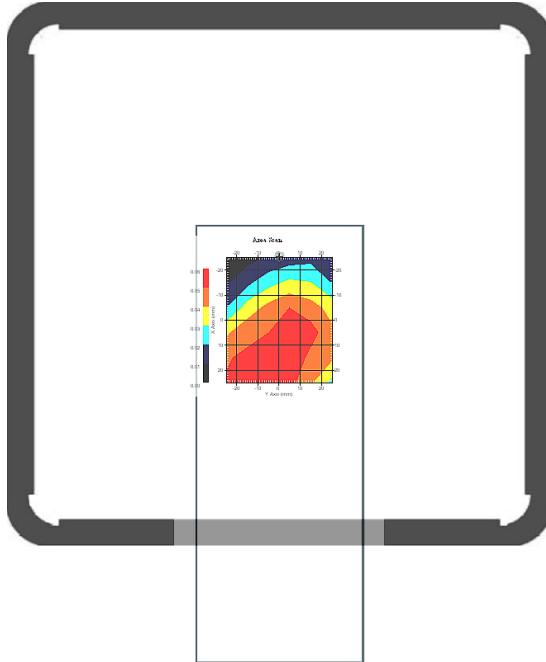

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.050 |
| SAR 1g (W/Kg) | 0.073 |

GPRS 850 Back side Towards Phantom Middle(190ch)



| | |
|--|--|
| Frequency (MHz) | 836.610021 |
| Relative permittivity (real part) | 55.37 |
| Conductivity (S/m) | 0.98 |
| Variation (%) | -1.59 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 6 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

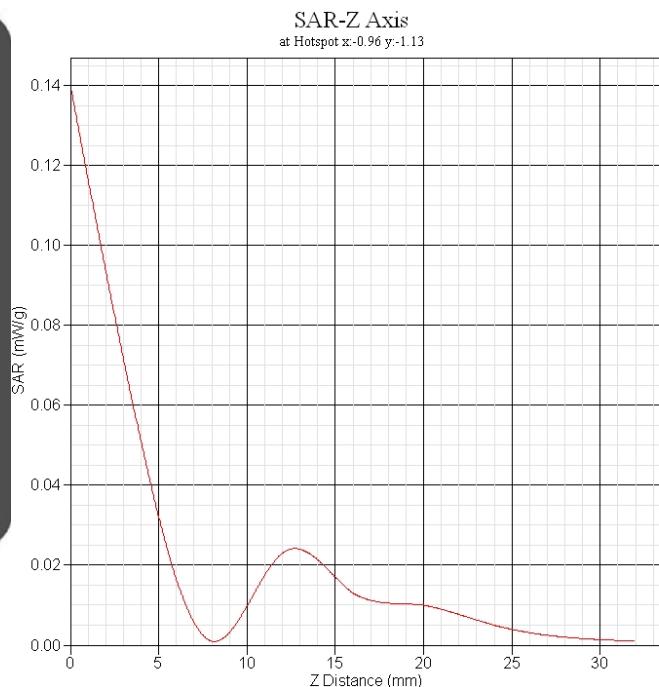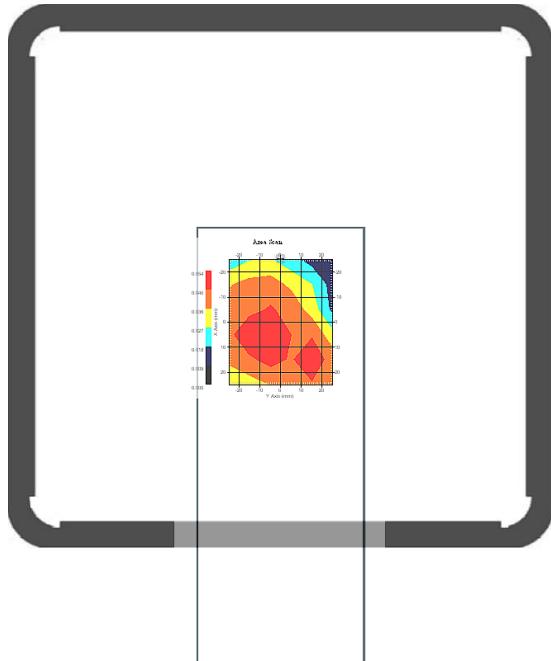

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.035 |
| SAR 1g (W/Kg) | 0.056 |

GPRS 850 Top side Towards Phantom Middle(190ch)



| | |
|--|--|
| Frequency (MHz) | 836.610021 |
| Relative permittivity (real part) | 55.37 |
| Conductivity (S/m) | 0.98 |
| Variation (%) | 2.41 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 6 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

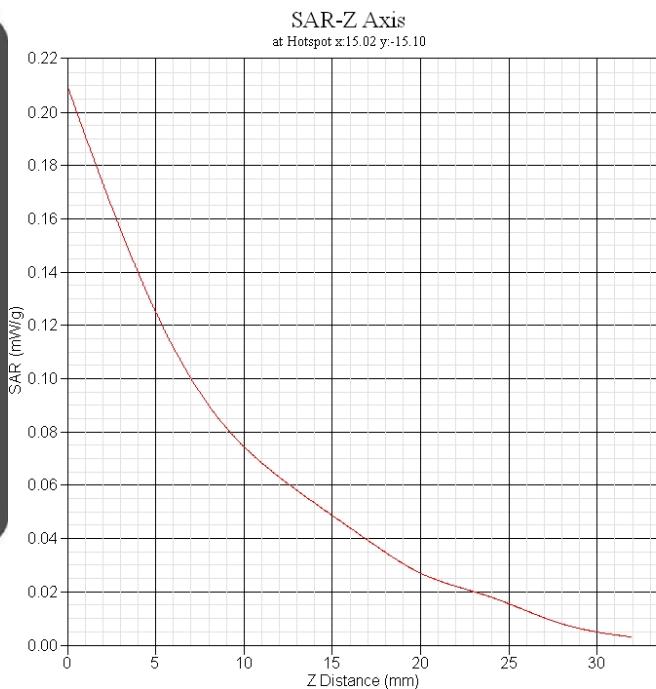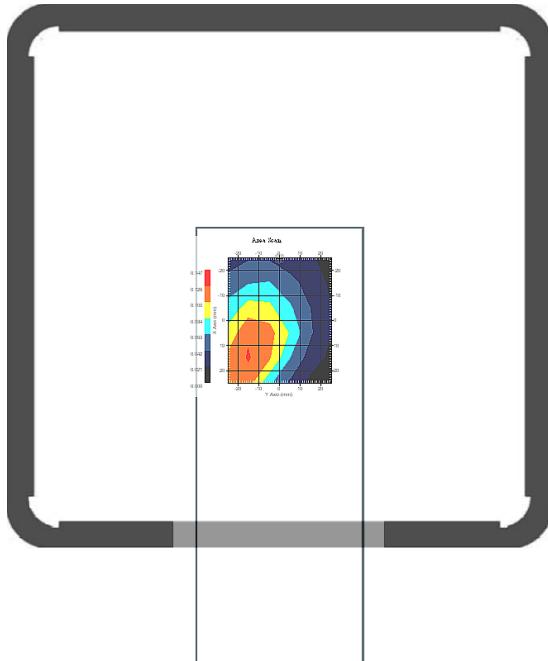

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.073 |
| SAR 1g (W/Kg) | 0.128 |

GPRS 850 Right side Towards Phantom Low(128ch)



| | |
|--|--|
| Frequency (MHz) | 824.210014 |
| Relative permittivity (real part) | 55.70 |
| Conductivity (S/m) | 0.97 |
| Variation (%) | 3.99 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 6 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

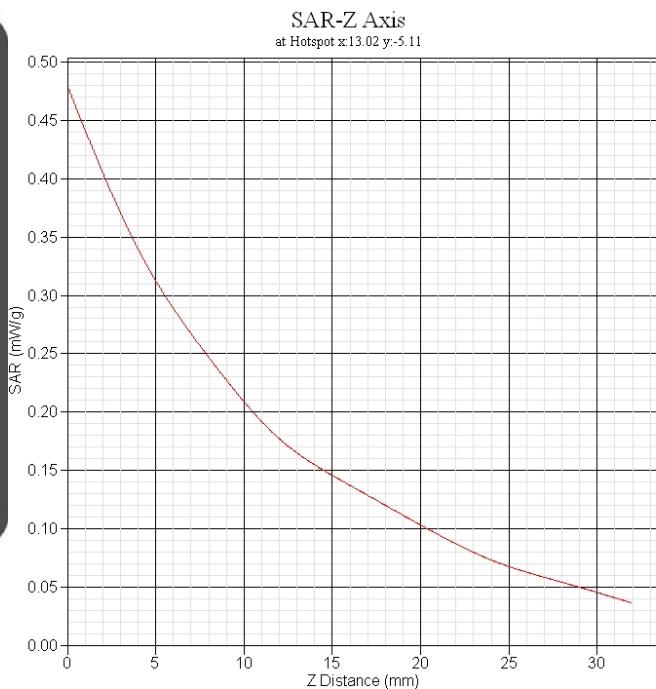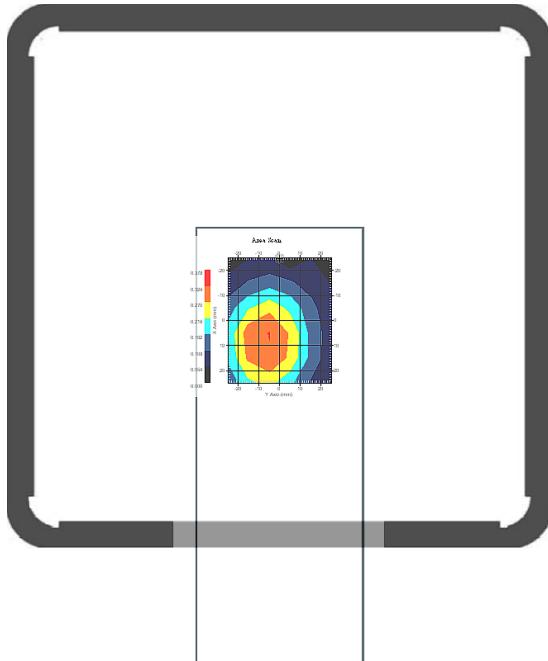

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.192 |
| SAR 1g (W/Kg) | 0.315 |

GPRS 850 Right side Towards Phantom Middle(190ch)



| | |
|--|--|
| Frequency (MHz) | 836.610021 |
| Relative permittivity (real part) | 55.37 |
| Conductivity (S/m) | 0.98 |
| Variation (%) | -0.54 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 6 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liquid:20.7°C |
| Data | 2011-2-18 |

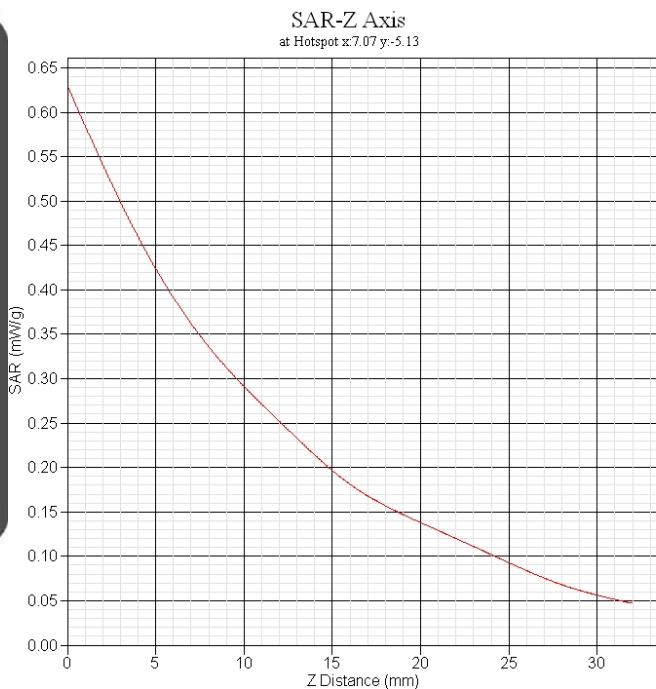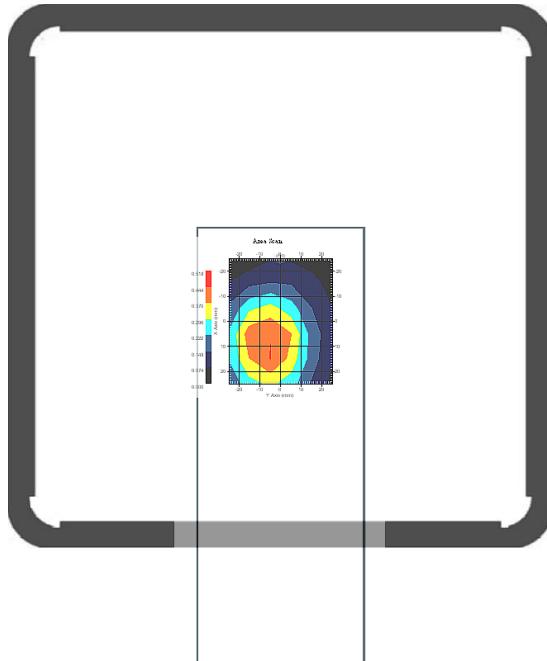

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.270 |
| SAR 1g (W/Kg) | 0.428 |

GPRS 850 Right side Towards Phantom High(251ch)



| | |
|--|--|
| Frequency (MHz) | 848.810210 |
| Relative permittivity (real part) | 55.01 |
| Conductivity (S/m) | 0.99 |
| Variation (%) | 0.15 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 6 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

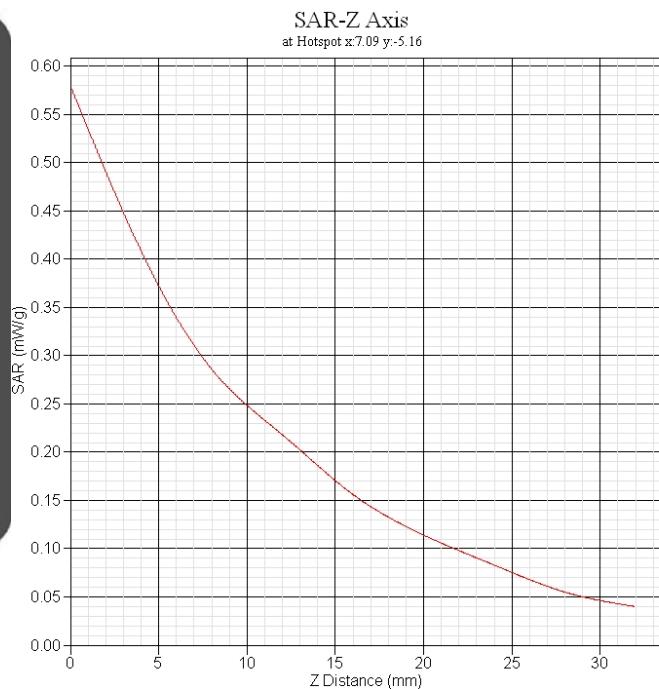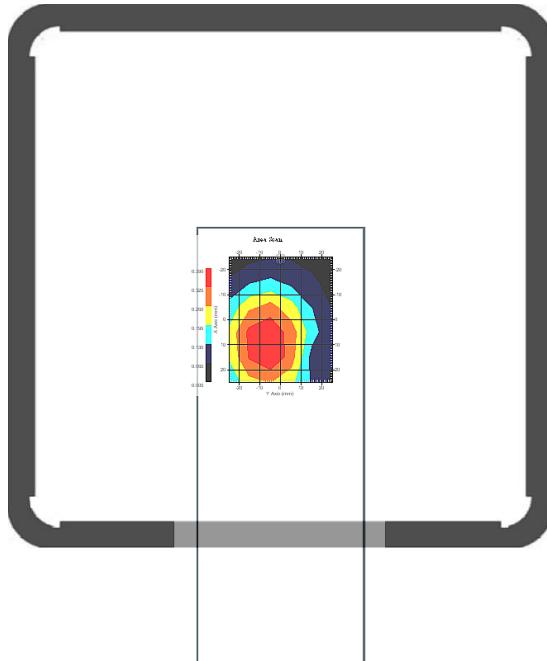

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.203 |
| SAR 1g (W/Kg) | 0.333 |

GPRS 1900 Front side Towards Phantom Middle(661ch)



| | |
|--|--|
| Frequency (MHz) | 1880.010002 |
| Relative permittivity (real part) | 53.28 |
| Conductivity (S/m) | 1.50 |
| Variation (%) | -0.60 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 4.7 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

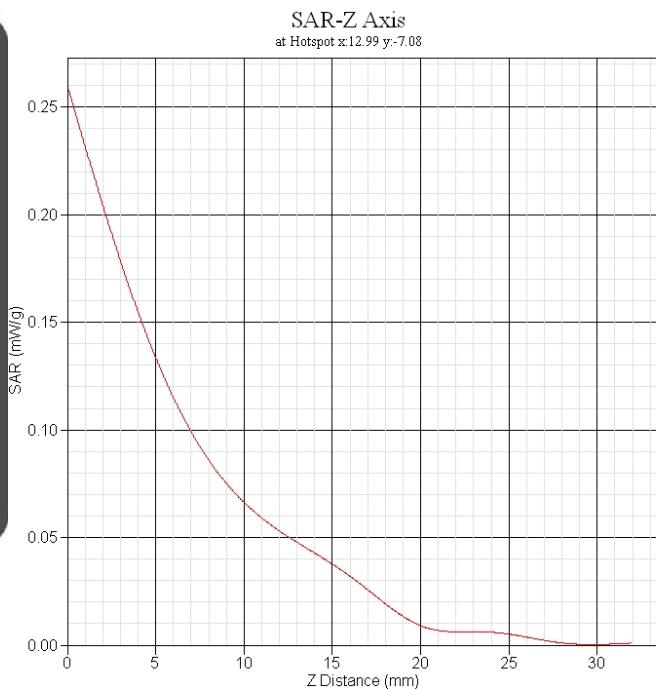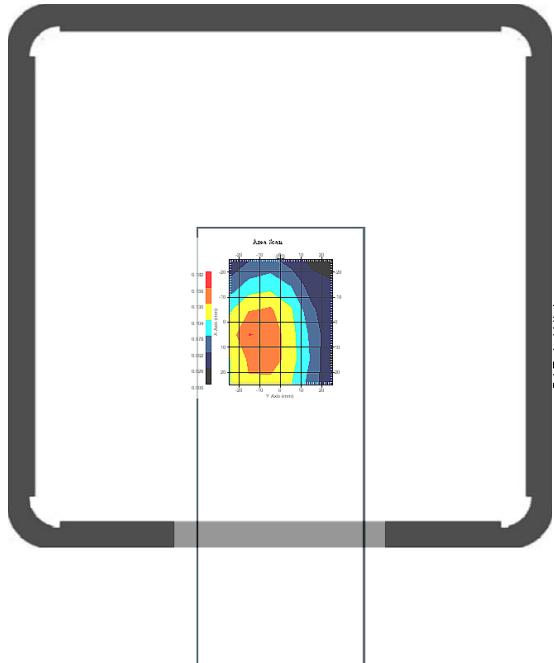

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.081 |
| SAR 1g (W/Kg) | 0.149 |

GPRS 1900 Back side Towards Phantom Middle(661ch)



| | |
|--|--|
| Frequency (MHz) | 1880.010002 |
| Relative permittivity (real part) | 53.28 |
| Conductivity (S/m) | 1.50 |
| Variation (%) | 2.13 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 4.7 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

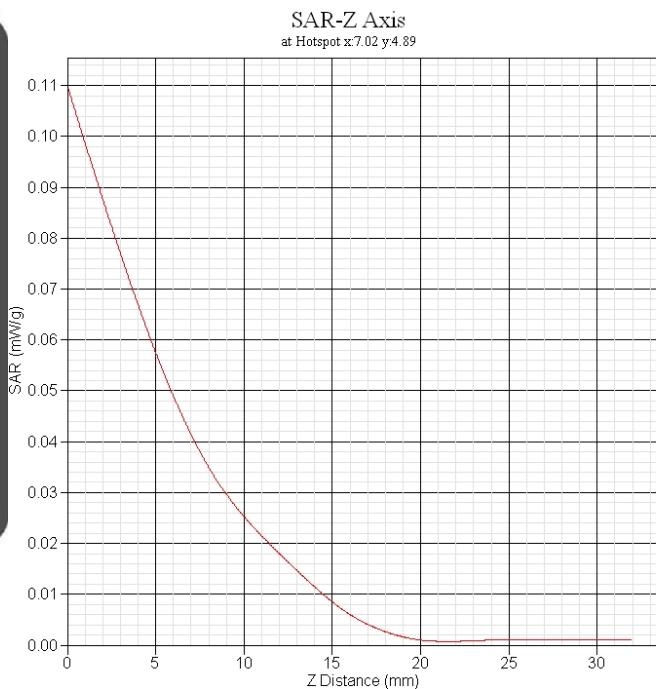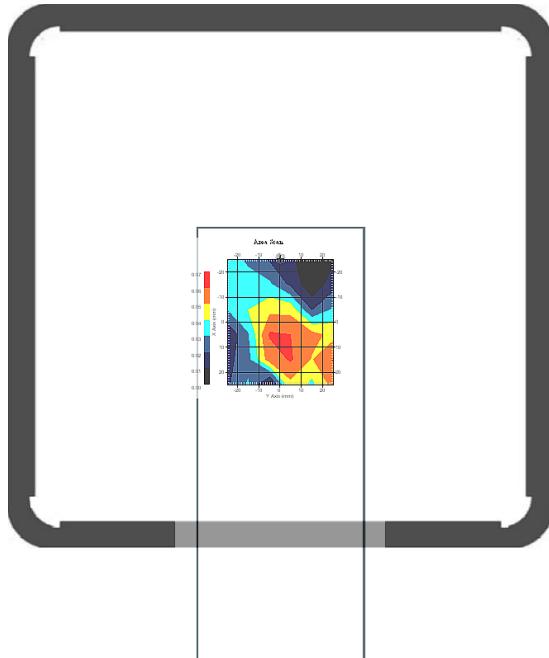

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.030 |
| SAR 1g (W/Kg) | 0.060 |

GPRS 1900 Top side Towards Phantom Middle(661ch)



| | |
|--|--|
| Frequency (MHz) | 1880.010002 |
| Relative permittivity (real part) | 53.28 |
| Conductivity (S/m) | 1.50 |
| Variation (%) | 2.13 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 4.7 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liquiud:20.7°C |
| Data | 2011-2-18 |

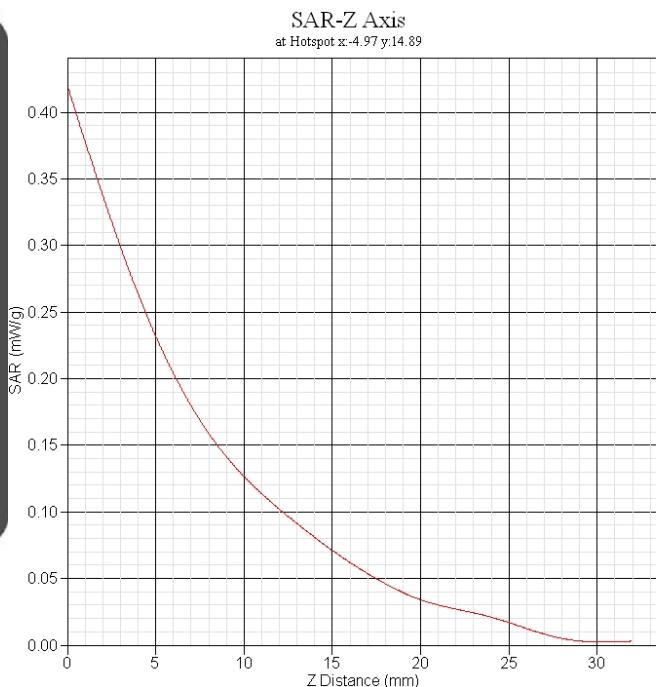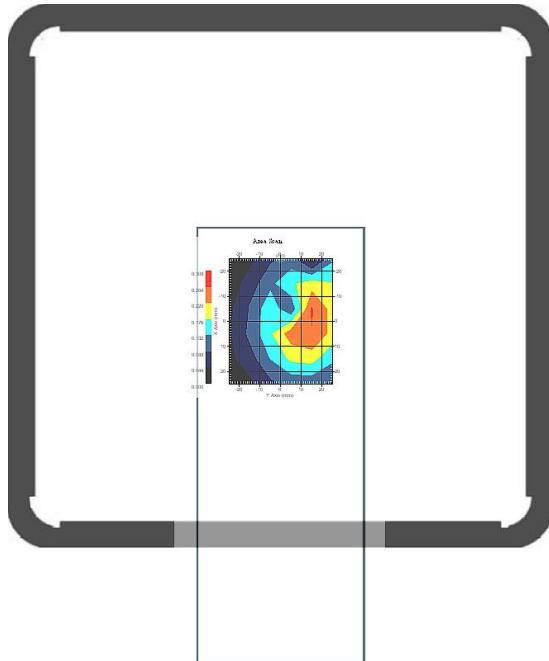

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.106 |
| SAR 1g (W/Kg) | 0.214 |

GPRS 1900 Right side Towards Phantom Low(512ch)



| | |
|--|--|
| Frequency (MHz) | 1850.200010 |
| Relative permittivity (real part) | 53.47 |
| Conductivity (S/m) | 1.49 |
| Variation (%) | -2.78 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 4.7 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

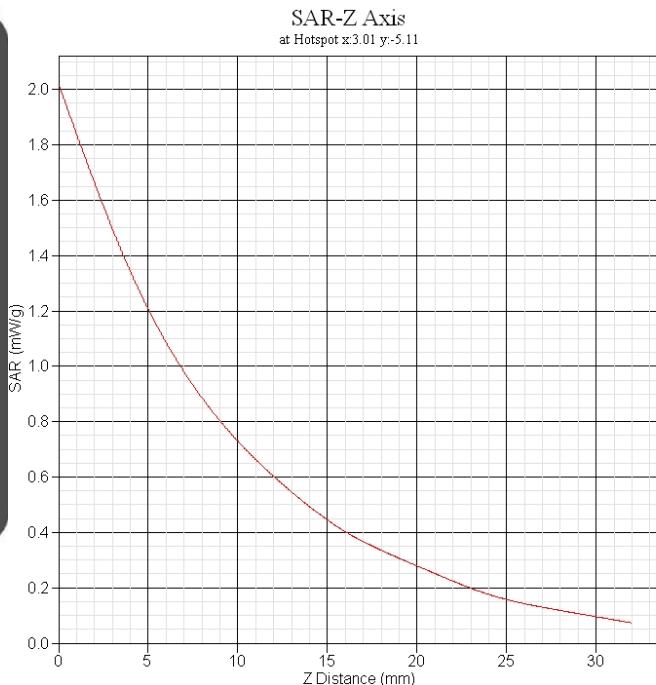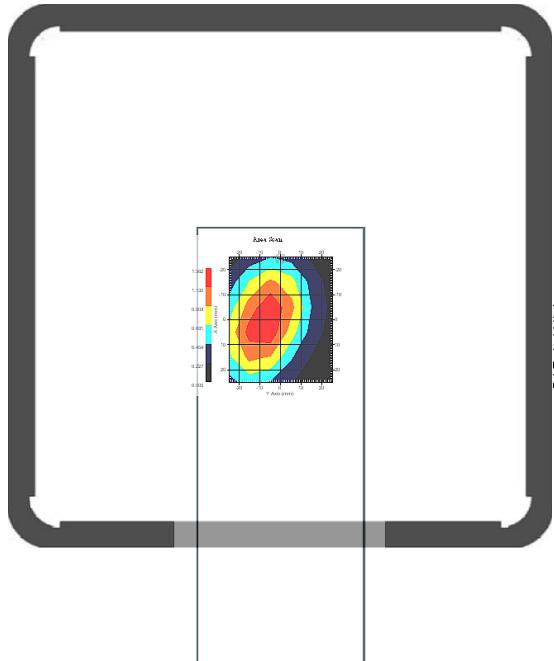

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.563 |
| SAR 1g (W/Kg) | 1.047 |

GPRS 1900 Right side Towards Phantom Middle(661ch)



| | |
|--|--|
| Frequency (MHz) | 1880.010002 |
| Relative permittivity (real part) | 53.28 |
| Conductivity (S/m) | 1.50 |
| Variation (%) | -2.66 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 4.7 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

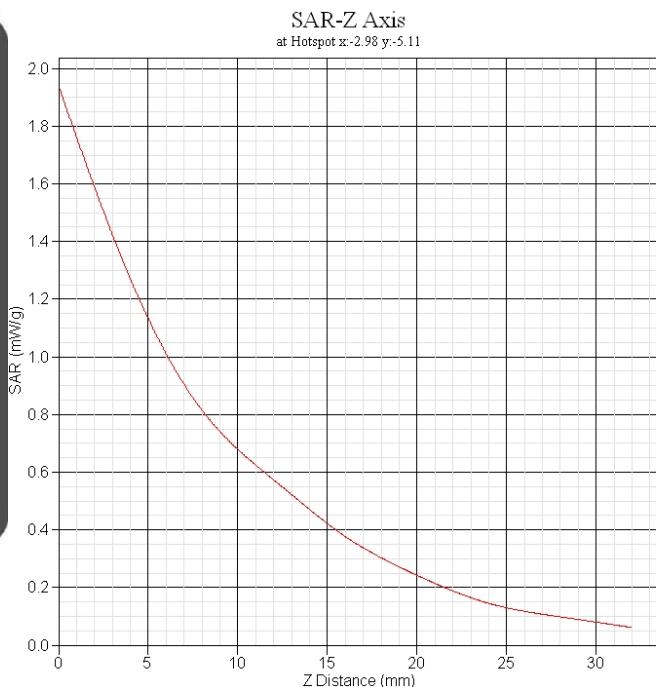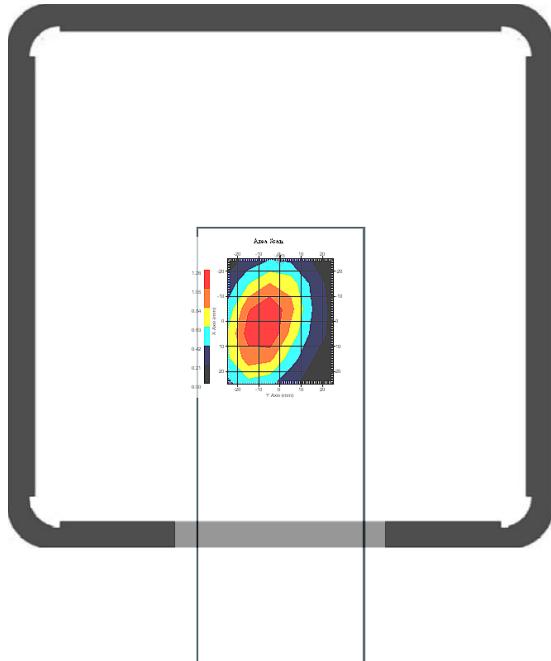

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.525 |
| SAR 1g (W/Kg) | 1.001 |

GPRS 1900 Right side Towards Phantom High(810ch)

| | |
|--|--|
| Frequency (MHz) | 1909.800002 |
| Relative permittivity (real part) | 53.11 |
| Conductivity (S/m) | 1.51 |
| Variation (%) | 2.23 |
| Duty Cycle Factor | 1 |
| Crest Factor | 8.3 |
| Conversion Factor | 4.7 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

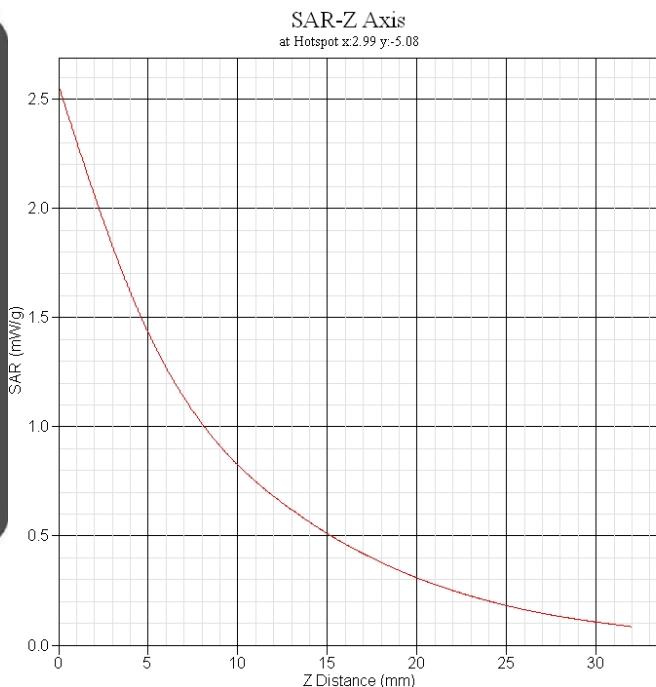
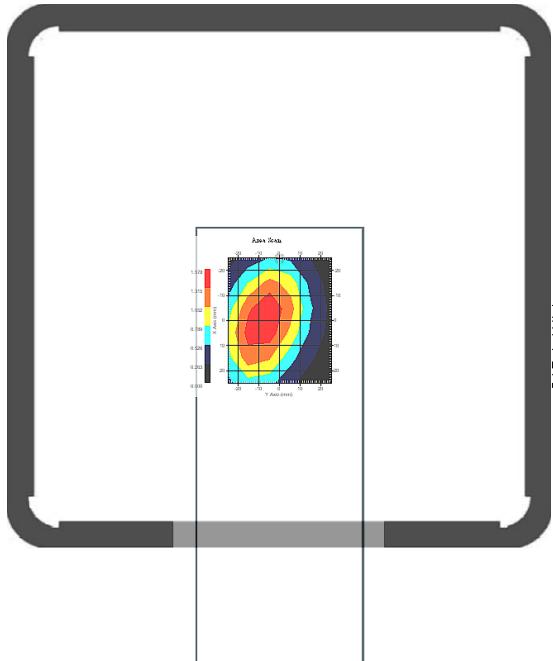


| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 0.793 |
| SAR 1g (W/Kg) | 1.443 |

System Performance Check Data

Body 835MHz



| | |
|---|--|
| Frequency (MHz) | 835 |
| Relative permitivity (real part) | 55.37 |
| Conductivity (S/m) | 0.98 |
| Variation (%) | -1.32 |
| Duty Cycle Factor | 1 |
| Crest Factor | 1 |
| Conversion Factor | 6 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liqiud:20.7°C |
| Data | 2011-2-18 |

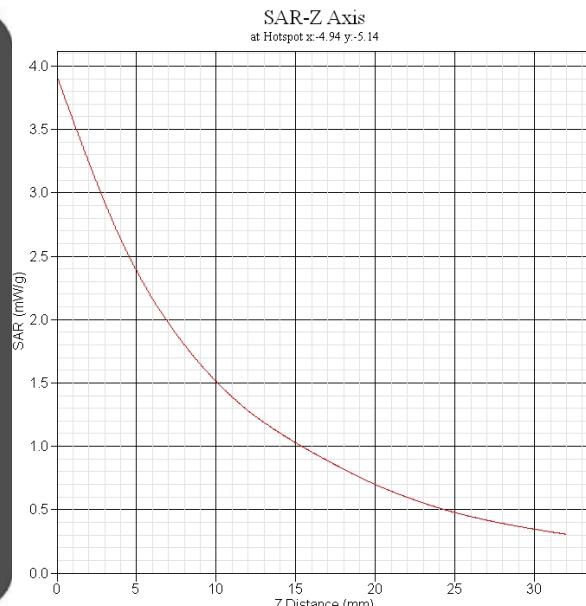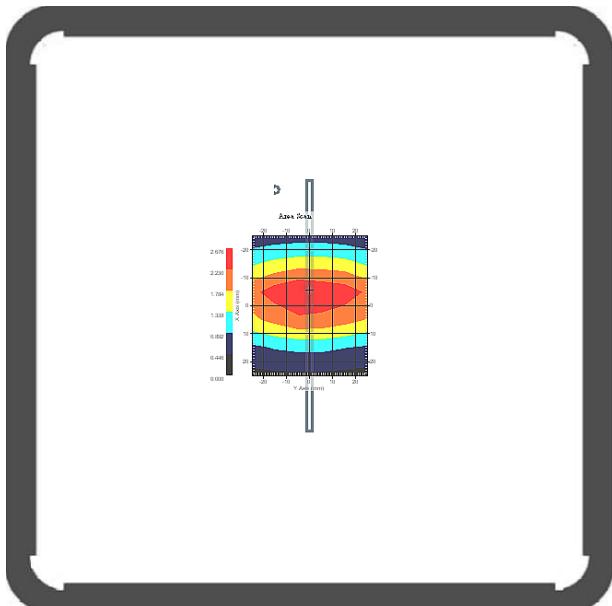

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 1.483 |
| SAR 1g (W/Kg) | 2.438 |

Body 1900MHz

| | |
|--|--|
| Frequency (MHz) | 1900 |
| Relative permittivity (real part) | 53.28 |
| Conductivity (S/m) | 1.50 |
| Variation (%) | -1.54 |
| Duty Cycle Factor | 1 |
| Crest Factor | 1 |
| Conversion Factor | 4.7 |
| Probe Sensitivity | 1.20 1.20 1.20 μV/(V/m)2 |
| Temperature | Ambient:22.1°C Liquid:20.7°C |
| Data | 2011-2-18 |

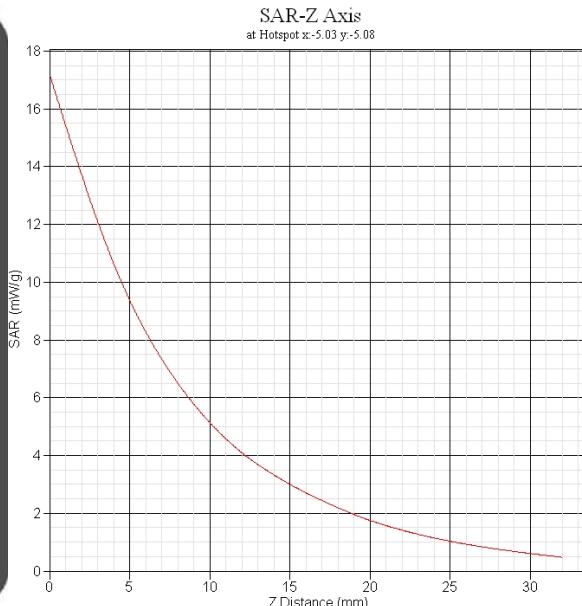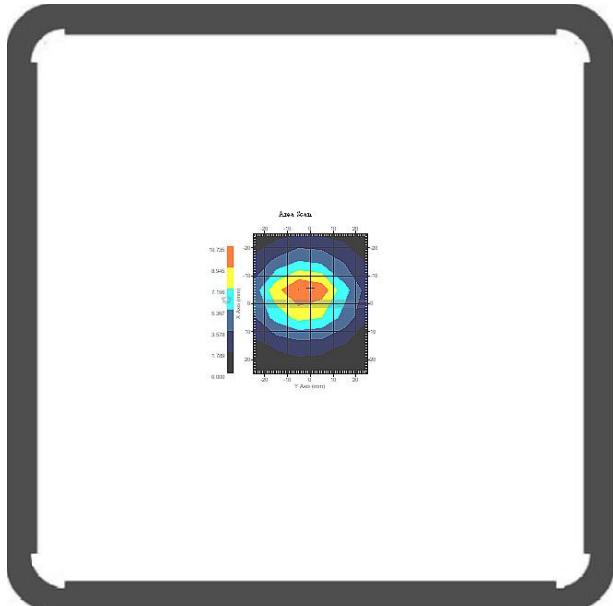

| | |
|-----------------------|--------------|
| SAR 10g (W/Kg) | 4.904 |
| SAR 1g (W/Kg) | 9.858 |

** END OF REPORT **