

MET Laboratories, Inc. Safety Certification - EMI - Telecom Environmental Simulation

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313 33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372 3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372 13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

July 7, 2014

Digital Receiver Technology, Inc. 12409 Milestone Center Dr. Germantown, MD 20876

Dear Steve Hudson,

Enclosed is the EMC Wireless test report for compliance testing of the Digital Receiver Technology, Inc., DRT1183C (Base Station) as tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 27 (Subpart L).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,

MET LABORATORIES, INC.

Jennifer Warnell

Documentation Department

Reference: (\Digital Receiver Technology, Inc.\EMC39286B-FCC27 Rev. 2)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. Safety Certification - EMI - Telecom Environmental Simulation

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313 33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372 3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372 13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

Digital Receiver Technology, Inc. Model DRT1183C

> Tested under FCC Certification Rules Title 47 of the CFR, Part 27

MET Report: EMC39286B-FCC27 Rev. 2

July 7, 2014

Prepared For:

Digital Receiver Technology, Inc. 12409 Milestone Center Dr. Germantown, MD 20876

> Prepared By: MET Laboratories, Inc. 914 W. Patapsco Ave Baltimore, MD 21230



Electromagnetic Compatibility Criteria Change Test Report

for the

Digital Receiver Technology, Inc. Model DRT1183C

Tested Under

FCC Certification Rules Title 47 of the CFR, Part 27

Benjamin Taylor

Project Engineer, Electromagnetic Compatibility Lab

Benjamin C. Taylor

Jennifer Warnell

Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 27 of the FCC Rules under normal use and maintenance.

Asad Bajwa,

Director, Electromagnetic Compatibility Lab

a Bajura.

Report Status Sheet

Revision Report Date Re Ø March 5, 2014		Reason for Revision
		Initial Issue.
1	March 12, 2014	Revised to reflect customer corrections.
2	July 7, 2014	Revised to reflect engineer corrections.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview	
	B. References	4
	C. Test Site	5
	D. Description of Test Sample	5
	E. Equipment Configuration	
	F. Support Equipment	
	G. Mode of Operation	
	H. Modifications	
	Modifications to EUT	<i>6</i>
	Modifications to Test Standard	
	I. Disposition of EUT	6
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	
	§ 2.1046 RF Power Output	
	§ 2.1049 Occupied Bandwidth	
	§ 2.1053 Radiated Spurious Emissions	
	§ 2.1051 Spurious Emissions at Antenna Terminals	
	§2.1055 Frequency Stability	30
IV.	Test Equipment	
V.	Certification & User's Manual Information	
	A. Certification Information	
	B. Label and User's Manual Information	
	List of Tables	
	List of Tables	
Table 1.	Executive Summary of EMC ComplianceTesting	2
Table 2.	EUT Summary Table	4
	Standard References	
	Equipment Configuration	
	Support Equipment	
	Test Equipment List	
	• •	
	List of Figures	
Figure 1	Block Diagram of Test Configuration	4

List of Plots

Plot 1. RF Output Power, CDMA, Low Channel	9		
Plot 2. RF Output Power, CDMA, Mid Channel			
Plot 3. RF Output Power, CDMA, High Channel			
Plot 4. RF Output Power, WCDMA, Low Channel			
Plot 5. RF Output Power, WCDMA, Mid Channel			
Plot 6. RF Output Power, WCDMA, High Channel	10		
Plot 7. Occupied Bandwidth, 2111.25 MHz, CDMA	12		
Plot 8. Occupied Bandwidth, 2132.5 MHz, CDMA	12		
Plot 9. Occupied Bandwidth, 2153.75 MHz, CDMA	13		
Plot 10. Occupied Bandwidth, 2111.4 MHz, WCDMA	13		
Plot 12. Occupied Bandwidth, 2152.6 MHz, WCDMA	14		
1			
· · · · · · · · · · · · · · · · · · ·			
Flot 36. Collaucted Spurious Ellissions, wCDMA, 2132.6 MHz, 1 GHz – 23 GHz	29		
List of Photographs			
Plot 6			

List of Terms and Abbreviations

AC	Alternating Current	
ACF	Antenna Correction Factor	
Cal	Calibration	
d	Measurement Distance	
dB	Decibels	
dBμA	Decibels above one microamp	
dBμV	Decibels above one microvolt	
dBμA/m	Decibels above one microamp per meter	
$dB\mu V/m$	Decibels above one microvolt per meter	
DC	Direct Current	
E	Electric Field	
DSL	Digital Subscriber Line	
ESD	Electrostatic Discharge	
EUT	Equipment Under Test	
f	Frequency	
FCC	Federal Communications Commission	
GRP	Ground Reference Plane	
H	Magnetic Field	
НСР	Horizontal Coupling Plane	
Hz	Hertz	
IEC	International Electrotechnical Commission	
kHz	kilohertz	
kPa	kilopascal	
kV	kilovolt	
LISN	Line Impedance Stabilization Network	
MHz	Megahertz	
μН	microhenry	
μ	microfarad microfarad	
μs	microseconds	
NEBS	Network Equipment-Building System	
PRF	Pulse Repetition Frequency	
RF	Radio Frequency	
RMS	Root-Mean-Square	
TWT	Traveling Wave Tube	
V/m	Volts per meter	
VCP	Vertical Coupling Plane	



I. Executive Summary



A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Digital Receiver Technology, Inc. DRT1183C, with the requirements of Part 27. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the DRT1183C. Digital Receiver Technology, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the DRT1183C, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 27, in accordance with Digital Receiver Technology, Inc., purchase order number 053066.

Reference	Description	Compliance
§2.1046; §27.50(d)	RF Power Output	Compliant
§2.1047	Modulation Characteristics	Not Applicable
§2.1049	Occupied Bandwidth	Compliant
§27.53	Band-Edge Channel Power	Not Applicable
§2.1051; §27.53(h)	Spurious Emissions at Antenna Terminals	Compliant
§2.1053; §27.53(h)	Radiated Spurious Emissions	Compliant
§2.1055	Frequency Stability over Temperature Variations	Compliant

Table 1. Executive Summary of EMC ComplianceTesting



II. Equipment Configuration



A. Overview

MET Laboratories, Inc. was contracted by Digital Receiver Technology, Inc. to perform testing on the DRT1183C, under Digital Receiver Technology, Inc.'s purchase order number 053066.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Digital Receiver Technology, Inc., DRT1183C.

The results obtained relate only to the item(s) tested.

Model(s) Tested	DRT1183C (Base Station)		
Model(s) Covered:	DRT1183C (Base Station)		
Filing Status:	Class II Permissive Change to add AWS band with CDMA and WCDMA modulations.		
	FCC ID: XLM1183C		
	Primary Power: 120 VAC, 60 Hz		
EUT Specifications:	Equipment Code:	PCB	
	Avg. RF Output Power:	CDMA – 0.02999 W WCDMA – 0.01399 W	
	EUT Frequency Range:	2111-2154MHz (CDMA) 2112-2153 MHz (WCDMA)	
Analysis:	The results obtained relate only to the item(s) tested.		
	Temperature: 15-35° C		
Environmental Test Conditions:	I Relative Hilmidity: 30-60%		
	Barometric Pressure: 860-1060 mbar		
Evaluated by:	Benjamin Taylor		
Date(s):	July 7, 2014		

Table 2. EUT Summary Table

B. References

CFR 47, Part 27	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 27:	
,	Rules and Regulations for Advanced Wireless Services	
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical	
ANSI C03.4:2003	And Electronic Equipment in the Range of 9 kHz to 40 GHz	
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories	
EIA/EIA 602 A 2001	Land Mobile FM or PM Communication Equipment Measurement and Performance	
EIA/TIA-603-A-2001	Standards	

Table 3. Standard References



C. Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Ave, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site).

D. Description of Test Sample

DRT1183C is a mobile cellular, PCS, and TDMA base station.

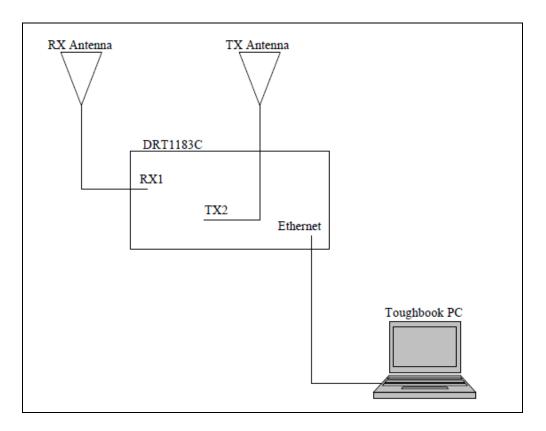


Figure 1. Block Diagram of Test Configuration



E. Equipment Configuration

Name / Description	Model Number	Part Number	Serial Number
TacTRAM	DRT1183C		

Table 4. Equipment Configuration

F. Support Equipment

Ref. ID	Name / Description	Manufacturer	Model Number	Customer Supplied Calibration Data
	Toughbook PC	Panasonic	CF-19	CF-19KDRAX6M

Table 5. Support Equipment

G. Mode of Operation

Operates as a mobile base station in GSM, CDMA, and WCDMA in the Cellular and PCS bands and TDMA in the 800MHz band.

H. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

I. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Digital Receiver Technology, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1046 RF Power Output

Test Requirement(s): §2.1046 and §27.50(d)

(2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

(3) A licensee operating a base or fixed station in the 2110-2155 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must coordinate such operations in advance with all Government and non-Government satellite entities in the 2025-2110 MHz band. Operations with power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with the following licensees authorized to operate within 120 kilometers (75 miles) of the base or fixed station operating in this band: all Broadband Radio Service (BRS) licensees authorized under Part 27 in the 2155-2160 MHz band and all advanced wireless services (AWS) licensees authorized to operate on adjacent frequency blocks in the 2110-2155 MHz band.

Test Procedures: RF power output measurement was made at the RF output terminal using a spectrum analyzer,

with suitable attenuation where appropriate.


Test Results: Equipment complies with 47CFR 2.1046 and 27.50(d).

The following page show measurements of RF Power output which is recorded below.


Test Engineer(s): Benjamin Taylor

Test Date(s): 11/24/13






Plot 1. RF Output Power, CDMA, Low Channel




Plot 2. RF Output Power, CDMA, Mid Channel




Plot 3. RF Output Power, CDMA, High Channel






Plot 4. RF Output Power, WCDMA, Low Channel



Plot 5. RF Output Power, WCDMA, Mid Channel



Plot 6. RF Output Power, WCDMA, High Channel



§ 2.1049 Occupied Bandwidth

Test Requirement(s): § 2.1049 Measurements required: Occupied bandwidth: The occupied bandwidth, that is the

frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as

applicable.

Test Procedures: As required by 47 CFR 2.1049, occupied bandwidth measurements were made with a Spectrum

Analyzer connected to the RF ports for both Uplink and Downlink

The modulation characteristics of signal generator's carrier was measured first at a maximum RF level prescribed by the OEM. The signal generator was then connected to either the Uplink or Downlink input at the appropriate RF level. The resulting modulated signal through the EUT

was measured and compared against the original signal.


Test Results: Equipment complies with Section 2.1049. The following pages show measurements of 99%

and -26 dB Occupied Bandwidth plots.


Test Engineer(s): Benjamin Taylor

Test Date(s): 11/24/13



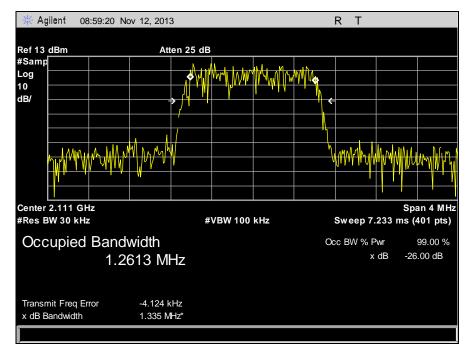


Plot 7. Occupied Bandwidth, 2111.25 MHz, CDMA

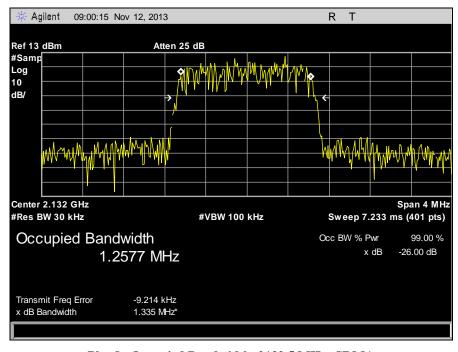


Plot 8. Occupied Bandwidth, 2132.5 MHz, CDMA




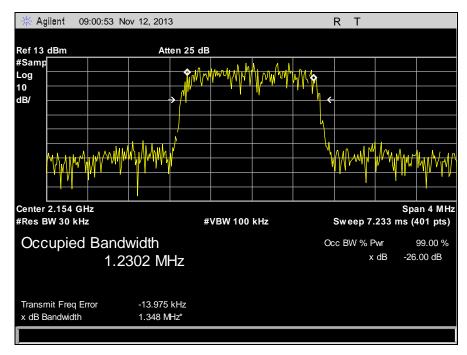


Plot 9. Occupied Bandwidth, 2153.75 MHz, CDMA

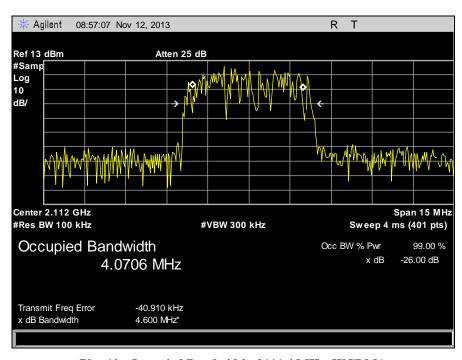

Plot 10. Occupied Bandwidth, 2111.4 MHz, WCDMA

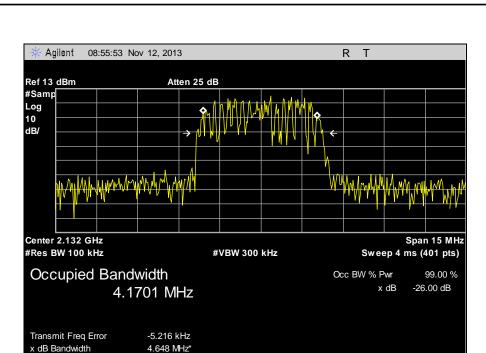

Plot 11. Occupied Bandwidth, 2132.4 MHz, WCDMA

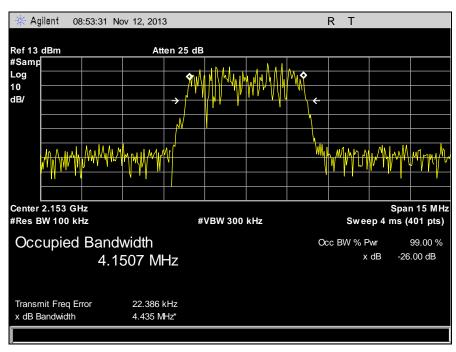

Plot 12. Occupied Bandwidth, 2152.6 MHz, WCDMA

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1053 Radiated Spurious Emissions

Test Requirement(s): § 2.1053 and 27.53(h) Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

For operations in the 1710-1755 MHz and 2110-2155 MHz bands, the power of any emissions outside a licensee's frequency block shall be attenuated below the transmitter power P by at least 43+10log(P).



Electromagnetic Compatibility
Intentional Radiators
CFR Title 47 Part 27

Test Procedures: As required by 47 CFR 2.1053, the *field strengths of radiated spurious emissions* were made in

accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM

Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). The distance between the EUT and the test antenna was 3 meters for below 1 GHz and 1m for frequencies above 1 GHz. The EUT's RF ports were connected to a dummy load. The intensities of the radiated emissions were maximized by rotating the turntable 360 degrees and varying the receive antenna from 1 to 4m. Measurements

were made with the receive antenna in both horizontal and vertical polarizations.

Test Results: Equipment complies with Section 2.1053. The limit for spurs is -13 dBm. Measurements


revealed that no spurs came even close to this limit. Therefore, measurements using substitution method were not performed. Also, testing was performed using a CW signal. The following

plots have been corrected.


Test Engineer: Benjamin Taylor

Test Date(s): 11/25/13



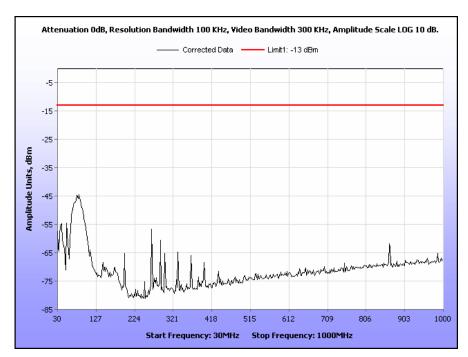


Plot 13. Radiated Spurious Emissions, CDMA, 2111.25 MHz, 30 MHz - 1 GHz

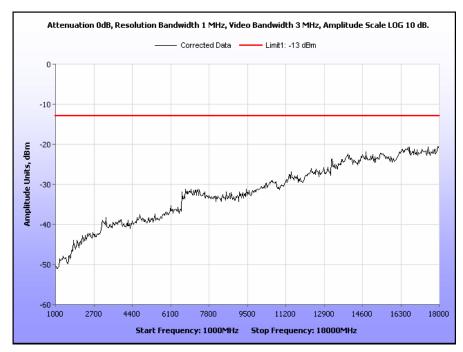


Plot 14. Radiated Spurious Emissions, CDMA, 2111.25 MHz, 1 GHz - 18 GHz



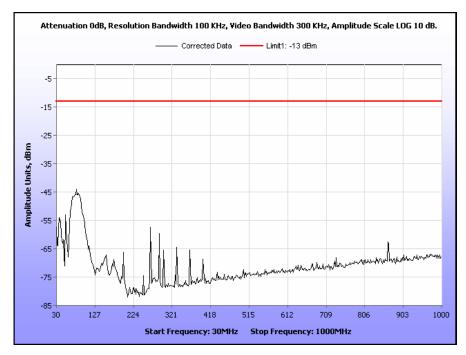


Plot 15. Radiated Spurious Emissions, CDMA, 2132.5 MHz, 30 MHz - 1 GHz

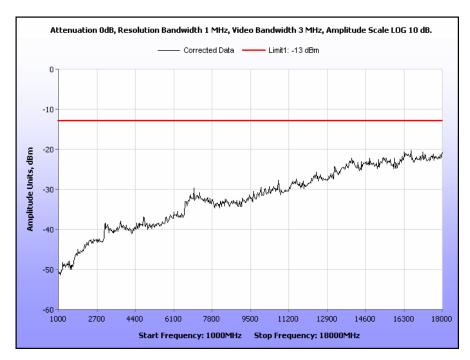


Plot 16. Radiated Spurious Emissions, CDMA, 2132.5 MHz, 1 GHz – 18 GHz



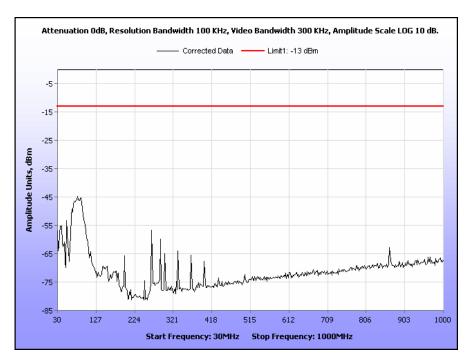


Plot 17. Radiated Spurious Emissions, CDMA, 2153.75 MHz, 30 MHz – 1 GHz

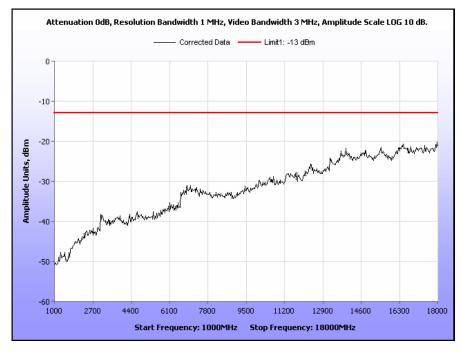


Plot 18. Radiated Spurious Emissions, CDMA, 2153.75 MHz, 1 GHz - 18 GHz




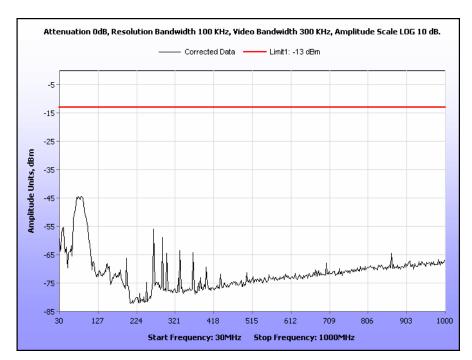


Plot 19. Radiated Spurious Emissions, WCDMA, Low Channel, 30 MHz - 1 GHz

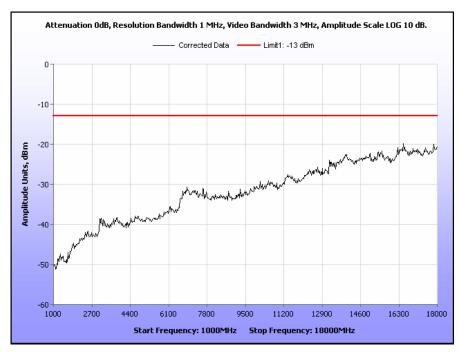

Plot 20. Radiated Spurious Emissions, WCDMA, Low Channel, 1 GHz - 18 GHz

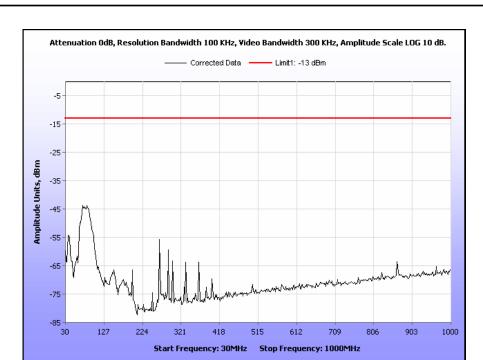


Plot 21. Radiated Spurious Emissions, WCDMA, Mid Channel, 30 MHz - 1 GHz

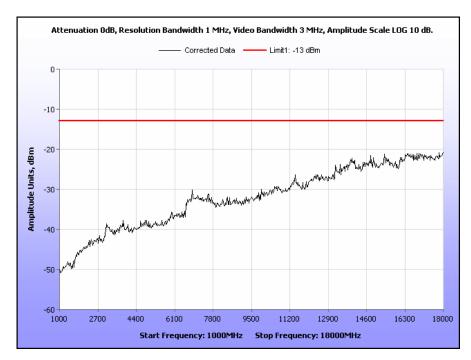


Plot 22. Radiated Spurious Emissions, WCDMA, Mid Channel, 1 GHz – 18 GHz



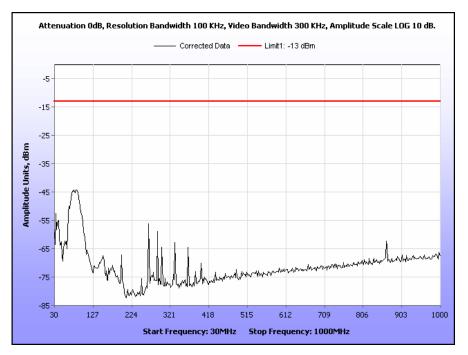

Plot 23. Radiated Spurious Emissions, WCDMA, High Channel, 30 MHz - 1 GHz

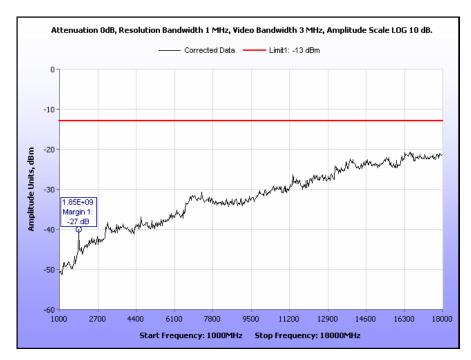

Plot 24. Radiated Spurious Emissions, WCDMA, High Channel, 1 GHz – 18 GHz



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1051 Spurious Emissions at Antenna Terminals

Test Requirement(s): § 2.1051and 27.53(h) Measurements required: Spurious emissions at antenna terminals:

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate.

For operations in the 1710-1755 MHz and 2110-2155 MHz bands, the power of any emissions outside a licensee's frequency block shall be attenuated below the transmitter power P by at least 43 + 10log (P).

Test Procedures: A modulated carrier generated by the signal generator carrier was connected to either the Uplink

or Downlink RF port at a maximum level as determined by the OEM A spectrum analyzer was connected to either the Uplink or Downlink port depending on the circuitry being measured.

The spectrum was investigated from 30MHz to the 10th harmonic of the carrier.

The inter-modulation requirements were performed in a similar manner as described above. The spectrum analyzer was set to 100KHz RBW and 300KHz VBW. Two modulated carriers

were injected into the EUT. The in band spurious emissions were investigated.

The filter response has also be measured and recorded.

Test Results: Equipment complies with Section 2.1051 and 27.53(h). The following pages show

measurements of Spurious Emission plots


The following analysis and plots are included below to illustrate compliance with the required

rule parts.


Test Engineer(s): Benjamin Taylor

Test Date(s): 11/25/13



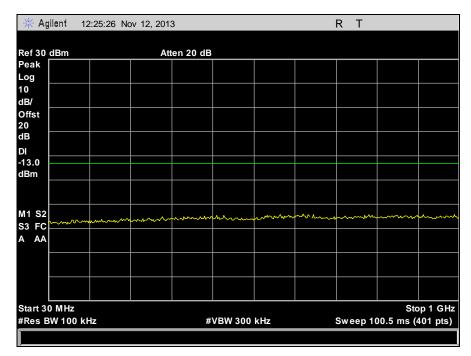


Plot 25. Conducted Spurious Emissions, CDMA, 2111.25 MHz, 30 MHz - 1 GHz

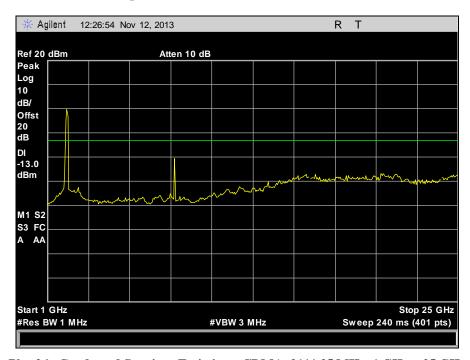


Plot 26. Conducted Spurious Emissions, CDMA, 2111.25 MHz, 1 GHz - 25 GHz

DRT1183C

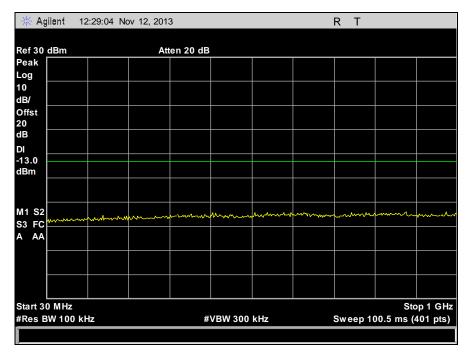


Plot 27. Conducted Spurious Emissions, CDMA, 2132.5 MHz, 30 MHz - 1 GHz

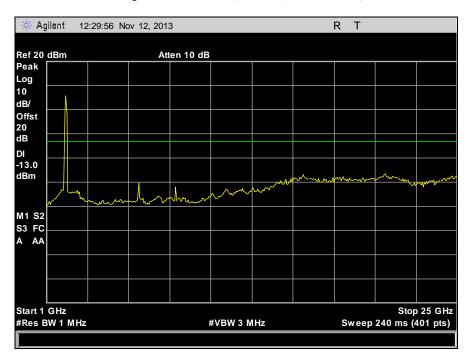


Plot 28. Conducted Spurious Emissions, CDMA, 2132.5 MHz, 1 GHz - 25 GHz




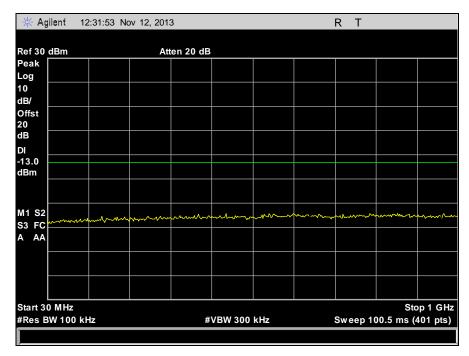


Plot 29. Conducted Spurious Emissions, CDMA, 2153.75 MHz, 30 MHz - 1 GHz

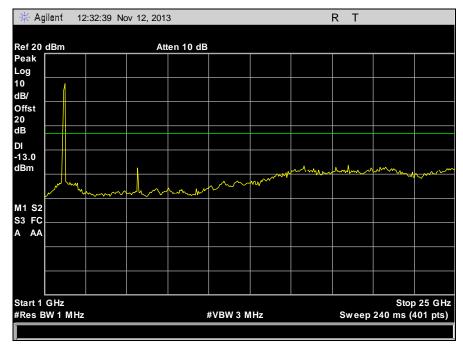

Plot 30. Conducted Spurious Emissions, CDMA, 2153.75 MHz, 1 GHz - 25 GHz

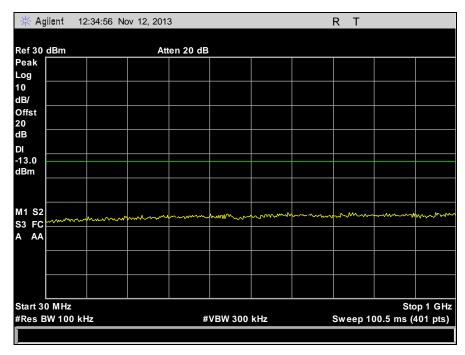


Plot 31. Conducted Spurious Emissions, WCDMA, 2112.4 MHz, 30 MHz – 1 GHz

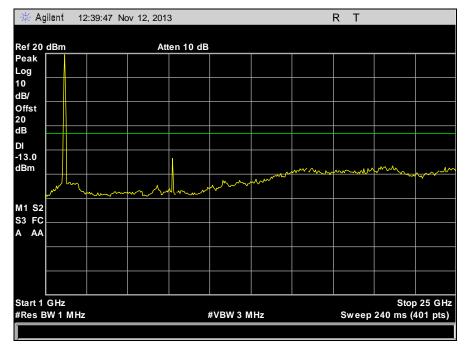


Plot 32. Conducted Spurious Emissions, WCDMA, 2112.4 MHz, 1 GHz - 25 GHz




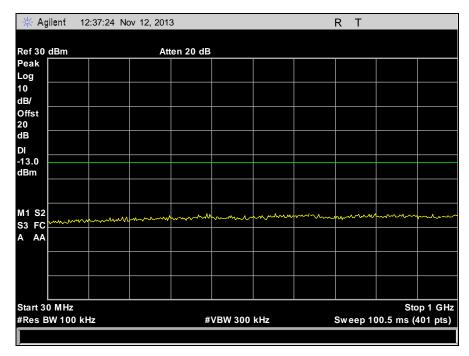


Plot 33. Conducted Spurious Emissions, WCDMA, 2132.4 MHz, 30 MHz – 1 GHz

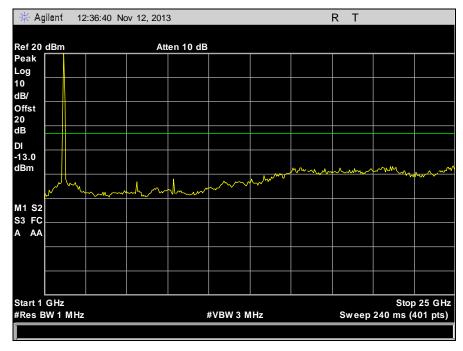

Plot 34. Conducted Spurious Emissions, WCDMA, 2132.4 MHz, 1 GHz - 25 GHz

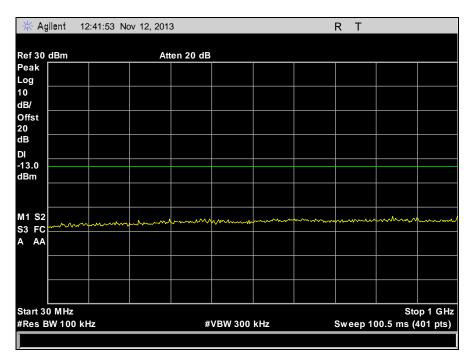

Plot 35. Conducted Spurious Emissions, WCDMA, 2152.6 MHz, 30 MHz - 1 GHz

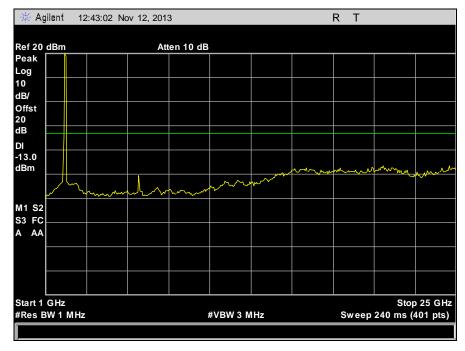

Plot 36. Conducted Spurious Emissions, WCDMA, 2152.6 MHz, 1 GHz - 25 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§2.1055 Frequency Stability

Test Requirement(s): §2.1055

Test Procedures: As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output

terminals using a Directional Coupler through a Spectrum Analyzer and Power Meter.

The EUT was setup in an Environmental chamber with the support equipment outside the chamber. The EUT was set to transmit on the low channel. The out of band emissions were then compared to the -13dBm limit. The same procedure was repeated on the high channel. This procedure was done at a temperature range of -30C to +50C. At the ambient temperature, in addition to the measurements at the nominal voltage, the voltage was varied to +/- 15% and

measurements were taken at those voltages.


Test Results: Equipment complies with this section.

Test Engineer(s): Benjamin Taylor

Test Date(s): 11/25/13

Temperature (°C)	Frequency (MHz)	Drift (%)	Limit (%)
-30	2132.400101	0.0000047	+/-0.01
-20	2132.400097	0.0000045	+/-0.01
-10	2132.400091	0.0000043	+/-0.01
0	2132.400082	0.0000038	+/-0.01
10	2132.400060	0.0000028	+/-0.01
20	2132.400027	0.0000013	+/-0.01
30	2132.400038	0.0000018	+/-0.01
40	2132.400044	0.0000021	+/-0.01
50	2132.400046	0.0000022	+/-0.01

Voltage (VAC)	Frequency (MHz)	Drift (%)	Limit (%)	
102	2132.400076	0.0000036	+/-0.01	
120	2132.400027	0.0000013	+/-0.01	
138	2132.400076	0.0000036	+/-0.01	

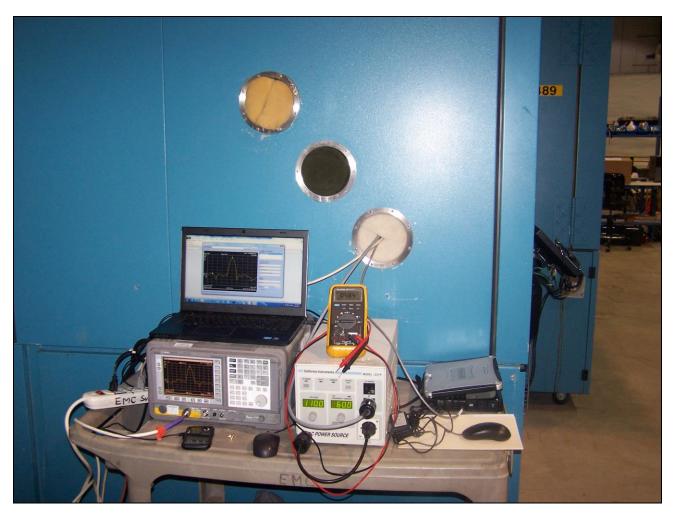

Photograph 1. Frequency Stability, Test Setup

IV. Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4612	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	07/30/2013	01/30/2015
1T4300	SEMI-ANECHOIC CHAMBER # 1 (NSA)	EMC TEST SYSTEMS	NONE	07/24/2012	07/24/2015
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	07/16/2012	07/16/2014
1T4299	SIGNAL GENERATOR	НР	E4432B	11/13/2013	05/13/2015
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	08/06/2012	02/06/2014
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	01/08/2013	07/08/2014
1T4354	SIGNAL GENERATOR	HEWLETT PACKARD	83752A	10/28/2013	04/28/2015
1T4592	RF FILTER KIT	VARIOUS	N/A	NOT REQUIRED	
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42- 01001800- 30-10P	SEE NOTE	
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	NOT REQUIRED	
1T4548	AC POWER SOURCE	CALIFORNIA INSTRUMENTS	1251P	SEE NOTE	
2T1083	TEMPHUMIDITY CHAMBER/ CONTROLLER/ RECORDER/ TRANSMITTER	THERMOTRON/ THERMOTRON/ HONEYWELL/ VAISALA	SE-1000-3- 3/7800/ DR4500/ HMM30C	05/25/2013	05/25/2014
1T4377	TRUE RMS MULTIMETER	FLUKE	189	07/25/2013	01/25/2015

Table 6. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or preproduction stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements provided that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.





- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
 - (i) Compliance testing;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Electromagnetic Compatibility Certification & User's Manual Information CFR Title 47 Part 27

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated. In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

(a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.

(b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

CFR Title 47 Part 27



Digital Receiver Technology, Inc. DRT1183C

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

- (a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:
 - (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:
 - This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.
 - (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:
 - This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.
 - (3) All other devices shall bear the following statement in a conspicuous location on the device:
 - This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
 - (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
 - (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Electromagnetic Compatibility Certification & User's Manual Information CFR Title 47 Part 27

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

End of Report