

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Traptanium Portal

Model No.: 0000586

FCC ID: XLU0000586

Trademark: Activision

Report No.: KAD140507023E

Issue Date: June 05, 2014

Prepared for

ACTIVISION PUBLISHING, INC. 3100 Ocean Park Blvd., Santa Monica, CA90405, USA

Prepared by DONGGUAN EMTEK CO., LTD.

No.281, Guantai Road, Nancheng District, Shenzhen, Guangdong, China

TEL: 86-769-22807078 FAX: 86-769-22807079



VERIFICATION OF COMPLIANCE

Applicant:	ACTIVISION PUBLISHING, INC
	3100 Ocean Park Blvd., Santa Monica, CA90405, USA
Manufacturer:	SUNLIGHT TECHNONLOGY ELECTRONIC MANUFACTURING CO., LTD.
	New Asia Industrial City, Lin Village, Tangxia Town, Dongguan City, China
Product Description:	Traptanium Portal
Model Number:	0000586
Trademark:	Activision
File Number:	KAD140507023E
Date of Test:	May 07, 2014 to June 03, 2014

We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.225(2013).

The test results of this report relate only to the tested sample identified in this report.

Approved By

DONGGUAN EMTEK CO., LTD.

Sam Lv / Q.A. Manager



Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	1	KAD140507023E



Table of Contents

1	GE	NERAL INFORMATION	5
	1.1 1.2 1.3 1.4 1.5 1.6	PRODUCT DESCRIPTION RELATED SUBMITTAL(S) / GRANT(S) TEST METHODOLOGY SPECIAL ACCESSORIES EQUIPMENT MODIFICATIONS TEST FACILITY.	
2	SYS	STEM TEST CONFIGURATION	
	2.1 2.2 2.3 2.4	EUT CONFIGURATION EUT EXERCISE TEST PROCEDURE CONFIGURATION OF TESTED SYSTEM	7 7
3	SU	MMARY OF TEST RESULTS	9
4	CO	NDUCTED EMISSIONS TEST	10
	4.1 4.2 4.3 4.4 4.5 4.6	MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) MEASUREMENT EQUIPMENT USED CONDUCTED EMISSION LIMIT MEASUREMENT RESULT CONDUCTED MEASUREMENT PHOTOS:	10 11 11
5	RA	DIATED EMISSION TEST	13
	5.1 5.2 5.3 5.4 5.5 5.6	MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) MEASUREMENT EQUIPMENT USED RADIATED EMISSION LIMIT MEASUREMENT RESULT RADIATED MEASUREMENT PHOTOS:	13 14 16
6	FRI	EQUENCY STABILITY MEASUREMENT	19
	6.1 6.2 6.3 6.4 6.5	FREQUENCY STABILITY LIMITS MEASUREMENT INSTRUMENTS LIST TEST PROCEDURE EUT OPERATING CONDITIONS TEST RESULTS	19 19 19
7	EM	IISSION BANDWIDTH	29
	7.1 7.2 7.3 7.4	EMISSION BANDWIDTH LIMIT TEST INSTRUMENTS TEST PROCEDURE TEST SETUP	29 29
8	AN [*]	TENNA REQUIREMENT	31
	8.1	RESULT	31

APPENDIX (Photos of EUT) (3 pages)



1 General Information

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 13.56MHz
- B). Modulation: ASK
- C). Number of Channel: 1 channel
- D). Power Supply: DC 5V From Play Station 4 Input AC 120V/60Hz

Note: for a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

1.2 Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID: XLU0000586 filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.



1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

There is a USB cable with two ferrite cores in this submission.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab.

Accredited by FCC, Aug. 18, 2011 The Certificate Number is 247565.

Accredited by Industry Canada, February 19, 2014 The Certificate Registration Number. is 9444A.

Name of Firm

DONGGUAN EMTEK CO., LTD.

Site Location

No.281, Guantai Road, Nancheng District,

Dongguan, Guangdong, China



2 System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.



2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1	Traptanium Portal	Activision	0000586	XLU0000586	N/A	EUT
2.	Play Station 4	Sony	N/A	N/A	N/A	Support Equipment

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment.
- (2) Three orthogonal panels X, Y, Z of EUT are tested. And the test results of the worst test panel(Y) were recorded.



3 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	§15.207 AC Power Conducted Emission	
§15.225(a)(b)(c), (d), §15.209	Radiated Emission	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.203	Antenna Application	Compliant




4 Conducted Emissions Test

4.1 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured was complete.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Equipment Used

Equipment	Serial No.	Manufacturer	Model No.	Cal. Date	Due Date
Test Receiver	Rohde & Schwarz	ESCS30	100162	05/16/2014	05/15/2015
L.I.S.N.	Rohde & Schwarz	ENV216	101161	05/16/2014	05/15/2015
50Ω Coaxial Switch	Anritsu	MP59B	6100214550	05/16/2014	05/15/2015



4.4 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.5 Measurement Result

Date of Test: May 27, 2014 Temperature: 22° C


Frequency Detector: $0.15 \sim 30 \text{MHz}$ Humidity: 50° C

Test Result: PASS Test Mode: TX Mode

Test Line	Frequency MHz	Emission Level QP dB(µV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Over QP dB(μV)	Over AV dB(μV)
	0.150	43.57	36.70	66.00	56.00	-22.43	-19.3
	0.180	45.18	31.59	64.49	54.49	-19.31	-22.9
Line	0.200	50.56	35.70	63.61	53.61	-13.05	-17.91
Lille	0.355	37.63	22.01	58.84	48.84	-21.21	-26.83
	0.510	31.78	24.23	56.00	46.00	-24.22	-21.77
	5.580	39.22	24.53	60.00	50.00	-20.78	-25.47
	0.150	43.77	36.97	66.00	56.00	-22.23	-19.03
	0.200	50.06	35.56	63.61	53.61	-13.55	-18.05
Neutral	0.225	43.41	31.36	62.63	52.63	-19.22	-21.27
Neutrai	0.285	39.91	27.17	60.67	50.67	-20.76	-23.5
	0.510	34.12	25.06	56.00	46.00	-21.88	-20.94
	5.610	43.11	27.78	60.00	50.00	-16.89	-22.22



4.6 Conducted Measurement Photos:

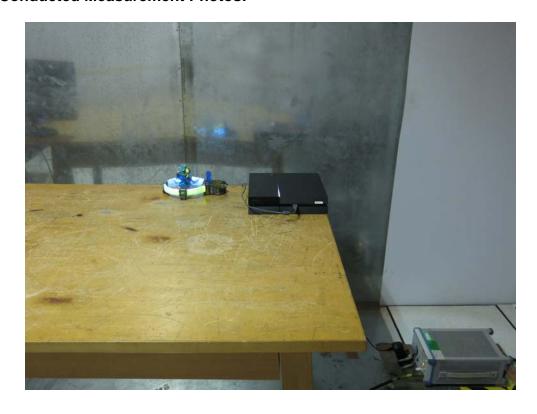




5 Radiated Emission Test

5.1 Measurement Procedure


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

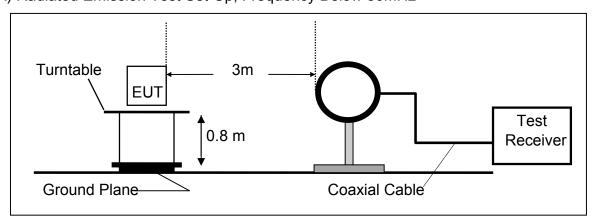

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

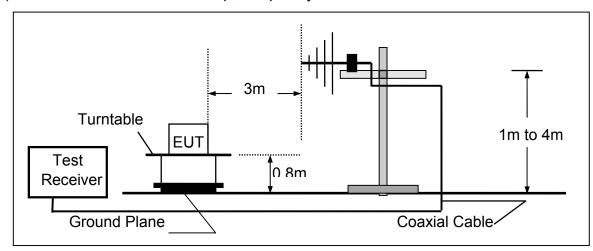



5.3 Measurement Equipment Used

Equipment	Serial No.	Manufacturer	Model No.	Cal. Date	Due Date
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2014	05/15/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2014	05/15/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2014	05/15/2015
Loop Antenna	Schwarzbeck	FMZB 1519	012	05/16/2014	05/15/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917039 9	05/16/2014	05/15/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2014	05/15/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/19/2014	05/18/2015
Cable	Rosenberger	N/A	FP2RX2	05/19/2014	05/18/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/19/2014	05/18/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/19/2014	05/18/2015
Pre-Amplifier	A.H.	PAM-0126	1415261	05/19/2014	05/18/2015

5.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209						
	Field Stren	gth	Field Strength Lim	nitation Frequency tion at		
Frequency	Limitatio	า	3m Mea	asurement Dist		
(MHz)	(uV/m)	Dist	(uV/m)	(dBuV/m)		
0.009 - 0.490	2400 / F(KHz)	300m	10000 *	20log 2400/F(KHz) + 80		
0.009 - 0.490	2400 / F(KHZ)	300111	2400/F(KHz)			
0.490 – 1.705	24000 /	30m	100 *	20log 24000/F(KHz) +		
0.490 - 1.705	F(KHz)		24000/F(KHz)	40		
1.705 – 30.00	30	30m	100* 30	20log 30 + 40		
30.0 - 88.0	100	3m	100	20log 100		
88.0 – 216.0	150	3m	150	20log 150		
216.0 – 960.0	200	3m	200	20log 200		
Above 960.0	500	3m	500	20log 500		



FCC Part 15.225(a)/(b)/(c)						
Frequency	Field Stren	igth	Field Strength Limitation Frequency tion a			
(MHz)	Limitatio	n	3m Mea	surement Dist		
	(uV/m)	Dist	t (uV/m) (dBuV/m)			
13.110 – 13.410	106	30 m	106*100	80.5		
13.410 - 13.553	334	30 m	334*100	90.5		
13.553 – 13.567	15,848	30 m	15,848*100	124		
13.567 – 13.710	334	30 m	334*100	90.5		
13.710 – 14.010	106	30 m	106*100	80.5		

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205, and the emissions located in restricted bands also comply with 15.209 limit.



5.5 Measurement Result

Operation Mode:

TX Mode

Test Date:

May 26, 2014

Frequency Range:

9KHz~30MHz

Temperature :

28℃

Test Result:

PASS

Humidity:

65 %

Measured Distance: 3m

n Test By:

t By: KYO

Freq.	Ant.Pol.	Emission Level	Limit 3m	Over	Note
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)	
5.45	V	30.56	69.54	-38.98	QP
9.32	V	31.23	69.54	-38.31	QP
14.56	V	32.66	69.54	-36.88	QP
18.42	V	33.22	69.54	-36.32	QP
28.67	V	34.54	69.54	-35.00	QP
29.55	V	35.18	69.54	-34.36	QP
4.41	Н	30.42	69.54	-39.12	QP
11.45	Н	31.67	69.54	-37.87	QP
15.67	Н	32.34	69.54	-37.20	QP
23.62	Н	33.12	69.54	-36.42	QP
27.88	Н	34.34	69.54	-35.20	QP
29.11	Н	35.28	69.54	-34.26	QP

Operation Mode:

TX Mode

Test Date:

May 26, 2014

Frequency Range:

30~1000MHz

Temperature : Humidity :

28℃

Test Result: Measured Distance:

PASS 3m

Test By:

65 % KYO

Freq.	Ant.Pol.	Emission Level	Limit 3m	Over	Note
(MHz)	H/V	(dBuV/m)	(dBuV/m)	(dB)	
34.8500	V	28.05	40.00	-11.95	QP
41.6400	V	31.68	40.00	-8.32	QP
47.4600	V	28.94	40.00	-11.06	QP
50.3700	V	26.68	40.00	-13.32	QP
75.5900	V	30.43	40.00	-9.57	QP
167.7400	V	33.31	43.50	-10.19	QP
117.3000	Н	27.81	43.50	-15.69	QP
166.7700	Н	28.62	43.50	-14.88	QP
182.2900	Н	32.91	43.50	-10.59	QP
208.4800	Н	31.57	43.50	-11.93	QP
226.9100	Н	32.78	46.00	-13.22	QP
237.5800	Н	36.62	46.00	-9.38	QP




May 26, 2014 **Operation Mode:** TX Mode Test Date:

Temperature _{28℃} 13.110MHz~14.010 Frequency Range: MHz


Test Result: **PASS** 65 % Humidity:


Measured Distance: 3m Test By: **KYO**

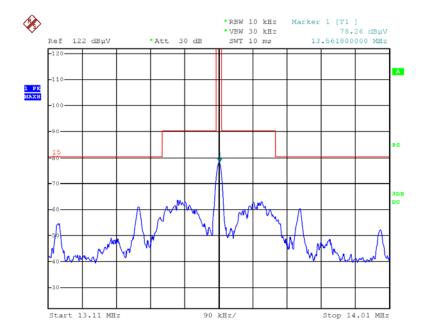



5.6 Radiated Measurement Photos:

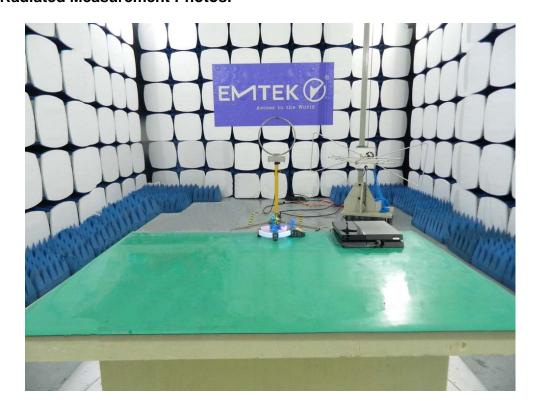

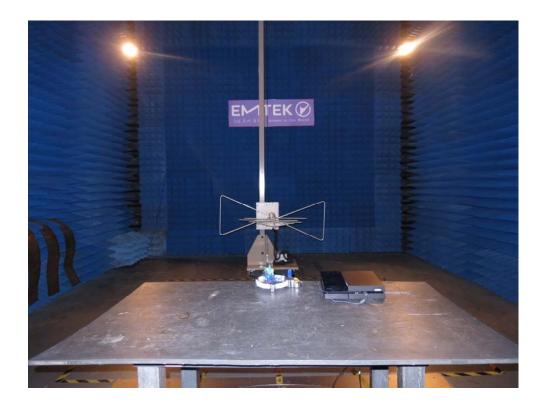



6 FREQUENCY STABILITY MEASUREMENT

6.1 FREQUENCY STABILITY LIMITS

FCC Part 15.225(e)

the frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of –20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new w battery.

6.2 MEASUREMENT INSTRUMENTS LIST

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Rohde & Schwarz	ESCI	100137	05/16/2014	05/15/2015

6.3 TEST PROCEDURE

- a. The equipment under test was connected to an external AC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.
- b. At room temperature (25±5°C), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.
- c. For the actual test configuration, please refer to the related Item -EUT Test Photos.

6.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



6.5 TEST RESULTS


E.U.T:	Traptanium Portal	Test Mode :	TX Mode		
Test Voltage :	DC 5V From Play Station 4 Input AC 120V/60Hz				


	Frequency Stability Versus Environmental Temperature						
Temperature (°Ç	Voltage (Vac)	Frequency (MHz)	Freq Error (ppm)	Limit (ppm)	Results		
-20	120V	13.56010	7.37	100	PASS		
-10	120V	13.56015	11.06	100	PASS		
0	120V	13.56005	3.69	100	PASS		
10	120V	13.55995	-3.69	100	PASS		
20	120V	13.56000	0.00	100	PASS		
30	120V	13.56025	18.44	100	PASS		
40	120V	13.56020	14.75	100	PASS		
50	120V	13.56015	11.06	100	PASS		

Frequency Stability Versus Input Volt					
Temperature (°C)	Voltage (Vac)	Frequency (MHz)	Freq Error (ppm)	Limit (ppm)	Results
20	102	13.56005	3.69	100	PASS
20	108	13.56015	11.06	100	PASS
20	114	13.56010	7.37	100	PASS
20	120	13.56000	0.00	100	PASS
20	126	13.56020	14.75	100	PASS
20	132	13.56010	7.37	100	PASS
20	138	13.56015	11.06	100	PASS





Frequency Stability Versus Environmental Temperature

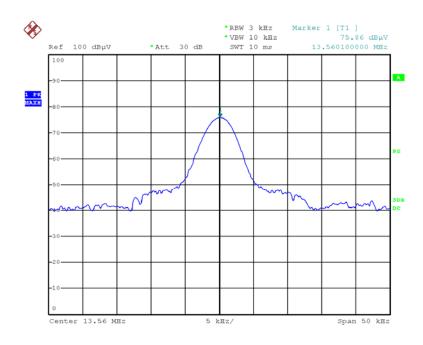

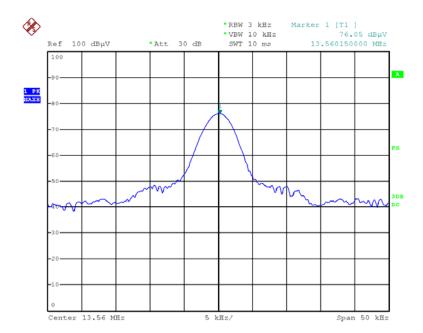




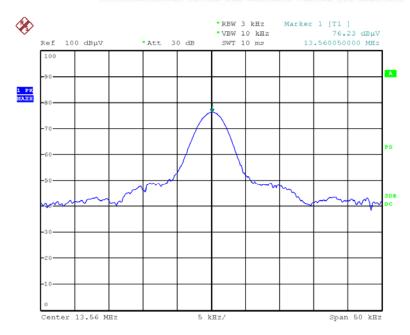


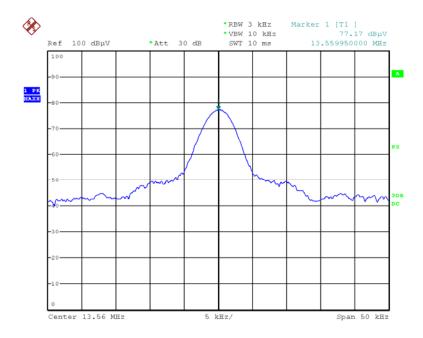


Dongguan EMTEK Co., Ltd. No.281, Guantai Road, Nancheng District, Dongguan, Guangdong, China www.emtek.com.cn Tel:+86-769-2280 7078 Fax:+86-769-2280 7079




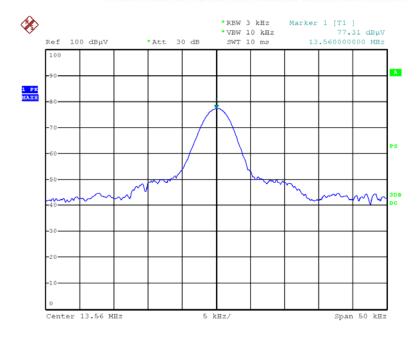

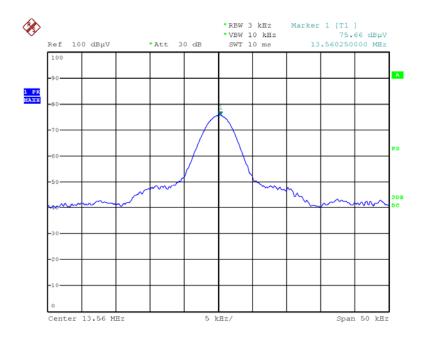




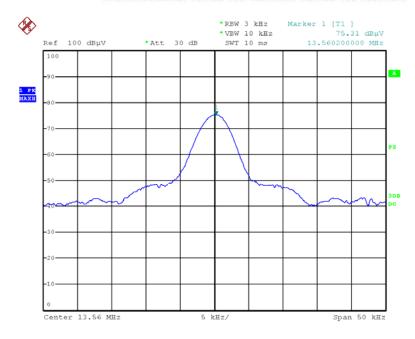


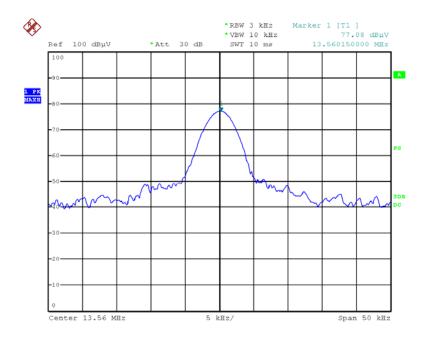





Frequency Stability Versus Input Voltage

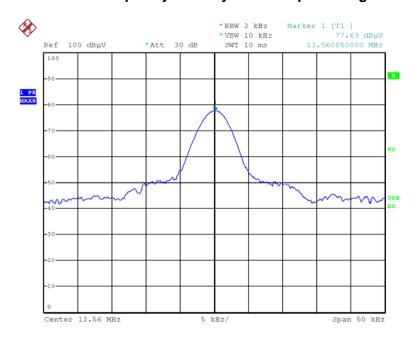

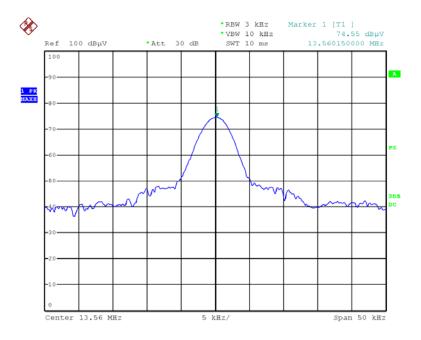





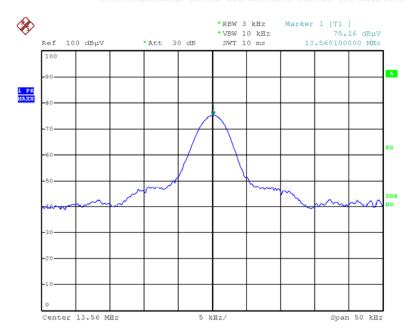

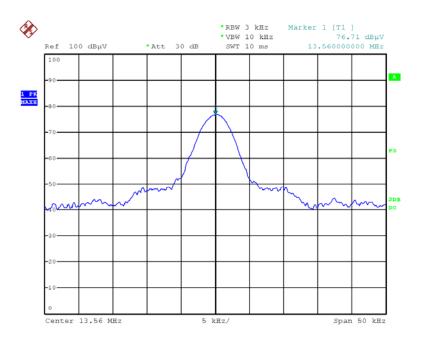




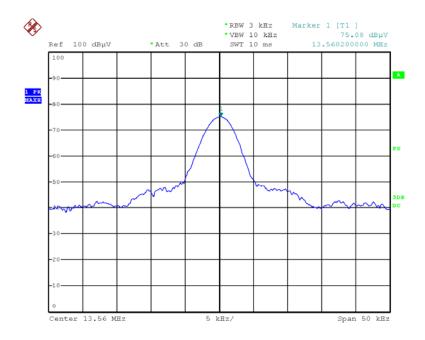

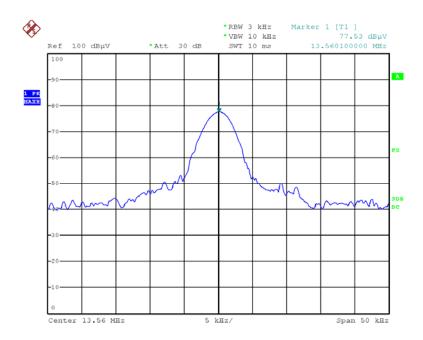

Dongguan EMTEK Co., Ltd. No.281, Guantai Road, Nancheng District, Dongguan, Guangdong, China www.emtek.com.cn Tel:+86-769-2280 7078 Fax:+86-769-2280 7079



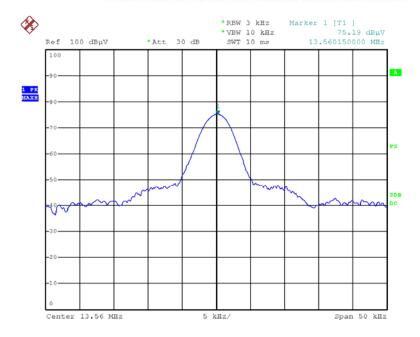



7 EMISSION BANDWIDTH

7.1 Emission Bandwidth Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).


7.2 TEST INSTRUMENTS

Refer a test equipment and calibration data table in this test report.

7.3 TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10kHz RBW and 30kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


7.4 Test Setup

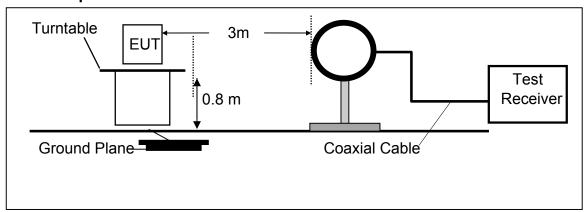


Frequency	20dB Bandwidth	99%Bandwidth	Results
(MHz)	(kHz)	(kHz)	
13.56	8.4	8.6	PASS



20dB BANDWIDTH TEST PLOT

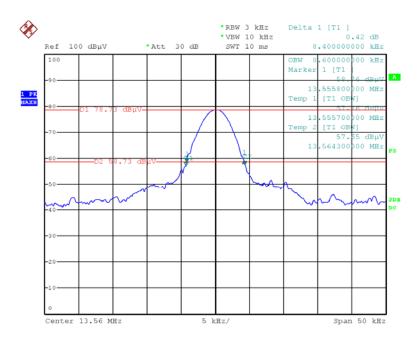

99% BANDWIDTH TEST PLOT

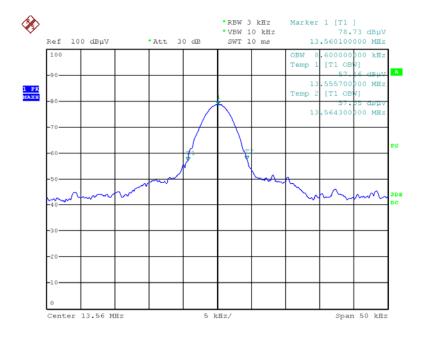



8 ANTENNA REQUIREMENT

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

8.1 Result

The EUT's antenna used an inter Loop Antenna and integral on the PCB.



APPENDIX I (Photos of EUT)



