



<b>Report Reference ID:</b>	156523-3TRFWL
-----------------------------	---------------

<b>Test specification:</b>	Title 47 – Telecommunication Chapter I – Federal Communications Commission Subchapter B – Common carrier services – <b>Part 27 – Miscellaneous wireless communications services</b>
----------------------------	--

<b>Applicant:</b>	TEKO Telecom S.p.A. Via Meucci, 24/a I-40024 Castel S. Pietro Terme (BO) (Italy)
<b>Apparatus:</b>	Optical system
<b>FCC ID:</b>	XM2-LOWPOWER
<b>Model:</b>	TRU8A19AWWL/AC-WS

<b>Testing laboratory:</b>	Nemko Italy S.p.A. Via Carroccio, 4 I-20046 Biassono (Italy)
----------------------------	--

	<b>Name and title</b>	<b>Date</b>
<b>Tested by:</b>	 G. Curioni, Wireless/EMC Specialist	2010-09-27
<b>Reviewed by:</b>	 P. Barbieri, Wireless/EMC Specialist	2010-09-27

## Table of contents

<b>Section 1: Report summary .....</b>	<b>3</b>
1.1    Test specification.....	3
1.2    Statement of compliance.....	3
1.3    Exclusions .....	3
1.4    Registration number .....	3
1.5    Test report revision history .....	3
1.6    Limits of responsibility .....	3
<b>Section 2: Summary of test results .....</b>	<b>4</b>
2.1    FCC Part 27, test results .....	4
<b>Section 3: Equipment under test (EUT) and application details .....</b>	<b>5</b>
3.1    Applicant details .....	5
3.2    Modular equipment.....	5
3.3    Product details.....	5
3.4    Application purpose.....	5
3.5    Composite/related equipment.....	5
3.6    Sample information.....	6
3.7    EUT technical specifications.....	6
3.8    Operation of the EUT during testing .....	6
3.9    EUT setup diagram.....	6
<b>Section 4: Engineering considerations .....</b>	<b>7</b>
4.1    Modifications incorporated in the EUT.....	7
4.2    Deviations from laboratory tests procedures .....	7
4.3    Technical judgment .....	7
<b>Section 5: Test conditions .....</b>	<b>8</b>
5.1    Power source and ambient temperatures.....	8
<b>Section 6: Measurement uncertainty .....</b>	<b>9</b>
<b>Section 7: Test equipment .....</b>	<b>10</b>
<b>Section 8: Testing data .....</b>	<b>11</b>
8.1    Clause 27.50(d) Peak output power at RF antenna connector .....	11
8.2    Clause 27.52 RF safety .....	25
8.3    Clause 27.53 (h) Spurious emissions at RF antenna connector .....	26
8.4    Clause 27.53 (h) Radiated spurious emissions .....	77
8.5    Clause 27.53(f) Radiated spurious emissions within 1559–1610 MHz band.....	78
8.6    Clause 27.54 Frequency stability .....	79
8.7    Clause 2.1049 Occupied bandwidth.....	80
<b>Section 9: Filter Frequency Response.....</b>	<b>105</b>
<b>Section 10: Block diagrams of test set-ups .....</b>	<b>106</b>
<b>Section 11: EUT photos .....</b>	<b>107</b>

 <b>Nemko</b>	<b>Section 1: Report summary</b>	<b>Product:</b> TRU8A19AWWL/AC-WS

## Section 1: Report summary

### 1.1 Test specification

<b>Specifications</b>	<b>Part 27 – Miscellaneous wireless communications services</b>
-----------------------	---

### 1.2 Statement of compliance

<b>Compliance</b>	In the configuration tested the EUT was found compliant Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
This report contains an assessment of apparatus against specifications based upon tests carried out on samples submitted at Nemko Canada Inc. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 27. Radiated tests were conducted in accordance with ANSI C63.4-2003.	

### 1.3 Exclusions

<b>Exclusions</b>	<b>None</b>
-------------------	-------------

### 1.4 Registration number

<b>Registration number:</b>	481407 (10 m Semi anechoic chamber)
-----------------------------	-------------------------------------

### 1.5 Test report revision history

<b>Revision #</b>	<b>Details of changes made to test report</b>
TRF	Original report issued
---	---

### 1.6 Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

**Section 2: Summary of test results****Product: TRU8A19AWWL/AC-WS****Section 2: Summary of test results****2.1 FCC Part 27, test results**

Part	Test description	Verdict
§27.50(d)	Peak output power at RF antenna connector	Pass
§27.52	RF safety	N/A a)
§27.53(h)	Spurious emissions at RF antenna connector	Pass
§27.53(h)	Radiated spurious emissions	Pass b)
§27.53(f)	Radiated spurious emissions within 1559–1610 MHz band	N/A c)
§27.54	Frequency stability	N/A d)
§2.1049	Occupied bandwidth	Pass

Notes:

- a) NO Antenna provided
- b) See test report 131640-3TRFEMC
- c) AWS band
- d) Modulation & frequency conversion circuitry not in use.



### Section 3: Equipment under test (EUT) and application details

#### 3.1 Applicant details

<b>Applicant complete business name</b>	Name:	Teko Telecom S.p.A.
	Federal Registration Number (FRN):	0018963462
	Grantee code	XM2
<b>Mailing address</b>	Address: City: Province/State: Post code: Country:	Via Meucci, 24/a Castel S. Pietro Terme Bologna 40024 Italy

#### 3.2 Modular equipment

<b>a) Single modular approval</b>	Single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>b) Limited single modular approval</b>	Limited single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>

#### 3.3 Product details

<b>FCC ID</b>	Grantee code:	XM2
	Product code:	-LOWPOWER
<b>Equipment class</b>	TNB	
<b>Description of product as it is marketed</b>	Optical System	
	Model name/number:	TRU8A19AWWL/AC-WS
	Serial number:	090569002

#### 3.4 Application purpose

<b>Type of application</b>	<input type="checkbox"/> Original certification <input type="checkbox"/> Change in identification of presently authorized equipment Original FCC ID: <input type="checkbox"/> Grant date: <input checked="" type="checkbox"/> Class II permissive change or modification of presently authorized equipment
----------------------------	---

#### 3.5 Composite/related equipment

<b>a) Composite equipment</b>	The EUT is a composite device subject to an additional equipment authorization Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
<b>b) Related equipment</b>	The EUT is part of a system that operates with, or is marketed with, another device that requires an equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>c) Related FCC ID</b>	If either of the above is "yes": <input type="checkbox"/> has been granted under the FCC ID(s) listed below: <input checked="" type="checkbox"/> is in the process of being filled under the FCC ID(s) listed below: <input type="checkbox"/> is pending with the FCC ID(s) listed below: <input type="checkbox"/> has a mix of pending and granted statuses under the FCC ID(s) listed below: i FCC ID: XM2-LOWPOWER ii FCC ID:

 <b>Nemko</b>	<b>Section 3: Equipment under test (EUT) details</b>	<b>Product: TRU8A19AWWL/AC-WS</b>

### 3.6 Sample information

<b>Receipt date:</b>	2010-09-20
<b>Nemko sample ID number:</b>	-----


### 3.7 EUT technical specifications

<b>Operating band:</b>	AWS: Down Link: 2110–2155 MHz, Up Link: 1710-1755 MHz
<b>Operating frequency:</b>	Wideband
<b>Modulation type:</b>	LTE (QAM and QPSK)
<b>Occupied bandwidth:</b>	1,4 MHz – 3 MHz – 5 MHz – 10MHz – 15 MHz – 20MHz
<b>Channel spacing:</b>	standard
<b>Emission designator:</b>	D7W
<b>RF Output</b>	Down Link: 29dBm (0.8W) Up Link: 4dBm typical (0,0025W typical)
<b>Gain</b>	Down Link: 34dB Up Link: 47dB
<b>Antenna type:</b>	External Antenna is not provided, equipment that has an external 50 Ω RF connector
<b>Power source:</b>	100-240 Vac external

### 3.8 Operation of the EUT during testing

<b>Details:</b>	Normal working at max gain with max RF power output (down link and up link)
-----------------	---

### 3.9 EUT setup diagram

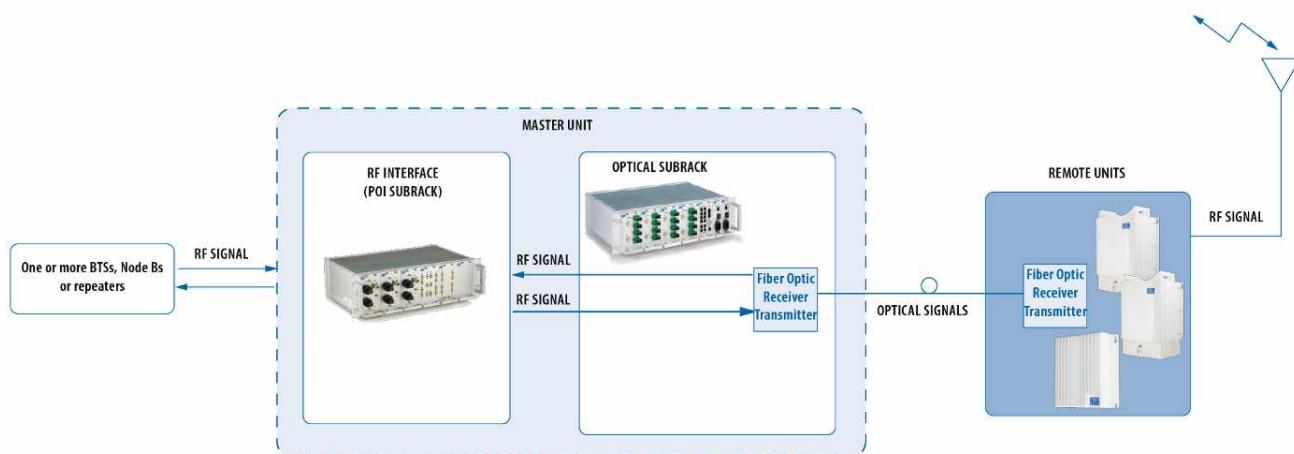

 <b>Nemko</b>	<b>Section 4: Engineering considerations</b>	<b>Product:</b> TRU8A19AWWL/AC-WS
--	--	-----------------------------------

## Section 4: Engineering considerations

### 4.1 Modifications incorporated in the EUT

<b>Modifications</b>	Modifications performed to the EUT during this assessment None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> , performed by Client <input type="checkbox"/> or Nemko <input type="checkbox"/> Details:
----------------------	---

### 4.2 Deviations from laboratory tests procedures

<b>Deviations</b>	Deviations from laboratory test procedures None <input checked="" type="checkbox"/> Yes <input type="checkbox"/> - details are listed below:
-------------------	---

### 4.3 Technical judgment

<b>Judgment</b>	None
-----------------	------



## Section 5: Test conditions

### 5.1 Power source and ambient temperatures

<b>Normal temperature, humidity and air pressure test conditions</b>	Temperature: 15–30 °C Relative humidity: 20–75 % Air pressure: 860–1060 hPa  When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.
<b>Power supply range:</b>	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$ , for which the equipment was designed.




## Section 6: Measurement uncertainty

Nemko S.p.A. measurement uncertainty has been calculated using the standard CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements". All calculations have been performed to provide a confidence level of 95 % and can be found in Nemko S.p.A. document WML1002.

**Section 7: Test equipment****Product:** TRU8A19AWWL/AC-WS**Section 7: Test equipment**

<b><i>Identification number</i></b>	<b><i>Description</i></b>	<b><i>Manufacturer model</i></b>	<b><i>s/n</i></b>	<b><i>Cal. Due</i></b>
1	Vector Signal Generator	Agilent H.P. N5182A MXG	MY48180714	April 2011
2	Spectrum Analyzer	Agilent H.P. E4440A	US40420470	Jun 2011
3	Network Analyzer	Agilent H.P E5062A	MY44101829	November 2012
4	2xcables+directional coupler+dummyload			

Client's property

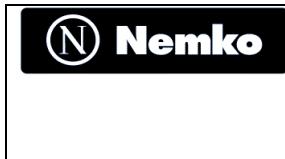

<b>Section 8: Testing data</b>	<b>Product</b> TRU8A19AWWL/AC-WS
<b>Test name:</b> Clause 27.50(d) Peak output power at RF antenna connector	
<b>Test date:</b> 20-27 Sept 2010	<b>Test engineer:</b> G. Curioni
<b>Verdict:</b> Pass	<b>Supply input:</b> 100-240 Vac
<b>Temperature:</b> 25 °C	<b>Air pressure:</b> 860-1060 hPa
<b>Specification:</b> FCC Part 27	<b>Relative humidity:</b> 50 %

## Section 8: Testing data

### 8.1 Clause 27.50(d) Peak output power at RF antenna connector


(1) The power of each fixed or base station transmitting in the 2110-2155 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to a peak equivalent isotropically radiated power (EIRP) of 3280 watts. The power of each fixed or base station transmitting in the 2110-2155 MHz band from any other location is limited to a peak EIRP of 1640 watts. A licensee operating a base or fixed station utilizing a power of more than 1640 watts EIRP must coordinate such operations in advance with all Government and non-Government satellite entities in the 2025-2110 MHz band. Operations above 1640 watts EIRP must also be coordinated in advance with the following licensees within 120 kilometers (75 miles) of the base or fixed station: all Broadband Radio Service (BRS) licensees authorized under Part 27 in the 2155-2160 MHz band and all AWS licensees in the 2110-2155 MHz band.

(2) Fixed, mobile, and portable (handheld) stations operating in the 1710–1755MHz band are limited to a peak EIRP of 1 watt. Fixed stations operating in this band are limited to a maximum antenna height of 10 meters above ground, and mobile and portable stations must employ a means for limiting power to the minimum necessary for successful communications.

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

### Special notes

- The power was measured using spectrum analyzer with RMS detector / average power meter.

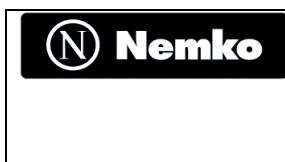


<b>Section 8: Testing data</b>		<b>Product</b> TRU8A19AWWL/AC-WS
<b>Test name:</b> Clause 27.50(d) Peak output power at RF antenna connector		
<b>Test date:</b> 20-27 Sept 2010	<b>Test engineer:</b> G. Curioni	
<b>Verdict:</b> Pass	<b>Supply input:</b> 100-240 Vac	
<b>Temperature:</b> 25 °C	<b>Air pressure:</b> 860-1060 hPa	<b>Relative humidity:</b> 50 %
<b>Specification:</b> FCC Part 27		

## RF Output Power at RF connectors


Test data					
Direction	Modulation	Frequency (MHz)	RF output Power (W/MHz)	RF output channel Power (W)	PAR (dB)
Down-link	LTE (QAM, 1,4MHz)	2132.5	0.571	0.800	9.93
Down-link	LTE (QPSK, 1,4MHz)	2132.5	0.567	0.794	10.10
Down-link	LTE (QAM, 3MHz)	2132.5	0.267	0.800	10.52
Down-link	LTE (QPSK, 3MHz)	2132.5	0.268	0.805	10.52
Down-link	LTE (QAM, 5MHz)	2132.5	0.159	0.794	10.54
Down-link	LTE (QPSK, 5MHz)	2132.5	0.160	0.802	10.81
Down-link	LTE (QAM, 10MHz)	2132.5	0.080	0.798	11.50
Down-link	LTE (QPSK, 10MHz)	2132.5	0.081	0.809	11.50
Down-link	LTE (QAM, 15MHz)	2132.5	0.053	0.800	11.16
Down-link	LTE (QPSK, 15MHz)	2132.5	0.053	0.804	11.17
Down-link	LTE (QAM, 20MHz)	2132.5	0.040	0.796	11.68
Down-link	LTE (QPSK, 20MHz)	2132.5	0.040	0.807	11.92
Up-link	LTE (QAM, 1,4MHz)	1732.5	$1.802 \times 10^{-3}$	$2.523 \times 10^{-3}$	10.02
Up-link	LTE (QPSK, 1,4MHz)	1732.5	$1.811 \times 10^{-3}$	$2.535 \times 10^{-3}$	10.23
Up-link	LTE (QAM, 3MHz)	1732.5	$0.841 \times 10^{-3}$	$2.523 \times 10^{-3}$	10.84
Up-link	LTE (QPSK, 3MHz)	1732.5	$0.849 \times 10^{-3}$	$2.547 \times 10^{-3}$	10.95
Up-link	LTE (QAM, 5MHz)	1732.5	$0.502 \times 10^{-3}$	$2.512 \times 10^{-3}$	11.03
Up-link	LTE (QPSK, 5MHz)	1732.5	$0.507 \times 10^{-3}$	$2.535 \times 10^{-3}$	11.07
Up-link	LTE (QAM, 10MHz)	1732.5	$0.252 \times 10^{-3}$	$2.523 \times 10^{-3}$	11.17
Up-link	LTE (QPSK, 10MHz)	1732.5	$0.257 \times 10^{-3}$	$2.564 \times 10^{-3}$	11.28
Up-link	LTE (QAM, 15MHz)	1732.5	$0.169 \times 10^{-3}$	$2.529 \times 10^{-3}$	11.53
Up-link	LTE (QPSK, 15MHz)	1732.5	$0.168 \times 10^{-3}$	$2.523 \times 10^{-3}$	11.61
Up-link	LTE (QAM, 20MHz)	1732.5	$0.126 \times 10^{-3}$	$2.512 \times 10^{-3}$	11.50
Up-link	LTE (QPSK, 20MHz)	1732.5	$0.128 \times 10^{-3}$	$2.553 \times 10^{-3}$	11.55

Transmitting these powers by a  $\lambda/2$  dipole tuned on the carriers' frequency we get: erp.

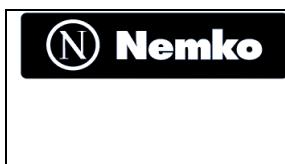



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

#### RF Power Output D.L. mod. 1.4 QAM

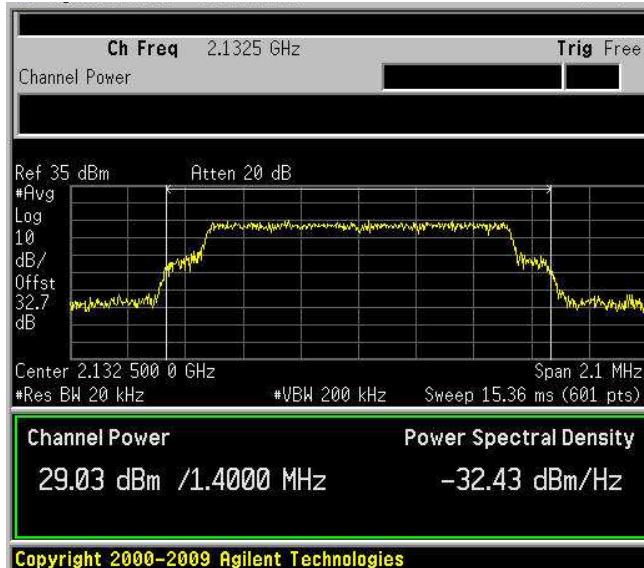


#### RF Power Output D.L. mod. 1.4 QPSK

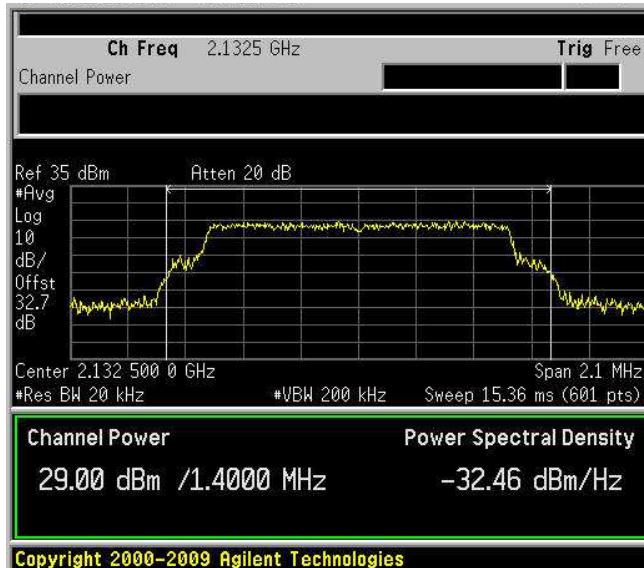

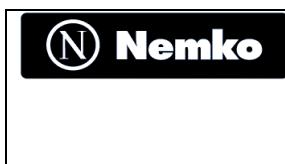



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

#### RF Power Output D.L. mod. 3 QAM

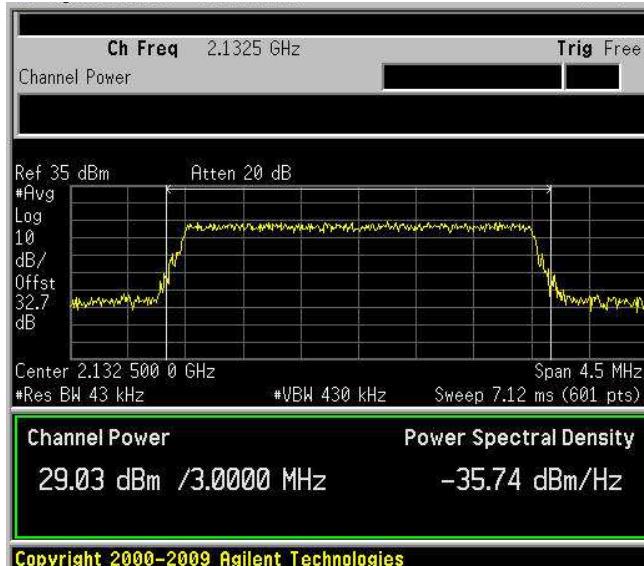


#### RF Power Output D.L. mod. 3 QPSK

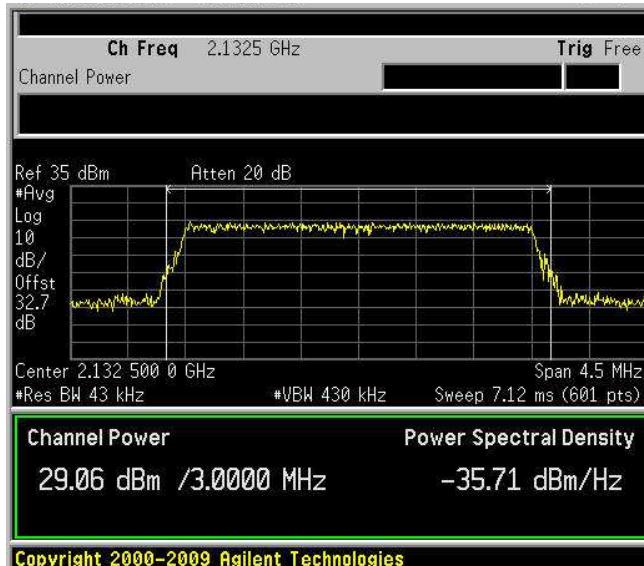

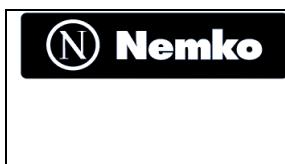



<b>Section 8: Testing data</b>		<b>Product</b> TRU8A19AWWL/AC-WS
<b>Test name:</b> Clause 27.50(d) Peak output power at RF antenna connector		
<b>Test date:</b> 20-27 Sept 2010	<b>Test engineer:</b> G. Curioni	
<b>Verdict:</b> Pass	<b>Supply input:</b> 100-240 Vac	
<b>Temperature:</b> 25 °C	<b>Air pressure:</b> 860-1060 hPa	<b>Relative humidity:</b> 50 %
<b>Specification:</b> FCC Part 27		

### RF Power Output D.L. mod. 5 QAM

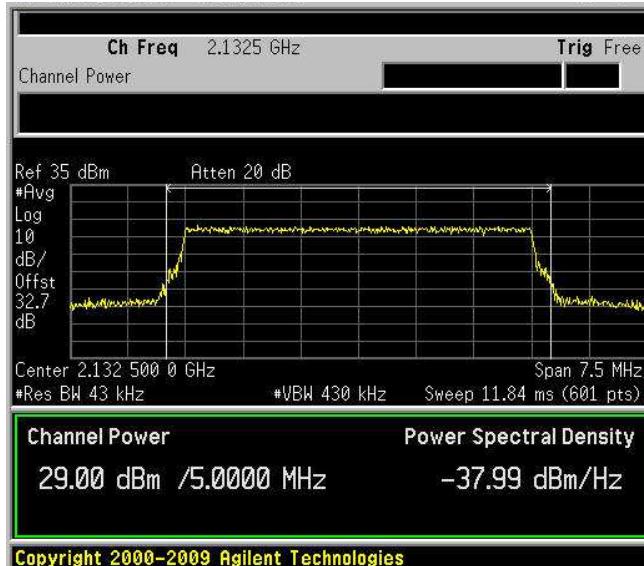


### RF Power Output D.L. mod. 5 QPSK

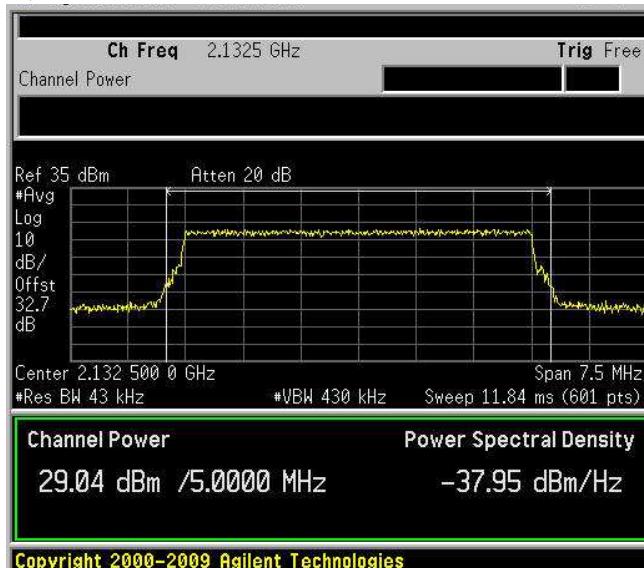

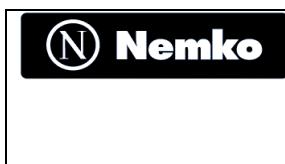


<b>Section 8: Testing data</b>		<b>Product</b> TRU8A19AWWL/AC-WS
<b>Test name:</b> Clause 27.50(d) Peak output power at RF antenna connector		
<b>Test date:</b> 20-27 Sept 2010	<b>Test engineer:</b> G. Curioni	
<b>Verdict:</b> Pass	<b>Supply input:</b> 100-240 Vac	
<b>Temperature:</b> 25 °C	<b>Air pressure:</b> 860-1060 hPa	<b>Relative humidity:</b> 50 %
<b>Specification:</b> FCC Part 27		

### RF Power Output D.L. mod. 10 QAM

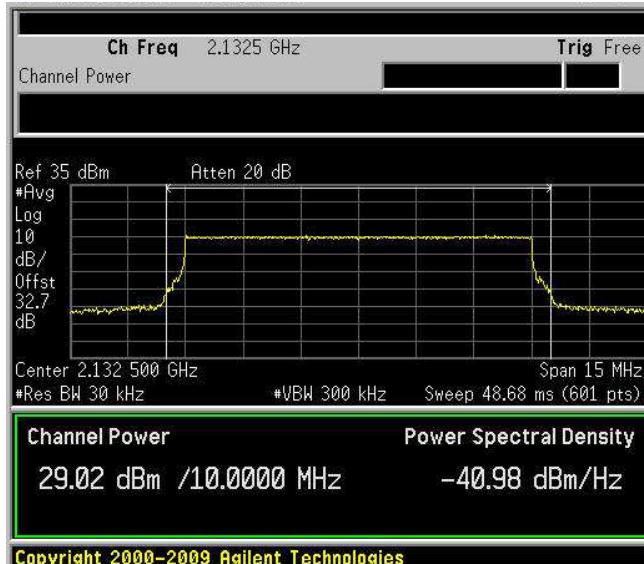


### RF Power Output D.L. mod. 10 QPSK

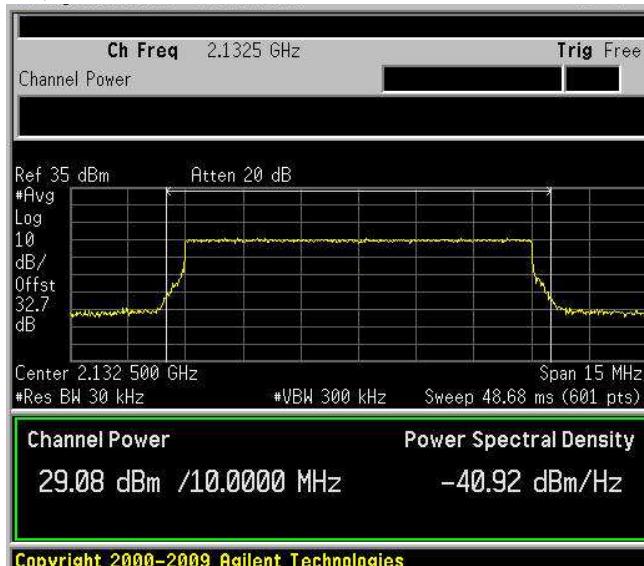





Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

### RF Power Output D.L. mod. 15 QAM

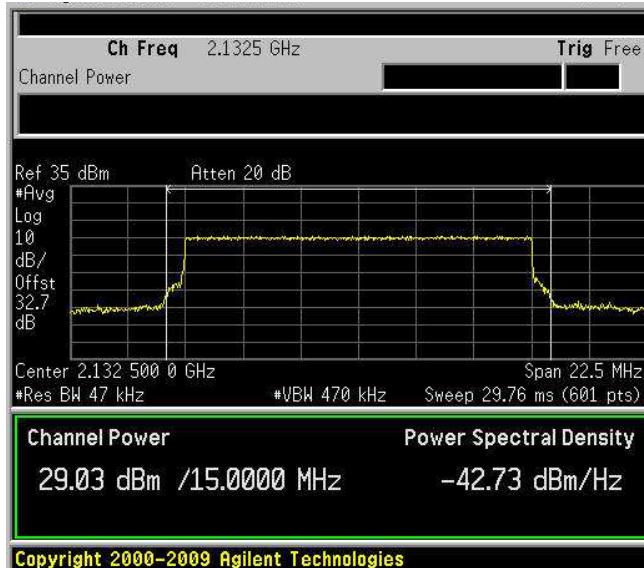


### RF Power Output D.L. mod. 15 QPSK

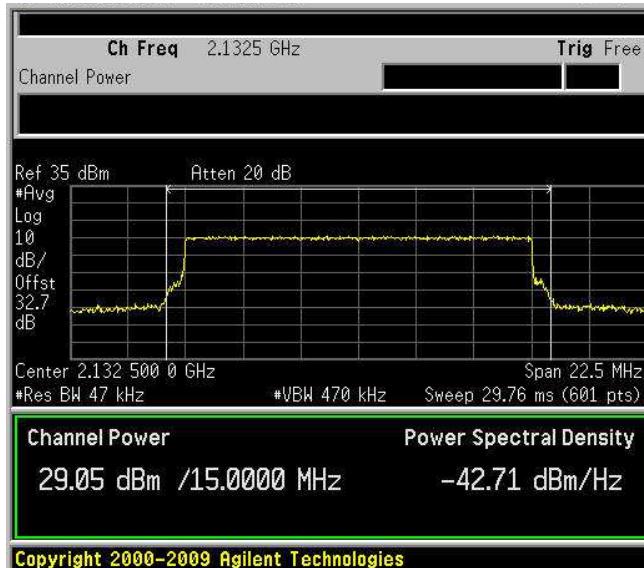

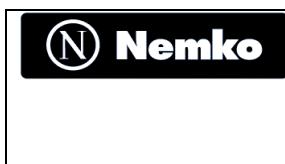



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

#### RF Power Output D.L. mod. 20 QAM

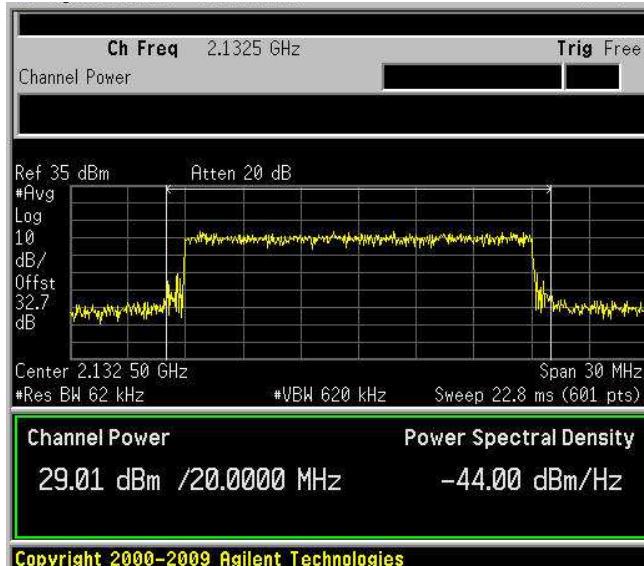


#### RF Power Output D.L. mod. 20 QPSK

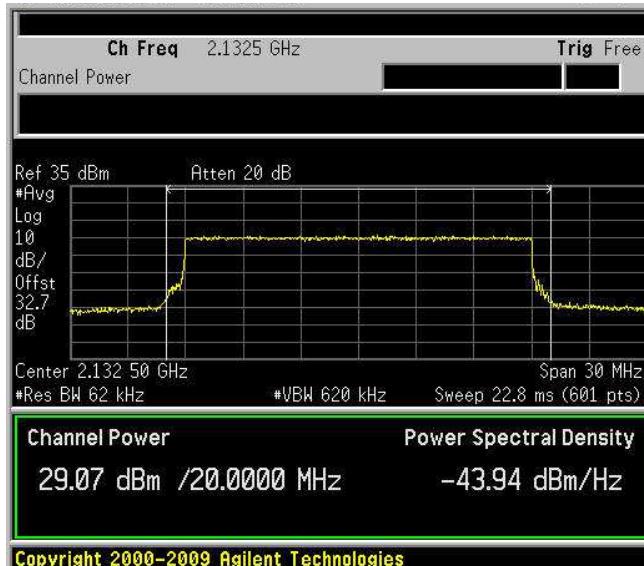

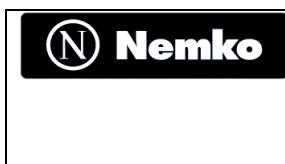



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

#### RF Power Output U.L. mod. 1.4 QAM

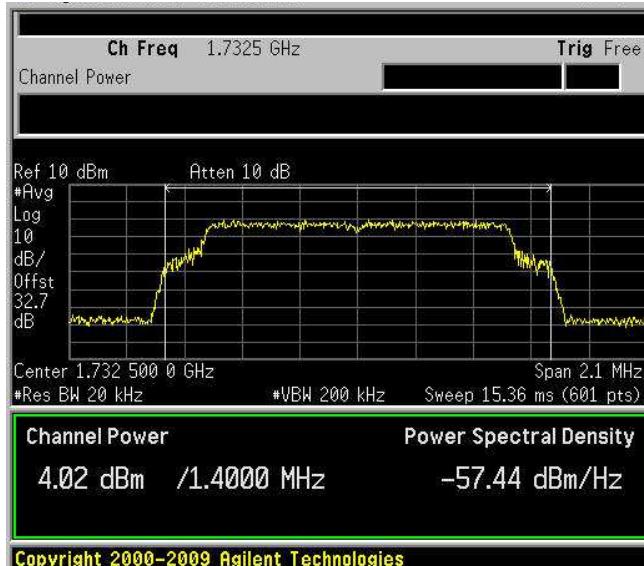


#### RF Power Output U.L. mod. 1.4 QPSK

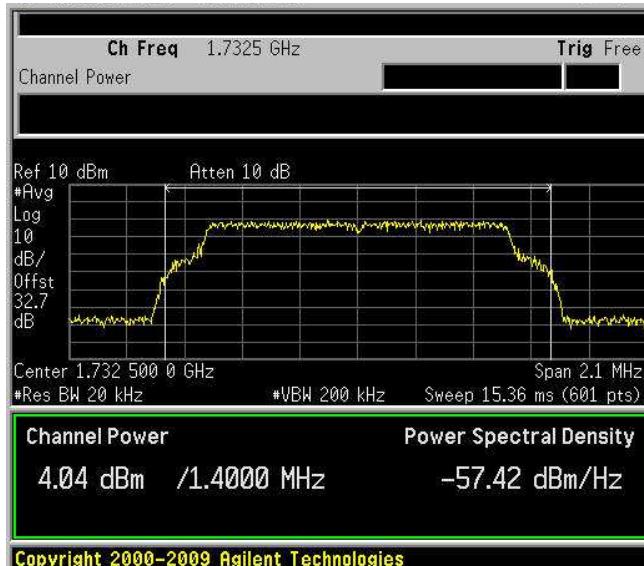

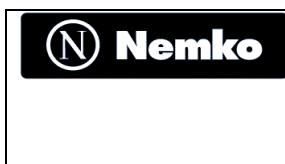



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

#### RF Power Output U.L. mod. 3 QAM

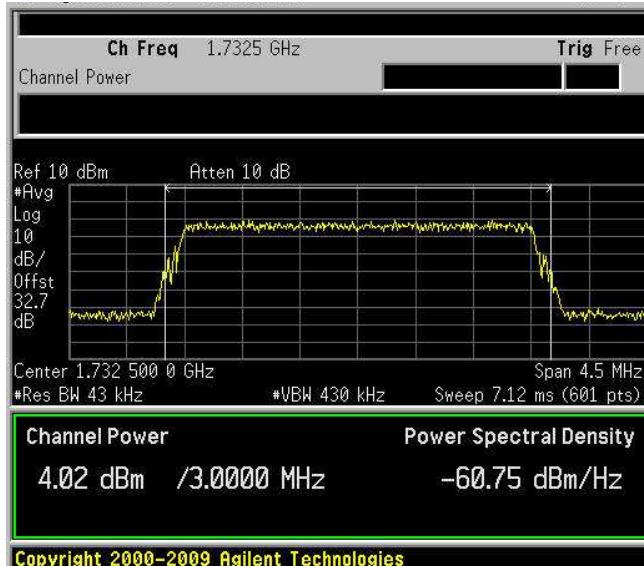


#### RF Power Output U.L. mod. 3 QPSK

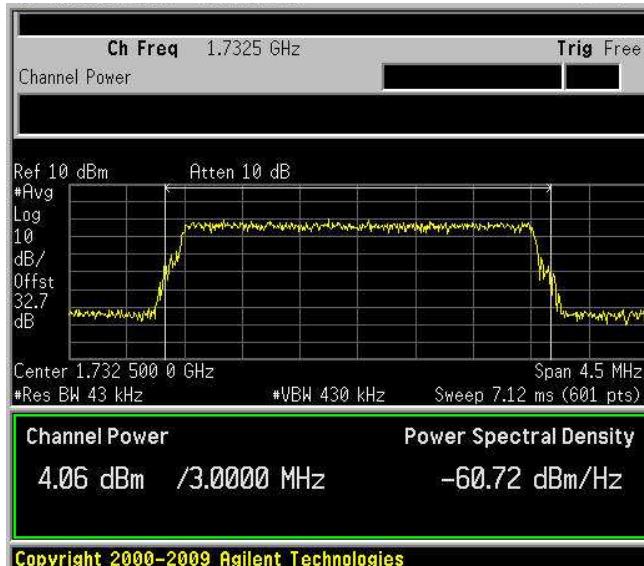

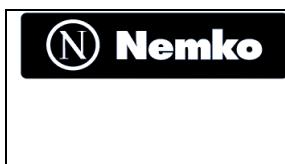



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

### RF Power Output U.L. mod. 5 QAM

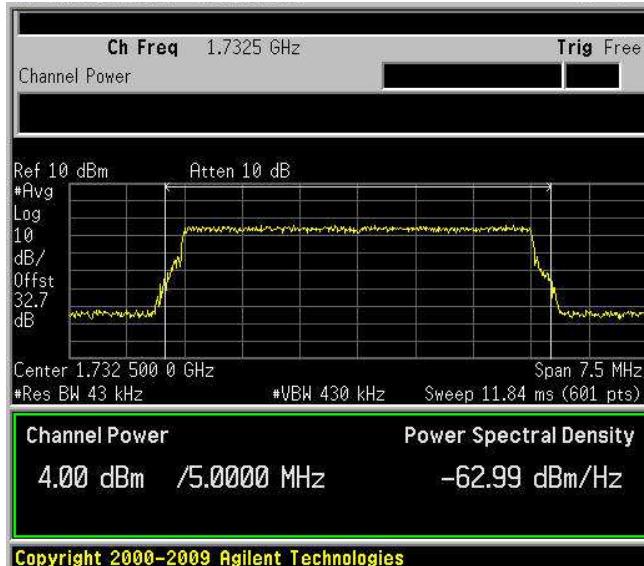


### RF Power Output U.L. mod. 5 QPSK

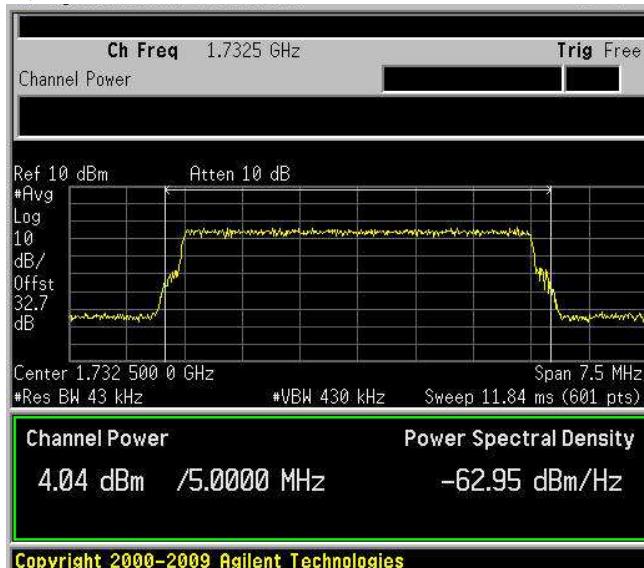

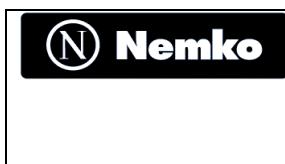



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

### RF Power Output U.L. mod. 10 QAM

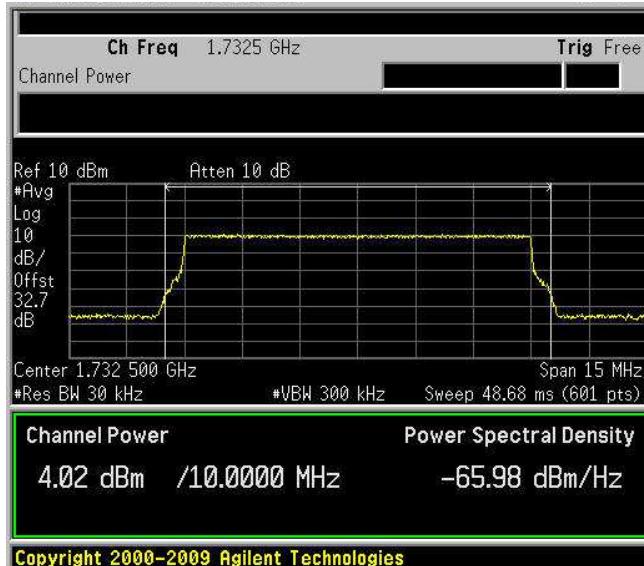


### RF Power Output U.L. mod. 10 QPSK

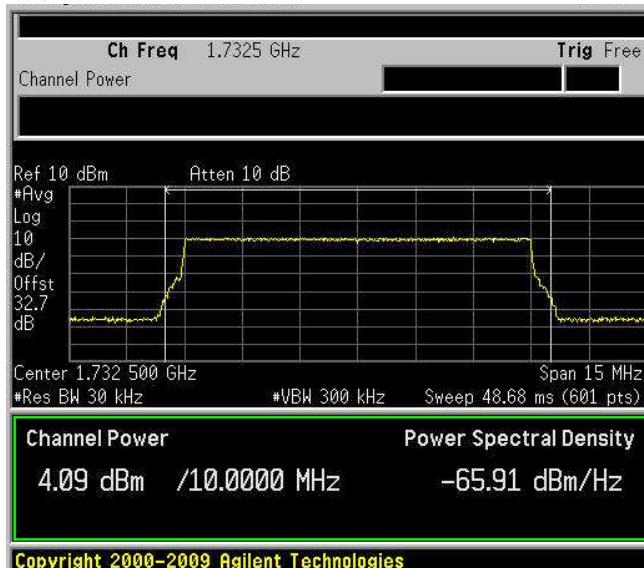

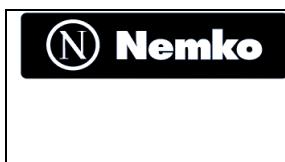



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

### RF Power Output U.L. mod. 15 QAM

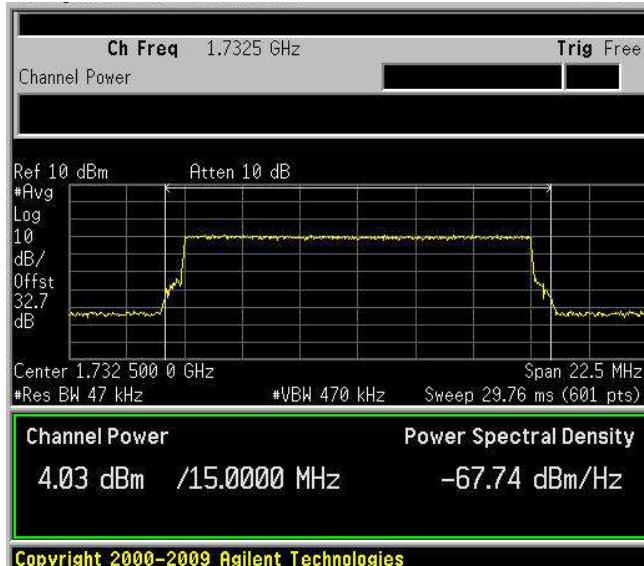


### RF Power Output U.L. mod. 15 QPSK

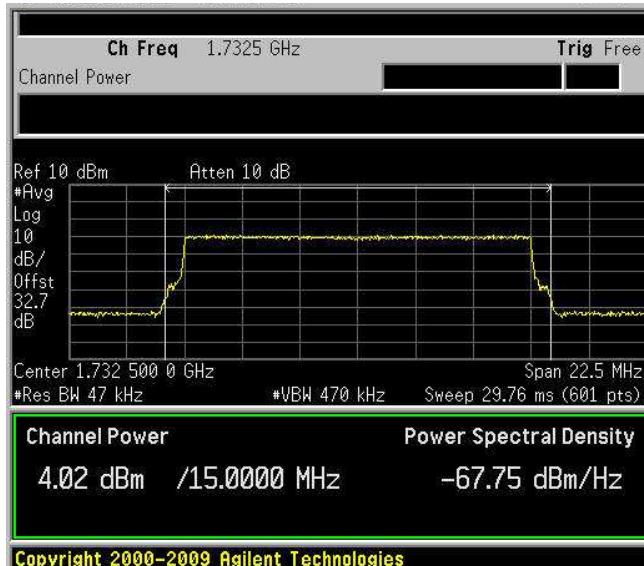

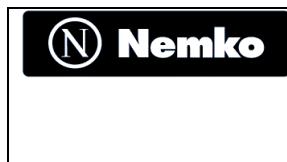



Section 8: Testing data		Product TRU8A19AWWL/AC-WS
Test name: Clause 27.50(d) Peak output power at RF antenna connector		
Test date: 20-27 Sept 2010	Test engineer: G. Curioni	
Verdict: Pass	Supply input: 100-240 Vac	
Temperature: 25 °C	Air pressure: 860-1060 hPa	Relative humidity: 50 %
Specification: FCC Part 27		

#### RF Power Output U.L. mod. 20 QAM

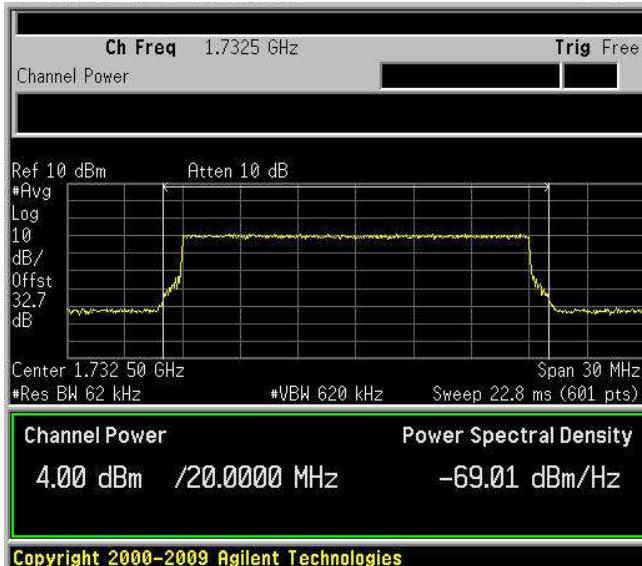

#### RF Power Output U.L. mod. 20 QPSK

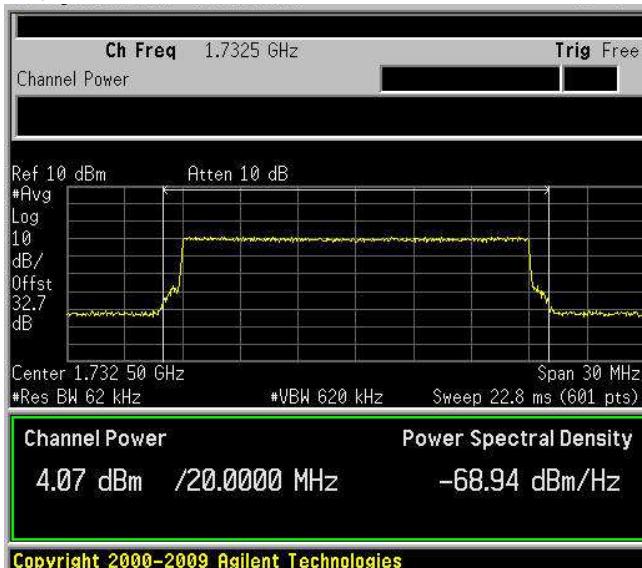

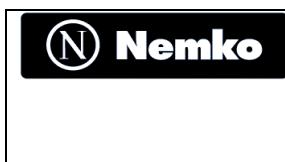

<b>Section 8: Testing data</b>		<b>Product:</b> TRU8A19AWWL/AC-WS
<b>Test name:</b> Clause 27.52 RF safety		
<b>Test date</b> 20-27 Sept 2010	<b>Test engineer:</b> G. Curioni	
<b>Verdict:</b> Pass	<b>Supply input:</b> 100-240 Vac	
<b>Temperature:</b> 25 °C	<b>Air pressure:</b> 860-1060 hPa	<b>Relative humidity:</b> 50 %
<b>Specification:</b> FCC Part 27		

## 8.2 Clause 27.52 RF safety

Licensees and manufacturers are subject to the radio frequency radiation exposure requirements specified in sections 1.1307(b), 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

### Special notes

The test was performed using E-field probe slowly moving towards the EUT until E-field equivalent to the maximum permitted power density was measured

Equivalent power density was calculated from electric field strength as follows:

$$S_{[mW/cm^2]} = \frac{0.1 \times E^2 [V/m]}{120 \times \pi} \quad S[W/m^2] = E^2 [V/m] / 377 [\Omega]$$

where S is power density and E is electric field strength.

### Test data

Test distance (cm)	Field strength (V/m)	Equivalent power density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Margin (mW/cm <sup>2</sup> )
300				
250				
200				
150				
100				
50				
30				
20				
10				
5				

NOT APPLICABLE; External Antenna not provided



### 8.3 Clause 27.53 (h) Spurious emissions at RF antenna connector

For operations in the 1710-1755 MHz and 2110-2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.

(1) Compliance with the provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

(3) The measurements of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

#### Special notes

- The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic.
- All measurements were performed using a peak detector.
- RBW within 30–1000 MHz was 100 kHz; 1 MHz above 1 GHz. VBW was wider than RBW.


**Test data, continued band edges Inter modulation:**
**Spurious Emissions at Antenna Terminals**
**Downlink – 1.4 QAM**
**LOW BAND EDGE**

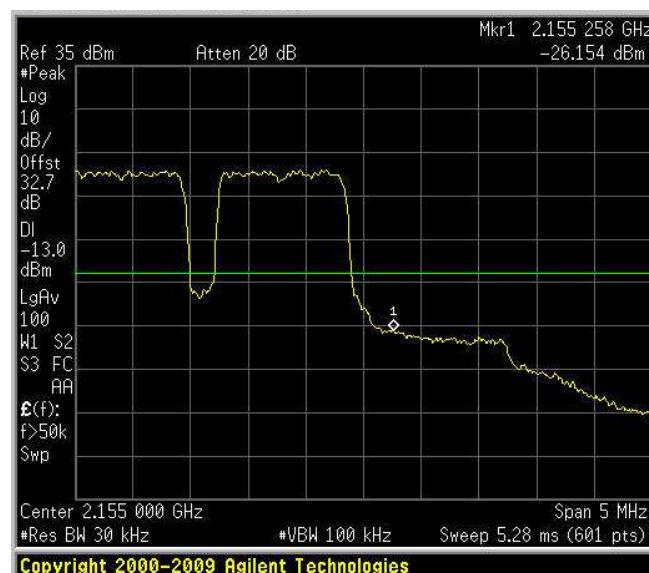**Spurious Emissions at Antenna Terminals**
**Downlink – 1.4 QAM**
**HIGH BAND EDGE**


## Spurious Emissions at Antenna Terminals

Uplink – 1.4 QAM


LOW BAND EDGE

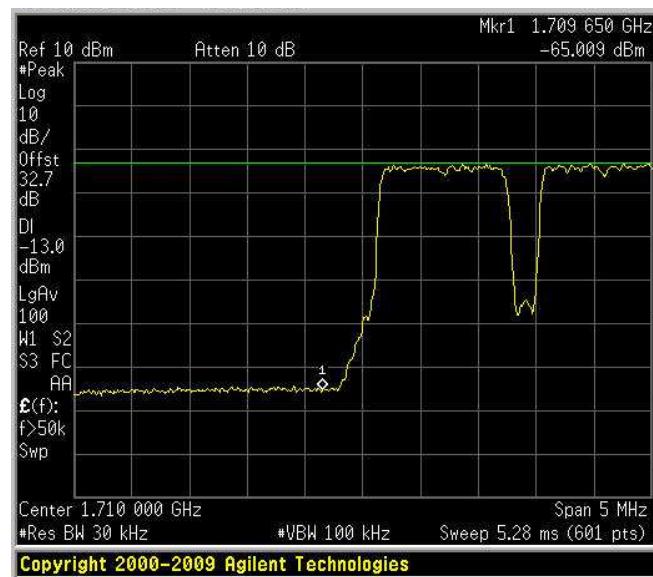

## Spurious Emissions at Antenna Terminals

Uplink – 1.4 QAM

HIGH BAND EDGE

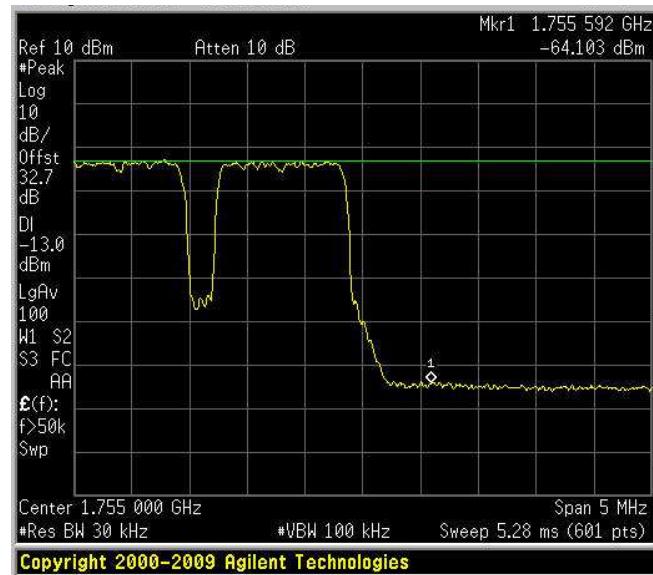

## Spurious Emissions at Antenna Terminals

Downlink – 1.4 QPSK

LOW BAND EDGE



## Spurious Emissions at Antenna Terminals

Downlink – 1.4 QPSK


HIGH BAND EDGE



## Spurious Emissions at Antenna Terminals

Uplink – 1.4 QPSK


LOW BAND EDGE

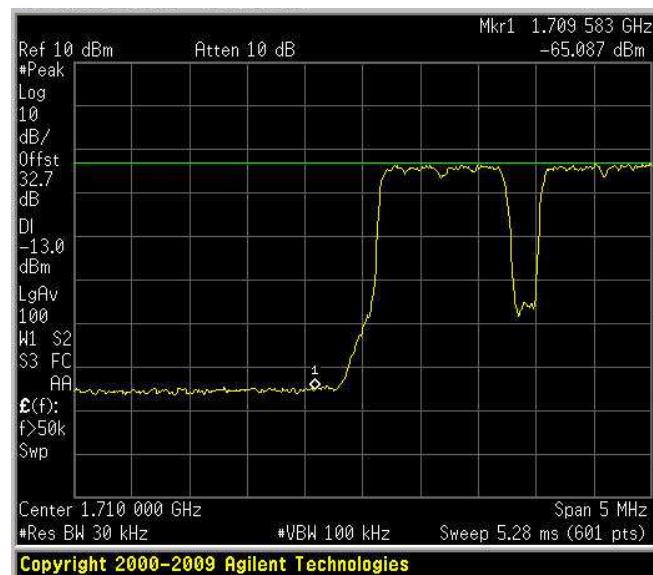

## Spurious Emissions at Antenna Terminals

Uplink – 1.4 QPSK


HIGH BAND EDGE

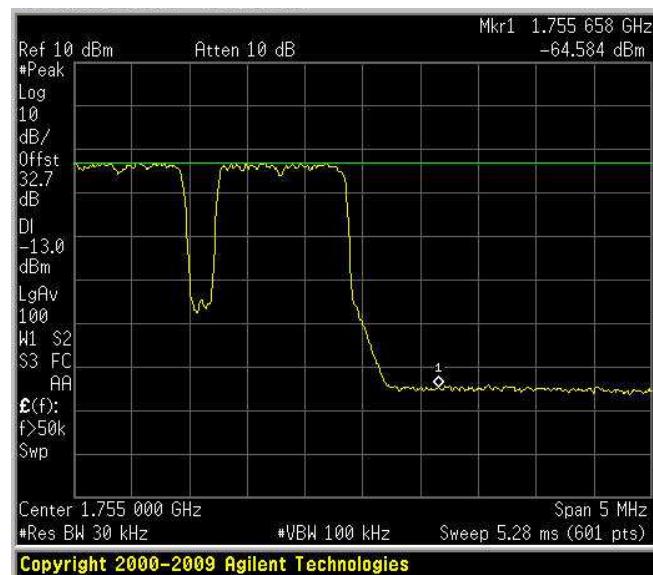

## Spurious Emissions at Antenna Terminals

Downlink – 3 QAM

LOW BAND EDGE


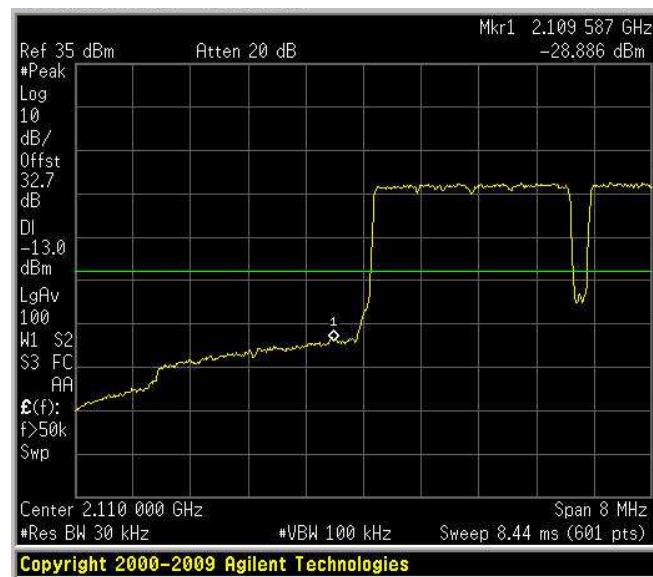


## Spurious Emissions at Antenna Terminals

Downlink – 3 QAM

HIGH BAND EDGE

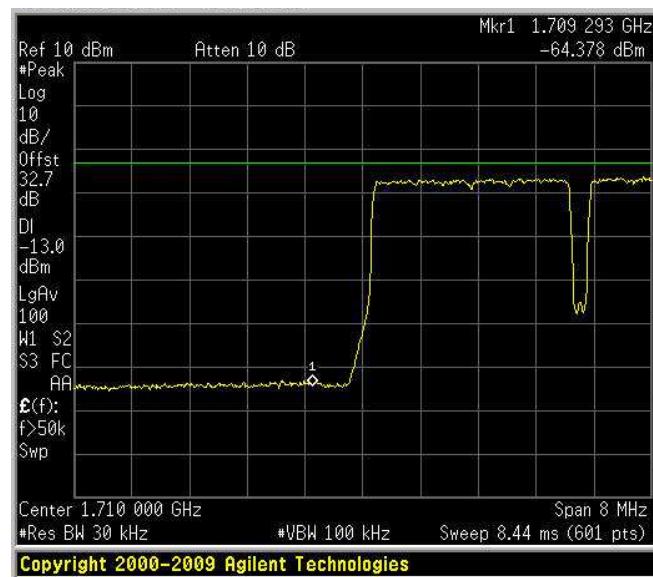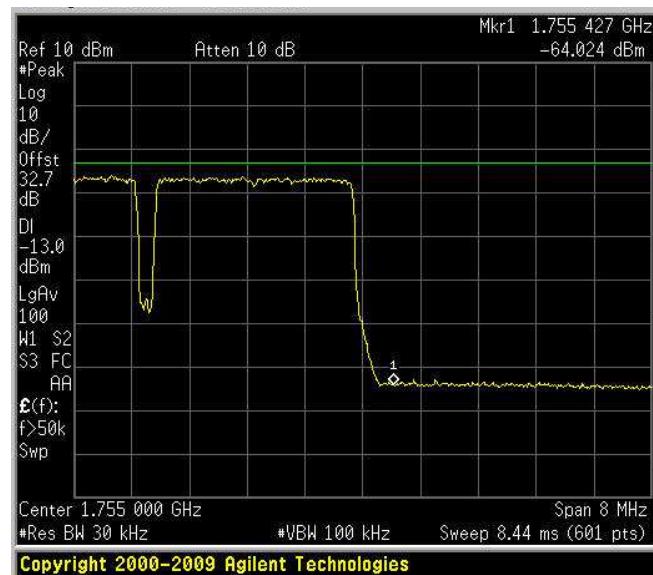


**Spurious Emissions at Antenna Terminals**
**Uplink – 3 QAM**
**LOW BAND EDGE**

**Spurious Emissions at Antenna Terminals**
**Uplink – 3 QAM**
**HIGH BAND EDGE**


## Spurious Emissions at Antenna Terminals

Downlink – 3 QPSK

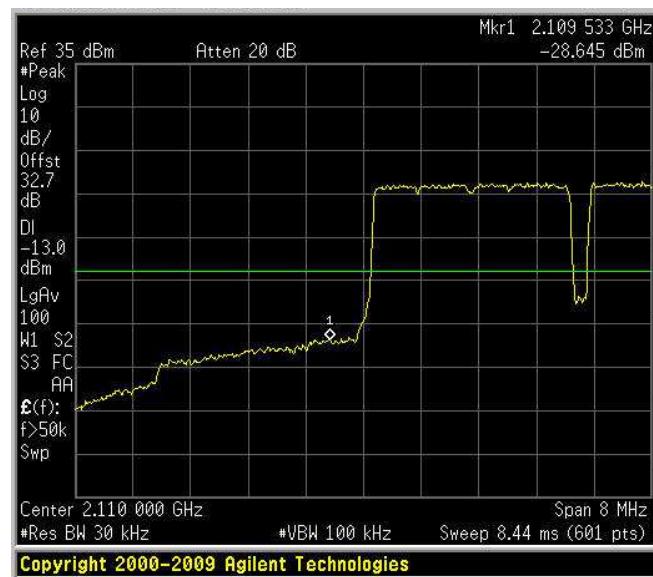
LOW BAND EDGE



## Spurious Emissions at Antenna Terminals

Downlink – 3 QPSK


HIGH BAND EDGE

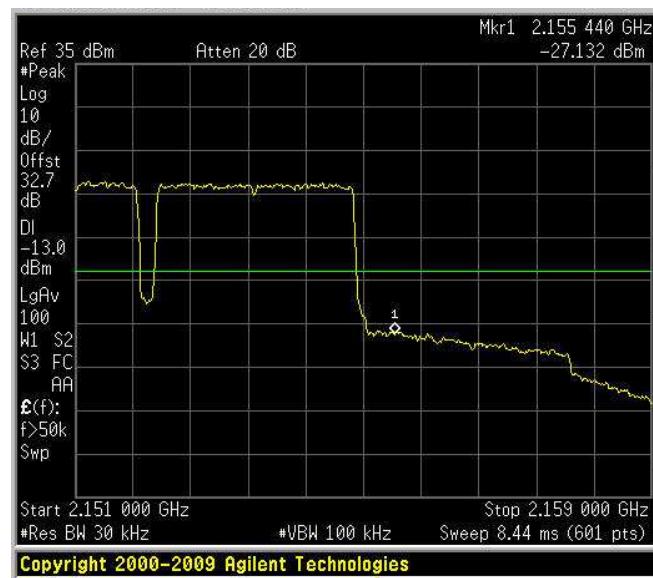

## Spurious Emissions at Antenna Terminals

Uplink – 3 QPSK


LOW BAND EDGE

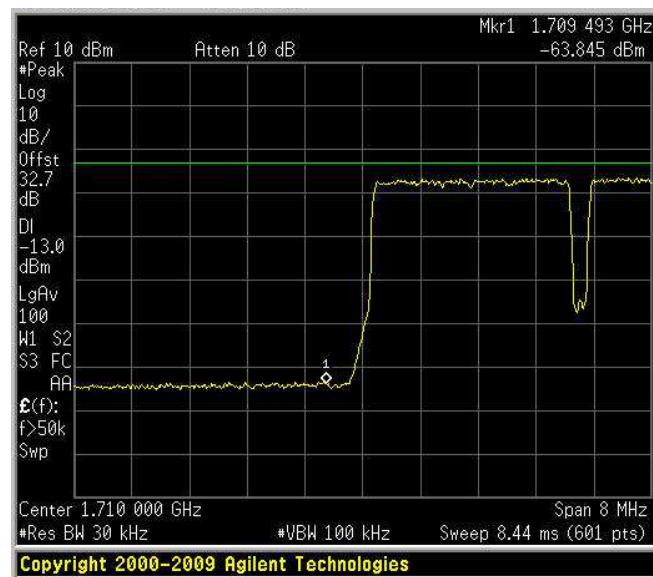

## Spurious Emissions at Antenna Terminals

Uplink – 3 QPSK


HIGH BAND EDGE

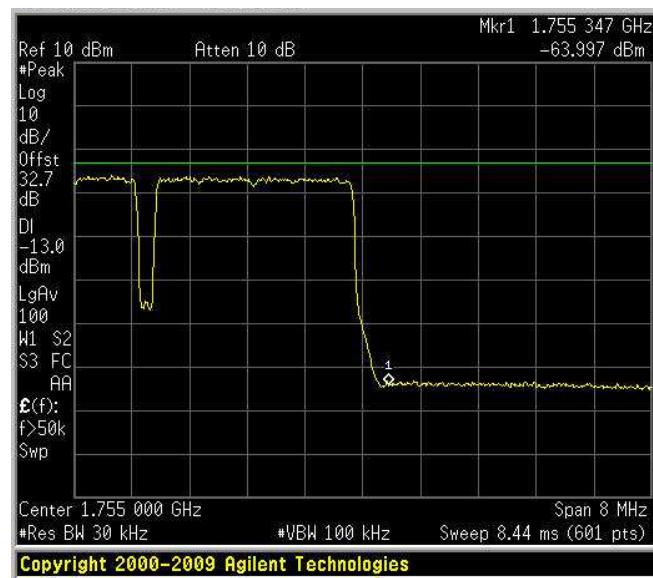

## Spurious Emissions at Antenna Terminals

Downlink – 5 QAM


LOW BAND EDGE

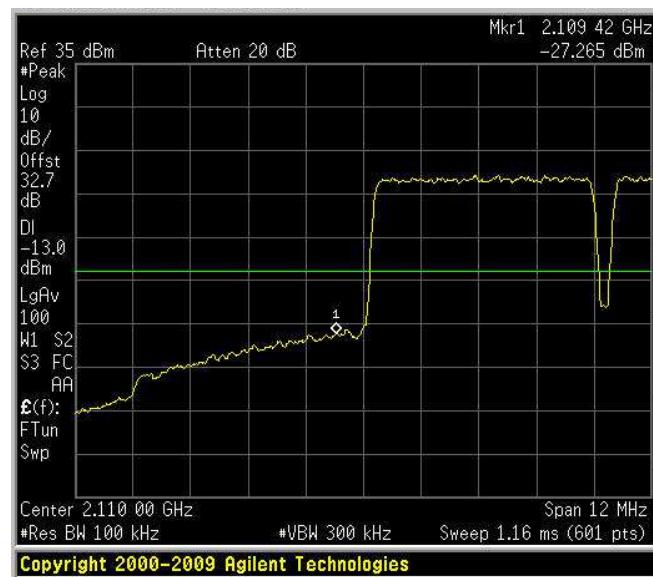


## Spurious Emissions at Antenna Terminals

Downlink – 5 QAM


HIGH BAND EDGE

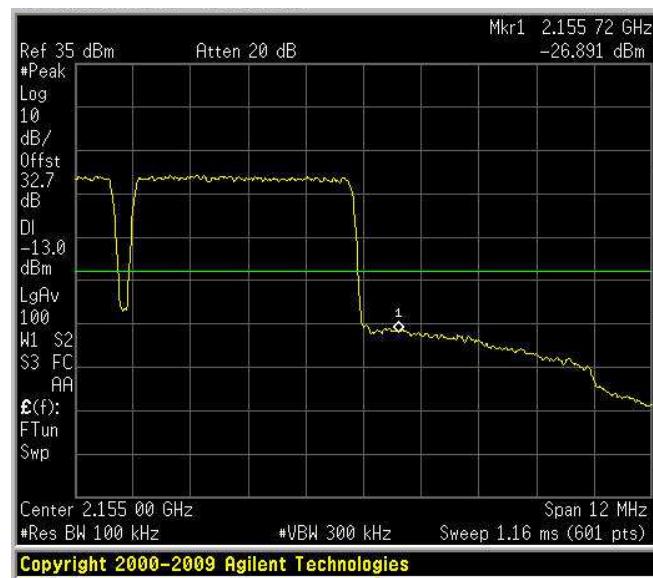

## Spurious Emissions at Antenna Terminals

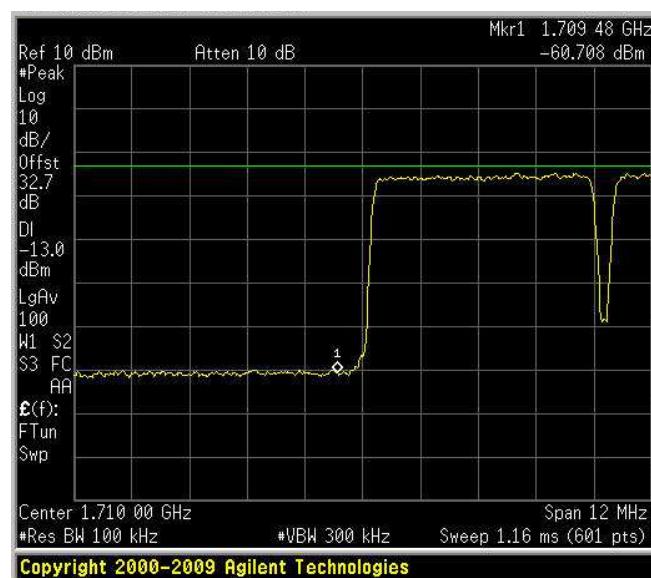Uplink – 5 QAM  
LOW BAND EDGE


## Spurious Emissions at Antenna Terminals

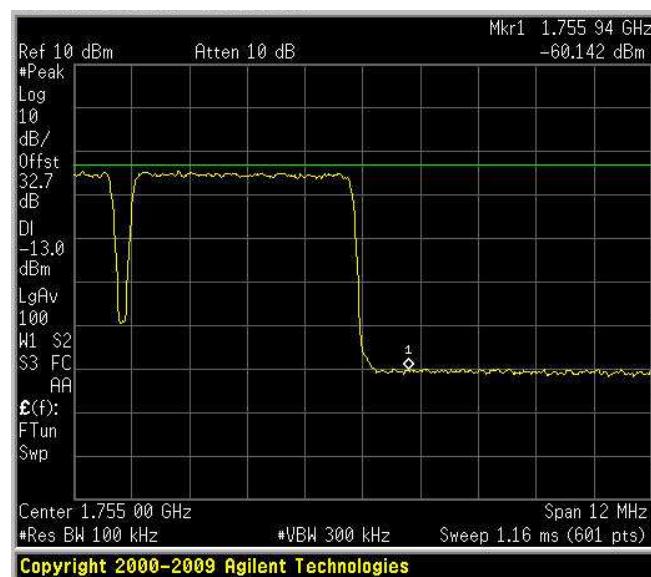Uplink – 5 QAM  
HIGH BAND EDGE

## Spurious Emissions at Antenna Terminals

Downlink – 5 QPSK


LOW BAND EDGE

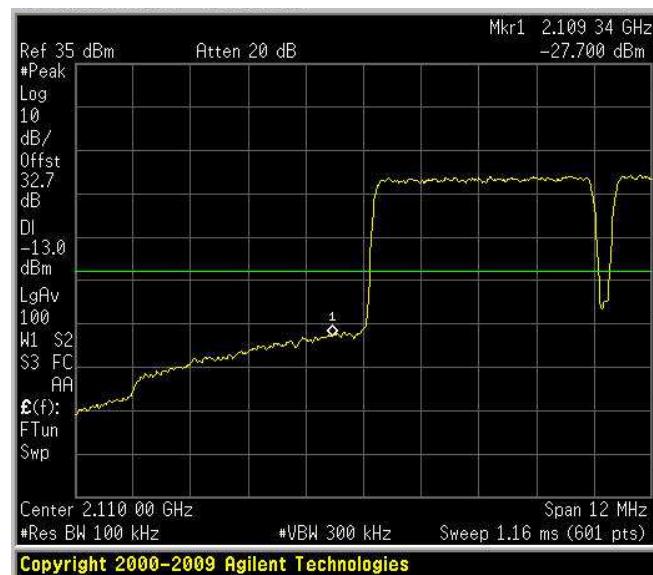


## Spurious Emissions at Antenna Terminals

Downlink – 5 QPSK


HIGH BAND EDGE

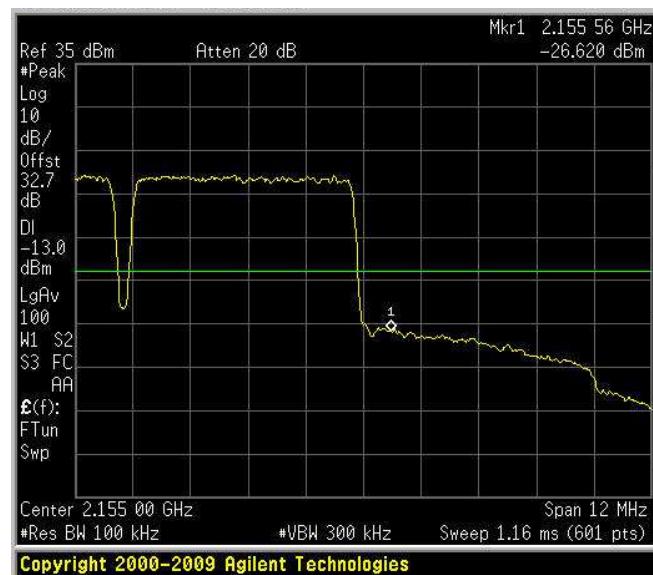

## Spurious Emissions at Antenna Terminals

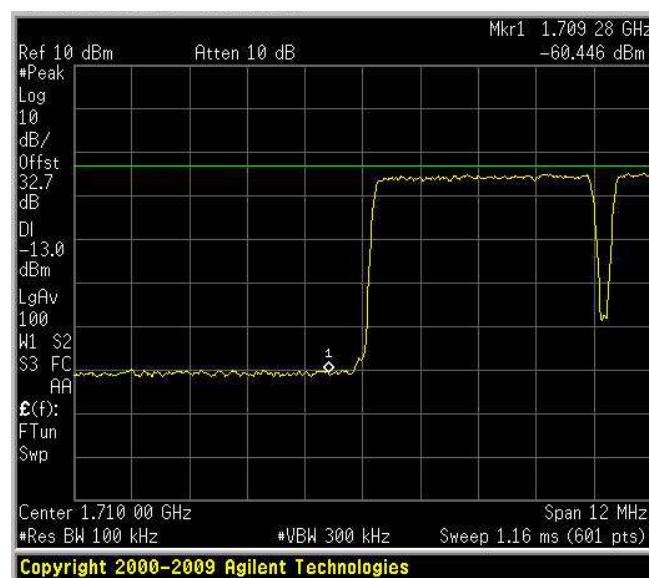Uplink – 5 QPSK  
LOW BAND EDGE

## Spurious Emissions at Antenna Terminals

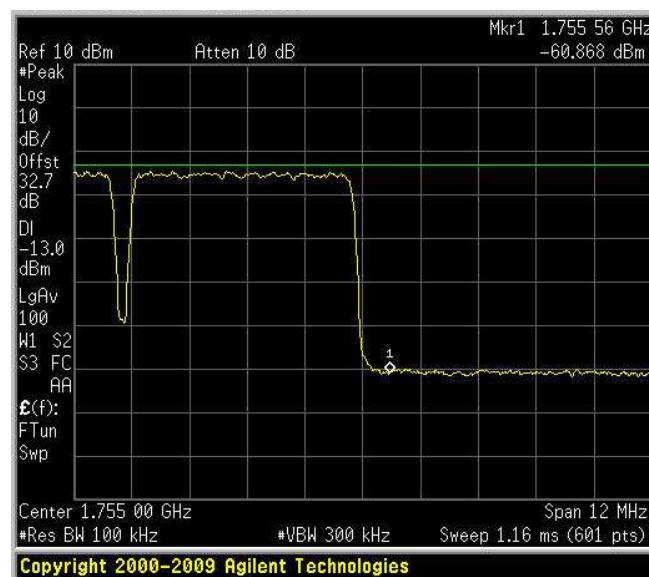Uplink – 5 QPSK  
HIGH BAND EDGE

## Spurious Emissions at Antenna Terminals

Downlink – 10 QAM


LOW BAND EDGE




## Spurious Emissions at Antenna Terminals

Downlink – 10 QAM


HIGH BAND EDGE

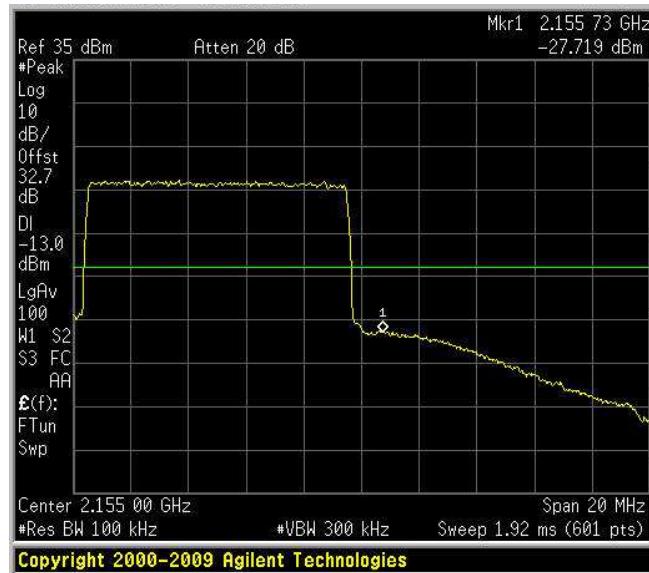

## Spurious Emissions at Antenna Terminals

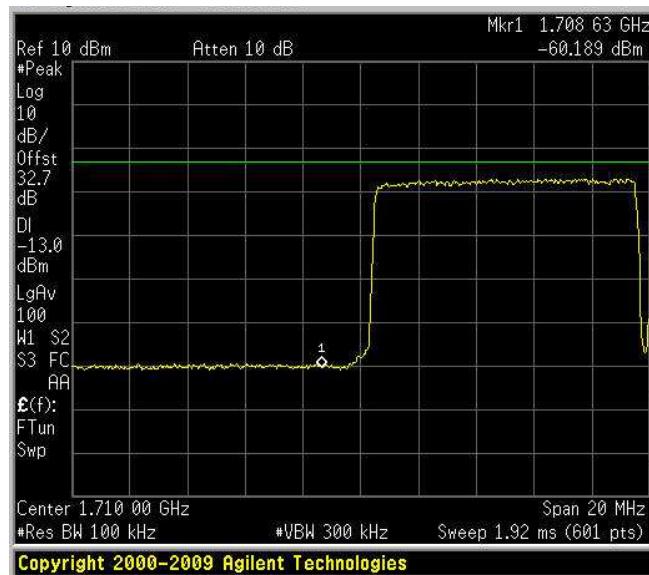Uplink – 10 QAM  
LOW BAND EDGE


## Spurious Emissions at Antenna Terminals

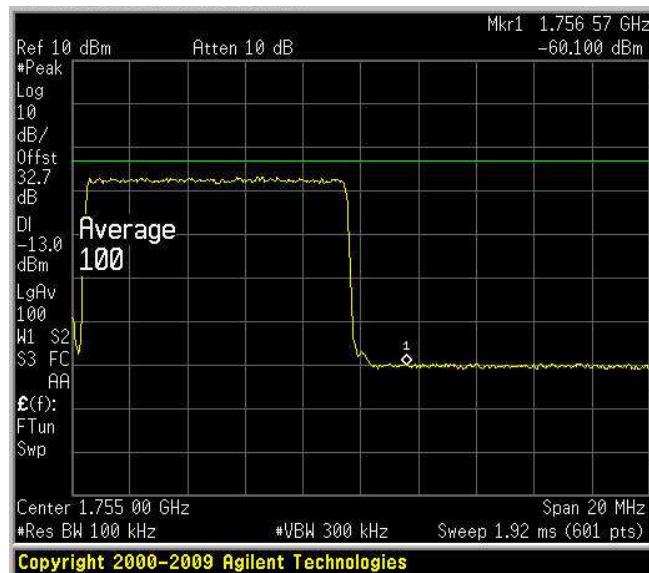Uplink – 10 QAM  
HIGH BAND EDGE

## Spurious Emissions at Antenna Terminals

Downlink – 10 QPSK

LOW BAND EDGE

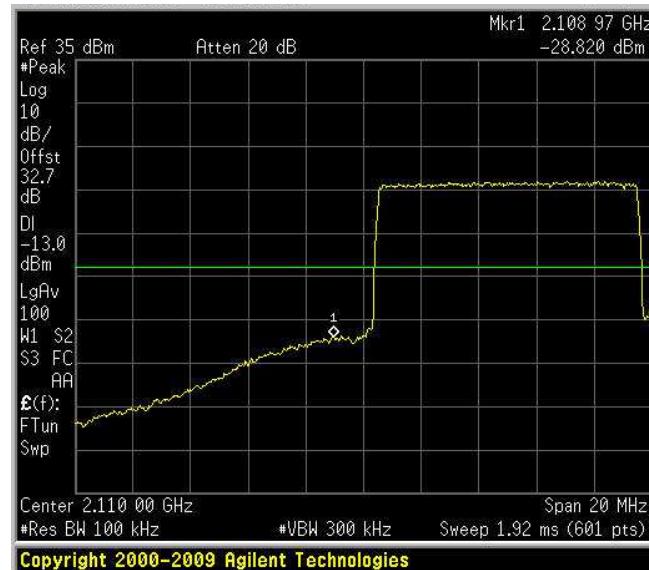

## Spurious Emissions at Antenna Terminals

Downlink – 10 QPSK


HIGH BAND EDGE



## Spurious Emissions at Antenna Terminals

Uplink – 10 QPSK


LOW BAND EDGE

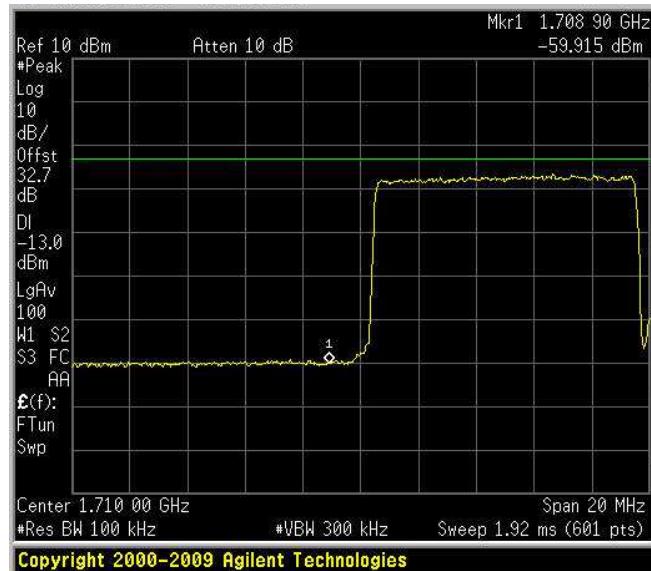

## Spurious Emissions at Antenna Terminals

Uplink – 10 QPSK


HIGH BAND EDGE

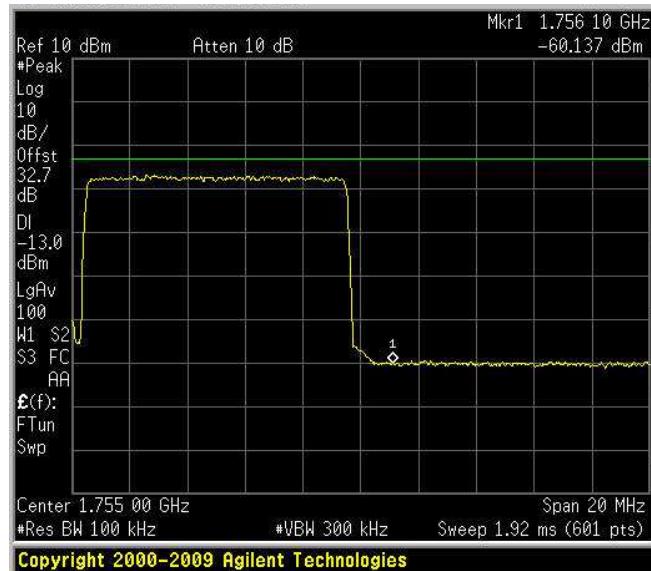

## Spurious Emissions at Antenna Terminals

Downlink – 15 QAM

LOW BAND EDGE

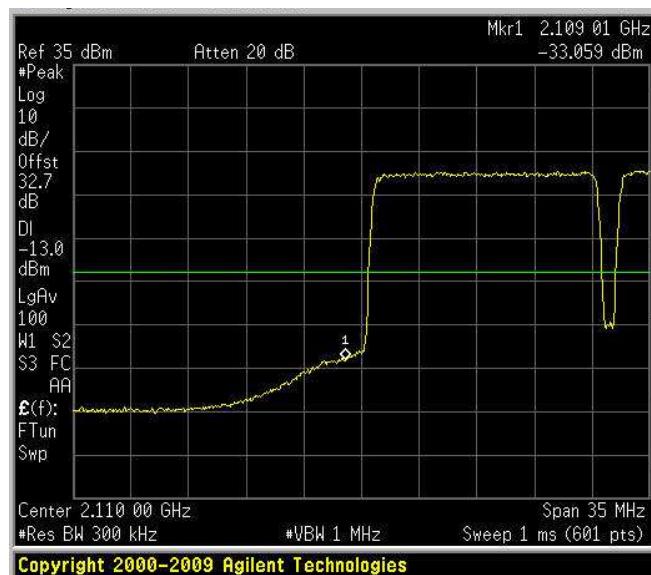

Copyright 2000-2009 Agilent Technologies

## Spurious Emissions at Antenna Terminals


Downlink – 15 QAM

HIGH BAND EDGE




Copyright 2000-2009 Agilent Technologies

## Spurious Emissions at Antenna Terminals

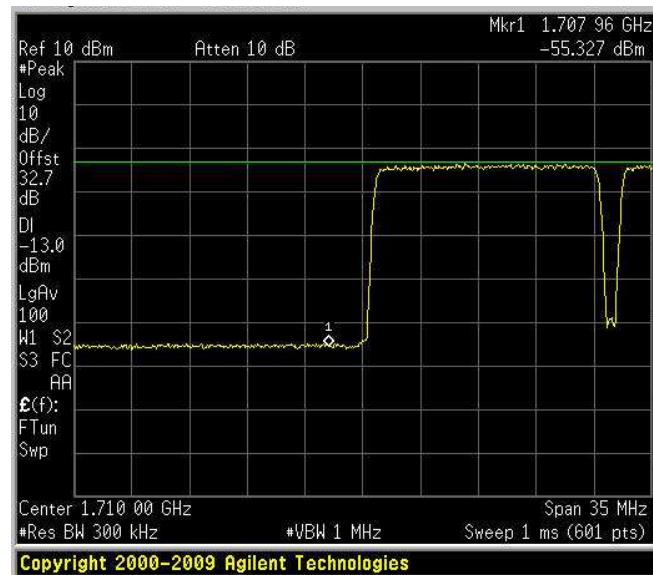Uplink – 15 QAM  
LOW BAND EDGE


## Spurious Emissions at Antenna Terminals

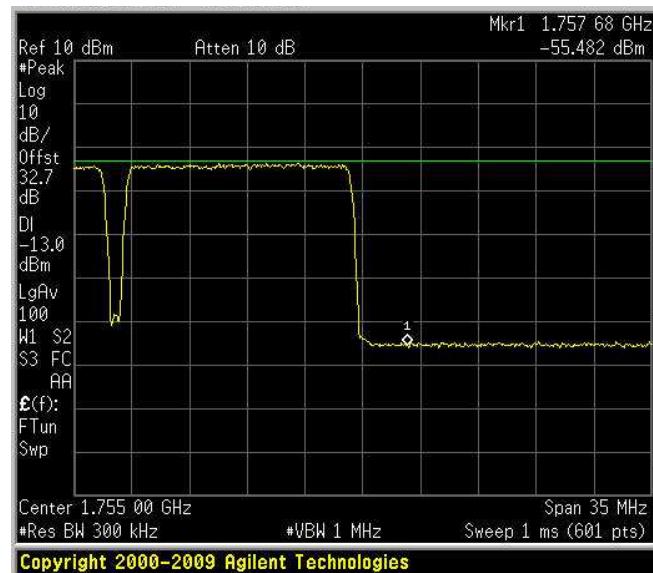Uplink – 15 QAM  
HIGH BAND EDGE

## Spurious Emissions at Antenna Terminals

Downlink – 15 QPSK

LOW BAND EDGE

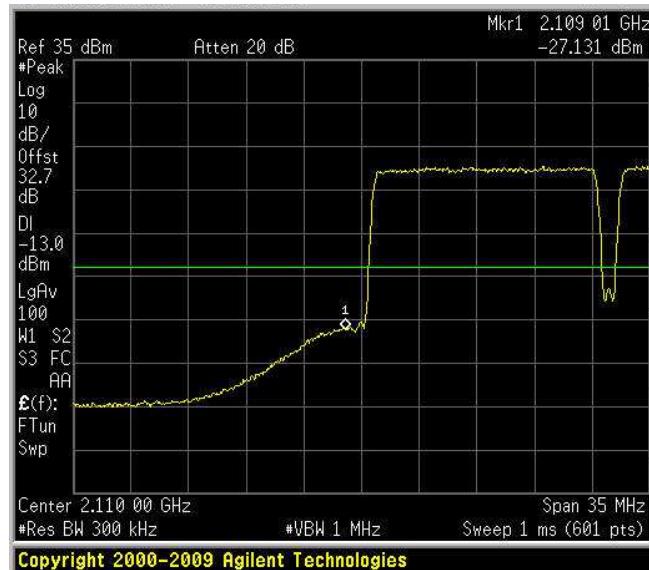

## Spurious Emissions at Antenna Terminals

Downlink – 15 QPSK


HIGH BAND EDGE



## Spurious Emissions at Antenna Terminals

Uplink – 15 QPSK


LOW BAND EDGE

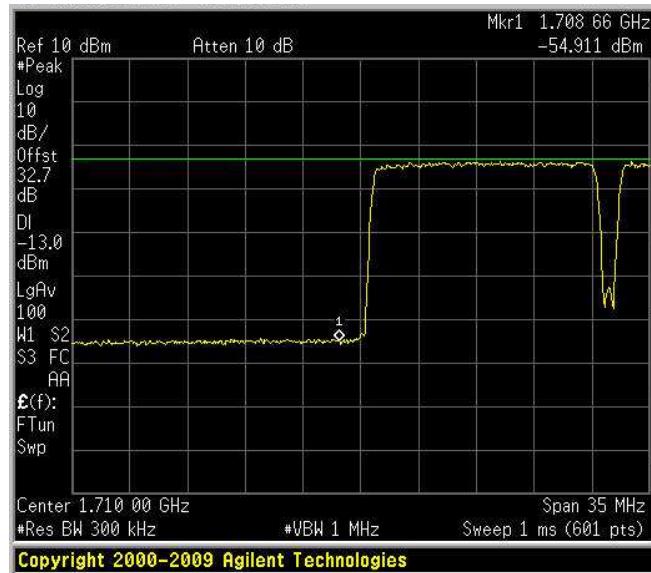

## Spurious Emissions at Antenna Terminals

Uplink – 15 QPSK


HIGH BAND EDGE

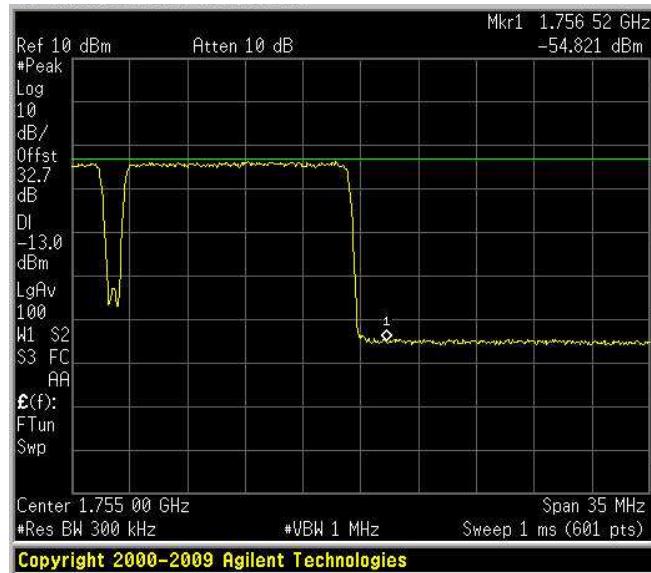

## Spurious Emissions at Antenna Terminals

Downlink – 20 QAM


LOW BAND EDGE

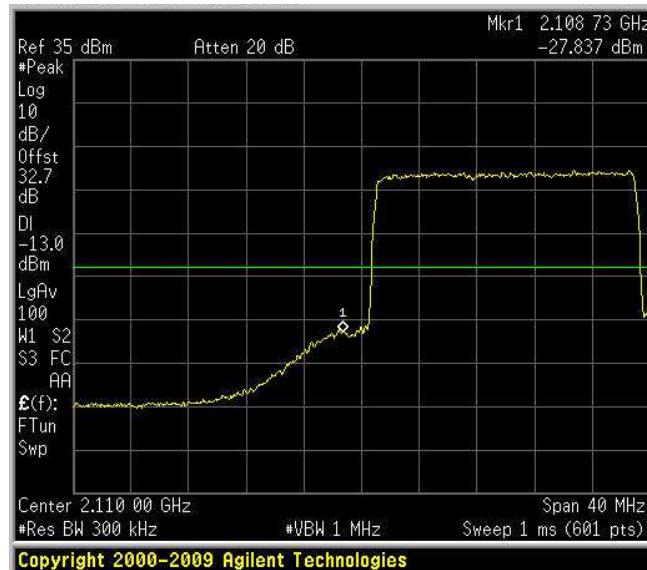

## Spurious Emissions at Antenna Terminals

Downlink – 20 QAM


HIGH BAND EDGE

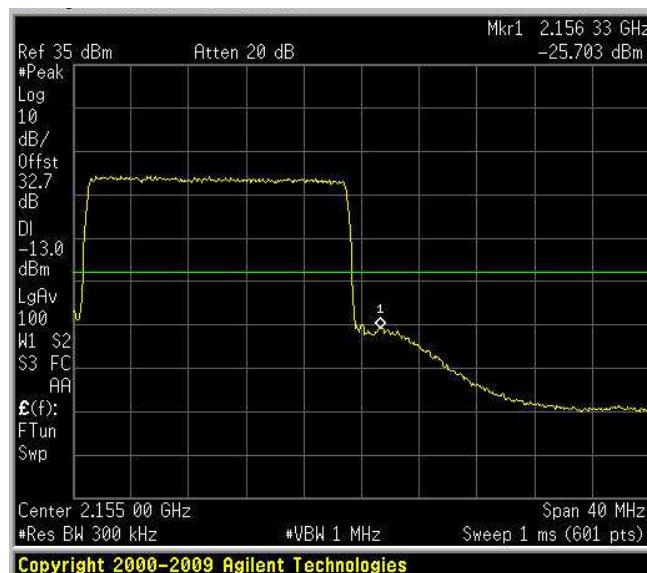

## Spurious Emissions at Antenna Terminals

Uplink – 20 QAM


LOW BAND EDGE

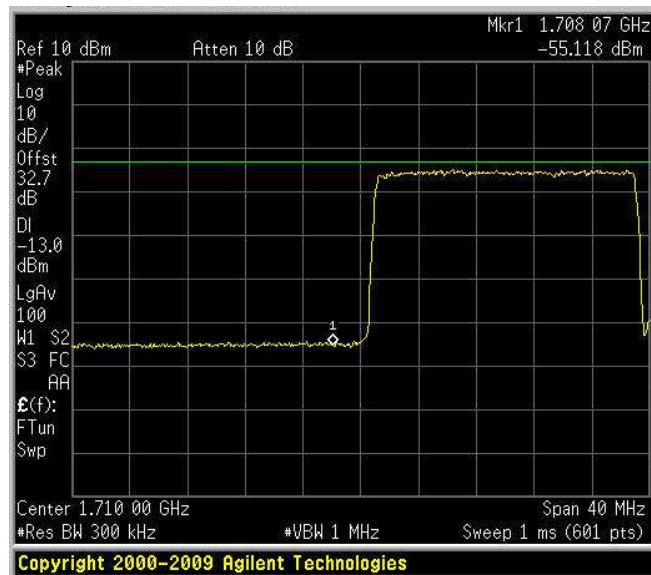

## Spurious Emissions at Antenna Terminals

Uplink – 20 QAM


HIGH BAND EDGE

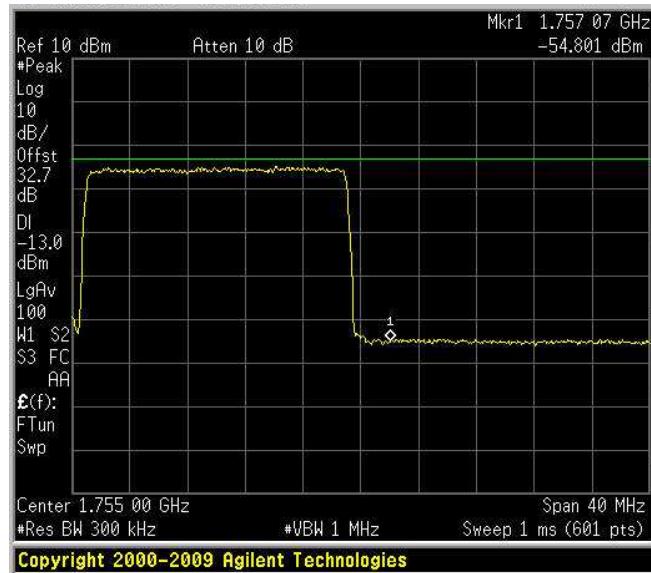

## Spurious Emissions at Antenna Terminals

Downlink – 20 QPSK


LOW BAND EDGE

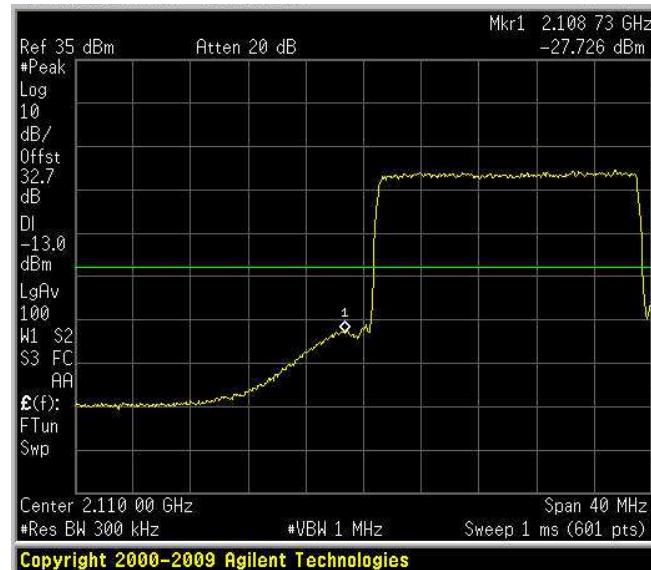

## Spurious Emissions at Antenna Terminals

Downlink – 20 QPSK


HIGH BAND EDGE

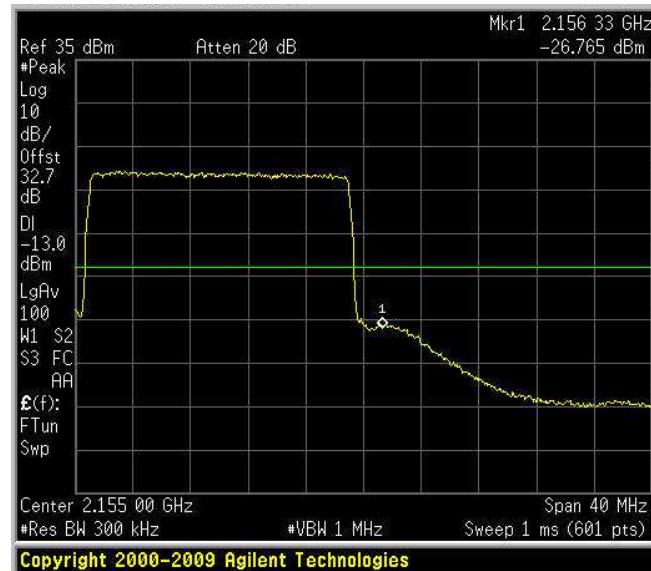

## Spurious Emissions at Antenna Terminals

Uplink – 20 QPSK


LOW BAND EDGE


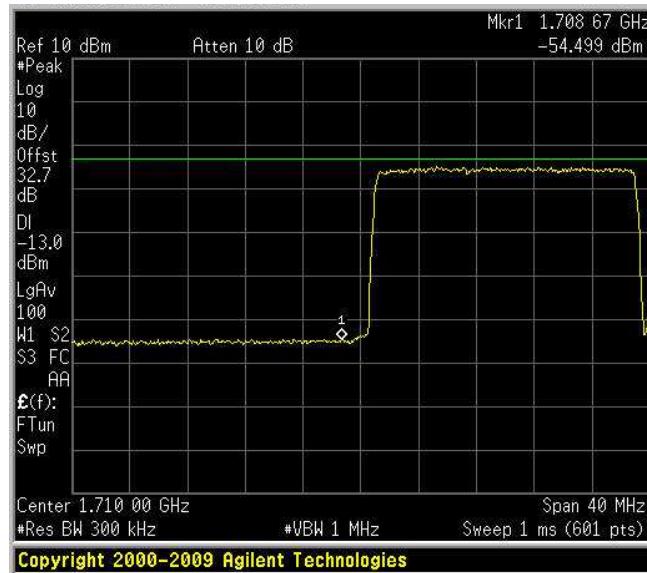


## Spurious Emissions at Antenna Terminals

Uplink – 20 QPSK

HIGH BAND EDGE

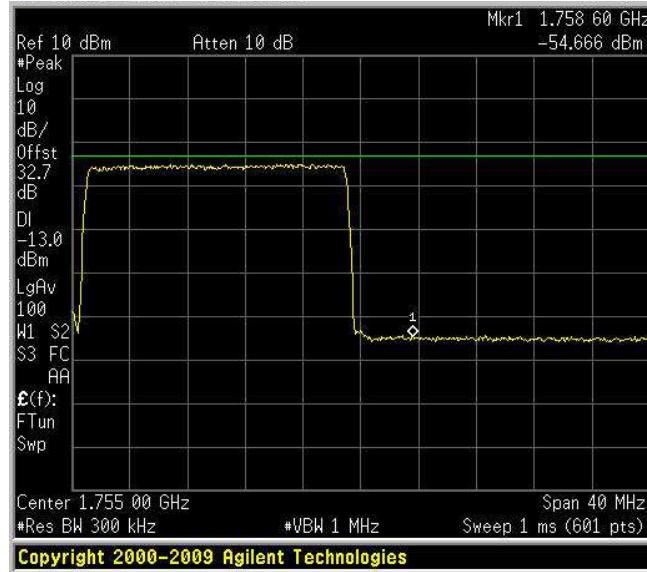

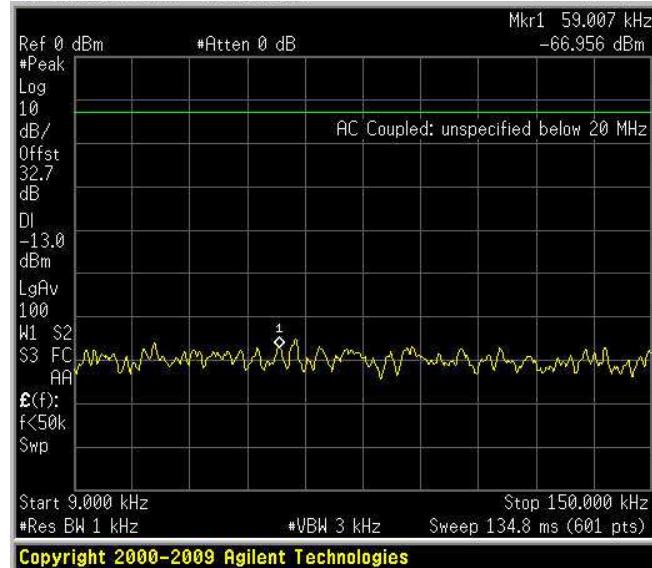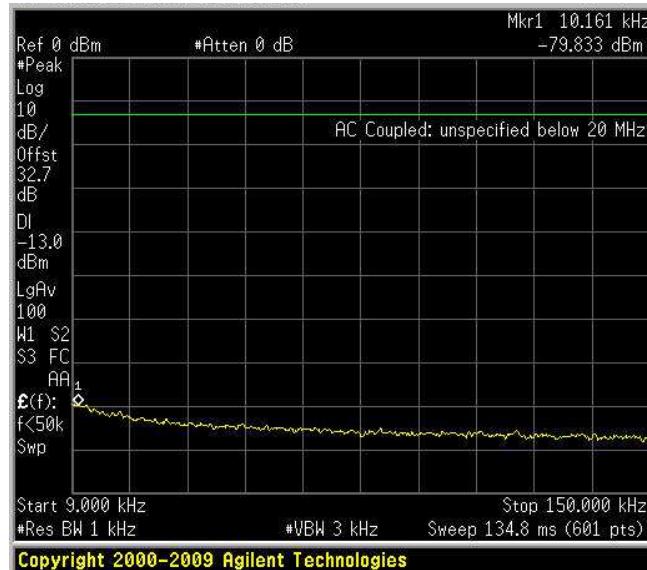
**Spurious Emissions at Antenna Terminals**
**Downlink – 1,4 QAM**
**9 kHz – 150 kHz**

**Spurious Emissions at Antenna Terminals**
**Uplink – 1,4 QAM**
**9 kHz – 150 kHz**


**Only 1,4 QAM 9kHz-150kHz spurious emission plots are included here, other modulations spurious emission plots are negligible and the same.**

## Spurious Emissions at Antenna Terminals

Downlink – 1,4 QAM

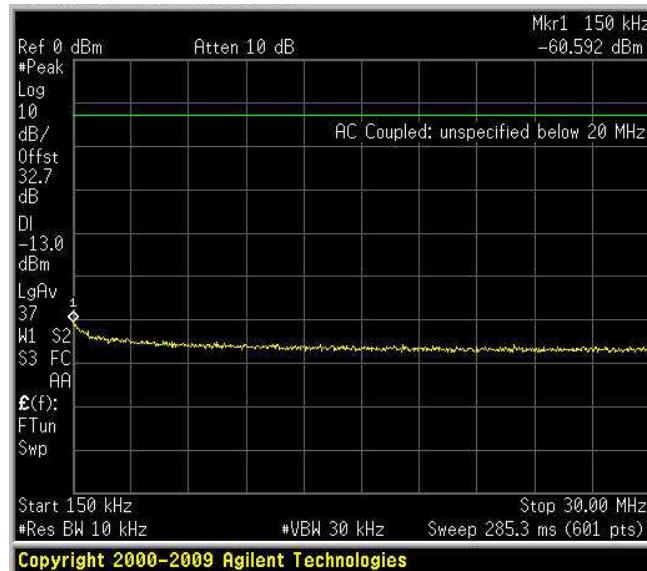
150 kHz – 30MHz



## Spurious Emissions at Antenna Terminals

Uplink – 1,4 QAM

150 kHz – 30MHz

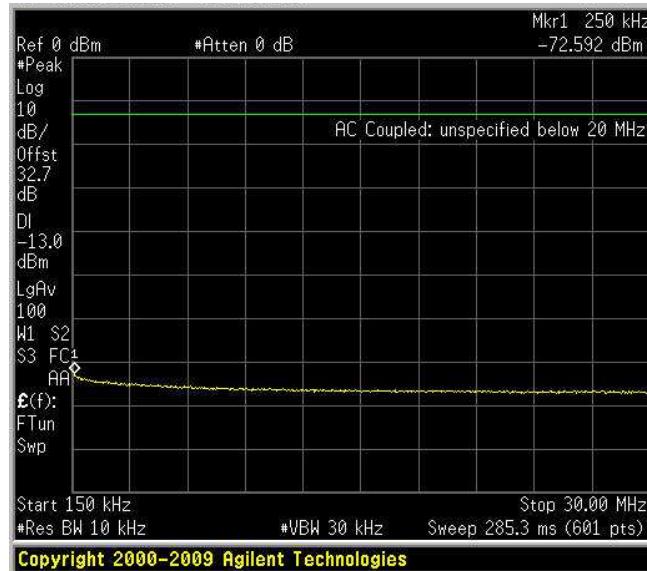


Only 1,4 QAM 150kHz-30MHz spurious emission plots are included here, other modulations spurious emission plots are negligible and the same.

## Spurious Emissions at Antenna Terminals

Downlink – 1,4 QAM


30MHz – 1 GHz

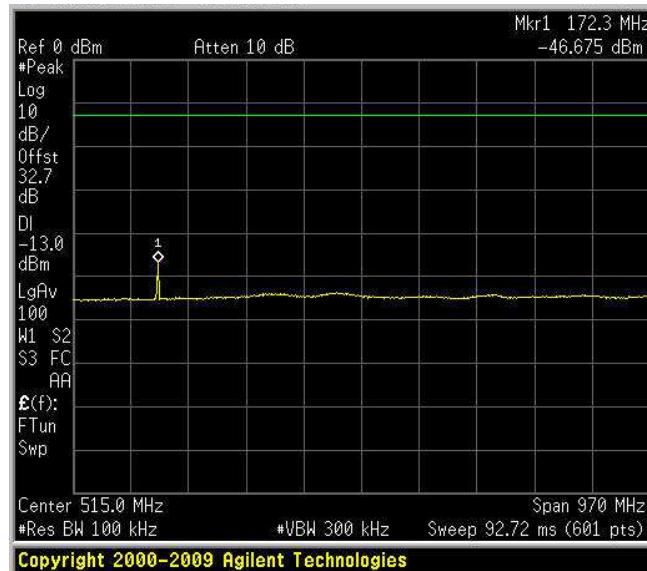

## Spurious Emissions at Antenna Terminals

Downlink – 1,4 QPSK

30MHz – 1 GHz

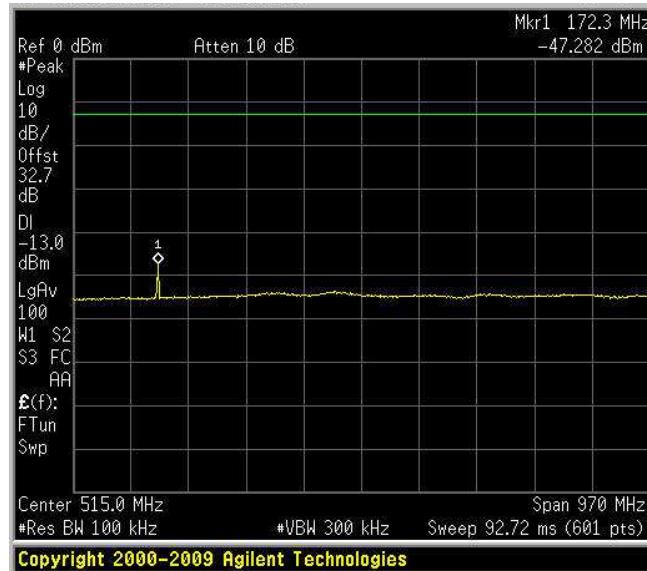

## Spurious Emissions at Antenna Terminals

Downlink – 3 QAM


30MHz – 1 GHz



## Spurious Emissions at Antenna Terminals

Downlink – 3 QPSK


30MHz – 1 GHz

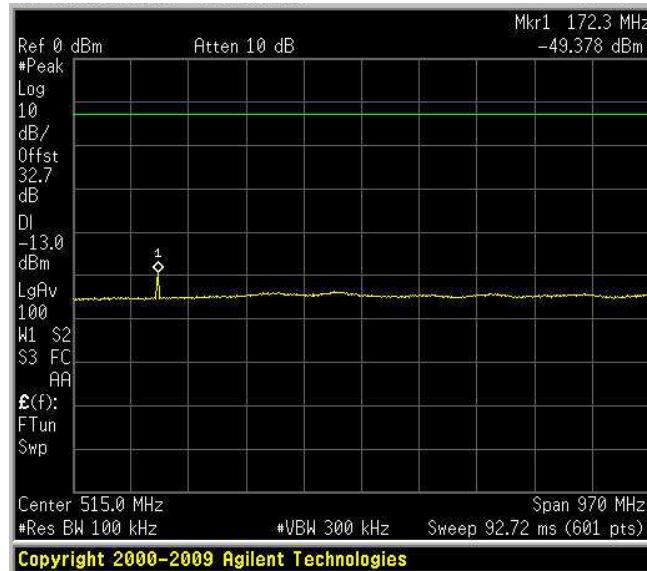

## Spurious Emissions at Antenna Terminals

Downlink – 5 QAM


30MHz – 1 GHz

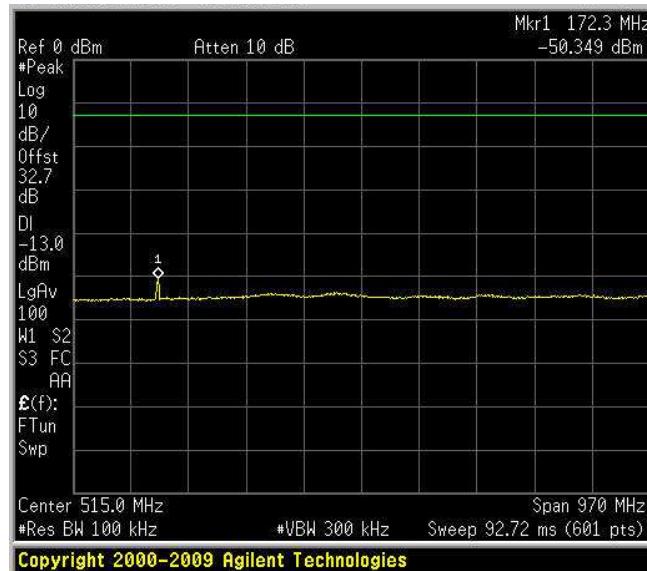

## Spurious Emissions at Antenna Terminals

Downlink – 5 QPSK


30MHz – 1 GHz

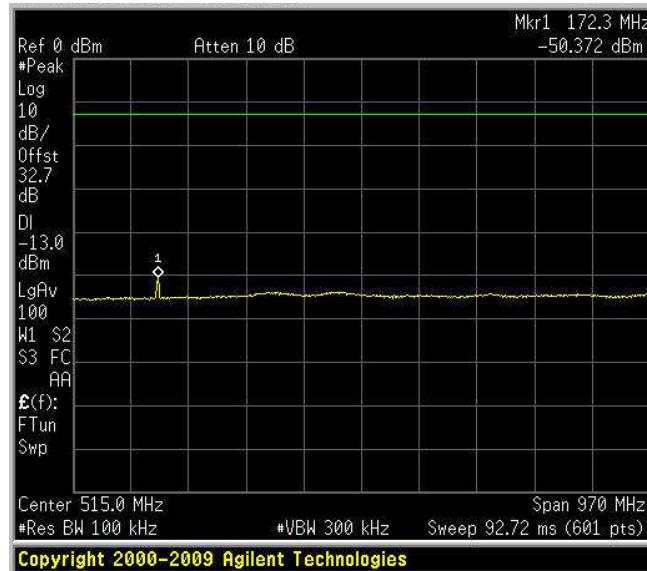

## Spurious Emissions at Antenna Terminals

Downlink – 10 QAM


30MHz – 1 GHz

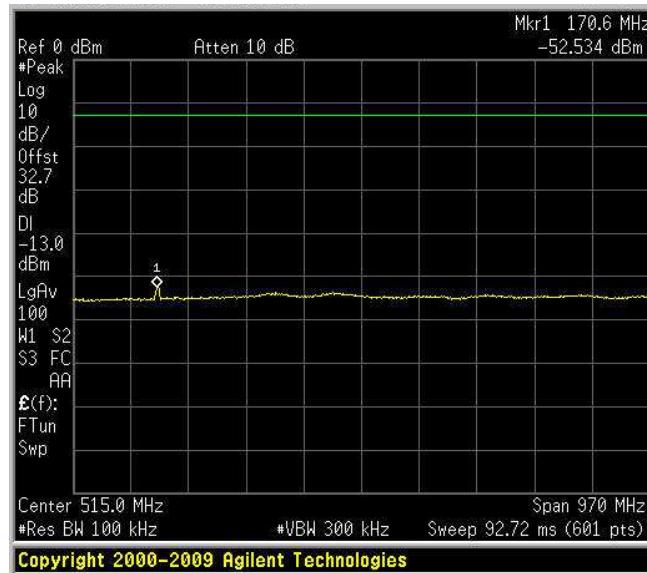

## Spurious Emissions at Antenna Terminals

Downlink – 10 QPSK


30MHz – 1 GHz

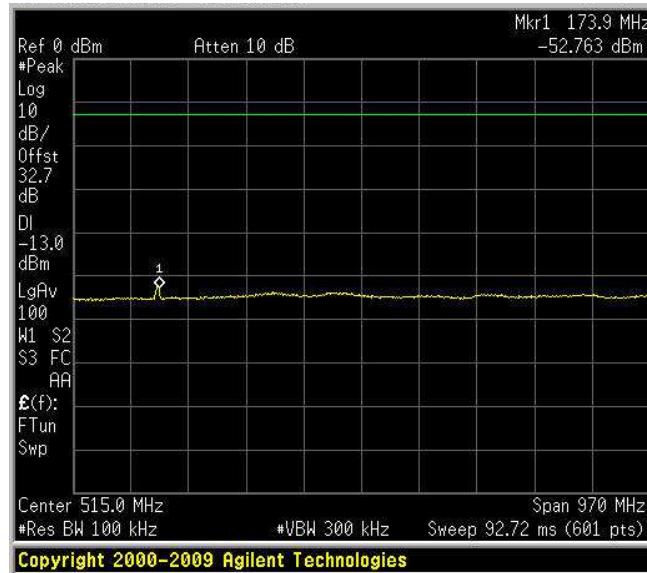

## Spurious Emissions at Antenna Terminals

Downlink – 15 QAM


30MHz – 1 GHz

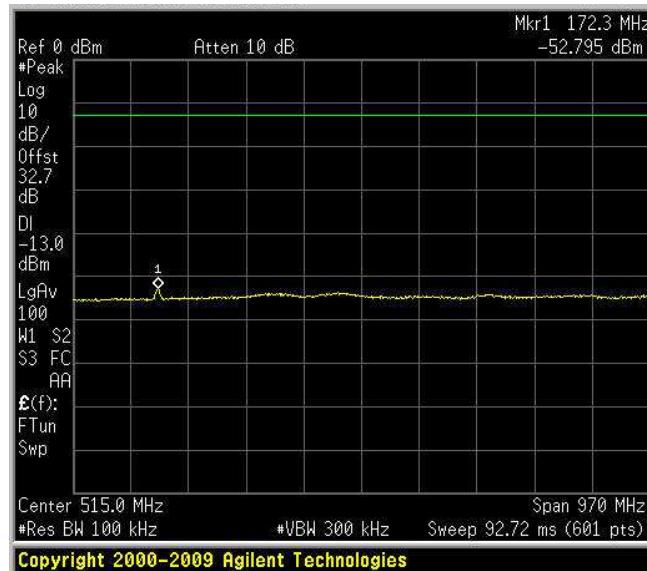

## Spurious Emissions at Antenna Terminals

Downlink – 15 QPSK


30MHz – 1 GHz

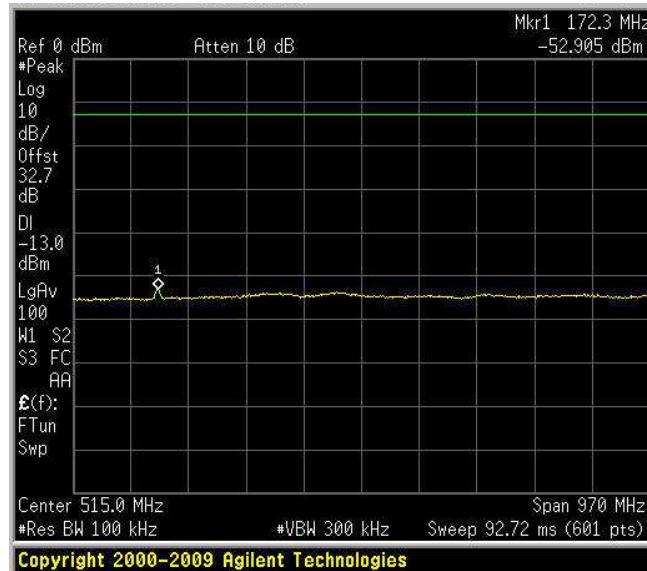

## Spurious Emissions at Antenna Terminals

Downlink – 20 QAM


30MHz – 1 GHz

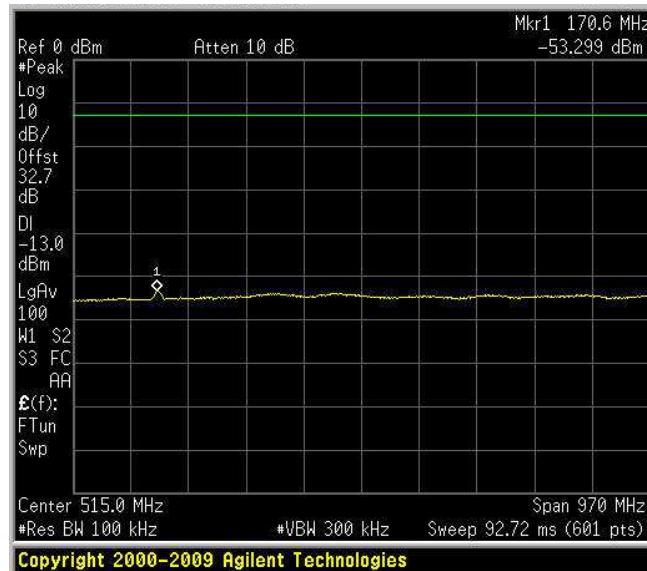

## Spurious Emissions at Antenna Terminals

Downlink – 20 QPSK

30MHz – 1 GHz

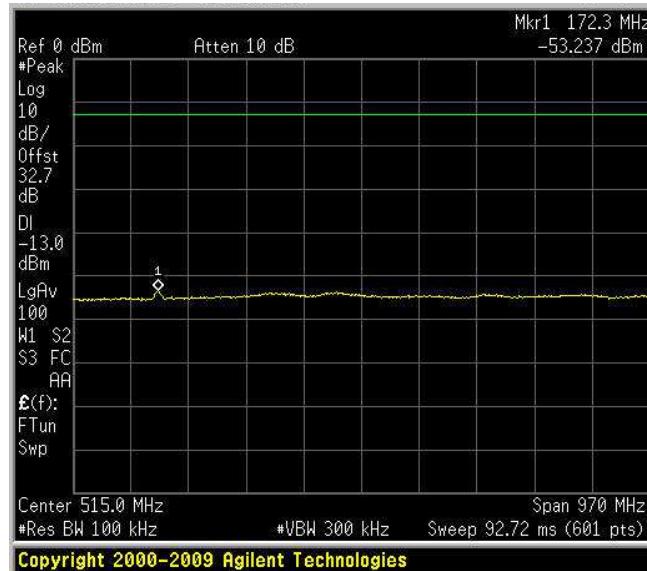*To be continued*