

Report Reference ID:	326513-1TRFWL
----------------------	---------------

Test specification:	Title 47 – Telecommunication Chapter I – Federal Communications Commission Subchapter B – Common carrier services Part 27 – Miscellaneous wireless communications services
---------------------	--

Applicant:	TEKO Telecom Srl. Via Meucci, 24/a I-40024 Castel S. Pietro Terme (BO) (Italy)	
Apparatus:	Medium Power Remote Unit	
Model:	TRU2525WM/AC-WT	
FCC ID:	XM2-MP2525	

Testing laboratory:	Nemko Italy Spa Via del Carroccio, 4 20853 Biassono (MB) – Italy Telephone: +39 039 2201201 Facsimile: +39 039 2201221
---------------------	--

	Name and title	Date
Tested by:	Curioni &	04/06/2017
roctod by:	G. Curioni, Wireless/EMC Specialist	0 1/00/2011
Reviewed by:	Bulu Part	04/06/2017
,	P. Barbieri, Wireless/EMC Specialist	

Nemko Spa, 20853 Biassono (MB) - Italy. All rights reserved.

This publication may be reproduced in whole for non-commercial purposes as long as Nemko Spa is acknowledged as copyright owner and source of the material. Nemko Spa takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This test report may not be partially reproduced, except with the prior written permission of Nemko Spa. The test report merely corresponds to the test sample. The phase of sampling / collection of equipment under test is carried out by the customer.

This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.







Table of contents

Section 1: 1.1	Report summary Test specification	4
1.2	Statement of compliance	 4
1.3	Exclusions	 4
1.4	Registration number	 4
1.5	Test report revision history	 4
1.6	Limits of responsibility	 4
Section 2 : 2.1	Summary of test results	5
Section 3 : 3.1	Equipment under test (EUT) and application details	6
3.2	Modular equipment	 6
3.3	Product details	 6
3.4	Application purpose	 6
3.5	Composite/related equipment	 7
3.6	Sample information	 7
3.7	EUT technical specifications	 7
3.8	Accessories and support equipment	 8
The following	ng information identifies accessories used to exercise the EUT during testing:	 8
3.9	Operation of the EUT during testing	 9
3.10	EUT setup diagram	 9
Section 4: 4.1	Engineering considerations	10
4.2	Deviations from laboratory tests procedures	 10
4.3	Technical judgment	 10
Section 5: 5.1	Test conditions Deviations from laboratory tests procedures	
5.2	Test conditions, power source and ambient temperatures	 11
5.3	Measurement uncertainty	 12
5.4	Test equipment	 12
	A: Test results210 D05v01r01 (3.2) AGC threshold	13
Clause 935	210 D05v01r01 (3.3) Out of band rejection	 14
Clause 27.5	53(m)(6) Occupied bandwidth	 15
Clause 27.5	50(h) Peak output power at RF antenna connector	 17





Clause 27.53(m) Spurious emissions at RF antenna connector	20
Clause 27.53(m) Radiated Spurious emissions	25
Appendix B: Block diagrams of test set-ups Appendix C: EUT Photos	33 34



port summary **Product**: TRU2525WM/AC-WT

Specification: FCC 27

Section 1: Report summary

1.1 Test specification

Specifications

Part 27 - Miscellaneous wireless communications services

1.2 Statement of compliance

Compliance

In the configuration tested the EUT was found compliant

Yes ⊠ No □

This report contains an assessment of apparatus against specifications based upon tests carried out on samples submitted at Nemko Canada Inc. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 27. Radiated tests were conducted in accordance with ANSI C63.4-2003.

1.3 Exclusions

Exclusions

None

1.4 Registration number

Test site FCC
ID number

176392 (3 m Semi anechoic chamber)

1.5 Test report revision history

•	
Revision #	Details of changes made to test report
TRF	Original report issued
R1TRF	

1.6 Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



Section 2: Summary of test results

2.1 FCC Part 27, test results			
Part	Methods	Test description	Verdict
	§ 935210 D05v01r01 (3.2)	AGC threshold	Pass
	§ 935210 D05v01r01 (3.3)	Out of band rejection	Pass
§27.53(m)(6)	§ 935210 D05v01r01 (3.4)	Occupied bandwidth	Pass
§27.50(h)	§ 935210 D05v01r01 (3.5)	Peak output power at RF antenna connector	Pass
§27.53(m)	§ 935210 D05v01r01 (3.6)	Spurious emissions at RF antenna connector	Pass
§27.53(m)	§ 935210 D05v01r01 (3.8)	Radiated spurious emissions	Pass
§27.54	§ 935210 D05v01r01 (3.7)	Frequency stability	N/A a)

Notes:

a) NOT APPLICABLE: Modulation/frequency conversion circuitry not in use. No frequency change in EUT (input and output have same frequency)

Nemko

Specification: FCC 27

Product: TRU2525WM/AC-WT

Section 3: Equipment under test (EUT) and application details

3.1 Applicant of	details			
Applicant	Name:	Teko Telecom Srl		
complete	Federal			
business name	Registration	0018963462		
	Number (FRN):			
	Grantee code	XM2		
Mailing address	Address:	Via Meucci, 24/a		
	City:	Castel S. Pietro Terme		
	Province/State:	Bologna		
	Post code:	40024		
	Country:	Italy		
3.2 Modular ed	quipment			
a) Single modular	Single modular approval			
approval	Yes □			
b) Limited single	Limited single modular approval			
modular approval	Yes □ No ⊠			
3.3 Product de	etails			
FCC ID	Grantee code:	XM2		
	Product code:	-MP2525		
Equipment class	B2I			
Description of	Booster			
product as it is	Model	TRU2525WM/AC-WT		
marketed	name/number:			
	Serial number:	1006509001		
3.4 Application				
Type of	Original certi			
application		lentification of presently authorized equipment		
	Original FCC			
		nissive change or modification of presently authorized		
	equipment			



Specification: FCC 27

Section 3: Equipment under test

3.5 Composite/related equipment			
The EUT is a composite device subject to an additional equipment			
authorization			
Yes □ No ⊠			
The EUT is part of a system that operates with, or is marketed with,			
another device that requires an equipment authorization			
Yes □ No ⊠			
If either of the above is "yes":			
has been granted under the FCC ID(s) listed below:			
is in the process of being filled under the FCC ID(s) listed below:			
is pending with the FCC ID(s) listed below:			
has a mix of pending and granted statues under the FCC ID(s)			
listed below:			
i FCC ID:			
ii FCC ID:			

3.6 Sample inf	formation
Receipt date:	04/05/2017
Nemko sample ID number:	

3.7 EUT techn	ical specifications
Operating band:	Down Link – Up Link: 2496–2690 MHz
Operating frequency:	Wideband
Modulation type:	LTE-TDD (QAM and QPSK)
Occupied bandwidth:	LTE: 5 MHz, 10 MHz, 15 MHz, 20 MHz
Channel spacing:	standard
Emission designator:	LTE: D7W
RF Output	Down Link: - max composite output power based on one carrier per path: 33dBm (2,00W) - MIMO max composite output power based on one carrier per path: 36dBm (4,00W) Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
Gain	Down Link: 38dB Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
Antenna type:	External Antenna is not provided, equipment that has an external 50 Ω RF connector
Power source:	100-240 Vac



Specification: FCC 27

Section 3: Equipment under test

3.8 Accessories and support equipment The following information identifies accessories used to exercise the EUT during testing: Item # 1 Type of equipment: Master Unit - Subrack Brand name: Teko Telecom srl Model name or number: SUB-TRX-PSU Serial number: 101083001 Nemko sample number: Connection port: Master Unit - Management Module Brand name: Teko Telecom srl Model name or number: Teva-Management Module Brand name: Teko Telecom srl Model name or number: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit - Optical Module Brand name: Teko Telecom srl Model name or number: Teko Telecom srl Model name or number: Deficial Module Brand name: Teko Telecom srl Model name or number: Teko Telecom srl DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit - Power Supply Brand name: Teko Telecom srl Model name or number: Oslogova Nemko sample number: Oslogova Ne	3.8 Accessories and	d support equipment
Item # 1 Type of equipment: Master Unit - Subrack Brand name: Teko Telecom srl Model name or number: SUB-TRX-PSU Serial number: 101083001 Nemko sample number:		
Brand name: Teko Telecom srl Model name or number: SUB-TRX-PSU Serial number: 101083001 Nemko sample number: Connection port: Cable length and type: Item # 2 Type of equipment: Master Unit – Management Module Brand name: Teko Telecom srl Model name or number: TSPV-R Serial number: 110942253 Nemko sample number: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: LONDE of the port of t		entines accessories asca to exercise the Eo F daring testing.
Brand name: Teko Telecom srl Model name or number: SUB-TRX-PSU Serial number: 101083001 Nemko sample number: Connection port: Cable length and type: Item # 2 Type of equipment: Master Unit – Management Module Brand name: Teko Telecom srl Model name or number: TSPV-R Serial number: 110942253 Nemko sample number: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: LONDE of the port of t		Master Unit - Subrack
Model name or number: SUB-TRX-PSU Serial number: 101083001 Nemko sample number:		
Serial number: 101083001 Nemko sample number:		
Nemko sample number: Connection port: Cable length and type: Item # 2 Type of equipment: Master Unit – Management Module Brand name: Teko Telecom srl Model name or number: TSPV-R Serial number: Connection port: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: TRU4W-S-M Serial number: TRU4W-S-M Serial number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Optical Module TRU4W-S-M Serial number: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: DRUAC Serial number: O81063004 Nemko sample number: Onnection port:		
Connection port: Cable length and type: Item # 2 Type of equipment: Master Unit – Management Module Brand name: Teko Telecom srl Model name or number: Serial number: Nemko sample number: Connection port: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: TTRU4W-S-M Serial number: Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: Texo Telecom srl Model name or number: Texo Telecom srl Model name or number: Teko Telecom srl Model name or number: Teko Telecom srl Model name or number: Teko Telecom srl Model name or number: O81063004 Nemko sample number: Connection port:		
Cable length and type: Item # 2 Type of equipment:		
Item # 2 Type of equipment: Master Unit – Management Module Brand name: Teko Telecom srl Model name or number: TSPV-R Serial number: 110942253 Nemko sample number: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: 110679007, 1004519032 Nemko sample number: 110679007, 1004519032 Nemko sample number: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Master Unit – Power Supply Transparent Supply Transparent Supply Transparent Supply Teko Telecom srl Master Unit – Power Supply Teko Telecom srl Master Unit – Power Supply Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:	•	
Type of equipment: Master Unit – Management Module Brand name: Teko Telecom srl Model name or number: TSPV-R Serial number: 110942253 Nemko sample number: Connection port: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: TTRU4W-S-M Serial number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:	• • • • • • • • • • • • • • • • • • • •	1
Brand name: Teko Telecom srl Model name or number: TSPV-R Serial number: 110942253 Nemko sample number: Connection port: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: TTRU4W-S-M Serial number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:		
Model name or number: TSPV-R Serial number: 110942253 Nemko sample number: Connection port: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:		
Serial number: 110942253 Nemko sample number:		
Nemko sample number: Connection port: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: TTRU4W-S-M Serial number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port: Connection port: Connection port:		
Connection port: LAN port Cable length and type: Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:		110942253
Cable length and type: Item # 3 Type of equipment:	•	
Item # 3 Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: TTRU4W-S-M Serial number: 110679007, 1004519032 Nemko sample number: Optical port (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:		LAN port
Type of equipment: Master Unit – Optical Module Brand name: Teko Telecom srl Model name or number: TTRU4W-S-M Serial number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Cable length and type:	
Brand name: Teko Telecom srl Model name or number: TTRU4W-S-M Serial number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Item # 3	
Model name or number: TTRU4W-S-M Serial number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Type of equipment:	Master Unit – Optical Module
Serial number: 110679007, 1004519032 Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Brand name:	Teko Telecom srl
Nemko sample number: Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Model name or number:	TTRU4W-S-M
Connection port: DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Serial number:	110679007, 1004519032
Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:	Nemko sample number:	
Optical port (to connect to remote unit) Cable length and type: Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:	Connection port:	DL/UL RF connector (to connect to the base station)
Item # 4 Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:		
Type of equipment: Master Unit – Power Supply Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number:	Cable length and type:	
Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Item # 4	
Brand name: Teko Telecom srl Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:	Type of equipment:	Master Unit – Power Supply
Model name or number: TPSU/AC Serial number: 081063004 Nemko sample number: Connection port:		
Nemko sample number: Connection port:	Model name or number:	
Nemko sample number: Connection port:	Serial number:	081063004
Connection port:	Nemko sample number:	
1		
	•	
	7.	

Specification: FCC 27

3.9 Operation of the EUT during testing

Details:

In down-link direction, normal working at max gain with max RF power

output.

This test report is referred to a MIMO RF Port 1 of the EUT.

3.10 EUT setup diagram

In this system, Remote Unit is the EUT. Master Unit includes only management module and optical module (to convert RF signal in optical signal in down link direction and viceversa optical signal in RF signal in up link direction). As described in "Operational description", master unit is connected directly to base station, so the system doesn't use another equipment (under another FCC ID) to exercise the EUT. Signal generator is linked directly to the RF connector of optical module in the Master Unit.

Test setup for output power, occupied bandwidth, spurious emissions:



Procedure

Connect the signal modulated generator to the input of the EUT, so that the EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT.



Product: TRU2525WM/AC-WT

Section 4: Engineering considerations

Section 4. Engineering considerations				
4.1 Modificatio	ns incorporated in the EUT			
Modifications	Modifications performed to the EUT during this assessment None ☑ Yes □, performed by Client □ or Nemko □ Details:			
4.2 Deviations	from laboratory tests procedures			
Deviations	Deviations from laboratory test procedures			
	None ⊠ Yes □ - details are listed below:			
4.3 Technical judgment				
Judgment	None			




Specification: FCC 27

Section 5: Test conditions

5.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

5.2 Test condition	5.2 Test conditions, power source and ambient temperatures				
Normal temperature, humidity and air pressure test conditions	Temperature: 15–30 °C Relative humidity: 20–75 % Air pressure: 86–106 kPa				
	When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.				
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages ±5 %, for which the equipment was designed.				





Section 5: Test conditions, continued

5.3 Measurement uncertainty

Nemko S.p.A. measurement uncertainty has been calculated using the standard CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements". All calculations can be found in Nemko S.p.A. document WML1002.

5.4 Test equipment						
Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.		
Vector Signal Generator	Agilent	N5172B EXG	MY53051238	Jan 2018		
Vector Signal Generator	Agilent	E4438C ESG	MY45094485	Ago 2019		
Spectrum Analyzer	Agilent	N9030A PXA	MY53120882	Nov 2017		
Network Analyzer	Agilent	E5071C ENA	MY46106183	Ago 2017		
V-network	R&S	ESH2-Z5	872 460/041	10/2017		
Trilog Broad Band Antenna 25-2000 MHz	Schwarzbeck	VULB 9168	VULB 9168-242	06/2018		
Trilog Broad Band Antenna 25-8000 MHz	Schwarzbeck	VULB 9162	VULB 9162-25	07/2018		
Antenna 1-18 GHz	Schwarzbeck	STLP 9148	STPL 9148-123	06/2018		
Antenna horn	A.H.System Inc.	SAS-574	061106A40	10/2017		
Preamplifier 18-40 GHz	Miteq	JS44	1648665	12/2017		
Broadband preamplifier 1-18 GHz	Schwarzbeck	BBV 9718	9718-137	12/2017		
EMI receiver 20 Hz ÷ 8 GHz	R&S	ESU8	100202	04/2018		
EMI receiver 20 Hz ÷ 3 GHz	R&S	ESCI	100888	08/2017		
Hydraulic revolving platform	Nemko	RTPL 01	4.233	NCR		
Turning-table	R&S	HCT	835 803/03	NCR		
Antenna mast	R&S	HCM	836 529/05	NCR		
Controller	R&S	HCC	836 620/7	NCR		
Spectrum Analyzer 9kHz ÷ 40GHz	R&S	FSEK	848255/005	01/2018		
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	10/2018		
Shielded room	Siemens	10m control room	1947	NCR		
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	70	NCR		
Shielded Room	Siemens	3m semi-anechoic chamber	3	NCR		
Motor controller	Emco	1051-25	9012-1559	NCR		
Motor controller	Emco	1061-1.521	9012-1508	NCR		
Antenna Tower	Emco	2071-2	9601-1940	NCR		
Controller pole/table	Emco	2090	9511-1099	NCR		

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use (*) Equipment supplied by manufacturer's



Product: TRU2525WM/AC-WT

Appendix A: Test results

Clause 935210 D05v01r01 (3.2) AGC threshold


Measure of EUT AGC Threshold

Test date: 04/05/2017 Test results: Pass


Special notes

Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)

Test data







AWGN signal, nominal input signal +1 dB








Clause 935210 D05v01r01 (3.3) Out of band rejection

Out of Band Rejection – Test for rejection of out of band signals.

Test date: 04/05/2017
Test results: Pass

Special notes

Test data

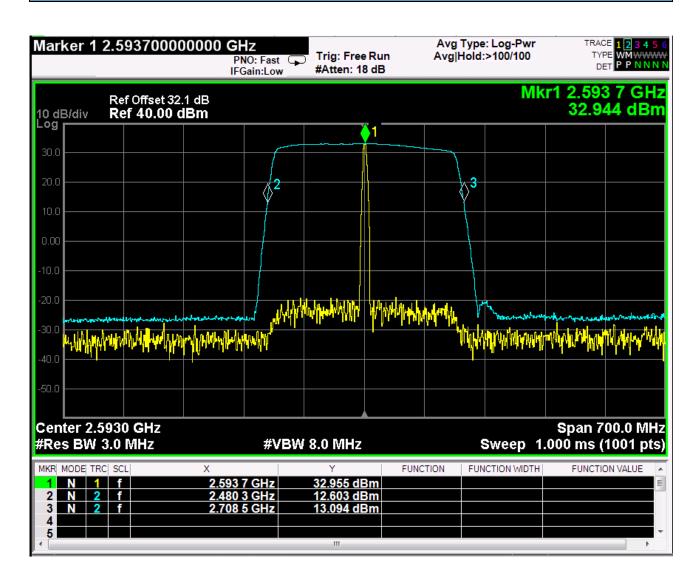

Nemko

Product: TRU2525WM/AC-WT

Specification: FCC 27

Clause 27.53(m)(6) Occupied bandwidth

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test date: 04/05/2017

Test results: Pass

Special notes


- Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)



Clause 27.53(m)(6) Occupied bandwidth, continued

Test data

AWGN signal, nominal input signal

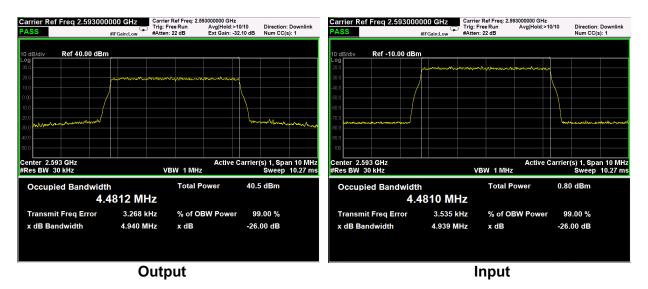

AWGN signal, nominal input signal + 3dB





Specification: FCC 27

Clause 27.50(h) Peak output power at RF antenna connector

§ 27.50(h) The following power limits shall apply in the BRS and EBS:

- (1) Main, booster and base stations.
 - (i) The maximum EIRP of a main, booster or base station shall not exceed 33 dBW \pm 10log(X/Y) dBW, where X is the actual channel width in MHz and Y is either 6 MHz if prior to transition or the station is in the MBS following transition or 5.5 MHz if the station is in the LBS and UBS following transition, except as provided in paragraph (h)(1)(ii) of this section.
 - (ii) If a main or booster station sectorizes or otherwise uses one or more transmitting antennas with a non-omnidirectional horizontal plane radiation pattern, the maximum EIRP in dBW in a given direction shall be determined by the following formula: EIRP = $33 \text{ dBW} + 10 \log(X/Y) \text{ dBW} + 10 \log(360/\text{beamwidth}) \text{ dBW}$, where X is the actual channel width in MHz, Y is either (i) 6 MHz if prior to transition or the station is in the MBS following transition or (ii) 5.5 MHz if the station is in the LBS and UBS following transition, and beamwidth is the total horizontal plane beamwidth of the individual transmitting antenna for the station or any sector measured at the half-power points.

Test date: 04/05/2017
Test results: Pass

Special notes

- Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)



Clause 27.50(h) Peak output power at RF antenna connector

Test data

AWGN signal, nominal input signal

Test data						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	AWGN (LTE, 5MHz)	2593.0	33.06	2.023	0.405	11.15




PAR measure is performed by the "CCDF" function installed on Spectrum analyzer that provides average power (the same measured with "Channel power" function), peak power and PAR.



Product: TRU2525WM/AC-WT

AWGN signal, nominal input signal + 3dB

Test data					
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)
Down-link	AWGN (LTE, 5MHz)	2593.0	33.66	2.32	0.465

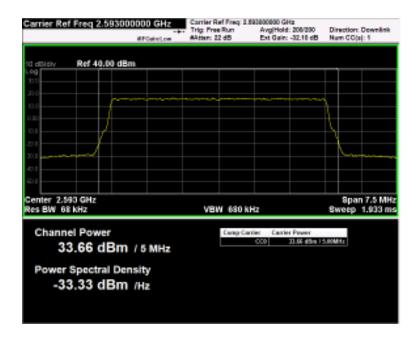

MIMO consideration

The EUT has two MIMO RF Port, so it's possible manage two MIMO RF paths. If EUT is used in MIMO configuration according to KDB 662911-D01 v02r01 and 662911-D02 v01 with signals completely uncorrelated, the MIMO maximum RF Power is the sum of the RF power from each path.

- MIMO Maximum RF Power = 2W + 2W = 4W = 36dBm
- Power Limit calculation (§ 27.50(h))
 Power limit = 33dBW+10log(X/Y)dBW (EIRP)
 Worst case: X=5MHz (minimum value from 3GPP LTE) and Y=6MHz (maximum value defined in 27.50(h))
 Power Limit = 33+10log(5/6) dBW = 32,20dBW = 1660W = 62,20dBm (EIRP)
- Antenna gain calculation
 Antenna gain = Power limit MIMO Maximum RF Power (with zero insertion loss) =
 62,20 36 = 26,2 dBi
- The linearly polarized antennas (cross-polarized) that will be used for the complete system have to have a gain lower than 26,2dBi.



Clause 27.53(m) Spurious emissions at RF antenna connector

Appendix A: Test results

- (m) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts in accordance with the standards below. If a licensee has multiple contiguous channels, out-of-band emissions shall be measured from the upper and lower edges of the contiguous channels.
- (2) For digital base stations, the attenuation shall be not less than 43 + 10 log (P) dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS No. 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Provided that a documented interference complaint cannot be mutually resolved between the parties prior to the applicable deadline, then the following additional attenuation requirements shall apply:
- (6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

Test date: 04/05/2017 Test results: Pass

Special notes

Broadband amplifiers: AWGN test signal used (5 MHz LTE channel)

Specification: FCC 27

Clause 27.53 (m) Spurious emissions at RF antenna connector, continued

Test data			
See Plots below			
Spurious emissions me			
Frequency (MHz)	Spurious emission (dBm)	Limit (dBm)	Margin (dB)
Low channel			
First channel	Negligible	-13	
Mid channel			
2593 MHz	Negligible	-13	
High channel	•	•	•
Last channel	Negligible	-13	

MIMO consideration

The EUT has two MIMO RF Port, so it's possible manage two MIMO RF paths. If EUT is used in MIMO configuration according to KDB 662911-D01 v02r01 and 662911-D02 v01 with signals completely uncorrelated, the maximum emission is calculated as follows:


- MIMO Maximum Emission = Emission at each path + 10log(Nant) dB =
 Emission at each path + 10log(2) = Emission at each path + 3dB
- Spurious emission are negligible.



Test data, continued: spurious emissions at antenna terminal


AWGN signal

(Plots are referred to modulated carrier at the Middle Channel)

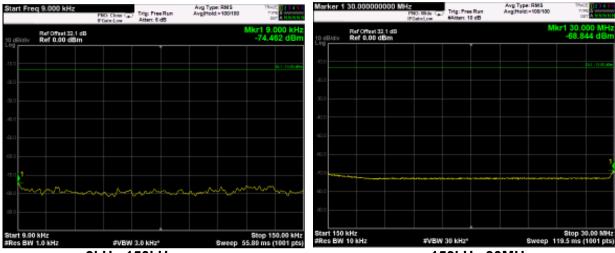

9kHz-150kHz

150kHz-30MHz

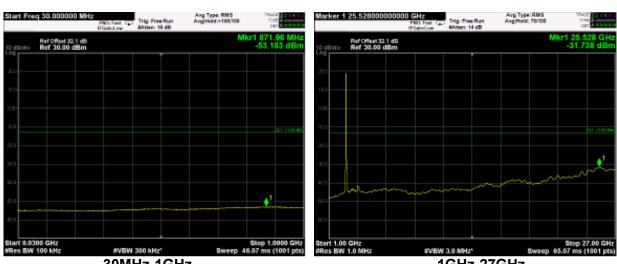


30MHz-1GHz

1GHz-27GHz




Test data, continued: band edges Inter modulation

AWGN signal, nominal input signal

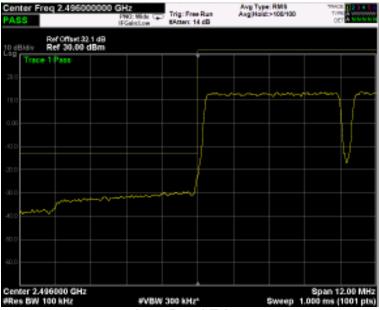


Low Band Edge

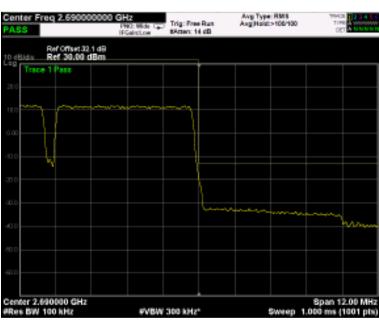


High Band Edge



AWGN signal, nominal input signal + 3dB

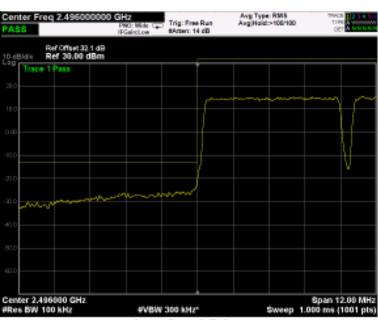

Low Band Edge

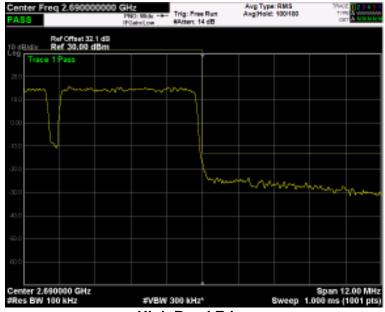

High Band Edge



Specification: FCC 27

Clause 27.53(m) Radiated Spurious emissions

- (m) For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts in accordance with the standards below. If a licensee has multiple contiguous channels, out-of-band emissions shall be measured from the upper and lower edges of the contiguous channels.
- (2) For digital base stations, the attenuation shall be not less than 43 + 10 log (P) dB, unless a documented interference complaint is received from an adjacent channel licensee with an overlapping Geographic Service Area. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS No. 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Provided that a documented interference complaint cannot be mutually resolved between the parties prior to the applicable deadline, then the following additional attenuation requirements shall apply:
- (6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed; for mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed, except when the 1 megahertz band is 2495-2496 MHz, in which case a resolution bandwidth of at least one percent may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 megahertz or 1 percent of emission bandwidth, as specified; or 1 megahertz or 2 percent for mobile digital stations, except in the band 2495-2496 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. With respect to television operations, measurements must be made of the separate visual and aural operating powers at sufficiently frequent intervals to ensure compliance with the rules.

Special notes		

Test date: 04/05/2017 and 04/06/2017

Test results: Pass



Specification: FCC 27

Clause 27.53(m) Radiated spurious emissions, continued

Test data

The D.U.T. was positioned according to the radiated emissions set-up

The D.U.T. antenna connector was terminated by a 50 Ω shielded dummy load.

The spectrum was searched from 30 MHz to 1 GHz (RBW 100 kHz) & 1 GHz (RBW 1 MHz) to the tenth harmonic of the carrier.

There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.

Spurious emissions measurement results:

Frequency Polarization, Field

Frequency	Polarization.	Field strength	Limit	Margin
(MHz)	V/H	(dBµV/m)	(dBµV/m)	(dB)
Low channel				
Mid channel				
High channel				
N				


Note: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

MIMO consideration

The EUT has two MIMO RF Port, so it's possible manage two MIMO RF paths. If EUT is used in MIMO configuration according to KDB 662911-D01 v02r01 and 662911-D02 v01 with signals completely uncorrelated, the maximum emission is calculated as follows:

- MIMO Maximum Emission = Emission at each path + 10log(Nant) dB =
 Emission at each path + 10log(2) = Emission at each path + 3dB
- Spurious emission are negligible.




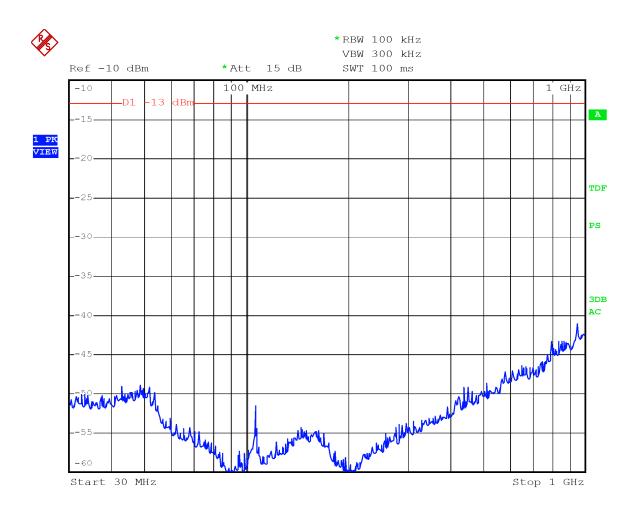

Date: 5.APR.2017 12:32:28

30MHz-1GHz - H Pol




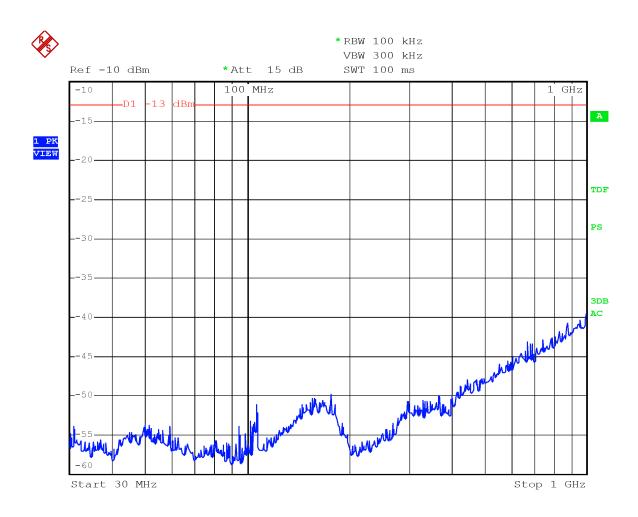

Date: 5.APR.2017 12:38:20

30MHz-1GHz - V Pol




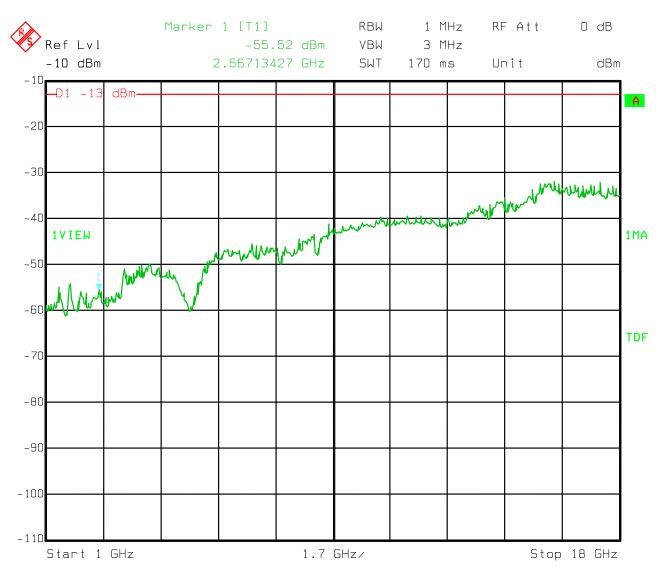

Date: 06.APR.2017 08:46:56

1GHz-18GHz - H Pol




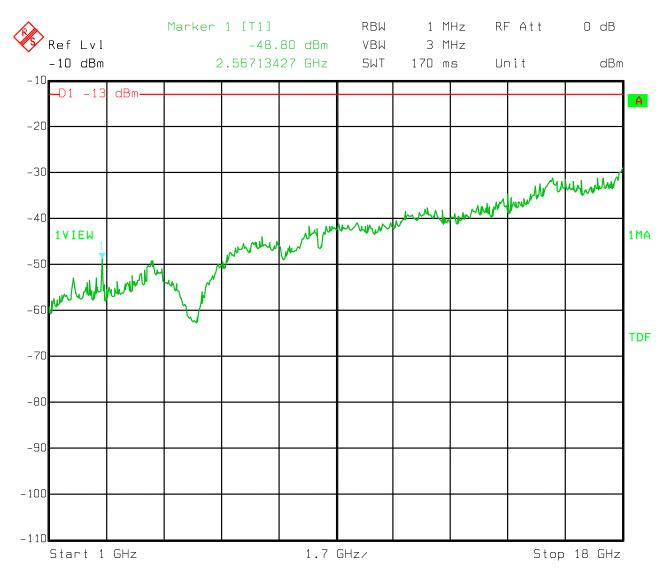

Date: 06.APR.2017 08:56:58

1GHz-18GHz - V Pol




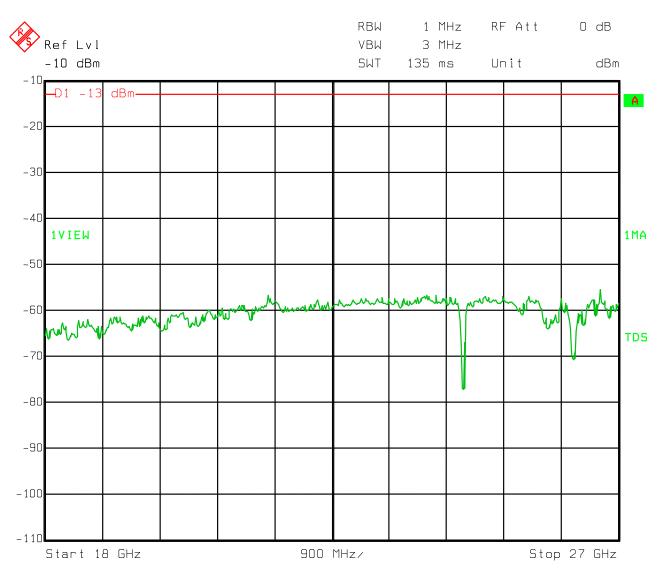

Date: 06.APR.2017 08:23:15

18GHz-27GHz - H Pol



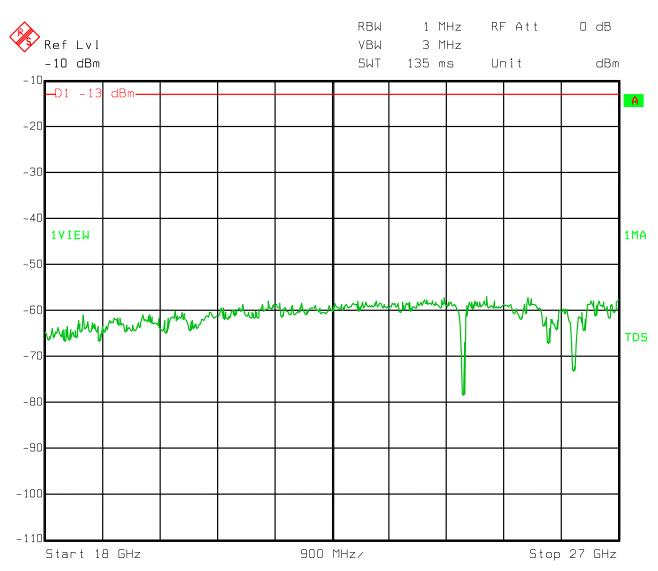


Date: 06.APR.2017 08:26:26

18GHz-27GHz - V Pol



Appendix B: Block diagrams of test set-ups

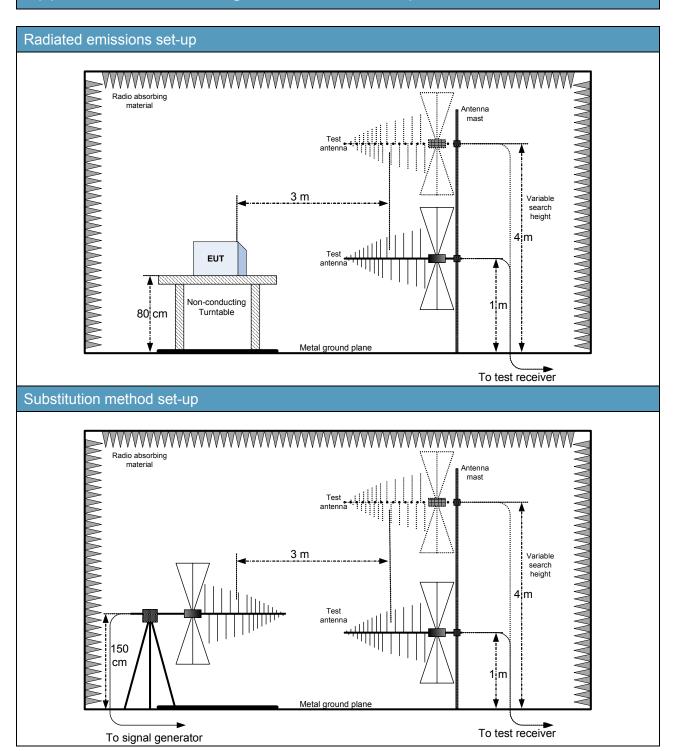




Specification: FCC 27

Appendix C: EUT Photos


Photo Set up








Nemko





Specification: FCC 27







Photo EUT





