


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#654

Date: 2016/05/27

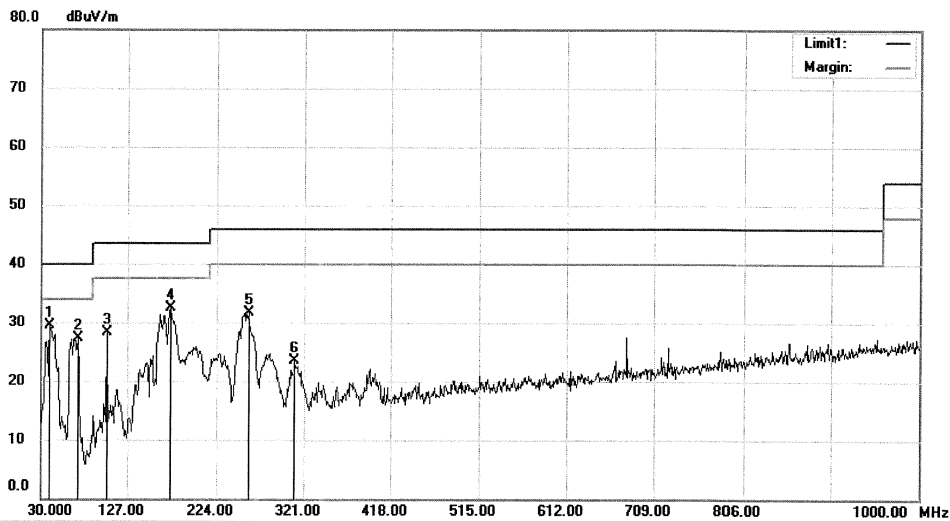

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	39.7000	45.00	-15.59	29.41	40.00	-10.59	QP		
2		71.7100	45.61	-18.25	27.36	40.00	-12.64	QP		
3		103.7200	43.58	-15.30	28.28	43.50	-15.22	QP		
4		174.5300	49.69	-17.20	32.49	43.50	-11.01	QP		
5		258.9200	44.68	-13.04	31.64	46.00	-14.36	QP		
6		310.3300	35.02	-11.47	23.55	46.00	-22.45	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#654

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File :TUV

Data :#655

Date: 2016/05/27

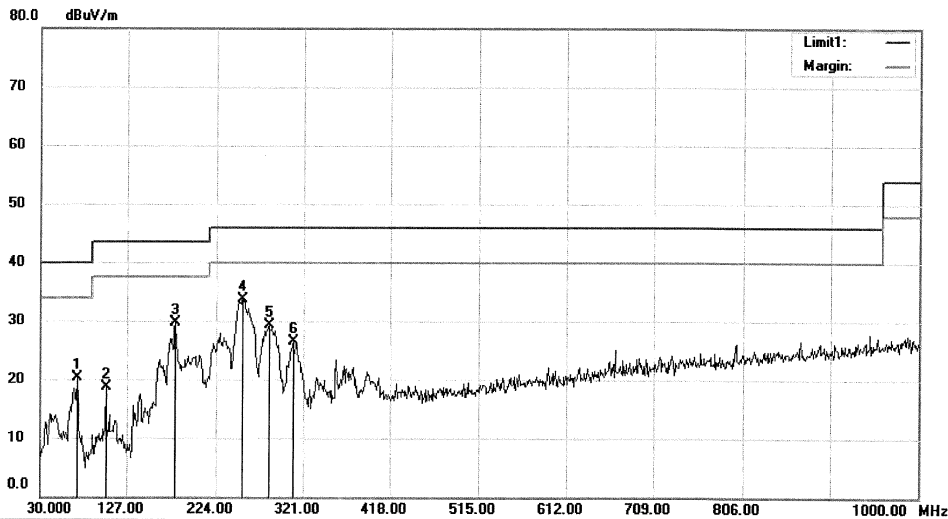

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		71.7100	38.47	-18.25	20.22	40.00	-19.78	QP		
2		103.7200	33.91	-15.30	18.61	43.50	-24.89	QP		
3		179.3800	46.90	-17.17	29.73	43.50	-13.77	QP		
4	*	253.1000	47.01	-13.33	33.68	46.00	-12.32	QP		
5		282.2000	41.66	-12.35	29.31	46.00	-16.69	QP		
6		309.3600	38.00	-11.48	26.52	46.00	-19.48	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#655

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#656

Date: 2016/05/27

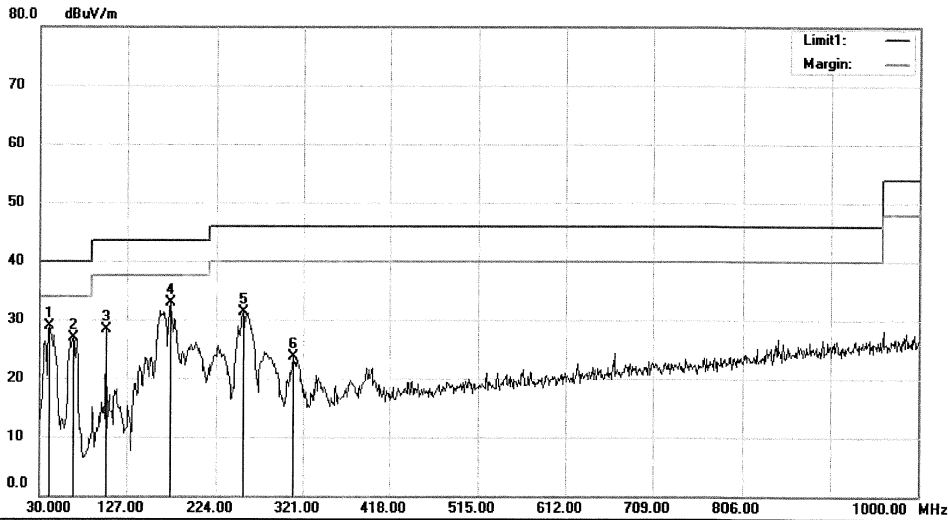

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		40.6700	44.18	-15.34	28.84	40.00	-11.16	QP		
2		67.8300	44.12	-17.29	26.83	40.00	-13.17	QP		
3		103.7200	43.56	-15.30	28.26	43.50	-15.24	QP		
4	*	173.5600	50.15	-17.20	32.95	43.50	-10.55	QP		
5		254.0700	44.62	-13.28	31.34	46.00	-14.66	QP		
6		309.3600	35.14	-11.48	23.66	46.00	-22.34	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#656

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#657

Date: 2016/05/27

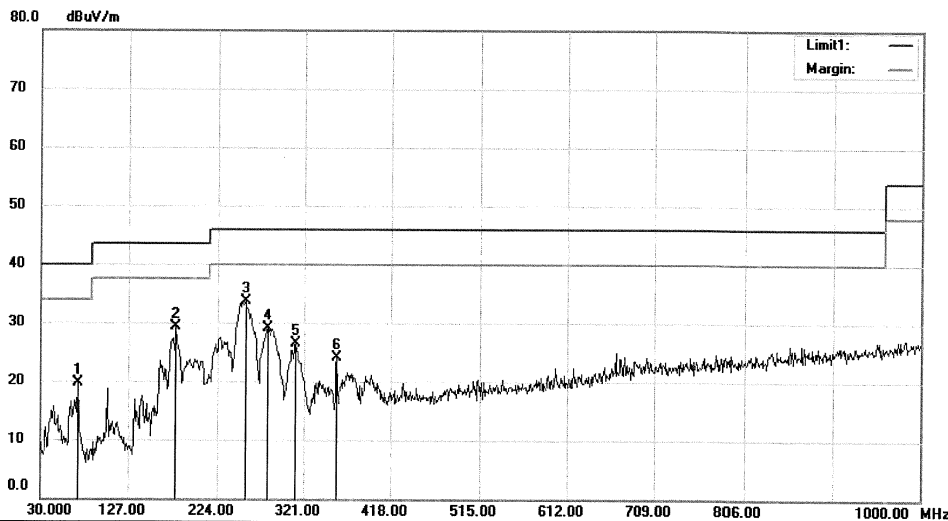

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.7100	38.04	-18.25	19.79	40.00	-20.21	QP		
2		178.4100	46.54	-17.17	29.37	43.50	-14.13	QP		
3	*	255.0400	46.94	-13.23	33.71	46.00	-12.29	QP		
4		280.2600	41.55	-12.44	29.11	46.00	-16.89	QP		
5		311.3000	37.91	-11.46	26.45	46.00	-19.55	QP		
6		357.8600	34.67	-10.59	24.08	46.00	-21.92	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#657

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#658 Date: 2016/05/27

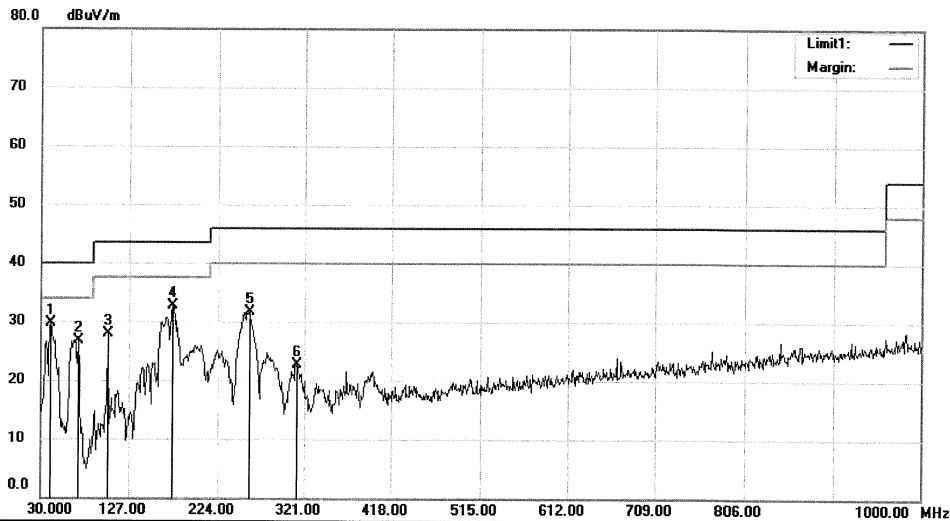

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	40.6700	45.07	-15.34	29.73	40.00	-10.27	QP		
2		71.7100	45.01	-18.25	26.76	40.00	-13.24	QP		
3		103.7200	43.22	-15.30	27.92	43.50	-15.58	QP		
4		174.5300	49.90	-17.20	32.70	43.50	-10.80	QP		
5		258.9200	44.72	-13.04	31.68	46.00	-14.32	QP		
6		312.2700	34.18	-11.45	22.73	46.00	-23.27	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#658

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#651

Date: 2016/05/27

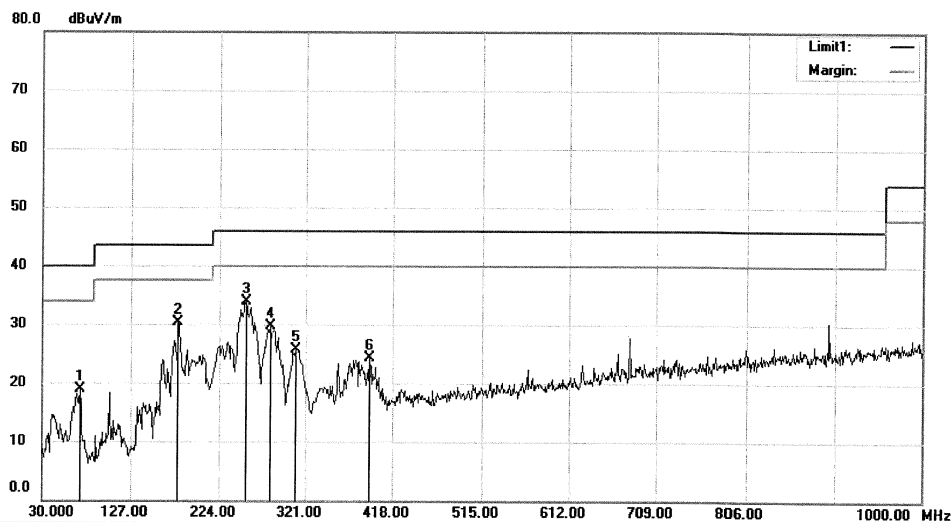

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.7100	37.23	-18.25	18.98	40.00	-21.02	QP		
2		178.4100	47.57	-17.17	30.40	43.50	-13.10	QP		
3	*	254.0700	47.26	-13.28	33.98	46.00	-12.02	QP		
4		281.2300	42.08	-12.40	29.68	46.00	-16.32	QP		
5		310.3300	37.15	-11.47	25.68	46.00	-20.32	QP		
6		392.7800	34.02	-9.68	24.34	46.00	-21.66	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#651

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#652

Date: 2016/05/27

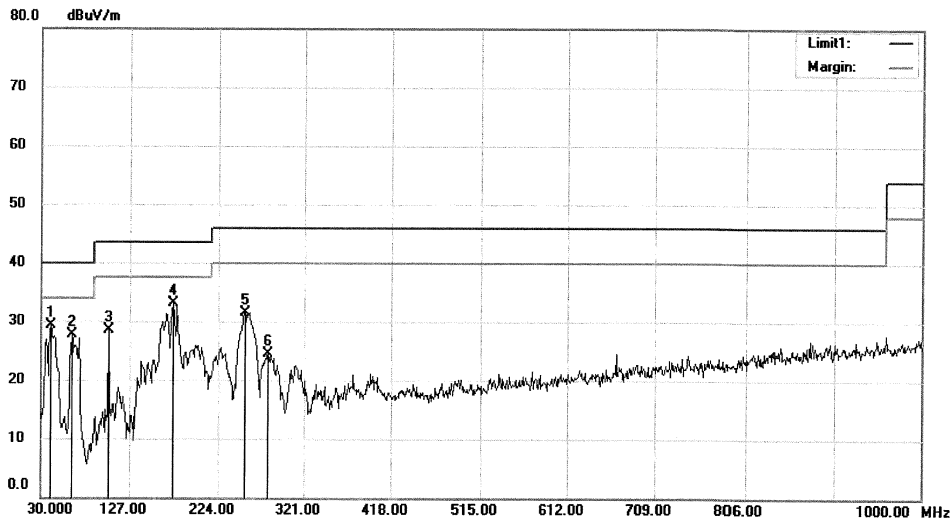

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		40.6700	44.55	-15.34	29.21	40.00	-10.79	QP		
2		63.9500	43.95	-16.30	27.65	40.00	-12.35	QP		
3		103.7200	43.73	-15.30	28.43	43.50	-15.07	QP		
4	*	174.5300	50.27	-17.20	33.07	43.50	-10.43	QP		
5		254.0700	44.85	-13.28	31.57	46.00	-14.43	QP		
6		280.2600	36.88	-12.44	24.44	46.00	-21.56	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#652

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#649

Date: 2016/05/27

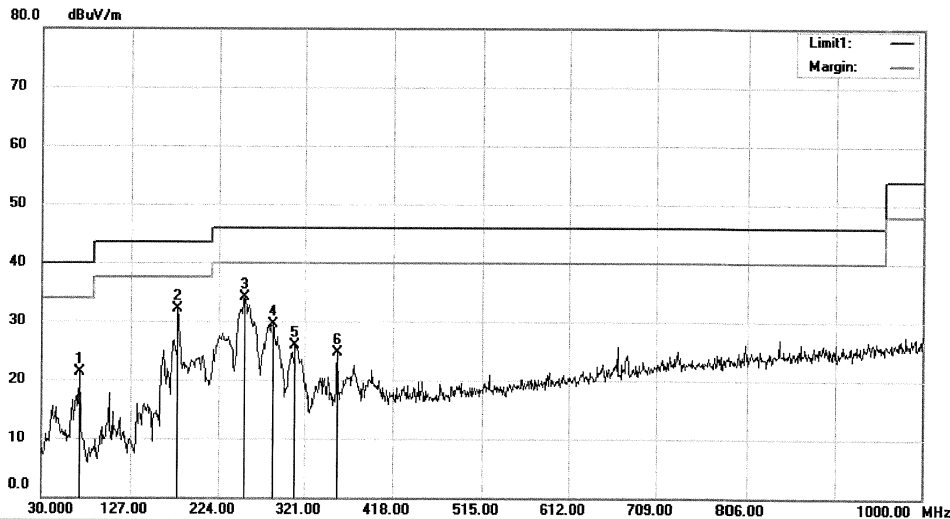

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.7100	39.63	-18.25	21.38	40.00	-18.62	QP		
2	*	178.4100	49.25	-17.17	32.08	43.50	-11.42	QP		
3		253.1000	47.51	-13.33	34.18	46.00	-11.82	QP		
4		285.1100	41.82	-12.23	29.59	46.00	-16.41	QP		
5		310.3300	37.44	-11.47	25.97	46.00	-20.03	QP		
6		357.8600	35.29	-10.59	24.70	46.00	-21.30	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#649

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#650

Date: 2016/05/27

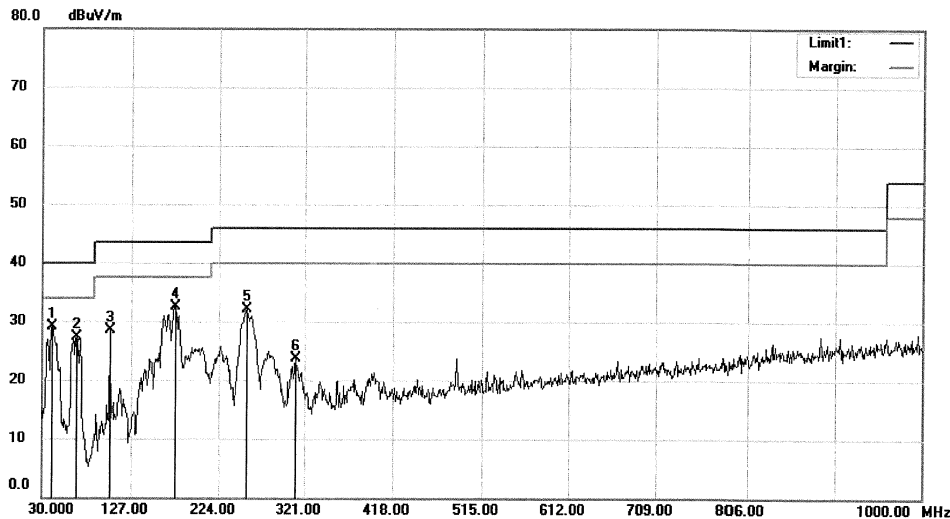

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	40.6700	44.51	-15.34	29.17	40.00	-10.83	QP		
2		67.8300	44.62	-17.29	27.33	40.00	-12.67	QP		
3		103.7200	43.85	-15.30	28.55	43.50	-14.95	QP		
4		175.5000	49.70	-17.18	32.52	43.50	-10.98	QP		
5		255.0400	45.38	-13.23	32.15	46.00	-13.85	QP		
6		311.3000	35.09	-11.46	23.63	46.00	-22.37	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#650

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#647

Date: 2016/05/27

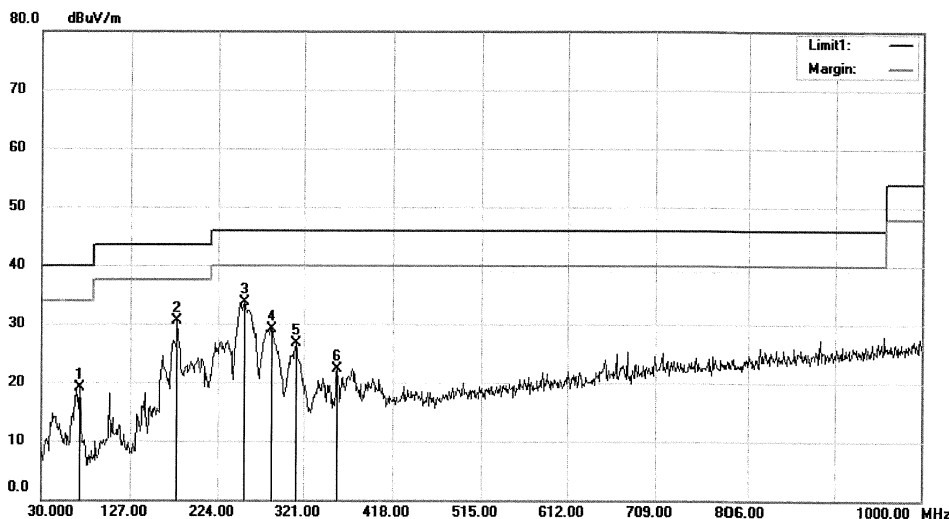

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.7100	37.37	-18.25	19.12	40.00	-20.88	QP		
2		178.4100	47.73	-17.17	30.56	43.50	-12.94	QP		
3	*	254.0700	47.02	-13.28	33.74	46.00	-12.26	QP		
4		285.1100	41.37	-12.23	29.14	46.00	-16.86	QP		
5		312.2700	38.10	-11.45	26.65	46.00	-19.35	QP		
6		357.8600	32.94	-10.59	22.35	46.00	-23.65	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#647

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#648

Date: 2016/05/27

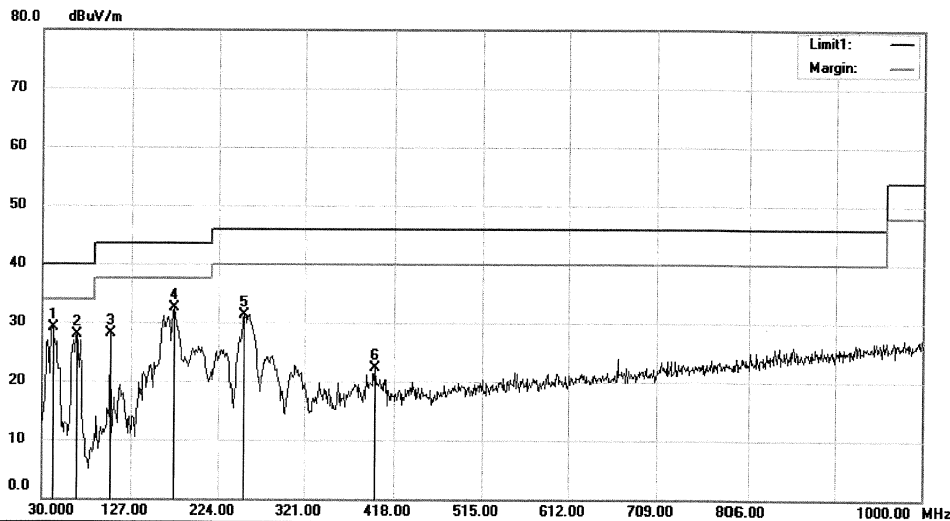

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	41.6400	44.17	-15.13	29.04	40.00	-10.96	QP		
2		67.8300	45.29	-17.29	28.00	40.00	-12.00	QP		
3		103.7200	43.46	-15.30	28.16	43.50	-15.34	QP		
4		173.5600	49.68	-17.20	32.48	43.50	-11.02	QP		
5		253.1000	44.65	-13.33	31.32	46.00	-14.68	QP		
6		397.6300	31.71	-9.49	22.22	46.00	-23.78	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#648

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#666

Date: 16/06/03/

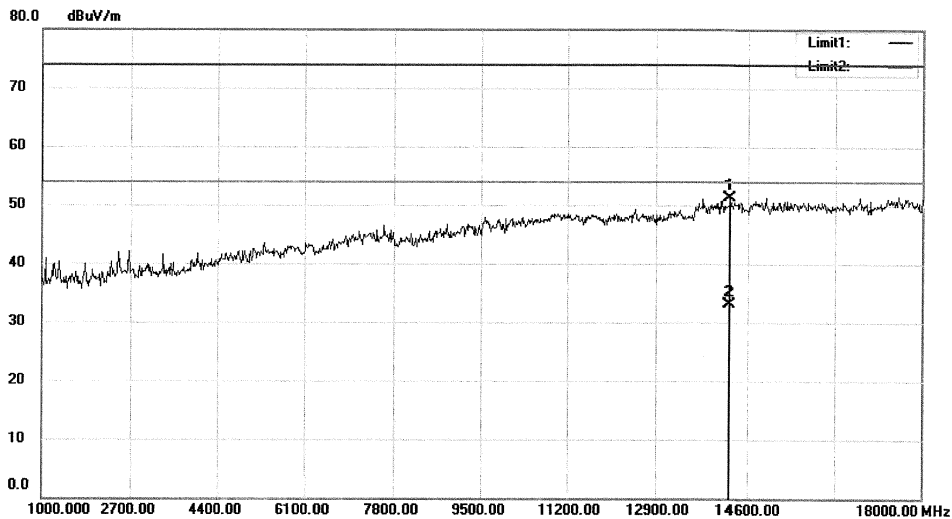

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14277.00	59.55	-8.31	51.24	74.00	-22.76	peak		
2	*	14277.00	41.51	-8.31	33.20	54.00	-20.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#666

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#665

Date: 16/06/03/

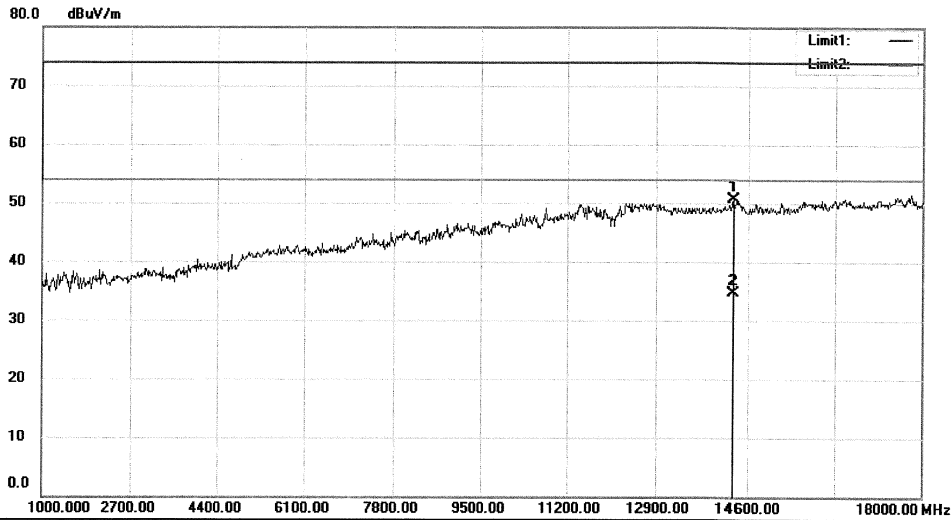

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14328.00	59.09	-8.40	50.69	74.00	-23.31	peak		
2	*	14328.00	43.10	-8.40	34.70	54.00	-19.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#665

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#667

Date: 16/06/03/

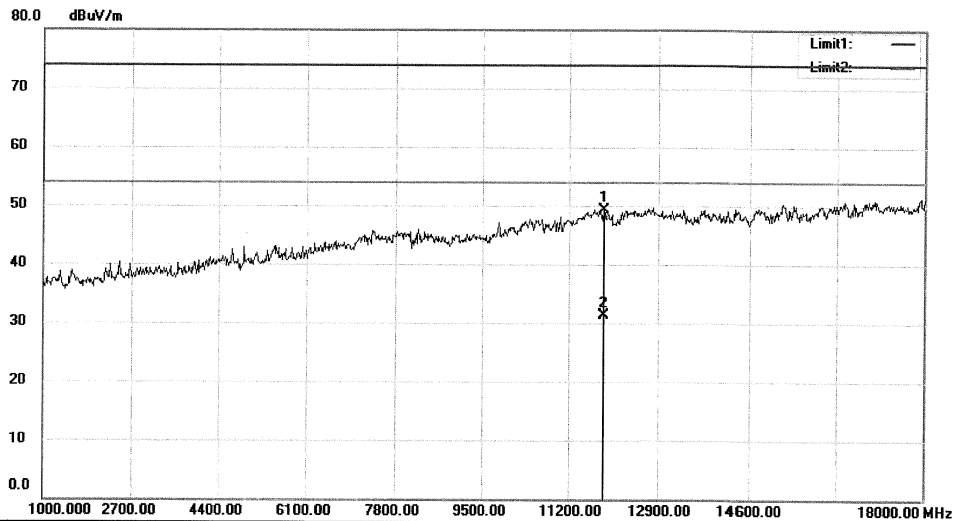

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		11863.00	62.77	-13.51	49.26	74.00	-24.74	peak		
2	*	11863.00	44.91	-13.51	31.40	54.00	-22.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#667

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#668

Date: 16/06/03/

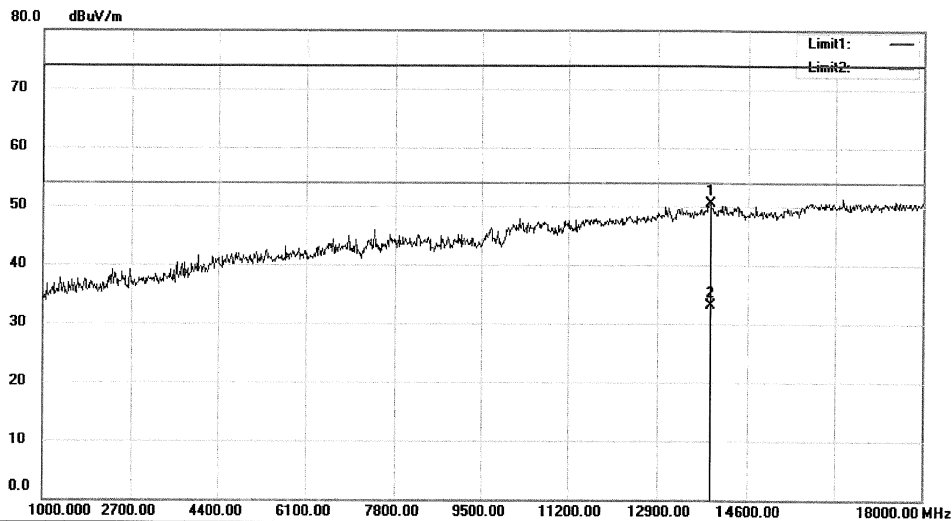

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		13920.00	58.62	-8.21	50.41	74.00	-23.59	peak		
2	*	13920.00	41.41	-8.21	33.20	54.00	-20.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File :TUVData :#668

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#669

Date: 16/06/03/

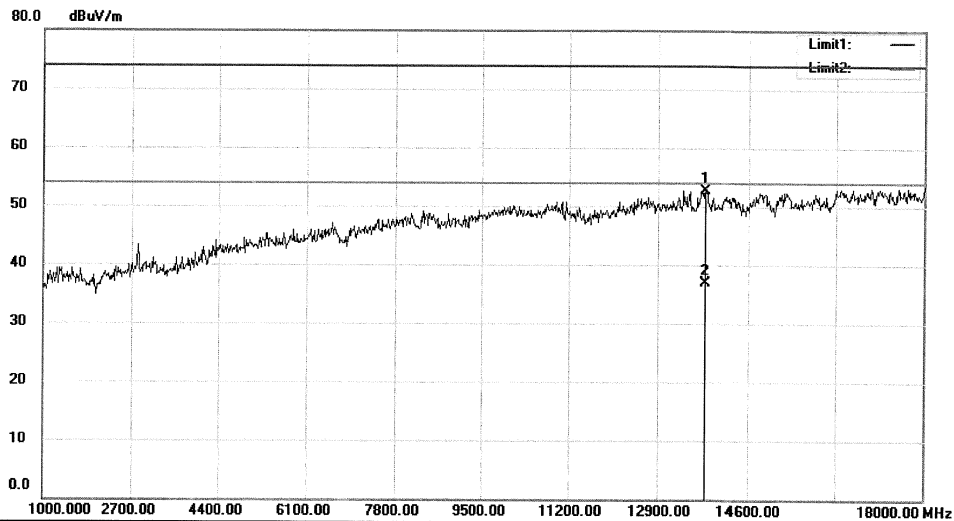

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		13818.00	61.44	-8.71	52.73	74.00	-21.27	peak		
2	*	13818.00	45.61	-8.71	36.90	54.00	-17.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#669

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#670 Date: 16/06/03/

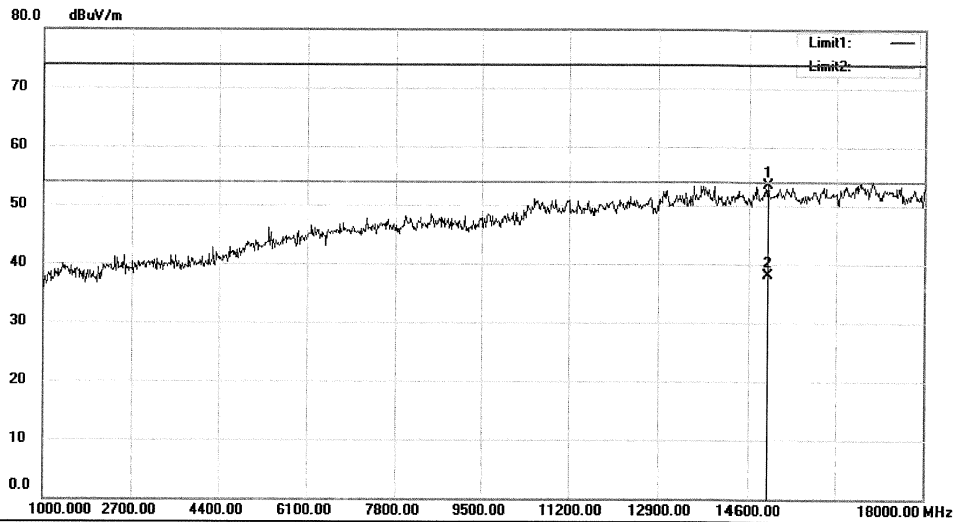

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11B 2462
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14974.00	62.99	-9.55	53.44	74.00	-20.56	peak		
2	*	14974.00	47.75	-9.55	38.20	54.00	-15.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#670

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#671

Date: 16/06/03/

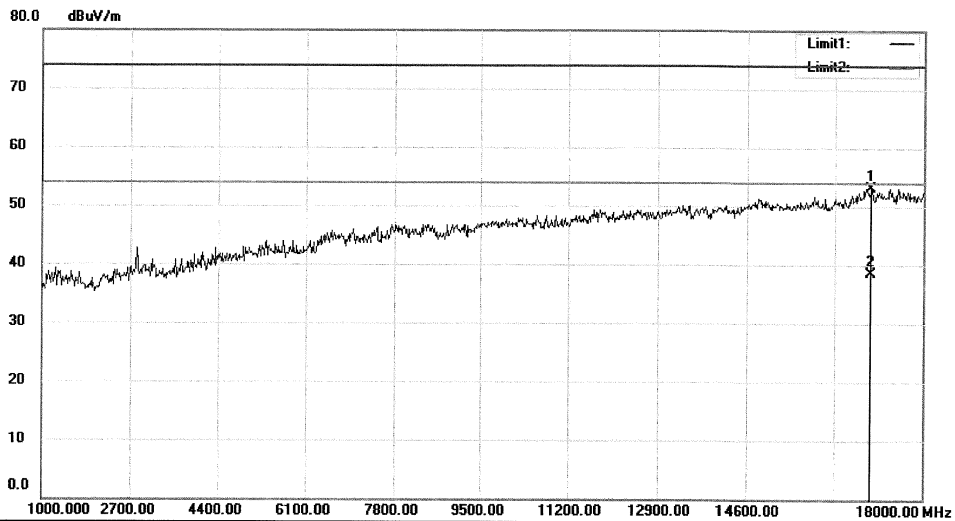

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2412

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		16997.00	62.47	-9.27	53.20	74.00	-20.80	peak			
2	*	16997.00	47.77	-9.27	38.50	54.00	-15.50	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#671

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#672

Date: 16/06/03/

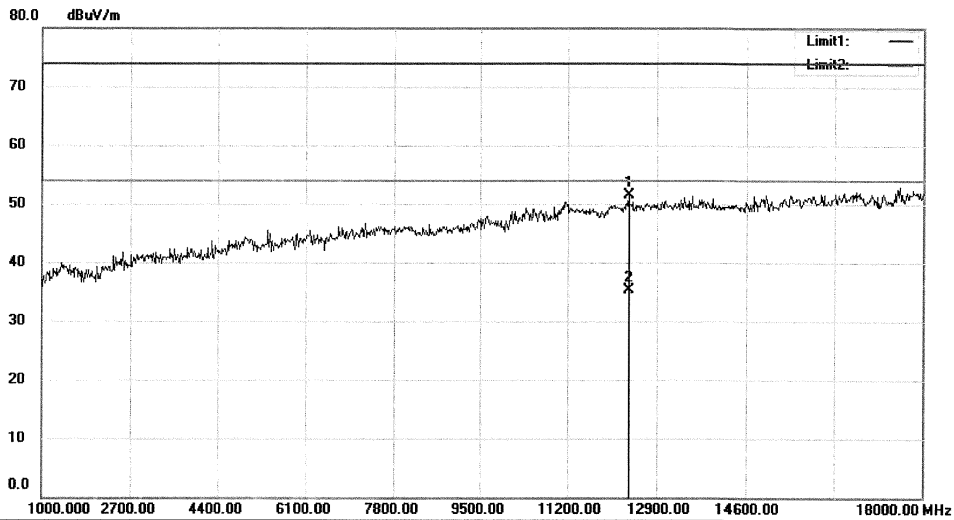

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		12356.00	64.72	-13.24	51.48	74.00	-22.52	peak		
2	*	12356.00	48.64	-13.24	35.40	54.00	-18.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#672

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#673

Date: 16/06/03/

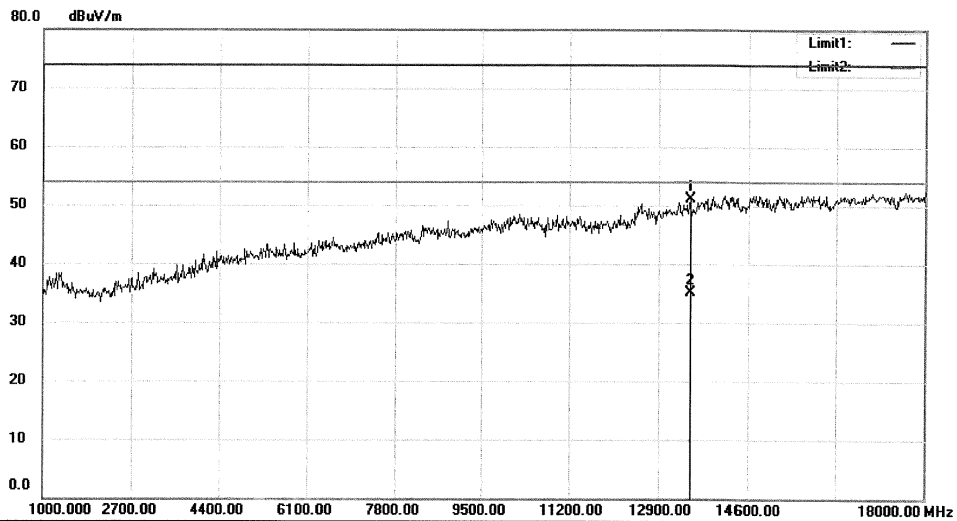

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2437

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		13512.00	61.26	-10.21	51.05	74.00	-22.95			peak	
2	*	13512.00	45.41	-10.21	35.20	54.00	-18.80			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#673

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#674

Date: 16/06/03/

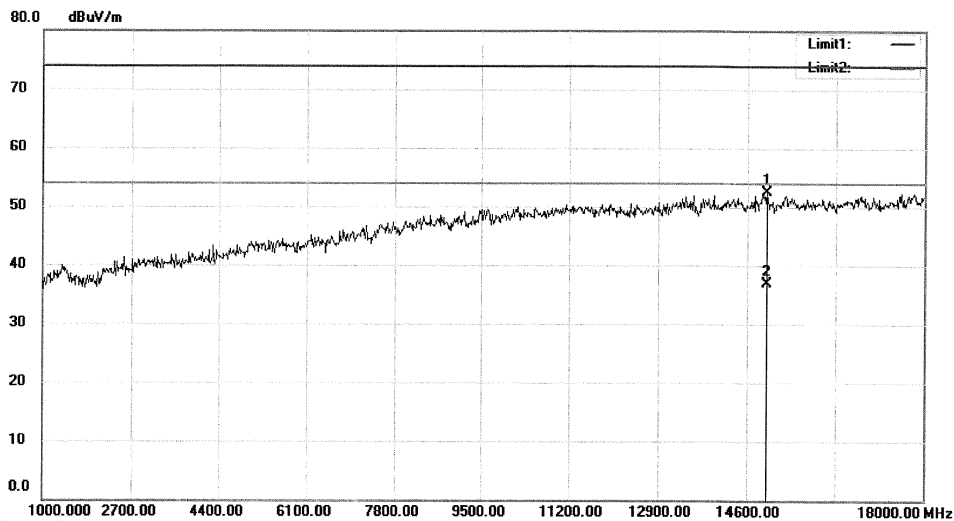

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2437

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14974.00	61.99	-9.55	52.44	74.00	-21.56	peak		
2	*	14974.00	46.45	-9.55	36.90	54.00	-17.10	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#674

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

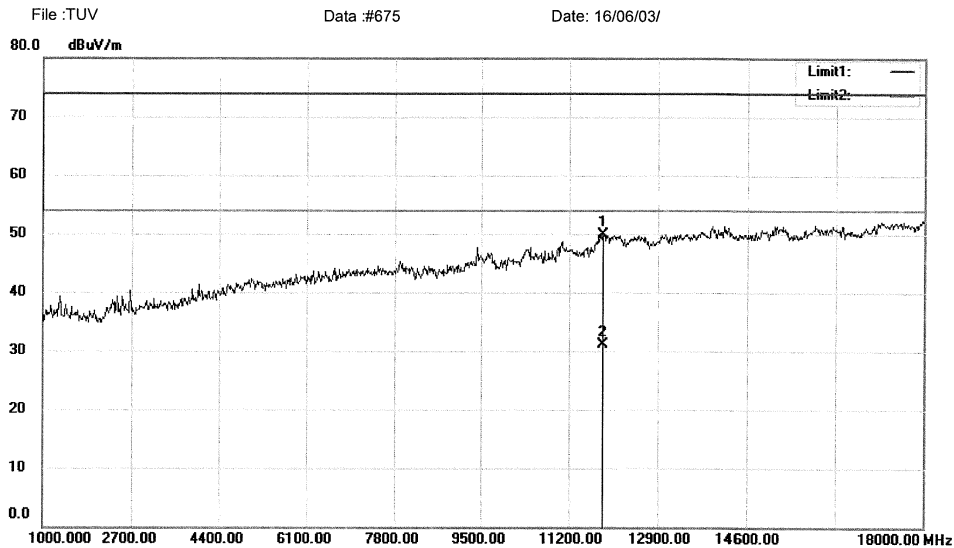
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11G 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		11846.00	63.49	-13.51	49.98	74.00	-24.02			peak	
2	*	11846.00	44.71	-13.51	31.20	54.00	-22.80			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#675

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#676

Date: 16/06/03/

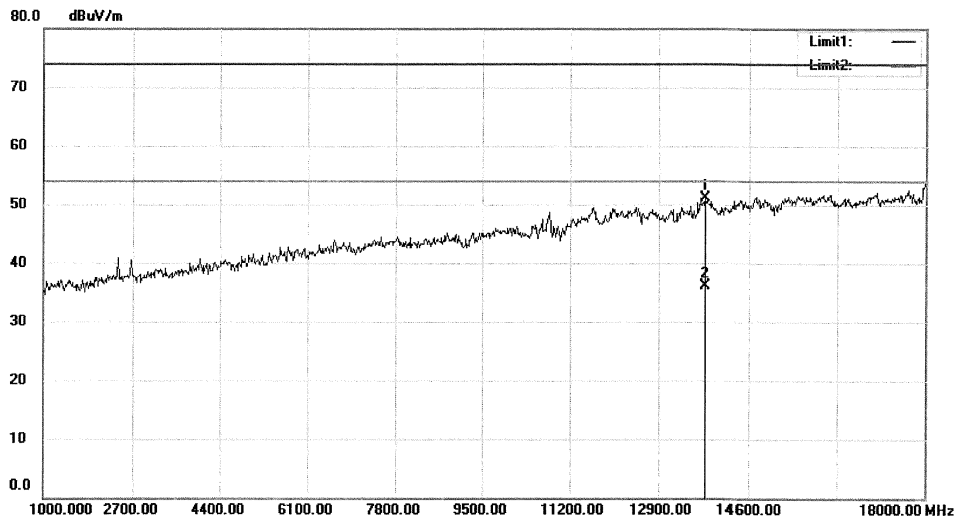

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		13818.00	59.86	-8.71	51.15	74.00	-22.85	peak		
2	*	13818.00	44.81	-8.71	36.10	54.00	-17.90	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#676

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

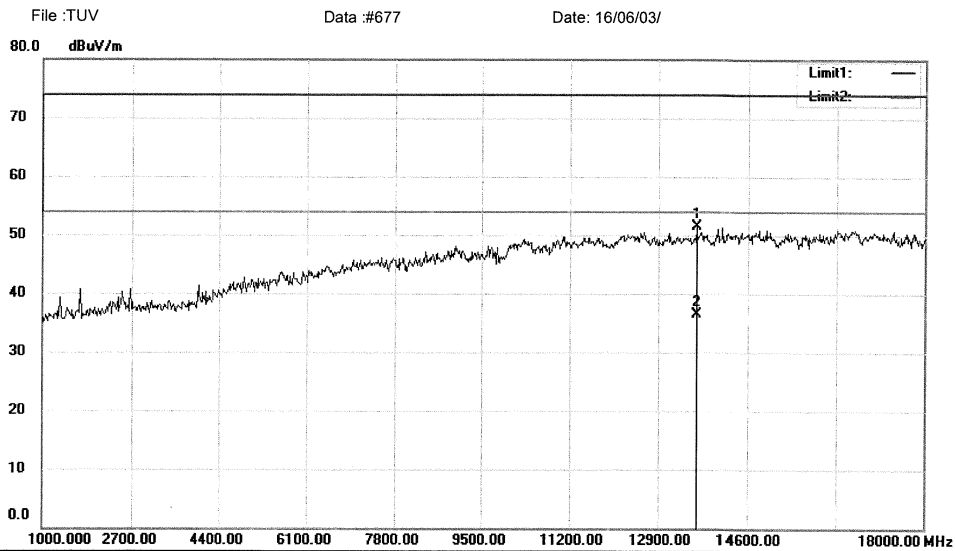
Radiated Emission Measurement


Site 3m Chamber #3
 Limit: (RE)FCC PART 15 C
 EUT: MID
 M/N: NS-P16AT08
 Mode:11N 2412
 Note:

Polarization: **Horizontal** Temperature: 24 C
 Power: AC 120V/60Hz Humidity: 53 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		13648.00	60.96	-9.55	51.41	74.00	-22.59	peak		
2	*	13648.00	46.05	-9.55	36.50	54.00	-17.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#677

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#678

Date: 16/06/03/

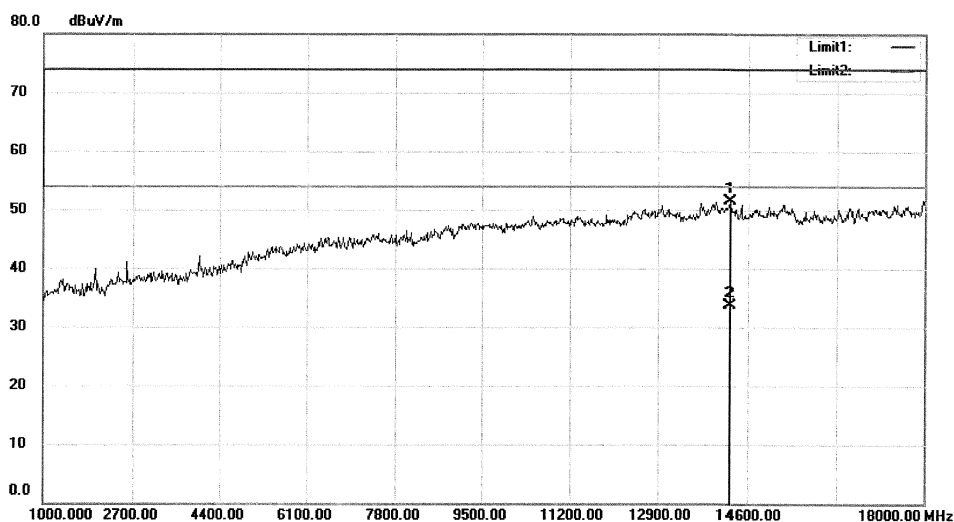

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		14260.00	59.74	-8.28	51.46	74.00	-22.54	peak		
2	*	14260.00	41.98	-8.28	33.70	54.00	-20.30	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#678

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

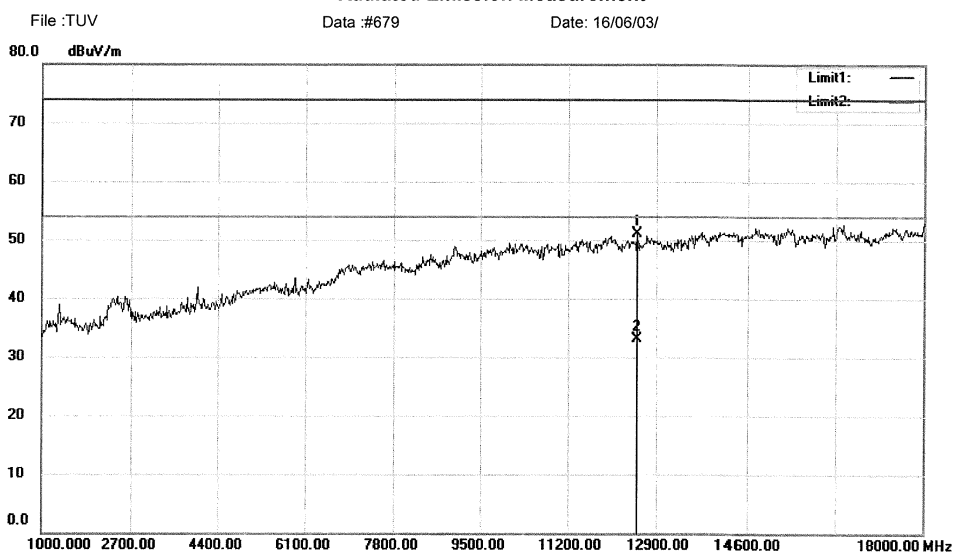
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11N 2437
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		12526.00	64.14	-13.10	51.04	74.00	-22.96	peak		
2	*	12526.00	46.30	-13.10	33.20	54.00	-20.80	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#679

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

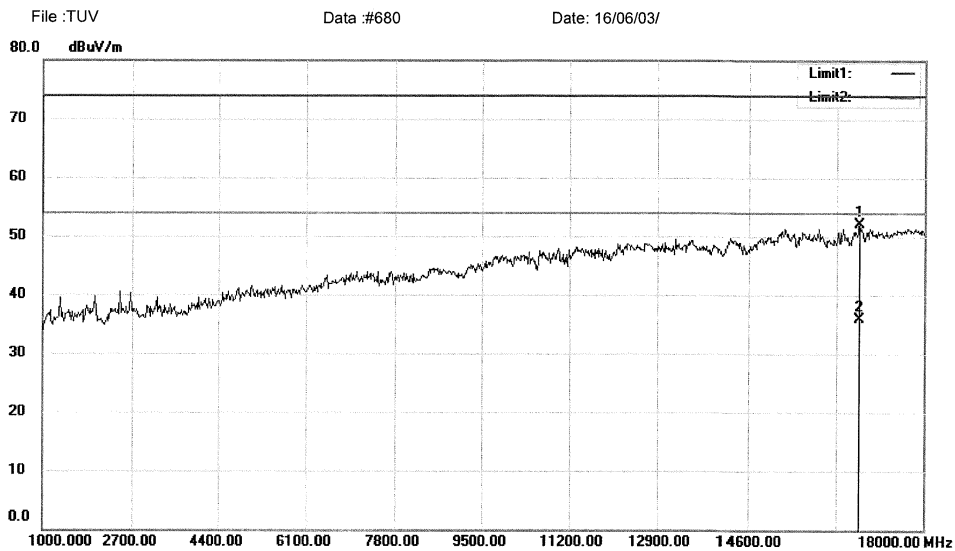
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11N 2437
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		16742.00	62.26	-10.16	52.10	74.00	-21.90	peak			
2	*	16742.00	46.16	-10.16	36.00	54.00	-18.00	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#680

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#682

Date: 16/06/03/

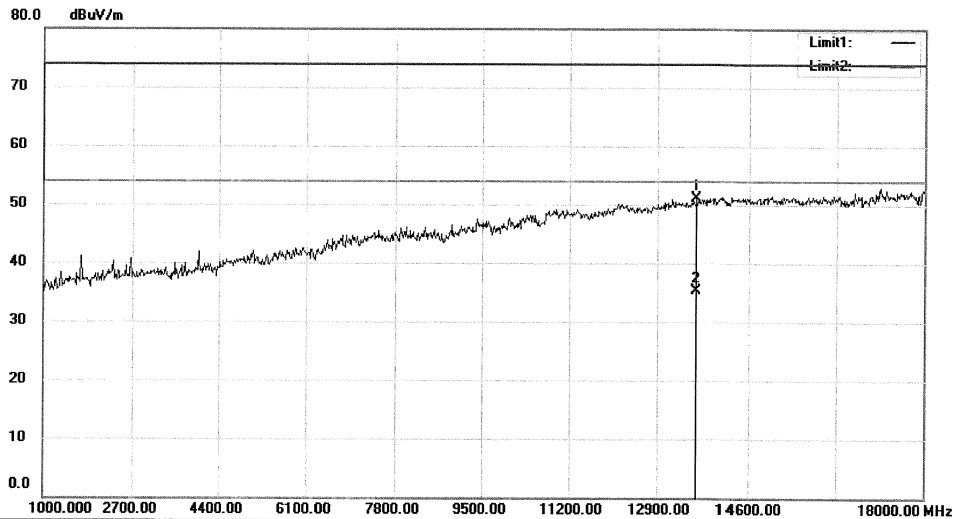

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		13665.00	60.50	-9.46	51.04	74.00	-22.96			peak	
2	*	13665.00	44.76	-9.46	35.30	54.00	-18.70			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#682

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#681

Date: 16/06/03/

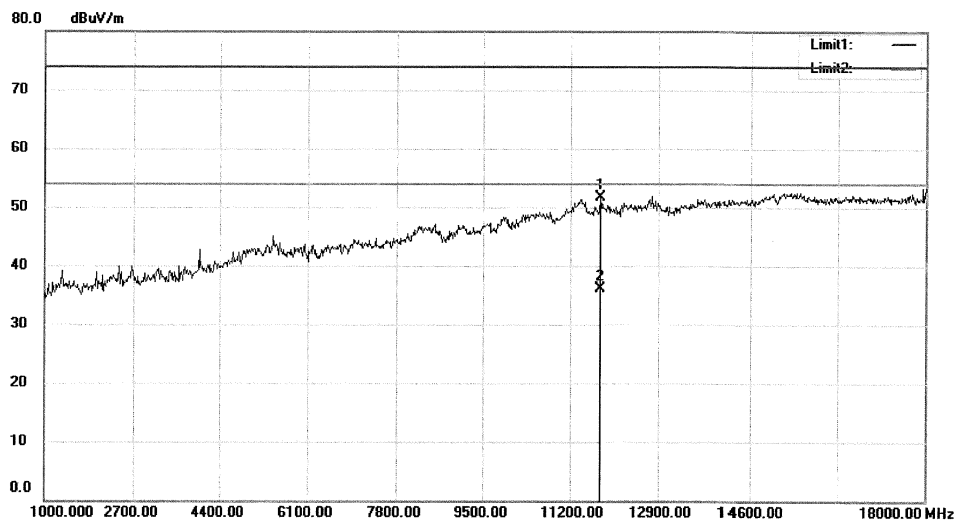

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11N 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		11778.00	65.18	-13.50	51.68	74.00	-22.32			peak	
2	*	11778.00	49.60	-13.50	36.10	54.00	-17.90			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#681

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#735 Date: 16/06/03/

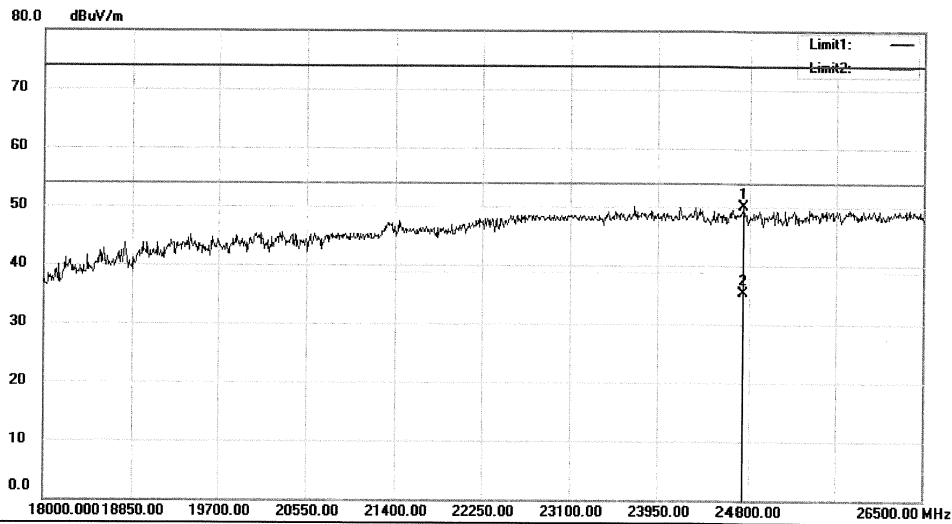

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11B 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		24740.50	87.13	-37.04	50.09	74.00	-23.91	peak		
2	*	24740.50	72.44	-37.04	35.40	54.00	-18.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#735

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#736 Date: 16/06/03/

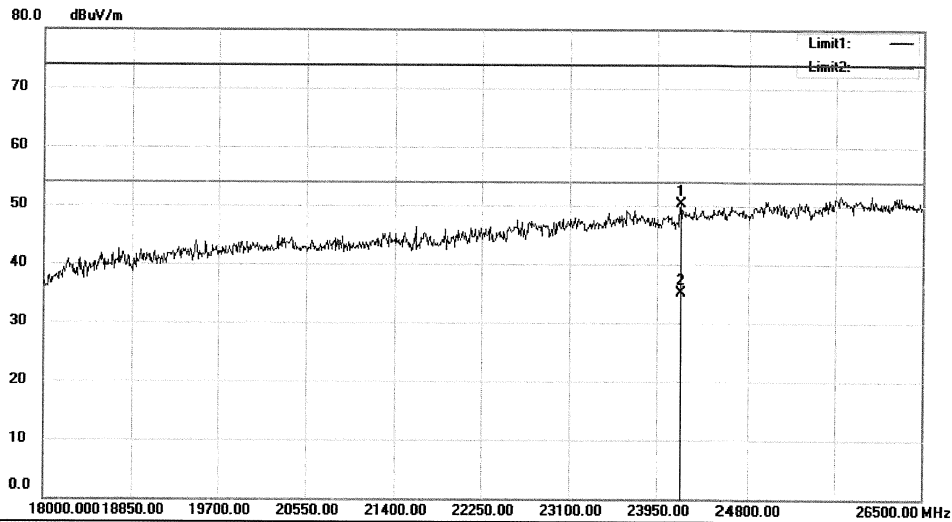

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11B 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		24179.50	87.46	-37.11	50.35	74.00	-23.65	peak		
2	*	24179.50	72.31	-37.11	35.20	54.00	-18.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#736

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#731

Date: 16/06/03/

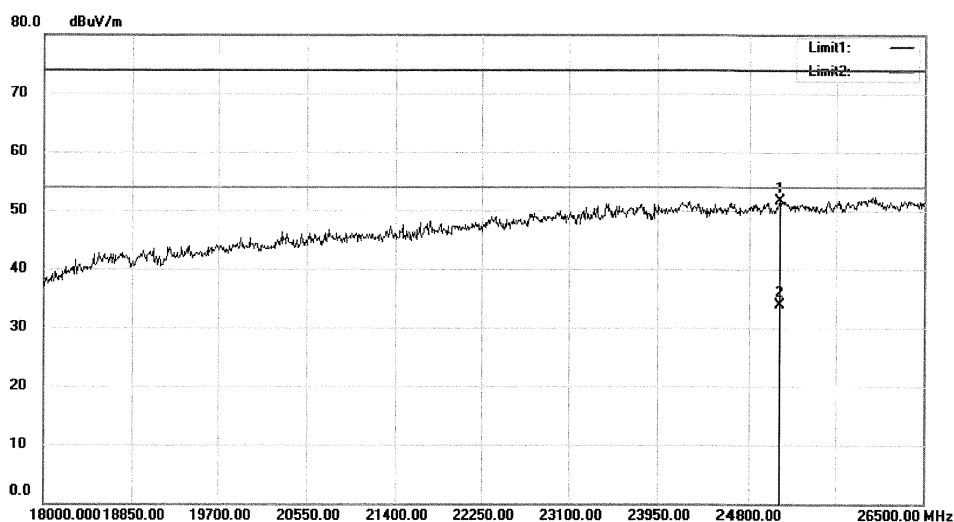

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2437

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25097.50	88.67	-36.89	51.78	74.00	-22.22	peak		
2	*	25097.50	70.79	-36.89	33.90	54.00	-20.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#731

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#732

Date: 16/06/03/

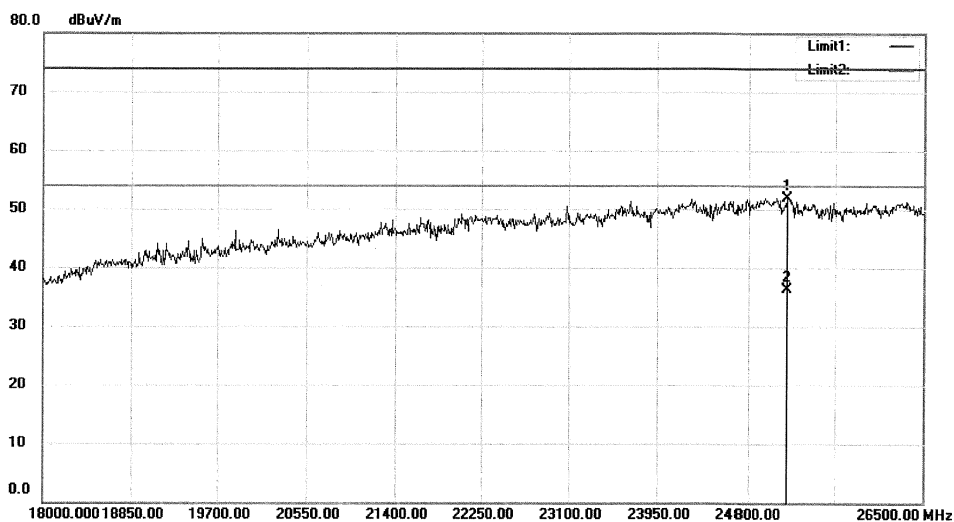

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2437

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25182.50	88.73	-36.79	51.94	74.00	-22.06	peak		
2	*	25182.50	73.19	-36.79	36.40	54.00	-17.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#732

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#733

Date: 16/06/03/

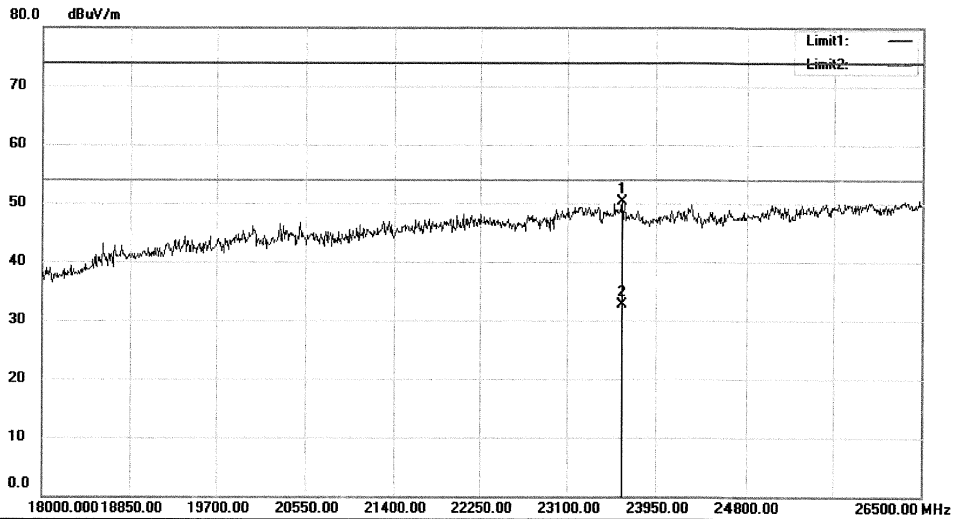

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		23627.00	87.86	-37.52	50.34	74.00	-23.66			peak	
2	*	23627.00	70.22	-37.52	32.70	54.00	-21.30			AVG	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#733

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#734

Date: 16/06/03/

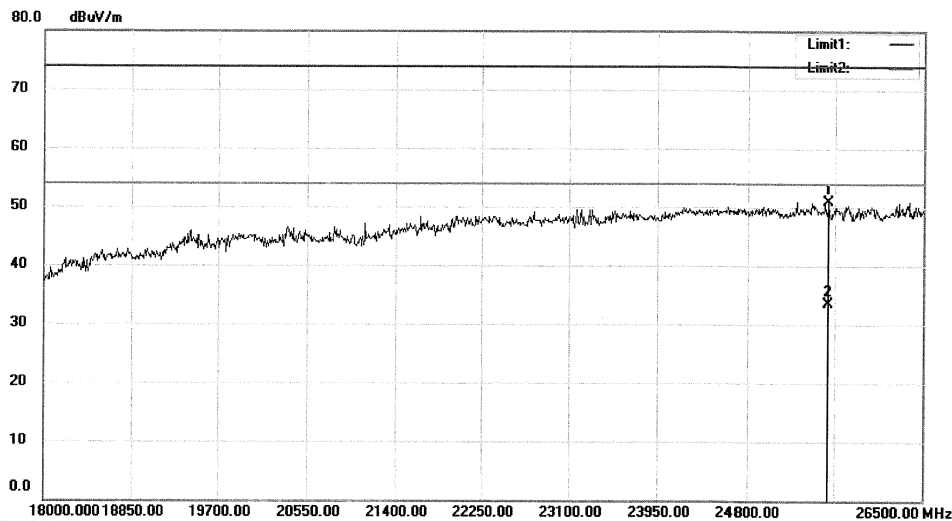

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11B 2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25590.50	87.29	-36.29	51.00	74.00	-23.00	peak		
2	*	25590.50	69.89	-36.29	33.60	54.00	-20.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#734

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#741 Date: 16/06/03/

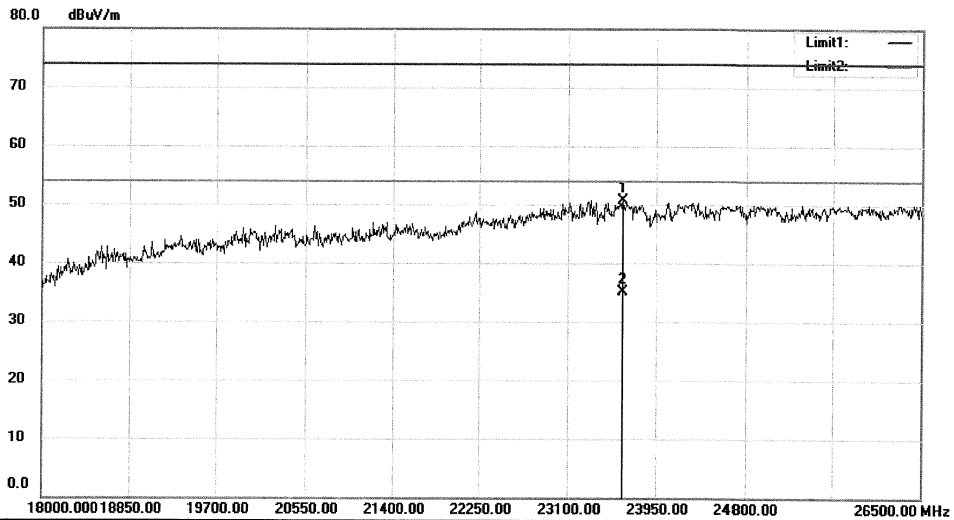

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		23627.00	88.19	-37.52	50.67	74.00	-23.33	peak		
2	*	23627.00	72.72	-37.52	35.20	54.00	-18.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#741

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File :TUV Data :#742 Date: 16/06/03/

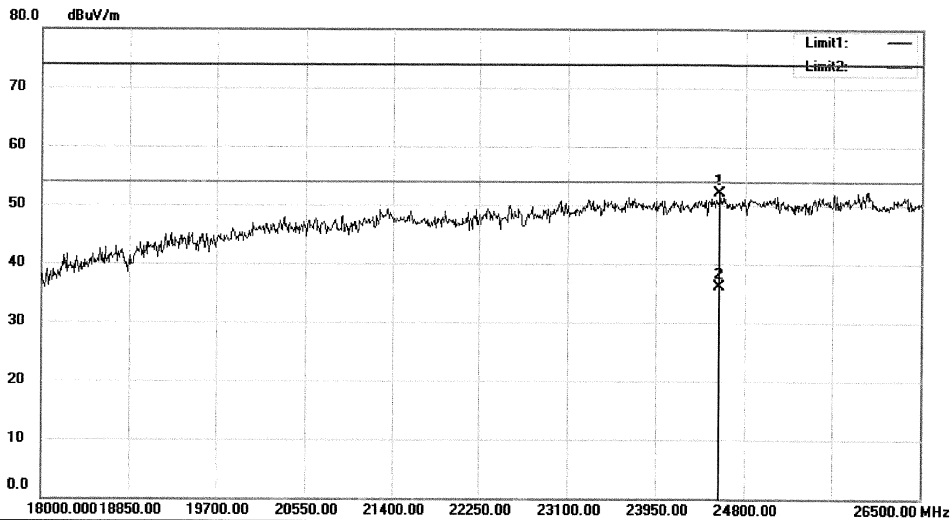
 Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11G 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24570.50	89.07	-37.06	52.01	74.00	-21.99	peak		
2	*	24570.50	73.16	-37.06	36.10	54.00	-17.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#742

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#737 Date: 16/06/03/

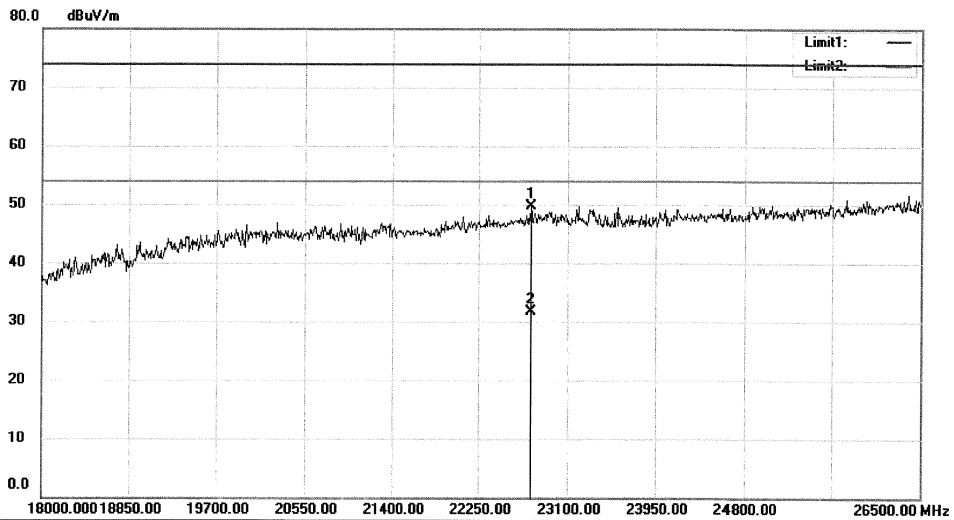

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11G 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		22751.50	88.42	-38.68	49.74	74.00	-24.26	peak		
2	*	22751.50	70.38	-38.68	31.70	54.00	-22.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUV\Data :#737

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#738 Date: 16/06/03/

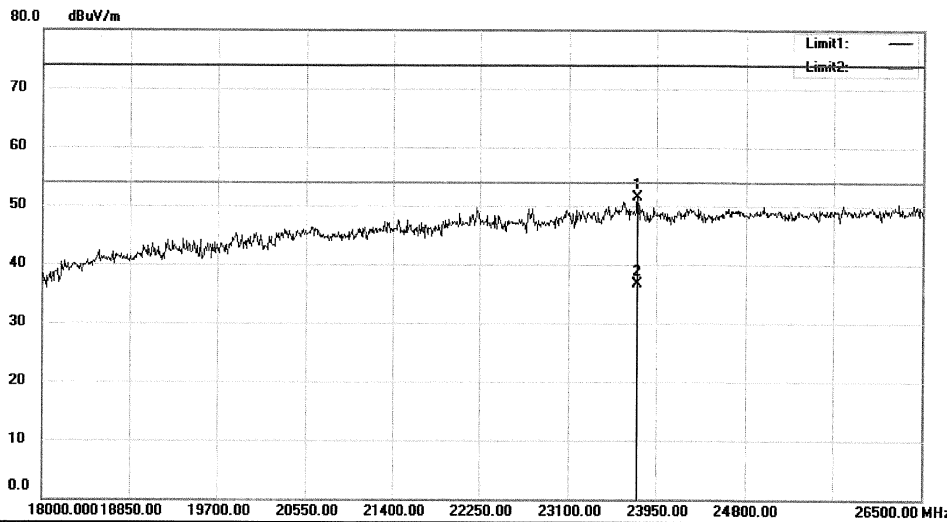

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: MID
 M/N: NS-P16AT08
 Mode:11G 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		23763.00	88.79	-37.38	51.41	74.00	-22.59	peak		
2	*	23763.00	74.18	-37.38	36.80	54.00	-17.20	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#738

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#739

Date: 16/06/03/

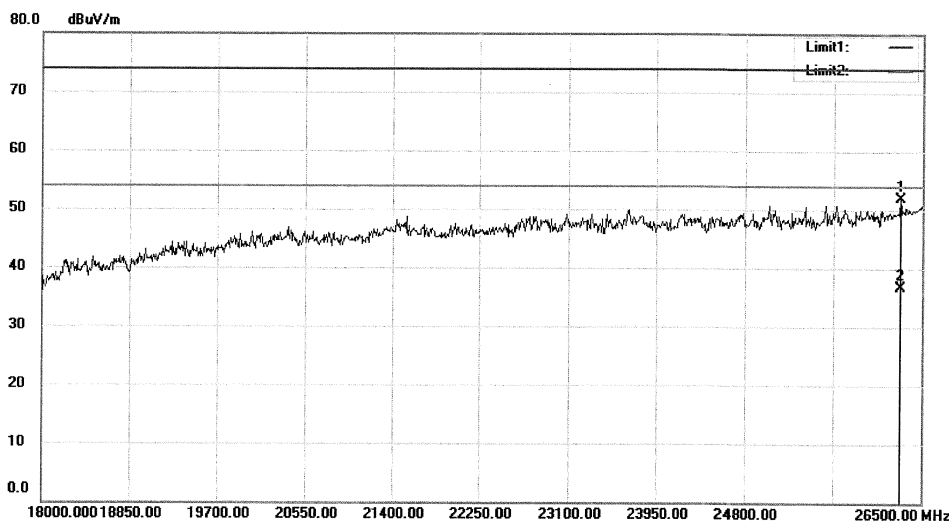

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:11G 2462

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		26287.50	87.26	-35.44	51.82	74.00	-22.18	peak		
2	*	26287.50	72.14	-35.44	36.70	54.00	-17.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#739

Page: 1