

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1		11590.570	28.34	21.90	50.24	68.30	-18.06	peak
2	*	11590.570	19.63	21.90	41.53	54.00	-12.47	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector
		MHz	dBm	dB	dBm	dBm	dB	
1		11590.800	28.69	21.90	50.59	68.30	-17.71	peak
2	*	11590.800	20.06	21.90	41.96	54.00	-12.04	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBm	dB	dBm	dBm	dB	Detector
1		11550.800	29.37	21.86	51.23	68.30	-17.07	peak
2	*	11550.800	20.68	21.86	42.54	54.00	-11.46	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBm	dB	dBm	dBm	dB	Detector
1		11550.870	29.34	21.86	51.20	68.30	-17.10	peak
2	*	11550.870	21.01	21.86	42.87	54.00	-11.13	AVG


Emission Level= Read Level+ Correct Factor

Attachment C-- Restricted Bands Requirement and Band-edge Test Data

(1) Radiation Test

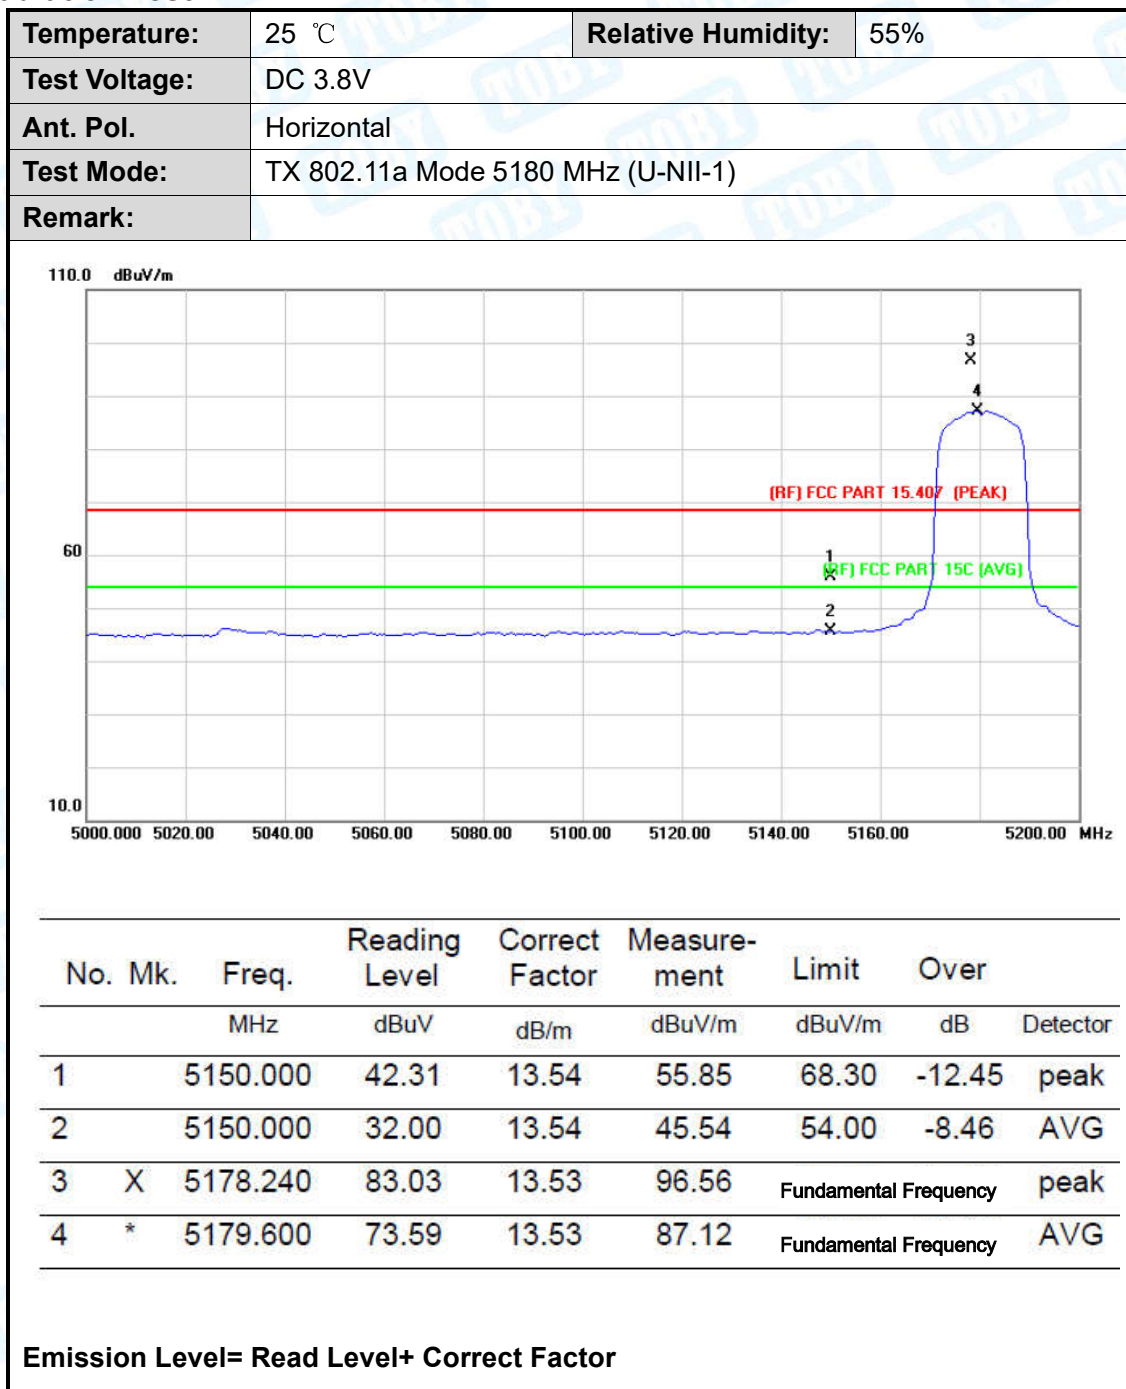


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:			

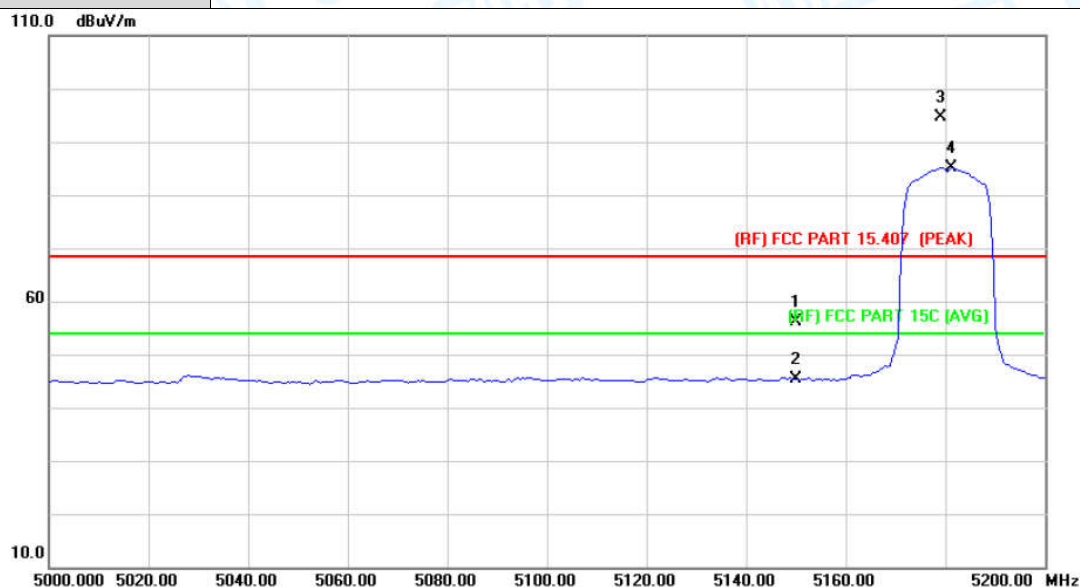

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	42.51	13.54	56.05	68.30	-12.25 peak
2		5150.000	31.73	13.54	45.27	54.00	-8.73 AVG
3	X	5179.040	81.19	13.53	94.72	Fundamental Frequency	peak
4	*	5181.200	71.69	13.53	85.22	Fundamental Frequency	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:			

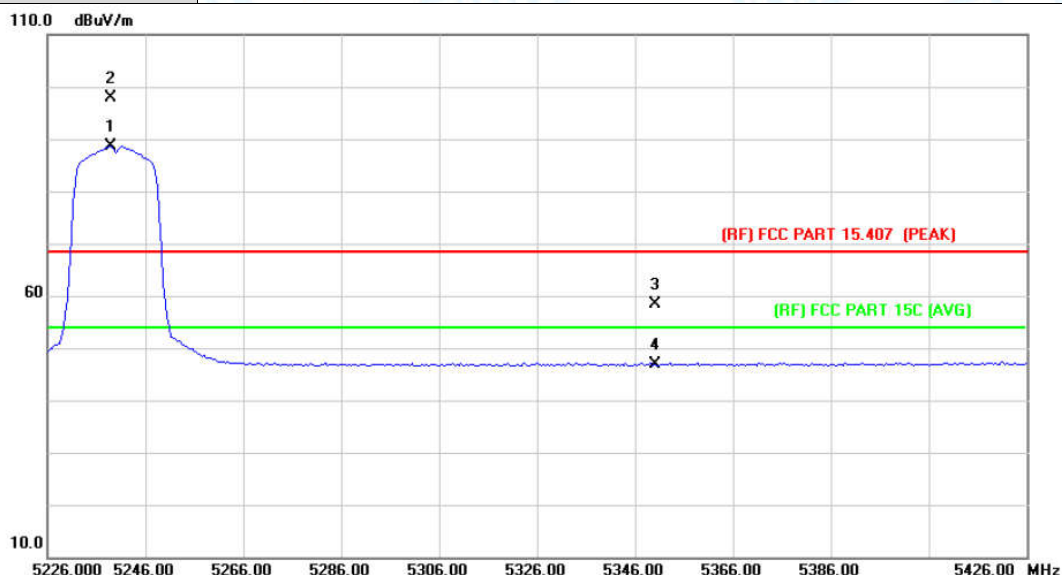

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5238.800	75.06	13.47	88.53	Fundamental Frequency		AVG
2	X	5238.970	84.39	13.47	97.86	Fundamental Frequency		peak
3		5350.000	45.04	13.40	58.44	68.30	-9.86	peak
4		5350.000	33.56	13.40	46.96	54.00	-7.04	AVG


Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:			

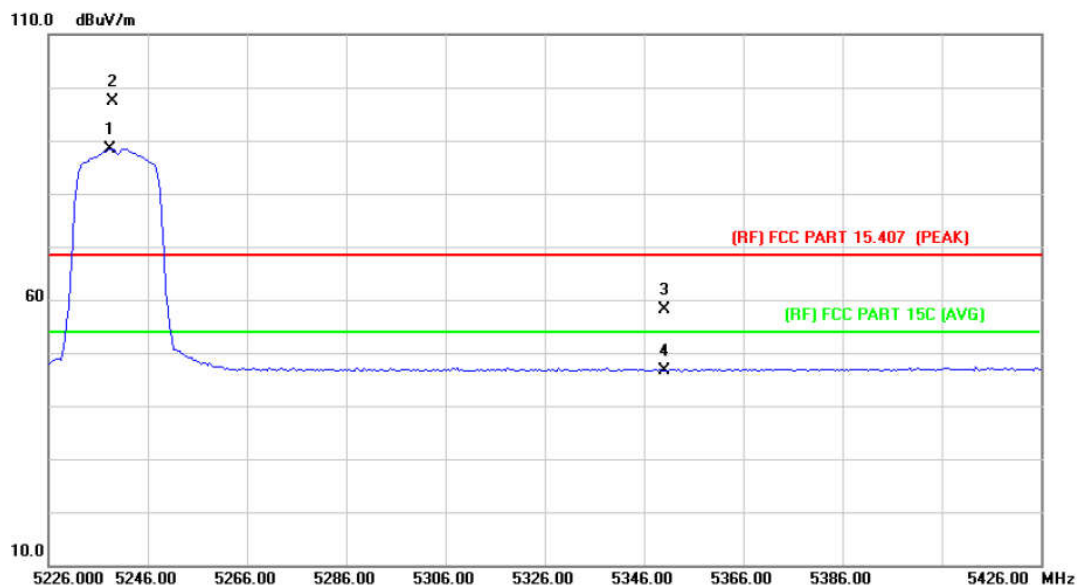


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5238.400	74.97	13.47	88.44	Fundamental Frequency		AVG
2	X	5238.970	83.82	13.47	97.29	Fundamental Frequency		peak
3		5350.000	44.73	13.40	58.13	68.30	-10.17	peak
4		5350.000	33.29	13.40	46.69	54.00	-7.31	AVG

Emission Level= Read Level+ Correct Factor

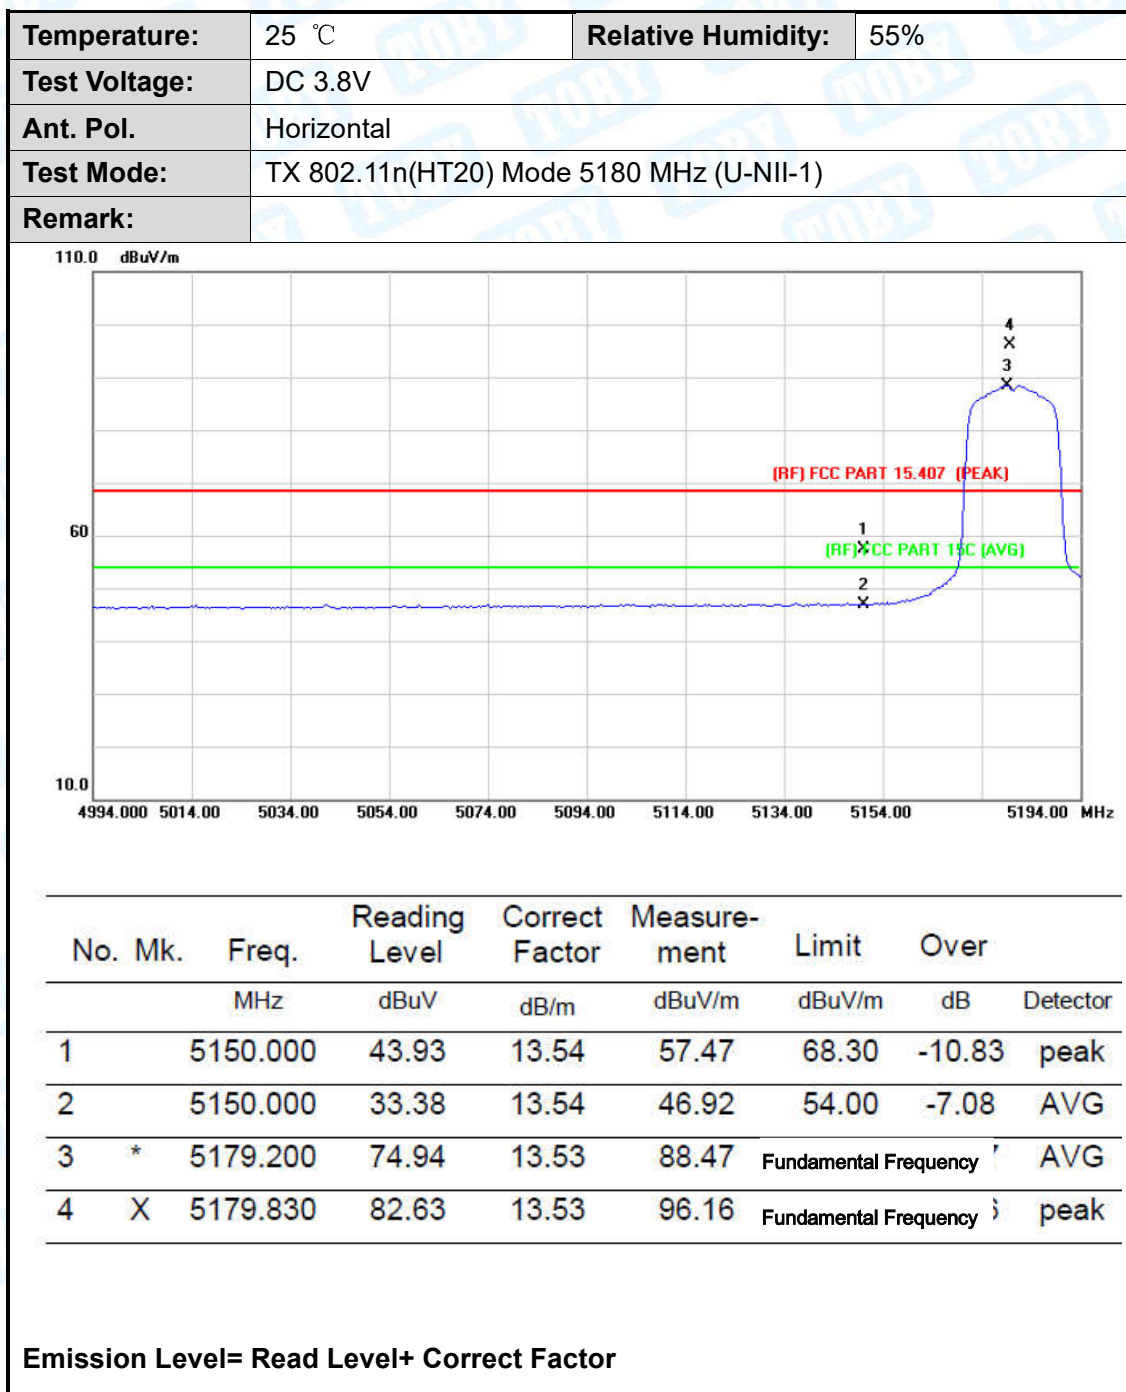


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)		
Remark:			

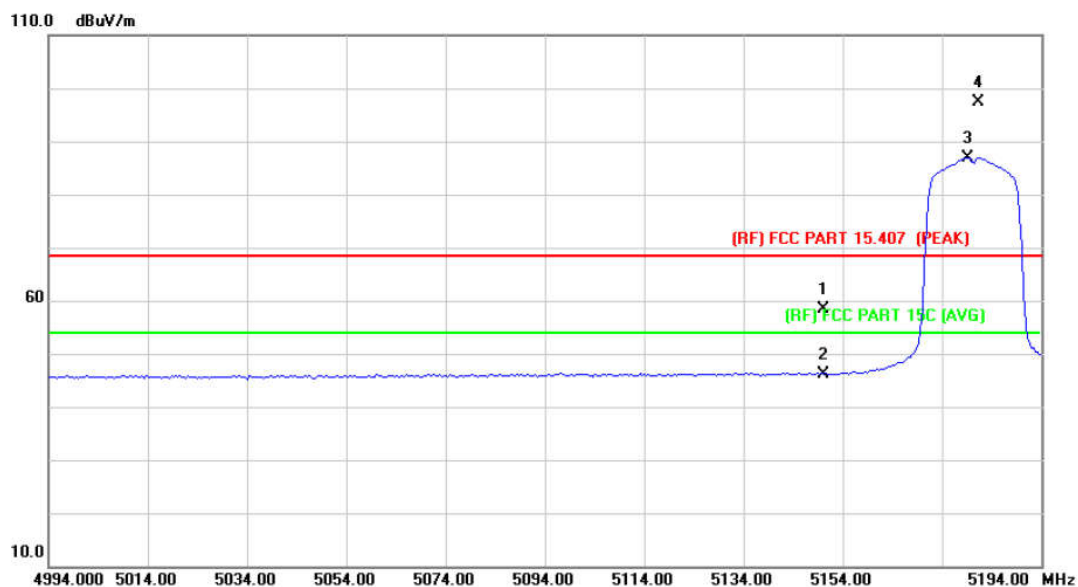

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	44.91	13.54	58.45	68.30	-9.85	peak
2		5150.000	32.56	13.54	46.10	54.00	-7.90	AVG
3	*	5179.200	73.40	13.53	86.93	Fundamental Frequency		AVG
4	X	5181.430	83.78	13.52	97.30	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
Remark:			

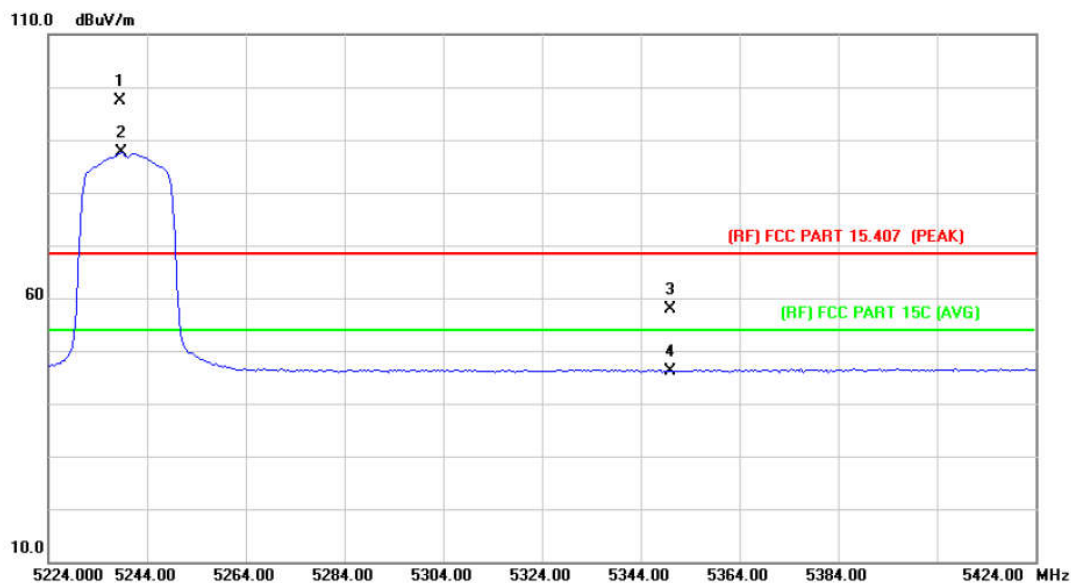

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5238.570	83.97	13.47	97.44	Fundamental Frequency		peak
2	*	5238.800	74.06	13.47	87.53	Fundamental Frequency		AVG
3		5350.000	44.49	13.40	57.89	68.30	-10.41	peak
4		5350.000	32.81	13.40	46.21	54.00	-7.79	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
Remark:			

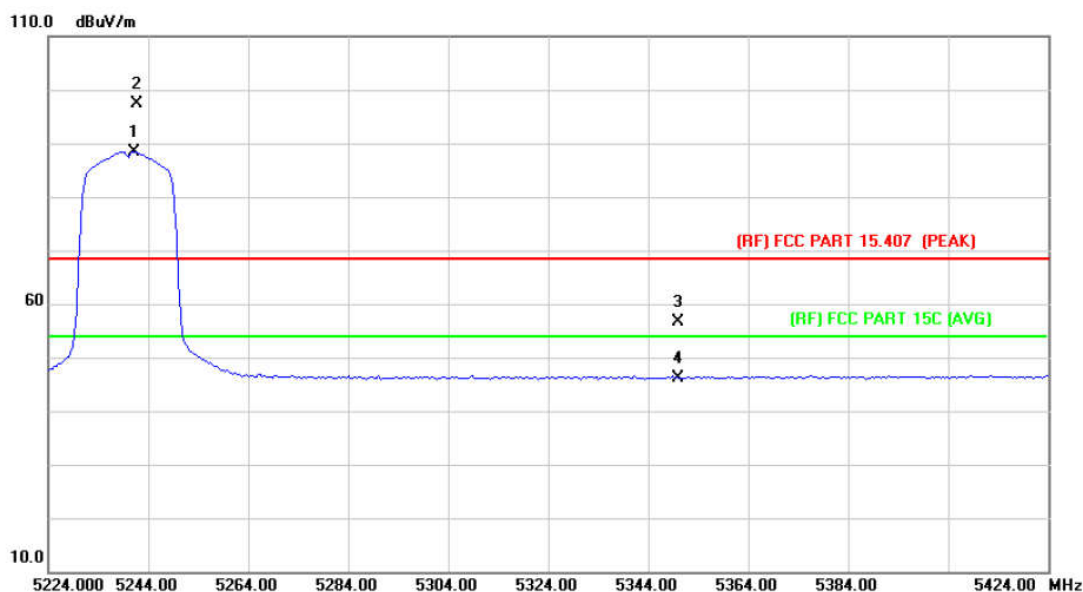

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5241.200	74.92	13.48	88.40	Fundamental Frequency		AVG
2	X	5241.760	83.92	13.48	97.40	Fundamental Frequency		peak
3		5350.000	43.32	13.40	56.72	68.30	-11.58	peak
4		5350.000	32.71	13.40	46.11	54.00	-7.89	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
Remark:			

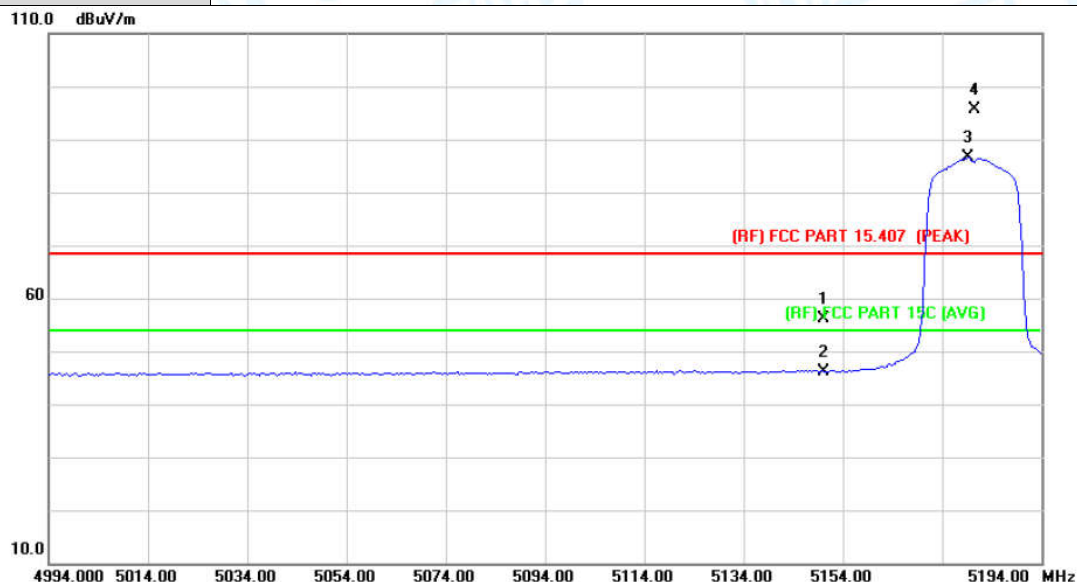

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.54	13.54	56.08	68.30	-12.22	peak
2		5150.000	32.65	13.54	46.19	54.00	-7.81	AVG
3	*	5179.200	73.00	13.53	86.53	Fundamental Frequency		AVG
4	X	5180.630	82.15	13.53	95.68	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
Remark:			

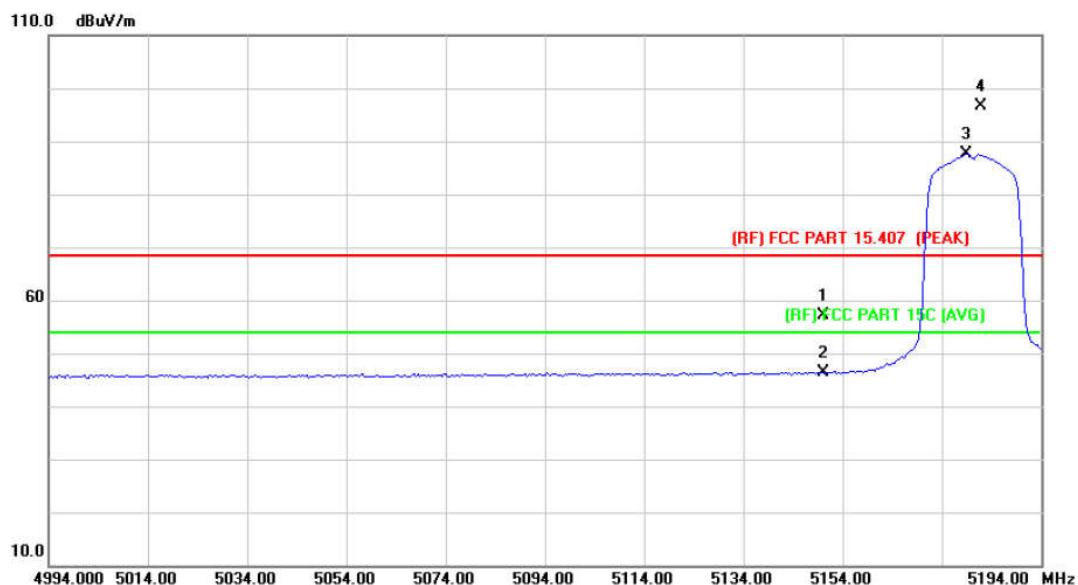

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	43.66	13.54	57.20	68.30	-11.10	peak
2		5150.000	32.76	13.54	46.30	54.00	-7.70	AVG
3	*	5178.800	74.07	13.53	87.60	Fundamental Frequency		AVG
4	X	5181.820	83.14	13.52	96.66	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
Remark:			

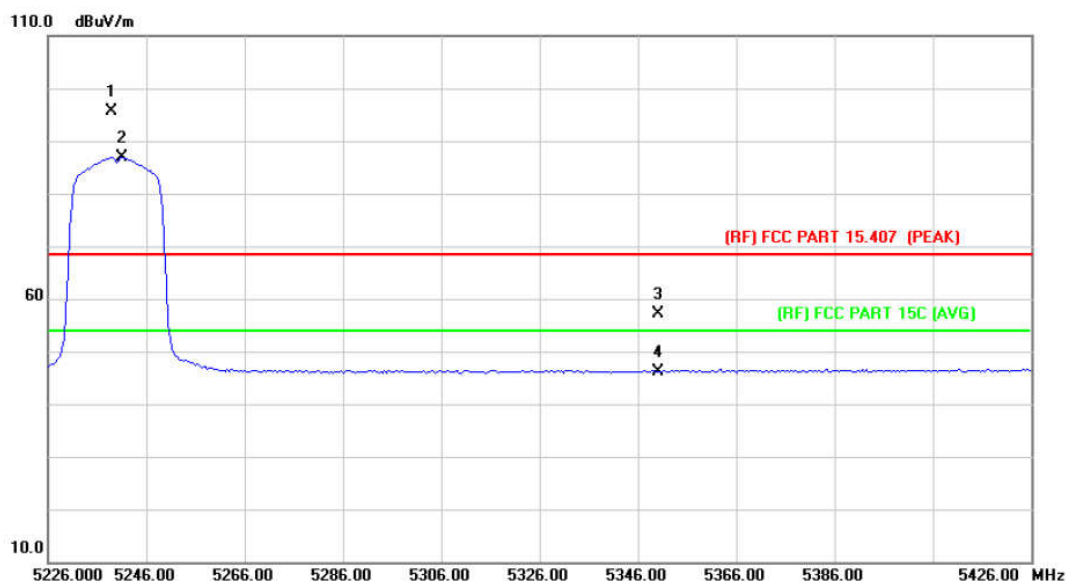

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5238.970	82.20	13.47	95.67	Fundamental Frequency	7	peak
2	*	5241.200	73.44	13.48	86.92	Fundamental Frequency	2	AVG
3		5350.000	43.79	13.40	57.19	68.30	-11.11	peak
4		5350.000	32.70	13.40	46.10	54.00	-7.90	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
Remark:			

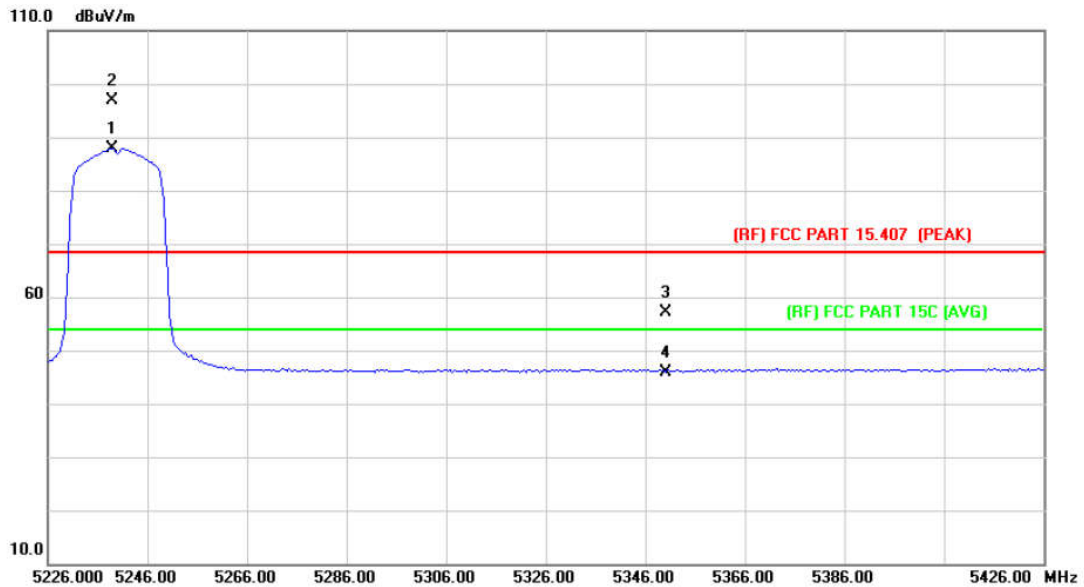

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5238.800	74.48	13.47	87.95	Fundamental Frequency		AVG
2	X	5238.970	83.45	13.47	96.92	Fundamental Frequency		peak
3		5350.000	43.81	13.40	57.21	68.30	-11.09	peak
4		5350.000	32.58	13.40	45.98	54.00	-8.02	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
Remark:			

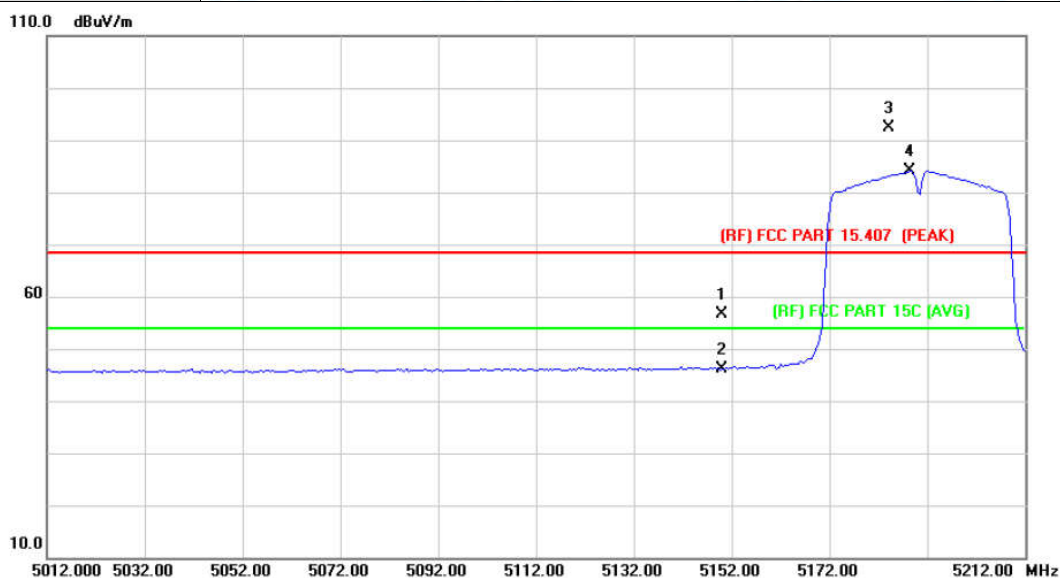

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	43.19	13.54	56.73	68.30	-11.57	peak
2		5150.000	32.68	13.54	46.22	54.00	-7.78	AVG
3	X	5184.260	78.89	13.52	92.41	Fundamental Frequency		peak
4	*	5188.400	70.60	13.51	84.11	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
Remark:			

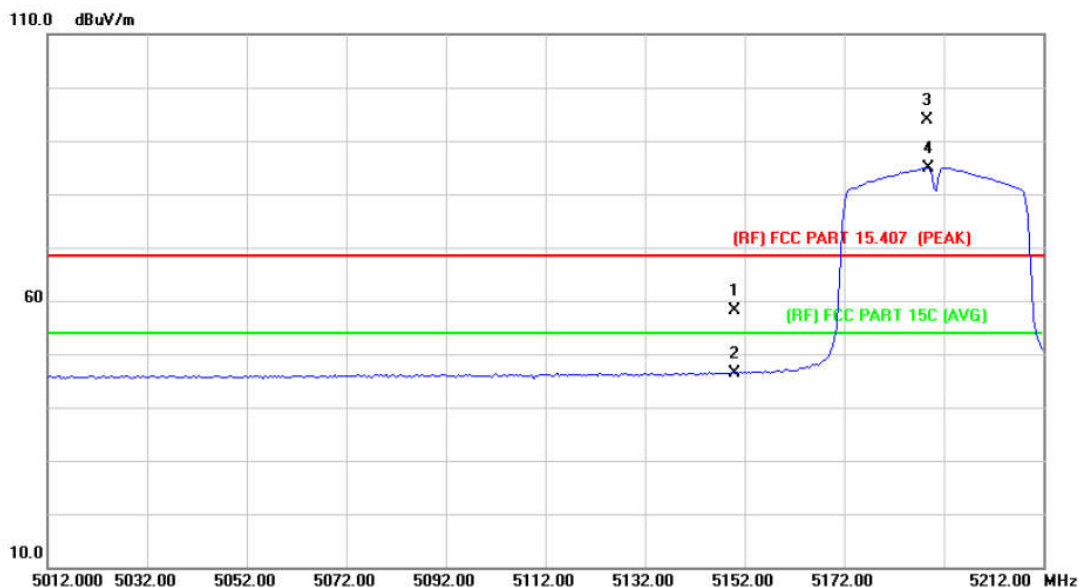

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	44.59	13.54	58.13	68.30	-10.17	peak
2		5150.000	32.87	13.54	46.41	54.00	-7.59	AVG
3	X	5188.650	80.44	13.51	93.95	Fundamental Frequency		peak
4	*	5188.800	71.45	13.51	84.96	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:			

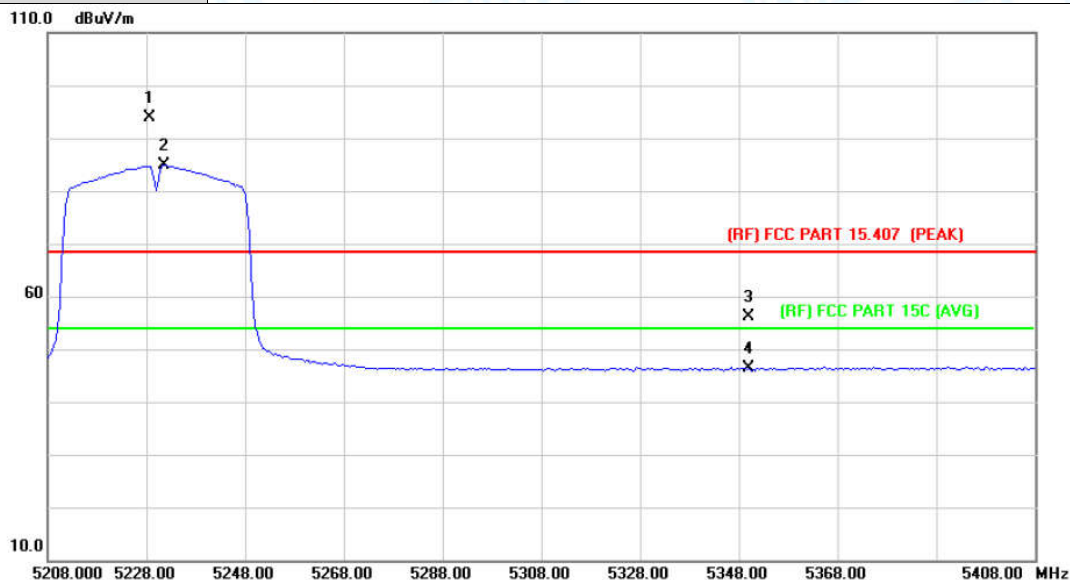

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5228.560	80.49	13.49	93.98	Fundamental Frequency		peak
2	*	5231.600	71.33	13.48	84.81	Fundamental Frequency		AVG
3		5350.000	42.78	13.40	56.18	68.30	-12.12	peak
4		5350.000	32.90	13.40	46.30	54.00	-7.70	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:			

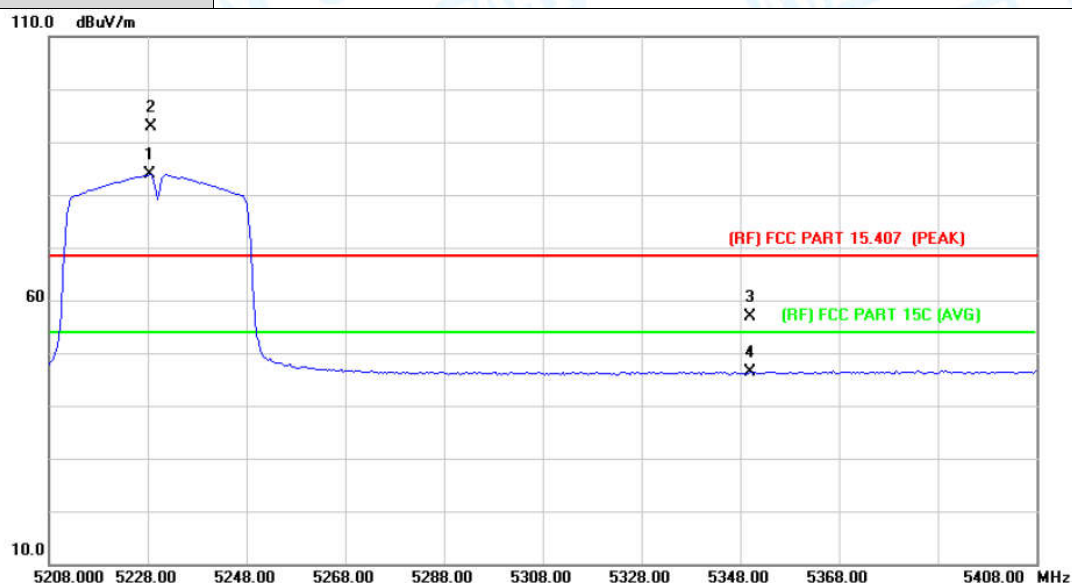

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5228.400	70.30	13.49	83.79	Fundamental Frequency		AVG
2	X	5228.560	79.31	13.49	92.80	Fundamental Frequency		peak
3		5350.000	43.44	13.40	56.84	68.30	-11.46	peak
4		5350.000	32.99	13.40	46.39	54.00	-7.61	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
Remark:			

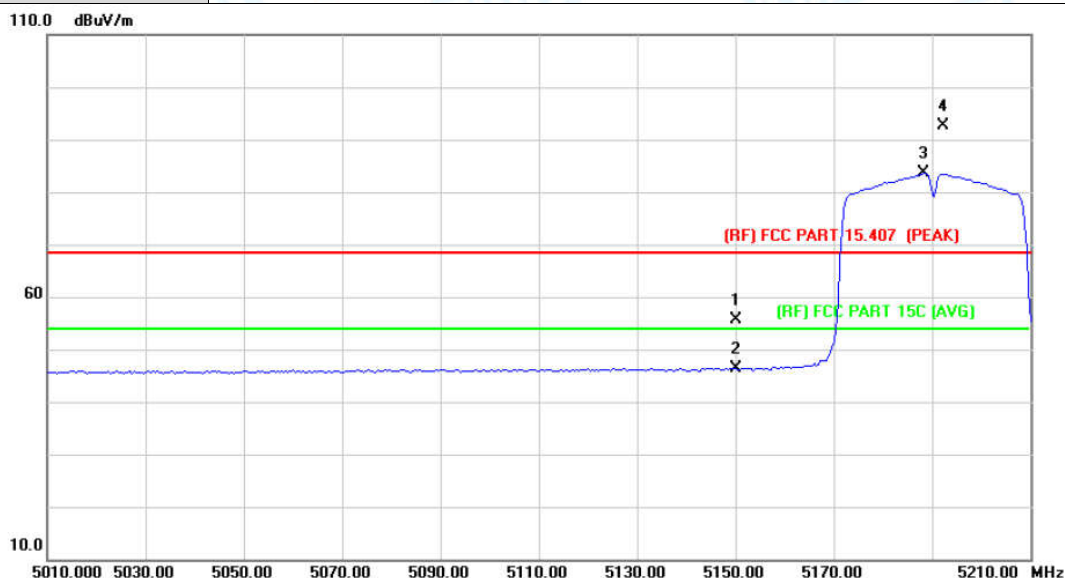

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	42.12	13.54	55.66	68.30	-12.64 peak
2		5150.000	32.83	13.54	46.37	54.00	-7.63 AVG
3	*	5188.400	70.09	13.51	83.60	Fundamental Frequency	AVG
4	X	5192.240	79.21	13.51	92.72	Fundamental Frequency	peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
Remark:			

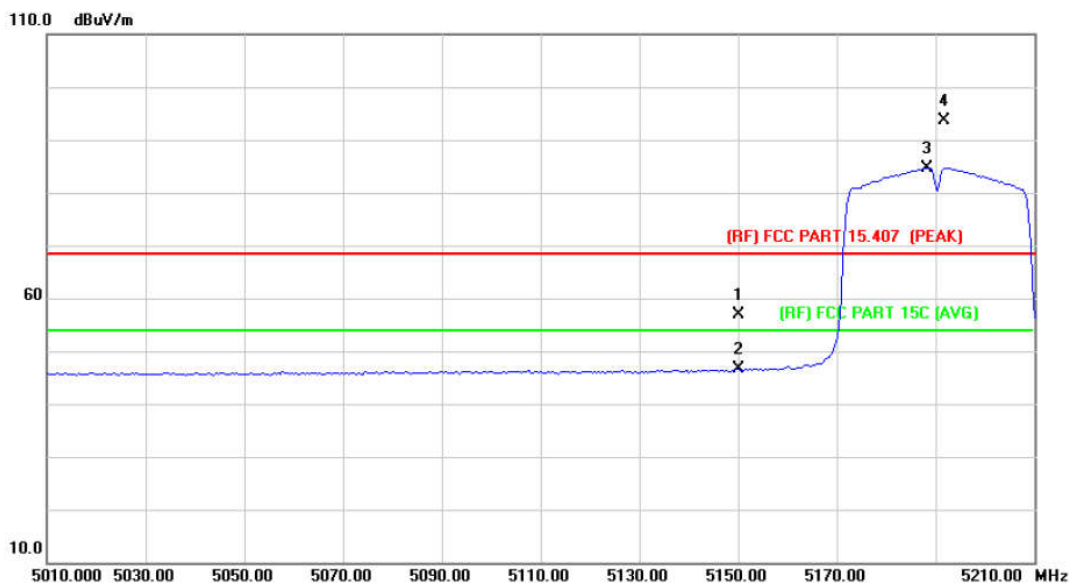

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	43.41	13.54	56.95	68.30	-11.35	peak
2		5150.000	33.09	13.54	46.63	54.00	-7.37	AVG
3	*	5188.400	71.22	13.51	84.73	Fundamental Frequency		AVG
4	X	5191.840	80.21	13.51	93.72	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
Remark:			

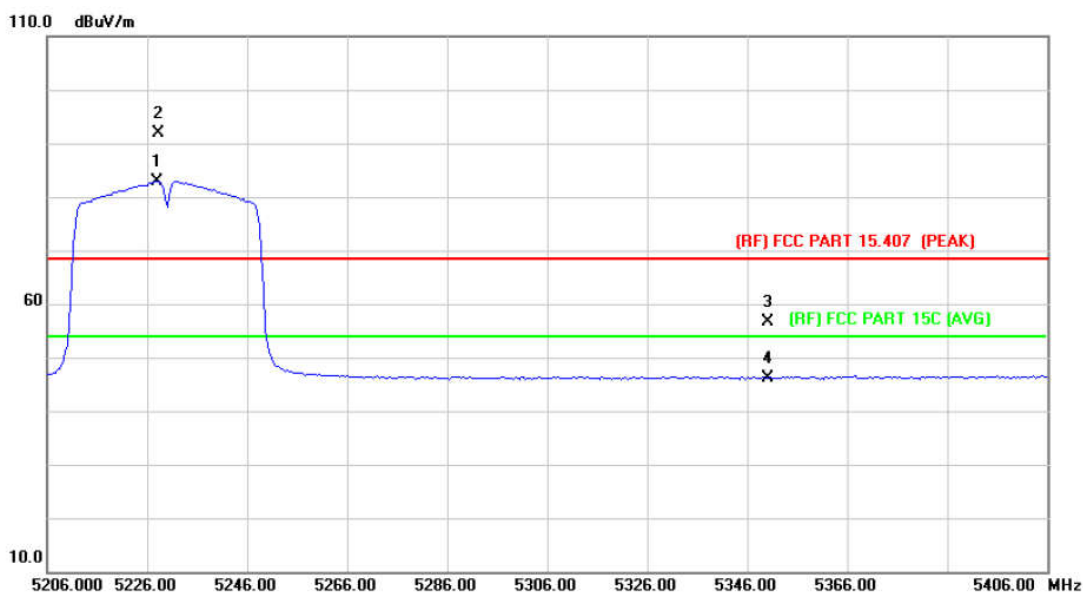

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5228.000	69.32	13.49	82.81	Fundamental Frequency		AVG
2	X	5228.160	78.36	13.49	91.85	Fundamental Frequency		peak
3		5350.000	43.11	13.40	56.51	68.30	-11.79	peak
4		5350.000	32.77	13.40	46.17	54.00	-7.83	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
Remark:			

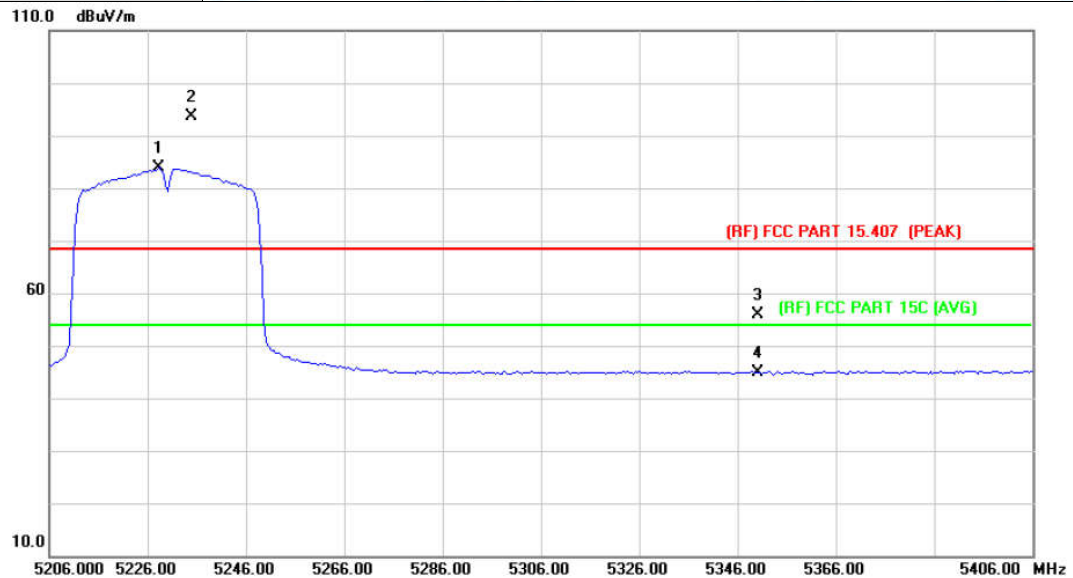

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	*	5228.400	70.29	13.49	83.78	Fundamental Frequency	3 AVG
2	X	5234.940	80.16	13.48	93.64	Fundamental Frequency	1 peak
3		5350.000	42.43	13.40	55.83	68.30	-12.47 peak
4		5350.000	31.59	13.40	44.99	54.00	-9.01 AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:			

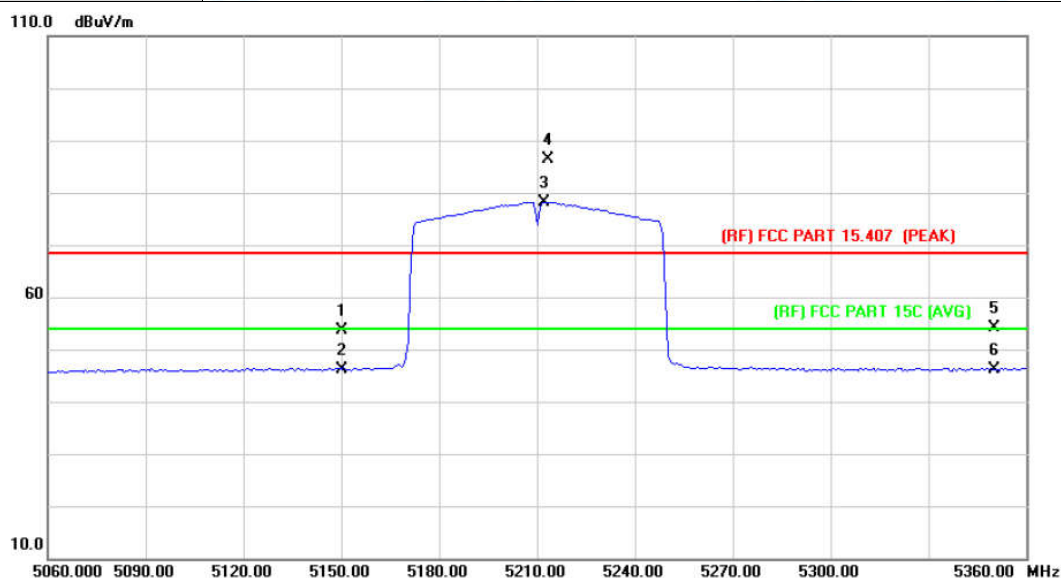

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.08	13.54	53.62	68.30	-14.68	peak
2		5150.000	32.67	13.54	46.21	54.00	-7.79	AVG
3	*	5212.400	64.74	13.49	78.23	54.00	24.23	AVG
4	X	5213.590	72.82	13.49	86.31	Fundamental Frequency		peak
5		5350.000	40.67	13.40	54.07	68.30	-14.23	peak
6		5350.000	32.83	13.40	46.23	54.00	-7.77	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:			

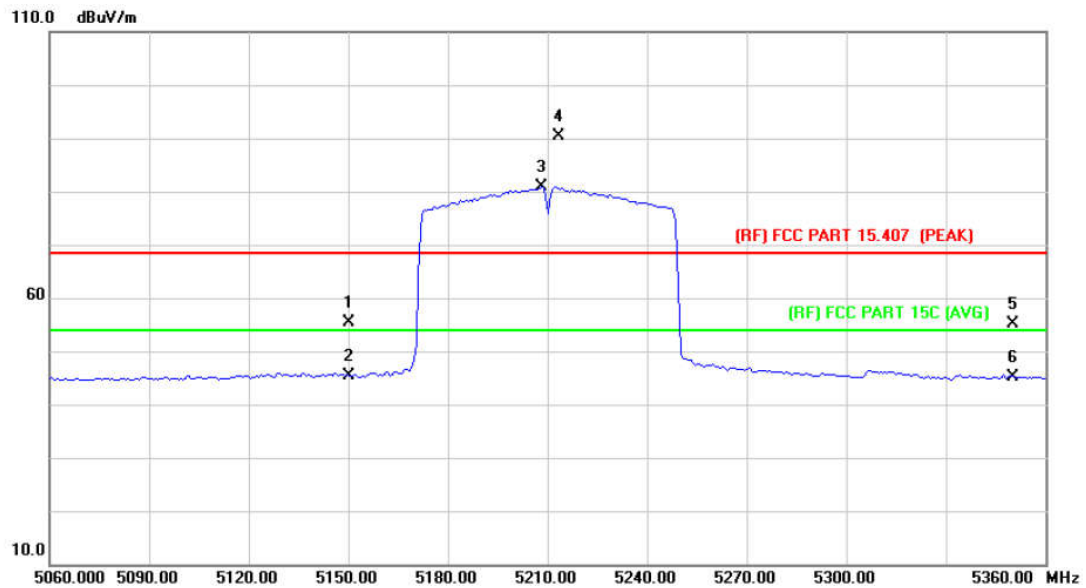

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.83	13.54	55.37	68.30	-12.93	peak
2		5150.000	31.90	13.54	45.44	54.00	-8.56	AVG
3	*	5208.200	67.42	13.50	80.92	54.00	26.92	AVG
4	X	5213.590	76.86	13.49	90.35	Fundamental Frequency		peak
5		5350.000	41.82	13.40	55.22	68.30	-13.08	peak
6		5350.000	31.70	13.40	45.10	54.00	-8.90	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5260 MHz (U-NII-2A)		
Remark:			

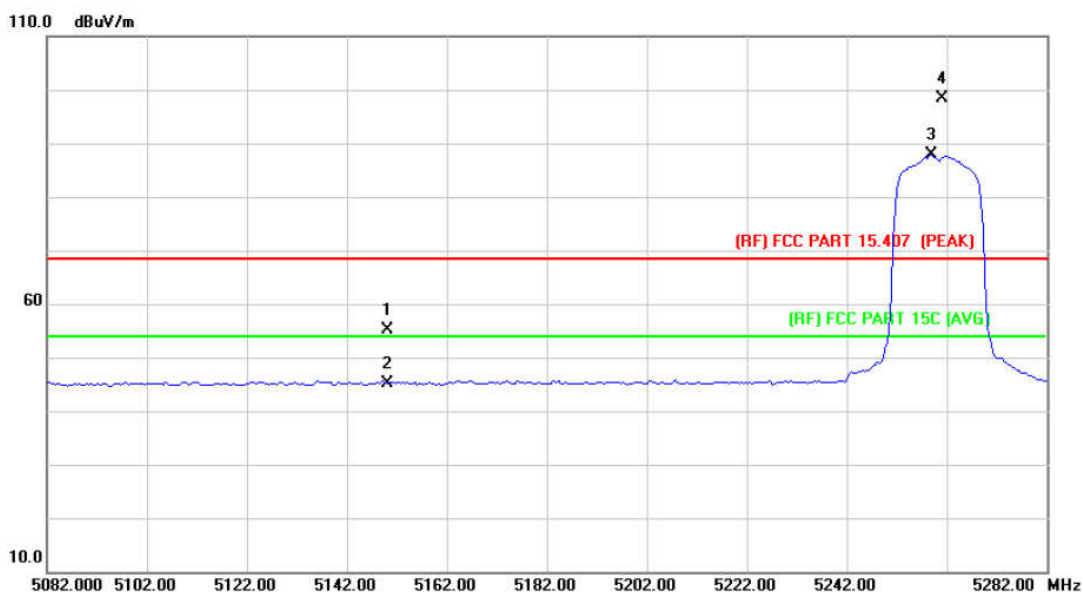

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	41.58	13.54	55.12	68.30	-13.18 peak
2		5150.000	31.65	13.54	45.19	54.00	-8.81 AVG
3	*	5258.800	74.36	13.46	87.82	Fundamental Frequency 2	
4	X	5261.040	84.92	13.47	98.39	Fundamental Frequency 3	

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5260 MHz (U-NII-2A)		
Remark:			

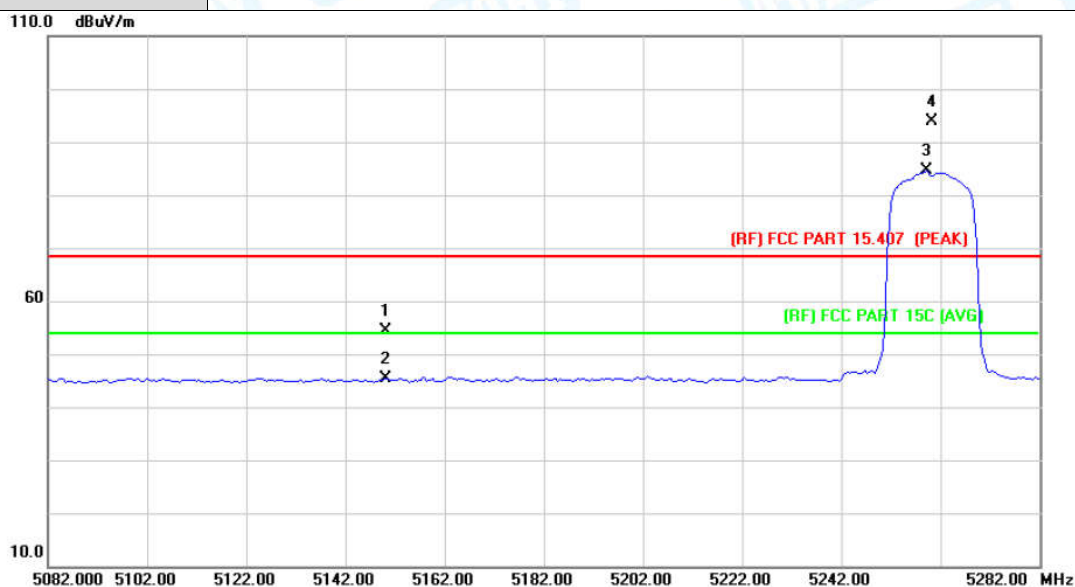

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	40.74	13.54	54.28	68.30	-14.02	peak
2		5150.000	31.72	13.54	45.26	54.00	-8.74	AVG
3	*	5259.200	71.15	13.46	84.61	Fundamental Frequency		AVG
4	X	5260.240	80.36	13.46	93.82	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)		
Remark:			

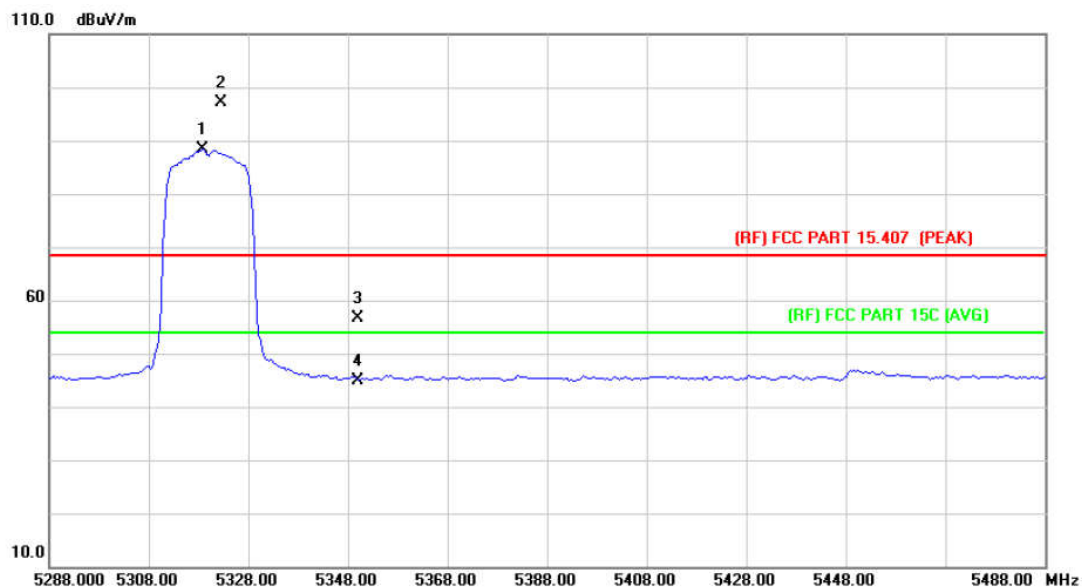

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5318.800	74.94	13.42	88.36	Fundamental Frequency		AVG
2	X	5322.530	83.84	13.41	97.25	Fundamental Frequency		peak
3		5350.000	43.30	13.40	56.70	68.30	-11.60	peak
4		5350.000	31.60	13.40	45.00	54.00	-9.00	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)		
Remark:			

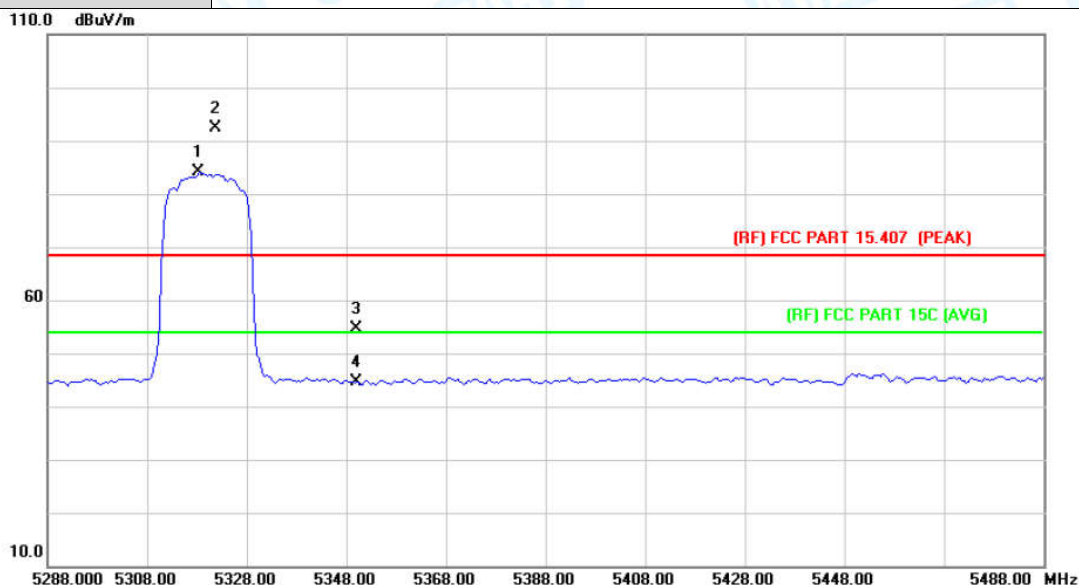

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5318.400	70.65	13.42	84.07	Fundamental Frequency		AVG
2	X	5321.730	78.89	13.41	92.30	Fundamental Frequency		peak
3		5350.000	41.17	13.40	54.57		-13.73	peak
4		5350.000	31.30	13.40	44.70		-9.30	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

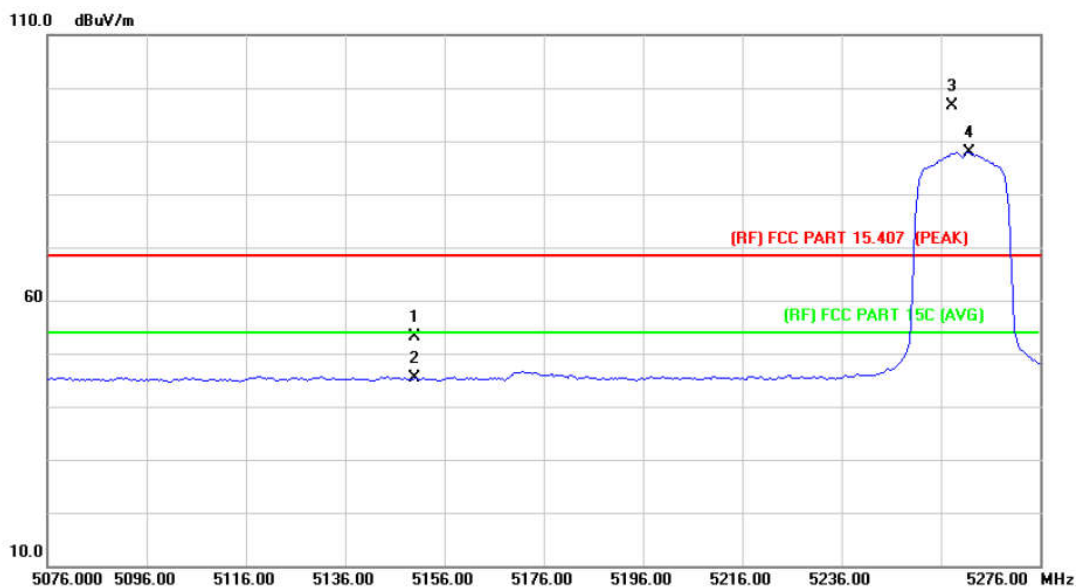

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	39.54	13.54	53.08	68.30	-15.22	peak
2		5150.000	31.72	13.54	45.26	54.00	-8.74	AVG
3	X	5258.240	83.23	13.46	96.69	Fundamental Frequency		peak
4	*	5261.600	74.40	13.47	87.87	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

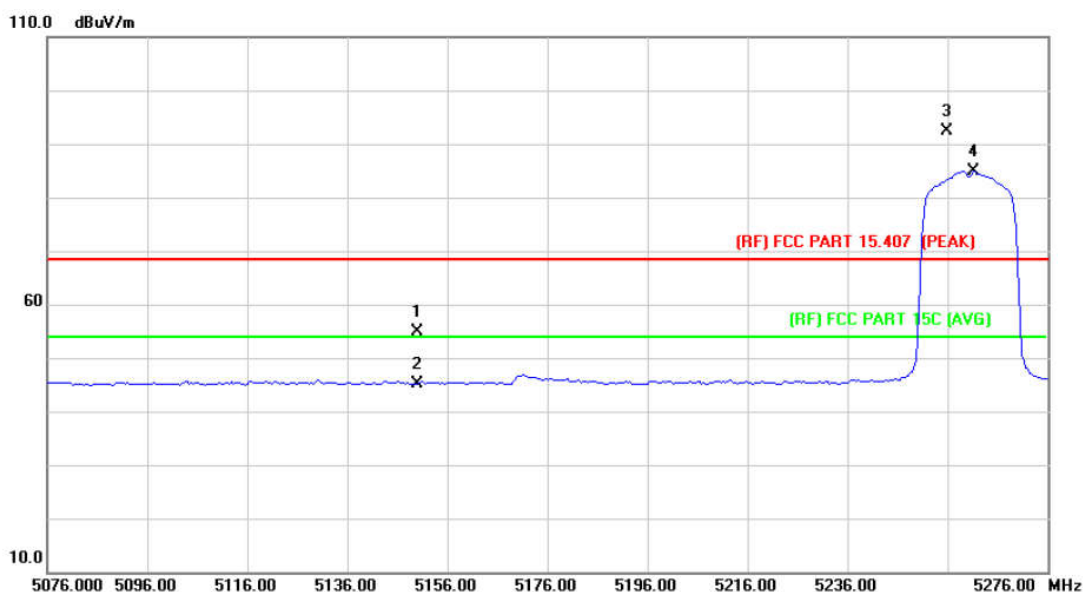

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.33	13.54	54.87	68.30	-13.43	peak
2		5150.000	31.67	13.54	45.21	54.00	-8.79	AVG
3	X	5255.840	78.85	13.47	92.32	Fundamental Frequency		peak
4	*	5261.200	71.52	13.47	84.99	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

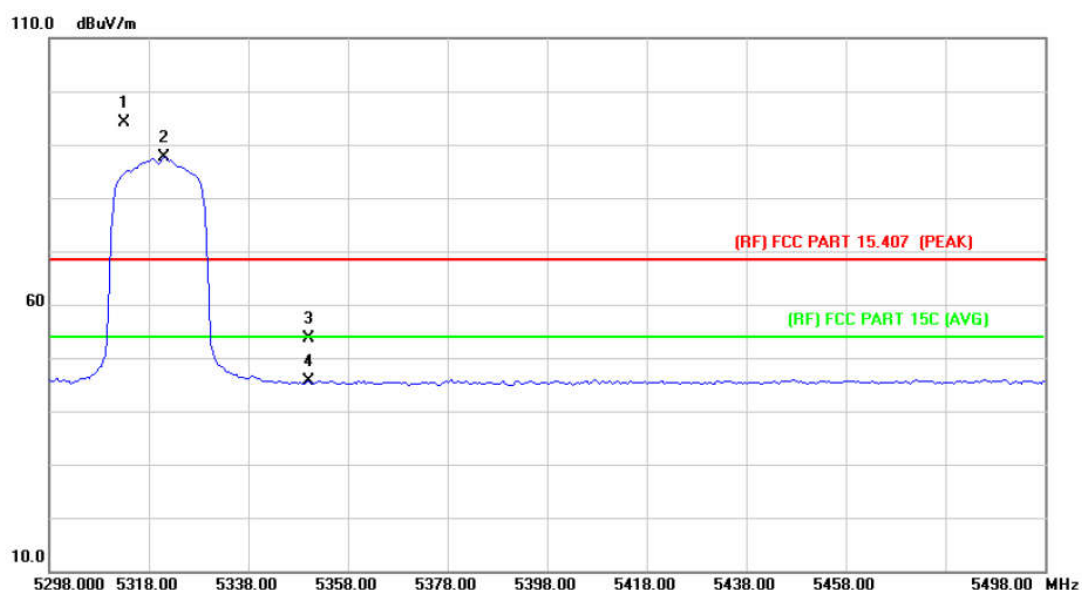

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5312.970	80.63	13.42	94.05	Fundamental Frequency		peak
2	*	5321.200	74.11	13.41	87.52	Fundamental Frequency		AVG
3		5350.000	40.34	13.40	53.74	68.30	-14.56	peak
4		5350.000	32.11	13.40	45.51	54.00	-8.49	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

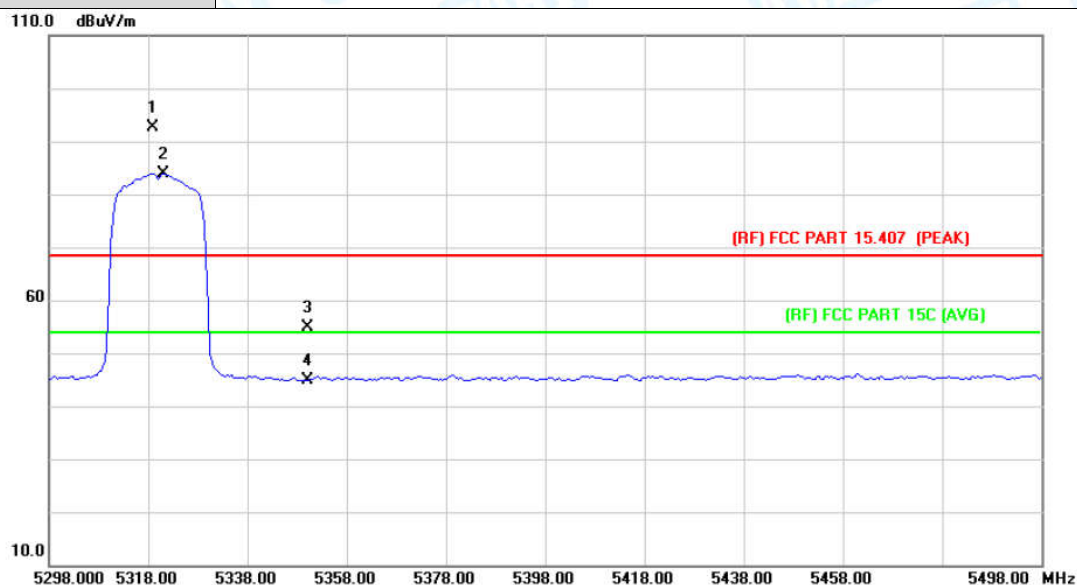

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5318.960	79.29	13.41	92.70	Fundamental Frequency		peak
2	*	5321.200	70.56	13.41	83.97	Fundamental Frequency		AVG
3		5350.000	41.50	13.40	54.90	68.30	-13.40	peak
4		5350.000	31.43	13.40	44.83	54.00	-9.17	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

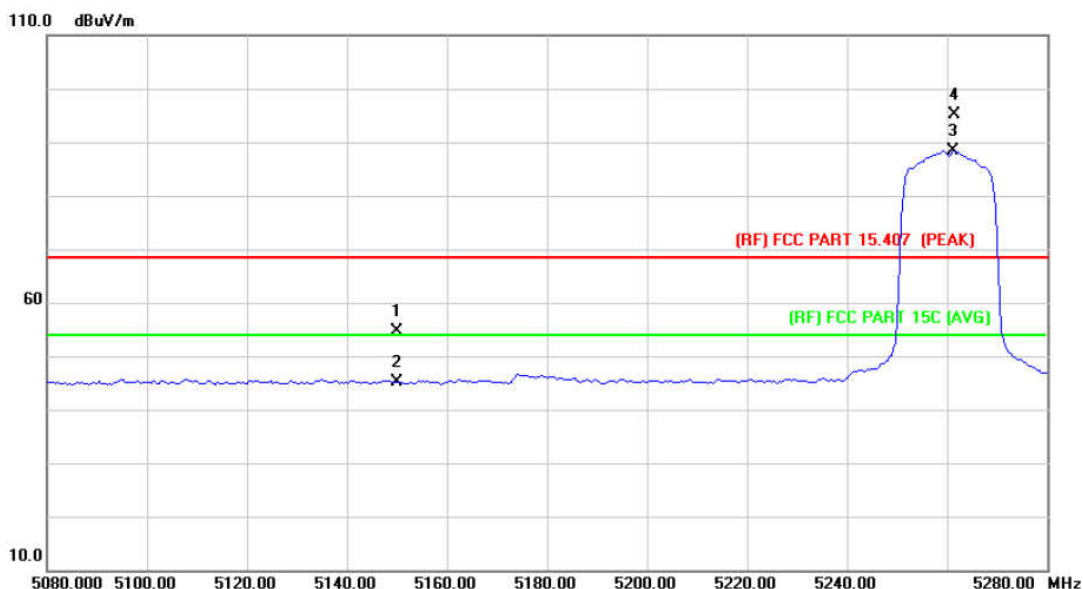

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	41.14	13.54	54.68	68.30	-13.62	peak
2		5150.000	31.66	13.54	45.20	54.00	-8.80	AVG
3	*	5261.200	74.84	13.47	88.31	Fundamental Frequency		AVG
4	X	5261.440	81.65	13.47	95.12	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

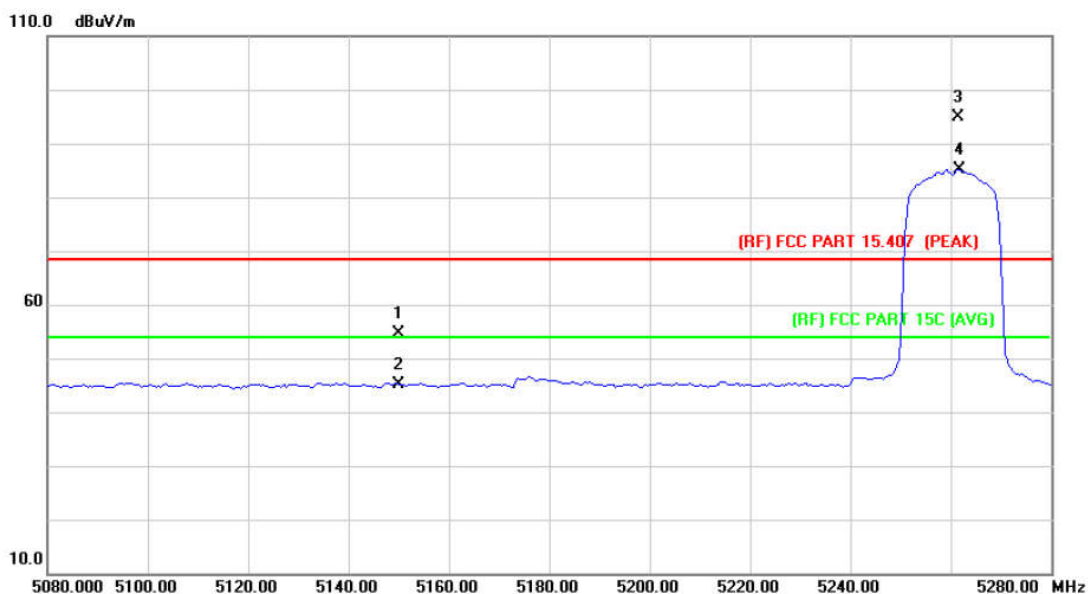

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.20	13.54	54.74	68.30	-13.56	peak
2		5150.000	31.53	13.54	45.07	54.00	-8.93	AVG
3	X	5261.440	81.52	13.47	94.99	Fundamental Frequency		peak
4	*	5261.600	71.71	13.47	85.18	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

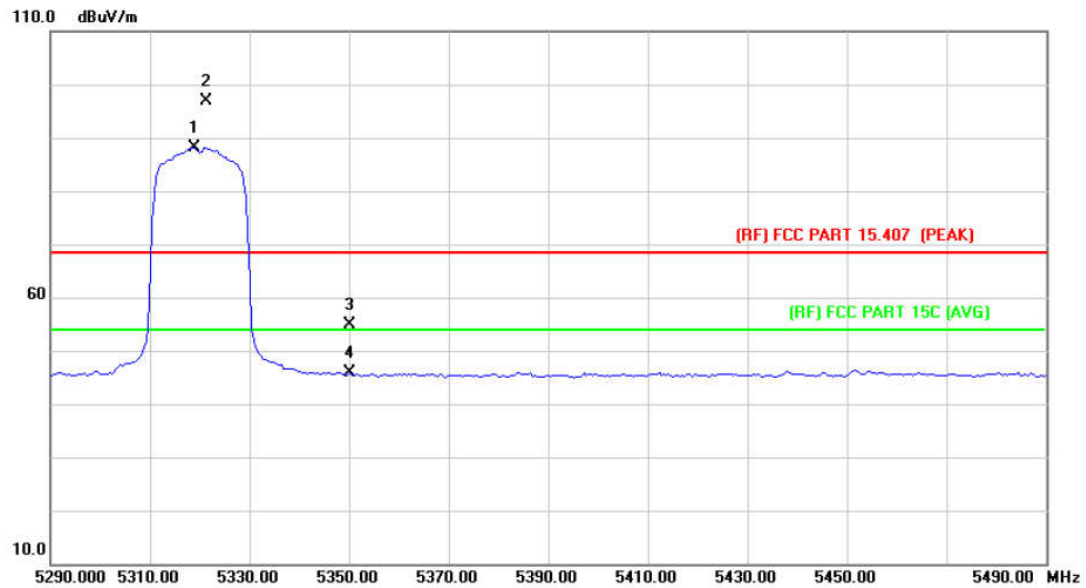

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5318.800	74.72	13.42	88.14	Fundamental Frequency		AVG
2	X	5321.340	83.47	13.41	96.88	Fundamental Frequency		peak
3		5350.000	41.49	13.40	54.89	68.30	-13.41	peak
4		5350.000	32.36	13.40	45.76	54.00	-8.24	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

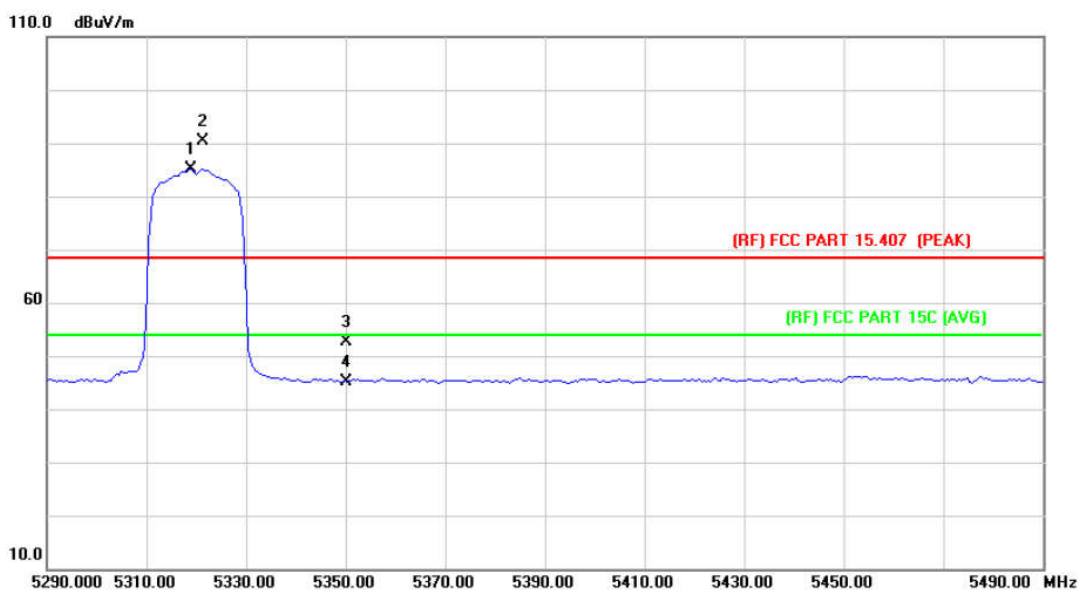

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5318.800	71.72	13.42	85.14	Fundamental Frequency		AVG
2	X	5321.340	76.85	13.41	90.26	Fundamental Frequency		peak
3		5350.000	39.32	13.40	52.72	68.30	-15.58	peak
4		5350.000	31.82	13.40	45.22	54.00	-8.78	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

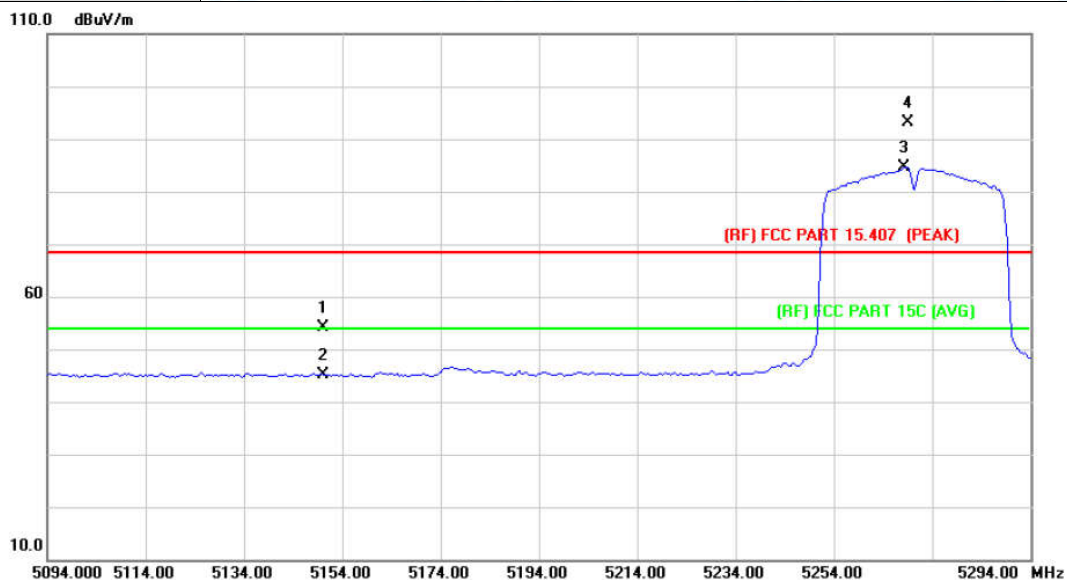

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.59	13.54	54.13	68.30	-14.17	peak
2		5150.000	31.70	13.54	45.24	54.00	-8.76	AVG
3	*	5268.400	71.25	13.46	84.71	Fundamental Frequency		AVG
4	X	5269.050	79.66	13.45	93.11	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

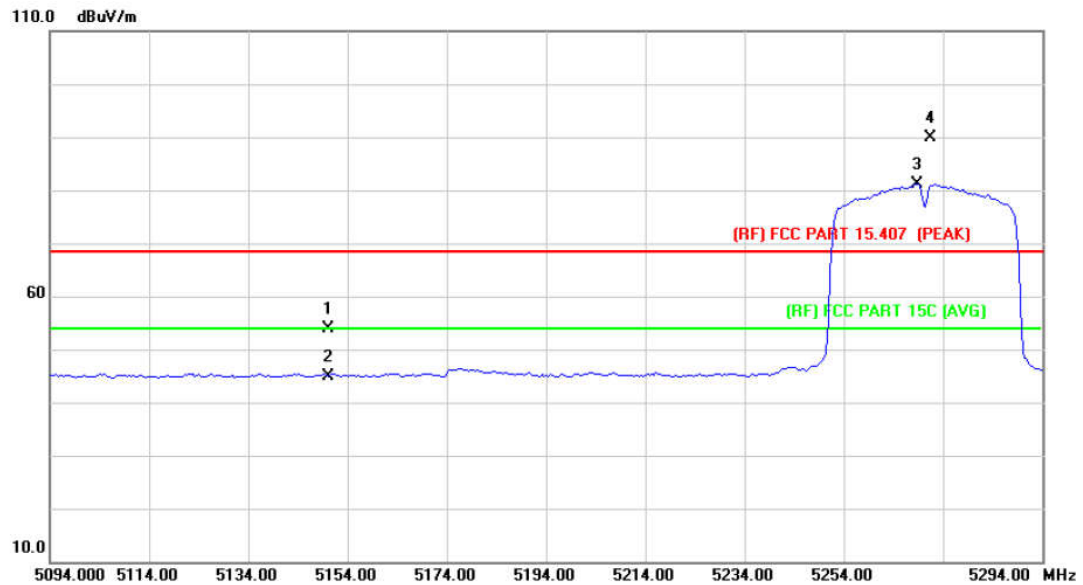

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.42	13.54	53.96	68.30	-14.34	peak
2		5150.000	31.35	13.54	44.89	54.00	-9.11	AVG
3	*	5268.800	67.62	13.46	81.08	Fundamental Frequency		AVG
4	X	5271.450	76.46	13.45	89.91	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

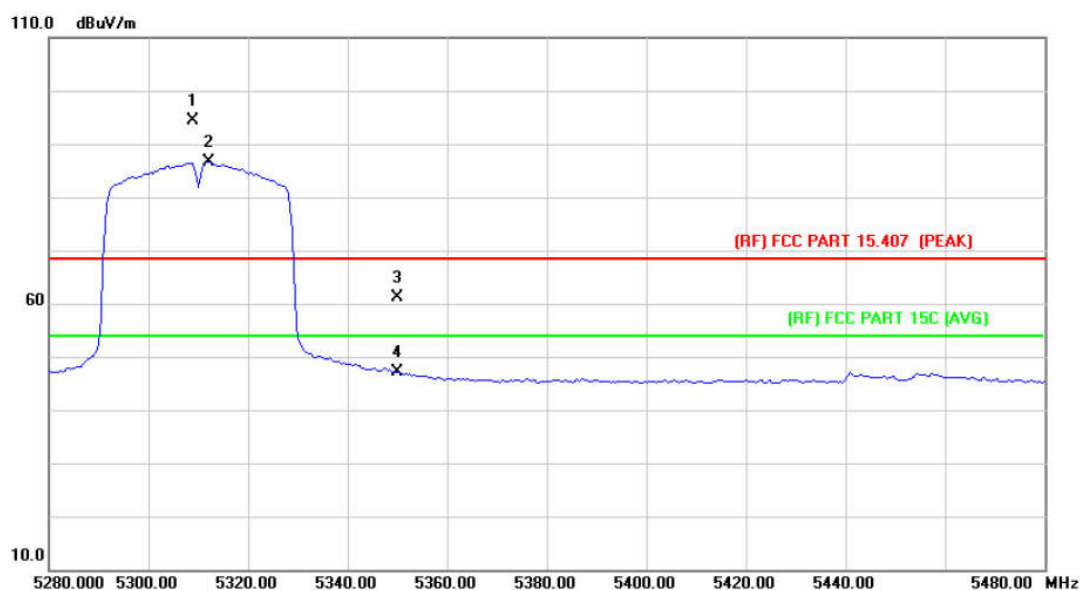

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	X	5308.940	81.02	13.43	94.45	Fundamental Frequency	peak
2	*	5312.000	73.15	13.43	86.58	Fundamental Frequency	AVG
3		5350.000	47.76	13.40	61.16	68.30	-7.14 peak
4		5350.000	33.85	13.40	47.25	54.00	-6.75 AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

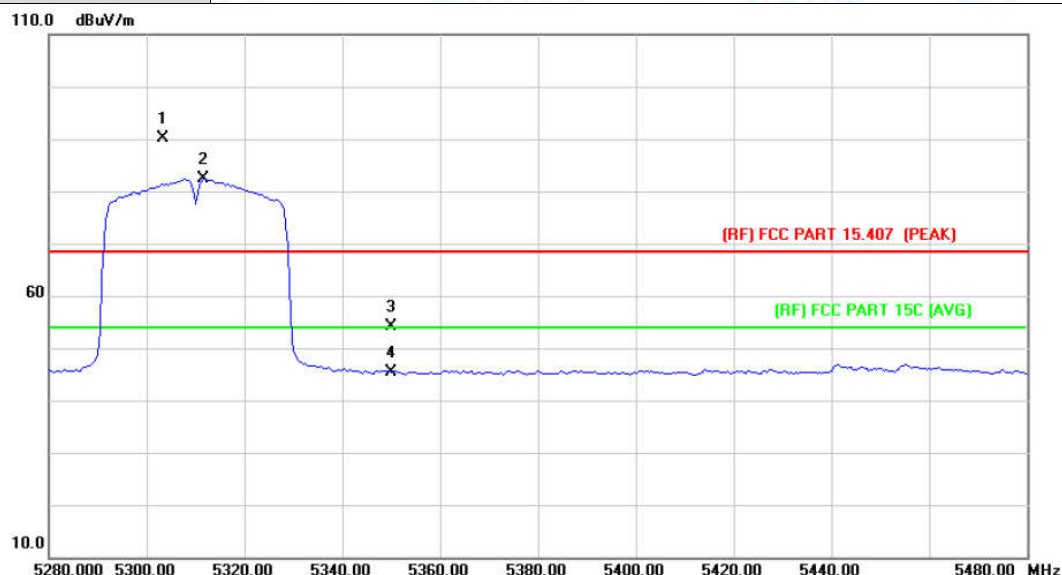

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5303.350	76.78	13.44	90.22	Fundamental Frequency		peak
2	*	5311.600	68.93	13.43	82.36	Fundamental Frequency		AVG
3		5350.000	40.83	13.40	54.23	68.30	-14.07	peak
4		5350.000	31.98	13.40	45.38	54.00	-8.62	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

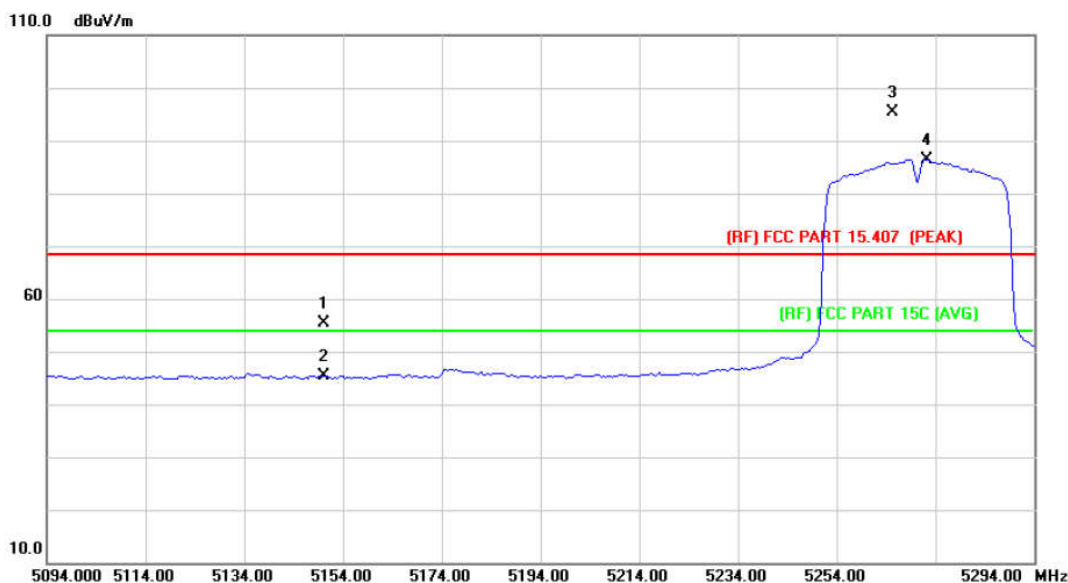

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.76	13.54	55.30	68.30	-13.00	peak
2		5150.000	31.72	13.54	45.26	54.00	-8.74	AVG
3	X	5265.460	81.93	13.46	95.39	Fundamental Frequency		peak
4	*	5272.400	73.04	13.45	86.49	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

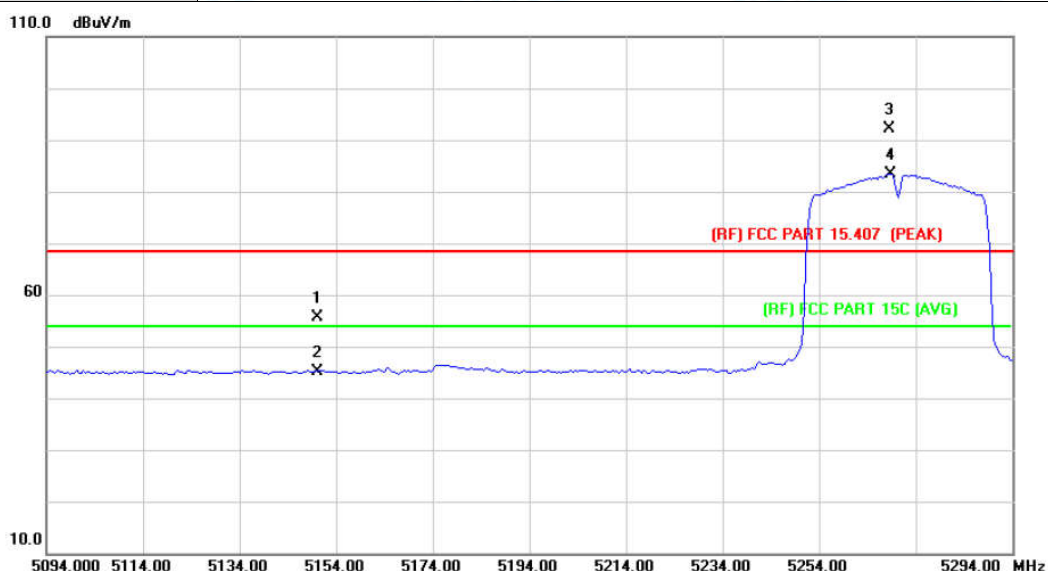

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	42.15	13.54	55.69	68.30	-12.61 peak
2		5150.000	31.70	13.54	45.24	54.00	-8.76 AVG
3	X	5268.650	78.60	13.46	92.06	Fundamental Frequency peak	
4	*	5268.800	69.90	13.46	83.36	Fundamental Frequency AVG	

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

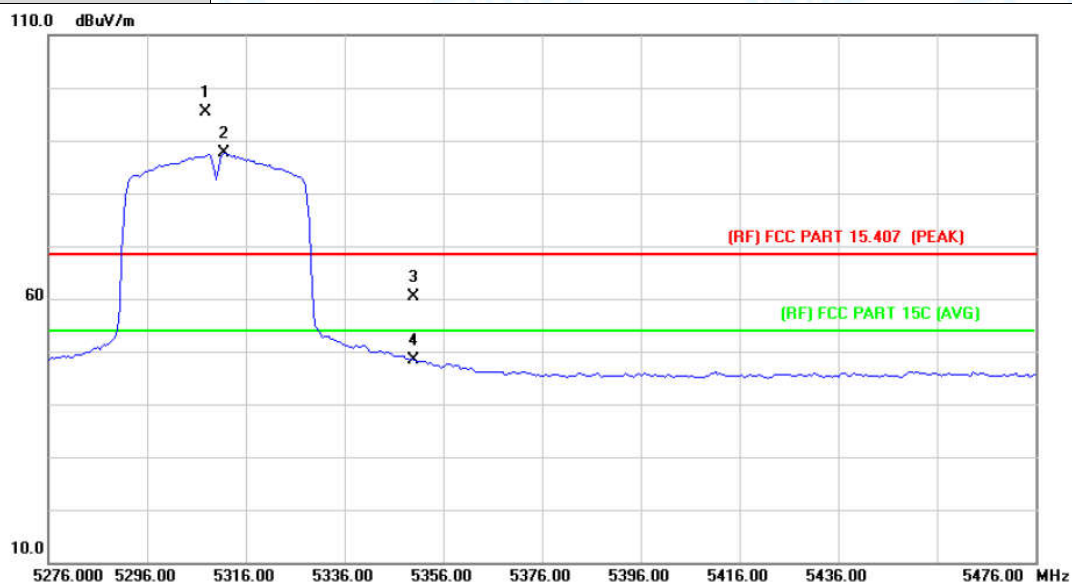

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5307.740	81.84	13.43	95.27	Fundamental Frequency		peak
2	*	5311.600	74.08	13.43	87.51	Fundamental Frequency		AVG
3		5350.000	47.01	13.40	60.41	68.30	-7.89	peak
4		5350.000	35.04	13.40	48.44	54.00	-5.56	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

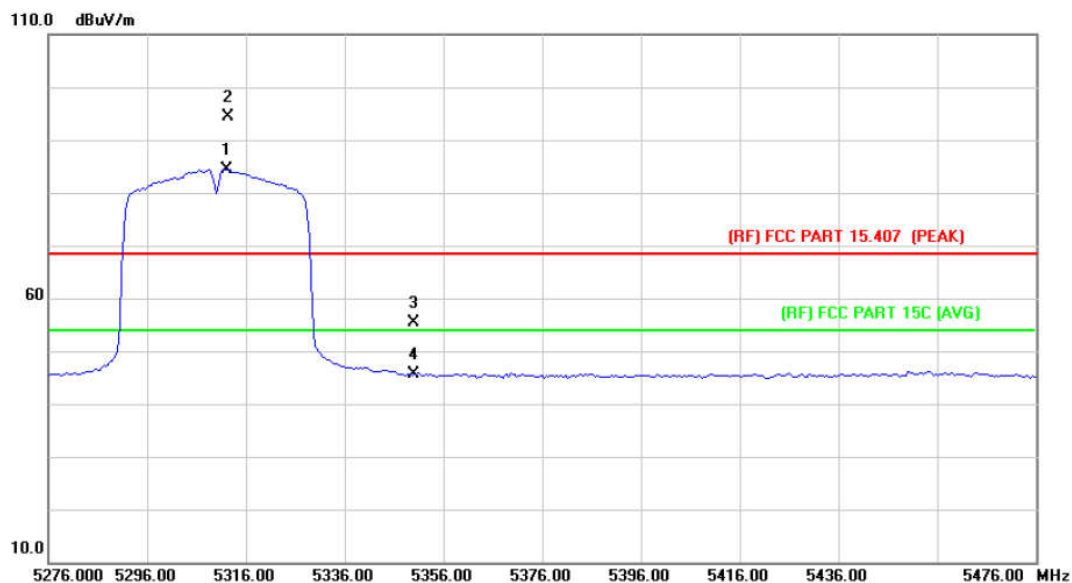

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5312.000	71.01	13.43	84.44	Fundamental Frequency		AVG
2	X	5312.530	80.88	13.42	94.30	Fundamental Frequency		peak
3		5350.000	41.95	13.40	55.35	68.30	-12.95	peak
4		5350.000	32.29	13.40	45.69	54.00	-8.31	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz(U-NII-2A)		
Remark:			

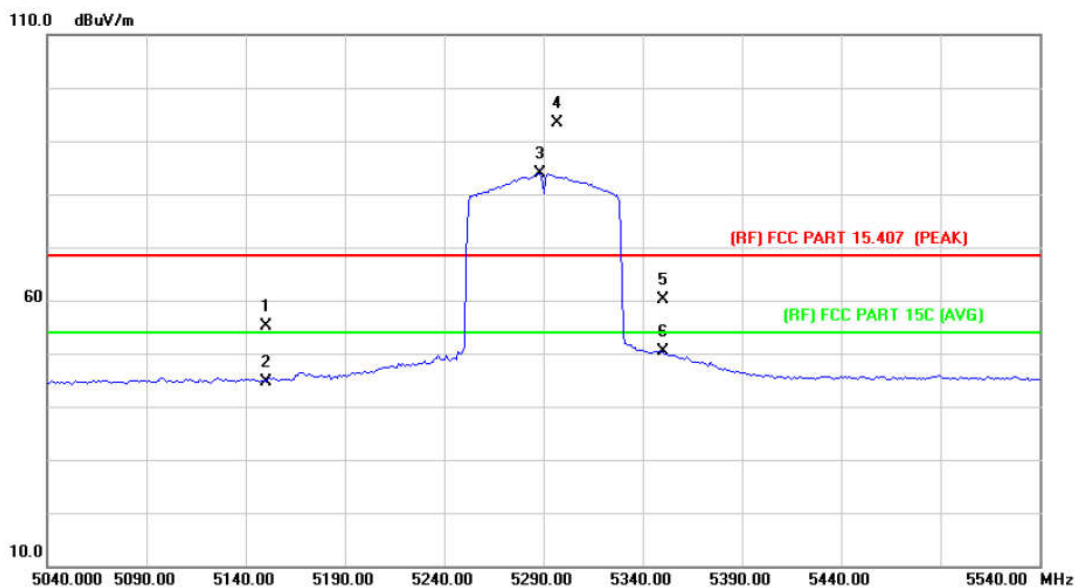

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	41.64	13.54	55.18	68.30	-13.12	peak
2		5150.000	30.97	13.54	44.51	54.00	-9.49	AVG
3	*	5288.000	70.37	13.44	83.81	54.00	29.81	AVG
4	X	5297.000	79.97	13.43	93.40	Fundamental Frequency		peak
5		5350.000	46.80	13.40	60.20	68.30	-8.10	peak
6		5350.000	37.08	13.40	50.48	54.00	-3.52	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)		
Remark:			

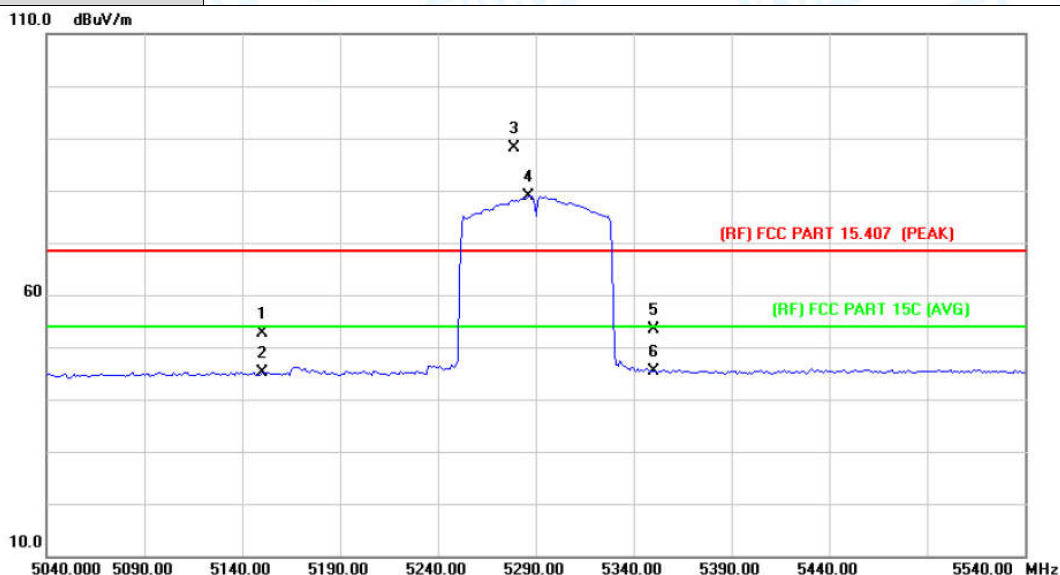

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	39.00	13.54	52.54	68.30	-15.76	peak
2		5150.000	31.47	13.54	45.01	54.00	-8.99	AVG
3	X	5279.000	74.76	13.45	88.21	Fundamental Frequency		peak
4	*	5286.000	65.47	13.45	78.92	54.00	24.92	AVG
5		5350.000	39.88	13.40	53.28	68.30	-15.02	peak
6		5350.000	31.94	13.40	45.34	54.00	-8.66	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

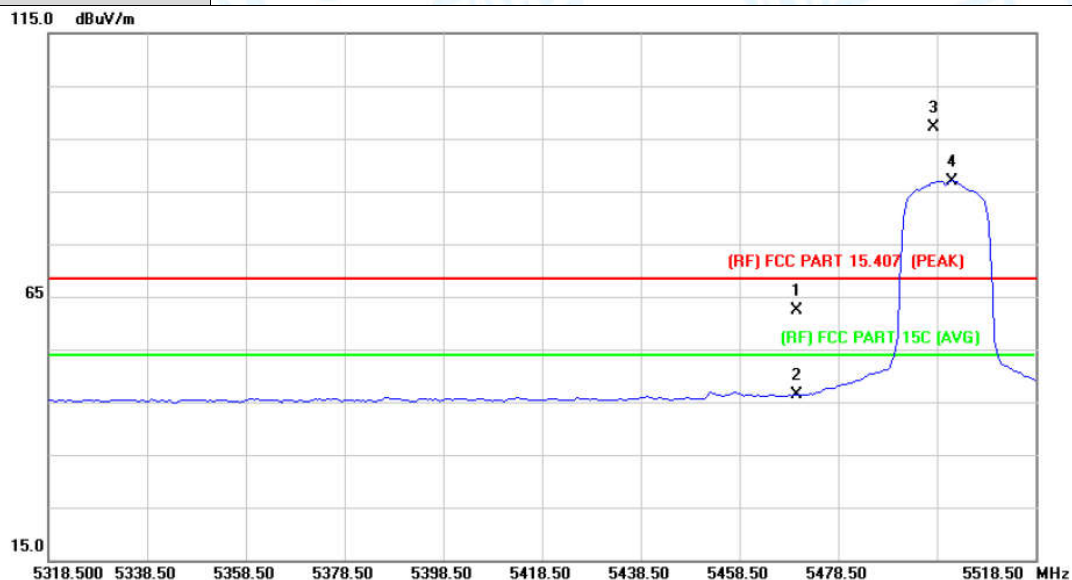

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	48.96	13.31	62.27	68.30	-6.03	peak
2		5470.000	33.16	13.31	46.47	54.00	-7.53	AVG
3	X	5497.940	83.90	13.29	97.19	Fundamental Frequency		peak
4	*	5501.700	73.71	13.29	87.00	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

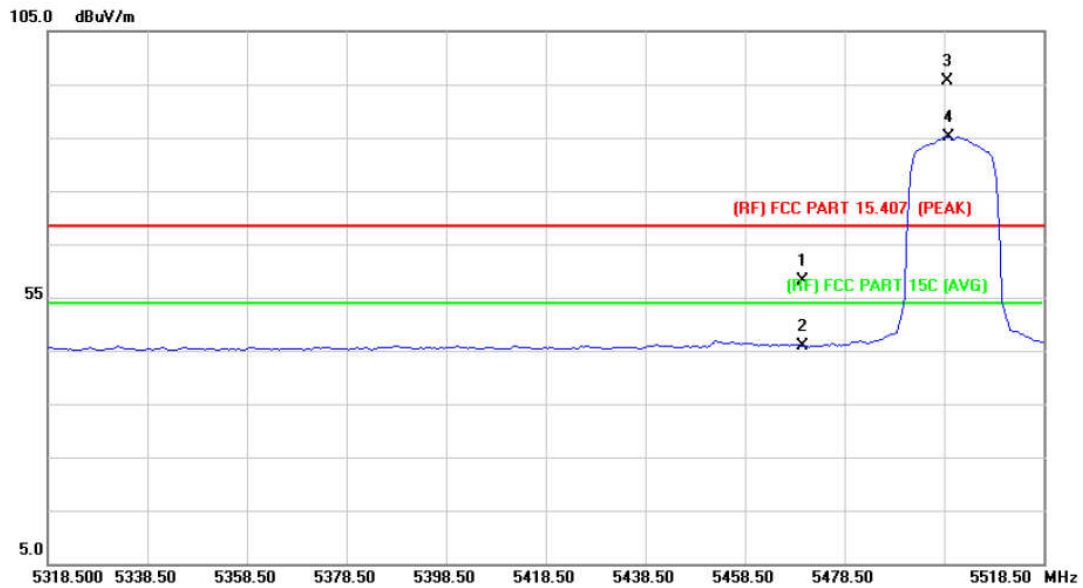

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5470.000	44.84	13.31	58.15	68.30	-10.15 peak
2		5470.000	32.47	13.31	45.78	54.00	-8.22 AVG
3	X	5499.140	82.34	13.29	95.63	Fundamental Frequency	peak
4	*	5499.300	71.94	13.29	85.23	Fundamental Frequency	AVG

Emission Level= Read Level+ Correct Factor