

# FCC Radio Test Report

## FCC ID: XMF-MID1035

### Original Grant

**Report No.** : TB-FCC175198  
**Applicant** : Lightcomm Technology Co., Ltd.

#### Equipment Under Test (EUT)

**EUT Name** : 10.1"Tablet  
**Model No.** : 100003562  
**Series Model No.** : MID1035  
**Brand Name** : onn  
**Sample ID** : TBBJ-20200814-09-1#  
**Receipt Date** : 2020-08-26  
**Test Date** : 2020-08-27 to 2020-09-01  
**Issue Date** : 2020-09-01  
**Standards** : FCC Part 15, Subpart C 15.247  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above.  
The EUT technically complies with the FCC requirements

**Test/Witness Engineer** : Jack

Jack Deng

**Engineer Supervisor** : Ivan Su

Ivan Su

**Engineer Manager** : Ray Lai

Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

---

## Contents

<b>CONTENTS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT.....</b>	<b>4</b>
1.1 Client Information.....	4
1.2 General Description of EUT (Equipment Under Test) .....	4
1.3 Block Diagram Showing the Configuration of System Tested.....	5
1.4 Description of Support Units .....	6
1.5 Description of Test Mode.....	6
1.6 Description of Test Software Setting .....	7
1.7 Measurement Uncertainty .....	8
1.8 Test Facility .....	9
<b>2. TEST SUMMARY .....</b>	<b>10</b>
<b>3. TEST SOFTWARE.....</b>	<b>10</b>
<b>4. TEST EQUIPMENT.....</b>	<b>11</b>
<b>5. CONDUCTED EMISSION TEST .....</b>	<b>12</b>
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode .....	13
5.6 Test Data.....	13
<b>6. RADIATED EMISSION TEST .....</b>	<b>14</b>
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	16
6.4 EUT Operating Condition .....	16
6.5 Test Data.....	16
<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA.....</b>	<b>17</b>

## Revision History

## 1. General Information about EUT

### 1.1 Client Information

<b>Applicant</b>	:	Lightcomm Technology Co., Ltd.
<b>Address</b>	:	UNIT 1306 13/F ARION COMMERCIAL CENTRE, 2-12 QUEEN'S ROAD WEST, SHEUNG WAN HK
<b>Manufacturer</b>	:	Huizhou Hengdu Electronics Co., Ltd.
<b>Address</b>	:	No.8 Huitai Road, Huinan High-tech Industrial Park, Huiao Avenue, Huizhou, Guangdong, China

### 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	10.1"Tablet
<b>Models No.</b>	:	100003562, MID1035
<b>Model Difference</b>	:	All these models are identical in the same PCB, layout and electrical circuit, The only difference is model name for commercial purpose.
<b>Product Description</b>	Operation Frequency:	Bluetooth V5.0(BT): 2402~2480 MHz
	Number of Channel:	Bluetooth: 79 Channels <small>See Note 2</small>
	Antenna Gain:	2.92dBi FPC Antenna
	Modulation Type:	GFSK $\pi/4$ -DQPSK 8-DPSK
<b>Power Rating</b>	:	Adapter(TEKA012-0502000UK): Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5V 2A DC 3.8V by 6600mAh Li-ion battery
<b>Software Version</b>	:	QP1A.190711.020 release-keys
<b>Hardware Version</b>	:	MID1035MQ_MT8768_LPDDR4_DSP_MB-VER1_1
<b>Connecting I/O Port(S)</b>	:	Please refer to the User's Manual
<b>Remark</b>	:	The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.

#### Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


## (2) Channel List:


Bluetooth Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

(3) The Antenna information about the equipment is provided by the applicant.

### 1.3 Block Diagram Showing the Configuration of System Tested

#### Charging + TX Mode

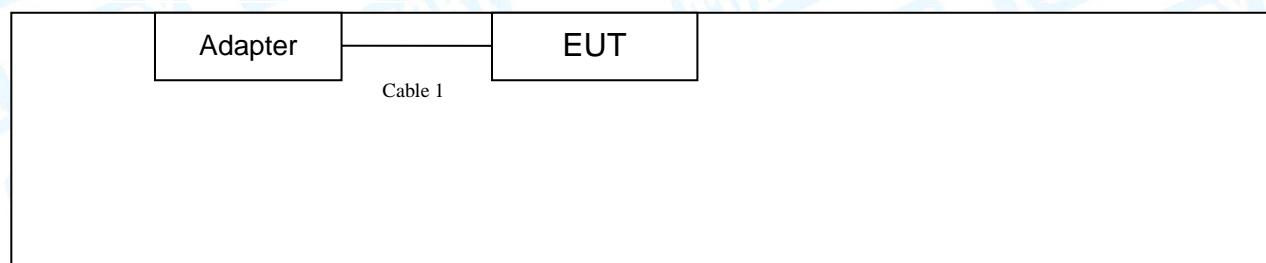

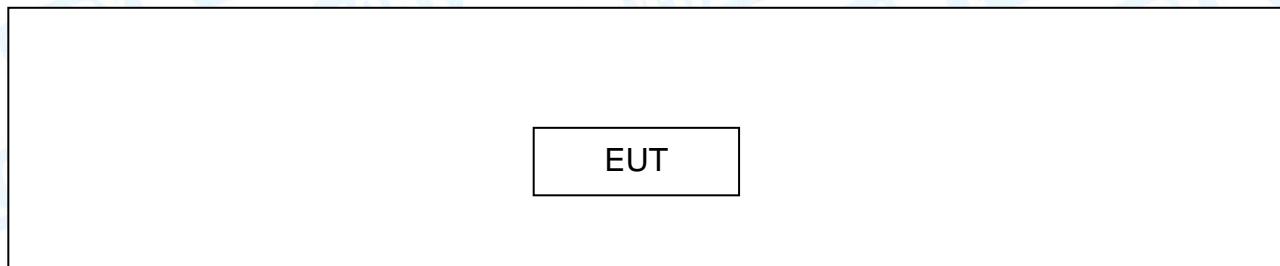**TX Mode****1.4 Description of Support Units**

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used "√"
Adapter	TEKA012-0502000UK	---	----	---
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory

**1.5 Description of Test Mode**

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging + TX Mode Channel 00
For Radiated Test	
Final Test Mode	Description
Mode 1	TX GFSK Mode Channel 00
Mode 2	TX Mode(GFSK) Channel 00/39/78
Mode 3	TX Mode( $\pi/4$ -DQPSK) Channel 00/39/78
Mode 4	TX Mode(8-DPSK) Channel 00/39/78
Mode 5	Hopping Mode(GFSK)
Mode 6	Hopping Mode( $\pi/4$ -DQPSK)
Mode 7	Hopping Mode(8-DPSK)
Remark:	

**Note:**

(1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above. According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

TX Mode: GFSK (1 Mbps)  
 TX Mode:  $\pi/4$ -DQPSK (2 Mbps)  
 TX Mode: 8-DPSK (3Mbps)

(2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	LaunchEngmode		
Frequency	2402 MHz	2441MHz	2480 MHz
GFSK	DEF	DEF	DEF
$\pi/4$ -DQPSK	DEF	DEF	DEF
8-DPSK	DEF	DEF	DEF

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	$\pm 3.50$ dB $\pm 3.10$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.50$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB

## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2					
Standard Section		Test Item	Test Sample(s)	Judgment	Remark
FCC	IC				
15.203		Antenna Requirement	TBBJ-20200814-09-1#	N/A	N/A
15.207	RSS-GEN 7.2.2	Conducted Emission	TBBJ-20200814-09-1#	PASS	N/A
15.205	RSS-Gen 7.2.3	Restricted Bands	TBBJ-20200814-09-1#	N/A	N/A
15.247(a)(1)	RSS 247 5.1 (2)	Hopping Channel Separation	TBBJ-20200814-09-1#	N/A	N/A
15.247(a)(1)	RSS 247 5.1 (4)	Dwell Time	TBBJ-20200814-09-1#	N/A	N/A
15.247(b)(1)	RSS 247 5.4 (2)	Peak Output Power	TBBJ-20200814-09-1#	N/A	N/A
15.247(b)(1)	RSS 247 5.1 (4)	Number of Hopping Frequency	TBBJ-20200814-09-1#	N/A	N/A
15.247(d)	RSS 247 5.5	Band Edge	TBBJ-20200814-09-1#	N/A	N/A
15.247(c)& 15.209	RSS 247 5.5	Radiated Spurious Emission	TBBJ-20200814-09-1#	PASS	N/A
15.247(a)	RSS 247 5.1 (1)	99% Occupied Bandwidth & 20dB Bandwidth	TBBJ-20200814-09-1#	N/A	N/A

**Note:** (1) N/A is an abbreviation for Not Applicable.  
(2) This report is Class II change report for the original equipment have changed, the transmitter module itself has not changed. More information about the test data please refer to the original test report.

## 3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE

## 4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 06, 2020	Jul. 05, 2021
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 06, 2020	Jul. 05, 2021
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 06, 2020	Jul. 05, 2021
LISN	Rohde & Schwarz	ENV216	101131	Jul. 06, 2020	Jul. 05, 2021
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 06, 2020	Jul. 05, 2021
Pre-amplifier	Sonoma	310N	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Jul. 07, 2020	Jul. 06, 2021
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.01, 2020	Feb. 28, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul. 06, 2020	Jul. 05, 2021
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 16, 2019	Sep. 15, 2020
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 16, 2019	Sep. 15, 2020
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 16, 2019	Sep. 15, 2020
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 16, 2019	Sep. 15, 2020

## 5. Conducted Emission Test

## 5.1 Test Standard and Limit

### 5.1.1 Test Standard

## FCC Part 15.207

### 5.1.2 Test Limit


## Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

## Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

## 5.2 Test Setup

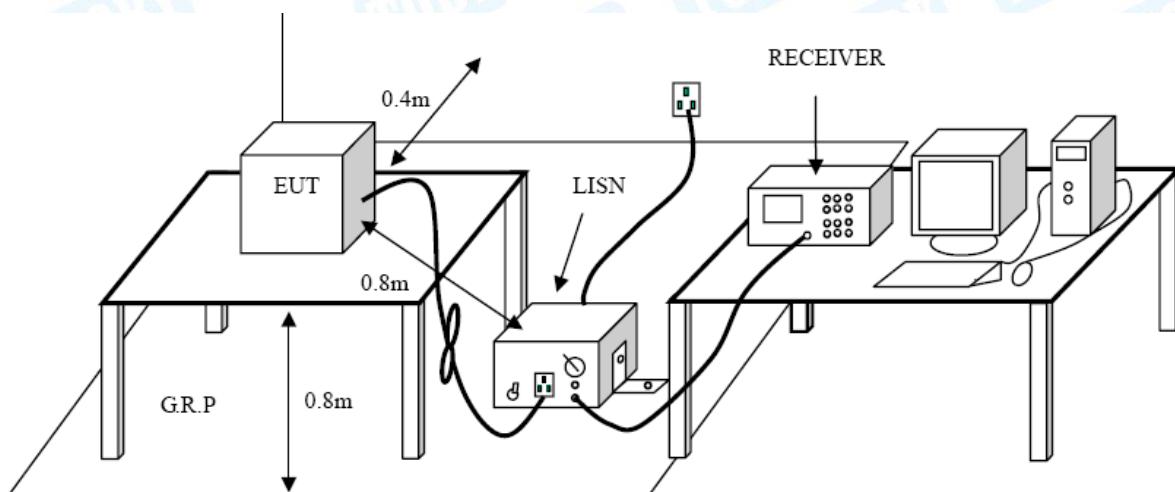

### 5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

### 5.4 Deviation From Test Standard

No deviation

### 5.5 EUT Operating Mode

Please refer to the description of test mode.

### 5.6 Test Data

Please refer to the Attachment A.

## 6. Radiated Emission Test

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

FCC Part 15.209

#### 6.1.2 Test Limit

**Radiated Emission Limit (9 kHz~1000MHz)**

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3




**Radiated Emission Limit (Above 1000MHz)**

Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)

## 6.2 Test Setup

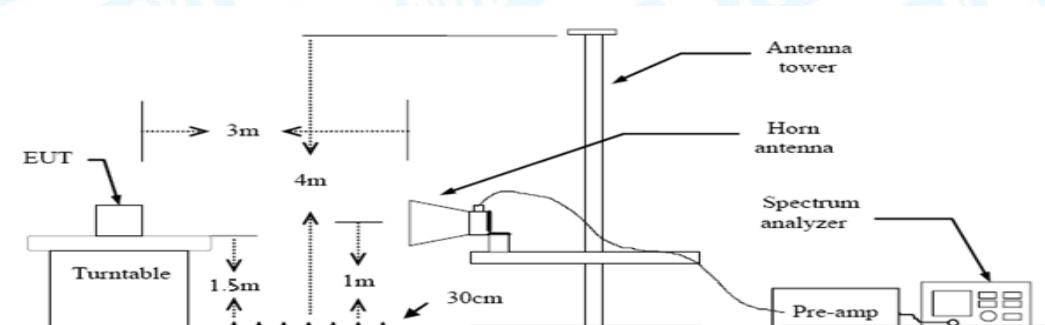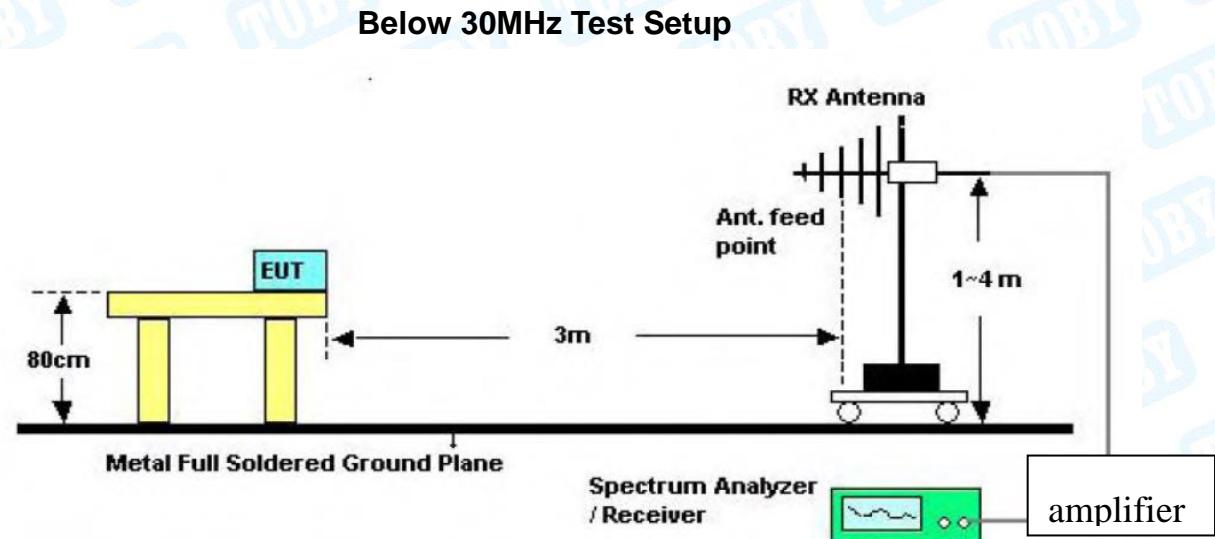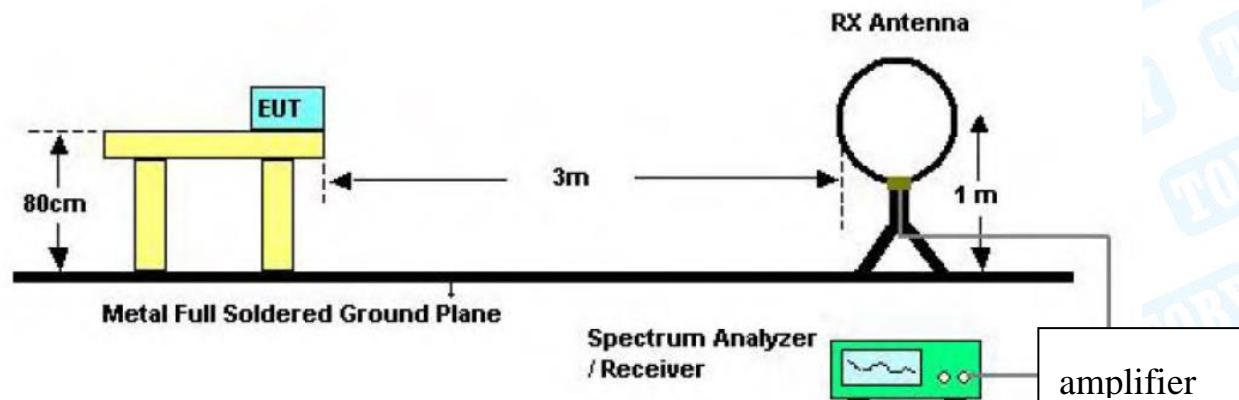

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

### 6.4 Deviation From Test Standard

No deviation

### 6.4 EUT Operating Condition


The Equipment Under Test was set to Continual Transmitting in maximum power in TX mode.

### 6.5 Test Data


Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

## Attachment A-- Conducted Emission Test Data

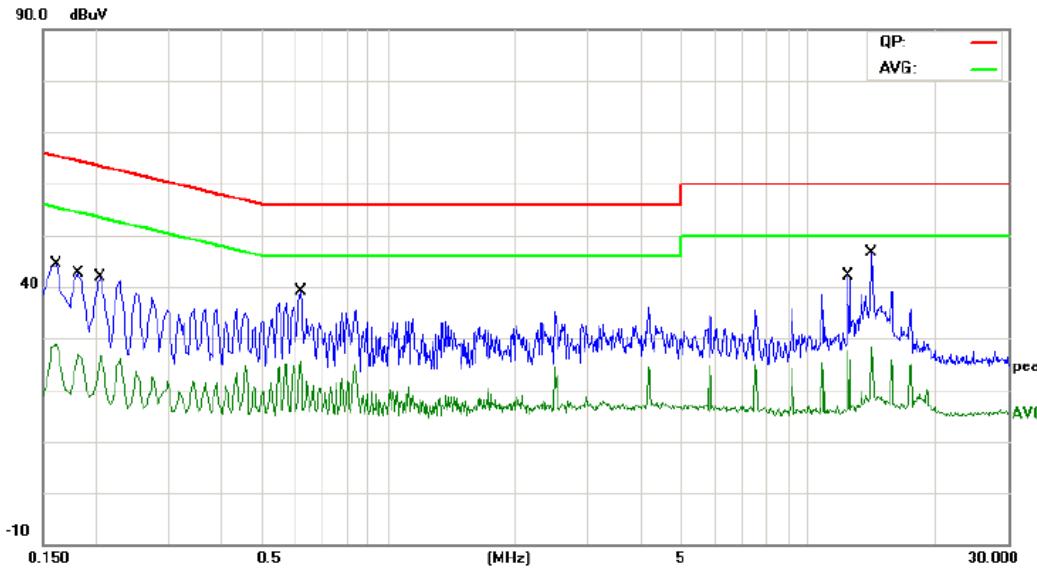Temperature:	24°C	Relative Humidity:	55%				
Test Voltage:	AC 120V/60 Hz						
Terminal:	Line						
Test Mode:	Mode 1						
Remark:	Only worse case is reported						
 A line graph showing conducted emission test data. The y-axis is labeled 'dBuV' and ranges from -10 to 90.0. The x-axis is labeled '(MHz)' and ranges from 0.150 to 30.000. A red line represents the 'QP' (Peak) measurement, which starts at approximately 65 dBuV at 0.150 MHz and remains relatively flat until 5 MHz, then jumps to a higher level. A green line represents the 'AVG' (Average) measurement, which starts at approximately 45 dBuV at 0.150 MHz, decreases to about 35 dBuV at 0.5 MHz, and then remains relatively flat. A blue line represents the raw signal, showing significant noise and several sharp peaks marked with 'X' and labeled 'peak'.							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV	dB	Detector
1		0.1620	31.59	9.70	41.29	65.36	-24.07
2		0.1620	17.59	9.70	27.29	55.36	-28.07
3		0.1819	30.53	9.70	40.23	64.39	-24.16
4		0.1819	17.28	9.70	26.98	54.39	-27.41
5		0.2060	29.43	9.70	39.13	63.36	-24.23
6		0.2060	16.41	9.70	26.11	53.36	-27.25
7		0.6180	24.93	9.70	34.63	56.00	-21.37
8	*	0.6180	15.46	9.70	25.16	46.00	-20.84
9		12.4900	25.99	9.90	35.89	60.00	-24.11
10		12.4900	13.45	9.90	23.35	50.00	-26.65
11		14.1540	25.21	9.97	35.18	60.00	-24.82
12		14.1540	10.98	9.97	20.95	50.00	-29.05

Emission Level= Read Level+ Correct Factor

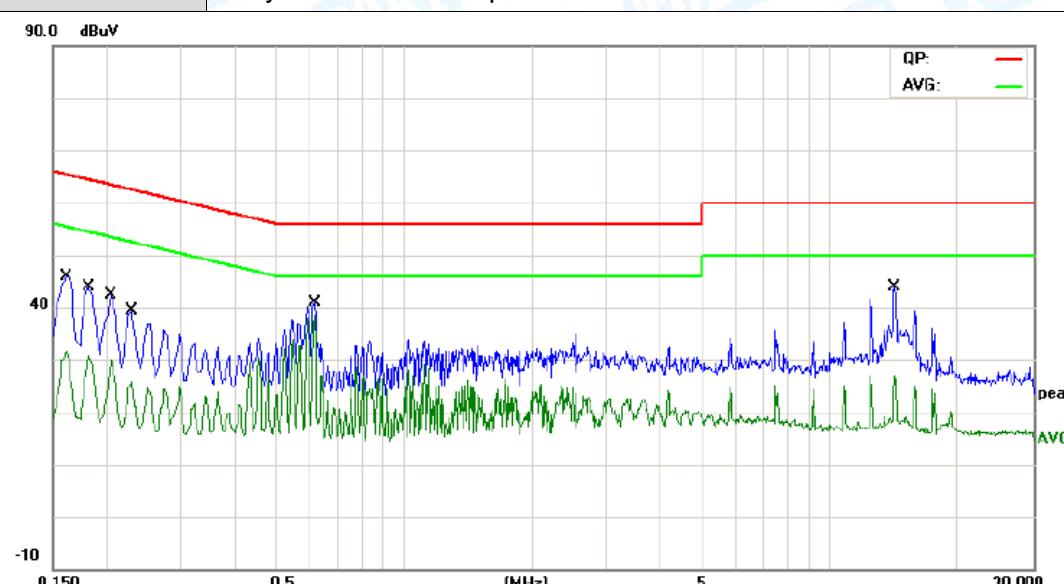
Temperature:	24°C	Relative Humidity:	55%				
Test Voltage:	AC 120V/60 Hz						
Terminal:	Neutral						
Test Mode:	Mode 1						
Remark:	Only worse case is reported						
							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV	dBuV	dB
1		0.1620	32.46	9.80	42.26	65.36	-23.10
2		0.1620	19.42	9.80	29.22	55.36	-26.14
3		0.1819	31.56	9.80	41.36	64.39	-23.03
4		0.1819	20.18	9.80	29.98	54.39	-24.41
5		0.2060	29.41	9.80	39.21	63.36	-24.15
6		0.2060	18.83	9.80	28.63	53.36	-24.73
7		0.2300	26.57	9.80	36.37	62.45	-26.08
8		0.2300	15.93	9.80	25.73	52.45	-26.72
9		0.6180	29.77	9.80	39.57	56.00	-16.43
10	*	0.6180	28.23	9.80	38.03	46.00	-7.97
11		14.1380	24.42	9.98	34.40	60.00	-25.60
12		14.1380	11.08	9.98	21.06	50.00	-28.94

Emission Level= Read Level+ Correct Factor


**Attachment B-- Radiated Emission Test Data****9KHz~30MHz**

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

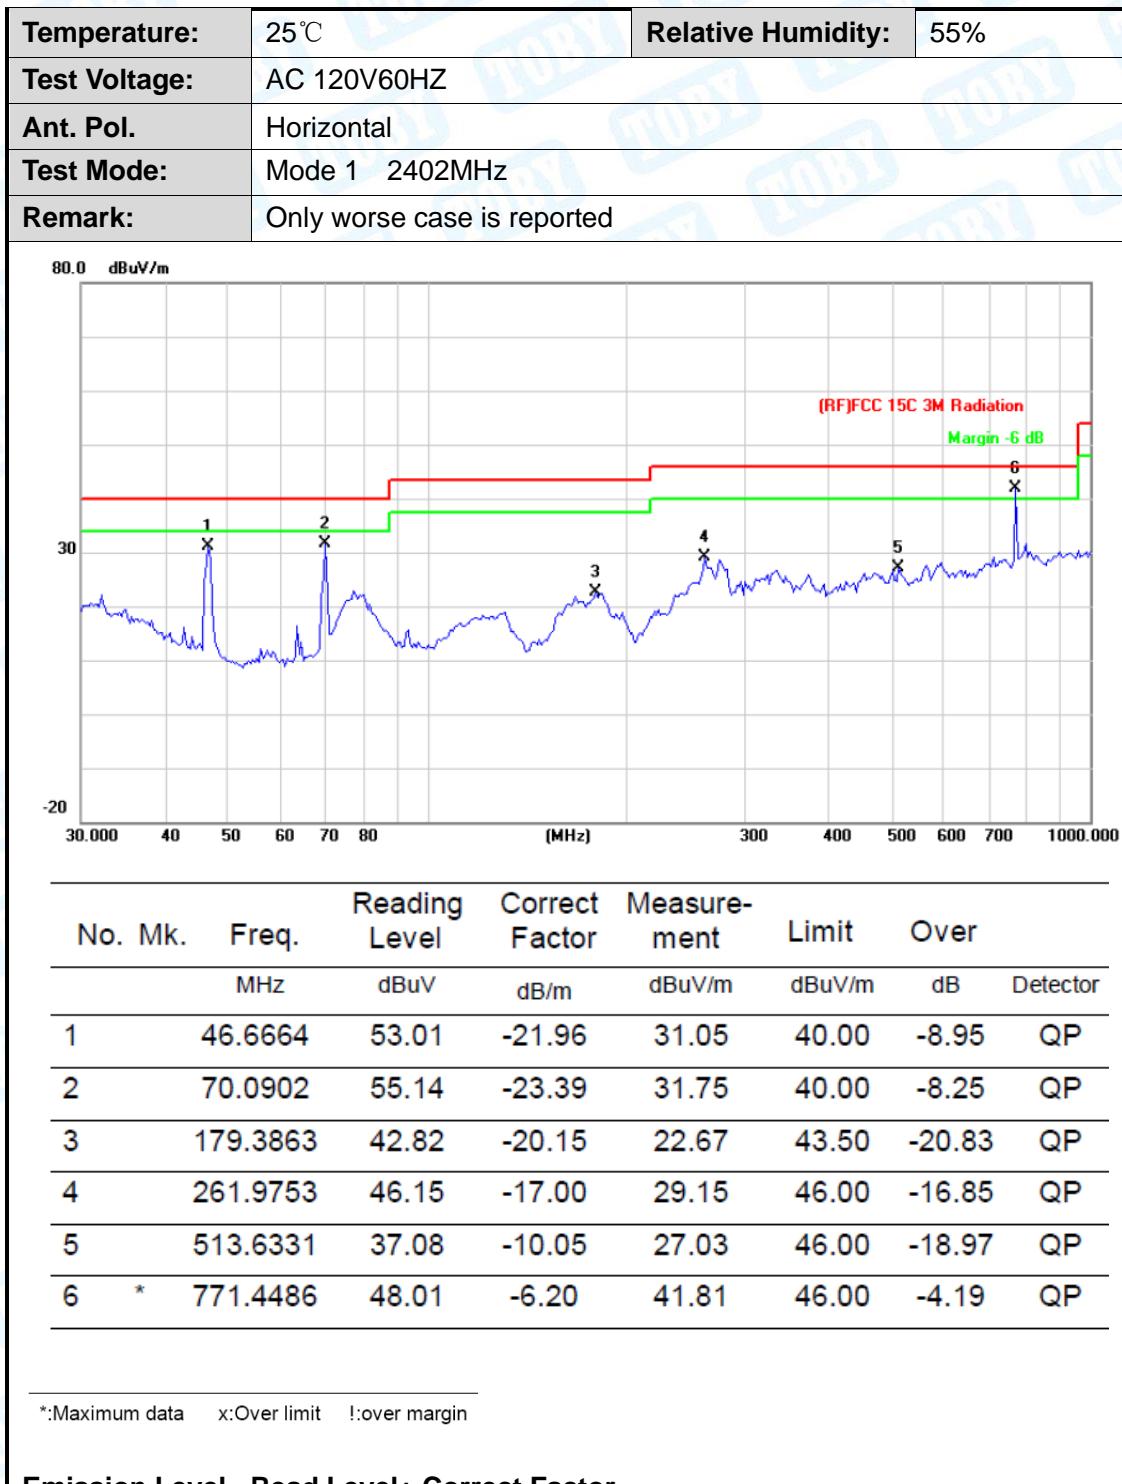**30MHz~1GHz**

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V60HZ		
Ant. Pol.	Vertical		
Test Mode:	Mode 1 2402MHz		
Remark:	Only worse case is reported		

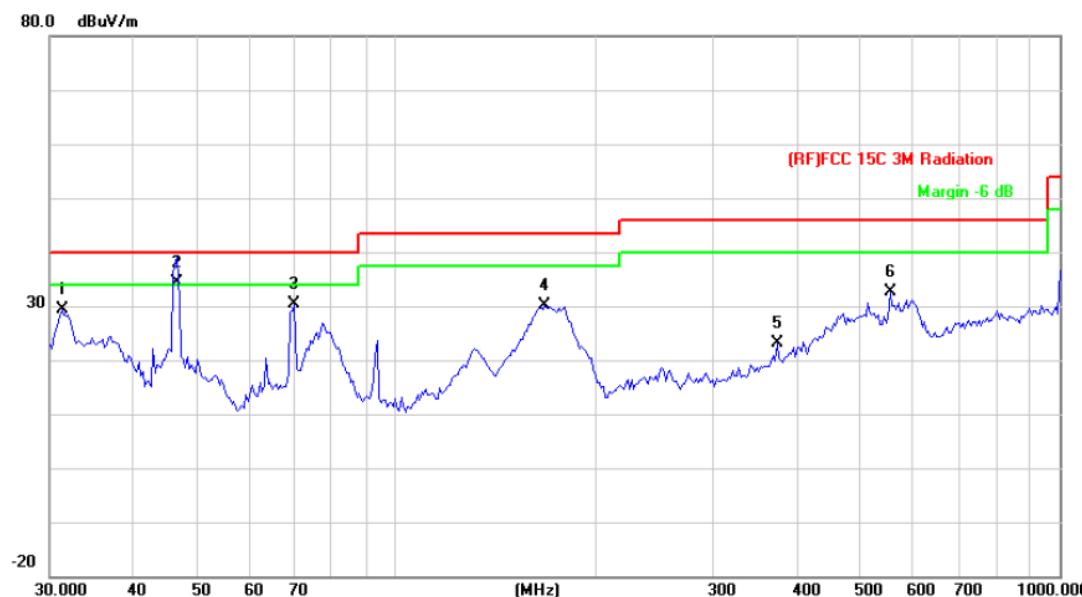

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1		31.2893	43.32	-13.91	29.41	40.00	-10.59 QP
2	*	46.6664	56.46	-21.96	34.50	40.00	-5.50 QP
3		70.0903	53.83	-23.39	30.44	40.00	-9.56 QP
4		167.2368	50.59	-20.56	30.03	43.50	-13.47 QP
5		374.6225	36.73	-13.49	23.24	46.00	-22.76 QP
6		554.8254	41.45	-8.87	32.58	46.00	-13.42 QP

\*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

-----END OF REPORT-----