

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		11590.32	29.54	21.90	51.44	68.30	-16.86	peak
2	*	11590.32	19.43	21.90	41.33	54.00	-12.67	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	11590.46	18.92	21.90	40.82	54.00	-13.18	AVG
2		11590.55	28.34	21.90	50.24	68.30	-18.06	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		11550.25	27.65	21.86	49.51	68.30	-18.79	peak
2	*	11550.25	17.25	21.86	39.11	54.00	-14.89	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		11550.42	28.24	21.86	50.10	68.30	-18.20	peak
2	*	11550.42	17.86	21.86	39.72	54.00	-14.28	AVG

Emission Level= Read Level+ Correct Factor

Attachment C-- Restricted Bands Requirement and Band-edge Test Data

(1) Radiation Test

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:			

110.0 dBuV/m

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


10.0

5000.000 5020.00 5040.00 5060.00 5080.00 5100.00 5120.00 5140.00 5160.00 5180.00 5200.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	41.61	13.54	55.15	68.30	-13.15	peak
2		5150.000	32.00	13.54	45.54	54.00	-8.46	AVG
3	X	5178.240	80.72	13.53	94.25	Fundamental Frequency		peak
4	*	5179.600	72.59	13.53	86.12	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)		
Remark:			

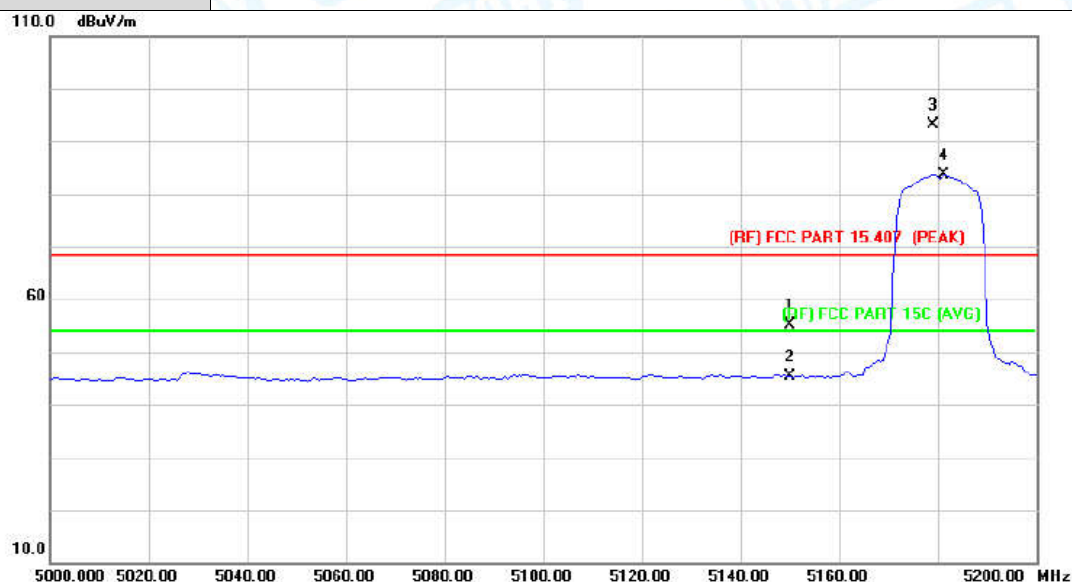

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	41.51	13.54	55.05	68.30	-13.25	peak
2		5150.000	31.73	13.54	45.27	54.00	-8.73	AVG
3	X	5179.040	79.59	13.53	93.12	Fundamental Frequency		peak
4	*	5181.200	70.19	13.53	83.72	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:			

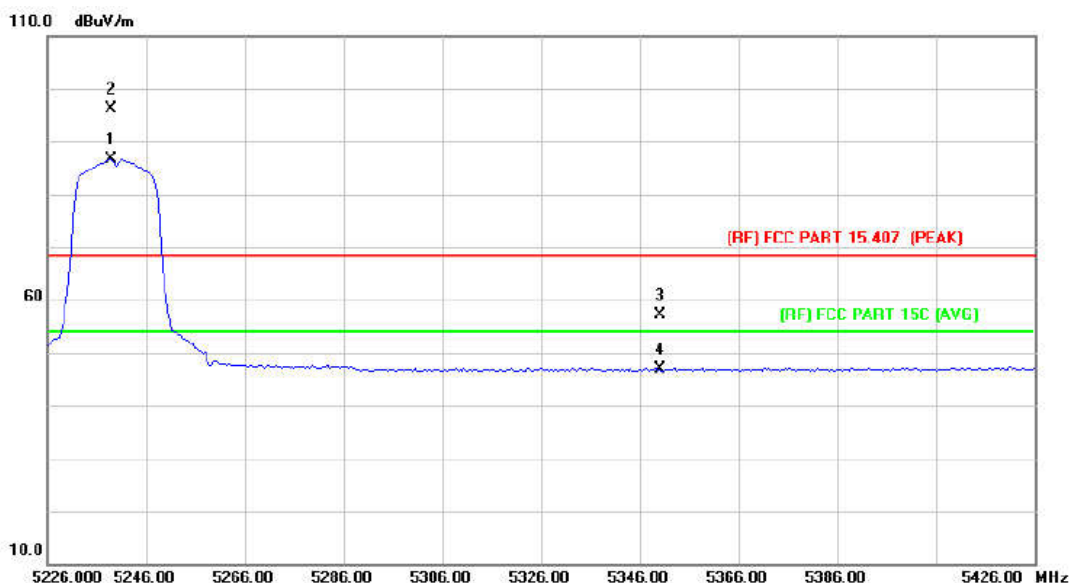

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	X	5238.800	73.06	13.47	86.53	Fundamental Frequency	AVG
2	*	5238.970	82.78	13.47	96.25	Fundamental Frequency	peak
3		5350.000	43.72	13.40	57.12	68.30	-11.18 peak
4		5350.000	33.56	13.40	46.96	68.30	-21.34 AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5240 MHz (U-NII-1)		
Remark:			

110.0 dBuV/m

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)

3 X

4 X


10.0

5226.00 5246.00 5266.00 5286.00 5306.00 5326.00 5346.00 5366.00 5386.00 5426.00 MHz

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5238.400	73.47	13.47	86.94	Fundamental Frequency		AVG
2	X	5238.970	80.78	13.47	94.25	Fundamental Frequency		peak
3		5350.000	40.81	13.40	54.21	68.30	-14.09	peak
4		5350.000	33.29	13.40	46.69	54.00	-7.31	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)		
Remark:			

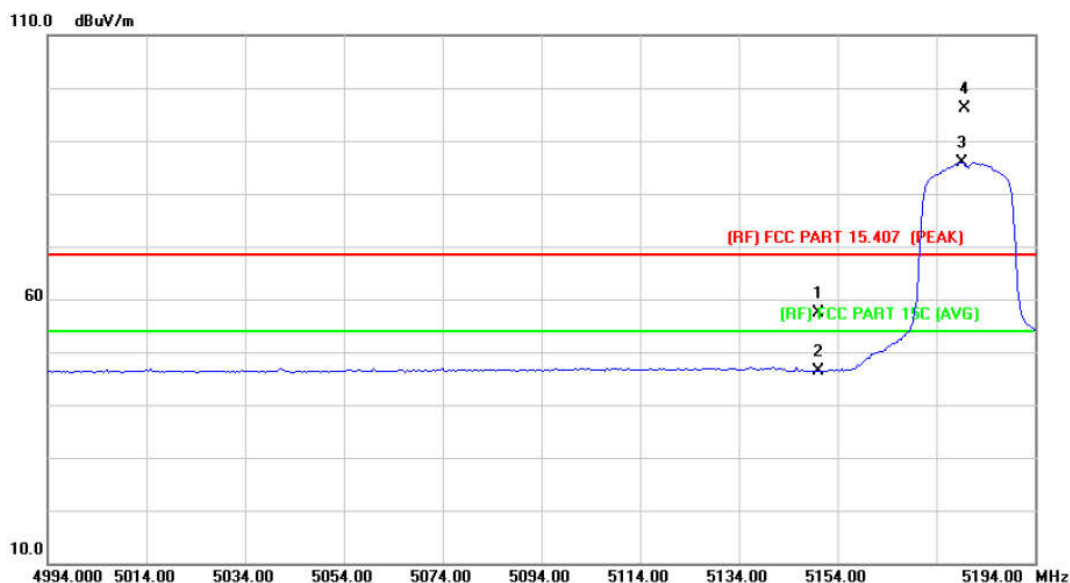

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	43.93	13.54	57.47	68.30	-10.83	peak
2		5150.000	32.88	13.54	46.42	54.00	-7.58	AVG
3	*	5179.200	72.44	13.53	85.97	Fundamental Frequency		AVG
4	X	5179.830	82.63	13.53	96.16	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)		
Remark:			

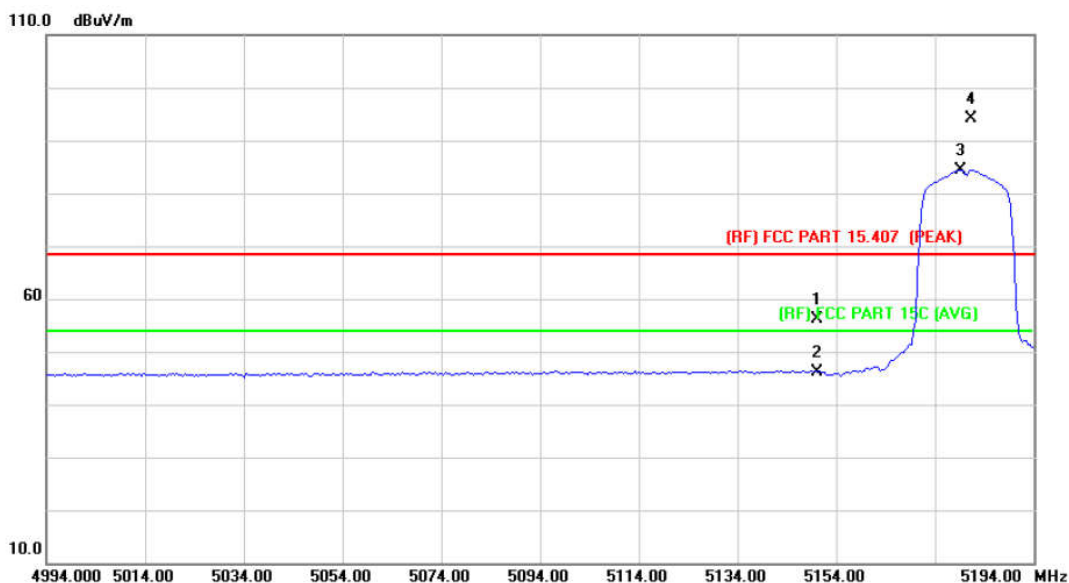

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.58	13.54	56.12	68.30	-12.18	peak
2		5150.000	32.56	13.54	46.10	54.00	-7.90	AVG
3	*	5179.200	70.90	13.53	84.43	Fundamental Frequency		AVG
4	X	5181.430	80.50	13.52	94.02	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
Remark:			

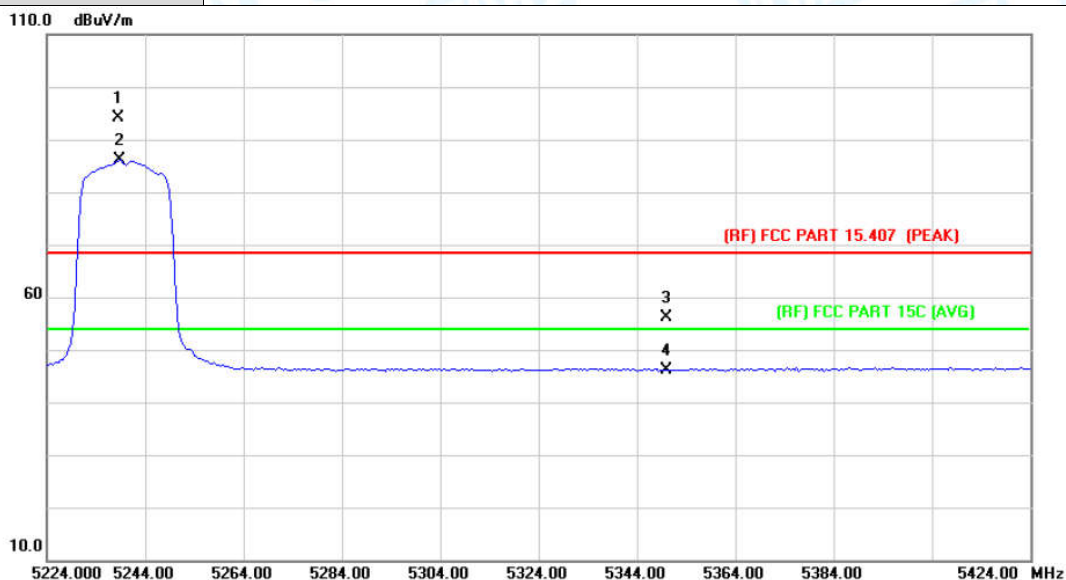

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5238.570	80.63	13.47	94.10	Fundamental Frequency		peak
2	*	5238.800	72.56	13.47	86.03	Fundamental Frequency		AVG
3		5350.000	42.72	13.40	56.12	68.30	-12.18	peak
4		5350.000	32.81	13.40	46.21	54.00	-7.79	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5240 MHz (U-NII-1)		
Remark:			

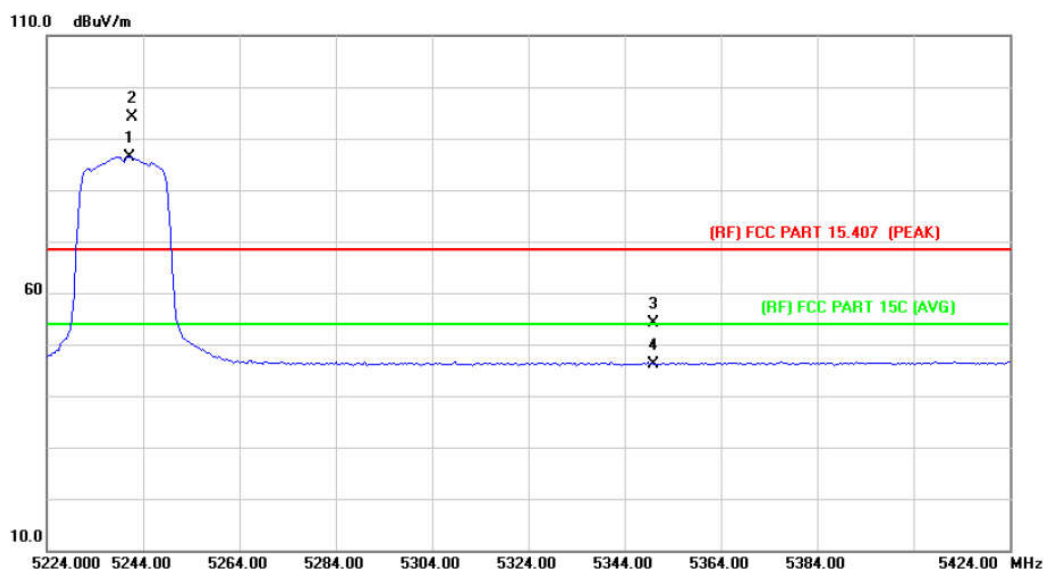

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5241.200	72.92	13.48	86.40	Fundamental Frequency		AVG
2	X	5241.760	80.54	13.48	94.02	Fundamental Frequency		peak
3		5350.000	40.72	13.40	54.12	68.30	-14.18	peak
4		5350.000	32.71	13.40	46.11	54.00	-7.89	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
Remark:			

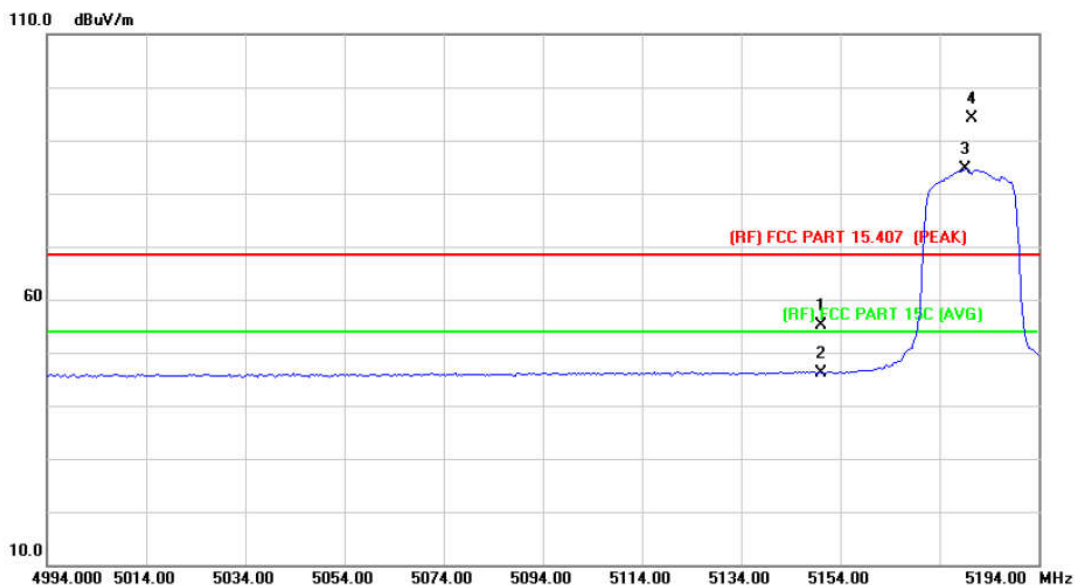

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.58	13.54	55.12	68.30	-13.18	peak
2		5150.000	32.65	13.54	46.19	54.00	-7.81	AVG
3	*	5179.200	71.00	13.53	84.53	Fundamental Frequency		AVG
4	X	5180.630	80.69	13.53	94.22	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)		
Remark:			

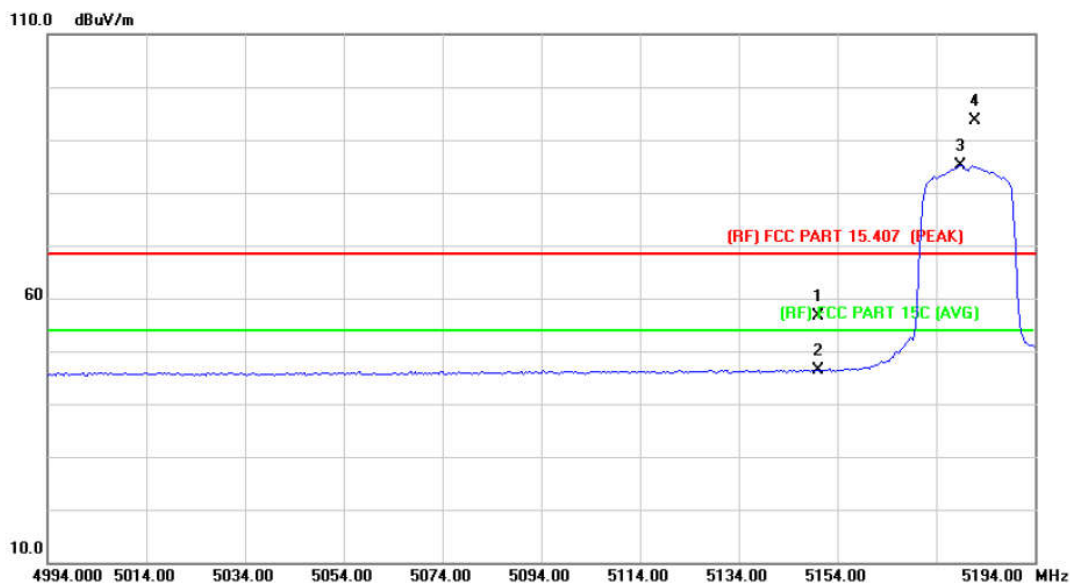

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.98	13.54	56.52	68.30	-11.78	peak
2		5150.000	32.76	13.54	46.30	54.00	-7.70	AVG
3	*	5178.800	71.57	13.53	85.10	Fundamental Frequency		AVG
4	X	5181.820	80.00	13.52	93.52	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
Remark:			

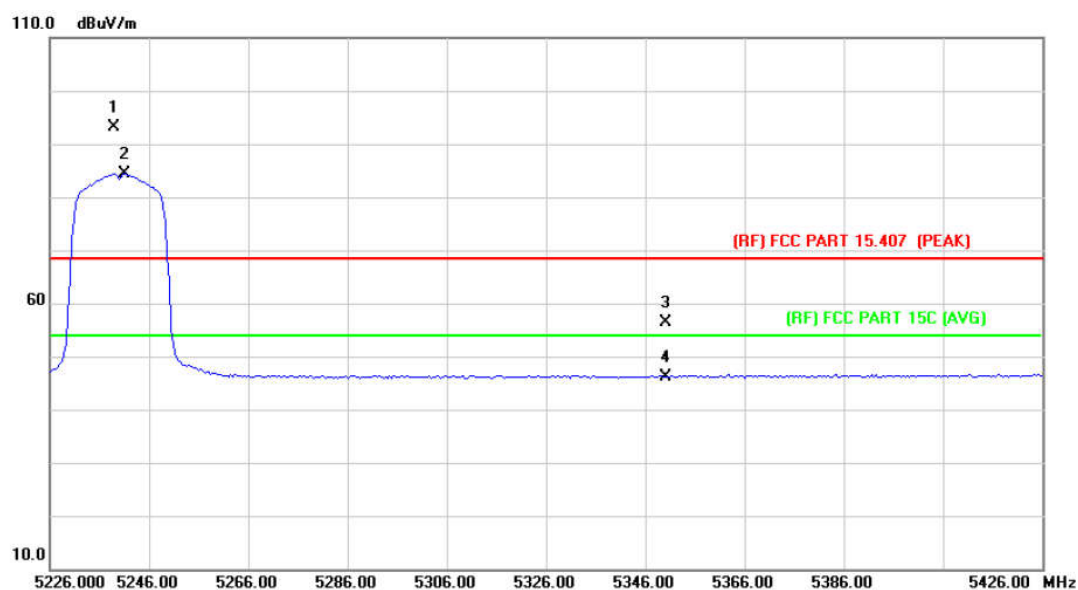

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	5238.970	79.75	13.47	93.22	Fundamental Frequency		peak
2	*	5241.200	70.94	13.48	84.42	Fundamental Frequency		AVG
3		5350.000	43.01	13.40	56.41	68.30	-11.89	peak
4		5350.000	32.70	13.40	46.10	54.00	-7.90	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5240 MHz (U-NII-1)		
Remark:			

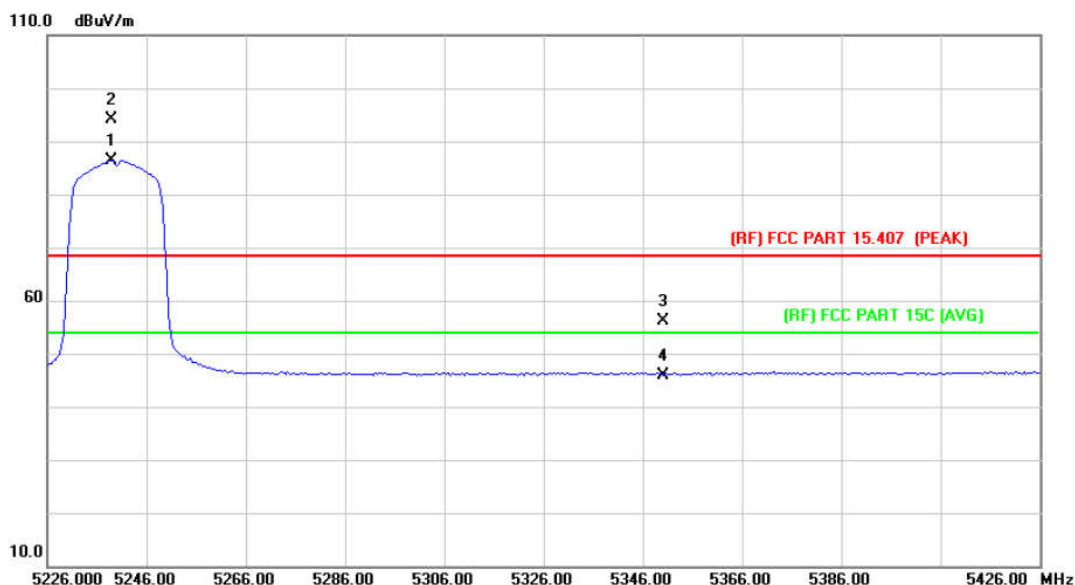

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5238.800	72.98	13.47	86.45	Fundamental Frequency		AVG
2	X	5238.970	80.75	13.47	94.22	Fundamental Frequency		peak
3		5350.000	42.75	13.40	56.15	68.30	-12.15	peak
4		5350.000	32.58	13.40	45.98	54.00	-8.02	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
Remark:			

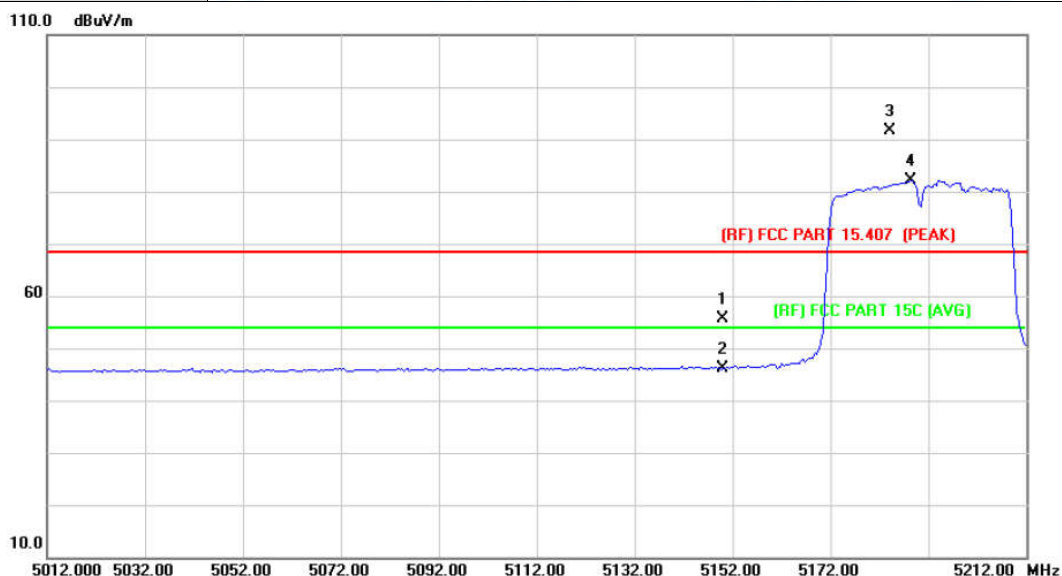

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	42.02	13.54	55.56	68.30	-12.74 peak
2		5150.000	32.68	13.54	46.22	54.00	-7.78 AVG
3	X	5184.260	78.03	13.52	91.55	Fundamental Frequency peak	
4	*	5188.400	68.60	13.51	82.11	Fundamental Frequency AVG	

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)		
Remark:			

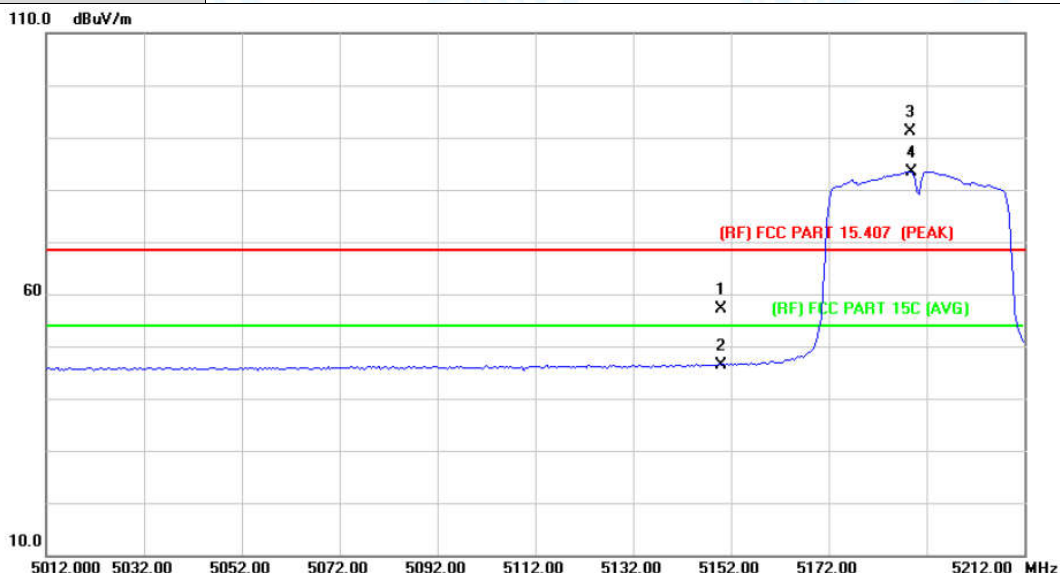

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		5150.000	43.61	13.54	57.15	68.30	-11.15 peak
2		5150.000	32.87	13.54	46.41	54.00	-7.59 AVG
3	X	5188.650	77.51	13.51	91.02	Fundamental Frequency peak	
4	*	5188.800	69.95	13.51	83.46	Fundamental Frequency AVG	

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:			

110.0 dBuV/m

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


10.0

5208.000 5228.00 5248.00 5268.00 5288.00 5308.00 5328.00 5348.00 5368.00 5408.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5228.560	77.71	13.49	91.20	Fundamental Frequency		peak
2	*	5231.600	70.33	13.48	83.81	Fundamental Frequency		AVG
3		5350.000	42.85	13.40	56.25	68.30	-12.05	peak
4		5350.000	32.85	13.40	46.25	54.00	-7.75	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5230 MHz (U-NII-1)		
Remark:			

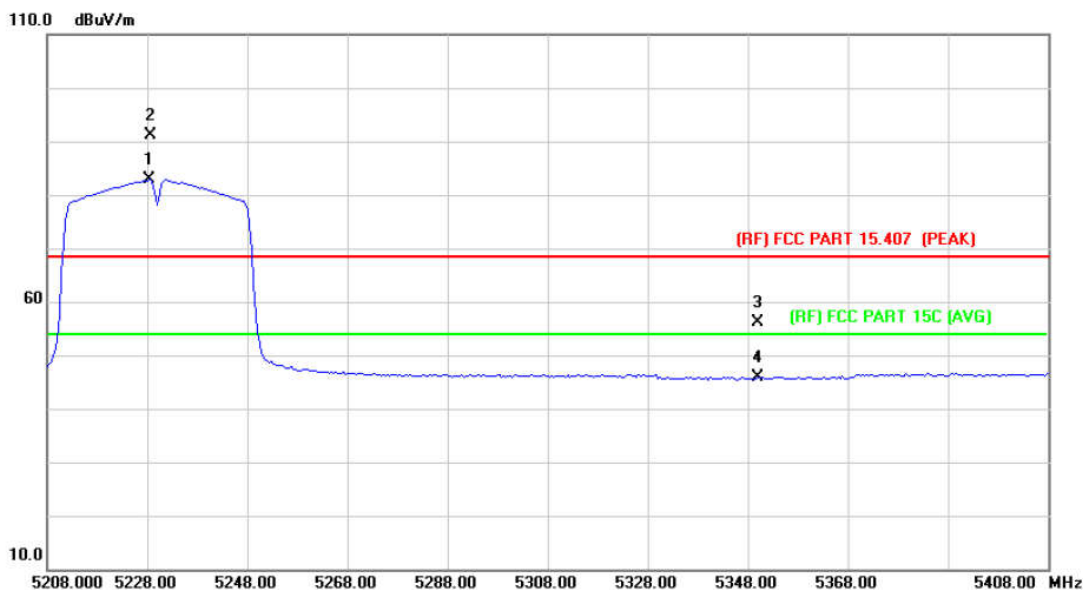

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	*	5228.400	69.30	13.49	82.79	Fundamental Frequency	
2	X	5228.560	77.52	13.49	91.01	Fundamental Frequency	
3		5350.000	42.61	13.40	56.01	68.30	-12.29
4		5350.000	32.49	13.40	45.89	54.00	-8.11

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
Remark:			

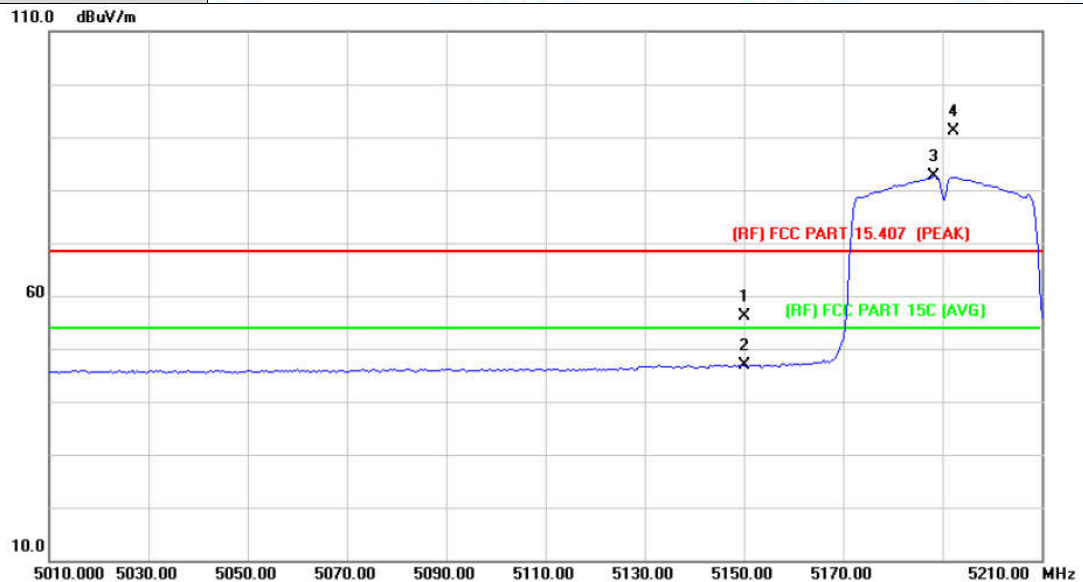

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.47	13.54	56.01	68.30	-12.29	peak
2		5150.000	33.33	13.54	46.87	54.00	-7.13	AVG
3	*	5188.400	69.09	13.51	82.60	Fundamental Frequency		AVG
4	X	5192.240	77.53	13.51	91.04	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)		
Remark:			

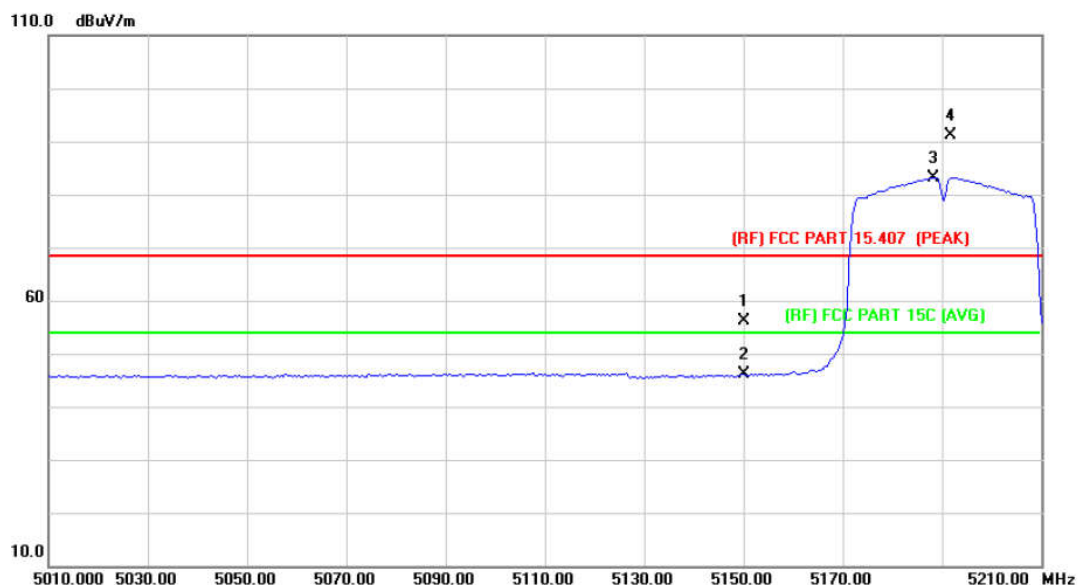

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.61	13.54	56.15	68.30	-12.15	peak
2		5150.000	32.59	13.54	46.13	54.00	-7.87	AVG
3	*	5188.400	69.72	13.51	83.23	Fundamental Frequency		AVG
4	X	5191.840	77.52	13.51	91.03	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
Remark:			

110.0 dBuV/m

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


10.0

5206.00 5226.00 5246.00 5266.00 5286.00 5306.00 5326.00 5346.00 5366.00 5406.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5228.000	68.32	13.49	81.81	Fundamental Frequency		AVG
2	X	5228.160	76.72	13.49	90.21	Fundamental Frequency		peak
3		5350.000	41.85	13.40	55.25	68.30	-13.05	peak
4		5350.000	32.27	13.40	45.67	54.00	-8.33	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5230 MHz (U-NII-1)		
Remark:			

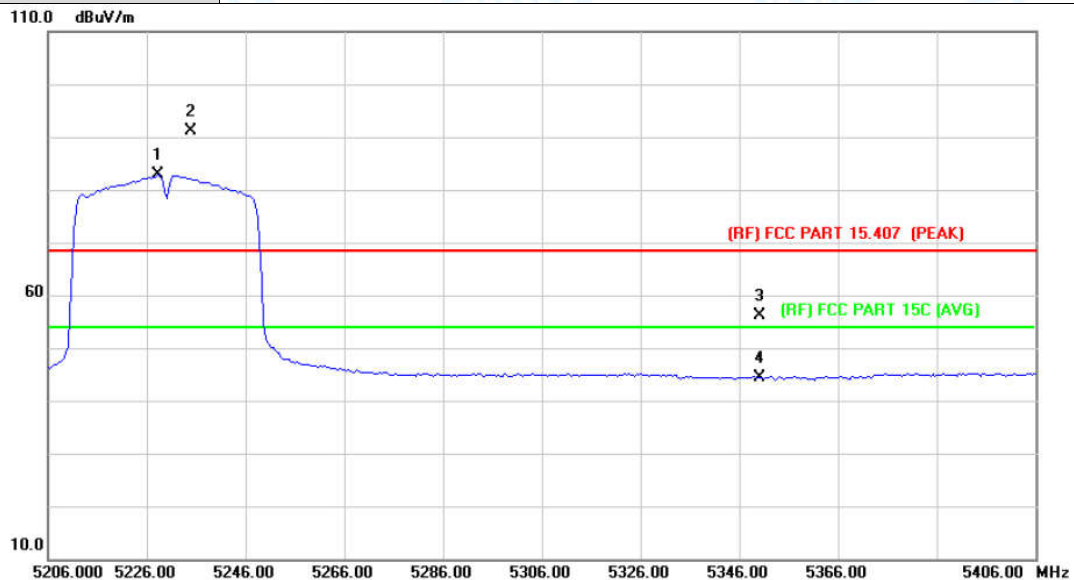

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5228.400	69.29	13.49	82.78	Fundamental Frequency		AVG
2	X	5234.940	77.53	13.48	91.01	Fundamental Frequency		peak
3		5350.000	42.61	13.40	56.01		-12.29	peak
4		5350.000	31.09	13.40	44.49		-9.51	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:			

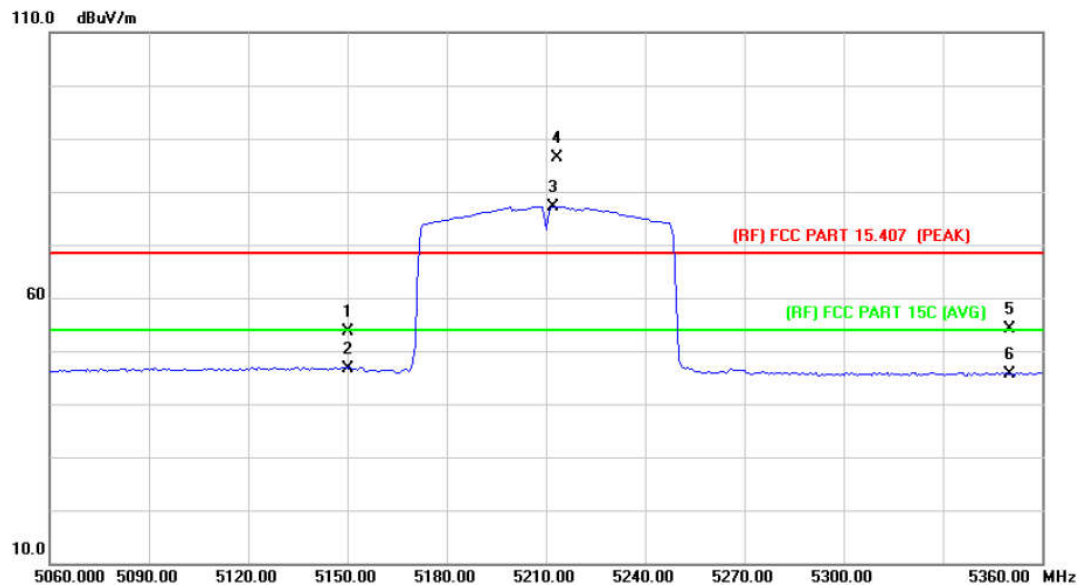

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	40.08	13.54	53.62	68.30	-14.68	peak
2		5150.000	33.17	13.54	46.71	54.00	-7.29	AVG
3	*	5212.400	63.74	13.49	77.23	54.00	23.23	AVG
4	X	5213.590	72.82	13.49	86.31	Fundamental Frequency		peak
5		5350.000	40.67	13.40	54.07	68.30	-14.23	peak
6		5350.000	32.33	13.40	45.73	54.00	-8.27	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)		
Remark:			

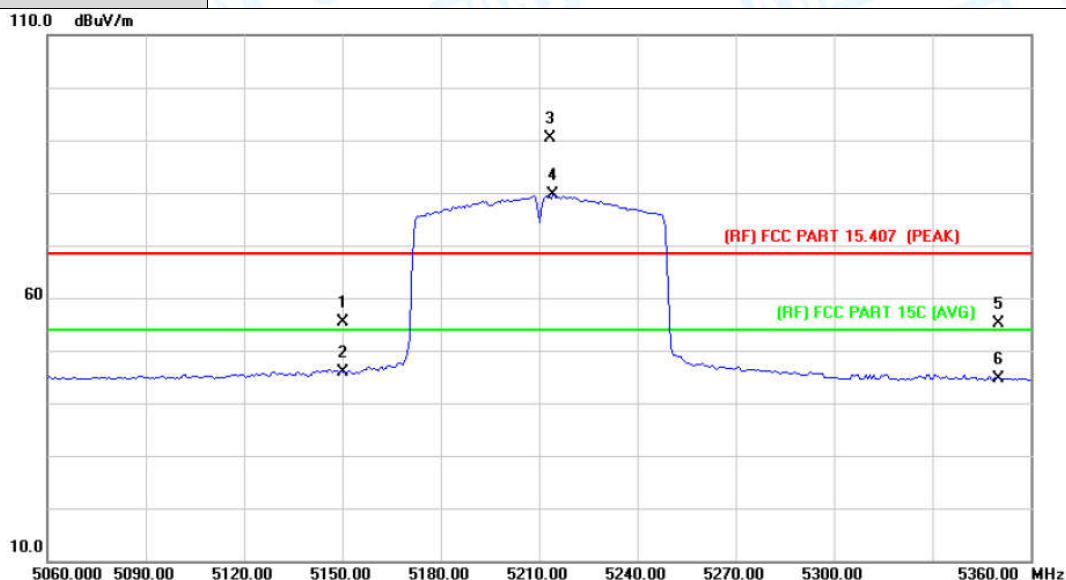

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.83	13.54	55.37	68.30	-12.93	peak
2		5150.000	32.40	13.54	45.94	54.00	-8.06	AVG
3	X	5213.590	76.86	13.49	90.35	Fundamental Frequency		peak
4	*	5214.200	66.25	13.49	79.74	54.00	25.74	AVG
5		5350.000	41.82	13.40	55.22	68.30	-13.08	peak
6		5350.000	31.20	13.40	44.60	54.00	-9.40	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5260 MHz (U-NII-2A)		
Remark:			

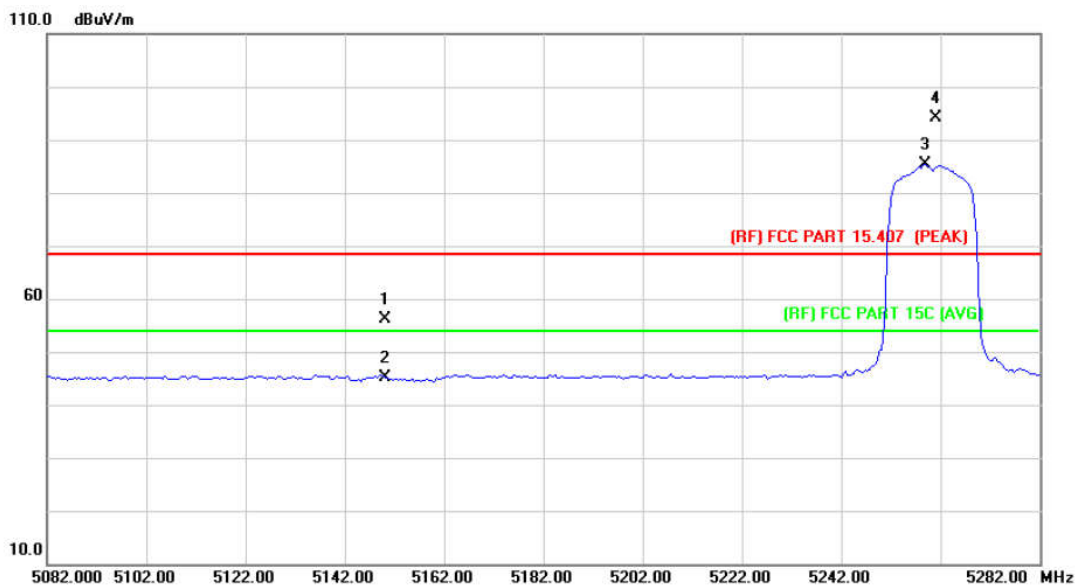

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	42.58	13.54	56.12	68.30	-12.18	peak
2		5150.000	31.65	13.54	45.19	54.00	-8.81	AVG
3	*	5258.800	71.86	13.46	85.32	Fundamental Frequency		AVG
4	X	5261.040	80.65	13.47	94.12	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5260 MHz (U-NII-2A)		
Remark:			

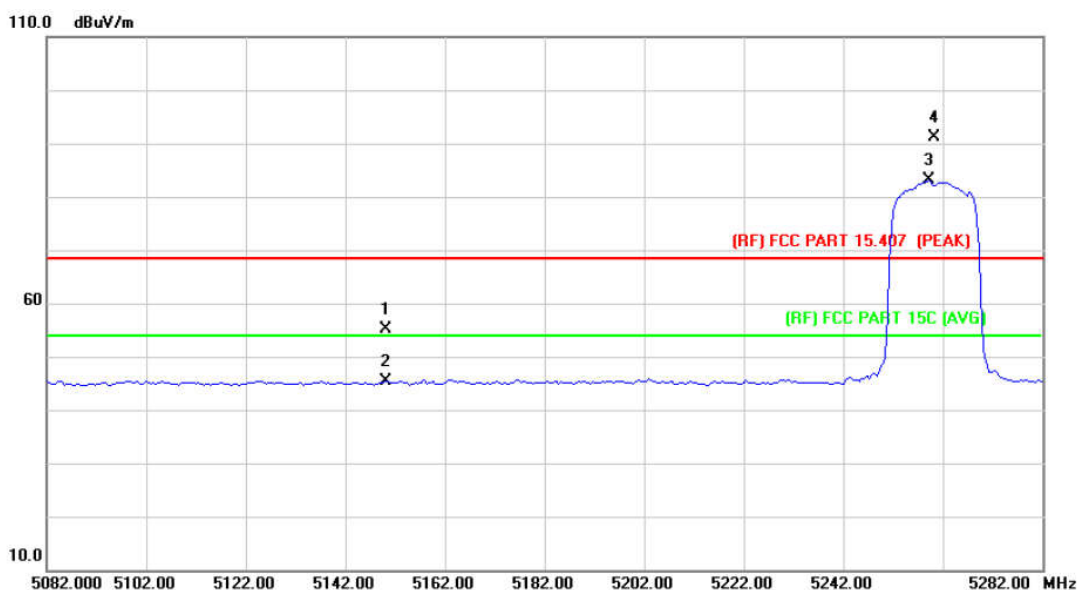

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.61	13.54	55.15	68.30	-13.15	peak
2		5150.000	31.72	13.54	45.26	54.00	-8.74	AVG
3	*	5259.200	69.65	13.46	83.11	Fundamental Frequency		AVG
4	X	5260.240	77.72	13.46	91.18	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)		
Remark:			

110.0 dBuV/m

60

3 X

4 X


10.0

5288.000 5308.00 5328.00 5348.00 5368.00 5388.00 5408.00 5428.00 5448.00 5488.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	5318.800	70.94	13.42	84.36	Fundamental Frequency	5	AVG
2	X	5322.530	79.00	13.41	92.41	Fundamental Frequency	1	peak
3		5350.000	42.22	13.40	55.62		-12.68	peak
4		5350.000	31.60	13.40	45.00		-9.00	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)		
Remark:			

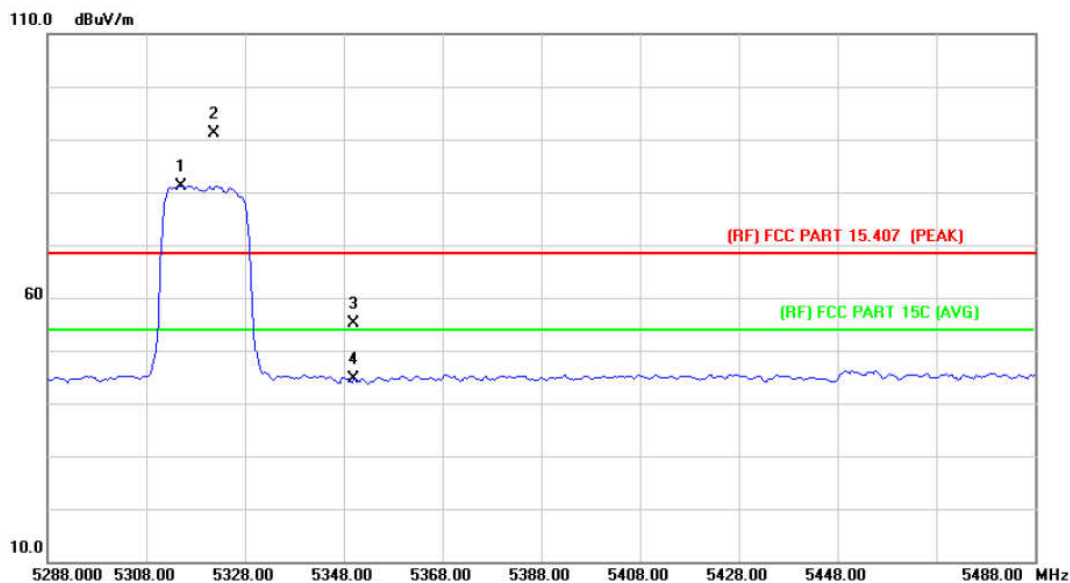

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5315.200	67.82	13.42	81.24	Fundamental Frequency		AVG
2	X	5321.730	77.69	13.41	91.10	Fundamental Frequency		peak
3		5350.000	41.82	13.40	55.22	68.30	-13.08	peak
4		5350.000	31.30	13.40	44.70	54.00	-9.30	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

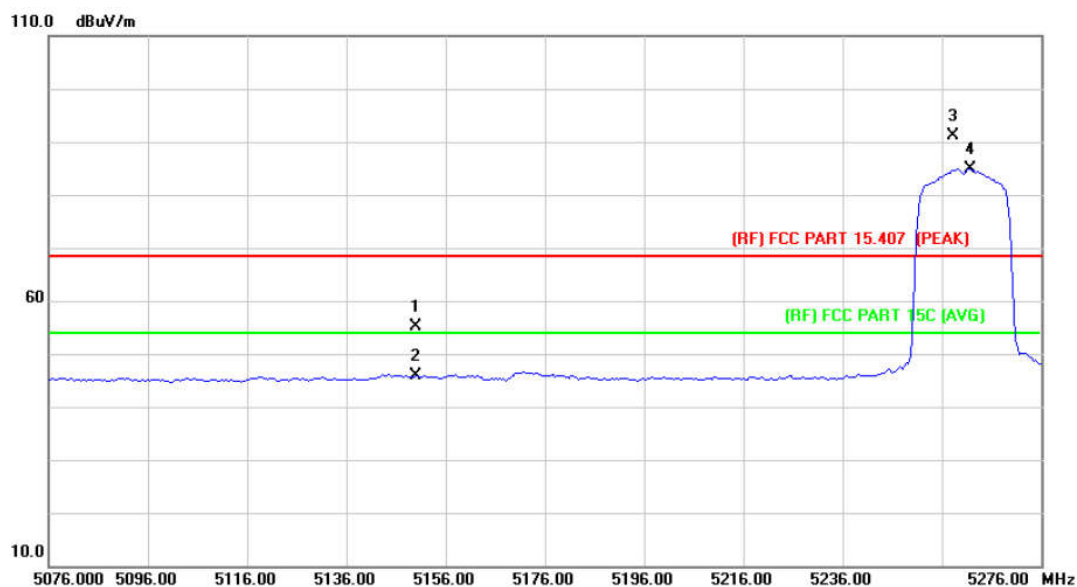

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.59	13.54	55.13	68.30	-13.17	peak
2		5150.000	32.22	13.54	45.76	54.00	-8.24	AVG
3	X	5258.240	77.79	13.46	91.25	Fundamental Frequency		peak
4	*	5261.600	71.40	13.47	84.87	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

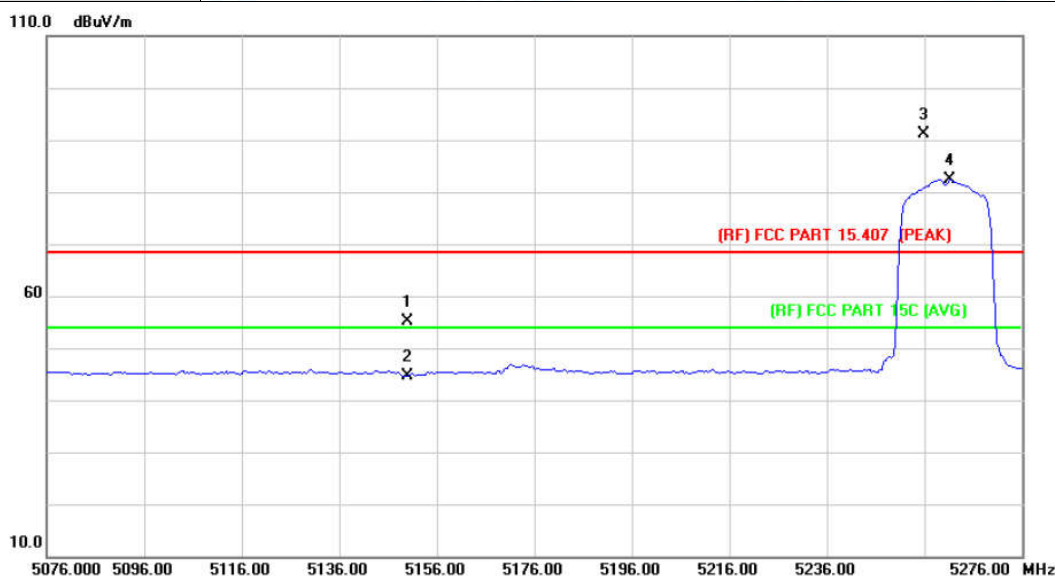

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.48	13.54	55.02	68.30	-13.28	peak
2		5150.000	31.17	13.54	44.71	54.00	-9.29	AVG
3	X	5255.840	77.54	13.47	91.01	Fundamental Frequency		peak
4	*	5261.200	69.02	13.47	82.49	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

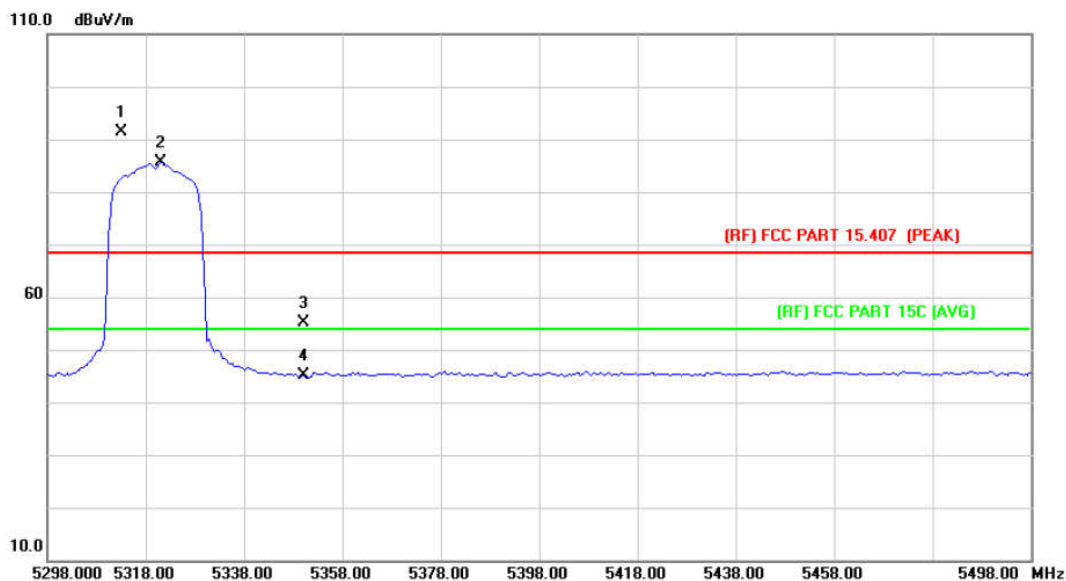

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5312.970	77.84	13.42	91.26	Fundamental Frequency		peak
2	*	5321.200	72.11	13.41	85.52	Fundamental Frequency		AVG
3		5350.000	41.71	13.40	55.11	68.30	-13.19	peak
4		5350.000	31.61	13.40	45.01	54.00	-8.99	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

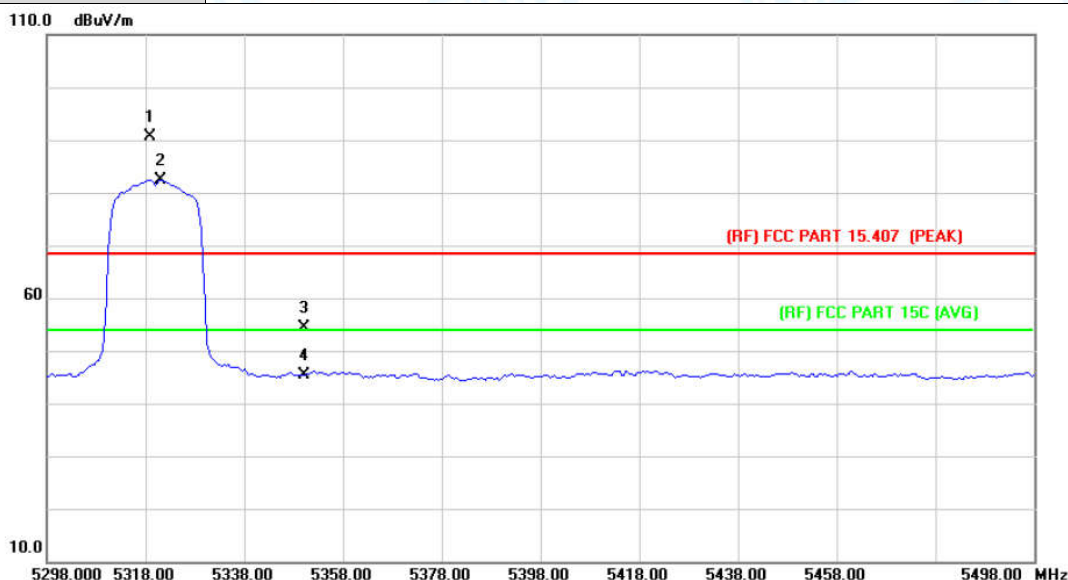

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	X	5318.960	77.13	13.41	90.54	Fundamental Frequency	peak
2	*	5321.200	69.06	13.41	82.47	Fundamental Frequency	AVG
3		5350.000	41.08	13.40	54.48	68.30	-13.82 peak
4		5350.000	31.93	13.40	45.33	54.00	-8.67 AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

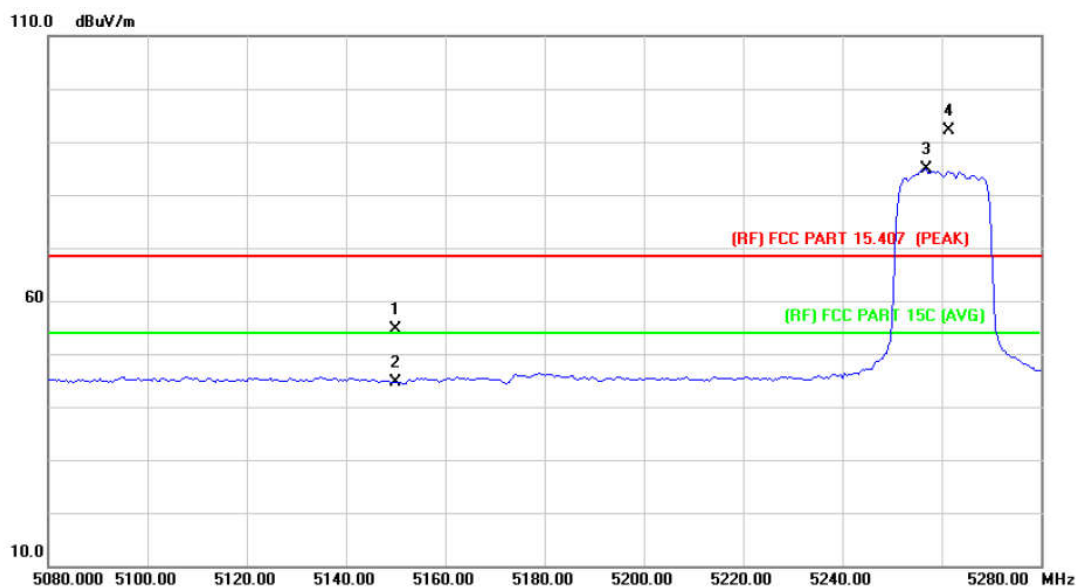

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5150.000	41.14	13.54	54.68	68.30	-13.62	peak
2		5150.000	31.16	13.54	44.70	54.00	-9.30	AVG
3	*	5256.800	71.37	13.46	84.83	Fundamental Frequency 3		AVG
4	X	5261.440	78.54	13.47	92.01	Fundamental Frequency 1		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5260 MHz (U-NII-2A)		
Remark:			

110.0 dBuV/m

60


10.0

5080.00 5100.00 5120.00 5140.00 5160.00 5180.00 5200.00 5220.00 5240.00 5280.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		5150.000	41.59	13.54	55.13	68.30	-13.17	peak
2		5150.000	31.03	13.54	44.57	54.00	-9.43	AVG
3	X	5261.440	77.68	13.47	91.15	Fundamental Frequency		peak
4	*	5262.400	68.22	13.46	81.68	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

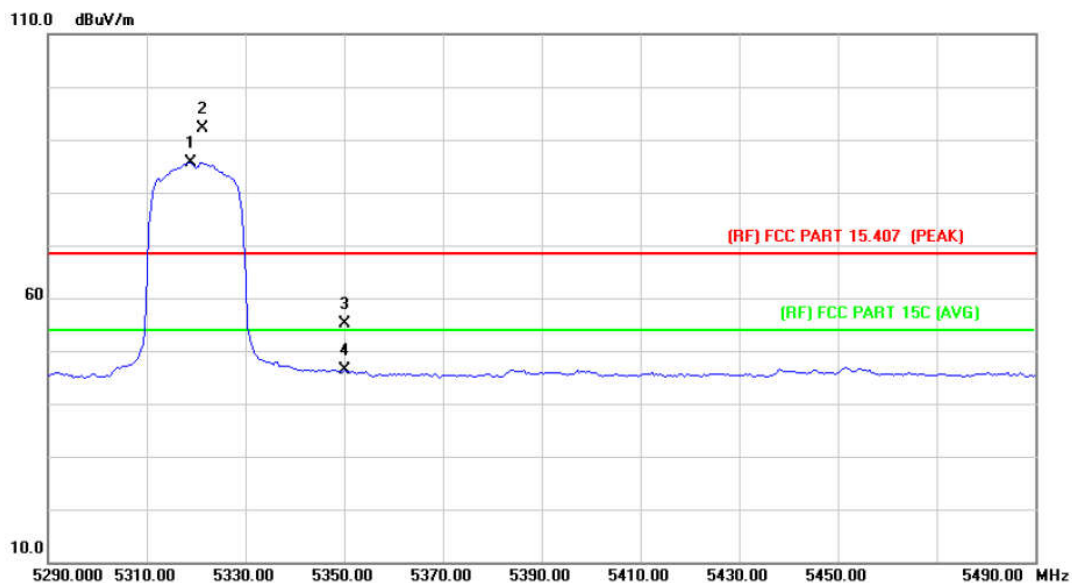

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5318.800	72.22	13.42	85.64	Fundamental Frequency		AVG
2	X	5321.340	78.72	13.41	92.13	Fundamental Frequency		peak
3		5350.000	41.75	13.40	55.15	68.30	-13.15	peak
4		5350.000	32.86	13.40	46.26	54.00	-7.74	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)		
Remark:			

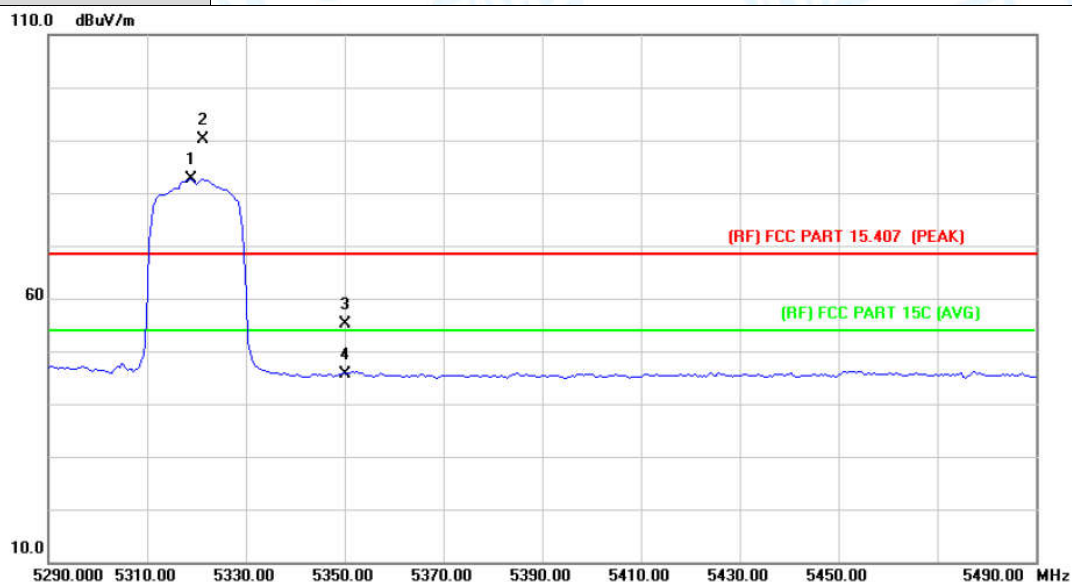

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5318.800	69.22	13.42	82.64	Fundamental Frequency		AVG
2	X	5321.340	76.60	13.41	90.01	Fundamental Frequency		peak
3		5350.000	41.73	13.40	55.13	68.30	-13.17	peak
4		5350.000	32.32	13.40	45.72	54.00	-8.28	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

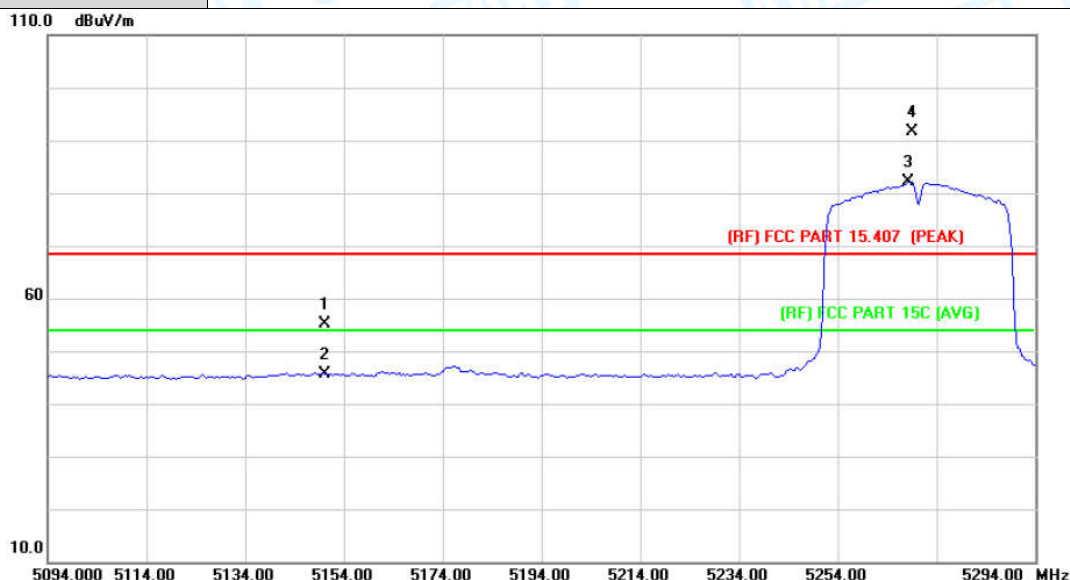

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.59	13.54	55.13	68.30	-13.17	peak
2		5150.000	32.20	13.54	45.74	54.00	-8.26	AVG
3	*	5268.400	68.75	13.46	82.21	Fundamental Frequency		AVG
4	X	5269.050	78.07	13.45	91.52	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

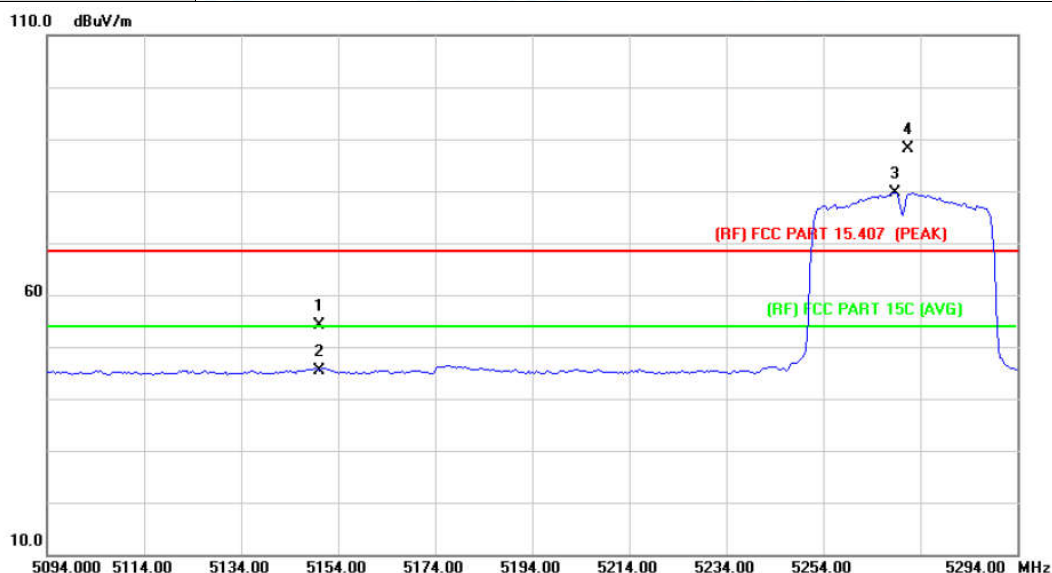

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	40.59	13.54	54.13	68.30	-14.17	peak
2		5150.000	31.85	13.54	45.39	54.00	-8.61	AVG
3	*	5268.800	66.12	13.46	79.58	Fundamental Frequency		AVG
4	X	5271.450	74.68	13.45	88.13	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

110.0 dBuV/m

60

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


10.0

5280.00 5300.00 5320.00 5340.00 5360.00 5380.00 5400.00 5420.00 5440.00 5480.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	5308.000	71.55	13.43	84.98	Fundamental Frequency		AVG
2	X	5308.940	77.70	13.43	91.13	Fundamental Frequency		peak
3		5350.000	43.06	13.40	56.46	68.30	-11.84	peak
4		5350.000	33.35	13.40	46.75	54.00	-7.25	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

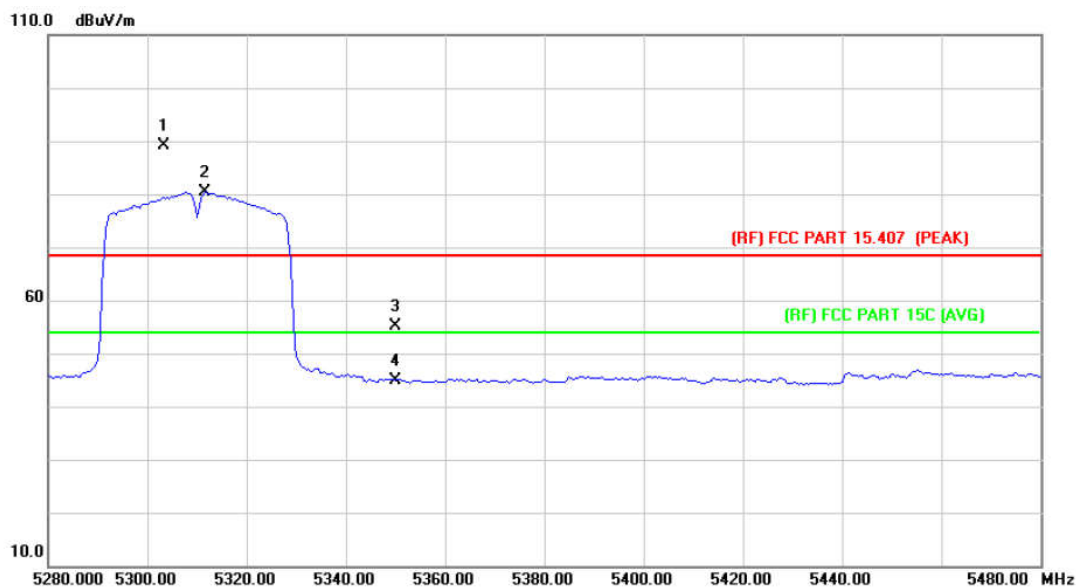

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	X	5303.350	75.69	13.44	89.13	Fundamental Frequency		peak
2	*	5311.600	66.93	13.43	80.36	Fundamental Frequency		AVG
3		5350.000	41.74	13.40	55.14	68.30	-13.16	peak
4		5350.000	31.48	13.40	44.88	54.00	-9.12	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

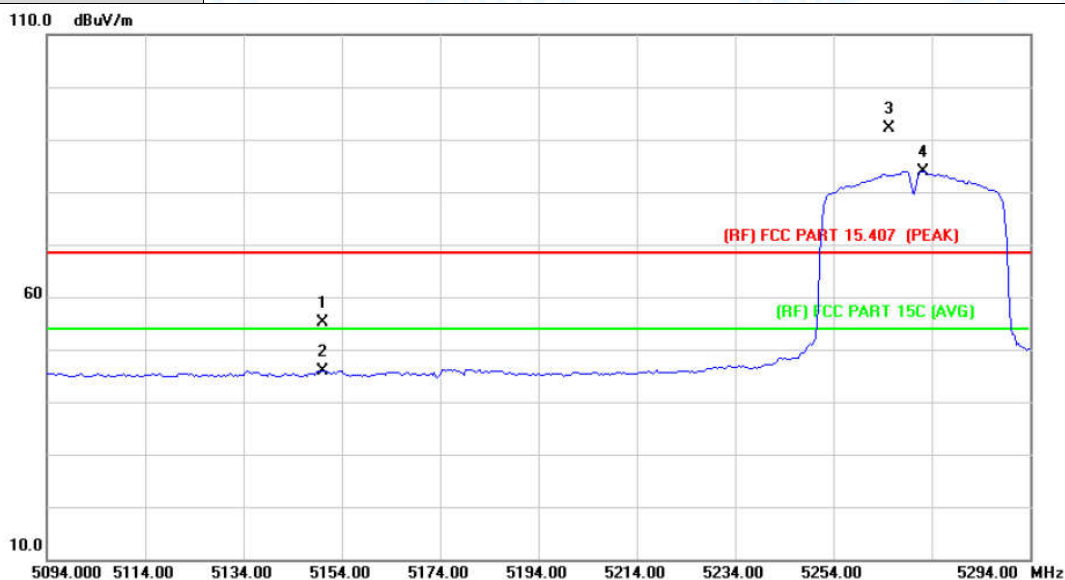

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.60	13.54	55.14	68.30	-13.16	peak
2		5150.000	32.22	13.54	45.76	54.00	-8.24	AVG
3	X	5265.460	78.67	13.46	92.13	Fundamental Frequency		peak
4	*	5272.400	70.54	13.45	83.99	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5270 MHz (U-NII-2A)		
Remark:			

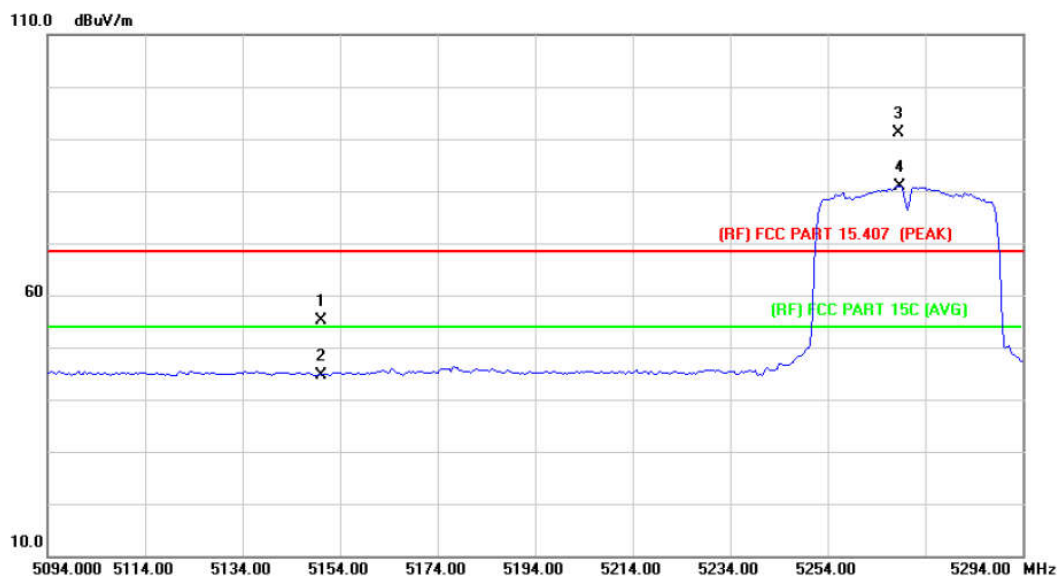

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.59	13.54	55.13	68.30	-13.17	peak
2		5150.000	31.20	13.54	44.74	54.00	-9.26	AVG
3	X	5268.650	77.56	13.46	91.02	Fundamental Frequency		peak
4	*	5268.800	67.40	13.46	80.86	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

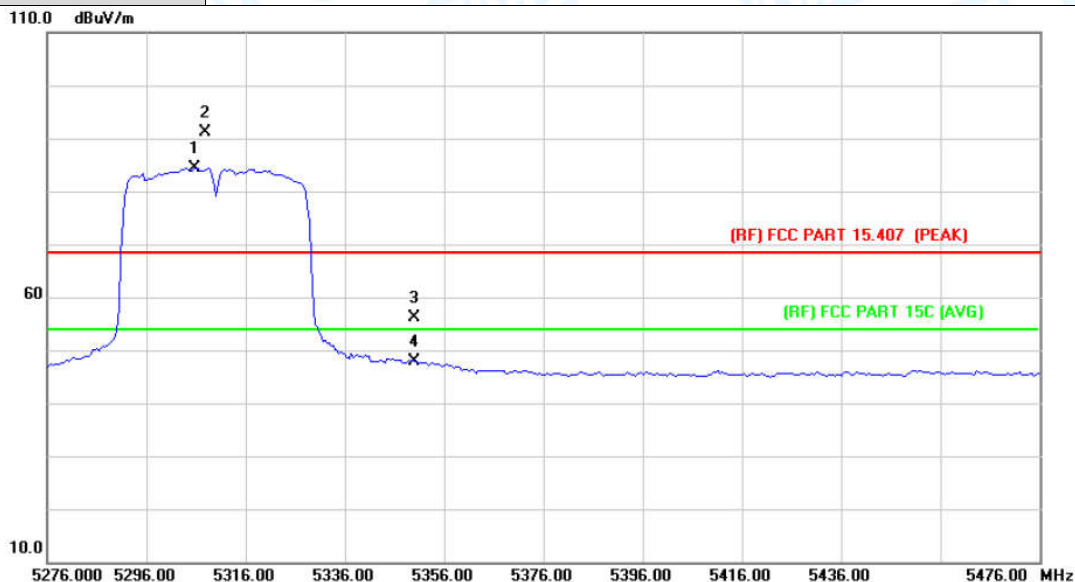

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	5305.600	71.04	13.44	84.48	Fundamental Frequency		AVG
2	X	5307.740	77.70	13.43	91.13	Fundamental Frequency		peak
3		5350.000	42.75	13.40	56.15	68.30	-12.15	peak
4		5350.000	34.54	13.40	47.94	54.00	-6.06	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)		
Remark:			

110.0 dBuV/m

60

3 X

4 X

(RF) FCC PART 15.407 (PEAK)

(RF) FCC PART 15C (AVG)


10.0

5276.000 5296.00 5316.00 5336.00 5356.00 5376.00 5396.00 5416.00 5436.00 5476.00 MHz

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1	*	5312.000	69.01	13.43	82.44	Fundamental Frequency	AVG
2	X	5312.530	77.70	13.42	91.12	Fundamental Frequency	peak
3		5350.000	41.75	13.40	55.15	68.30	-13.15 peak
4		5350.000	32.29	13.40	45.69	54.00	-8.31 AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz(U-NII-2A)		
Remark:			

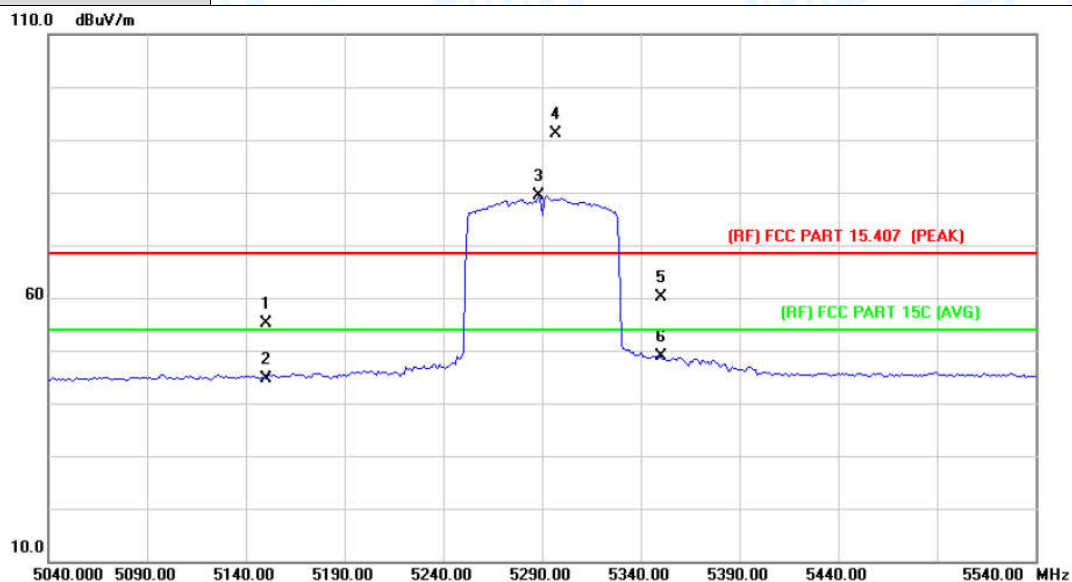

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	41.64	13.54	55.18	68.30	-13.12	peak
2		5150.000	30.97	13.54	44.51	54.00	-9.49	AVG
3	*	5288.000	65.87	13.44	79.31	54.00	25.31	AVG
4	X	5297.000	77.70	13.43	91.13	Fundamental Frequency		peak
5		5350.000	46.80	13.40	60.20	68.30	-8.10	peak
6		5350.000	35.58	13.40	48.98	54.00	-5.02	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)		
Remark:			

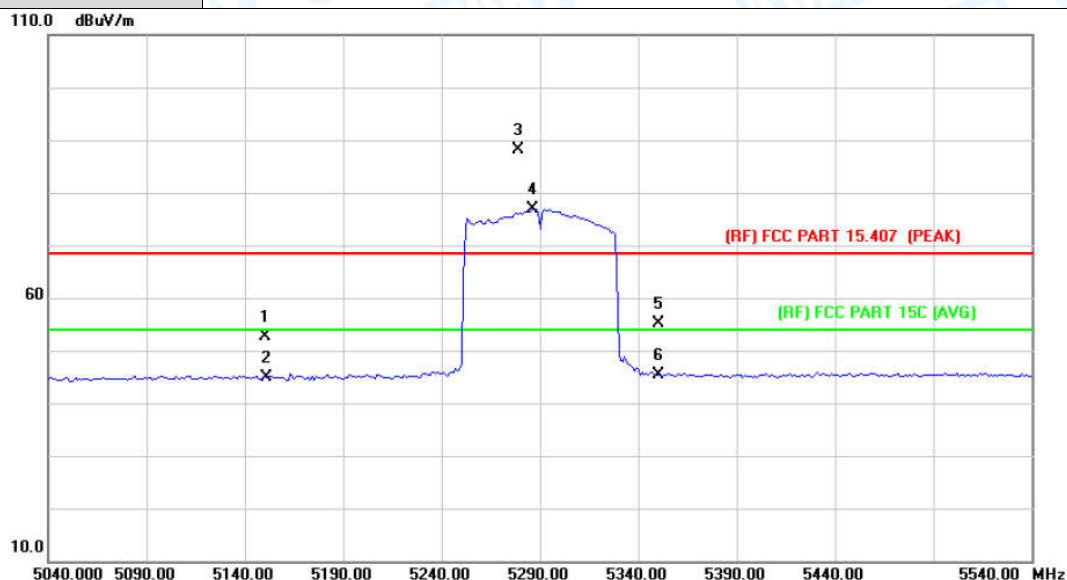

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5150.000	39.00	13.54	52.54	68.30	-15.76	peak
2		5151.000	31.38	13.54	44.92	54.00	-9.08	AVG
3	X	5279.000	74.70	13.45	88.15	Fundamental Frequency		peak
4	*	5286.000	63.47	13.45	76.92	54.00	22.92	AVG
5		5350.000	41.73	13.40	55.13	68.30	-13.17	peak
6		5350.000	31.94	13.40	45.34	54.00	-8.66	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Horizontal		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

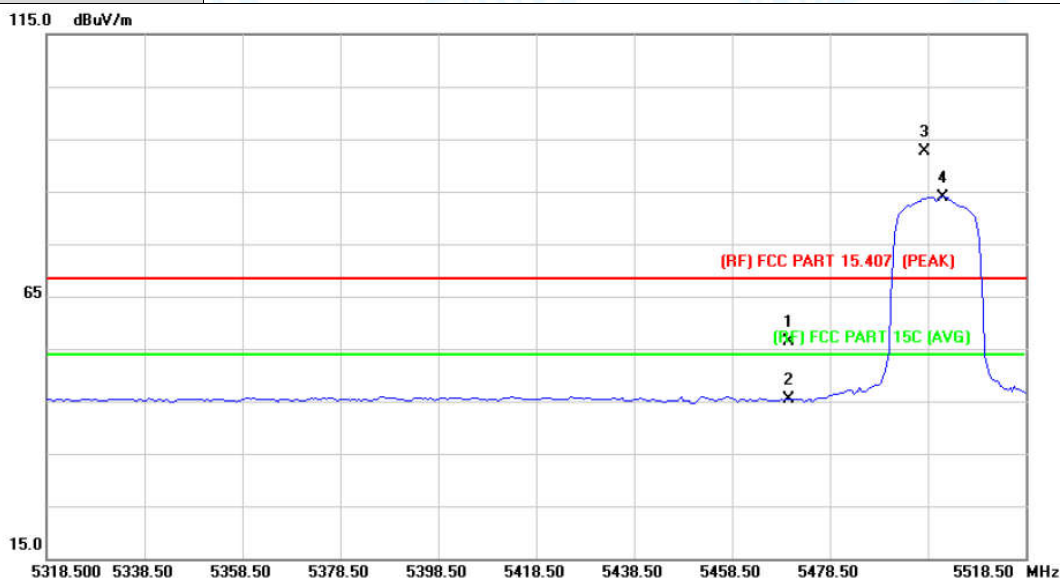

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		5470.000	43.15	13.31	56.46	68.30	-11.84	peak
2		5470.000	32.16	13.31	45.47	54.00	-8.53	AVG
3	X	5497.940	79.24	13.29	92.53	Fundamental Frequency		peak
4	*	5501.700	70.71	13.29	84.00	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 3.8V		
Ant. Pol.	Vertical		
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)		
Remark:			

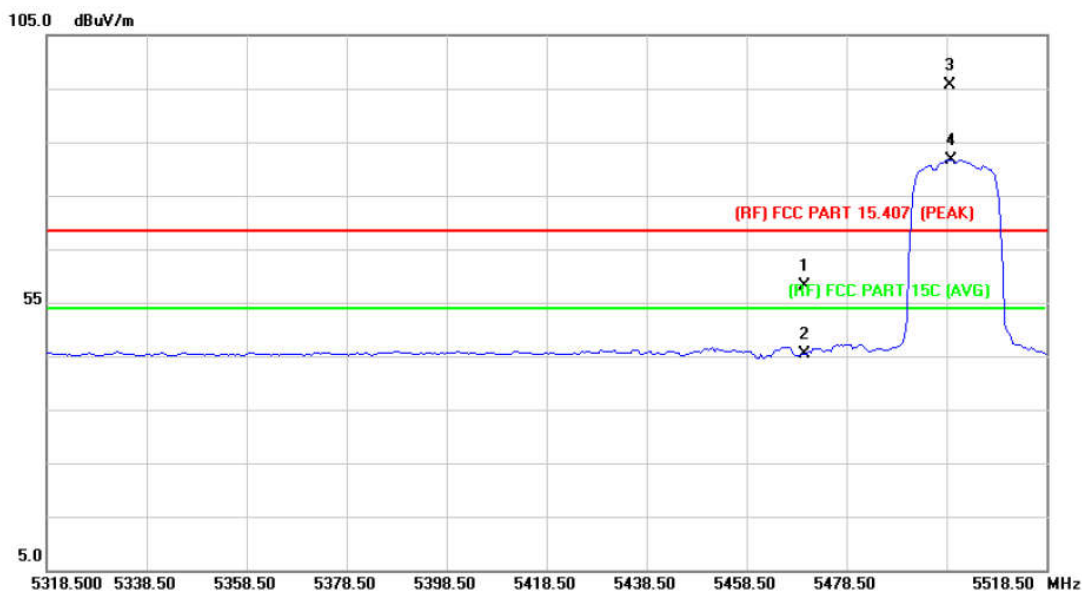

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		5470.000	44.84	13.31	58.15	68.30	-10.15	peak
2		5470.000	31.97	13.31	45.28	54.00	-8.72	AVG
3	X	5499.140	82.34	13.29	95.63	Fundamental Frequency		peak
4	*	5499.300	68.44	13.29	81.73	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor