

TEST REPORT

: MiMOMax Wireless Limited **APPLICANT**

PRODUCT NAME : 700MHz Upper A Block Pyxis Transceiver

MODEL NAME : MWL-PYXIS-*H A/B/C*

BRAND NAME : MiMOMax Wireless

STANDARD(S) : 47 CFR Part 15 Subpart A and B

TEST DATE : 2017-12-25 to 2018-01-11

ISSUE DATE : 2018-01-15

Tested by:

Wen Zhichao(Test Engineer)

Wen Zhichao

Approved by:

Andy Yeh(Technical Director)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information
1.1. Applicant and Manufacturer Information······
1.2. Equipment Under Test (EUT) Description
2. Test Results······
2.1. Applied Reference Documents
2.2. EUT Setup and Operating Conditions
3. 47 CFR Part 15B Requirements ····································
3.1. Radiated Emission
3.2. Antenna Terminal Disturbance ······· 10
Annex A Photographs of Test Setup1
Annex B Test Uncertainty······ 20
Annex C Testing Laboratory Information2

Change History						
Issue Date Reason for change						
1.0	2018-01-09	First edition				
1.1	1.1 2018-01-11 Addclause 15.111					
1.2	2018-01-13	Add test pictures				



1.Technical Information

Note: Provide by applicant

1.1. Applicant and Manufacturer Information

Applicant:	MiMOMax Wireless Limited		
ApplicantAddress:	540 Wairakei Road, Christchurch, 8053 New Zealand		
Manufacturer:	MiMOMax Wireless Limited		
ManufacturerAddress:	540 Wairakei Road, Christchurch, 8053 New Zealand		

1.2. Equipment Under Test (EUT) Description

EUT Type:	700MHz Upper A Block Pyxis Transceiver
Serial No:	23002476
Hardware Version:	MWL-PYXIS-BHCA-IP010/Digital-IP002/RF-IP006
Software Version:	02.00.52
Tx Frequency:	757 MHz-758MHz;787 MHz -788MHz
Rx Frequency:	757 MHz -758MHz;787 MHz -788MHz
Operating Voltage:	10.5-60Vdc(Isolated)

Note: For a more detailed description, please refer to specification or user'smanual supplied by the applicant and/or manufacturer.



2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart A and B:

No.	Identity	Document Title			
1	47 CFR Part 15	Radio Frequency Devices			

Test detailed items/section required by FCC rules and results are listed as below:

No.	Section	Description	Test Date	Test Engineer	Result			
		Equipment	Receiver contained within a FCC Part 27					
1	15.101	authorization	transceiver that has been certified. The					
		requirement	receiver has	therefore been ver	ified.			
2	15.103	Exempted devices	Device is not exempt as it is a receiver that					
	15.105	Exempled devices	contains a digital device					
3	15.107	Conducted Emission	Not applicable					
4	15.109	Radiated Emissions	2018.01.06	Wen Zhichao	PASS			
5	15.111	Antenna Terminal	2018.01.11	Wen Zhichao	PASS			
	13.111	Disturbance	2016.01.11	vven Znichao	PASS			

NOTE: The MiMOMax MWL-PYXIS-*H A/B/C* 700MHz Upper A Block Pyxis complies with FCC Part 15 Subparts A and B as a Class B Unintentional Radiator. Tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



2.2. EUT Setup and Operating Conditions

Test Iten	n	
Radiated	J E	mission
Mode 1	:	EUT + USB-SerialLine + POE Net Port + PC
Mode 2	:	EUT + Ethernet Line + DC Power + PC

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

Receiver Test Frequencies:

Transmit Frequency	Transmit Frequency Receiver Frequency		Modes of operation		
(MHz) (MHz)		(KHz)			
757.050	787.950	12.5, 25.0, 50.0	2GFSK, 4GFSK		
787.950	757.050	12.5, 25.0, 50.0	2GFSK, 4GFSK		





3. 47 CFR Part 15B Requirements

3.1. Radiated Emission

3.1.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field Strength Limitation at 3m Measurement Distance				
range (MHz)	(μV/m)	(dBµV/m)			
30.0 - 88.0	100	20log 100			
88.0 - 216.0	150	20log 150			
216.0 - 960.0	200	20log 200			
Above 960.0	500	20log 500			

As shown in FCCsection 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBµV/m is calculated by 20log Emission Level(µV/m).



3.1.2. Frequency range of measurement


According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705 – 108	1000.
108 – 500	2000.
500 – 1000	5000.
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower




3.1.3. Test Setup

1) For radiated emissions from 30MHz to1GHz

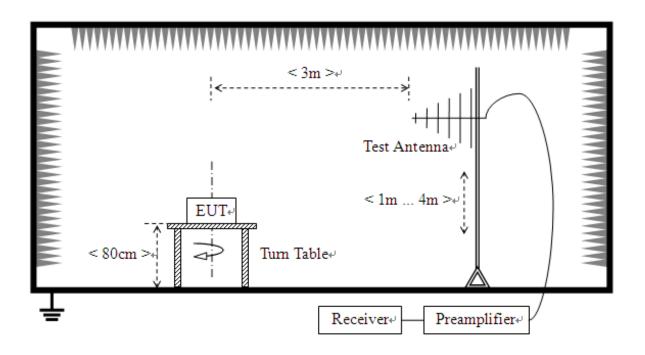

2) For radiated emissions above 1GHz

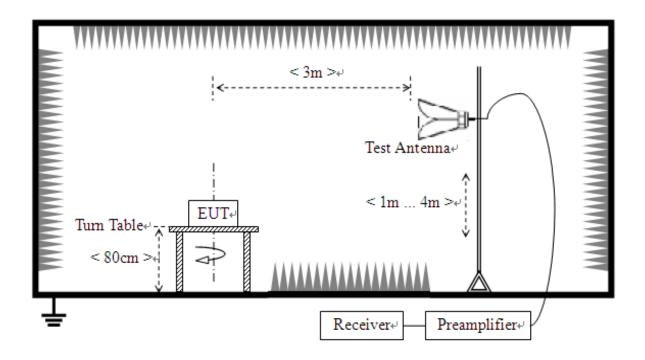

Page8 0f 22



The test is performed in a 3m Semi-Anechoic Chamber, the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on avariable height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn TestAntenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.





3.1.4. Test Result

REPORT No. : SZ17120157E01

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of emissions (6GHz-12.5GHz) which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.






Mode 1

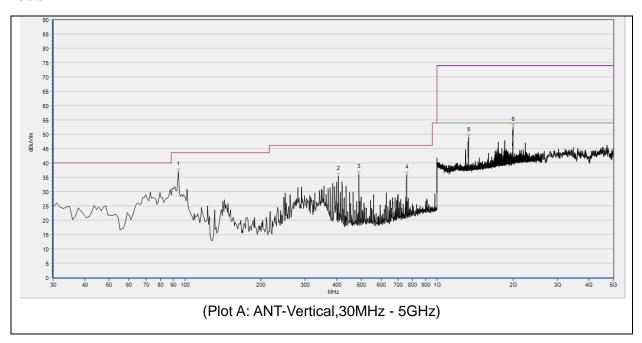

No.	Fre.	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	ANT	Verdict
140.	MHz	dBµV/m	dBµV/m	dBµV/m	dBµV/m	dBµV/m	dBµV/m	ANI	VCIGIO
1	94.020	N.A.	36.93	N.A.	N.A.	43.50	N.A.	V	PASS
2	406.360	N.A.	35.43	N.A.	N.A.	46.00	N.A.	V	PASS
3	489.780	N.A.	36.08	N.A.	N.A.	46.00	N.A.	V	PASS
4	757.500	N.A.	35.86	N.A.	N.A.	46.00	N.A.	V	PASS
5	1331.733	48.88	N.A.	41.36	74.00	N.A.	54.00	V	PASS
6	1996.700	51.78	N.A.	44.13	74.00	N.A.	54.00	٧	PASS



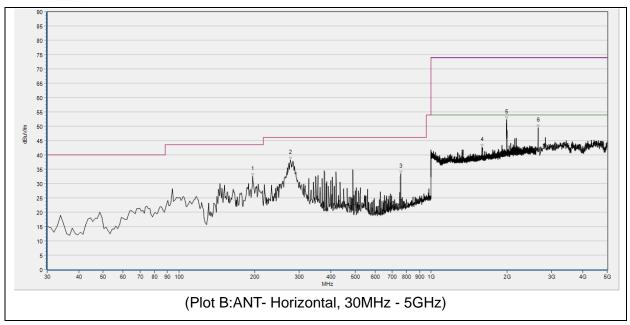


No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBμV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	195.870	N.A.	32.58	N.A.	N.A.	43.50	N.A.	Н	PASS
2	277.350	N.A.	38.18	N.A.	N.A.	46.00	N.A.	Н	PASS
3	757.500	N.A.	33.36	N.A.	N.A.	46.00	N.A.	Н	PASS
4	1593.067	42.66	N.A.	35.06	74.00	N.A.	54.00	Н	PASS
5	1997.600	51.06	N.A.	44.32	74.00	N.A.	54.00	Н	PASS
6	2658.240	49.48	N.A.	42.19	74.00	N.A.	54.00	Н	PASS

Tel: 86-755-36698555

Http://www.morlab.cn




Mode 2

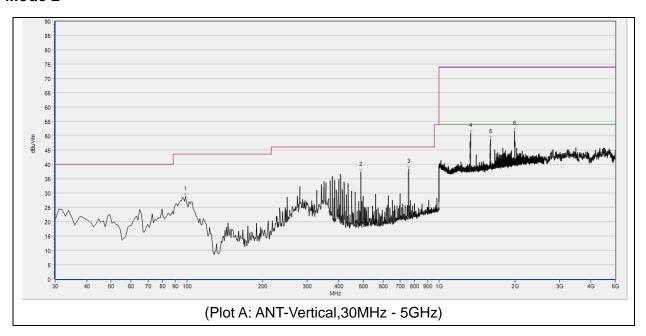

No	Fre.	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	ANIT	Verdict
No.	MHz	dBµV/m	dBµV/m	dBµV/m	dBµV/m	dBµV/m	dBµV/m	ANT	verdict
1	98.870	N.A.	28.80	N.A.	N.A.	43.50	N.A.	V	PASS
2	489.780	N.A.	37.36	N.A.	N.A.	46.00	N.A.	V	PASS
3	757.500	N.A.	38.47	N.A.	N.A.	46.00	N.A.	V	PASS
4	1332.800	50.97	N.A.	43.18	74.00	N.A.	54.00	V	PASS
5	1597.333	48.70	N.A.	41.24	74.00	N.A.	54.00	V	PASS
6	1991.900	51.26	N.A.	44.31	74.00	N.A.	54.00	٧	PASS



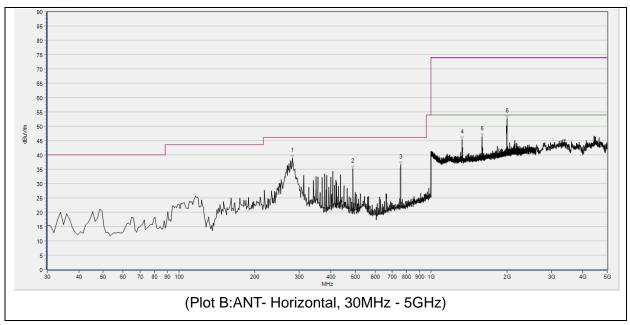

No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	ΑV dBμV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	282.200	N.A.	38.94	N.A.	N.A.	46.00	N.A.	Н	PASS
2	489.780	N.A.	35.13	N.A.	N.A.	46.00	N.A.	Н	PASS
3	757.500	N.A.	36.63	N.A.	N.A.	46.00	N.A.	Н	PASS
4	1330.133	45.28	N.A.	38.13	74.00	N.A.	54.00	Н	PASS
5	1594.133	46.34	N.A.	39.09	74.00	N.A.	54.00	Н	PASS
6	1999.200	53.02	N.A.	46.01	74.00	N.A.	54.00	Н	PASS



The test result for CB receiver RSE (25-30MHz) .

To at me a da	Fre.	QP	Limit-QP	ANIT	Manaliat	
Test mode	MHz	dBμV/m	dBμV/m	ANT	Verdict	
	25.210	22.45			PASS	
	26.341	23.14			PASS	
	27.414	21.15	20.04	V	PASS	
	28.524	19.85	32.04		PASS	
	29.510	22.54			PASS	
Mada 4	29.961	21.34			PASS	
Mode 1	25.104	20.18			PASS	
	25.945	19.95		н	PASS	
	26.347	20.51	20.04		PASS	
	27.146	22.05	32.04		PASS	
	28.541	21.75			PASS	
	29.463	23.11			PASS	
	25.224	21.51			PASS	
	26.256	20.88		V	PASS	
	27.425	22.64	32.04		PASS	
	28.325	20.41	32.04		PASS	
	29.136	21.81			PASS	
Mode 2	29.867	22.14			PASS	
wode 2	25.314	21.87			PASS	
	25.120	22.01			PASS	
	26.267	21.05	22.04	н	PASS	
	27.354	23.11	32.04		PASS	
	28.123	22.42			PASS	
	29.775	21.05			PASS	



3.2. Antenna Terminal Disturbance

3.2.1. Requirement


In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of §15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts(-57dBm).

Measurements were attempted over the range of 30 - 5000 MHz

3.2.2. Test Result

Receive Frequency (MHz)	Emission Power Level(dBm)	Limit(dBm)	Result	
757.05	-73.2	-57.0	PASS	
787.95	-74.1	-57.0	PASS	

attach spectrum pictures for this test here:

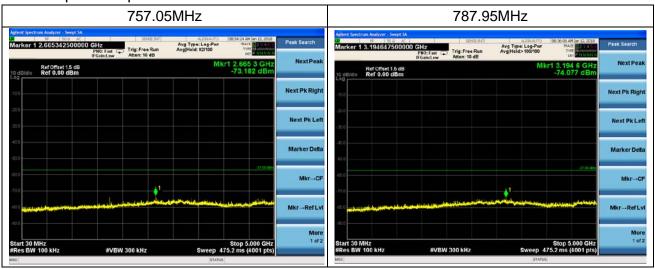




Annex A Photographs of Test Setup

1. Radiated Field Strength Measurement (30MHz – 1GHz)



Mode 1

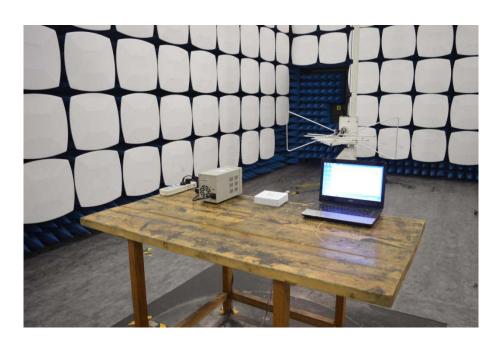


Mode 2





2. Radiated Field Strength Measurement (above 1GHz)

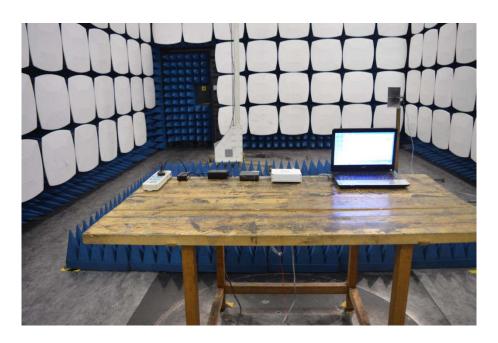

Mode 1



Mode 2



3. Antenna Terminal Disturbance





Annex B Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for	30MHz-200MHz	±0.8dB
a Level of Confidence of	200MHz-1000MHz	±1.1dB
95%(U=2Uc(y))	1GHz-6GHz	±1.4dB
	6GHz-18GHz	±1.9dB

Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for	30MHz-200MHz	±5.06dB
a Level of Confidence of	200MHz-1000MHz	±5.24dB
95%(U=2Uc(y))	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB





Annex C Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.			
Department:	Morlab Laboratory			
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang			
	Road, Block 67, BaoAn District, ShenZhen, GuangD			
	Province, P. R. China			
Responsible Test Lab	Mr. Su Feng			
Manager:				
Telephone:	+86 755 36698555			
Facsimile:	+86 755 36698525			

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Name.	Morlab Laboratory
	FL.3, Building A, FeiYang Science Park, No.8 LongChang
Address:	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

3. Accreditation Certificate

AccreditedTesting	The FCC designation number is CN1192.
Laboratory:	(Shenzhen Morlab Communications Technology Co., Ltd.)

4. Test Software Utilized

Model	Version Number	Producer	
MORLAB EMCR V1.2	Version 1.0	MORLAB	
TS+ -[JS32-CE]	Version2.5.0.0	Tonscend	





5. Test Equipments Utilized

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2017.05.17	2018.05.16
Receiver	KEYSIGHT	N9038A	MY56400093	2017.07.13	2018.07.12
LISN	Schwarzbeck	NSLK 8127	812744	2017.05.17	2018.05.16
Pulse Limiter (20dB)	VTSD	9561D	9537	2017.05.17	2018.05.16
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-519	2017.05.14	2018.05.13
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	1774	2017.09.13	2018.09.12
Semi-Anechoic Chamber	CRT	9m*6m*6m	N/A	2017.11.19	2020.11.18
PC	Lenovo	ThinkPad T430i	0B68192JS	N/A	N/A