

Test Report No:
2490014R-RFUSV24S-A

TEST REPORT

FCC Rules&Regulations

Product Name	700MHz TornadoXR Transceiver
Brand Name	Ubiik Mimomax
Model No.	MWL-TORNADOX-BHCA
FCC ID	XMK-MMXTRNXB011
Applicant's Name / Address	MiMOMax Wireless Limited 540 Wairakei Road, Christchurch 8053, New Zealand
Manufacturer's Name / Address	MiMOMax Wireless Limited 540 Wairakei Road, Christchurch 8053, New Zealand
Test Method Requested, Standard	FCC CFR Title 47 Part 27 ANSI/TIA-603-E-2016 ANSI C63.26-2015
Verdict Summary	IN COMPLIANCE
Documented By	 Vera Hsu
Approved By	 Allen Lin
Date of Receipt	Aug. 20, 2024
Date of Issue	Jan. 21, 2025
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions	4
Revision History	5
Summary of Test Result.....	6
Comments and Remarks	6
1. General Information.....	7
1.1. EUT Description	7
1.2. EUT Information	7
1.3. Testing Applied Standards.....	8
1.4. Testing Location Information	8
1.5. Measurement Uncertainty	9
1.6. List of Test Equipment.....	10
2. Test Configuration of EUT	11
2.1. Test Condition	11
2.2. The Worst Case Measurement Configuration	11
2.3. Tested System Details	12
2.4. Configuration of Tested System	12
3. RF Output Power.....	13
3.1. Test Setup	13
3.2. Test Procedure	13
3.3. Test Result of RF Output Power	13
4. Occupied Bandwidth	14
4.1. Test Setup	14
4.2. Test Procedure	14
4.3. Test Procedures	14
4.4. Test Result of Occupied Bandwidth	14
5. Spurious Emission.....	15
5.1. Test Setup	15
5.2. Test Procedure	16
5.3. Test Result of Spurious Emission	16
6. Conducted Band Edge	17
6.1. Test Setup	17
6.2. Test Procedure	17
6.3. Test Result of Conducted Band Edge.....	17
7. Frequency Stability	18
7.1. Test Setup	18

7.2. Test Procedures 18

7.3. Test Result of Frequency Stability..... 18

Appendix A. Test Result of RF Output Power

Appendix B. Test Result of Occupied Bandwidth

Appendix C. Test Result of Spurious Emission

Appendix D. Test Result of Conducted Band Edge

Appendix E. Test Result of Frequency Stability

Appendix F. Test Setup Photograph

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Jan. 21, 2025

Summary of Test Result

Report Clause	Test Items	Operating Frequency (MHz)	Ref Std. Clause	Limit	Result (PASS/FAIL)	Remark
3	RF Output Power	757.05, 787.95	§2.1046 §27.50	< 1000 Watts	PASS	-
4	Occupied Bandwidth	757.05, 787.95	§2.1049	N/A	PASS	-
5	Spurious Emission	757.05	§27.53(c)(1)(5)	< -13 dBm	PASS	-
			§27.53(c)(3)(6)	< -46 dBm		
		787.95	§27.53(c)(2)(5)	< -13 dBm		
			§27.53(c)(3)(6)	< -46 dBm		
6	Conducted Band Edge	757.05	§27.53(c)(1)(5)	< -13 dBm	PASS	-
			§27.53(c)(3)(6)	< -46 dBm		
		787.95	§27.53(c)(2)(5)	< -13 dBm		
			§27.53(c)(3)(6)	< -46 dBm		
7	Frequency Stability	757.05, 787.95	§2.1055 §27.54	± 2.5 ppm	PASS	-

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range (MHz)	757~758
	787~788
Operating Frequency (MHz)	757.5
	787.5
Bandwidth (kHz)	12.5 / 25 / 50
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

Antenna Information				
Ant.	Brand Name	Model No.	Type	Gain (dBi)
1	Mimomax	ANT-698-960-008-OD00	Omni	8
2	Mimomax	ANT-757-788-008-PD00	Panel	8
3	Mimomax	ANT-750-800-009-PD0H	Panel	9
4	Mimomax	ANT-750-800-011-PD0H	Panel	11
5	Mimomax	ANT-757-788-012-PD0H	Panel	12
6	Mimomax	ANT-750-800-016-PD0H	Panel	16
7	Mimomax	ANT-757-788-012-YD00	Yagi	12

Note:

1. The device has 2 antenna ports, and both port 1 and port 2 can transmit/receive signal simultaneously.
2. The device has 7 sets of antenna and there are 2 antennas for each set.

1.2. EUT Information

EUT Power Type	From DC power supply		
Hardware Version	003		
Software Version	torn_software_04.08.05		
MIMO mode	☐ Correlated ☒ Uncorrelated: SM-MIMO		

1.3. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC CFR Title 47 Part 27
- ANSI/TIA-603-E (2016)
- ANSI C63.26-2015
- FCC KDB 971168 D01 v03r01

The following reference test guidance is not within the scope of accreditation of TAF.

- FCC KDB 412172 D01 v01r01
- FCC KDB 414788 D01 v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.4. Testing Location Information

Testing Location Information		
Test Laboratory : DEKRA Testing and Certification Co., Ltd.		
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
Test site number for address 1 includes HC-SR02. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.		

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted Emission	HC-SR12	Max Chang	22~24 / 63~65	2024/09/24~2024/11/01
Radiated Emission	HC-CB02	Scott Chang	23.5~24.5 / 55~61	2024/09/18~2024/10/30

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test Item	Uncertainty
RF Output Power	± 1.16 dB
Occupied Bandwidth	± 217.9 Hz
Spurious Emissions	± 3.52 dB below 1 GHz ± 3.56 dB above 1 GHz
Conducted Band Edge	± 2.47 dB
Frequency Stability	± 217.9 Hz

1.6. List of Test Equipment

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
EXA Signal Analyzer	Keysight	N9010A	MY51440132	10 Hz-44 GHz	2023/12/11	2024/12/10
Spectrum Analyzer	Keysight	N9010B	MY57110159	10 Hz-7 GHz	2024/03/01	2025/02/28
Signal & Spectrum Analyzer	R&S	FSV40	101869	10Hz-40GHz	2024/06/20	2025/06/19
USB Peak Power Sensor	Anritsu	MA24408A	11840	50 MHz to 8 GHz, High VBW(165 MHz / 350 kHz)	2024/08/02	2025/08/01
Wireless Conn. Tester	R&S	CMW500	157118	Simulator	2024/06/27	2025/06/26

HC-CB02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal Analyzer	R&S	FSVA40	101455	10 Hz-40 GHz	2023/10/03	2024/10/02
Signal and Spectrum Analyzer	R&S	FSVA40	101435	10 Hz-40 GHz	2024/05/17	2025/05/16
EXA Signal Analyzer	Keysight	N9010A	MY51440132	10 Hz-44 GHz	2023/12/11	2024/12/10
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1272	30 MHz-2 GHz	2024/04/29	2025/04/28
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211211A18EN	1G-18GHz	2023/11/09	2024/11/08
Horn Antenna	Schwarzbeck	BBHA 9170	203	18G-40GHz	2024/02/02	2025/02/01
Pre-Amplifier	EMCI	EMC01820I	980365	30M-8 GHz,20 dB	2024/04/02	2025/04/01
Pre-Amplifier	EMEC	EM01G18GA	060741	1G-18 GHz,50 dB	2024/04/23	2025/04/22
Pre-Amplifier	DEKRA	AP-400C	201801231	18G-40 GHz,48 dB	2023/10/03	2024/10/02
Pre-Amplifier	SGH	SGH184	20230411-2	18G-40 GHz,54 dB	2024/04/23	2025/04/22
Coaxial Cable(13m)	Suhner	SF104	HC-CB02	30M-18 GHz	2024/08/13	2025/08/12
Coaxial Cable(3m)	Suhner,Rosnol	SF102_UP0264	HC-CB02-1	18G-40 GHz 3 m	2024/08/13	2025/08/12
Radiated Software	Audix	e3 V9	HC-CB02_1	N/A	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition			
Testing Voltage	Vnom (DC 24V)	Vmax (DC 60V)	Vmin (DC 10.5V)
Operational Climatic	Tnom (25°C)	Tmax (60°C)	Tmin (-40°C)

2.2. The Worst Case Measurement Configuration

Test Mode	Mode 1: Transmit Mode (Cabinet emissions)
-----------	---


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. The device was tested under all bandwidths and modulations.
The worst case was found in "QPSK" and show in "Conducted Band Edge" and "Spurious Emission".

2.3. Tested System Details


No.	Equipment	Brand Name	Model No.	Serial No.
1	Green power supply connector	N/A	N/A	N/A
2	Notebook	DELL	Latitude E6320	8611271467
3	DC Power Supply	Chroma	62024P-80-60	A02146
4	attenuator	Woken	00800A1K01H-10	N/A

2.4. Configuration of Tested System

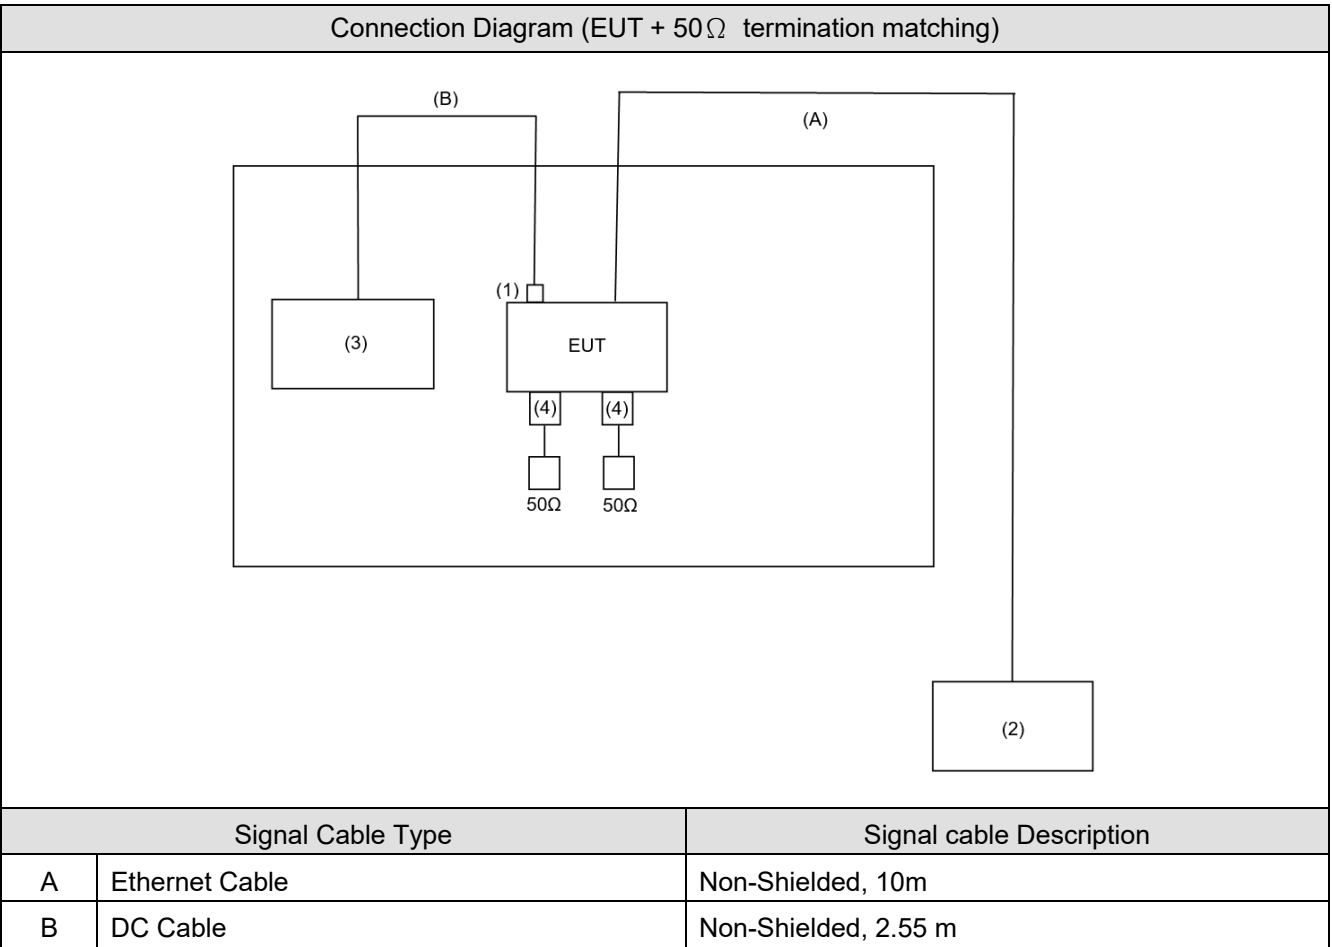

3. RF Output Power

3.1. Test Setup



3.2. Test Procedure

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum conducted RF output power under transmission mode and specific channel frequency. The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);


L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB

3.3. Test Result of RF Output Power

Refer as Appendix A

4. Occupied Bandwidth

4.1. Test Setup



4.2. Test Procedu

4.3. Test Procedures

The EUT makes a call to the communication simulator. The 26dB bandwidth and 99% occupied bandwidth measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. The path loss was compensated to the results for each measurement.


4.4. Test Result of Occupied Bandwidth

Refer as Appendix B


5. Spurious Emission

5.1. Test Setup


Conducted Spurious Measurement



Radiated Spurious Measurement (below 1 GHz)

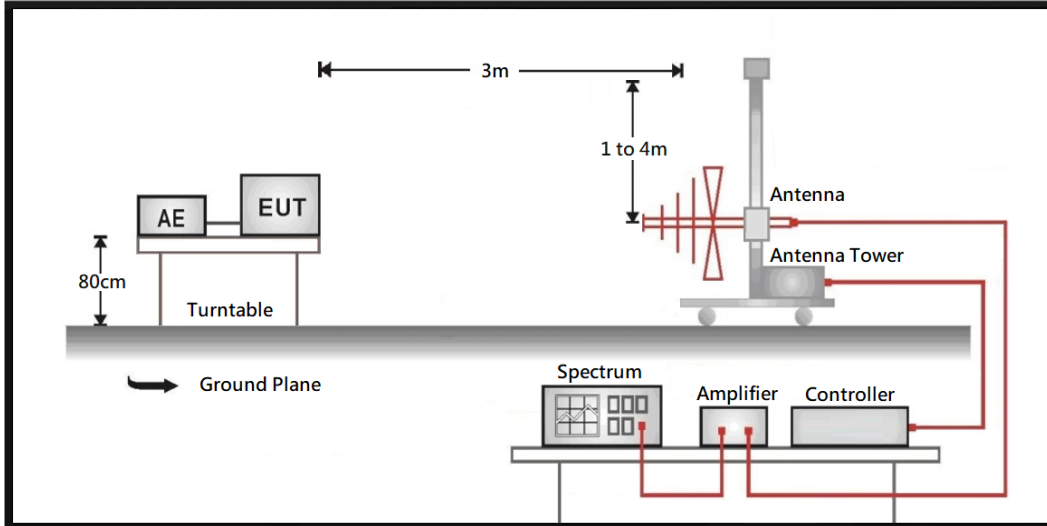

Radiated Spurious Measurement (above 1 GHz)

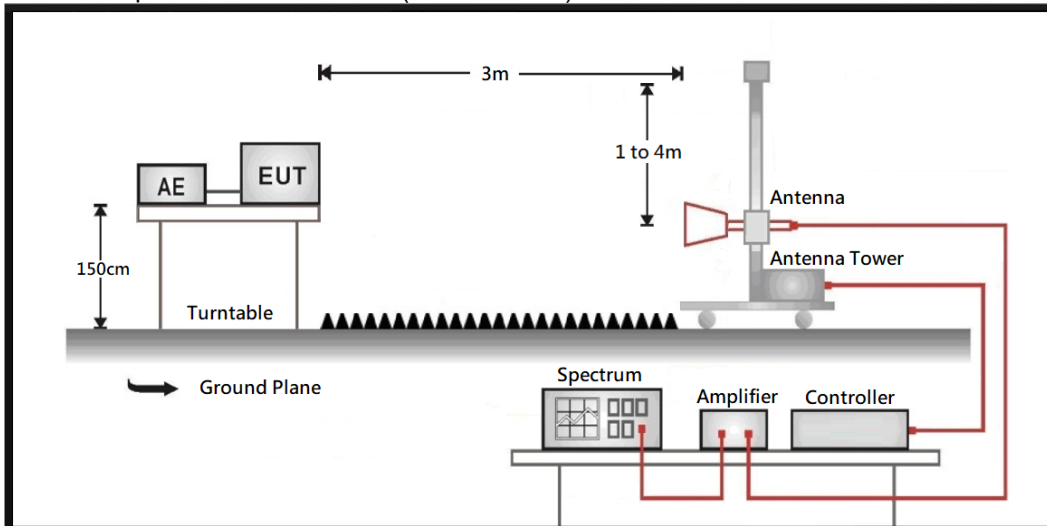

5.2. Test Procedure

Conducted Spurious Measurement:

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. The path loss was compensated to the results for each measurement. The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations. The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic. Taking the record of maximum spurious emission.

Cabinet emissions measurements


Due to antenna length or other restrictions, alternative solutions are permitted; antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to determine compliance provided

5.3. Test Result of Spurious Emission

Refer as Appendix C

6. Conducted Band Edge

6.1. Test Setup



6.2. Test Procedure

1. The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. The path loss was compensated to the results for each measurement.
2. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

6.3. Test Result of Conducted Band Edge

Refer as Appendix D

7. Frequency Stability

7.1. Test Setup



7.2. Test Procedures

Frequency Stability under Temperature Variations:

The EUT under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a communication simulator. The EUT was placed inside the temperature chamber. Set the EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC or DC power supply to power the EUT and set the voltage to rated voltage. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.3. Test Result of Frequency Stability

Refer as Appendix E

Appendix A. Test Result of RF Output Power

Frequency (MHz)	Modulation	Bandwidth (kHz)	Conducted Power		ERP Power				
			Port 1 (dBm)	Port 2 (dBm)	Port 1 (dBm)	Port 2 (dBm)	Port 1 (W)	Port 2 (W)	Limit (W)
757.5	QPSK	12.5	33.28	34.30	47.13	48.15	51.642	65.313	1000
		25	33.04	34.07	46.89	47.92	48.865	61.944	1000
		50	33.35	33.99	47.20	47.84	52.481	60.814	1000
	16QAM	12.5	33.34	34.19	47.19	48.04	52.360	63.680	1000
		25	33.08	33.87	46.93	47.72	49.317	59.156	1000
		50	33.33	33.05	47.18	46.90	52.240	48.978	1000
	64QAM	12.5	33.44	34.22	47.29	48.07	53.580	64.121	1000
		25	33.24	34.08	47.09	47.93	51.168	62.087	1000
		50	33.41	33.31	47.26	47.16	53.211	52.000	1000
	256QAM	12.5	33.65	34.28	47.50	48.13	56.234	65.013	1000
		25	33.30	34.30	47.15	48.15	51.880	65.313	1000
		50	33.47	33.23	47.32	47.08	53.951	51.050	1000
787.5	QPSK	12.5	33.44	33.57	47.29	47.42	53.580	55.208	1000
		25	33.40	33.47	47.25	47.32	53.088	53.951	1000
		50	33.43	33.50	47.28	47.35	53.456	54.325	1000
	16QAM	12.5	33.30	33.50	47.15	47.35	51.880	54.325	1000
		25	33.31	33.40	47.16	47.25	52.000	53.088	1000
		50	33.25	33.43	47.10	47.28	51.286	53.456	1000
	64QAM	12.5	33.54	33.75	47.39	47.60	54.828	57.544	1000
		25	33.57	33.63	47.42	47.48	55.208	55.976	1000
		50	33.52	33.59	47.37	47.44	54.576	55.463	1000
	256QAM	12.5	33.55	33.71	47.40	47.56	54.954	57.016	1000
		25	33.55	33.67	47.40	47.52	54.954	56.494	1000
		50	33.54	33.68	47.39	47.53	54.828	56.624	1000

Note:


- ERP (W) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15
- ERP (W) = $(10^{(\text{Power(dBm)}/10)}) \times 10^{-3}$

Appendix B. Test Result of Occupied Bandwidth

Frequency (MHz)	Modulation	Bandwidth (kHz)	Measure Level (kHz)				Limit (MHz)
			26dB BW		99% BW		
			Port 1	Port 2	Port 1	Port 2	
757.5	QPSK	12.5	11.560	11.560	10.276	10.300	NA
		25	23.980	23.880	20.934	21.126	NA
		50	47.850	47.850	42.223	42.236	NA
	16QAM	12.5	11.590	11.540	10.286	10.285	NA
		25	23.880	23.830	20.894	20.889	NA
		50	47.650	47.850	42.087	42.031	NA
	64QAM	12.5	11.540	11.590	10.295	10.281	NA
		25	23.880	23.930	21.034	20.962	NA
		50	47.650	47.650	42.335	41.847	NA
	256QAM	12.5	11.560	11.560	10.279	10.311	NA
		25	23.880	23.780	20.885	21.037	NA
		50	47.850	47.750	41.839	42.001	NA
787.5	QPSK	12.5	11.590	11.490	10.287	10.287	NA
		25	23.880	23.880	20.893	20.963	NA
		50	47.950	47.950	41.784	41.995	NA
	16QAM	12.5	11.510	11.510	10.317	10.309	NA
		25	23.930	23.830	20.894	20.911	NA
		50	47.750	47.750	41.904	41.848	NA
	64QAM	12.5	11.560	11.540	10.278	10.301	NA
		25	23.780	23.880	20.904	20.777	NA
		50	47.850	47.750	41.996	41.907	NA
	256QAM	12.5	11.610	11.560	10.275	10.309	NA
		25	23.880	23.830	20.949	20.897	NA
		50	47.650	47.550	41.877	41.788	NA

For 26dB bandwidth:

757.5 MHz_QPSK_12.5k_Port 1

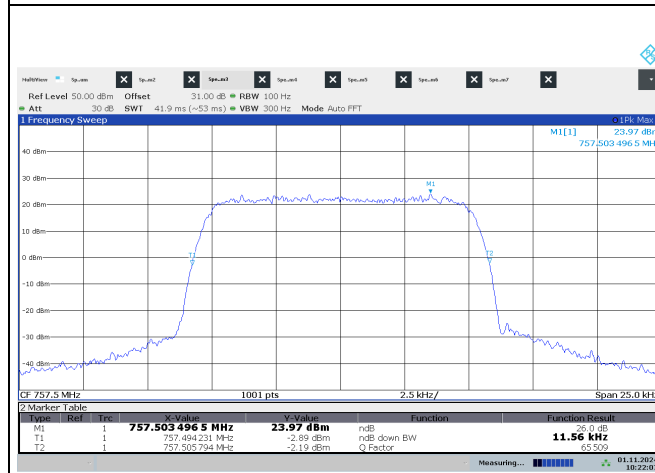

10:22:08 01.11.2024

757.5 MHz_QPSK_12.5k_Port 2



10:21:12 01.11.2024

757.5 MHz_QPSK_25k_Port 1



09:37:51 01.11.2024

757.5 MHz_QPSK_25k_Port 2



09:33:48 01.11.2024

757.5 MHz_QPSK_50k_Port 1




16:26:31 30.10.2024

757.5 MHz_QPSK_50k_Port 2




16:25:56 30.10.2024

757.5 MHz_16QAM_12.5k_Port 1

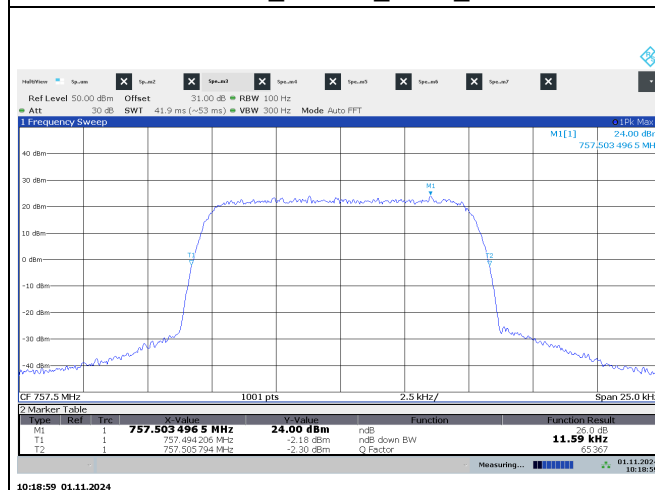


757.5 MHz_16QAM_12.5k_Port 2

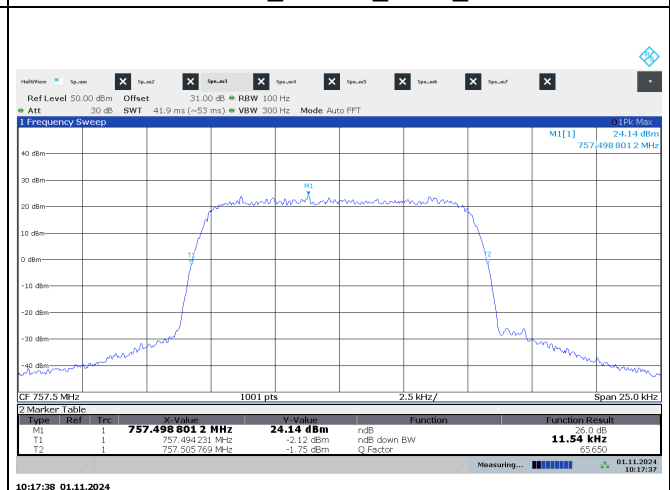

757.5 MHz_16QAM_25k_Port 1



757.5 MHz_16QAM_25k_Port 2

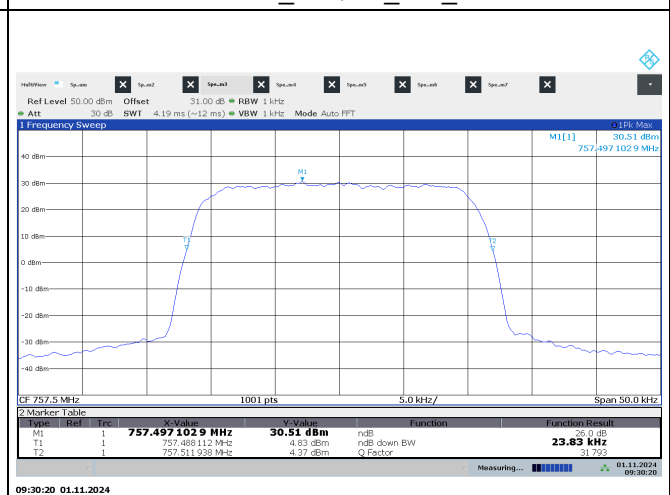


757.5 MHz_16QAM_50k_Port 1



757.5 MHz_16QAM_50k_Port 2



757.5 MHz_64QAM_12.5k_Port 1

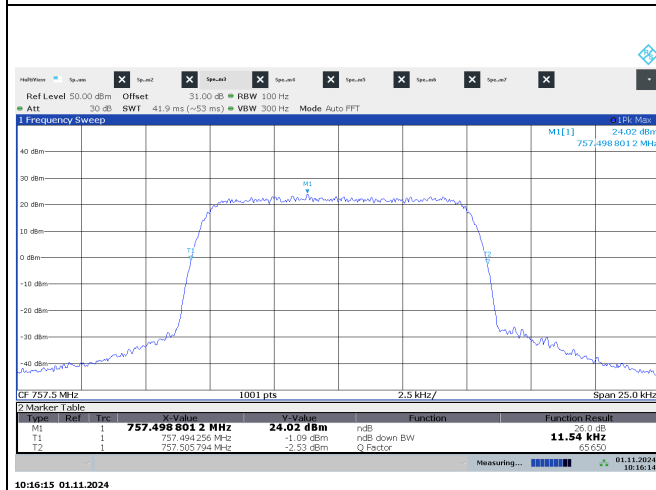

757.5 MHz_64QAM_12.5k_Port 2



757.5 MHz_64QAM_25k_Port 1




757.5 MHz_64QAM_25k_Port 2




757.5 MHz_64QAM_50k_Port 1




757.5 MHz_64QAM_50k_Port 2

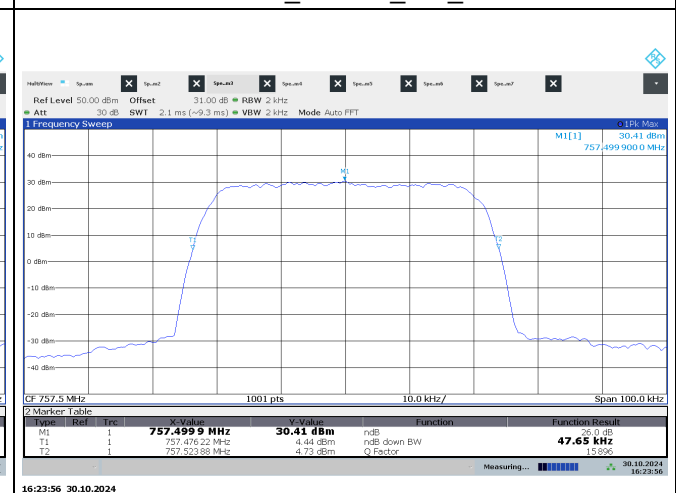

757.5 MHz_256QAM_12.5k_Port 1

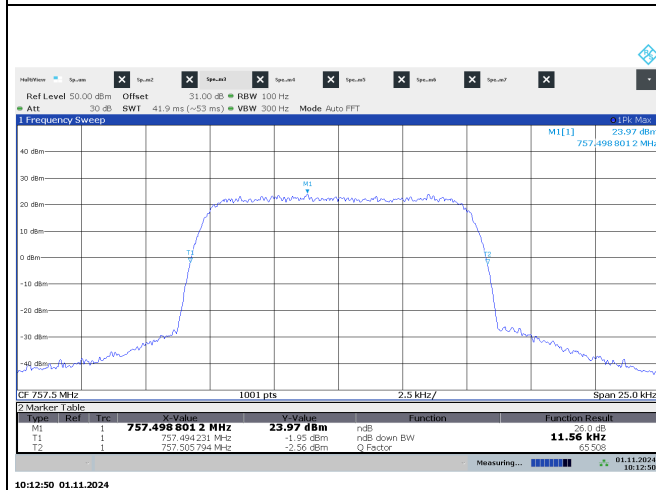

757.5 MHz_256QAM_12.5k_Port 2

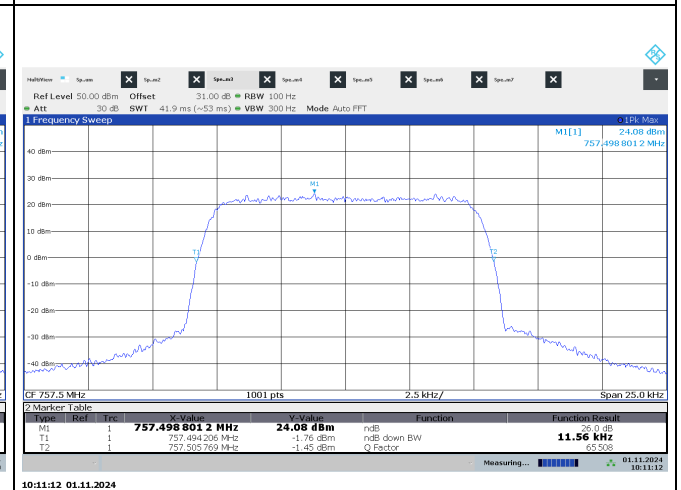

757.5 MHz_256QAM_25k_Port 1




757.5 MHz_256QAM_25k_Port 2




757.5 MHz_256QAM_50k_Port 1




757.5 MHz_256QAM_50k_Port 2

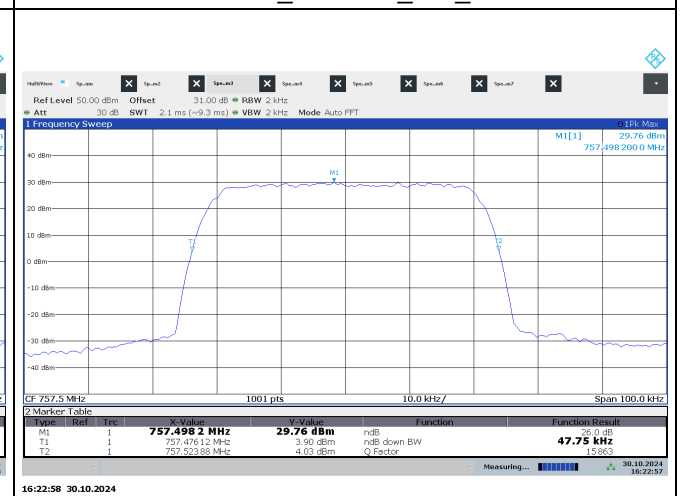


787.5 MHz_QPSK_12.5k_Port 1

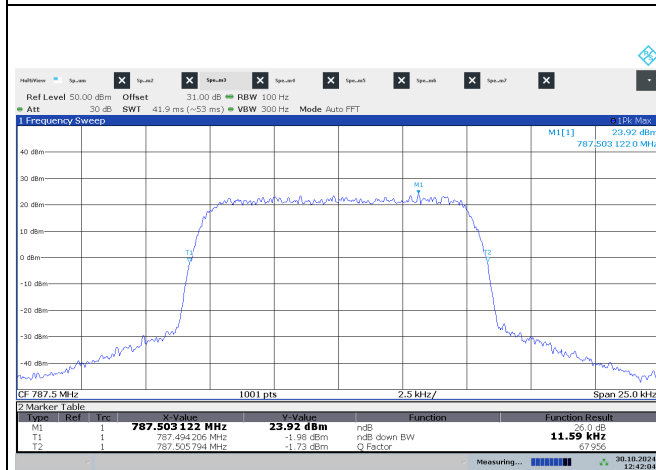


787.5 MHz_QPSK_12.5k_Port 2

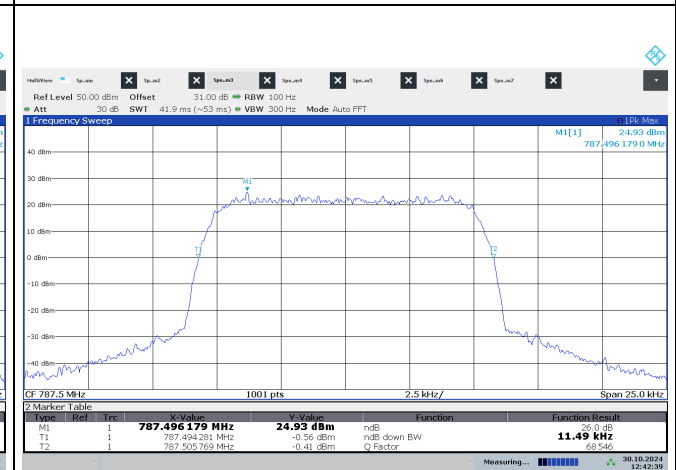

787.5 MHz_QPSK_25k_Port 1

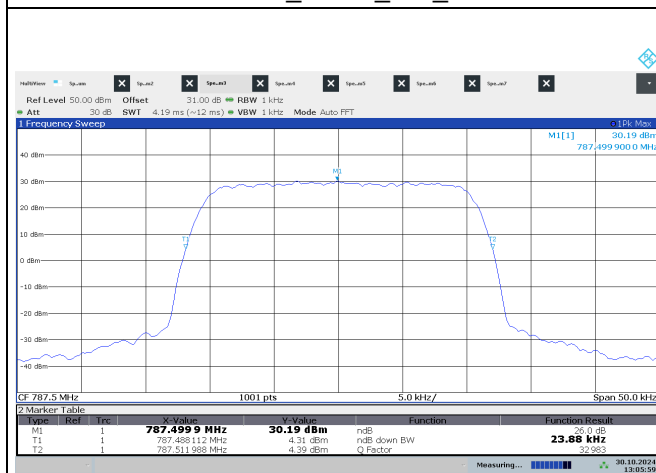

787.5 MHz_QPSK_25k_Port 2

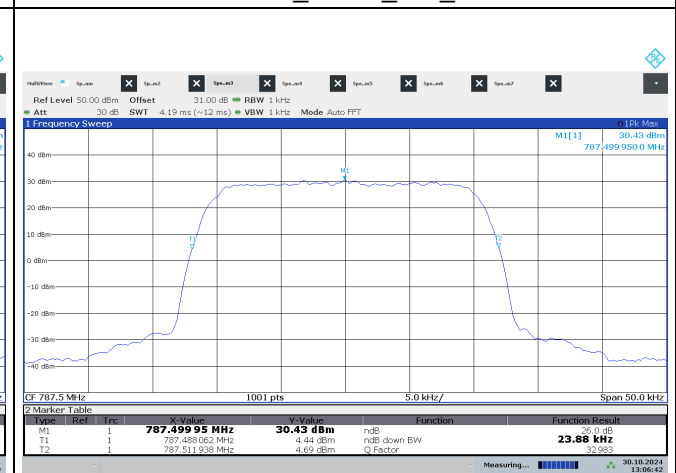


787.5 MHz_QPSK_50k_Port 1




787.5 MHz_QPSK_50k_Port 2



787.5 MHz_16QAM_12.5k_Port 1

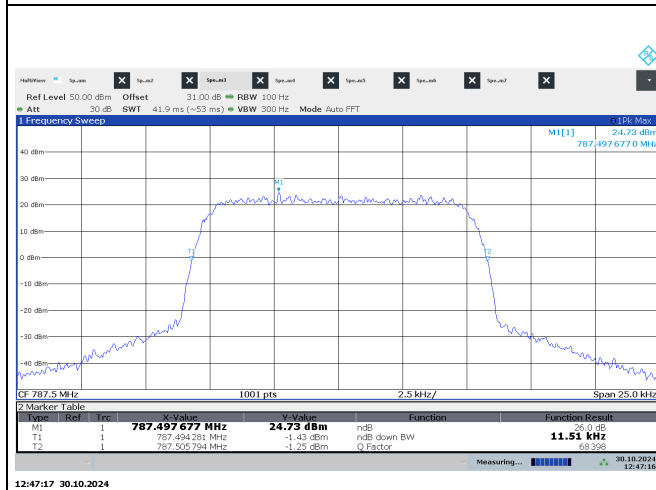


787.5 MHz_16QAM_12.5k_Port 2

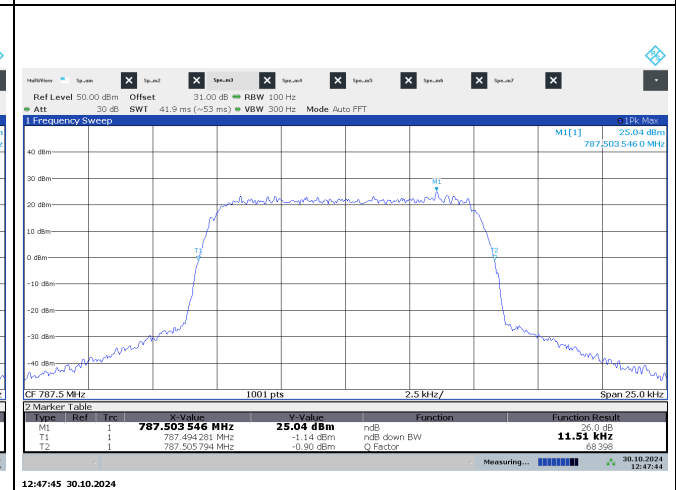


787.5 MHz_16QAM_25k_Port 1




787.5 MHz_16QAM_25k_Port 2

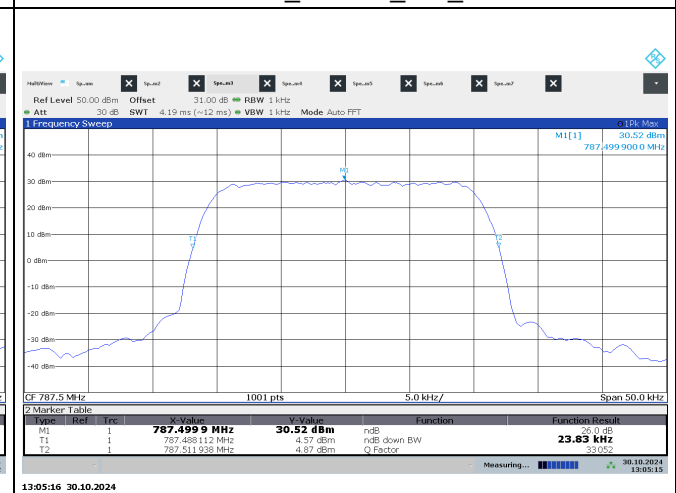


787.5 MHz_16QAM_50k_Port 1

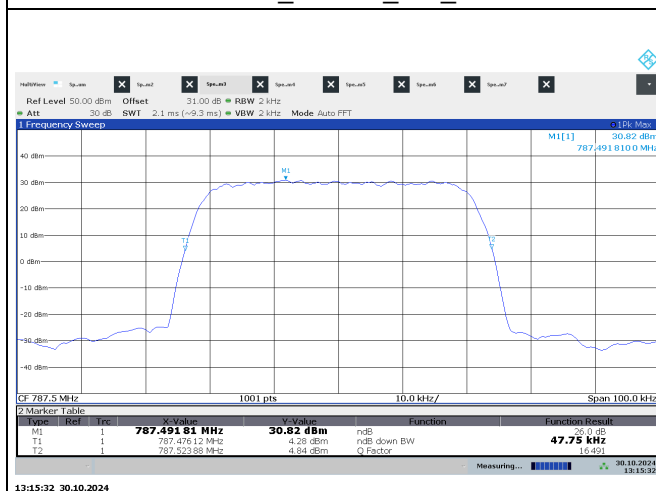


787.5 MHz_16QAM_50k_Port 2

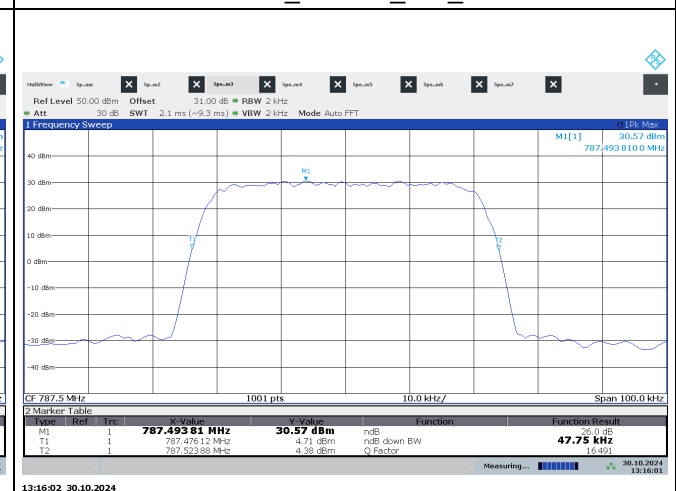

787.5 MHz_64QAM_12.5k_Port 1

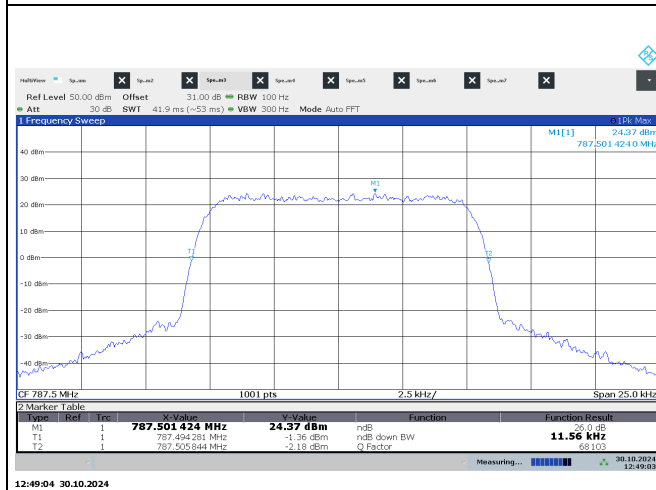

787.5 MHz_64QAM_12.5k_Port 2

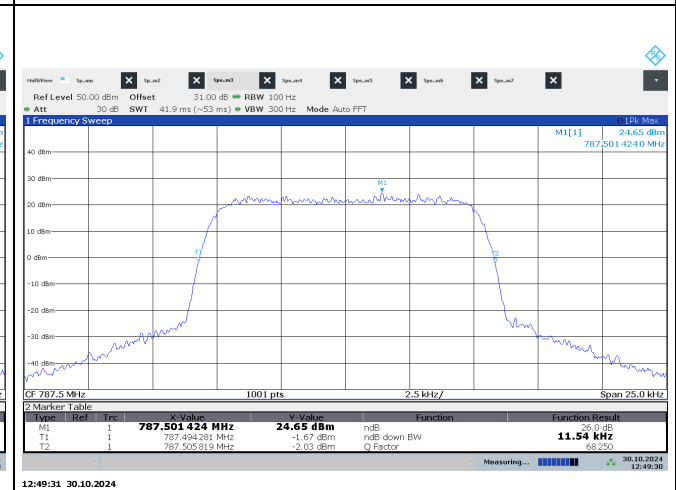

787.5 MHz_64QAM_25k_Port 1



787.5 MHz_64QAM_25k_Port 2




787.5 MHz_64QAM_50k_Port 1




787.5 MHz_64QAM_50k_Port 2



787.5 MHz_256QAM_12.5k_Port 1

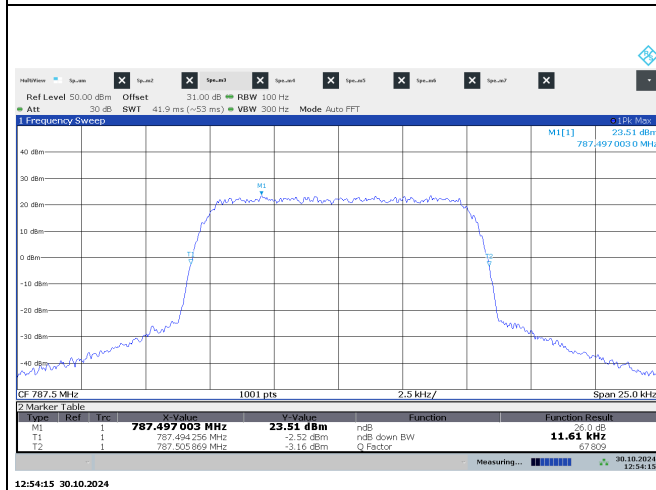

787.5 MHz_256QAM_12.5k_Port 2

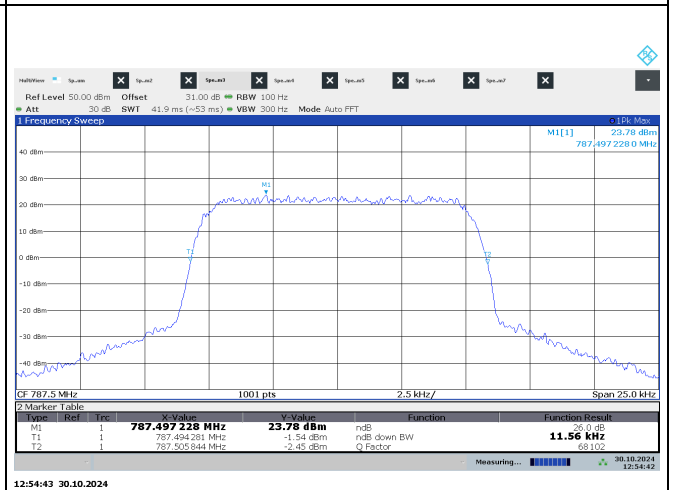

787.5 MHz_256QAM_25k_Port 1



787.5 MHz_256QAM_25k_Port 2



787.5 MHz_256QAM_50k_Port 1




787.5 MHz_256QAM_50k_Port 2




For 99% bandwidth:

757.5 MHz_QPSK_12.5k_Port 1

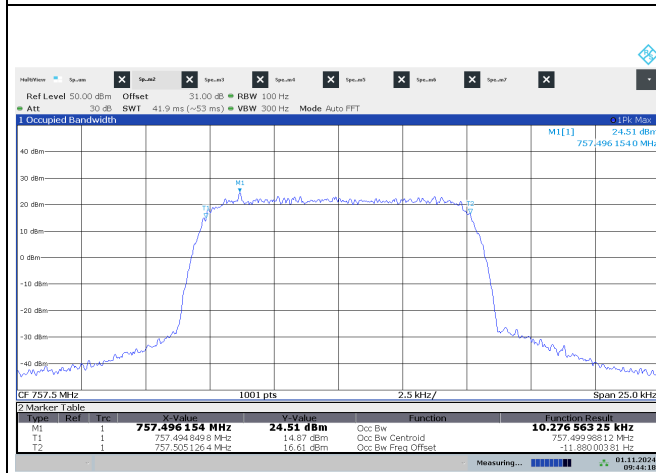


09:44:19 01.11.2024

757.5 MHz_QPSK_12.5k_Port 2

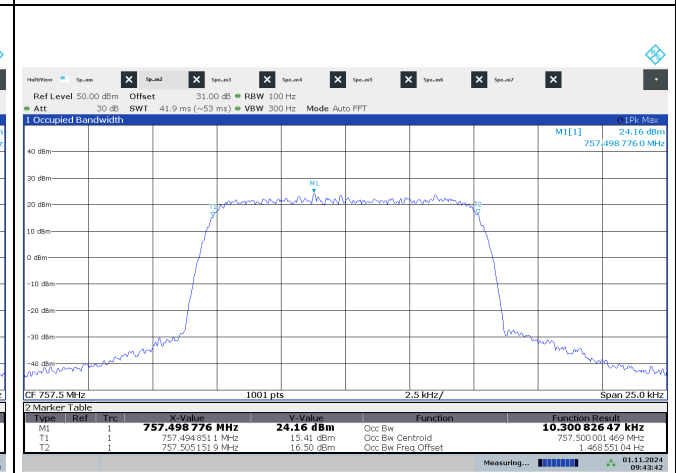

09:43:42 01.11.2024

757.5 MHz_QPSK_25k_Port 1

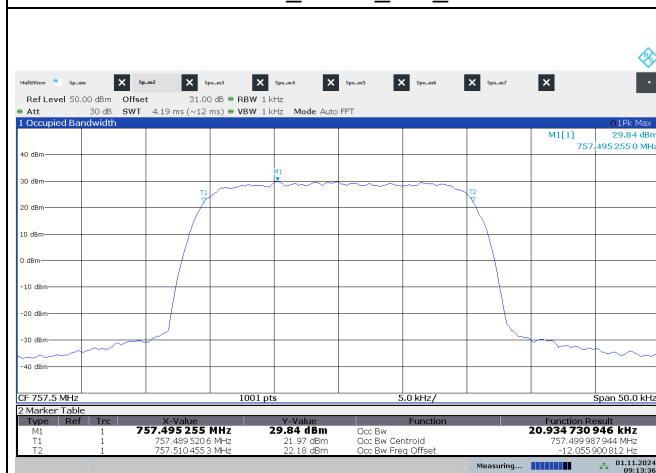


09:13:36 01.11.2024

757.5 MHz_QPSK_25k_Port 2



08:33:18 01.11.2024

757.5 MHz_QPSK_50k_Port 1

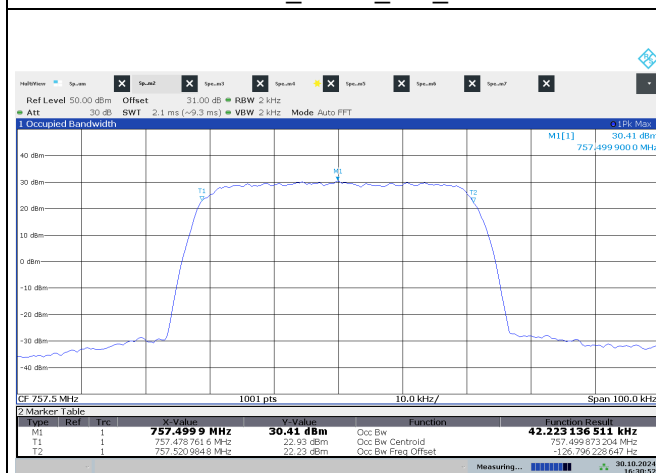

16:30:52 30.10.2024

757.5 MHz_QPSK_50k_Port 2




16:30:11 30.10.2024

757.5 MHz_16QAM_12.5k_Port 1




757.5 MHz_16QAM_12.5k_Port 2

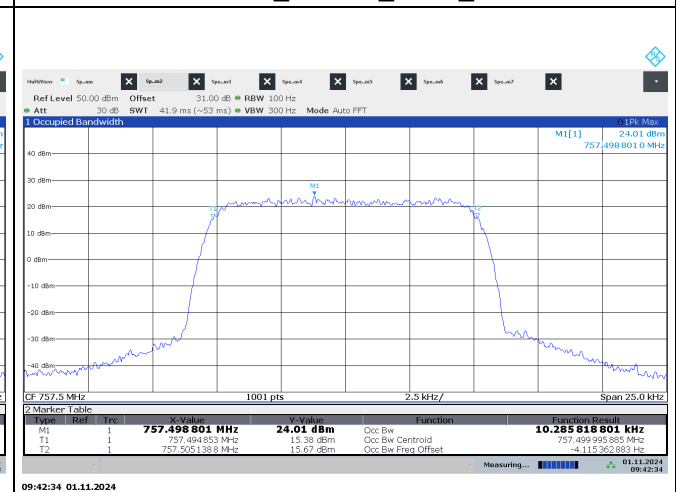

757.5 MHz_16QAM_25k_Port 1




757.5 MHz_16QAM_25k_Port 2

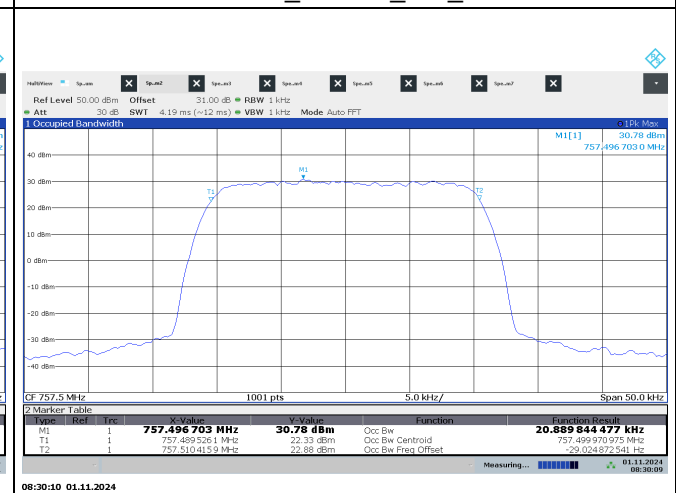


757.5 MHz_16QAM_50k_Port 1




757.5 MHz_16QAM_50k_Port 2

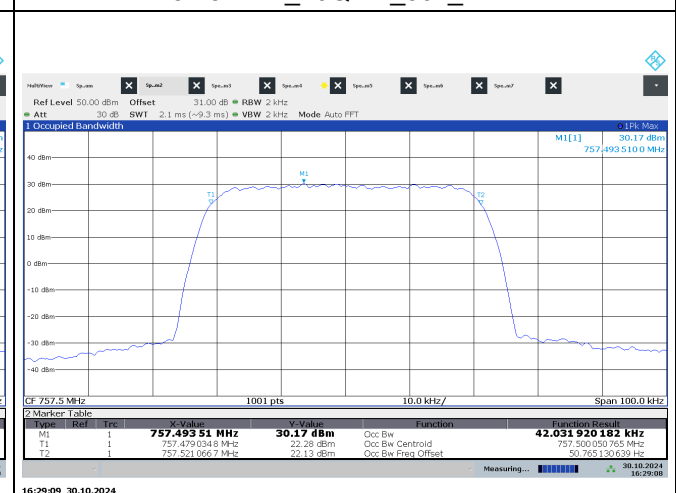

757.5 MHz_64QAM_12.5k_Port 1

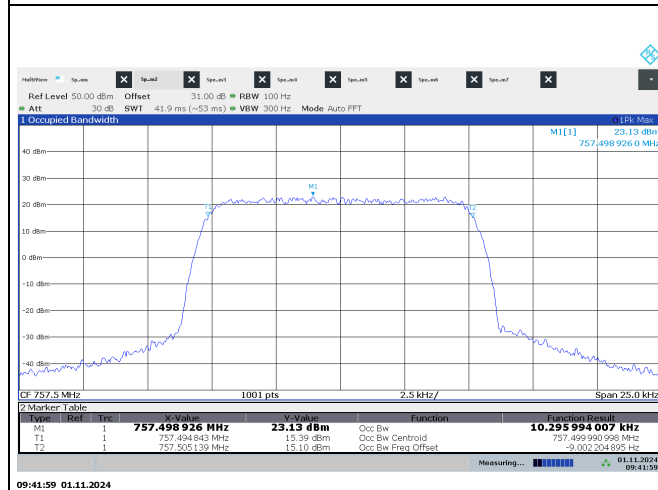


757.5 MHz_64QAM_12.5k_Port 2

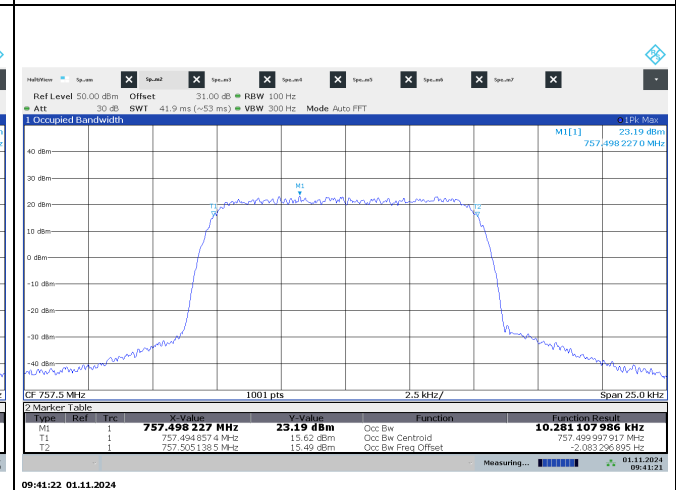

757.5 MHz_64QAM_25k_Port 1



757.5 MHz_64QAM_25k_Port 2

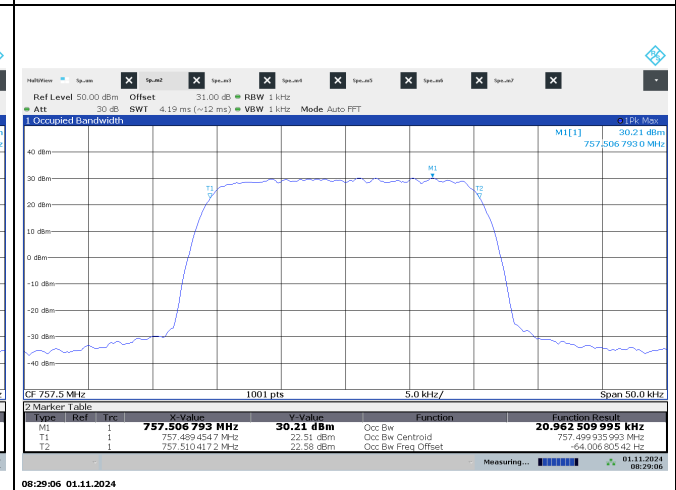


757.5 MHz_64QAM_50k_Port 1




757.5 MHz_64QAM_50k_Port 2



757.5 MHz_256QAM_12.5k_Port 1

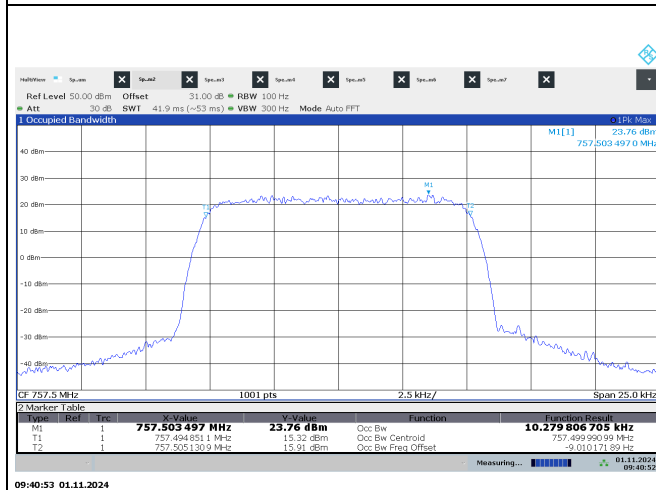


757.5 MHz_256QAM_12.5k_Port 2

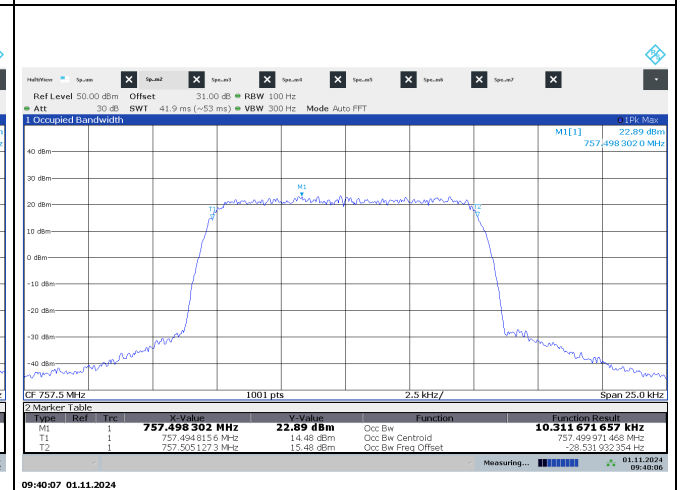

757.5 MHz_256QAM_25k_Port 1




757.5 MHz_256QAM_25k_Port 2

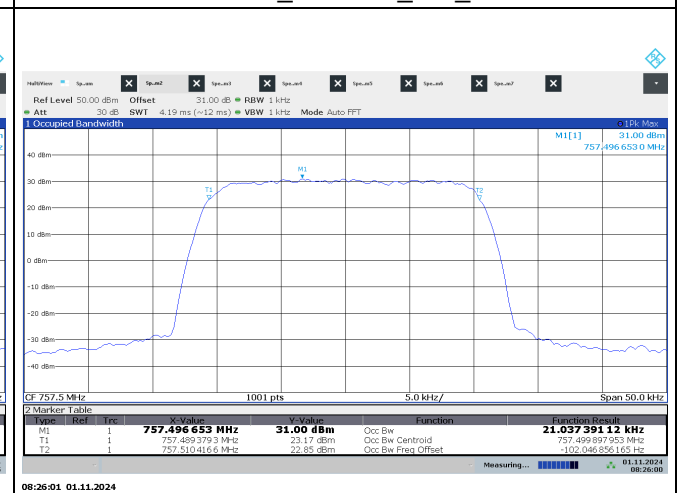


757.5 MHz_256QAM_50k_Port 1




757.5 MHz_256QAM_50k_Port 2

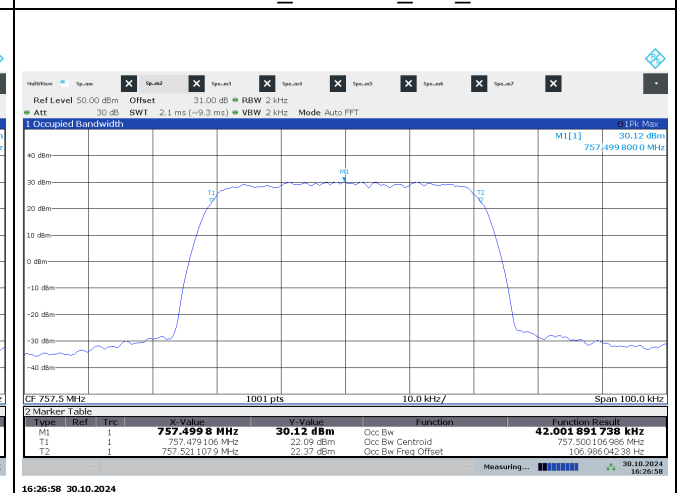

787.5 MHz_QPSK_12.5k_Port 1

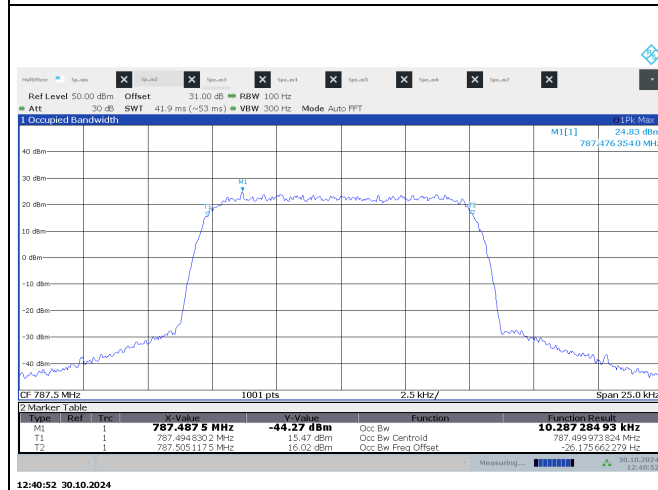

787.5 MHz_QPSK_12.5k_Port 2

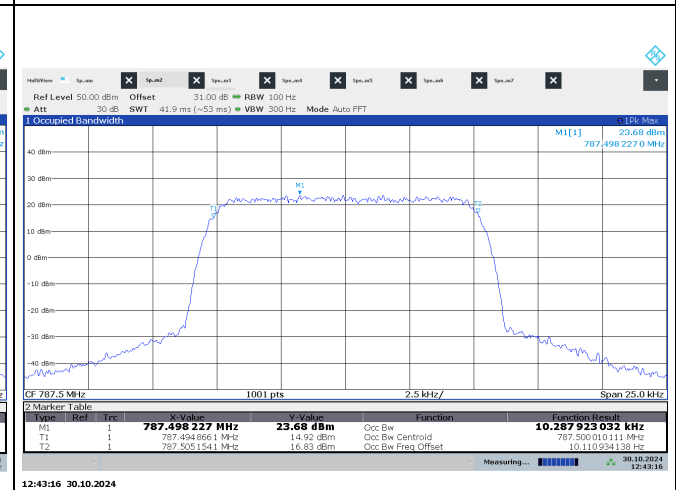

787.5 MHz_QPSK_25k_Port 1



787.5 MHz_QPSK_25k_Port 2




787.5 MHz_QPSK_50k_Port 1




787.5 MHz_QPSK_50k_Port 2



787.5 MHz_16QAM_12.5k_Port 1

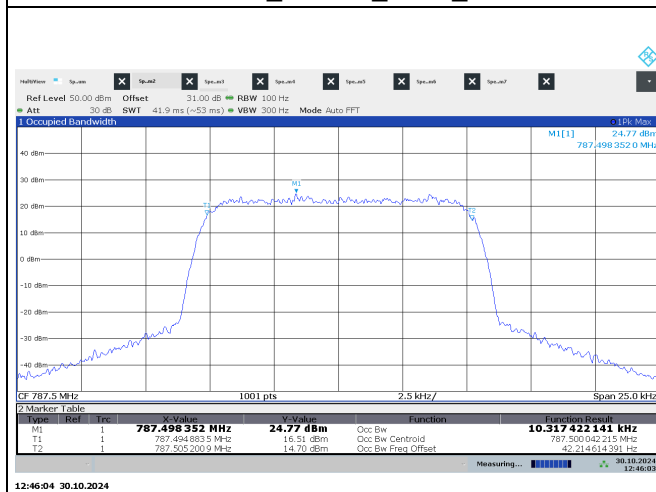

787.5 MHz_16QAM_12.5k_Port 2

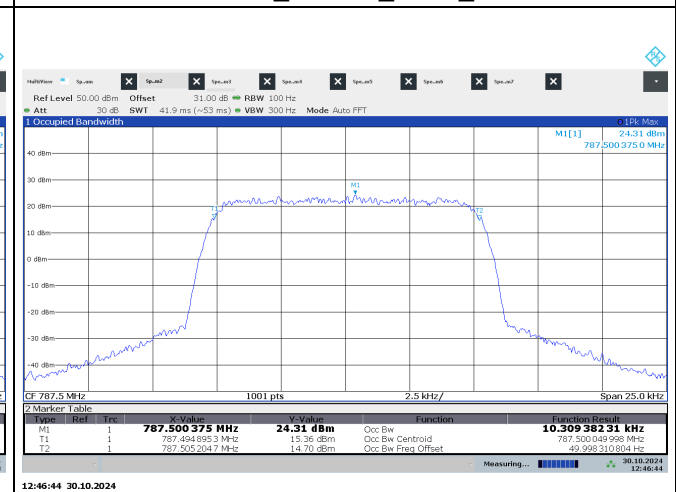


787.5 MHz_16QAM_25k_Port 1



787.5 MHz_16QAM_25k_Port 2




787.5 MHz_16QAM_50k_Port 1

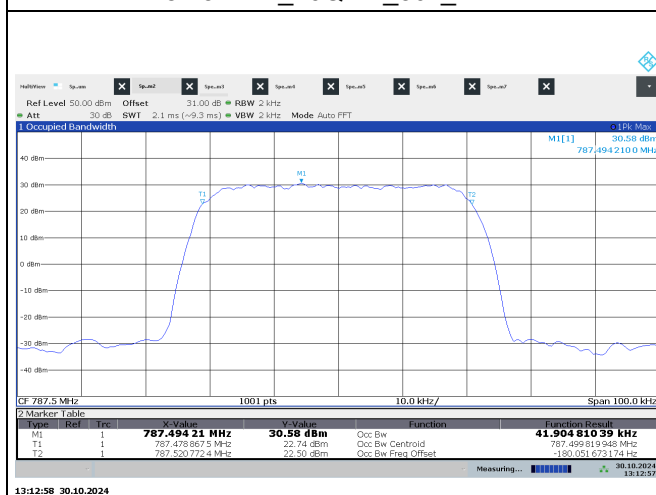


787.5 MHz_16QAM_50k_Port 2




787.5 MHz_64QAM_12.5k_Port 1

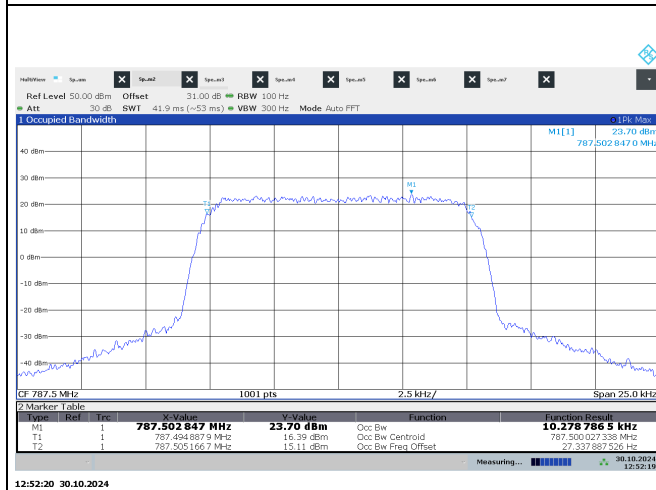


787.5 MHz_64QAM_12.5k_Port 2

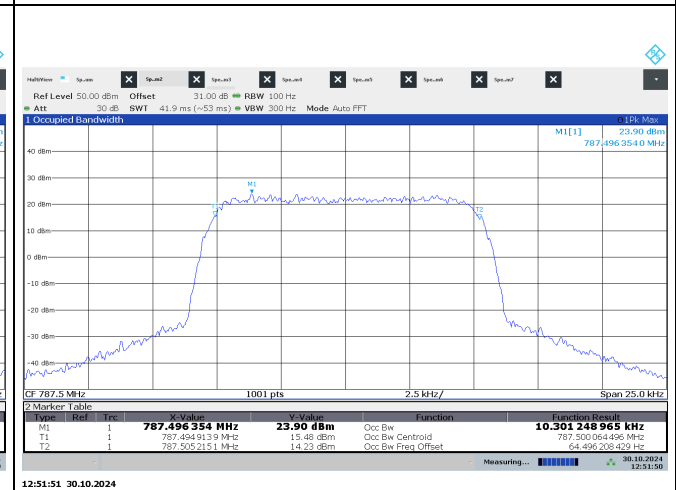


787.5 MHz_64QAM_25k_Port 1

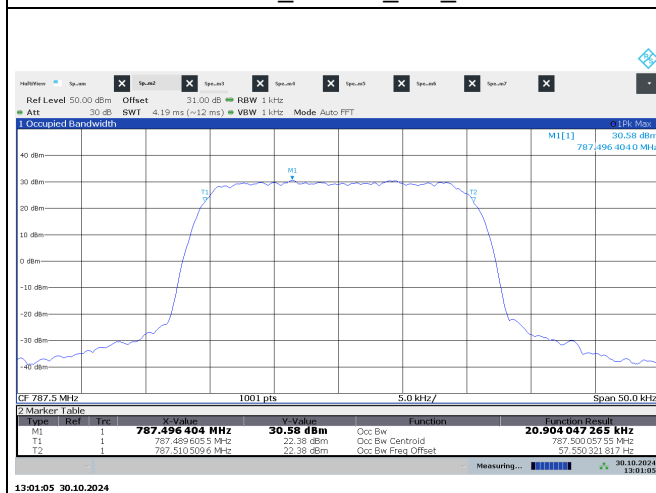


787.5 MHz_64QAM_25k_Port 2

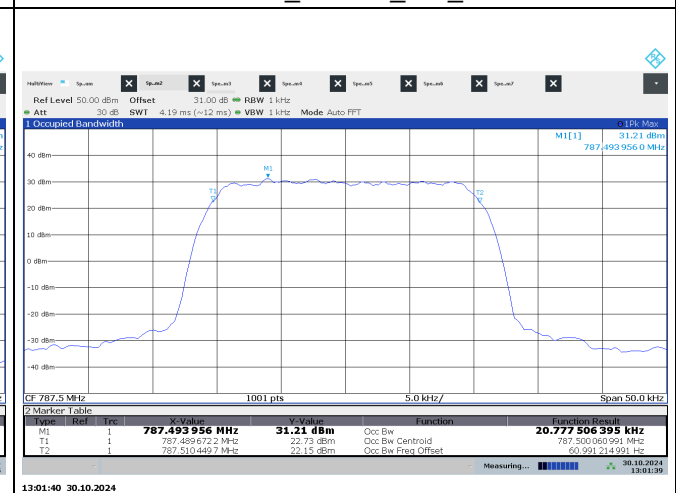


787.5 MHz_64QAM_50k_Port 1

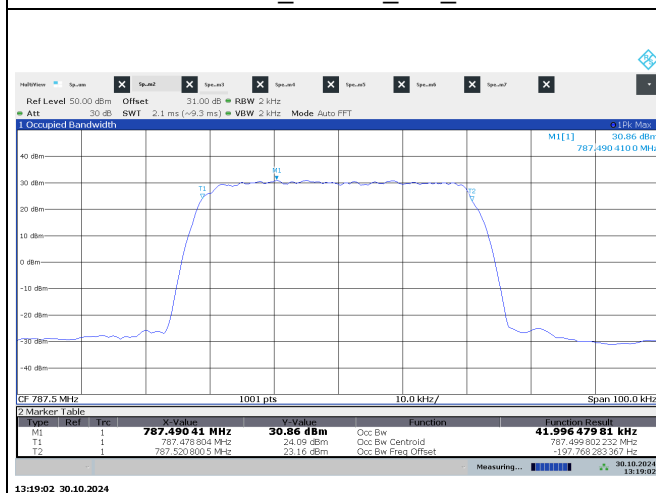


787.5 MHz_64QAM_50k_Port 2

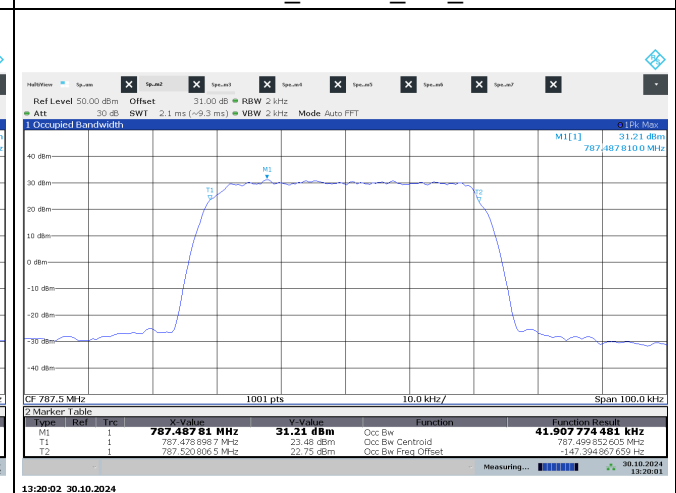


787.5 MHz_256QAM_12.5k_Port 1

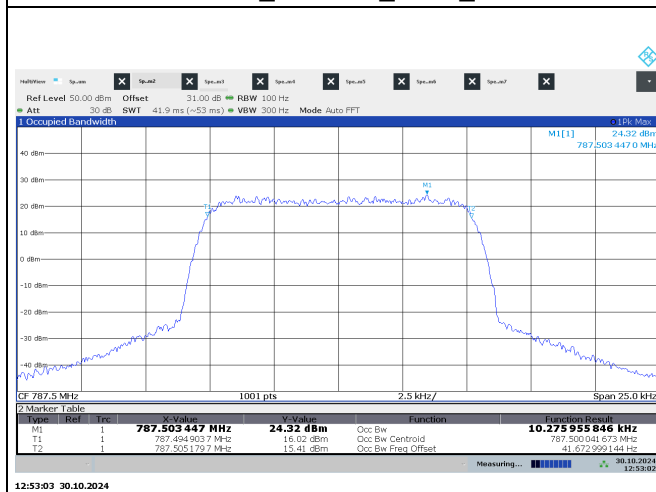


787.5 MHz_256QAM_12.5k_Port 2

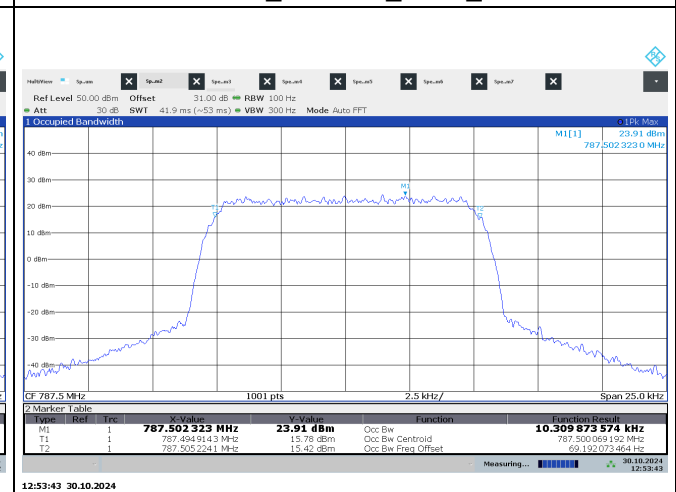

787.5 MHz_256QAM_25k_Port 1

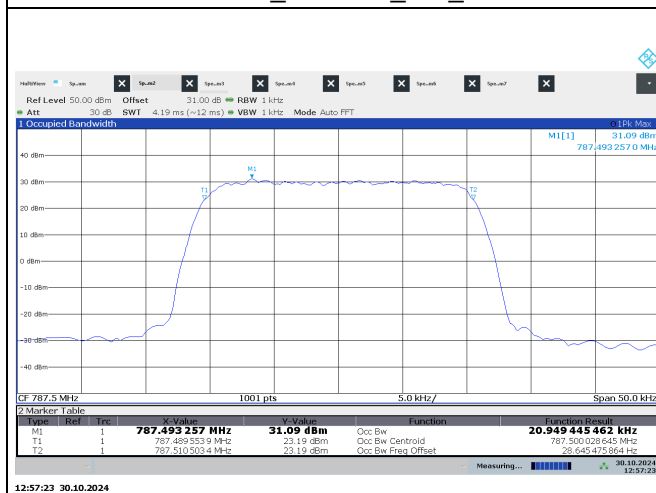

787.5 MHz_256QAM_25k_Port 2

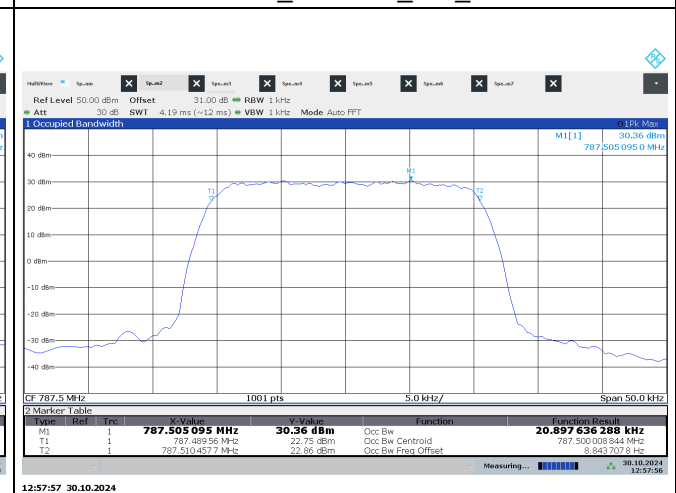

787.5 MHz_256QAM_50k_Port 1




787.5 MHz_256QAM_50k_Port 2



Appendix C. Test Result of Radiated Spurious Emission

30 MHz ~ 1 GHz:


Site :HC-CB02
Condition :3m Horizontal
Mode :LF_LTE_B103_757.5MHz
Test by :Scott Chang

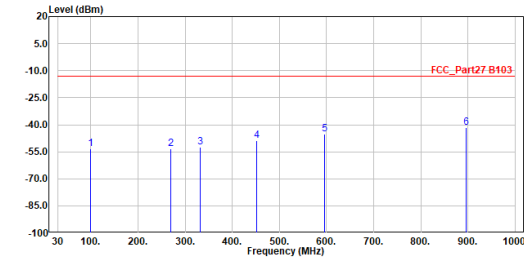

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	98.385	-53.25	-13.00	-40.25	-59.87	6.62	Peak
2	269.881	-53.42	-13.00	-40.42	-64.76	11.34	Peak
3	331.767	-52.46	-13.00	-39.46	-65.56	13.10	Peak
4	451.271	-48.68	-13.00	-35.68	-65.00	16.32	Peak
5	596.189	-45.31	-13.00	-32.31	-64.80	19.49	Peak
6	895.531	-41.78	-13.00	-28.78	-65.27	23.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :LF_LTE_B103_757.5MHz
Test by :Scott Chang

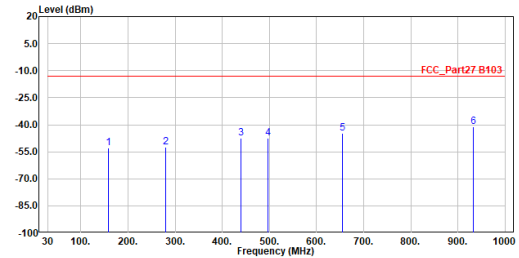

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	158.525	-52.97	-13.00	-39.97	-64.58	11.61	Peak
2	279.290	-52.25	-13.00	-39.25	-64.08	11.83	Peak
3	440.310	-47.68	-13.00	-34.68	-63.73	16.05	Peak
4	497.055	-47.68	-13.00	-34.68	-64.77	17.09	Peak
5	654.389	-44.60	-13.00	-31.60	-65.03	20.43	Peak
6	931.809	-41.06	-13.00	-28.06	-65.11	24.05	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :LF_LTE_B103_787.5MHz
Test by :Scott Chang

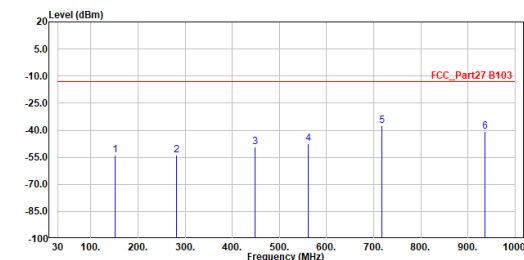

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	151.347	-53.97	-13.00	-40.97	-65.60	11.63	Peak
2	282.006	-53.61	-13.00	-40.61	-65.53	11.92	Peak
3	448.167	-49.49	-13.00	-36.49	-65.70	16.21	Peak
4	561.172	-47.59	-13.00	-34.59	-65.85	18.26	Peak
5	716.566	-37.70	-13.00	-24.70	-58.96	21.26	Peak
6	936.077	-40.82	-13.00	-27.82	-64.96	24.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_LTE_B103_787.5MHz
Test by :Scott Chang

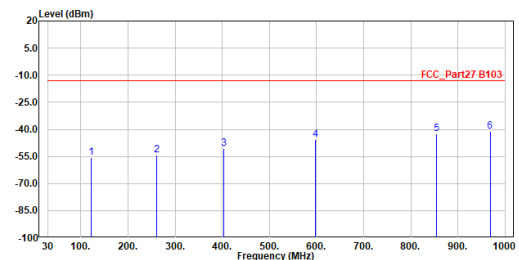


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBm	dBm	dB	dBm	dB	
1	121.277	-55.73	-13.00	-42.73	-65.39	9.66	Peak
2	261.054	-54.33	-13.00	-41.33	-65.05	10.72	Peak
3	403.838	-50.59	-13.00	-37.59	-65.39	14.00	Peak
4	597.256	-45.45	-13.00	-32.45	-64.98	19.53	Peak
5	854.403	-42.40	-13.00	-29.40	-65.47	23.07	Peak
6	968.184	-41.00	-13.00	-28.00	-65.49	24.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= 107 + 20log(3) - 104.8 = 11.8 dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Above 1GHz:


Site :HC-CB02
Condition :3m Horizontal
Mode :LTE_B103_757.5MHz
Test by :Scott Chang

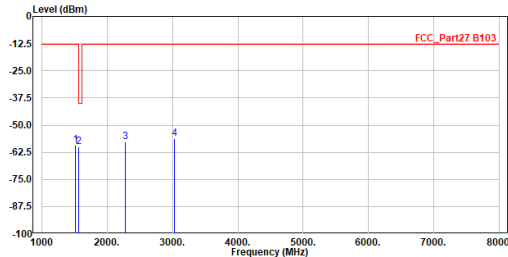

No.	Frequency MHz	Level dBm	Limit Line dBm	Over Limit dB	Read Level dBm	Factor dB	Remark
1	1515.000	-59.28	-13.00	-46.28	-44.06	-15.22	Peak
2	1565.600	-60.16	-40.00	-20.16	-45.16	-15.00	Peak
3	2272.500	-57.82	-13.00	-44.82	-45.62	-12.20	Peak
4	3030.000	-56.26	-13.00	-43.26	-46.75	-9.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :LTE_B103_757.5MHz
Test by :Scott Chang

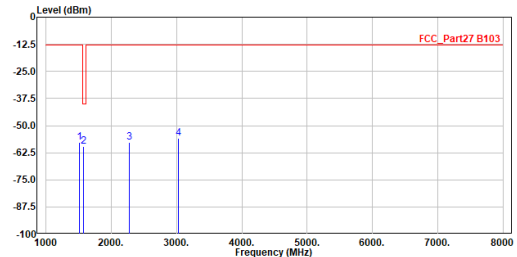

No.	Frequency MHz	Level dBm	Limit Line dBm	Over Limit dB	Read Level dBm	Factor dB	Remark
1	1515.000	-57.60	-13.00	-44.60	-42.38	-15.22	Peak
2	1575.800	-59.56	-40.00	-19.56	-44.61	-14.95	Peak
3	2272.500	-57.60	-13.00	-44.60	-45.40	-12.20	Peak
4	3030.000	-55.95	-13.00	-42.95	-46.44	-9.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :LTE_B103_787.5MHz
Test by :Scott Chang

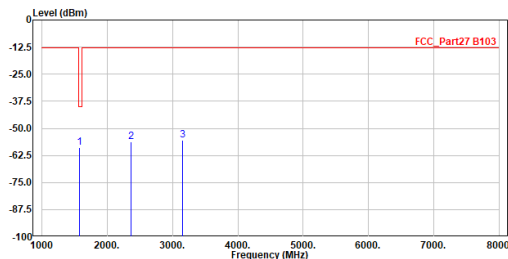

No.	Frequency MHz	Level dBm	Limit Line dBm	Over Limit dB	Read Level dBm	Factor dB	Remark
1	1575.000	-58.95	-40.00	-18.95	-44.00	-14.95	Peak
2	2362.500	-56.29	-13.00	-43.29	-44.38	-11.91	Peak
3	3150.000	-55.59	-13.00	-42.59	-46.41	-9.18	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LTE_B103_787.5MHz
Test by :Scott Chang

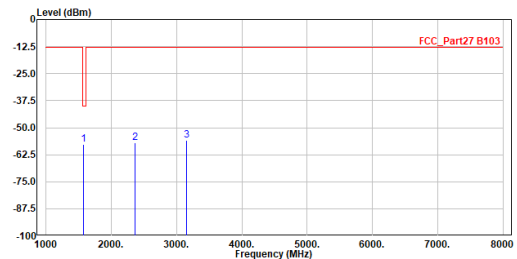


No.	Frequency MHz	Level dBm	Limit Line dBm	Over Limit dB	Read Level dBm	Factor dB	Remark
1	1575.000	-57.81	-40.00	-17.81	-42.86	-14.95	Peak
2	2362.500	-56.98	-13.00	-43.98	-45.07	-11.91	Peak
3	3150.000	-55.67	-13.00	-42.67	-46.49	-9.18	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor + Aux Factor
3. Over Limit = Level - Limit Line
4. Aux Factor = Convert E (dBuVm) to EIRP (dBm)
= $107 + 20\log(3) - 104.8 = 11.8$ dB
5. The other emission levels were very low against the limit.
6. The emission under 1GHz was not included since the emission levels are very low against the limit.

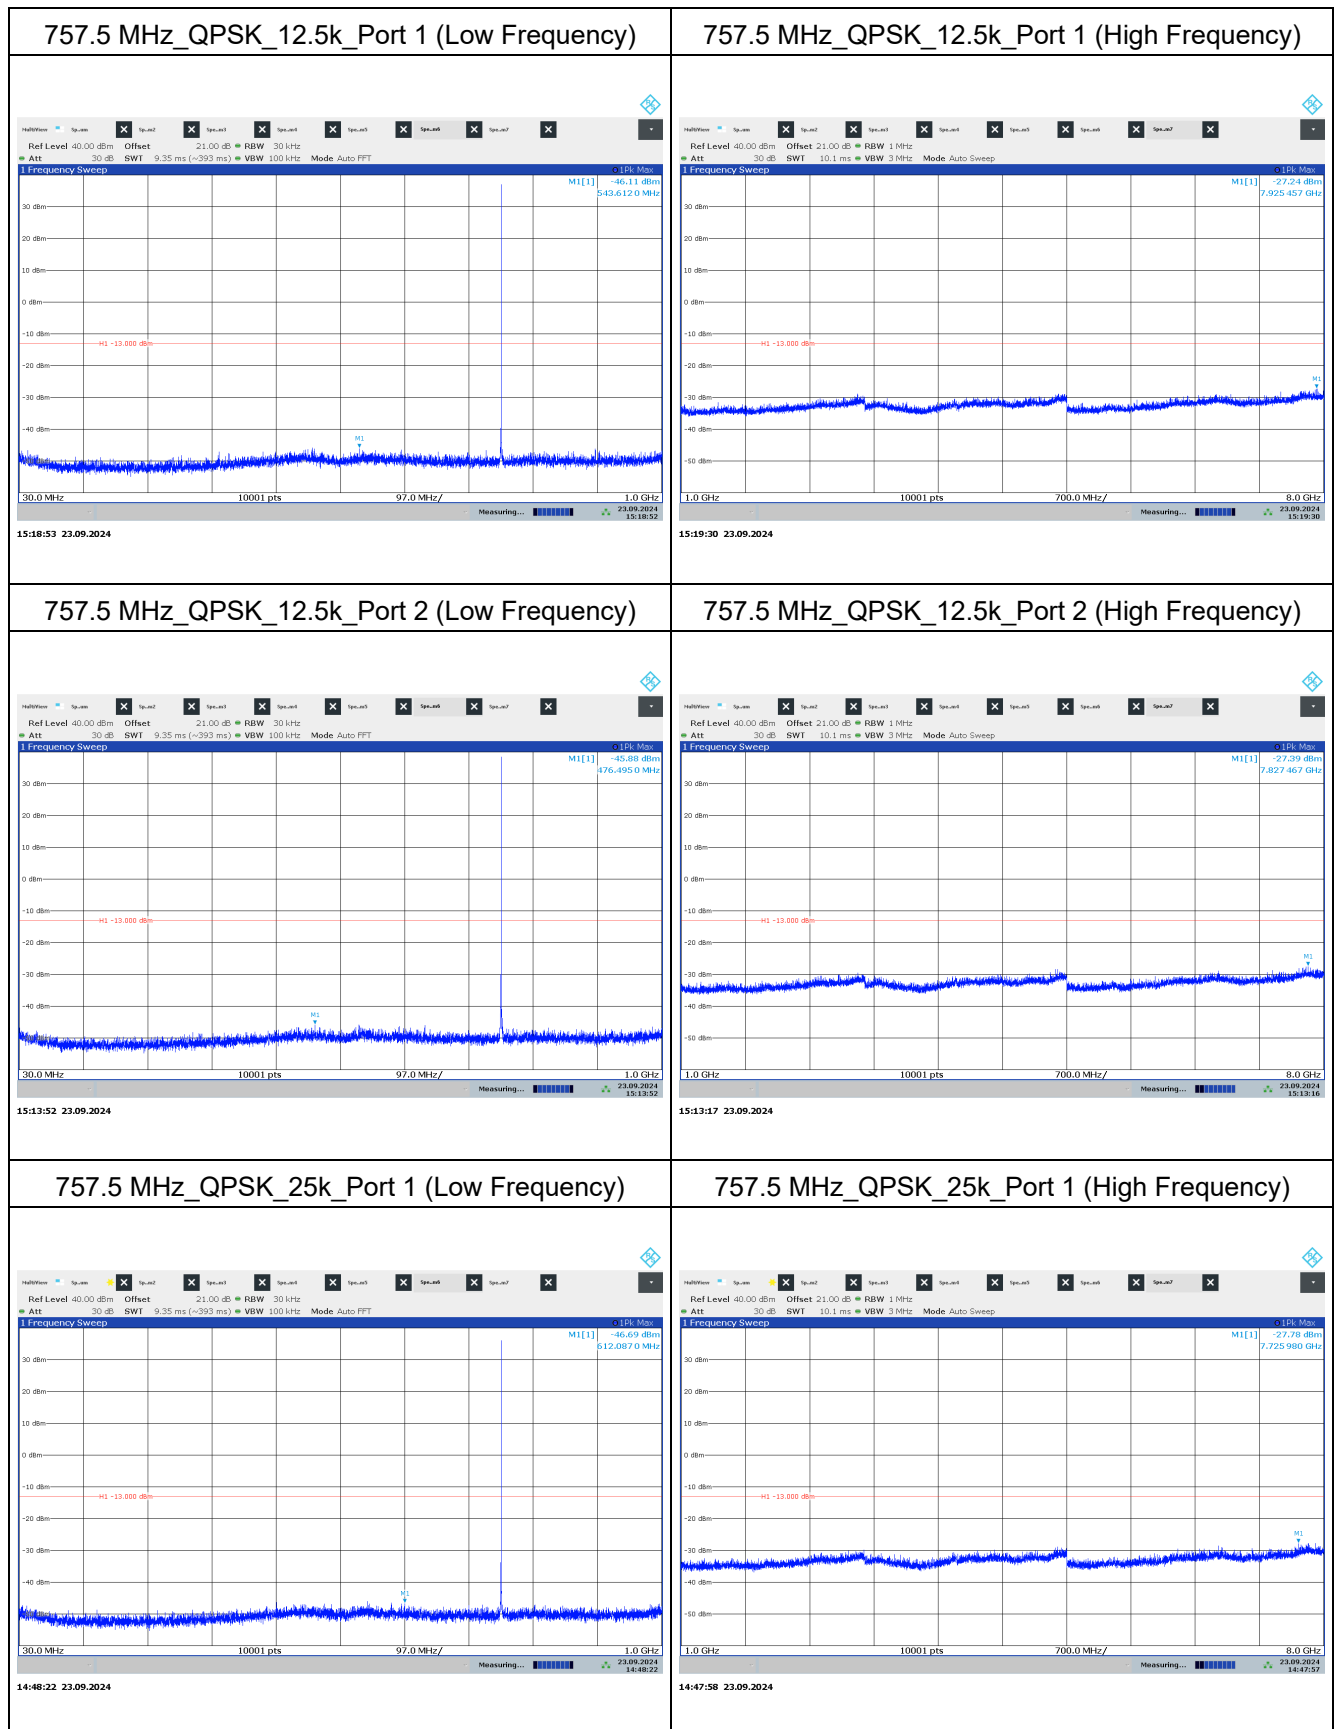Appendix D. Test Result of Conducted Band Edge


757.5 MHz_QPSK_25k_Port 2 (Low Frequency)

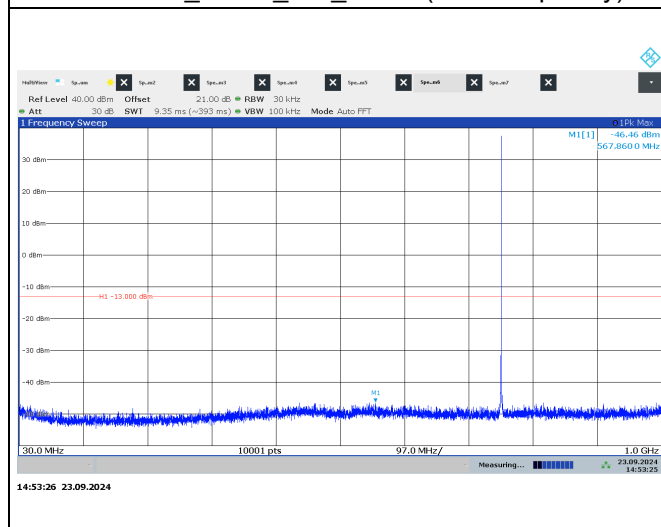


757.5 MHz_QPSK_25k_Port 2 (High Frequency)

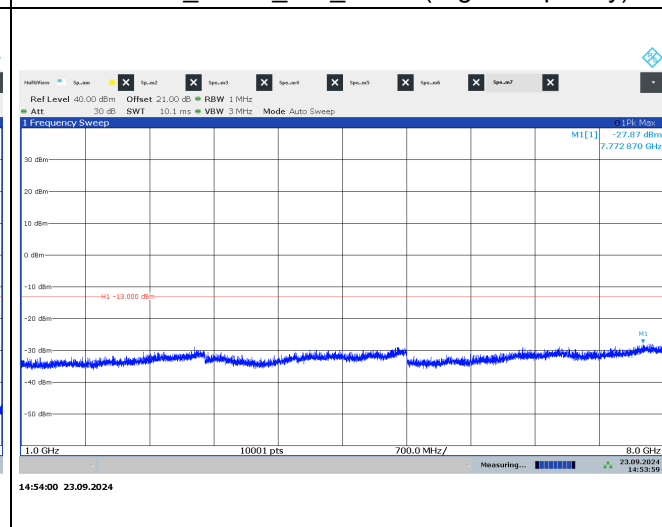


757.5 MHz_QPSK_50k_Port 1 (Low Frequency)

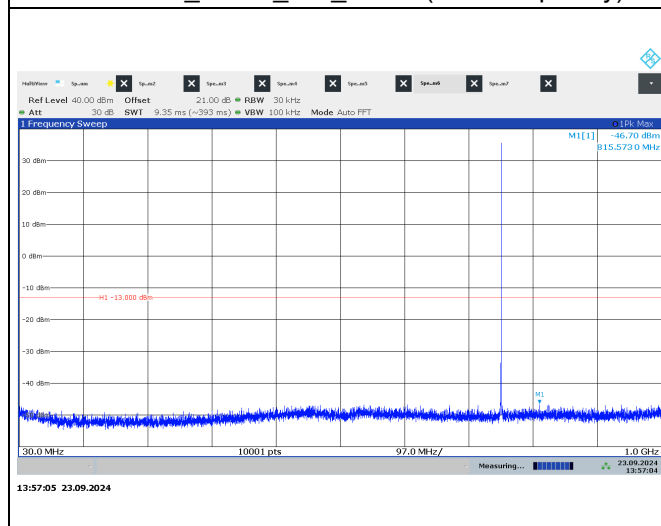


757.5 MHz_QPSK_50k_Port 1 (High Frequency)

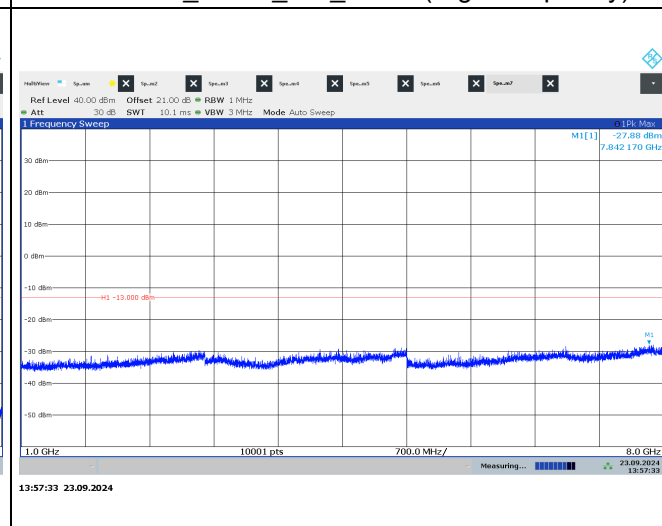


757.5 MHz_QPSK_50k_Port 2 (Low Frequency)

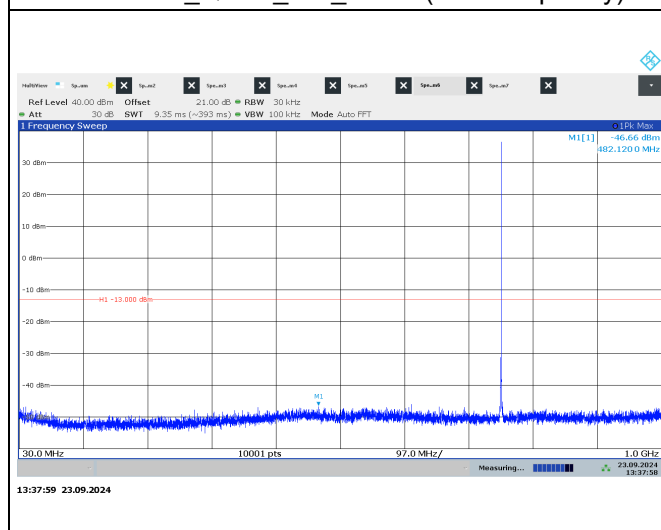


757.5 MHz_QPSK_50k_Port 2 (High Frequency)

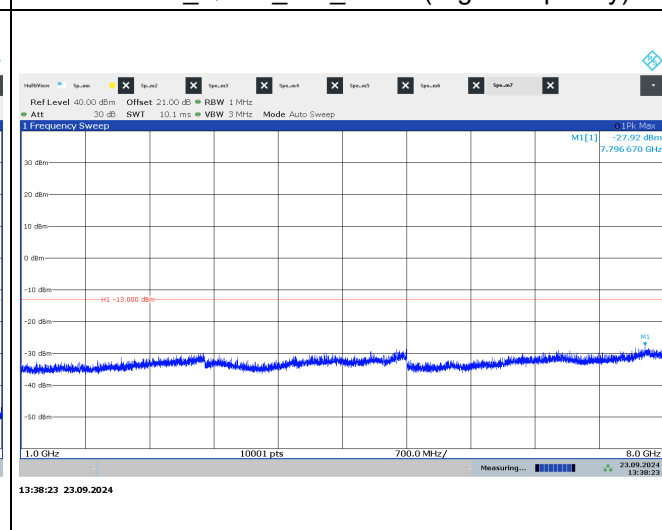


757.5 MHz_QPSK_12.5k_Port 1 (Bandedge)

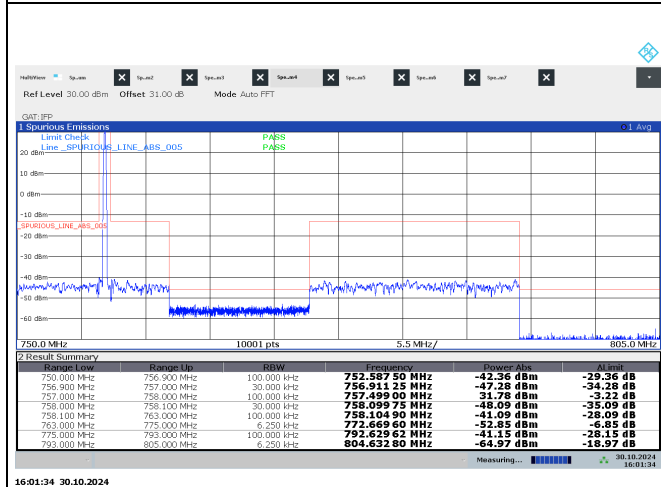


757.5 MHz_QPSK_12.5k_Port 2 (Bandedge)

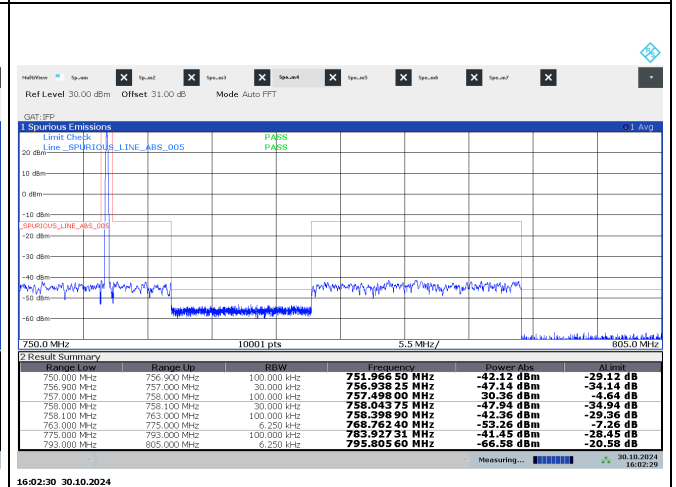


757.5 MHz_QPSK_25k_Port 1 (Bandedge)

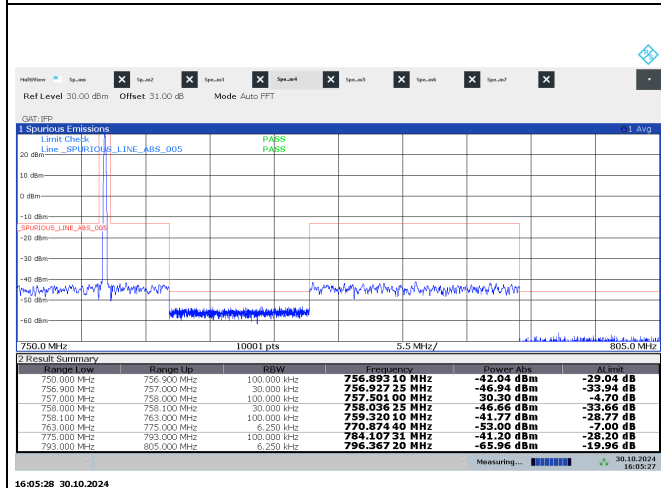


757.5 MHz_QPSK_25k_Port 2 (Bandedge)

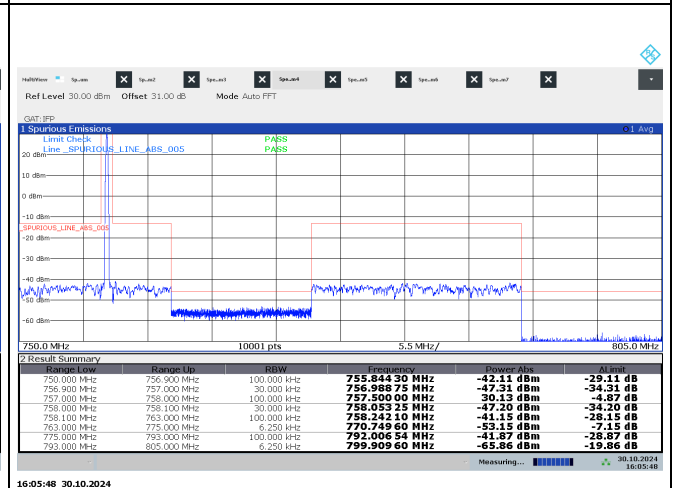


757.5 MHz_QPSK_50k_Port 1 (Bandedge)

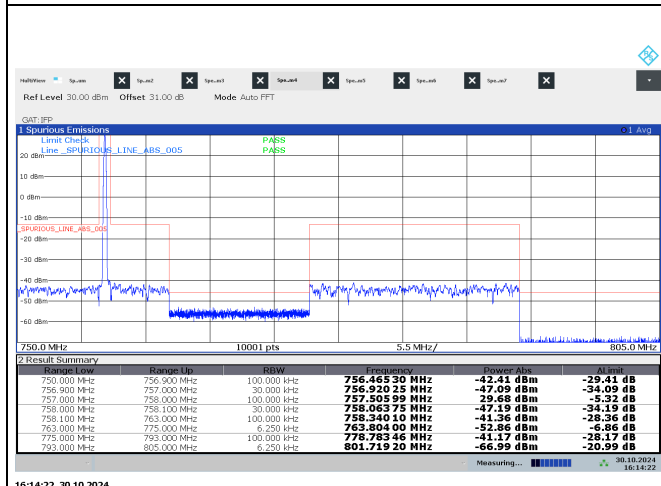


757.5 MHz_QPSK_50k_Port 2 (Bandedge)

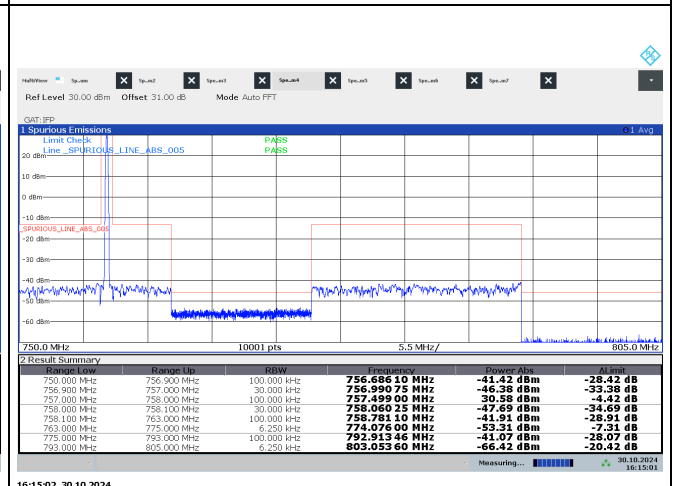


787.5 MHz_QPSK_12.5k_Port 1 (Low Frequency)

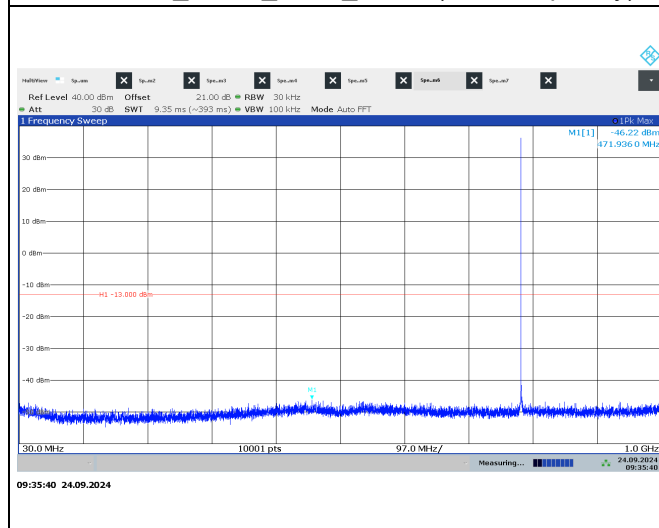


787.5 MHz_QPSK_12.5k_Port 1 (High Frequency)

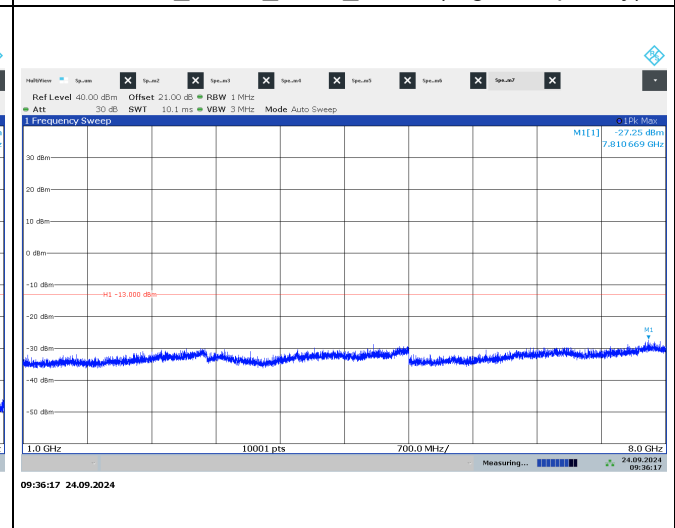


787.5 MHz_QPSK_12.5k_Port 2 (Low Frequency)

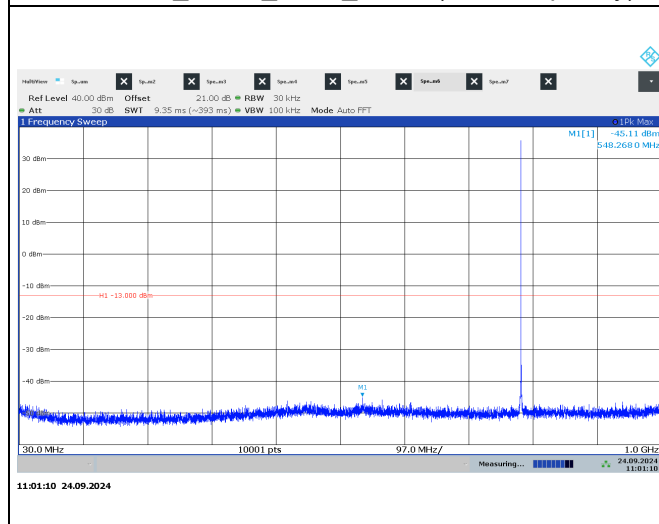

787.5 MHz_QPSK_12.5k_Port 2 (High Frequency)

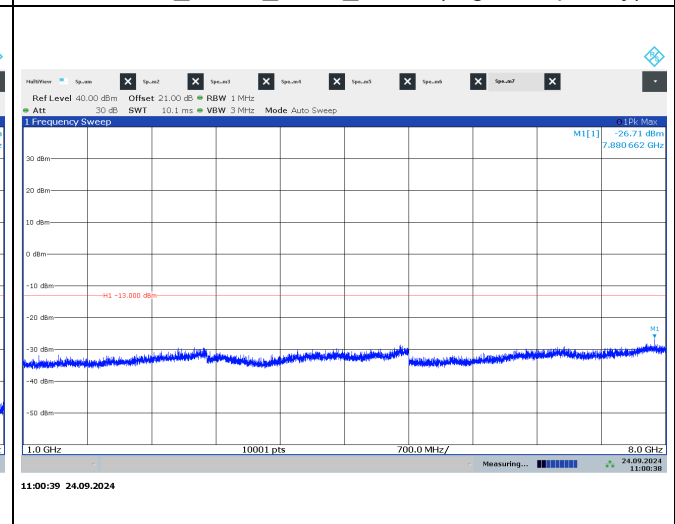

787.5 MHz_QPSK_25k_Port 1 (Low Frequency)

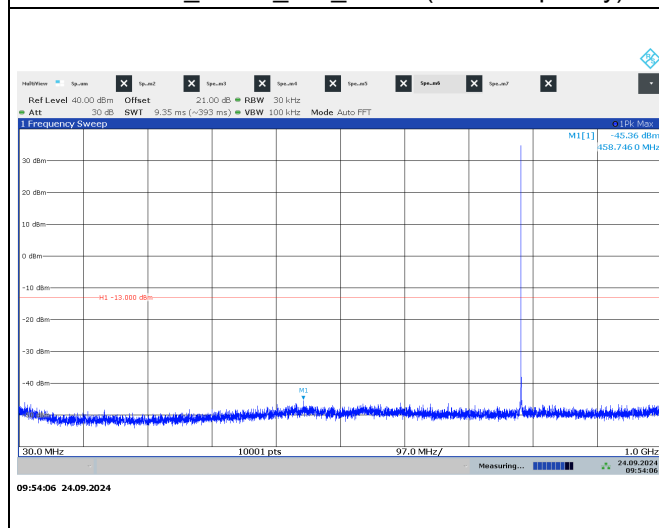

787.5 MHz_QPSK_25k_Port 1 (High Frequency)

