

SUCR240700024401 Report No.:

01 Rev.: Page: 1 of 33

# TEST REPORT

**Application No.:** SUCR2407000244MO

**Applicant:** Quectel Wireless Solutions Co., Ltd.

**Address of Applicant:** Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road,

Minhang District, Shanghai, China 200233

Manufacturer: Quectel Wireless Solutions Co., Ltd.

Address of Manufacturer: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road,

Minhang District, Shanghai, China 200233

**EUT Description:** LTE Cat 1 bis Module

Model No.: EG915Q-NA, EG915Q-NA MINIPCIE

Trade Mark: Quectel

FCC ID: XMR2023EG915QNA

Standards: 47 CFR Part 2

> 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

**Date of Receipt:** July 12, 2024

**Date of Test:** July 18, 2024 to July 19, 2024

Date of Issue: August 2, 2024

Test Result: PASS \*

Nature Shen

In the configuration tested, the EUT detailed in this report complied with the standards specified

Prepared by: Nature Shen/ Project

Manager

Approved by: Well Wei/ Wireless **Laboratory Manager** 

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR240700024401

Rev.: 01 2 of 33 Page:

### Version

	Revision Record				
Version	Chapter	Date	Modifier	Remark	
01		August 2, 2024		Original	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01 3 of 33 Page:

### **Contents**

Ver	sion		2
1		est Summary	
	1.1	LTE Band 5	
	1.2	LTE Band 2	5
	1.3	LTE Band 4/66	
	1.4	LTE Band 12	7
	1.5	LTE Band 13	8
2	G	Seneral Information	
	2.1	Details of Client	10
	2.2	Test Location	10
	2.3	Test Facility	
	2.4	General Description of EUT	
	2.5	Test Mode	
	2.6	Test Environment	12
	2.7	Description of Support Units	12
	2.8	Technical Specification	
	2.9	Test Frequencies	14
3	D	escription of Tests	18
	3.1	Conducted Output Power	18
	3.2	Effective (Isotropic) Radiated Power of Transmitter	
	3.3	Occupied Bandwidth	
	3.4	Band Edge at Antenna Terminals	
	3.5	Spurious And Harmonic Emissions at Antenna Terminal	22
	3.6	Peak-Average Ratio	
	3.7	Field Strength of Spurious Radiation	24
	3.8	Frequency Stability / Temperature Variation	26
	3.9	Test Setups	
	3.10	•	
4	M	lain Test Instruments	
5	M	leasurement Uncertainty	32
6	Α	opendixes	33

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-">http://www.sgs.com/en/Terms-and-</a> This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01 Page: 4 of 33

## **Test Summary**

### 1.1 LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.3	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Reference r SEWM23070002	•
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.		
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	±2.5ppm.		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01 5 of 33 Page:

### 1.2 LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Reference SEWM2307000	•
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.		
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01 6 of 33 Page:

### 1.3 LTE Band 4/66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.2&B.6	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Reference r SEWM23070002	
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.		
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01 7 of 33 Page:

### 1.4 LTE Band 12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.4	
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ 43+10log10(P[Watts])	Reference report SEWM2307000235RG01	
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.		
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01 Page: 8 of 33

## 1.5 LTE Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.5	Pass
Peak-Average Ratio		Limit≤13 dB		
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.		
Band Edges Compliance	§2.1051, §27.53(c)	≤ 43+10log10(P[Watts])		
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	<ul> <li>≤ -13 dBm/100 kHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> <li>On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.</li> <li>For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.</li> </ul>	Reference SEWM2307000	
Field Strength of Spurious Radiation	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775- 788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz		Section 2 of Appendix B.5	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Reference SEWM2307000	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.ferms-end-Conditions-end-Cond

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



SUCR240700024401 Report No.:

01 Rev.: 9 of 33 Page:

Remark for report SUCR240700024401 issue on August 2, 2024:

This test report (Report No.: SUCR240700024401 issue on August 2, 2024) is based on the original test report (Report No.: SEWM2307000235RG01 issue on July 10, 2023).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report the item of Power were tested, Field Strength of Spurious Radiation were performed based on the worst case of the original report with report number SEWM2307000235RG01 issue on July 10, 2023 and other test data please refer to the previous report with report number SEWM2307000235RG01 issue on July 10, 2023.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions forms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx">http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR240700024401

Rev.: 01

Page: 10 of 33

### 2 General Information

### 2.1 Details of Client

Applicant:	Quectel Wireless Solutions Co., Ltd.	
Address of Applicant:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233	
Manufacturer:	Quectel Wireless Solutions Co., Ltd.	
Address of Manufacturer:	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233	

### 2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Levi Li, King-p Li

## 2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SUCR240700024401

Rev.: 01

11 of 33 Page:

## 2.4 General Description of EUT

EUT Description:	LTE Cat 1 bis Module			
Model No.:	EG915Q-NA, EG915Q-NA	MINIPCIE		
Trade Mark:	Quectel			
Hardware Version:	R1.0			
Software Version:	EG915QNALCR01A07M04	ļ		
Power Supply:	5V	5V		
IMEI:	867507062918798			
Antenna Type:	External Antenna			
	LTE Band 2: 1.43d	Bi	LTE Band 4:	1.54dBi
	LTE Band 5: 2.21d	Bi	LTE Band 12	2: 2.00dBi
Antenna Gain:	LTE Band 13: 2.10d	LTE Band 13: 2.10dBi LTE Band 66: 1.68dBi		
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.			
RF Cable:	4.2dB(Below 1GHz) 4.5dB(1.0~2		4GHz)	4.8dB(2.4~3.4GHz)
Pomark:				

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

12 of 33 Page:

### 2.5 Test Mode

Test Mode	Test Modes Description		
LTE/TM1	LTE system, QPSK modulation		
LTE/TM2	LTE system, 16QAM modulation		
Remark: The test mode(s) are selected according to relevant radio technology specifications.			

### 2.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests		
Relative Humidity	44-46 % RH Ambient		
Value	Temperature(℃)	Voltage(V)	
NTNV	22~23	3.8	

Remark:

NV: Normal Voltage NT: Normal Temperature

## 2.7 Description of Support Units

Description	Manufacturer	Model No.		
Mother board	Quectel	N/A		
Remark: all above the information of table are provided by client.				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

13 of 33 Page:

## 2.8 Technical Specification

Characteristics	Description			
Radio System Type				
	Band	TX	RX	
	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz	
	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz	
Supported Frequency Range	LTE Band 5	824 to 849 MHz	869 to 894 MHz	
	LTE Band 12	699 to 716 MHz	729 to 746 MHz	
	LTE Band 13	777 to 787 MHz	746 to 756 MHz	
	LTE Band 66	1710 to 1780 MHz	2110 to 2200 MHz	
	LTE Band 2	⊠1.4 MHz ⊠3 MHz	⊠5 MHz ⊠10 MHz	
		⊠15 MHz ⊠20 MHz		
	LTE Band 4	⊠1.4 MHz ⊠3 MHz	⊠5 MHz ⊠10 MHz	
	LTE Ballu 4	⊠15 MHz ⊠20 MHz		
	LTE Band 5	⊠1.4 MHz ⊠3 MHz	⊠5 MHz ⊠10 MHz	
Supported Channel Bandwidth	LTE Band 12	⊠1.4 MHz ⊠3 MHz	⊠5 MHz ⊠10 MHz	
	LTE Band 13	⊠5 MHz ⊠10 MHz		
	LTE Band 66	⊠1.4 MHz ⊠3 MHz	⊠5 MHz ⊠10 MHz	
	LTE Balla 00	⊠15MHz ⊠20MHz		
	Note: Only 27 Resource Blocks for 10MHz/15MHz/20MHz when the modulation is 16QAM.			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

14 of 33 Page:

## 2.9 Test Frequencies

Toot Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		NΛ	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		KA	1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz		Channel 18625	Channel 18900	Channel 19175
		TX	1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LIE Dallu Z			Channel 18650	Channel 18900	Channel 19150
	10MHz	TX	1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	DV	Channel 675	Channel 900	Channel 1125
		RX	1937.5 MHz	1960 MHz	1982.5 MHz
			Channel 18700	Channel 18900	Channel 19100
		TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		NΛ	1940 MHz	1960 MHz	1980 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

Page: 15 of 33

T	5 1 1 1	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KΛ	2112.5 MHz	2132.5MHz	2152.5 MHz
		,	Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		KA	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
	<b>514</b> 11	TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
	5MHz	RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Danu 4		TX	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
	10MHz	RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
		100	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	RX	Channel 2050	Channel 2175	Channel 2300
		KΛ	2120 MHz	2132.5MHz	2145 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-">http://www.sgs.com/en/Terms-and-</a> This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

16 of 33 Page:

Took Mode	Danielo dalle	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
		TX	Channel 20407	Channel 20525	Channel 20643
			824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		KA	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
		TX	825.5 MHz	836.5 MHz	847.5 MHz
	3MHz	DV	Channel 2415	Channel 2525	Channel 2635
LTE Davide		RX	870.5 MHz	881.5 MHz	892.5 MHz
LTE Band 5		TX	Channel 20425	Channel 20525	Channel 20625
	CM I		826.5 MHz	836.5 MHz	846.5 MHz
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
			Channel 20450	Channel 20525	Channel 20600
		TX	829 MHz	836.5 MHz	844 MHz
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600
		NΛ	874 MHz	881.5 MHz	889 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Dariuwiuiri	IA/NA	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		KA	729.7 MHz	737.5 MHz	745.3 MHz
			Channel 23025	Channel 23095	Channel 23165
		TX	700.5 MHz	707.5 MHz	714.5 MHz
	3MHz	RX	Channel 5025	Channel 5095	Channel 5165
1.TE D 140			730.5 MHz	737.5 MHz	744.5 MHz
LTE Band 12	5MHz	TX	Channel 23035	Channel 23095	Channel 23155
			701.5 MHz	707.5 MHz	713.5 MHz
		RX	Channel 5035	Channel 5095	Channel 5155
_			731.5 MHz	737.5 MHz	743.5 MHz
			Channel 23060	Channel 23095	Channel 23130
		TX	704 MHz	707.5 MHz	711 MHz
	10MHz	DY	Channel 5060	Channel 5095	Channel 5130
		RX	734 MHz	737.5 MHz	741 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

17 of 33 Page:

Test Mode	Bandwidth	TX / RX		RF Channel	
rest Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 23025	Channel 23230	Channel 23255
		TX	779.5 MHz	782 MHz	784.5 MHz
	5MHz	RX	Channel 5205	Channel 5230	Channel 5255
LTE Band 13			748.5 MHz	751 MHz	753.5 MHz
LIE Danu 13		TX	Channel 23230	Channel 23230	Channel 23230
			782 MHz	782 MHz	782 MHz
	10MHz	DV	Channel 5230	Channel 5230	Channel 5230
	1	RX	751 MHz	751 MHz	751 MHz

Tost Mode	Pandwidth	TX / RX		RF Channel	
Test Mode	Bandwidth	IA/RA	Low (L)	Middle (M)	High (H)
			Channel 131979	Channel 132322	Channel 132665
		TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz	DV	Channel 66443	Channel 66786	Channel 67329
		RX	2110.7 MHz	2145MHz	2199.3 MHz
		,	Channel 131987	Channel 132322	Channel 132657
		TX	1711.5 MHz	1745 MHz	1778.5MHz
	3MHz	RX	Channel 66451	Channel 66786	Channel 67321
		KA	2111.5 MHz	2145MHz	2198.5MHz
			Channel 131997	Channel 132322	Channel 132647
		TX	1712.5 MHz	1745 MHz	1777.5 MHz
	5MHz	RX	Channel 66461	Channel 66786	Channel 67311
LTE Band 66			2112.5 MHz	2145MHz	2197.5 MHz
LIE Band oo		TX	Channel 132022	Channel 132322	Channel 132622
			1715 MHz	1745 MHz	1775 MHz
	10MHz	10MHz RX	Channel 66486	Channel 66786	Channel 67286
		NA.	2115 MHz	2145MHz	2195 MHz
		,	Channel 132047	Channel 132322	Channel 132597
		TX	1717.5 MHz	1745 MHz	1772.5 MHz
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261
_		100	2117.5 MHz	2145MHz	2192.5 MHz
			Channel 132072	Channel 132322	Channel 132572
		TX	1720 MHz	1745 MHz	1770 MHz
	20MHz	RX	Channel 66536	Channel 66786	Channel 67236
		KΛ	2120 MHz	2145MHz	2190 MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

01 Rev.:

18 of 33 Page:

#### 3 **Description of Tests**

## 3.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions forms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx">http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd.



Report No.: SUCR240700024401

Rev.: 01

19 of 33 Page:

## 3.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240700024401 Report No.:

Rev.: Λ1

Page: 20 of 33

### 3.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laborator



Report No.: SUCR240700024401

01 Rev.:

Page: 21 of 33

## 3.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser. the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240700024401 Report No.:

Rev.: 01

Page: 22 of 33

## 3.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laborator



SUCR240700024401 Report No.:

Rev.: 01

Page: 23 of 33

### 3.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled.
- Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. Wireless Laborator



Report No.: SUCR240700024401

Rev.: 01

Page: 24 of 33

## 3.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

### Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Condi

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laborator



Report No.: SUCR240700024401

01 Rev.:

Page: 25 of 33

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240700024401 Report No.:

Rev.: 01

Page: 26 of 33

## 3.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

#### **Time Period and Procedure:**

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions. Aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounted-Conditions-and-Conditions-and-Conditions-and-Conditions-encounted-Conditions-and-Conditions-encounte

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.




Report No.: SUCR240700024401

Rev.: 01


Page: 27 of 33

## 3.9 Test Setups

#### **Test Setup 1** 3.9.1

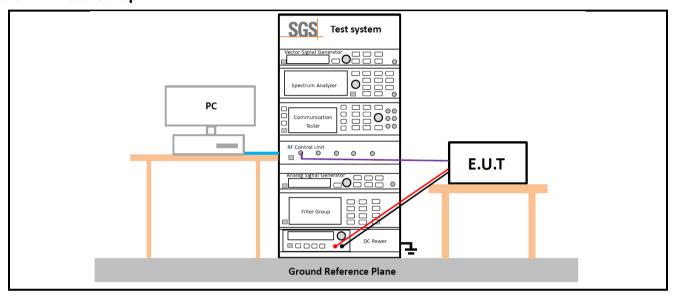

#### 3.9.2 **Test Setup 2**

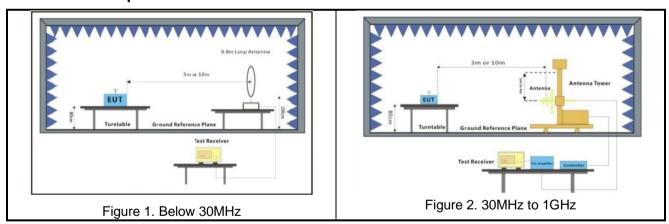

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd.



Report No.: SUCR240700024401

Rev.: 01

Page: 28 of 33


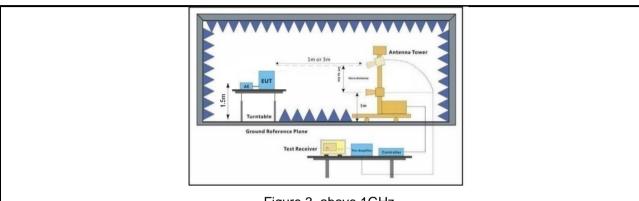


Figure 3. above 1GHz

#### 3.9.3 **Test Setup 3**

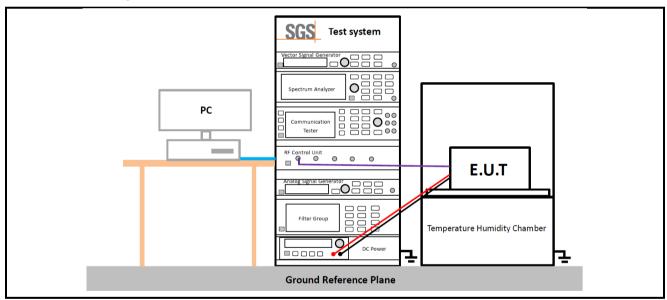

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240700024401 Report No.:

Rev.: 01

29 of 33 Page:

### 3.10Test Conditions

Transmit Output Power Data - Average Power, Total					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	st Mode LTE/TM1;LTE/TM2;				
	Field Strength of Spurious Radiation				
Test Case Test Conditions					
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 2				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	LTE/TM1; Remark: All bandwidth and modulation of LTE have been pre tested, and only the worst results are reflected in the report.				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

30 of 33 Page:

### **Main Test Instruments**

RF Test Equipment					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2022/11/09	2025/11/08
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2024/02/18	2025/02/17
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2024/05/08	2025/05/07
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Measurement Software	TST	TST-271-2.0	SUWI-03-55-01	NCR	NCR
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2023/11/21	2024/11/20
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2024/05/08	2025/05/07
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2023/09/12	2024/09/11

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

Rev.: 01

Page: 31 of 33

	RSE Test System					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/06/03	2026/06/02	
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2024/02/18	2025/02/17	
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	2023/11/21	2024/11/20	
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2024/02/01	2025/01/31	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	2023/05/13	2025/05/12	
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2023/05/13	2025/05/12	
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2025/05/12	
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2024/02/01	2025/01/31	
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2024/02/01	2025/01/31	
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2023/11/21	2024/11/20	
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR	

Remark: NCR=No Calibration Requirement.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



Report No.: SUCR240700024401

01 Rev.:

32 of 33 Page:

#### 5 **Measurement Uncertainty**

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	ltem	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
		± 3.13dB (9k -30MHz)
	Dodistad Emission	± 4.8dB (30M -1GHz)
2	Radiated Emission	± 4.8dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)

#### Remark:

The Ulab Uncertainty) is less than UcispiteTSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sqs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/lerms-and-Conditions.aspx">http://www.sgs.com/en/lerms-and-Conditions.aspx</a> and Conditions forms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx">http://www.sgs.com/en/lerms-and-Conditions/ems-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory



SUCR240700024401 Report No.:

Rev.: 01

33 of 33 Page:

## 6 Appendixes

Appendix A.2	WWAN Setup Photos
Appendix B.1	LTE Band 2
Appendix B.2	LTE Band 4
Appendix B.3	LTE Band 5
Appendix B.4	LTE Band 12
Appendix B.5	LTE Band 13
Appendix B.6	LTE Band 66

---End of Report---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-This document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions-ferms-and-Conditions-and-Conditions-and-Conditions-and-Conditions-and-Conditions-Erms-and-Conditions-and-Conditions-Erms-and-Condition

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co. Ltd. Wireless Laboratory