

Withings

TEST REPORT

Model:
WPA02

REPORT NUMBER
241200287THC-001

ISSUE DATE
Mar. 05, 2025

PAGES
27

DOCUMENT CONTROL NUMBER
GFT-OP-10h (28-Nov-2018)
© 2020 Intertek



Radio Spectrum TEST REPORT

Applicant:	Withings 2 Rue Maurice Hartmann Issy-les-Moulineaux 92130 France
Product:	Withings U-Scan Reader
Model No.:	WPA02
FCC ID:	XNAWPA02
Test Method/ Standard:	47 CFR FCC Part 15.225
Test By:	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 17, Ln. 246, Niupu S. Rd., Xiangshan Dist, Hsinchu City 300075, Taiwan



Rich Nien

Rich Nien
Engineer

Rico Deng

Rico Deng
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Report No.	Issue Date	Revision Summary
241200287THC-001	Mar. 05, 2025	Original report

Table of Contents

1. General Information	5
1.1 Identification of the EUT	5
1.2 Antenna description	5
1.3 Operation mode	5
1.4 Peripherals equipment	6
2. Fundamental emission	7
2.1 Operating environment	7
2.2 Limit for Fundamental emission	7
2.3 Measuring instrument setting	7
2.4 Test procedure	8
2.5 Test diagram	8
2.6 Test result	9
3. Frequency Satiability	10
3.1 Operating environment	10
3.2 Limit for Frequency Satiability	10
3.3 Measuring instrument setting	10
3.4 Test procedure	10
3.5 Test result	11
4. Out of band Radiated Emissions	17
4.1 Operating environment	17
4.2 Limit for emission in restricted frequency bands (Radiated emission measurement) ..	17
4.3 Measuring instrument setting	18
4.4 Test procedure	18
4.5 Test configuration	19
4.5.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna:	19
4.5.2 Radiated emission below 1GHz using Bilog Antenna	19
4.6 Test result	20
4.6.1 Measurement results: frequency range from 9 kHz to 30 MHz	20
4.6.2 Measurement results: frequencies below 1 GHz	21
5. AC Power Line Conducted Emission	22
5.1 Measuring instrument setting	22
5.2 Test Procedure	22
5.3 Test Diagram	22
5.4 Limit	23
5.5 Test Results	24
Appendix A: Test equipment list	26
Appendix B: Measurement Uncertainty	27

Summary of Test Data

Test Requirement	Applicable Rule (Section 15.225)	Result
Fundamental emission	15.225 (a)	Pass
Frequency Satiability	15.225 (e)	Pass
Out of band Radiated Emissions	15.225(d)	Pass
AC Power Line Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

1. General Information

1.1 Identification of the EUT

Product:	Withings U-Scan Reader
Model No.:	WPA02
Operating Frequency:	13.56 MHz
Rating:	1. DC 5V 2. DC 3.8V
Power Cord:	N/A
Sample receiving date:	2025/01/13
Sample condition:	Workable
Test Date(s):	2025/01/21 ~ 2025/02/06

SOP file name and version
RF_EMI_STM32WB_test_procedure_v7

	Mac
RAD	A47EFA3CCA08

1.2 Antenna description

Antenna Type	: PCB antenna
Connector Type	: Fixed

1.3 Operation mode

The EUT continuously transmits at 13.56 MHz while connected to the Notebook PC and executing.

1.4 Peripherals equipment

Peripherals name	Brand	Model No.	Serial No.
Notebook PC	HP	HP ProBook 440 G3	5CD8021S9H
Fixture	Yahorng	PC23H019	N/A

Peripherals name	Length	Shielded(Y/N)	Brand	Model No.
USB Cable	3m	Y	UGREEN	USB Cable

2. Fundamental emission

2.1 Operating environment

Temperature (°C):	21
Relative Humidity (%):	48
Test date:	2025/02/05

2.2 Limit for Fundamental emission

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 uV/m(83.99 dBuV/m) at 30 meters.


2.3 Measuring instrument setting

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	QP
RBW	10 kHz
Sweep	Auto couple
Trace	Max hold
Span	900 kHz
Attenuation	Auto

2.4 Test procedure

1. Configure the EUT according to ANSI C63.10: 2013. The EUT was placed on the top of the turntable 0.8 meter above ground. The center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the companion devices. The turntable was rotated by 360 degree to find the position of the maximum emission level.
3. Set the test-receiver system to peak or CISPR quasi-peak detector with specified bandwidth under maximum hold mode.

2.5 Test diagram

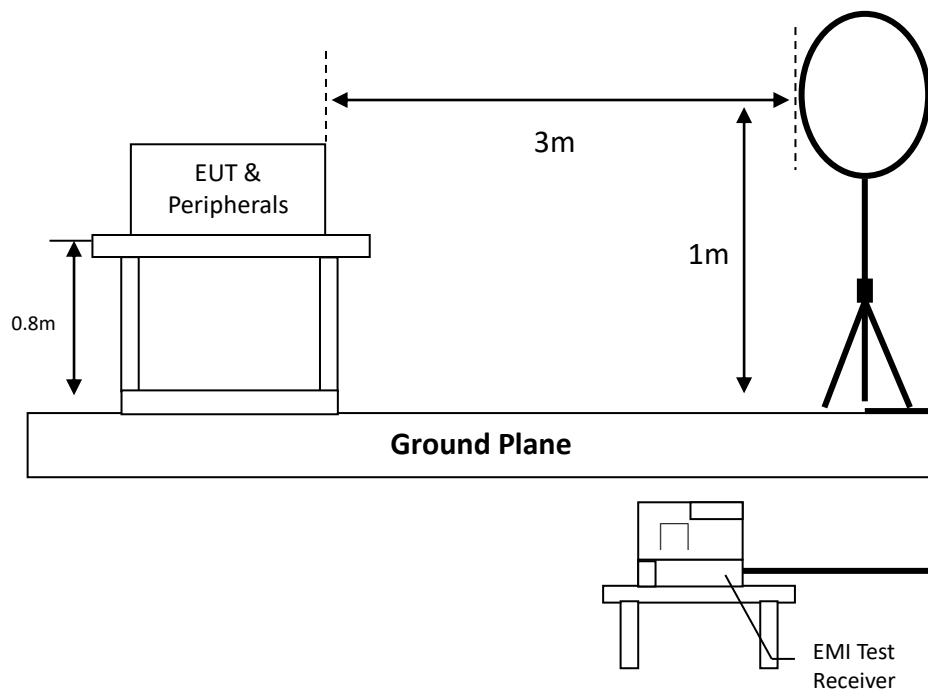

2.6 Test result

Polarization	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	13.56	PK	19.78	36.85	56.63	124.00	-67.37
Parallel	13.56	PK	19.78	34.57	54.35	124.00	-69.65
Ground-parallel	13.56	PK	19.78	32.85	52.63	124.00	-71.37

Remark: Corr. Factor = Antenna Factor + Cable Loss

Limit= 15848(uV/m)@30m=84 dBuV +40 dBuV (decade) = 124 dBuV/m@3m

3. Frequency Satiability

3.1 Operating environment

Temperature (°C) :	-20 ~ 50
Relative Humidity (%) :	52
Test date :	2025/01/21

3.2 Limit for Frequency Satiability

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

3.3 Measuring instrument setting

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Detector	Peak
RBW	1kHz
VBW	1kHz
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Sufficient to see the complete emission BW
Attenuation	Auto


3.4 Test procedure

Turn the EUT on, and couple its output to a frequency counter or other frequency-measuring device of sufficient accuracy, considering the frequency tolerance with which the EUT shall comply.

3.5 Test result


Temperature	Voltage	Frequency (MHz)	Center (MHz)	Deviation (%)	Limit (%)	Result
50°C	3.8	13.5600	13.5603	-0.002	±0.01	Pass
40°C	3.8	13.5600	13.5603	-0.002	±0.01	Pass
30°C	3.8	13.5600	13.5603	-0.002	±0.01	Pass
20°C	3.23	13.5603	13.5603	0.000	±0.01	Pass
	3.8	13.5603	13.5603	0.000	±0.01	Pass
	4.37	13.5603	13.5603	0.000	±0.01	Pass
10°C	3.8	13.5603	13.5603	0.000	±0.01	Pass
0°C	3.8	13.5603	13.5603	0.000	±0.01	Pass
-10°C	3.8	13.5603	13.5603	0.000	±0.01	Pass
-20°C	3.8	13.5603	13.5603	0.000	±0.01	Pass

-20°C @DC 3.8V

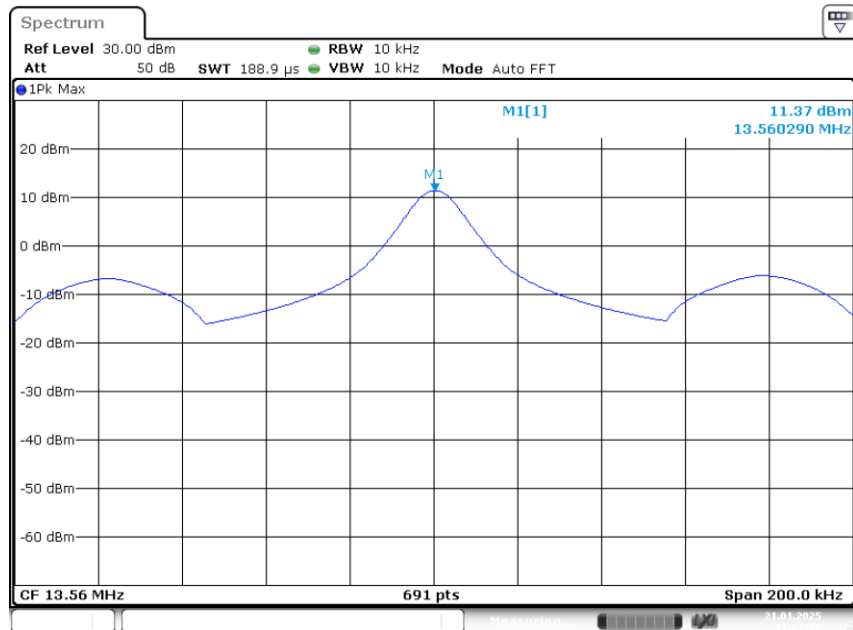


Date: 21.JAN.2025 11:07:22

-10°C @DC 3.8V

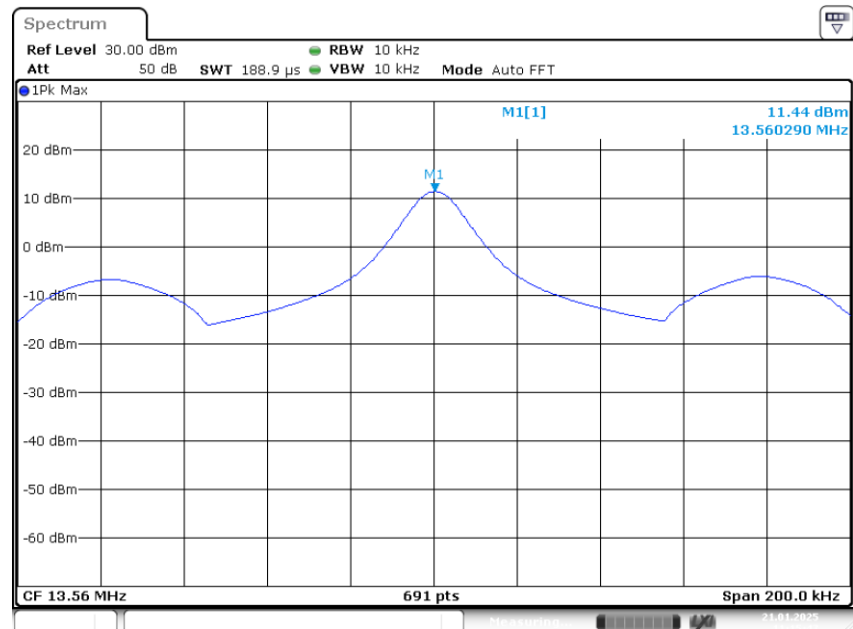


Date: 21.JAN.2025 11:15:48

0°C @DC 3.8V

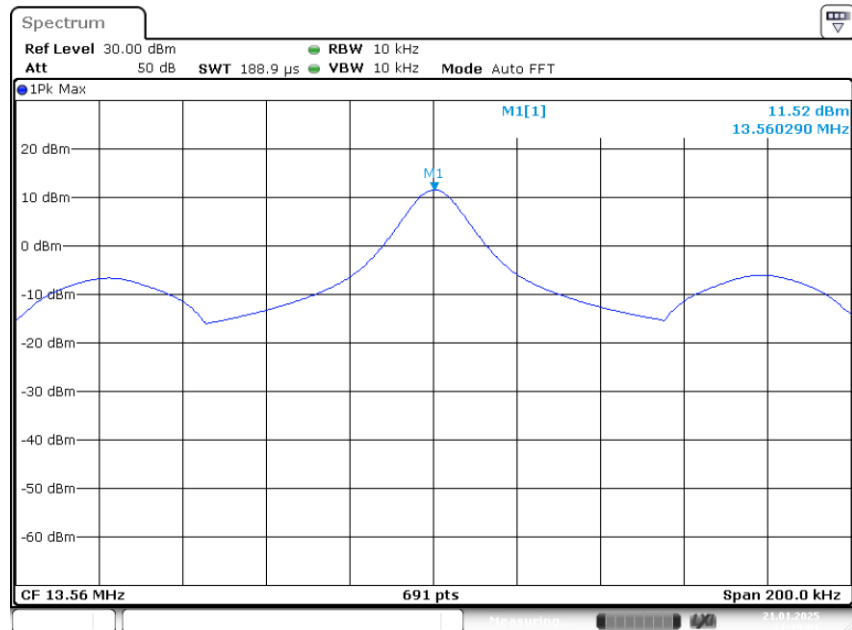


Date: 21.JAN.2025 11:19:01

10°C @DC 3.8V

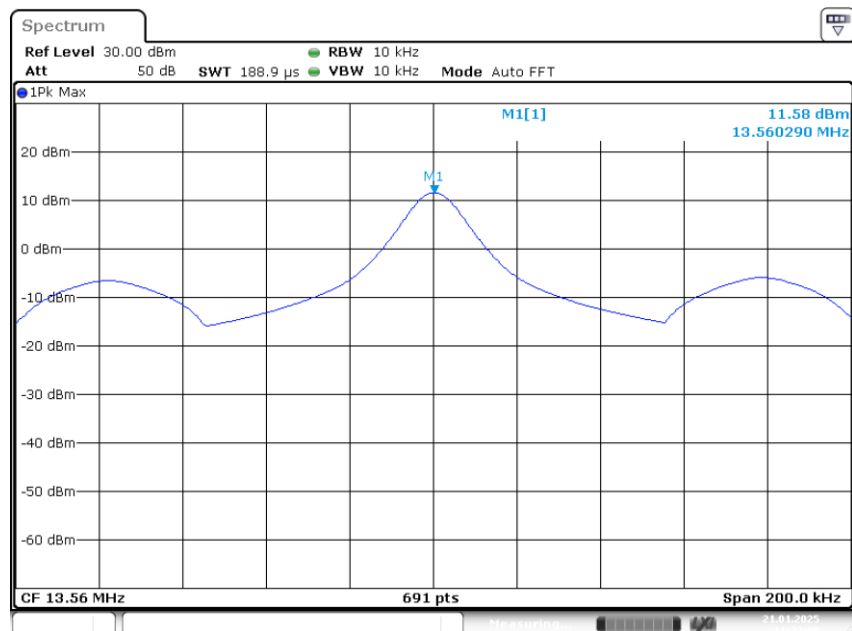


Date: 21.JAN.2025 11:22:09

20°C @DC 3.23V

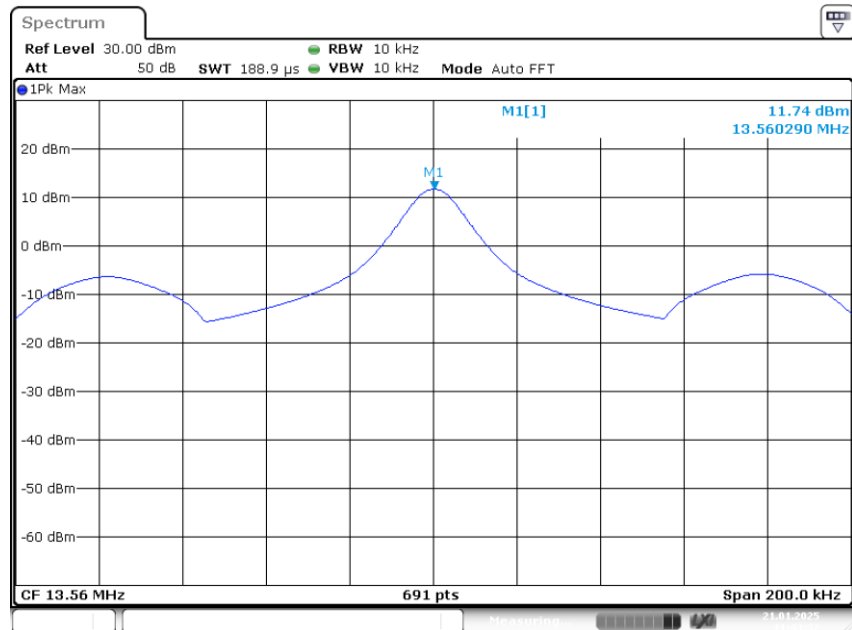


Date: 21.JAN.2025 11:43:33

20°C @DC 3.8V

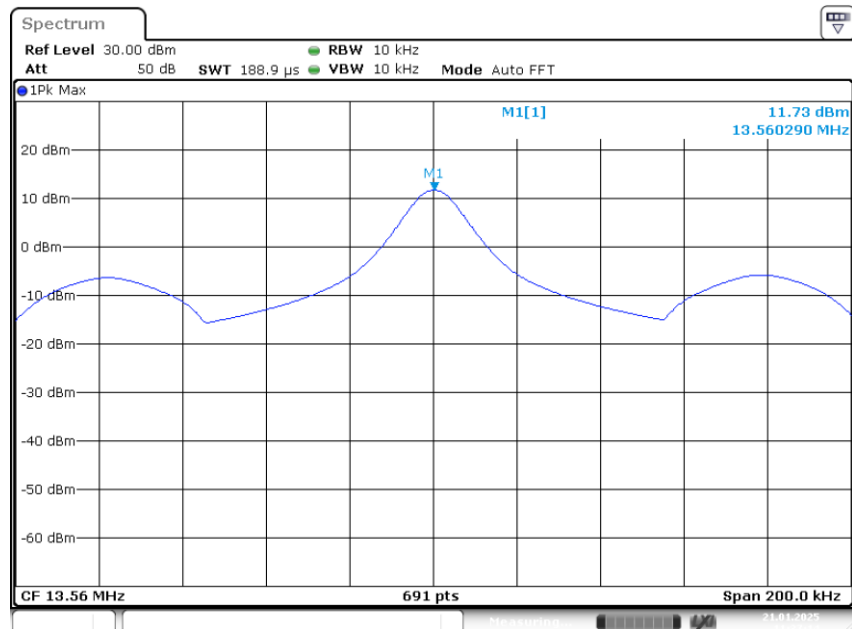


Date: 21.JAN.2025 11:37:15

20°C @DC 4.37V

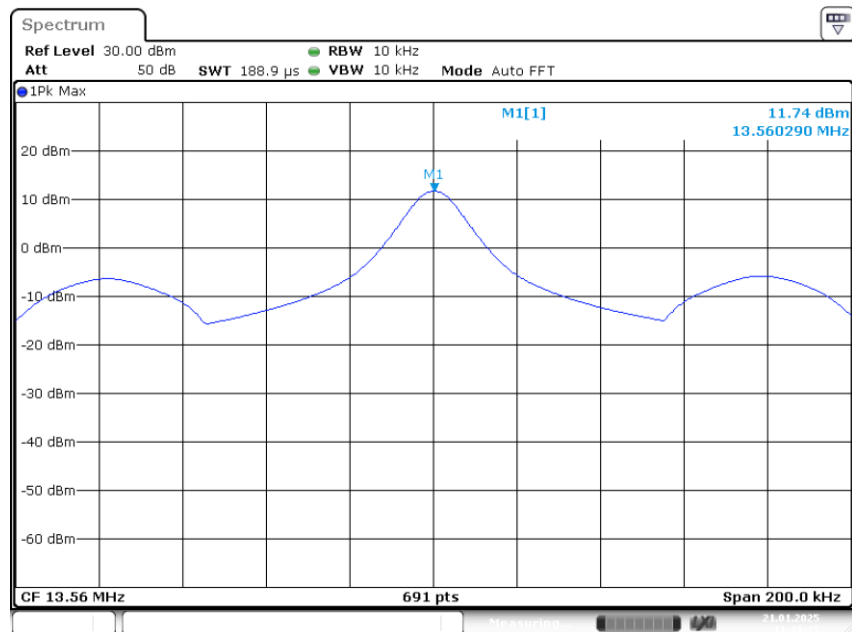


Date: 21.JAN.2025 11:41:15

30°C @DC 3.8V

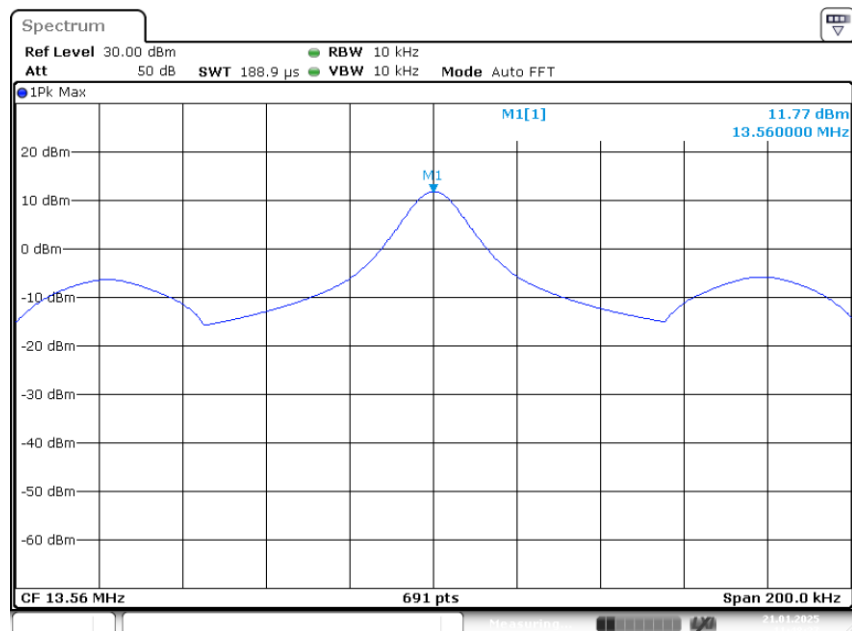


Date: 21.JAN.2025 11:48:27

40°C @DC 3.8V

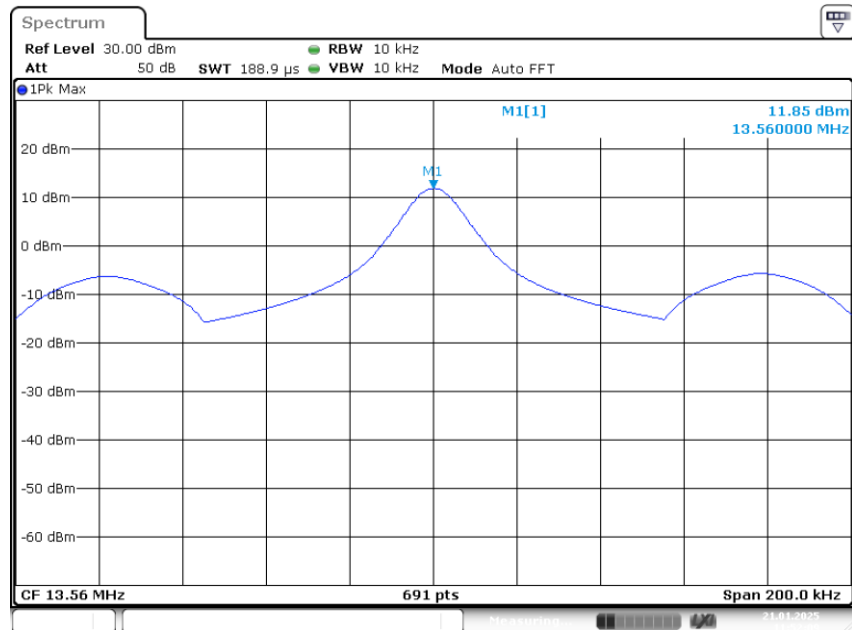

Date: 21.JAN.2025 11:52:09

50°C @DC 3.8V

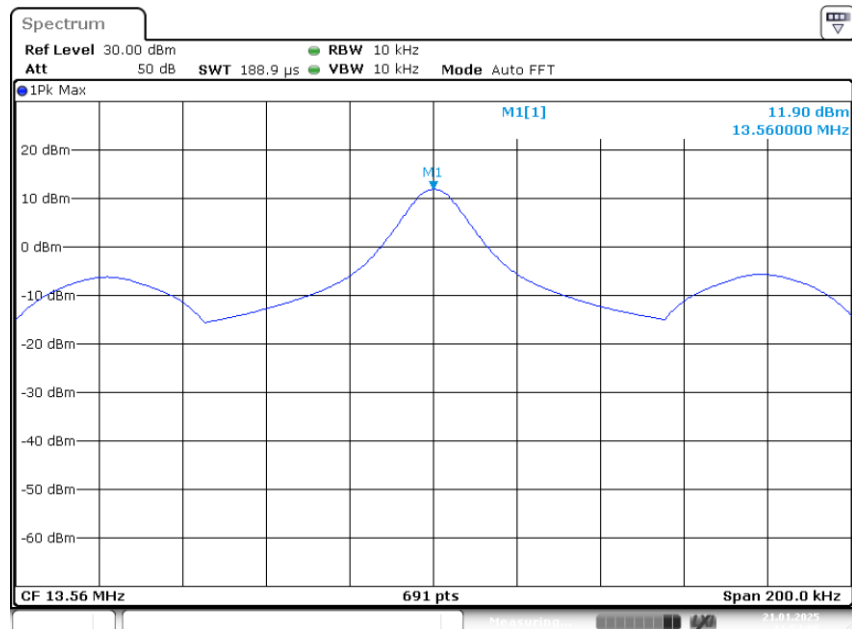

Date: 21.JAN.2025 11:53:10

4. Out of band Radiated Emissions

4.1 Operating environment

Temperature (°C) :	21
Relative Humidity (%) :	48
Test date :	2025/02/05

4.2 Limit for emission in restricted frequency bands (Radiated emission measurement)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	2400/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

4.3 Measuring instrument setting


Receiver settings	
Receiver function	Setting
Detector	QP
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Attenuation	Auto

4.4 Test procedure


1. Configure the EUT according to ANSI C63.10:2013. The EUT was placed on the top of the turntable 0.8 meter above ground. The center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the companion devices. The turntable was rotated by 360 degree to find the position of the maximum emission level.
3. The height of the receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of the both horizontal and vertical polarization
4. If find the frequencies above the limit or below within 3dB, the antenna tower was scan (from 1m to 4m) and then the turntable was rotated to find the maximum reading.
5. Set the test-receiver system to peak or CISPR quasi-peak detector with specified bandwidth under maximum hold mode.
6. If the emissions level of the EUT in peak mode was 3dB lower than the average limit specified then testing will be stopped and peak values of the EUT will be reported. Otherwise, the emissions which do not have 3dB margin will be measured using the quasi-peak method for below 1GHz.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be quasi-peak measured by receiver.

4.5 Test configuration

4.5.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna:

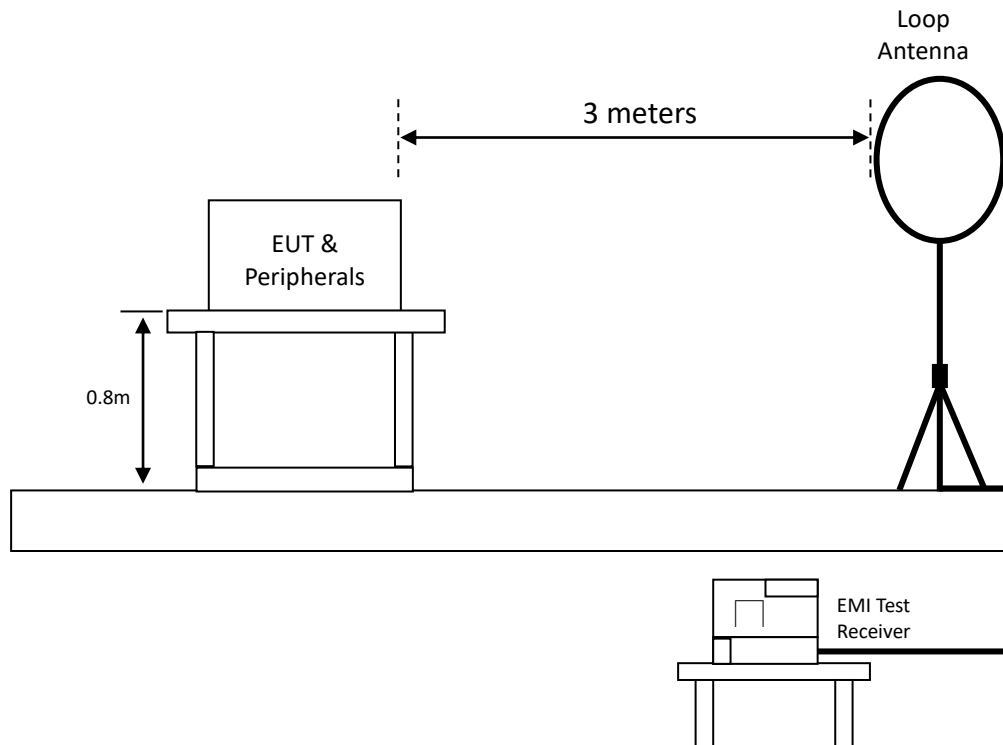

4.5.2 Radiated emission below 1GHz using Bilog Antenna

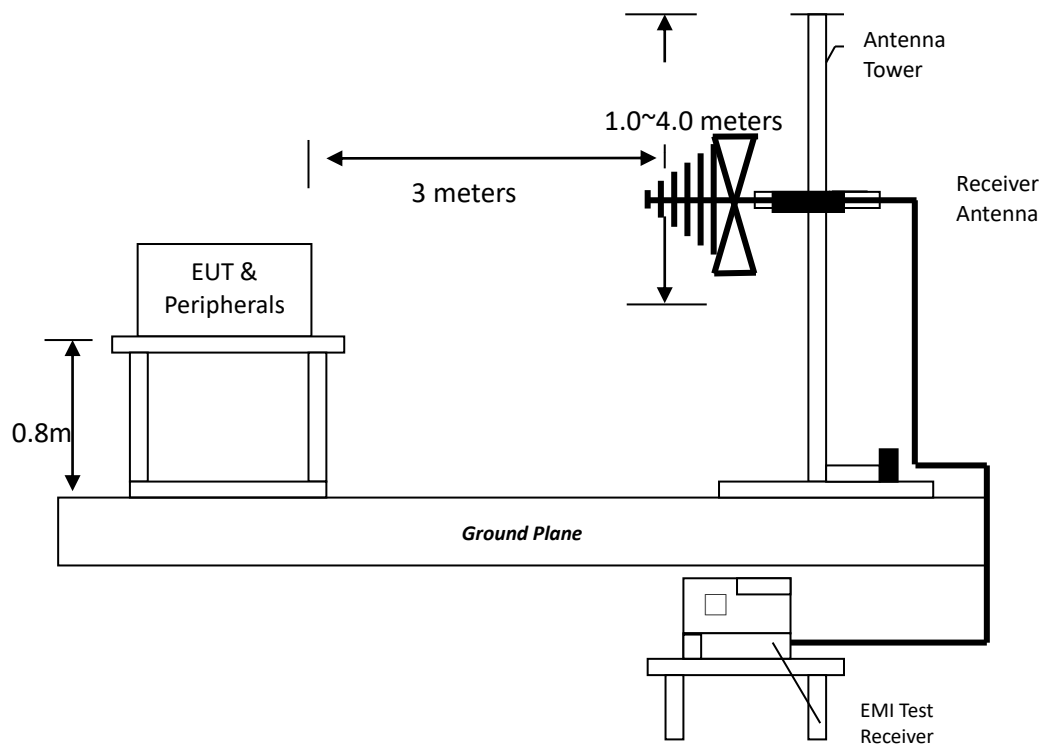

TEST REPORT

4.6 Test result

4.6.1 Measurement results: frequency range from 9 kHz to 30 MHz

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Perpendicular	0.04	PK	17.68	43.18	60.86	115.79	-54.93
Perpendicular	0.19	PK	16.94	31.98	48.92	102.08	-53.16
Perpendicular	0.52	PK	17.42	32.98	50.40	73.30	-22.90
Perpendicular	0.58	PK	17.48	36.29	53.77	72.35	-18.58
Perpendicular	0.91	PK	17.59	27.58	45.17	68.44	-23.27
Perpendicular	1.21	PK	17.48	26.65	44.13	65.96	-21.83

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Parallel	0.04	PK	17.68	39.92	57.60	115.79	-58.19
Parallel	0.58	PK	17.48	33.85	51.33	72.35	-21.02
Parallel	1.24	PK	17.48	26.63	44.11	65.74	-21.63
Parallel	1.51	PK	17.45	19.88	37.33	64.03	-26.70
Parallel	1.84	PK	17.42	22.77	40.19	69.54	-29.35
Parallel	2.44	PK	17.49	17.48	34.97	69.54	-34.57

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarity	Frequency (MHz)	Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Ground-parallel	0.04	PK	17.68	41.43	59.11	115.79	-56.68
Ground-parallel	0.13	PK	16.64	24.92	41.56	105.40	-63.84
Ground-parallel	0.61	PK	17.50	26.56	44.06	71.91	-27.85
Ground-parallel	1.06	PK	17.49	15.80	33.29	67.11	-33.82
Ground-parallel	1.18	PK	17.48	19.35	36.83	66.17	-29.34
Ground-parallel	1.78	PK	17.42	14.66	32.08	69.54	-37.46

Remark: Corr. Factor = Antenna Factor + Cable Loss

4.6.2 Measurement results: frequencies below 1 GHz

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	82.38	PK	15.47	10.67	26.14	40.00	-13.86
Horizontal	133.79	PK	19.23	11.62	30.85	43.50	-12.65
Horizontal	165.80	PK	20.55	5.54	26.09	43.50	-17.41
Horizontal	198.78	PK	18.04	6.49	24.53	43.50	-18.97
Horizontal	288.02	PK	21.41	8.74	30.15	46.00	-15.85
Horizontal	345.25	PK	22.76	6.14	28.90	46.00	-17.10

Remark: Corr. Factor = Antenna Factor + Cable Loss

Antenna Polarity	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	41.64	PK	19.88	16.03	35.91	40.00	-4.09
Vertical	117.30	PK	17.67	15.21	32.88	43.50	-10.62
Vertical	139.61	PK	19.90	12.44	32.34	43.50	-11.16
Vertical	147.37	PK	20.60	13.10	33.70	43.50	-9.80
Vertical	159.01	PK	20.81	11.51	32.32	43.50	-11.18
Vertical	197.81	PK	18.02	9.35	27.37	43.50	-16.13

Remark: Corr. Factor = Antenna Factor + Cable Loss

5. AC Power Line Conducted Emission


5.1 Measuring instrument setting

Receiver Function	Setting
Detector	QP
Start frequency	0.15MHz
Stop frequency	30MHz
IF bandwidth	9 kHz
Attenuation	10dB

5.2 Test Procedure

Step 1	Configure the EUT according to ANSI C63.10:2013. The EUT or host of EHT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
Step 2	Connect EUT or host of EUT to the power mains through a line impedance stabilization network.
Step 3	All the companion devices are connected to the other LISN. The LISN should provide 50Uh/50ohms coupling impedance.
Step 4	The frequency range from 150 kHz to 30MHz was searched.
Step 5	Set the test-receiver system to peak detector and specified bandwidth with maximum hold mode.
Step 6	The measurement has to be done between each power line and ground at the power terminal.


5.3 Test Diagram

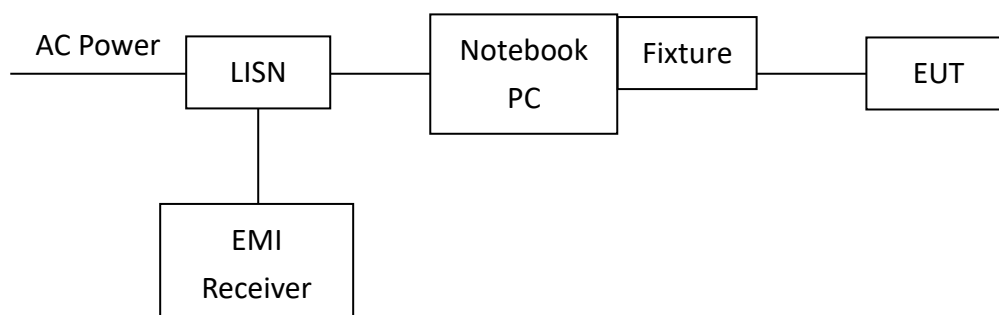

5.4 Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56	56 – 46
0.50~5.00	56	46
5.00~30.0	60	50

5.5 Test Results

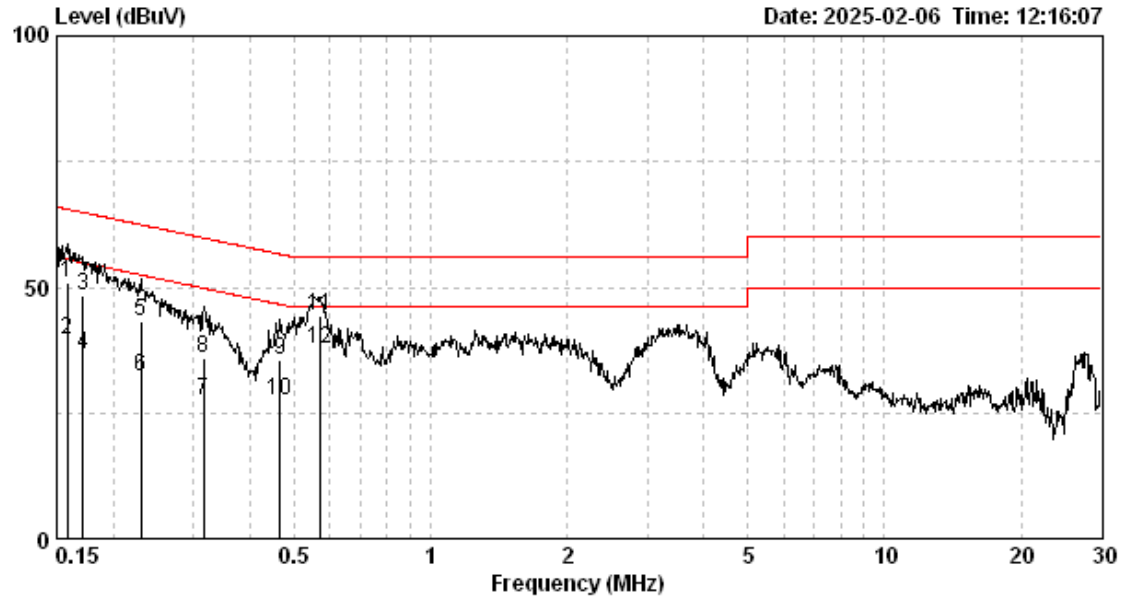


Test voltage : AC 120V / 60Hz
 Temp. / R.H. : 20 °C / 60 %
 Atmospheric pressure : 1008 hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading	Level	Limit	Reading	Level	Limit	Margin (dB)	
			QP (dBuV)	QP (dBuV)	QP (dBuV)	AV (dBuV)	AV (dBuV)	AV (dBuV)	QP	AV
LINE	0.158	9.56	41.21	50.76	65.56	29.90	39.45	55.56	-14.80	-16.11
LINE	0.171	9.56	38.75	48.31	64.90	26.90	36.46	54.90	-16.59	-18.43
LINE	0.230	9.58	33.72	43.30	62.44	22.64	32.22	52.44	-19.14	-20.22
LINE	0.317	9.57	26.44	36.01	59.80	17.90	27.47	49.80	-23.78	-22.32
LINE	0.466	9.57	25.88	35.45	56.58	17.75	27.32	46.58	-21.13	-19.26
LINE	0.573	9.58	34.65	44.22	56.00	28.12	37.69	46.00	-11.78	-8.31

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

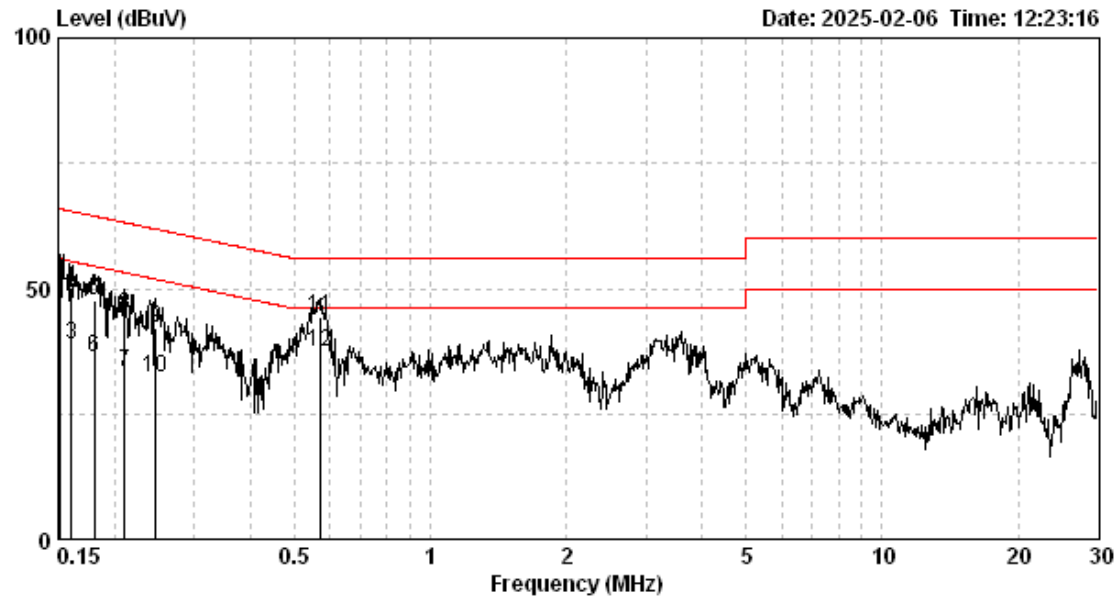

Test voltage : AC 120V / 60Hz
 Temp. / R.H. : 20 °C / 60 %
 Atmospheric pressure : 1008 hPa

Phase	Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
									QP	AV
NEUTRAL	0.152	9.57	41.54	51.11	65.91	30.40	39.97	55.91	-14.80	-15.94
NEUTRAL	0.161	9.57	40.67	50.24	65.43	29.20	38.77	55.43	-15.19	-16.66
NEUTRAL	0.181	9.58	38.03	47.61	64.46	26.63	36.20	54.46	-16.85	-18.26
NEUTRAL	0.211	9.58	34.95	44.53	63.18	23.57	33.15	53.18	-18.66	-20.03
NEUTRAL	0.247	9.58	32.62	42.21	61.86	22.70	32.29	51.86	-19.66	-19.58
NEUTRAL	0.573	9.59	34.77	44.36	56.00	27.95	37.54	46.00	-11.64	-8.46

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	KEYSIGHT	N9038B	MY63060107	2024/03/06	2025/03/05
Bilog Antenna with 6dB Attenuator	SCHWARZBECK	VULB 9168 & N-6-06	1382 & AT-06012	2024/11/29	2025/11/28
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-067	2024/12/11	2025/12/10
966-2 Cable	SUHNER	SUCOFLEX 104	295105/4	2024/03/02	2025/03/02
966-2 Cable	SUHNER	SUCOFLEX 104P	CB0005	2024/03/02	2025/03/02
Temperature&Humidity Test Chamber	TERCHY	MHU-225LRU(SA)	950838	2024/06/28	2025/06/27
966-2_3m Semi-Anechoic Chamber	CHANCE MOST	CEM-966_2	N/A	2024/07/30	2025/07/29
Test software	Audix	e3	V9	NCR	NCR
EMI Test Receiver	R&S	ESCI	100018	2024/07/23	2025/07/22
LISN	R&S	ENV216	101160	2024/06/26	2025/06/25
Cable	SUHNER	EMCCFD300-BM- NM-6000	170502	2024/06/25	2025/06/24
Test software	Audix	e3	V4.20040112L	NCR	NCR
Test site	Intertek	Con-2	N/A	NCR	NCR

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2.0$.

Item	Uncertainty
Frequency stability	0.06 ppm
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	2.73 dB
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	3.91 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	3.49 dB
Conducted Measurement	0.69 dB
AC Conducted Emission	1.31 dB