


# FCC Test Report

**FCC ID** : XNAWUP01  
**Equipment** : Data Hub  
**Model No.** : WUP01  
**Brand Name** : Withings  
**Applicant** : Withings SA  
**Address** : 2 rue Maurice Hartmann  
92130 Issy-Les-Moulineaux  
France  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Mar. 16, 2020  
**Tested Date** : Mar. 27 ~ Apr. 29, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information .....	5
1.2	Test Setup Chart .....	7
1.3	The Equipment List .....	8
1.4	Test Standards .....	9
1.5	Deviation from Test Standard and Measurement Procedure .....	9
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>10</b>
2.1	Testing Condition .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>11</b>
3.1	Conducted Emissions .....	11
3.2	6dB and Occupied Bandwidth .....	14
3.3	RF Output Power .....	19
3.4	Power Spectral Density .....	22
3.5	Unwanted Emissions into Restricted Frequency Bands .....	27
3.6	Emissions in Non-Restricted Frequency Bands .....	49
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>53</b>

## Release Record

Report No.	Version	Description	Issued Date
FR9D2302-01AC	Rev. 01	Initial issue	May 15, 2020

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.538MHz 33.21 (Margin -12.79dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2390.00MHz 52.99 (Margin -1.01dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 25.17	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 1 General Description

### 1.1 Information

#### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

#### 1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	BROADCOM	BCM9Fractal	PCB	NA	2.8

#### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from adapter
-------------------	-------------------

#### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC Adapter	Brand: PowerEric Model: SAW06D-050-1000UD Power Rating: I/P: 100-240Vac, 50/60Hz, 0.3A Max O/P: 5Vdc, 1000mA Power Line: 2m shielded without core

### 1.1.5 Channel List

Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

### 1.1.6 Test Tool and Duty Cycle

Test Tool	Tera Term, Version: V4.94		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	99.29%	0.03
	11g	94.20%	0.26
	HT20	93.85%	0.28


### 1.1.7 Test Sample Information

MAC of Test Sample	Radiated Emission: 00:24:E4:9E:A3:B4 AC Power Line Conducted Emission: 00:24:E4:9E:A3:B4 Antenna Port Conducted: 43:43:A1:12:1F:AC
PCB version	5a

### 1.1.8 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	84
11b	2437	88
11b	2462	84
11g	2412	-1 (default)
11g	2437	-1 (default)
11g	2462	72
HT20	2412	-1 (default)
HT20	2437	-1 (default)
HT20	2462	70

### 1.2 Test Setup Chart

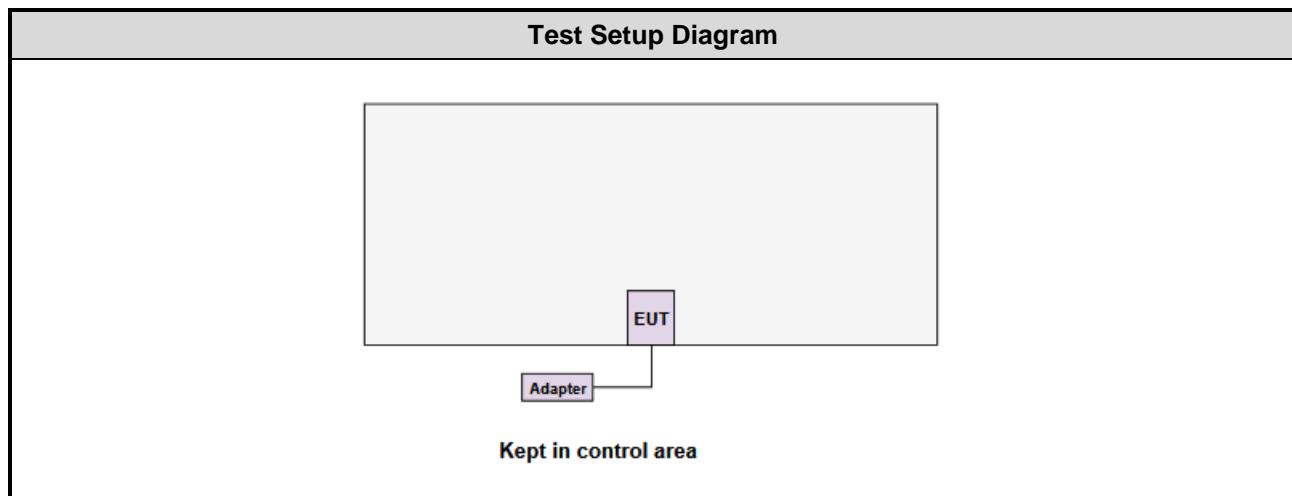

## 1.3 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Apr. 29, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Tested Date</b>	Mar. 27 ~ Mar. 30, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Apr. 27, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101486	Feb. 10, 2020	Feb. 09, 2021
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

## 1.4 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.5 Deviation from Test Standard and Measurement Procedure

None

## 1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.59 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	18°C / 56%	Alex Tsai
Radiated Emissions	03CH01-WS	22-24°C / 65-68%	Akun Chung
RF Conducted	TH01-WS	24°C / 68%	Aska Huang

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	HT20	2437	MCS 0	---
Radiated Emissions ≤1GHz	HT20	2437	MCS 0	---
Radiated Emissions >1GHz				
Maximum Output Power	11b	2412 / 2437 / 2462	1 Mbps	---
6dB bandwidth	11g	2412 / 2437 / 2462	6 Mbps	
Power spectral density	HT20	2412 / 2437 / 2462	MCS 0	

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


#### 3.1.3 Test Setup

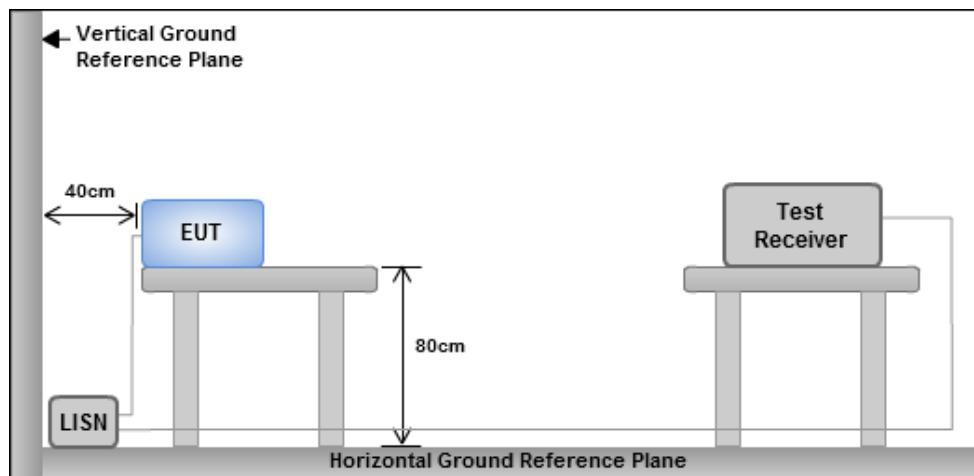

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

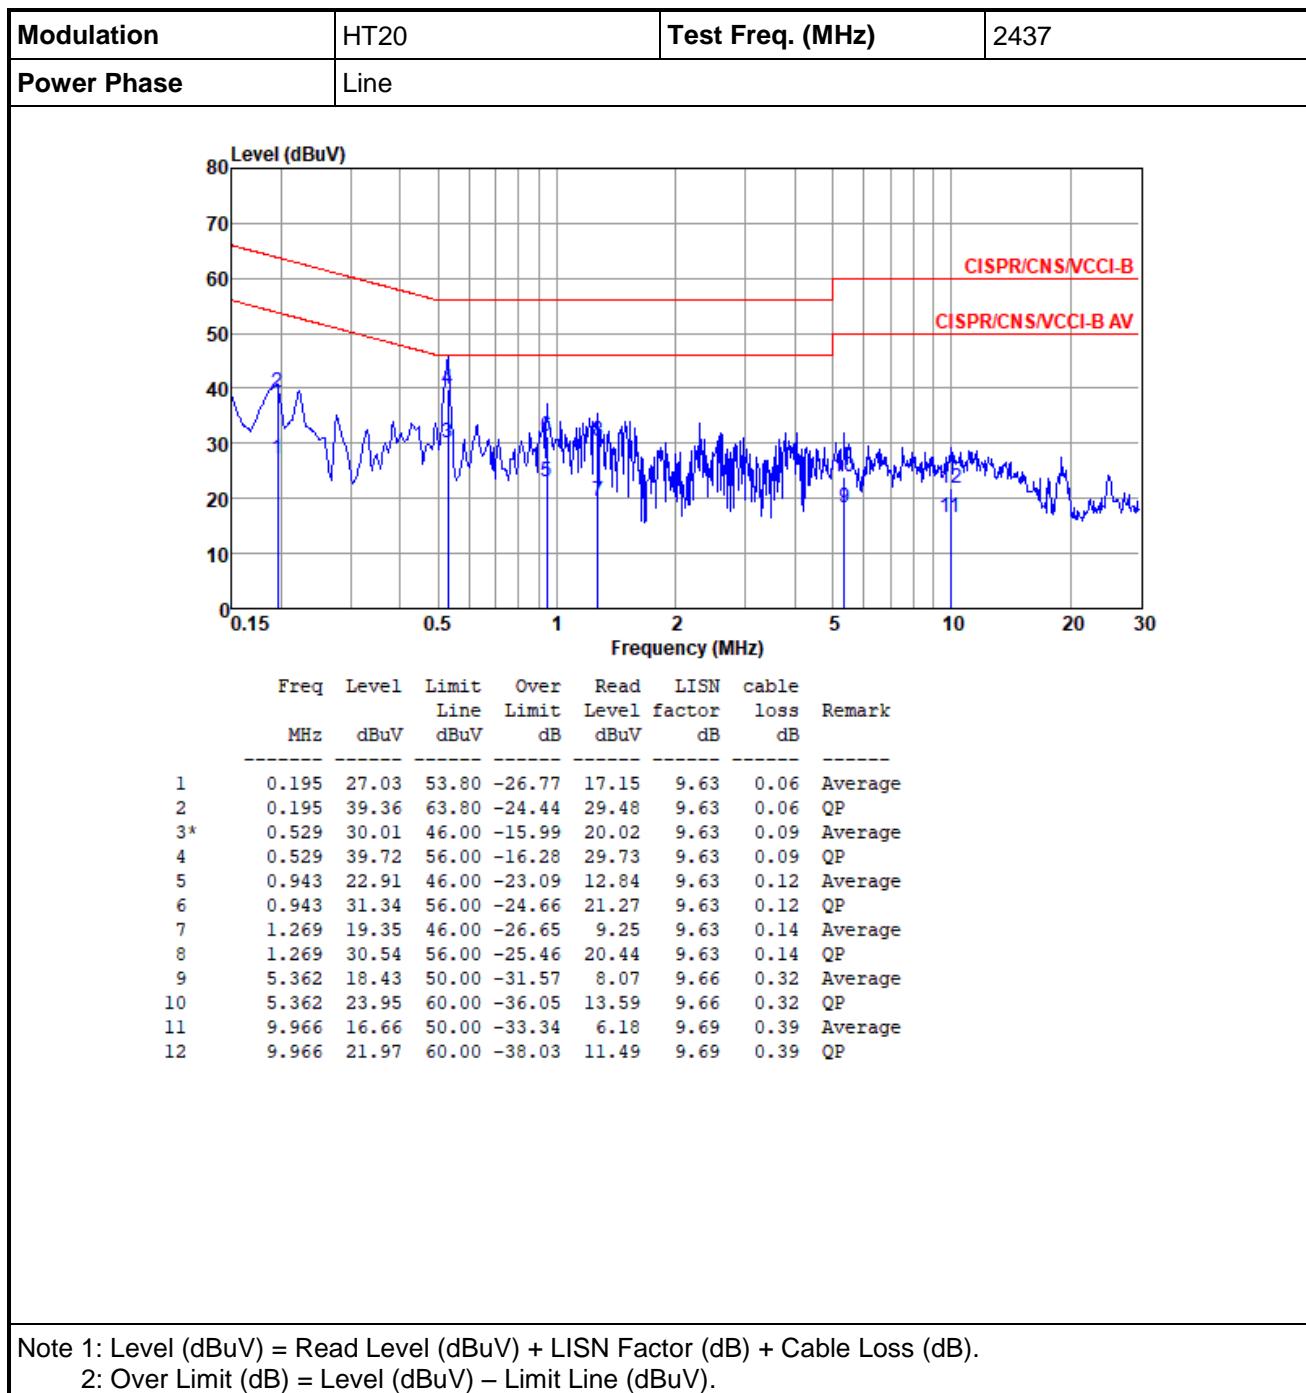

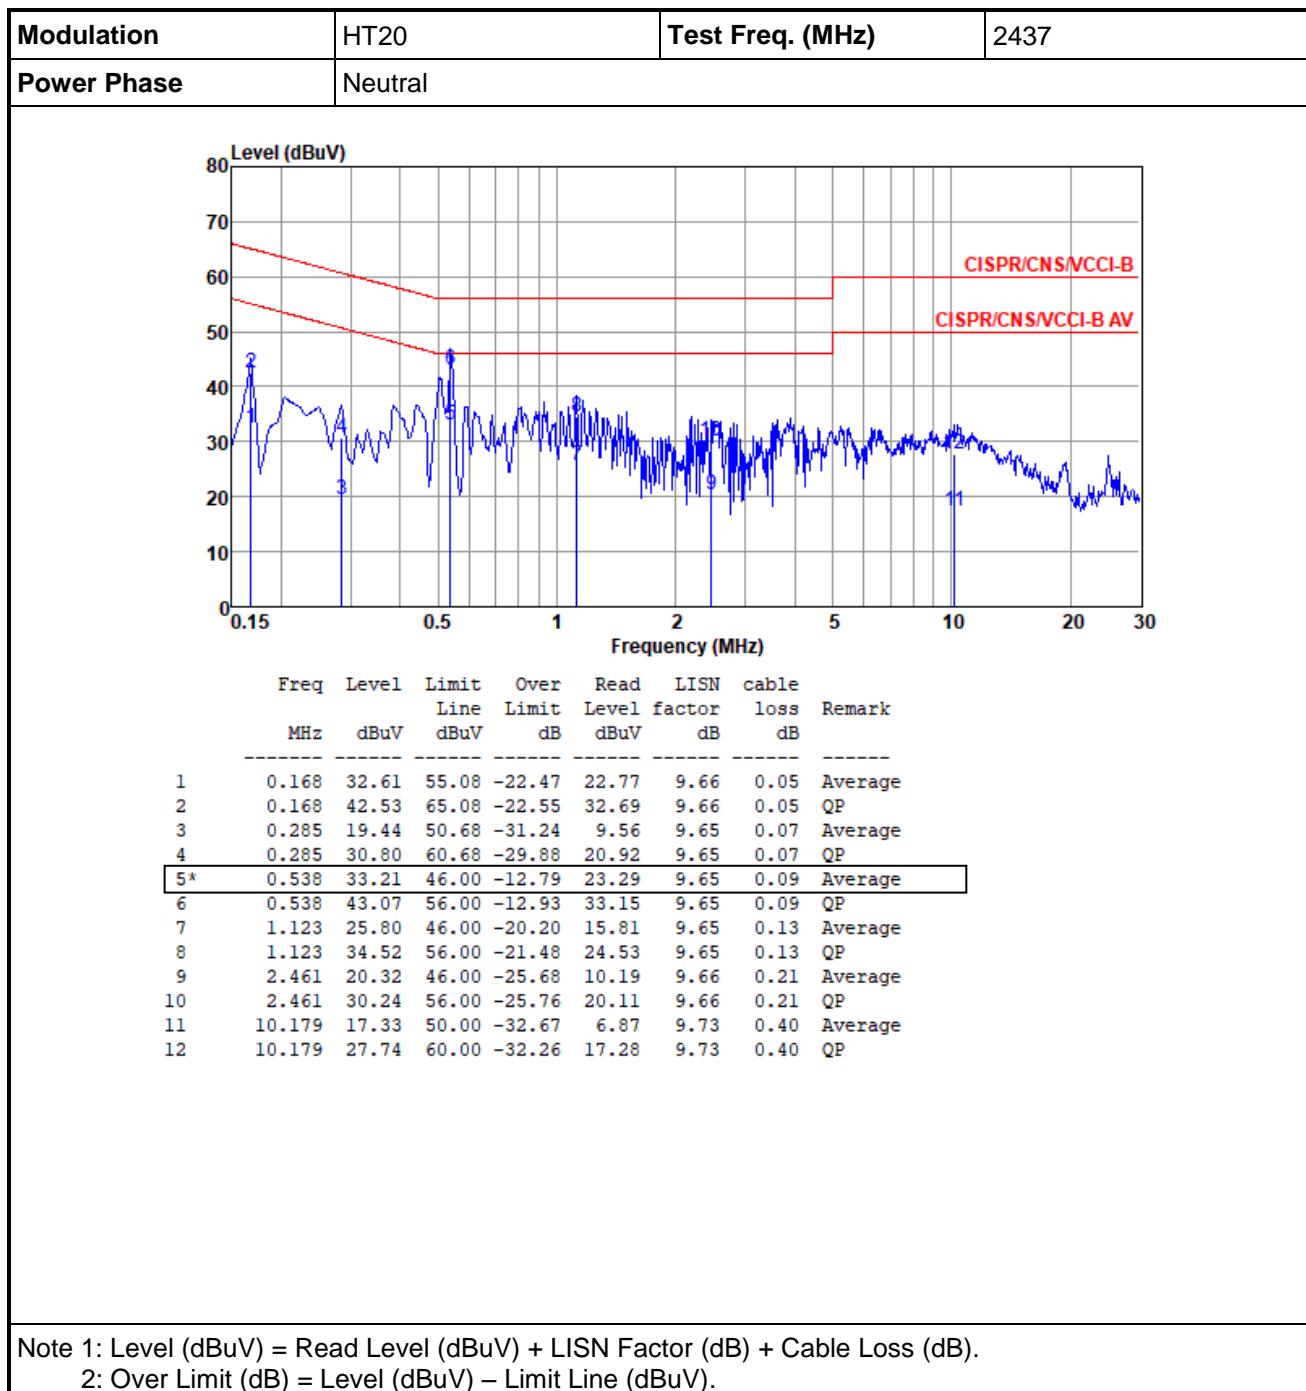

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup

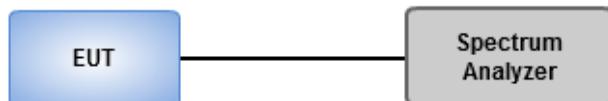

### 3.2.4 Test Result of 6dB and Occupied Bandwidth

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	9.058M	14.044M	14M0G1D	8.043M	13.98M
802.11g_Nss1,(6Mbps)_1TX	15.072M	16.318M	16M3D1D	15M	16.307M
802.11n HT20_Nss1,(MCS0)_1TX	15.072M	17.482M	17M5D1D	12.681M	17.421M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

#### Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	9.058M	13.988M
2437MHz	Pass	500k	8.551M	14.044M
2462MHz	Pass	500k	8.043M	13.98M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	15M	16.318M
2437MHz	Pass	500k	15.072M	16.307M
2462MHz	Pass	500k	15.072M	16.312M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz	Pass	500k	15.072M	17.482M
2437MHz	Pass	500k	12.681M	17.465M
2462MHz	Pass	500k	15.072M	17.421M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

### 802.11b\_Nss1,(1Mbps)\_1TX

EBW

2412MHz

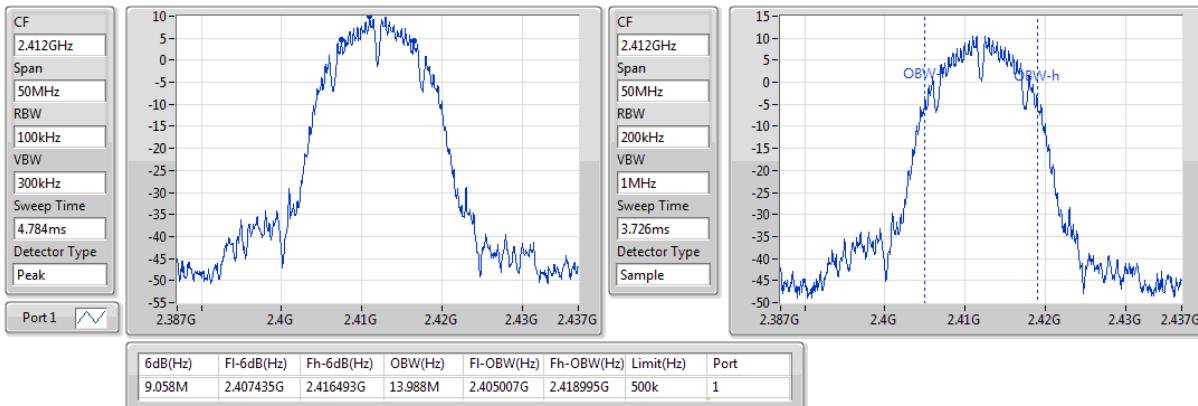

### 802.11b\_Nss1,(1Mbps)\_1TX

EBW


2437MHz



### 802.11b\_Nss1,(1Mbps)\_1TX

EBW


2462MHz

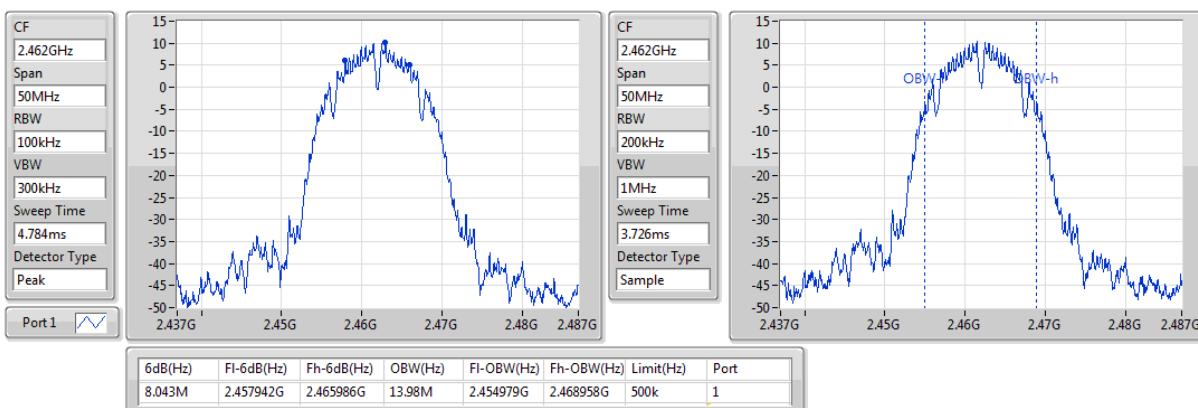

### 802.11g\_Nss1,(6Mbps)\_1TX

EBW


2412MHz

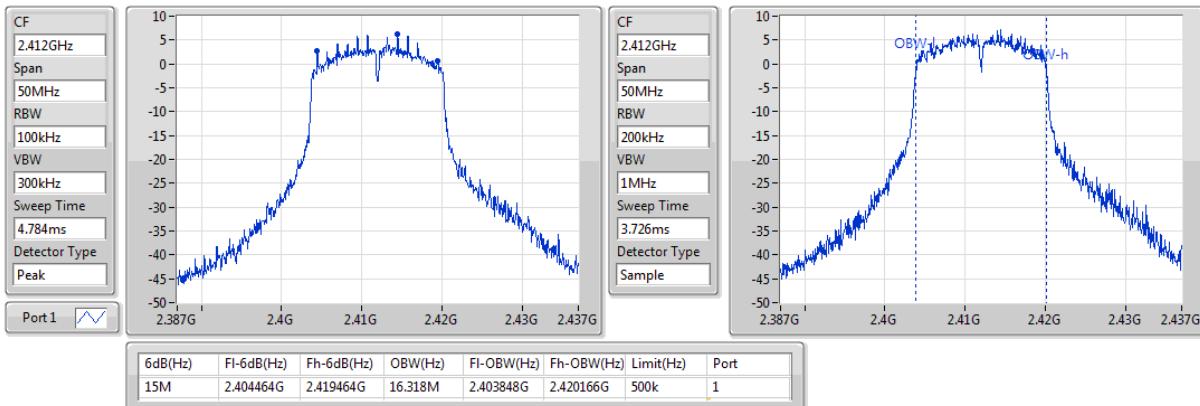

### 802.11g\_Nss1,(6Mbps)\_1TX

EBW


2437MHz

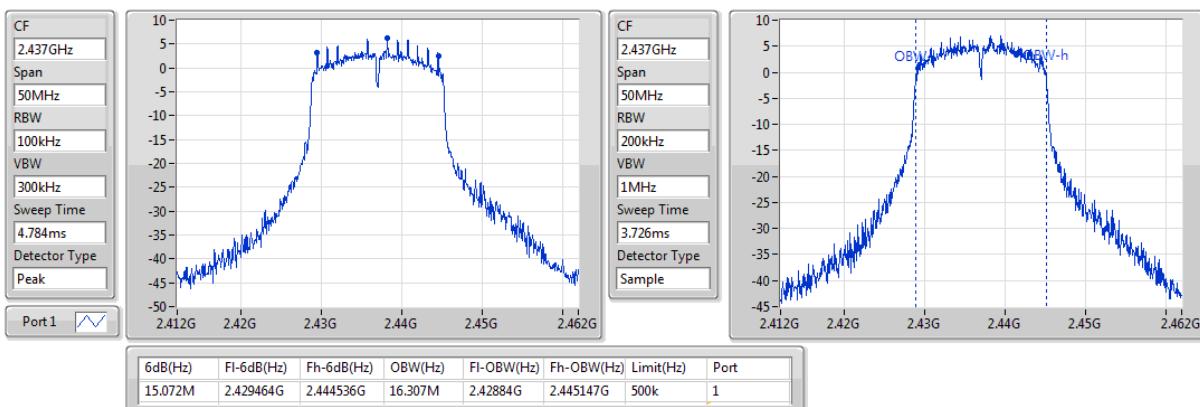

### 802.11g\_Nss1,(6Mbps)\_1TX

EBW

2462MHz

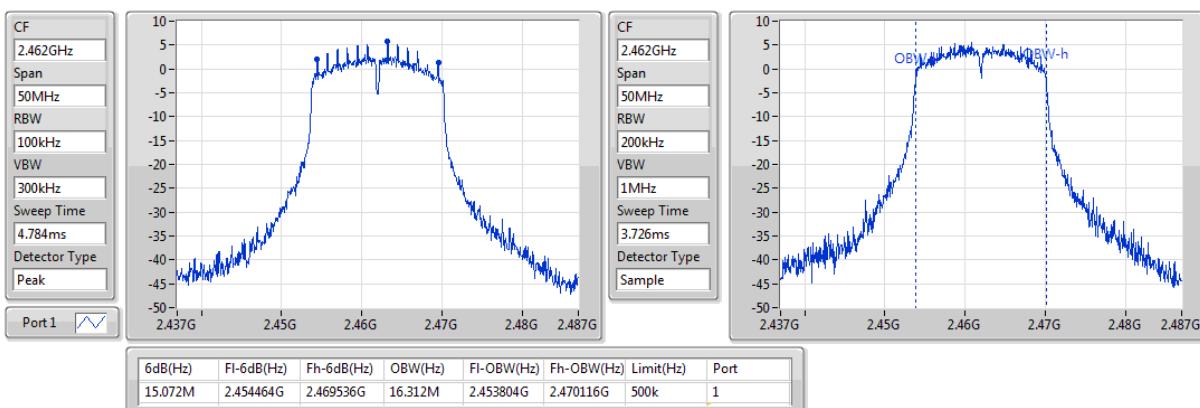

### 802.11n HT20\_Nss1,(MCS0)\_1TX

EBW

2412MHz

CF

2.412GHz

Span

50MHz

RBW

100kHz

VBW

300kHz

Sweep Time


4.784ms

Detector Type

Peak

Port 1



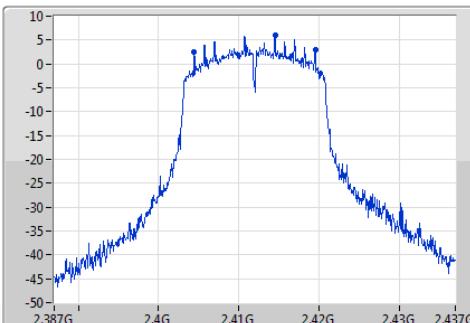

CF

2.412GHz

Span

50MHz

RBW

200kHz

VBW

1MHz


Sweep Time

3.726ms

Detector Type

Sample

Port

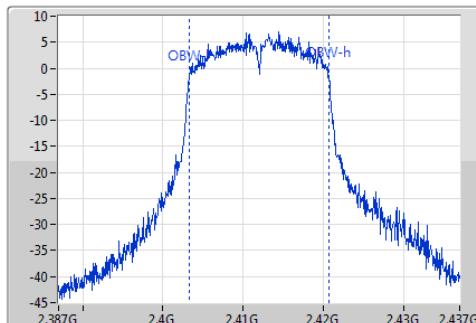

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.072M	2.404464G	2.419536G	17.482M	2.403263G	2.420745G	500k	1

### 802.11n HT20\_Nss1,(MCS0)\_1TX

EBW

2437MHz

CF

2.437GHz

Span

50MHz

RBW

200kHz

VBW

1MHz

Sweep Time


3.726ms

Detector Type

Peak

Port 1



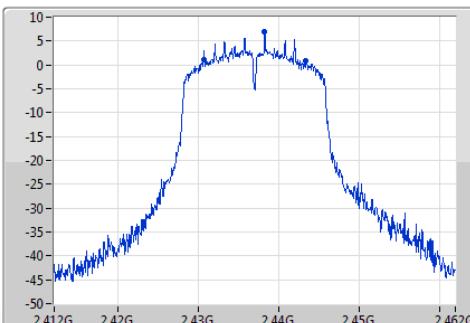

CF

2.437GHz

Span

50MHz

RBW

200kHz

VBW

1MHz


Sweep Time

3.726ms

Detector Type

Sample

Port

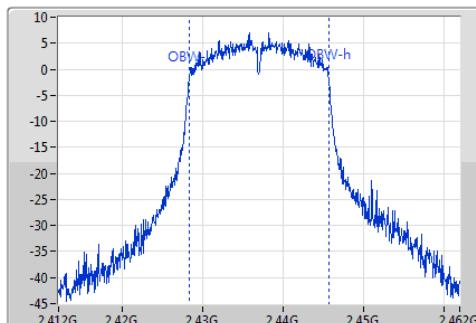

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
12.681M	2.430623G	2.443304G	17.465M	2.42825G	2.445715G	500k	1

### 802.11n HT20\_Nss1,(MCS0)\_1TX

EBW

2462MHz

CF

2.462GHz

Span

50MHz

RBW

100kHz

VBW

300kHz

Sweep Time


4.784ms

Detector Type

Peak

Port 1



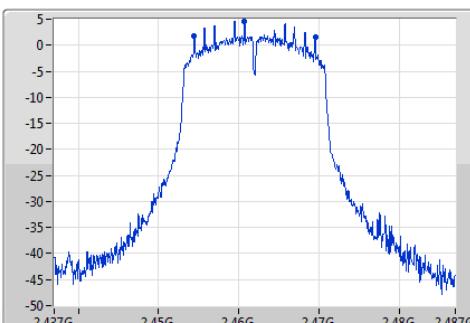

CF

2.462GHz

Span

50MHz

RBW

200kHz

VBW

1MHz


Sweep Time

3.726ms

Detector Type

Sample

Port

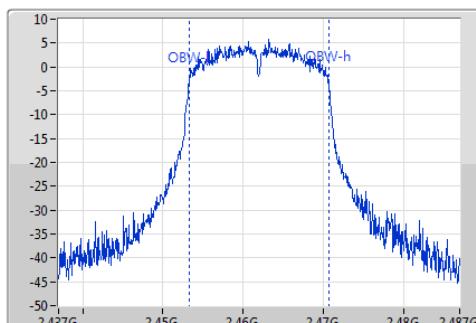

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.072M	2.454464G	2.469536G	17.421M	2.453255G	2.470675G	500k	1

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Output Power

#### Peak Power

##### Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	22.58	0.18113
802.11g_Nss1,(6Mbps)_1TX	24.82	0.30339
802.11n HT20_Nss1,(MCS0)_1TX	25.17	0.32885

##### Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.80	21.38	21.38	30.00	24.18	36.00
2437MHz	Pass	2.80	22.58	22.58	30.00	25.38	36.00
2462MHz	Pass	2.80	21.50	21.50	30.00	24.30	36.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.80	24.62	24.62	30.00	27.42	36.00
2437MHz	Pass	2.80	24.82	24.82	30.00	27.62	36.00
2462MHz	Pass	2.80	24.80	24.80	30.00	27.60	36.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.80	24.83	24.83	30.00	27.63	36.00
2437MHz	Pass	2.80	25.17	25.17	30.00	27.97	36.00
2462MHz	Pass	2.80	24.77	24.77	30.00	27.57	36.00

**DG** = Directional Gain; **Port X** = Port X output power

**Average Power  
Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	20.14	0.10328
802.11g_Nss1,(6Mbps)_1TX	17.32	0.05395
802.11n HT20_Nss1,(MCS0)_1TX	17.28	0.05346

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.80	19.02	19.02	30.00	21.82	36.00
2437MHz	Pass	2.80	20.14	20.14	30.00	22.94	36.00
2462MHz	Pass	2.80	19.11	19.11	30.00	21.91	36.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.80	17.21	17.21	30.00	20.01	36.00
2437MHz	Pass	2.80	17.32	17.32	30.00	20.12	36.00
2462MHz	Pass	2.80	16.35	16.35	30.00	19.15	36.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	2.80	17.18	17.18	30.00	19.98	36.00
2437MHz	Pass	2.80	17.28	17.28	30.00	20.08	36.00
2462MHz	Pass	2.80	16.01	16.01	30.00	18.81	36.00

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup

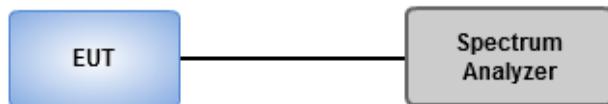

### 3.4.4 Test Result of Power Spectral Density

#### Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-2.74
802.11g_Nss1,(6Mbps)_1TX	-8.32
802.11n HT20_Nss1,(MCS0)_1TX	-6.15

#### Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.80	-2.74	-2.74	8.00
2437MHz	Pass	2.80	-2.98	-2.98	8.00
2462MHz	Pass	2.80	-3.65	-3.65	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	2.80	-8.32	-8.32	8.00
2437MHz	Pass	2.80	-8.32	-8.32	8.00
2462MHz	Pass	2.80	-8.77	-8.77	8.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	2.80	-6.15	-6.15	8.00
2437MHz	Pass	2.80	-7.96	-7.97	8.00
2462MHz	Pass	2.80	-8.59	-8.59	8.00

**DG** = Directional Gain;


**PD** = Power density; **Port X** = Port X power density;

**802.11b\_Nss1,(1Mbps)\_1TX**

**PSD**

**2412MHz**

CF  
2.412GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

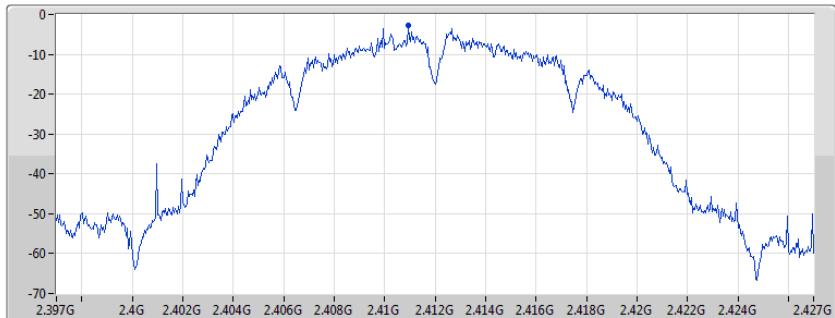

Port 1 


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.74	-2.74	-2.74

**802.11b\_Nss1,(1Mbps)\_1TX**

**PSD**

**2437MHz**

CF  
2.437GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

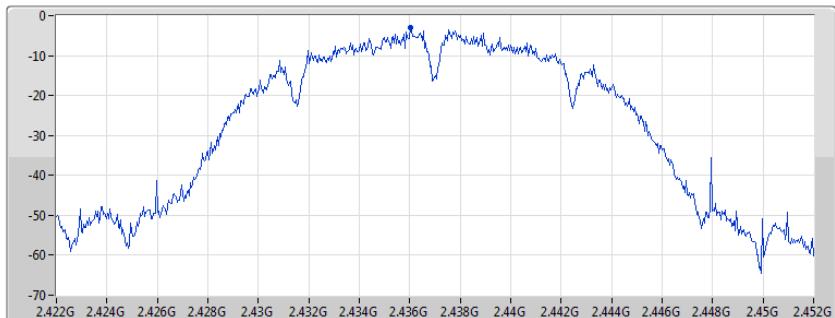

Port 1 


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.98	-2.98	-2.98

**802.11b\_Nss1,(1Mbps)\_1TX**

**PSD**

**2462MHz**

CF  
2.462GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

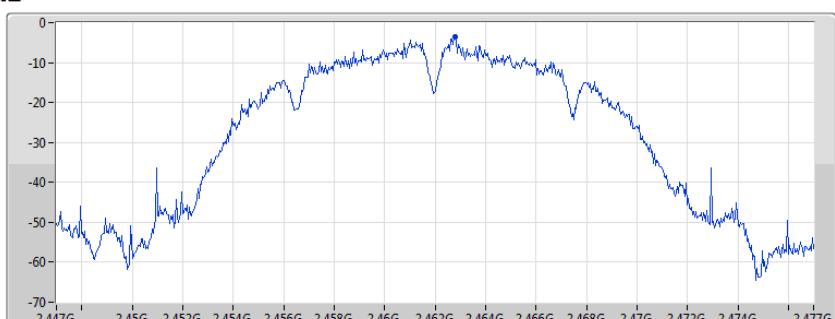

Port 1 


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.65	-3.65	-3.65

**802.11g\_Nss1,(6Mbps)\_1TX**

**PSD**

**2412MHz**

CF  
2.412GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

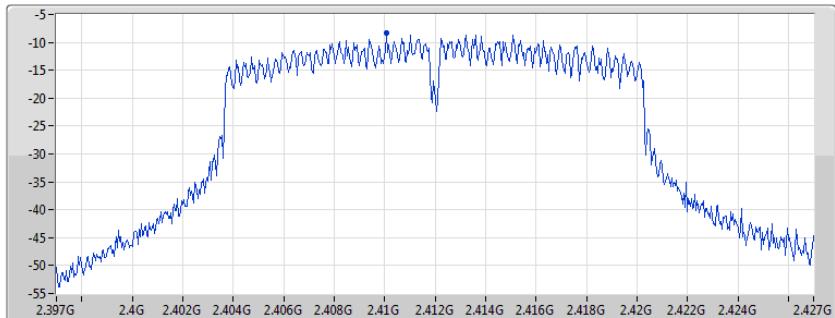

Port 1




**802.11g\_Nss1,(6Mbps)\_1TX**

**PSD**

**2437MHz**

CF  
2.437GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

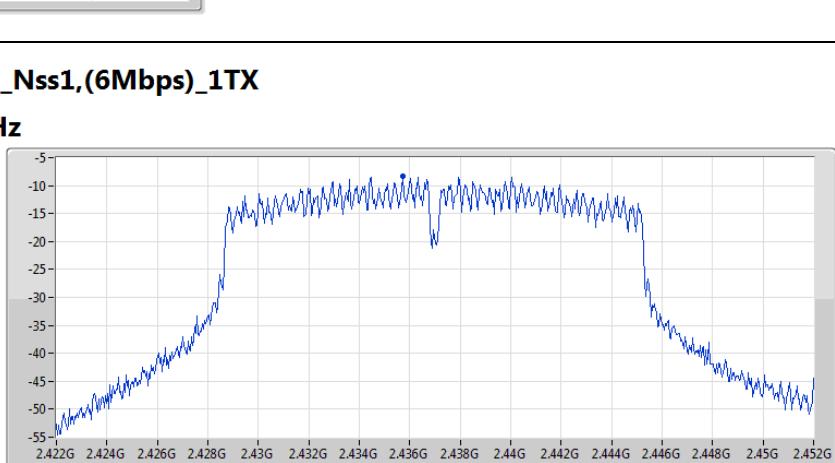

Port 1




**802.11g\_Nss1,(6Mbps)\_1TX**

**PSD**

**2462MHz**

CF  
2.462GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

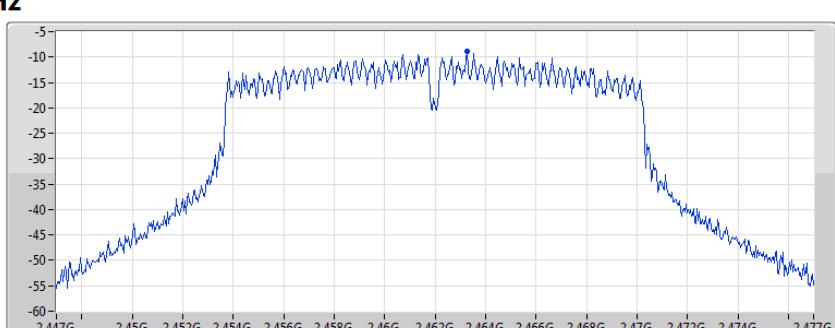

Port 1



Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.32	-8.32	-8.32


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.77	-8.77	-8.77

**802.11n HT20\_Nss1,(MCS0)\_1TX**

**PSD**

**2412MHz**

CF  
2.412GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

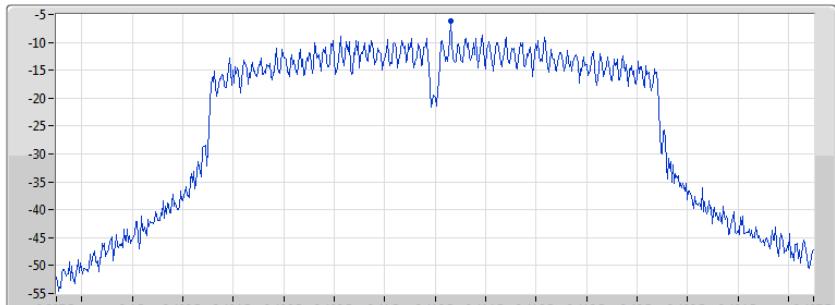


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.15	-6.15	-6.15

**802.11n HT20\_Nss1,(MCS0)\_1TX**

**PSD**

**2437MHz**

CF  
2.437GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

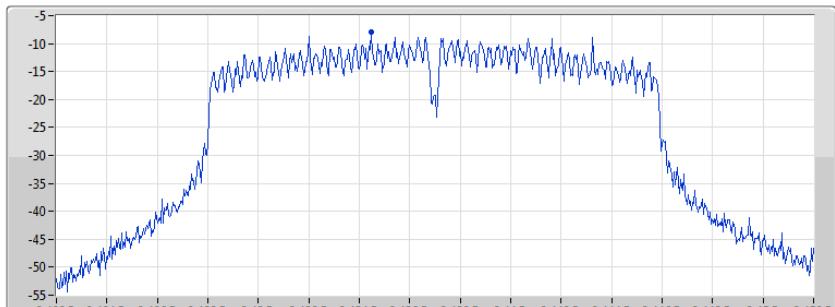


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.97	-7.97	-7.96

**802.11n HT20\_Nss1,(MCS0)\_1TX**

**PSD**

**2462MHz**

CF  
2.462GHz  
Span  
30MHz  
RBW  
3kHz  
VBW  
10kHz  
Sweep Time  
3.163236s  
Detector Type  
Peak

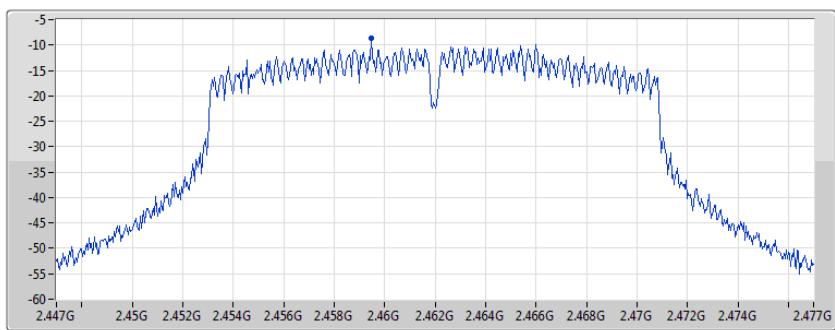

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.59	-8.59	-8.59

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

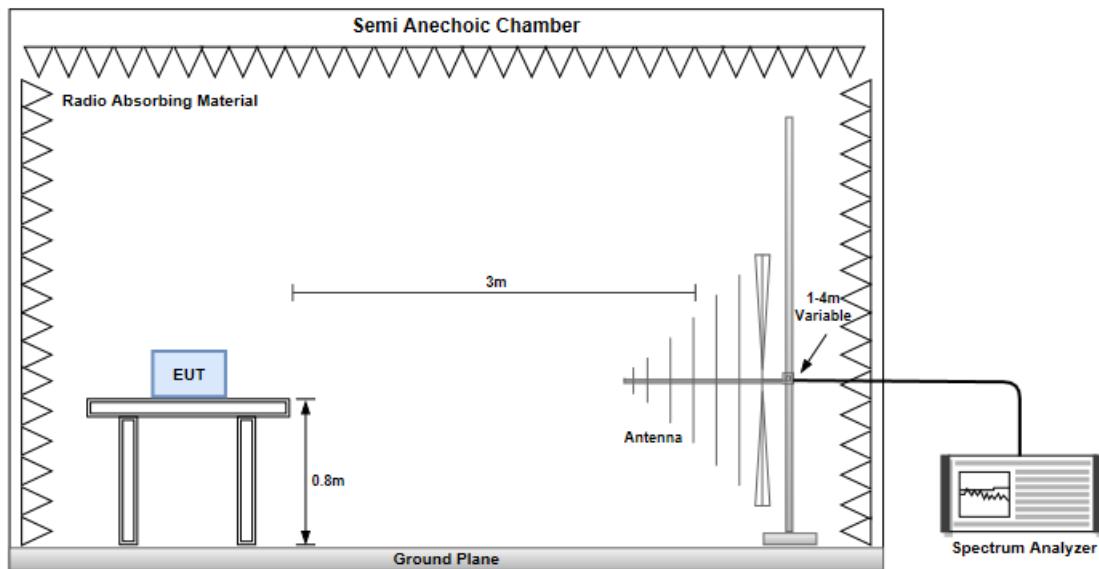


#### Radiated Emissions above 1 GHz

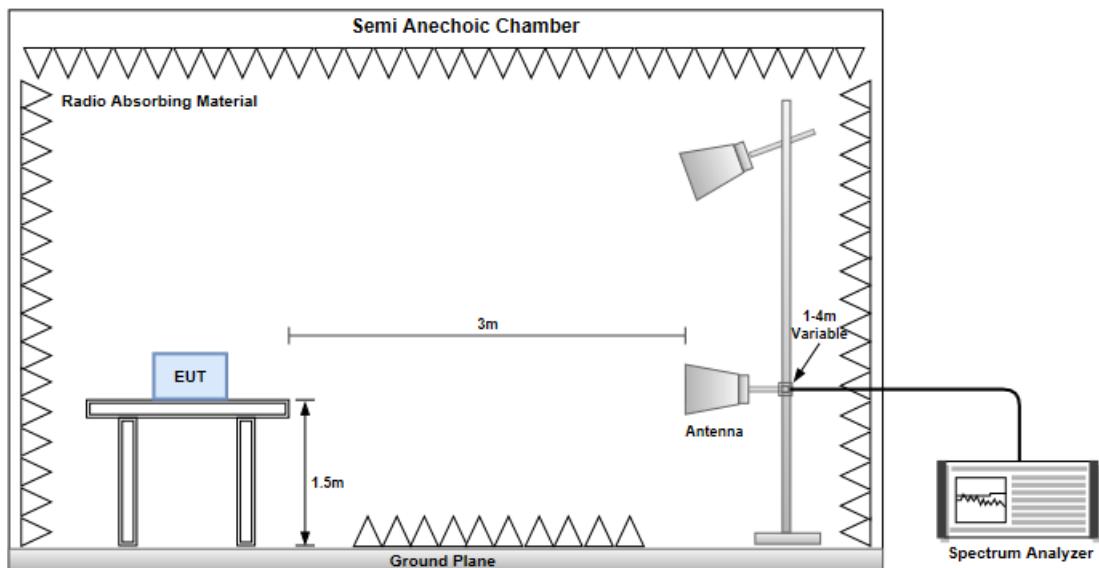

### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

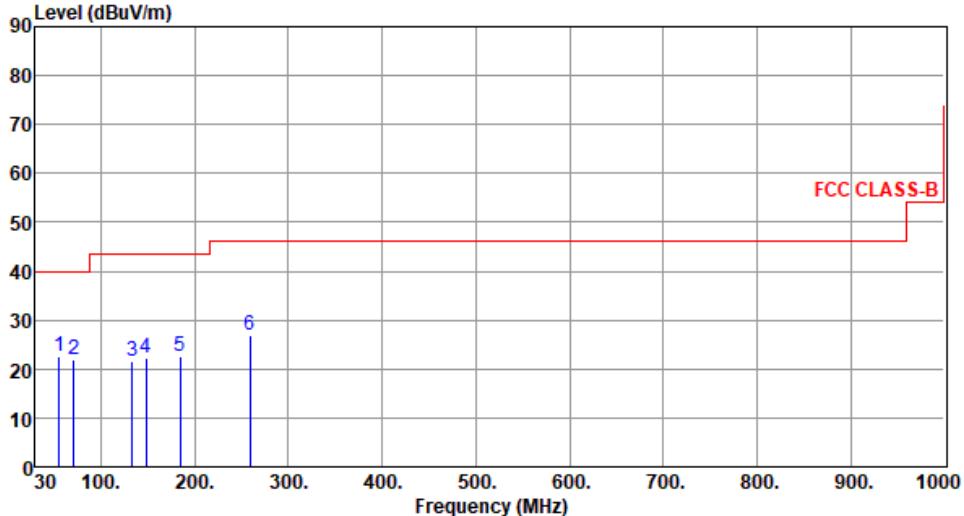Modulation	HT20	Test Freq. (MHz)	2437																																																																						
Polarization	Horizontal																																																																								
																																																																									
<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>55.22</td> <td>22.51</td> <td>40.00</td> <td>-17.49</td> <td>31.18</td> <td>-8.67</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>70.74</td> <td>21.77</td> <td>40.00</td> <td>-18.23</td> <td>32.49</td> <td>-10.72</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>133.79</td> <td>21.67</td> <td>43.50</td> <td>-21.83</td> <td>30.98</td> <td>-9.31</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>148.34</td> <td>22.33</td> <td>43.50</td> <td>-21.17</td> <td>30.77</td> <td>-8.44</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>184.23</td> <td>22.63</td> <td>43.50</td> <td>-20.87</td> <td>33.16</td> <td>-10.53</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>258.92</td> <td>26.76</td> <td>46.00</td> <td>-19.24</td> <td>36.41</td> <td>-9.65</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	55.22	22.51	40.00	-17.49	31.18	-8.67	Peak	---	---	2	70.74	21.77	40.00	-18.23	32.49	-10.72	Peak	---	---	3	133.79	21.67	43.50	-21.83	30.98	-9.31	Peak	---	---	4	148.34	22.33	43.50	-21.17	30.77	-8.44	Peak	---	---	5	184.23	22.63	43.50	-20.87	33.16	-10.53	Peak	---	---	6	258.92	26.76	46.00	-19.24	36.41	-9.65	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	55.22	22.51	40.00	-17.49	31.18	-8.67	Peak	---	---																																																																
2	70.74	21.77	40.00	-18.23	32.49	-10.72	Peak	---	---																																																																
3	133.79	21.67	43.50	-21.83	30.98	-9.31	Peak	---	---																																																																
4	148.34	22.33	43.50	-21.17	30.77	-8.44	Peak	---	---																																																																
5	184.23	22.63	43.50	-20.87	33.16	-10.53	Peak	---	---																																																																
6	258.92	26.76	46.00	-19.24	36.41	-9.65	Peak	---	---																																																																
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor, cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																									
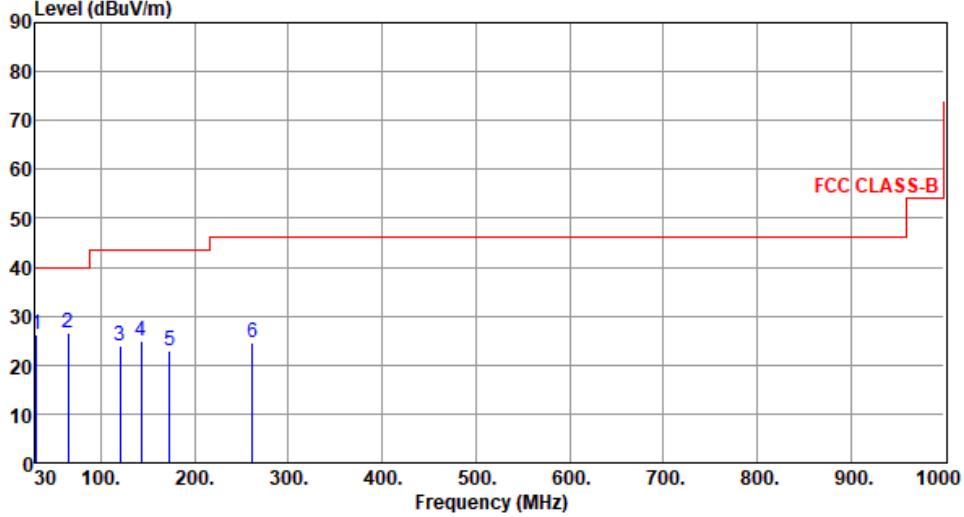
<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437																																																																																							
<b>Polarization</b>	Vertical																																																																																									
																																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">level</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th style="text-align: left;"> </th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">dB</th> <th style="text-align: left;"> </th> <th style="text-align: left;">cm</th> <th style="text-align: left;">deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.97</td> <td>26.23</td> <td>40.00</td> <td>-13.77</td> <td>35.83</td> <td>-9.60</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>64.92</td> <td>26.42</td> <td>40.00</td> <td>-13.58</td> <td>35.98</td> <td>-9.56</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>120.21</td> <td>23.92</td> <td>43.50</td> <td>-19.58</td> <td>34.51</td> <td>-10.59</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>142.52</td> <td>24.79</td> <td>43.50</td> <td>-18.71</td> <td>33.49</td> <td>-8.70</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>173.56</td> <td>22.99</td> <td>43.50</td> <td>-20.51</td> <td>32.19</td> <td>-9.20</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>261.83</td> <td>24.49</td> <td>46.00</td> <td>-21.51</td> <td>33.99</td> <td>-9.50</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	level	level	dBuV/m	dB	reading	dB		High	Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	30.97	26.23	40.00	-13.77	35.83	-9.60	Peak	---	---	2	64.92	26.42	40.00	-13.58	35.98	-9.56	Peak	---	---	3	120.21	23.92	43.50	-19.58	34.51	-10.59	Peak	---	---	4	142.52	24.79	43.50	-18.71	33.49	-8.70	Peak	---	---	5	173.56	22.99	43.50	-20.51	32.19	-9.20	Peak	---	---	6	261.83	24.49	46.00	-21.51	33.99	-9.50	Peak	---	---
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																		
level	level	dBuV/m	dB	reading	dB		High	Table																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																																		
1	30.97	26.23	40.00	-13.77	35.83	-9.60	Peak	---	---																																																																																	
2	64.92	26.42	40.00	-13.58	35.98	-9.56	Peak	---	---																																																																																	
3	120.21	23.92	43.50	-19.58	34.51	-10.59	Peak	---	---																																																																																	
4	142.52	24.79	43.50	-18.71	33.49	-8.70	Peak	---	---																																																																																	
5	173.56	22.99	43.50	-20.51	32.19	-9.20	Peak	---	---																																																																																	
6	261.83	24.49	46.00	-21.51	33.99	-9.50	Peak	---	---																																																																																	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b


Modulation	11b	Test Freq. (MHz)	2412																																																																												
Polarization	Horizontal																																																																														
<p>Graph showing Level (dBuV/m) vs Frequency (MHz). The Y-axis ranges from 0 to 90 dBuV/m, and the X-axis ranges from 1000 to 25000 MHz. Six data points are plotted: 1 (2390.00 MHz, 52.83 dBuV/m), 2 (2390.00 MHz, 59.76 dBuV/m), 3 (4824.00 MHz, 43.61 dBuV/m), 4 (4824.00 MHz, 47.82 dBuV/m), 5 (12060.00 MHz, 43.07 dBuV/m), and 6 (12060.00 MHz, 56.15 dBuV/m). Two horizontal lines are shown: FCC CLASS-B (72 dBuV/m) and FCC CLASS-B (AVG) (54 dBuV/m).</p>																																																																															
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA</th> <th>Factor</th> <th>Remark</th> <th>ANT</th> <th>Turn</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>level</th> <th>reading</th> <th>reading</th> <th></th> <th>High</th> <th>Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>52.83</td> <td>54.00</td> <td>-1.17</td> <td>55.63</td> <td>-2.80</td> <td>Average</td> <td>267</td> <td>172</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>59.76</td> <td>74.00</td> <td>-14.24</td> <td>62.56</td> <td>-2.80</td> <td>Peak</td> <td>267</td> <td>172</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>43.61</td> <td>54.00</td> <td>-10.39</td> <td>40.01</td> <td>3.60</td> <td>Average</td> <td>104</td> <td>293</td> </tr> <tr> <td>4</td> <td>4824.00</td> <td>47.82</td> <td>74.00</td> <td>-26.18</td> <td>44.22</td> <td>3.60</td> <td>Peak</td> <td>104</td> <td>293</td> </tr> <tr> <td>5</td> <td>12060.00</td> <td>43.07</td> <td>54.00</td> <td>-10.93</td> <td>29.22</td> <td>13.85</td> <td>Average</td> <td>100</td> <td>45</td> </tr> <tr> <td>6</td> <td>12060.00</td> <td>56.15</td> <td>74.00</td> <td>-17.85</td> <td>42.30</td> <td>13.85</td> <td>Peak</td> <td>100</td> <td>45</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	level	reading	reading		High	Table	1	2390.00	52.83	54.00	-1.17	55.63	-2.80	Average	267	172	2	2390.00	59.76	74.00	-14.24	62.56	-2.80	Peak	267	172	3	4824.00	43.61	54.00	-10.39	40.01	3.60	Average	104	293	4	4824.00	47.82	74.00	-26.18	44.22	3.60	Peak	104	293	5	12060.00	43.07	54.00	-10.93	29.22	13.85	Average	100	45	6	12060.00	56.15	74.00	-17.85	42.30	13.85	Peak	100	45
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																								
MHz	level	level	reading	reading		High	Table																																																																								
1	2390.00	52.83	54.00	-1.17	55.63	-2.80	Average	267	172																																																																						
2	2390.00	59.76	74.00	-14.24	62.56	-2.80	Peak	267	172																																																																						
3	4824.00	43.61	54.00	-10.39	40.01	3.60	Average	104	293																																																																						
4	4824.00	47.82	74.00	-26.18	44.22	3.60	Peak	104	293																																																																						
5	12060.00	43.07	54.00	-10.93	29.22	13.85	Average	100	45																																																																						
6	12060.00	56.15	74.00	-17.85	42.30	13.85	Peak	100	45																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

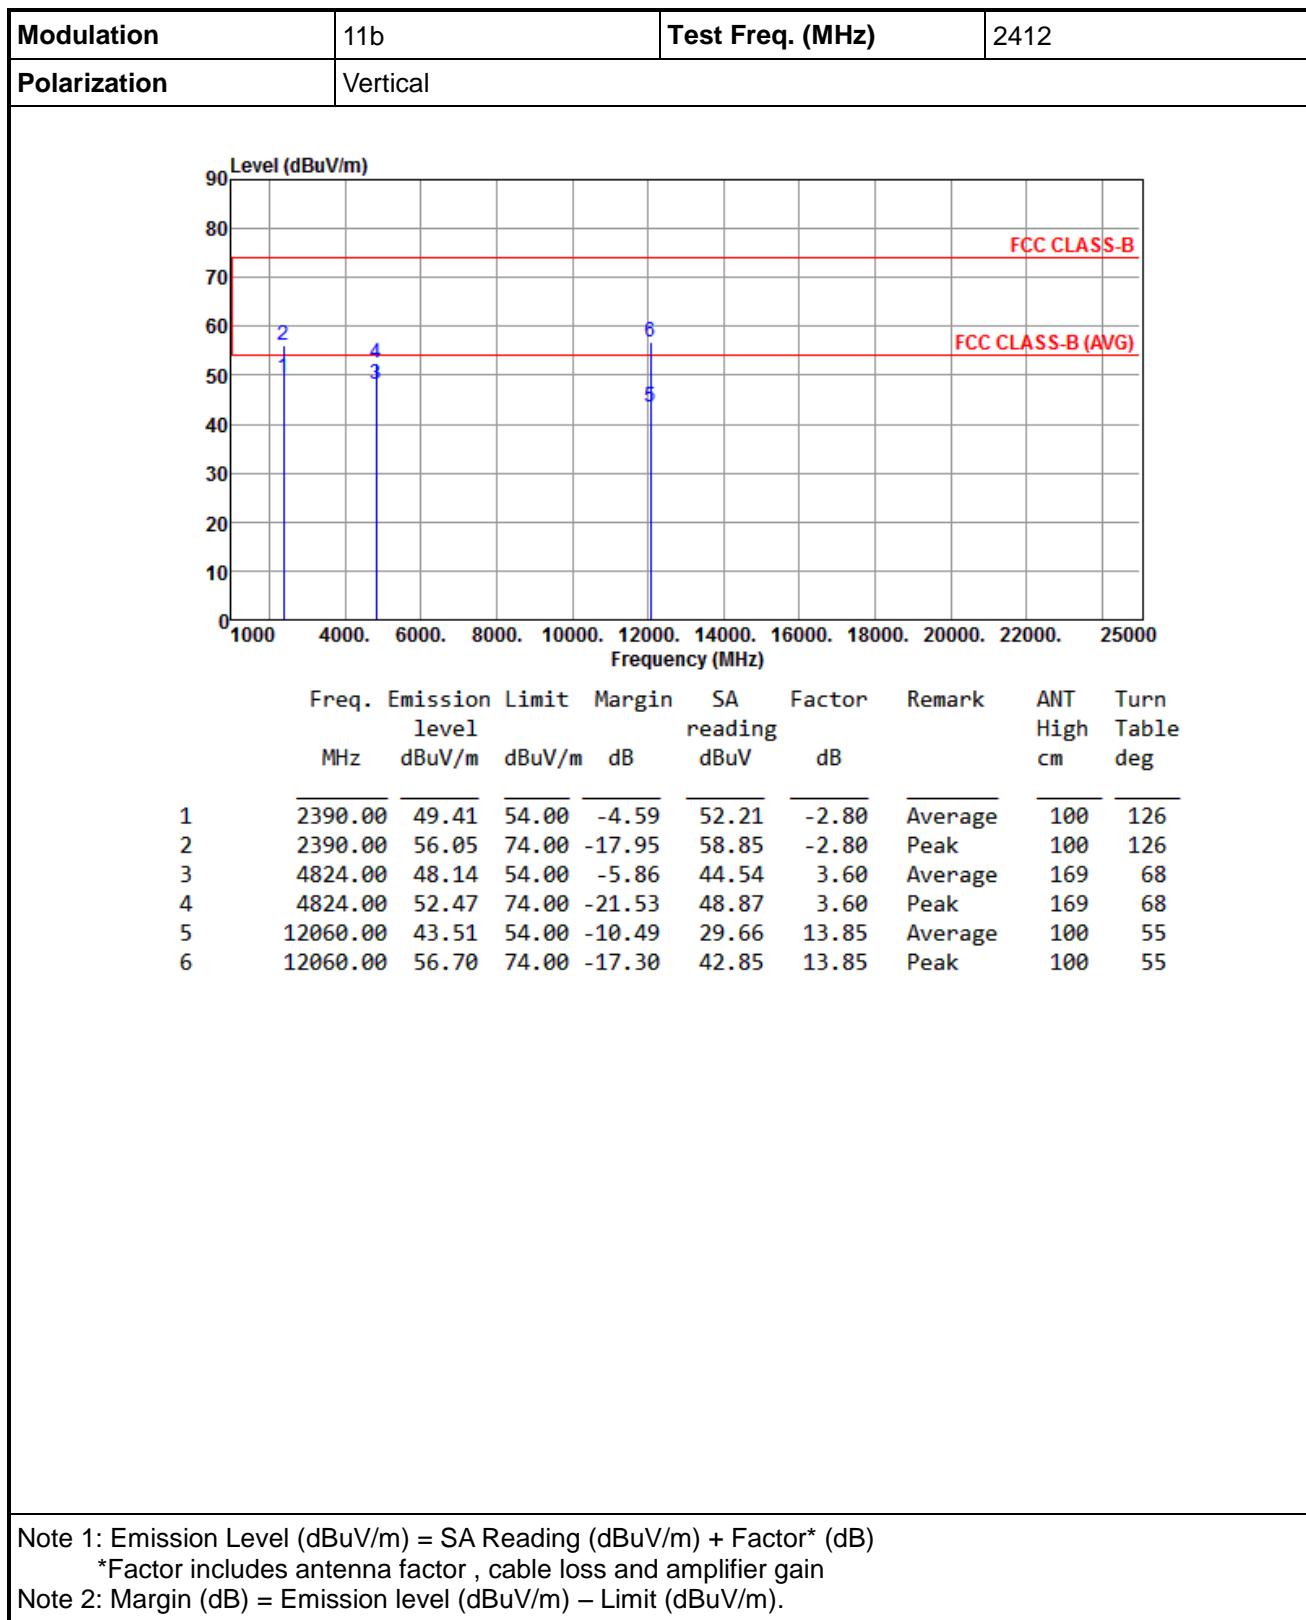

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
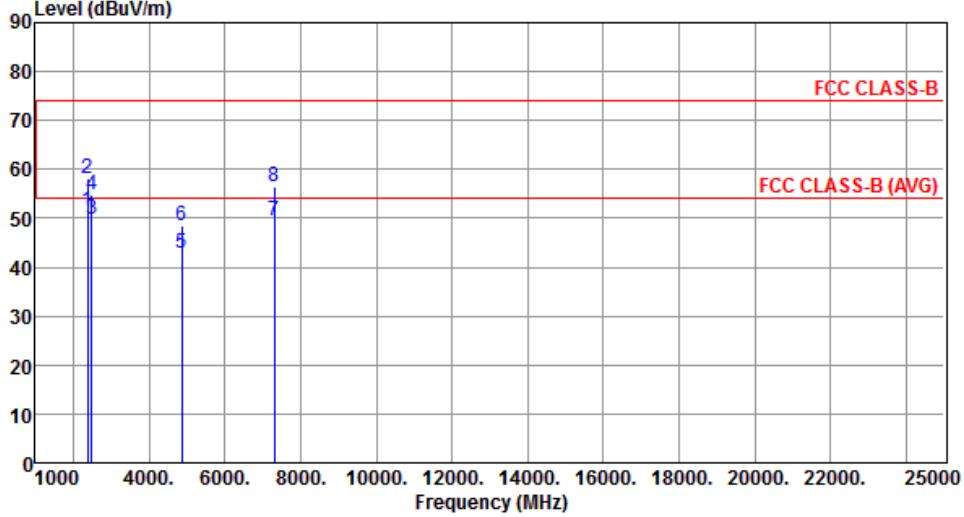
<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437																																																																																																		
<b>Polarization</b>	Horizontal																																																																																																				
																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>51.31</td> <td>54.00</td> <td>-2.69</td> <td>54.11</td> <td>-2.80</td> <td>Average</td> <td>230</td> <td>116</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>58.22</td> <td>74.00</td> <td>-15.78</td> <td>61.02</td> <td>-2.80</td> <td>Peak</td> <td>230</td> <td>116</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>49.84</td> <td>54.00</td> <td>-4.16</td> <td>52.87</td> <td>-3.03</td> <td>Average</td> <td>230</td> <td>116</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>54.77</td> <td>74.00</td> <td>-19.23</td> <td>57.80</td> <td>-3.03</td> <td>Peak</td> <td>230</td> <td>116</td> </tr> <tr> <td>5</td> <td>4874.00</td> <td>42.79</td> <td>54.00</td> <td>-11.21</td> <td>39.15</td> <td>3.64</td> <td>Average</td> <td>103</td> <td>291</td> </tr> <tr> <td>6</td> <td>4874.00</td> <td>48.47</td> <td>74.00</td> <td>-25.53</td> <td>44.83</td> <td>3.64</td> <td>Peak</td> <td>103</td> <td>291</td> </tr> <tr> <td>7</td> <td>7311.00</td> <td>49.36</td> <td>54.00</td> <td>-4.64</td> <td>40.09</td> <td>9.27</td> <td>Average</td> <td>380</td> <td>194</td> </tr> <tr> <td>8</td> <td>7311.00</td> <td>56.44</td> <td>74.00</td> <td>-17.56</td> <td>47.17</td> <td>9.27</td> <td>Peak</td> <td>380</td> <td>194</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table	1	2390.00	51.31	54.00	-2.69	54.11	-2.80	Average	230	116	2	2390.00	58.22	74.00	-15.78	61.02	-2.80	Peak	230	116	3	2483.50	49.84	54.00	-4.16	52.87	-3.03	Average	230	116	4	2483.50	54.77	74.00	-19.23	57.80	-3.03	Peak	230	116	5	4874.00	42.79	54.00	-11.21	39.15	3.64	Average	103	291	6	4874.00	48.47	74.00	-25.53	44.83	3.64	Peak	103	291	7	7311.00	49.36	54.00	-4.64	40.09	9.27	Average	380	194	8	7311.00	56.44	74.00	-17.56	47.17	9.27	Peak	380	194
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																													
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																													
1	2390.00	51.31	54.00	-2.69	54.11	-2.80	Average	230	116																																																																																												
2	2390.00	58.22	74.00	-15.78	61.02	-2.80	Peak	230	116																																																																																												
3	2483.50	49.84	54.00	-4.16	52.87	-3.03	Average	230	116																																																																																												
4	2483.50	54.77	74.00	-19.23	57.80	-3.03	Peak	230	116																																																																																												
5	4874.00	42.79	54.00	-11.21	39.15	3.64	Average	103	291																																																																																												
6	4874.00	48.47	74.00	-25.53	44.83	3.64	Peak	103	291																																																																																												
7	7311.00	49.36	54.00	-4.64	40.09	9.27	Average	380	194																																																																																												
8	7311.00	56.44	74.00	-17.56	47.17	9.27	Peak	380	194																																																																																												

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
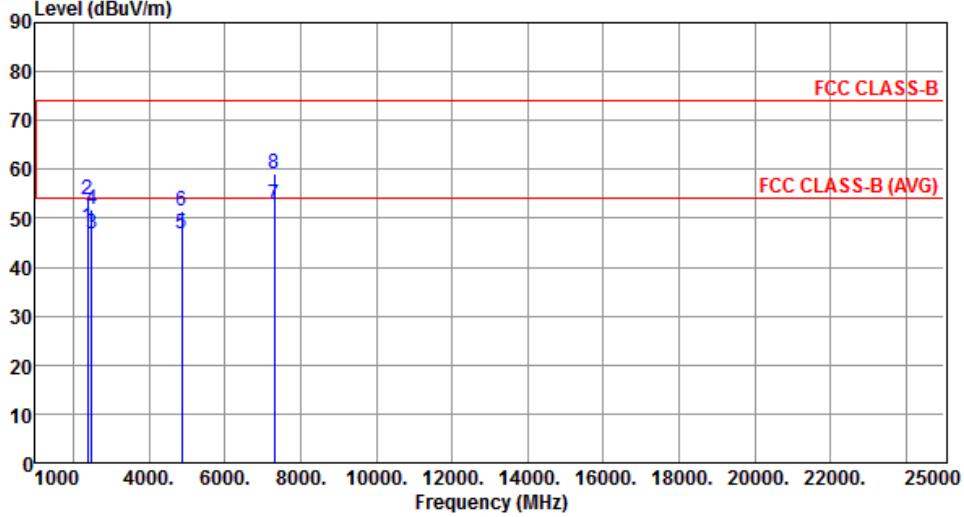
<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437																																																																																																		
<b>Polarization</b>	Vertical																																																																																																				
																																																																																																					
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>48.04</td> <td>54.00</td> <td>-5.96</td> <td>50.84</td> <td>-2.80</td> <td>Average</td> <td>100</td> <td>120</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>53.80</td> <td>74.00</td> <td>-20.20</td> <td>56.60</td> <td>-2.80</td> <td>Peak</td> <td>100</td> <td>120</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>46.84</td> <td>54.00</td> <td>-7.16</td> <td>49.87</td> <td>-3.03</td> <td>Average</td> <td>100</td> <td>120</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>51.86</td> <td>74.00</td> <td>-22.14</td> <td>54.89</td> <td>-3.03</td> <td>Peak</td> <td>100</td> <td>120</td> </tr> <tr> <td>5</td> <td>4874.00</td> <td>46.72</td> <td>54.00</td> <td>-7.28</td> <td>43.08</td> <td>3.64</td> <td>Average</td> <td>387</td> <td>61</td> </tr> <tr> <td>6</td> <td>4874.00</td> <td>51.46</td> <td>74.00</td> <td>-22.54</td> <td>47.82</td> <td>3.64</td> <td>Peak</td> <td>387</td> <td>61</td> </tr> <tr> <td>7</td> <td>7311.00</td> <td>52.70</td> <td>54.00</td> <td>-1.30</td> <td>43.43</td> <td>9.27</td> <td>Average</td> <td>356</td> <td>112</td> </tr> <tr> <td>8</td> <td>7311.00</td> <td>59.14</td> <td>74.00</td> <td>-14.86</td> <td>49.87</td> <td>9.27</td> <td>Peak</td> <td>356</td> <td>112</td> </tr> </tbody> </table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm		1	2390.00	48.04	54.00	-5.96	50.84	-2.80	Average	100	120	2	2390.00	53.80	74.00	-20.20	56.60	-2.80	Peak	100	120	3	2483.50	46.84	54.00	-7.16	49.87	-3.03	Average	100	120	4	2483.50	51.86	74.00	-22.14	54.89	-3.03	Peak	100	120	5	4874.00	46.72	54.00	-7.28	43.08	3.64	Average	387	61	6	4874.00	51.46	74.00	-22.54	47.82	3.64	Peak	387	61	7	7311.00	52.70	54.00	-1.30	43.43	9.27	Average	356	112	8	7311.00	59.14	74.00	-14.86	49.87	9.27	Peak	356	112
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table deg																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm																																																																																														
1	2390.00	48.04	54.00	-5.96	50.84	-2.80	Average	100	120																																																																																												
2	2390.00	53.80	74.00	-20.20	56.60	-2.80	Peak	100	120																																																																																												
3	2483.50	46.84	54.00	-7.16	49.87	-3.03	Average	100	120																																																																																												
4	2483.50	51.86	74.00	-22.14	54.89	-3.03	Peak	100	120																																																																																												
5	4874.00	46.72	54.00	-7.28	43.08	3.64	Average	387	61																																																																																												
6	4874.00	51.46	74.00	-22.54	47.82	3.64	Peak	387	61																																																																																												
7	7311.00	52.70	54.00	-1.30	43.43	9.27	Average	356	112																																																																																												
8	7311.00	59.14	74.00	-14.86	49.87	9.27	Peak	356	112																																																																																												

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
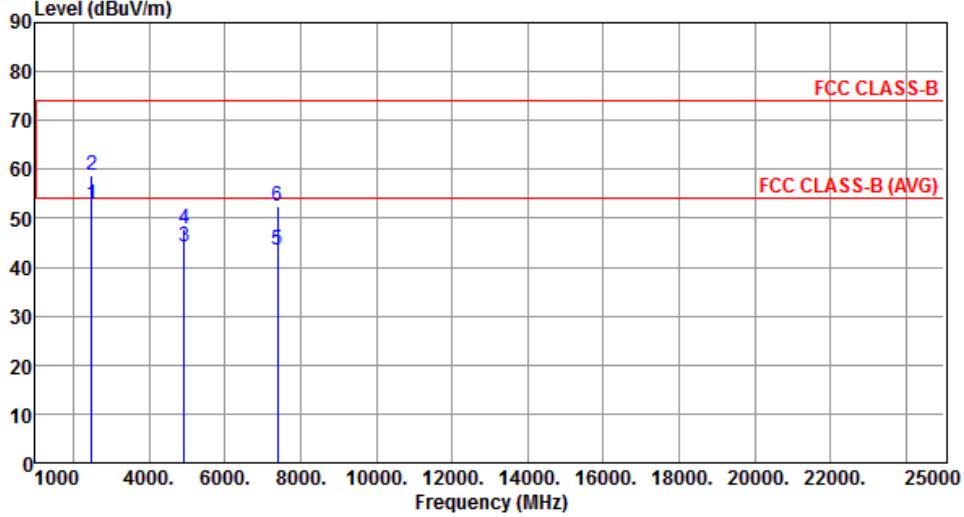
<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462																																																																														
<b>Polarization</b>	Horizontal																																																																																
																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>52.87</td> <td>54.00</td> <td>-1.13</td> <td>55.90</td> <td>-3.03</td> <td>Average</td> <td>256</td> <td>159</td> </tr> <tr> <td>2</td> <td>2483.50</td> <td>58.84</td> <td>74.00</td> <td>-15.16</td> <td>61.87</td> <td>-3.03</td> <td>Peak</td> <td>256</td> <td>159</td> </tr> <tr> <td>3</td> <td>4924.00</td> <td>44.32</td> <td>54.00</td> <td>-9.68</td> <td>40.63</td> <td>3.69</td> <td>Average</td> <td>105</td> <td>293</td> </tr> <tr> <td>4</td> <td>4924.00</td> <td>47.94</td> <td>74.00</td> <td>-26.06</td> <td>44.25</td> <td>3.69</td> <td>Peak</td> <td>105</td> <td>293</td> </tr> <tr> <td>5</td> <td>7386.00</td> <td>43.59</td> <td>54.00</td> <td>-10.41</td> <td>34.52</td> <td>9.07</td> <td>Average</td> <td>379</td> <td>189</td> </tr> <tr> <td>6</td> <td>7386.00</td> <td>52.59</td> <td>74.00</td> <td>-21.41</td> <td>43.52</td> <td>9.07</td> <td>Peak</td> <td>379</td> <td>189</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table	1	2483.50	52.87	54.00	-1.13	55.90	-3.03	Average	256	159	2	2483.50	58.84	74.00	-15.16	61.87	-3.03	Peak	256	159	3	4924.00	44.32	54.00	-9.68	40.63	3.69	Average	105	293	4	4924.00	47.94	74.00	-26.06	44.25	3.69	Peak	105	293	5	7386.00	43.59	54.00	-10.41	34.52	9.07	Average	379	189	6	7386.00	52.59	74.00	-21.41	43.52	9.07	Peak	379	189
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																									
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																									
1	2483.50	52.87	54.00	-1.13	55.90	-3.03	Average	256	159																																																																								
2	2483.50	58.84	74.00	-15.16	61.87	-3.03	Peak	256	159																																																																								
3	4924.00	44.32	54.00	-9.68	40.63	3.69	Average	105	293																																																																								
4	4924.00	47.94	74.00	-26.06	44.25	3.69	Peak	105	293																																																																								
5	7386.00	43.59	54.00	-10.41	34.52	9.07	Average	379	189																																																																								
6	7386.00	52.59	74.00	-21.41	43.52	9.07	Peak	379	189																																																																								

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

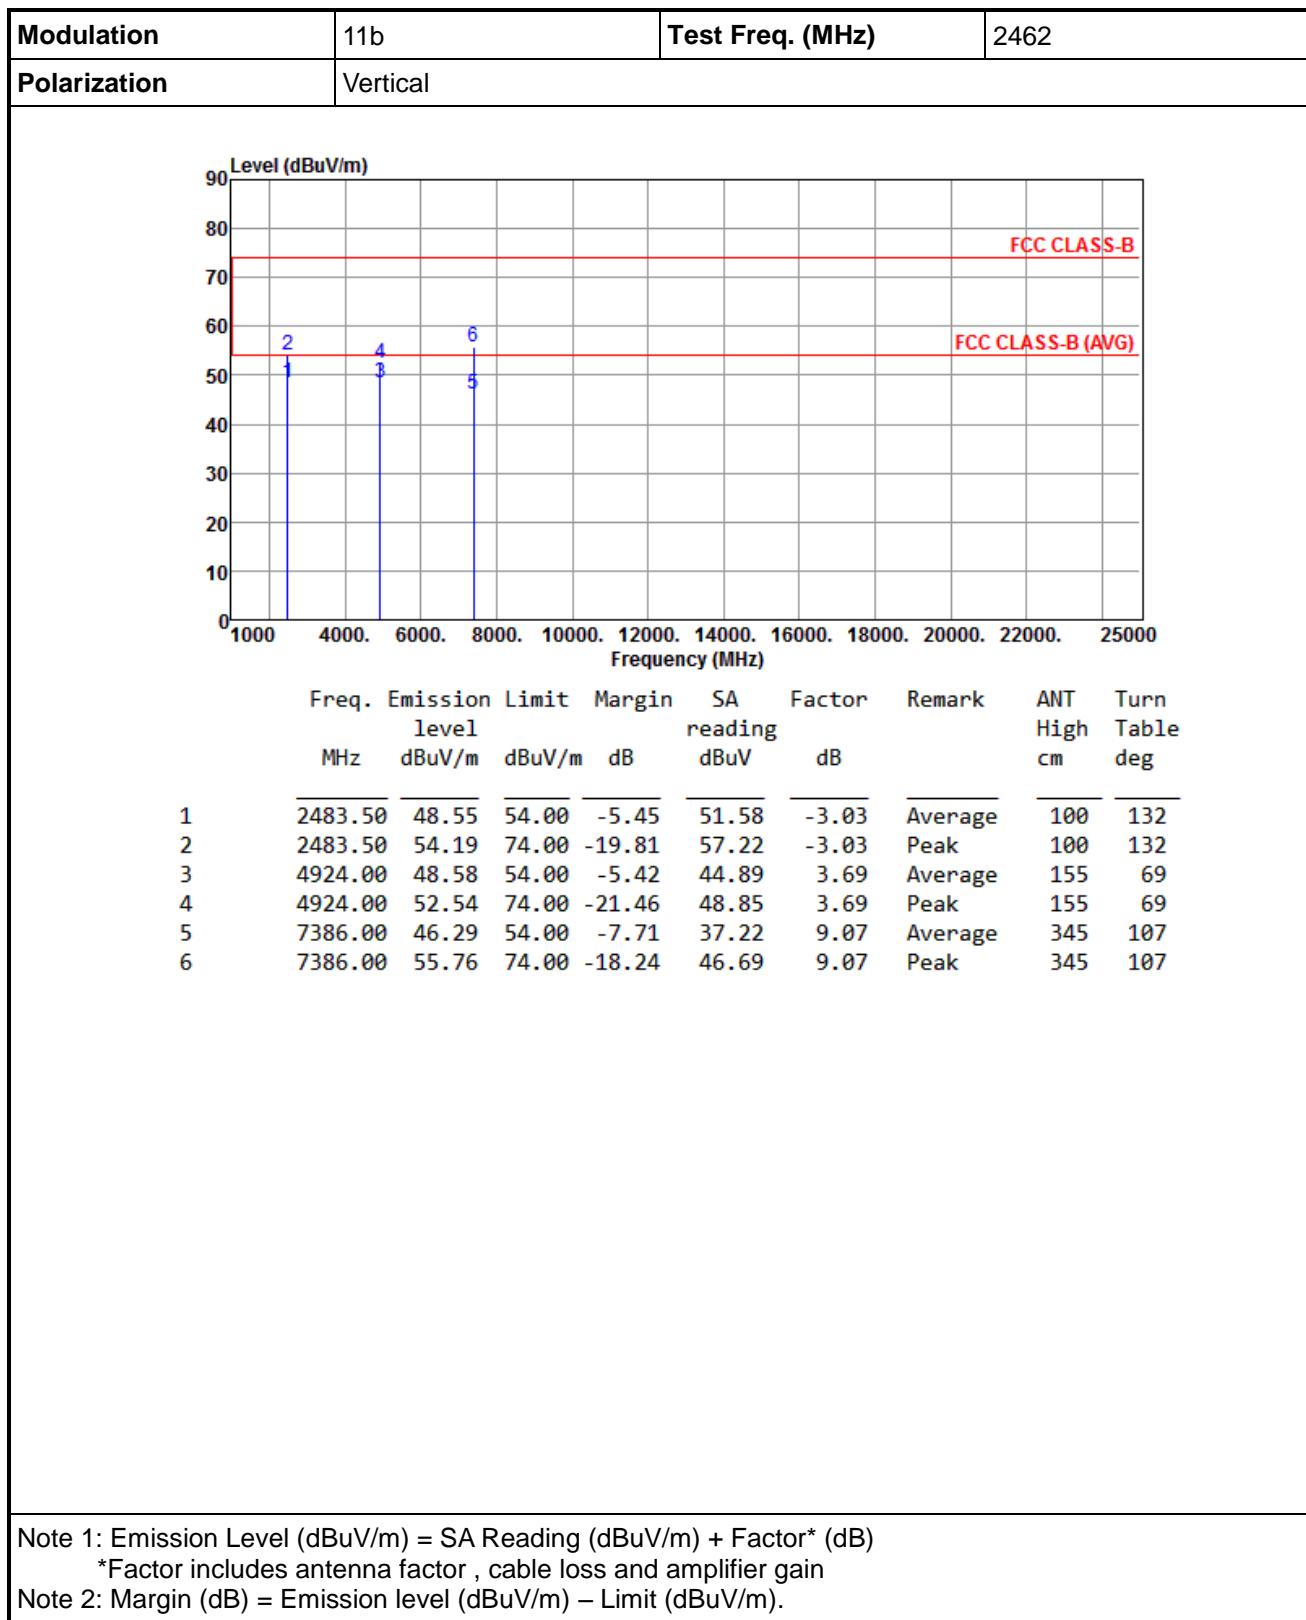



Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

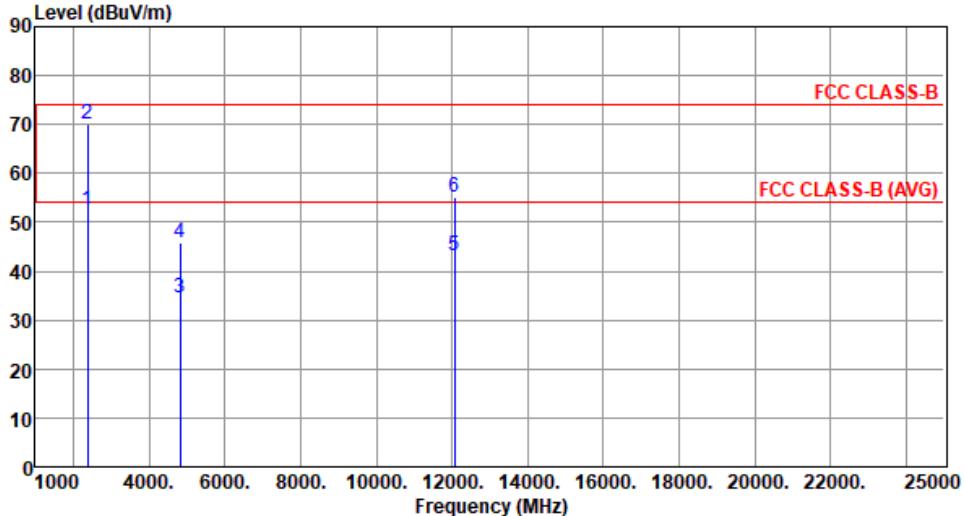
Modulation	11g	Test Freq. (MHz)	2412																																																																					
Polarization	Horizontal																																																																							
																																																																								
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level MHz</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>52.41</td> <td>54.00</td> <td>-1.59</td> <td>55.21</td> <td>-2.80</td> <td>Average</td> <td>215</td> <td>341</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>70.16</td> <td>74.00</td> <td>-3.84</td> <td>72.96</td> <td>-2.80</td> <td>Peak</td> <td>215</td> <td>341</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>34.44</td> <td>54.00</td> <td>-19.56</td> <td>30.84</td> <td>3.60</td> <td>Average</td> <td>100</td> <td>295</td> </tr> <tr> <td>4</td> <td>4824.00</td> <td>45.84</td> <td>74.00</td> <td>-28.16</td> <td>42.24</td> <td>3.60</td> <td>Peak</td> <td>100</td> <td>295</td> </tr> <tr> <td>5</td> <td>12060.00</td> <td>43.10</td> <td>54.00</td> <td>-10.90</td> <td>29.25</td> <td>13.85</td> <td>Average</td> <td>100</td> <td>297</td> </tr> <tr> <td>6</td> <td>12060.00</td> <td>55.07</td> <td>74.00</td> <td>-18.93</td> <td>41.22</td> <td>13.85</td> <td>Peak</td> <td>100</td> <td>297</td> </tr> </tbody> </table>				Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2390.00	52.41	54.00	-1.59	55.21	-2.80	Average	215	341	2	2390.00	70.16	74.00	-3.84	72.96	-2.80	Peak	215	341	3	4824.00	34.44	54.00	-19.56	30.84	3.60	Average	100	295	4	4824.00	45.84	74.00	-28.16	42.24	3.60	Peak	100	295	5	12060.00	43.10	54.00	-10.90	29.25	13.85	Average	100	297	6	12060.00	55.07	74.00	-18.93	41.22	13.85	Peak	100	297
Freq.	Emission level MHz	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																
1	2390.00	52.41	54.00	-1.59	55.21	-2.80	Average	215	341																																																															
2	2390.00	70.16	74.00	-3.84	72.96	-2.80	Peak	215	341																																																															
3	4824.00	34.44	54.00	-19.56	30.84	3.60	Average	100	295																																																															
4	4824.00	45.84	74.00	-28.16	42.24	3.60	Peak	100	295																																																															
5	12060.00	43.10	54.00	-10.90	29.25	13.85	Average	100	297																																																															
6	12060.00	55.07	74.00	-18.93	41.22	13.85	Peak	100	297																																																															
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																								

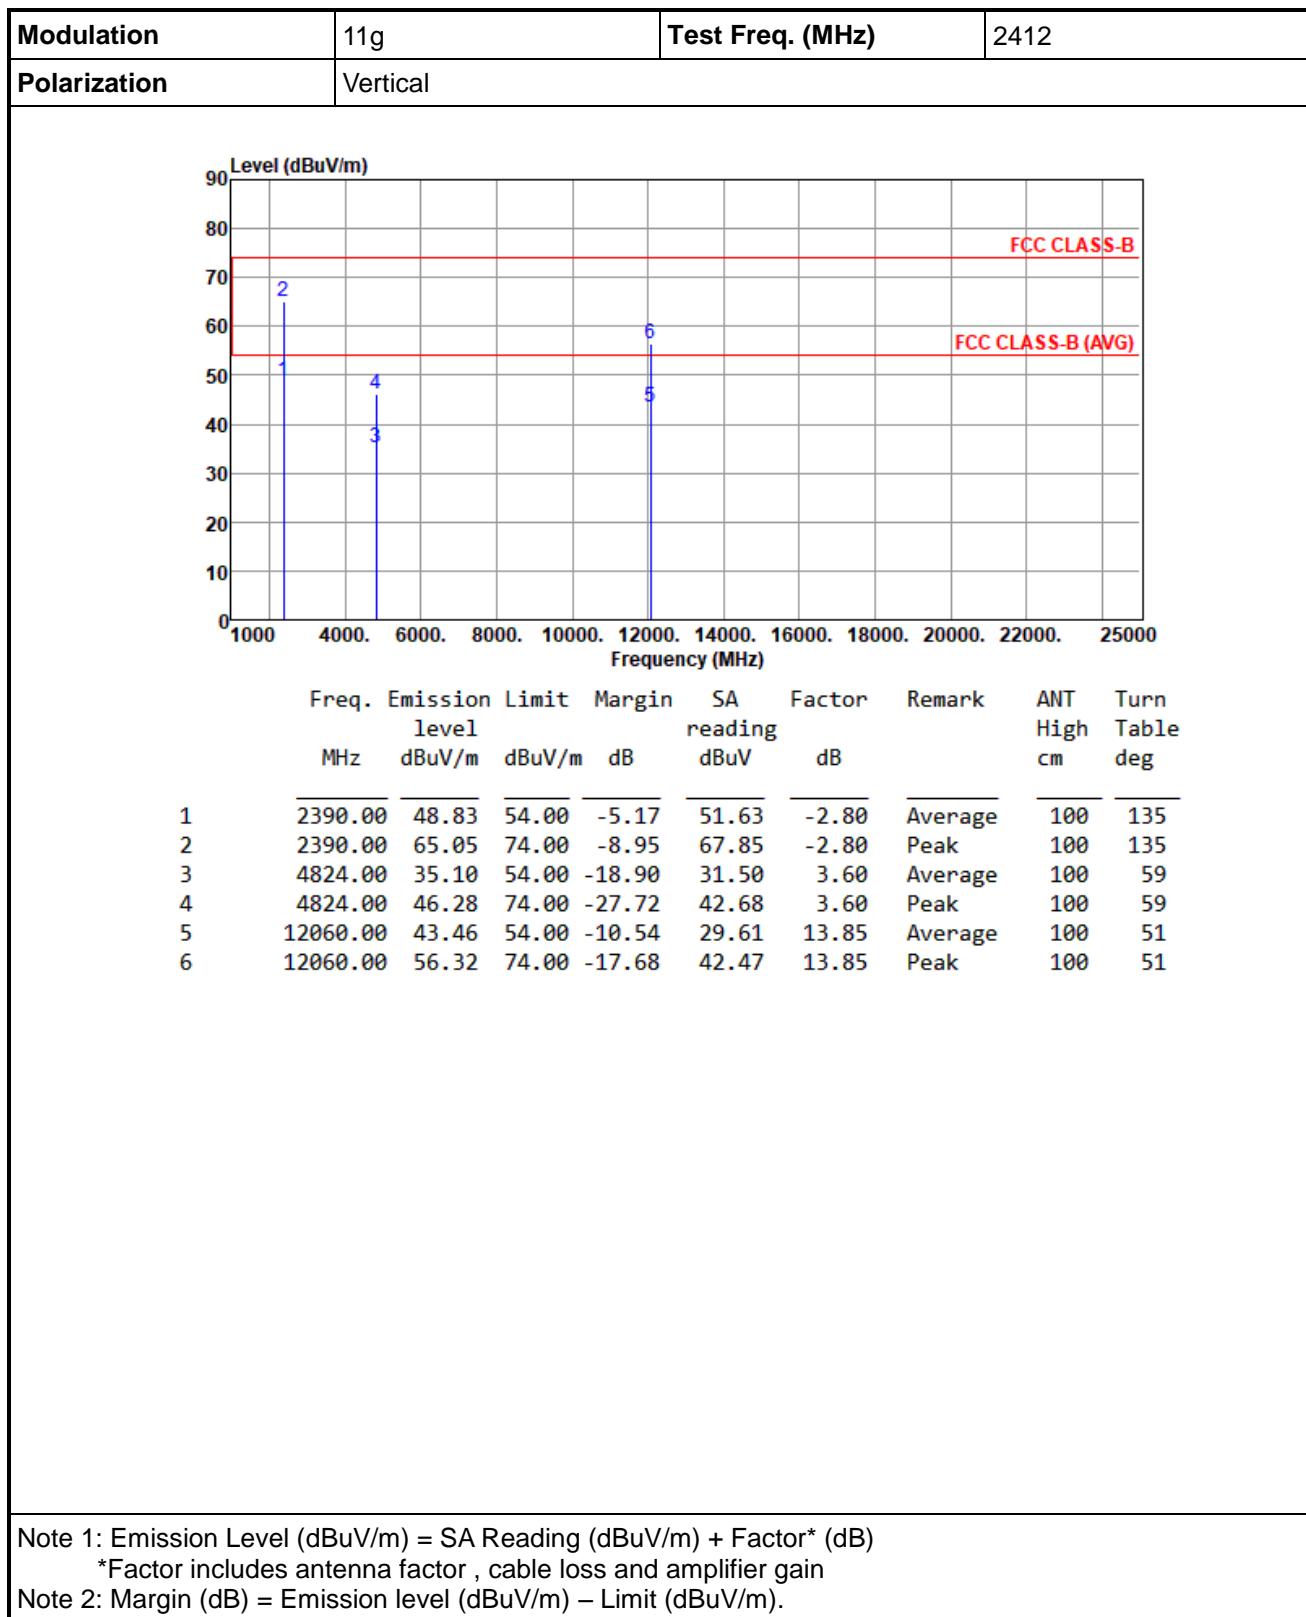

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

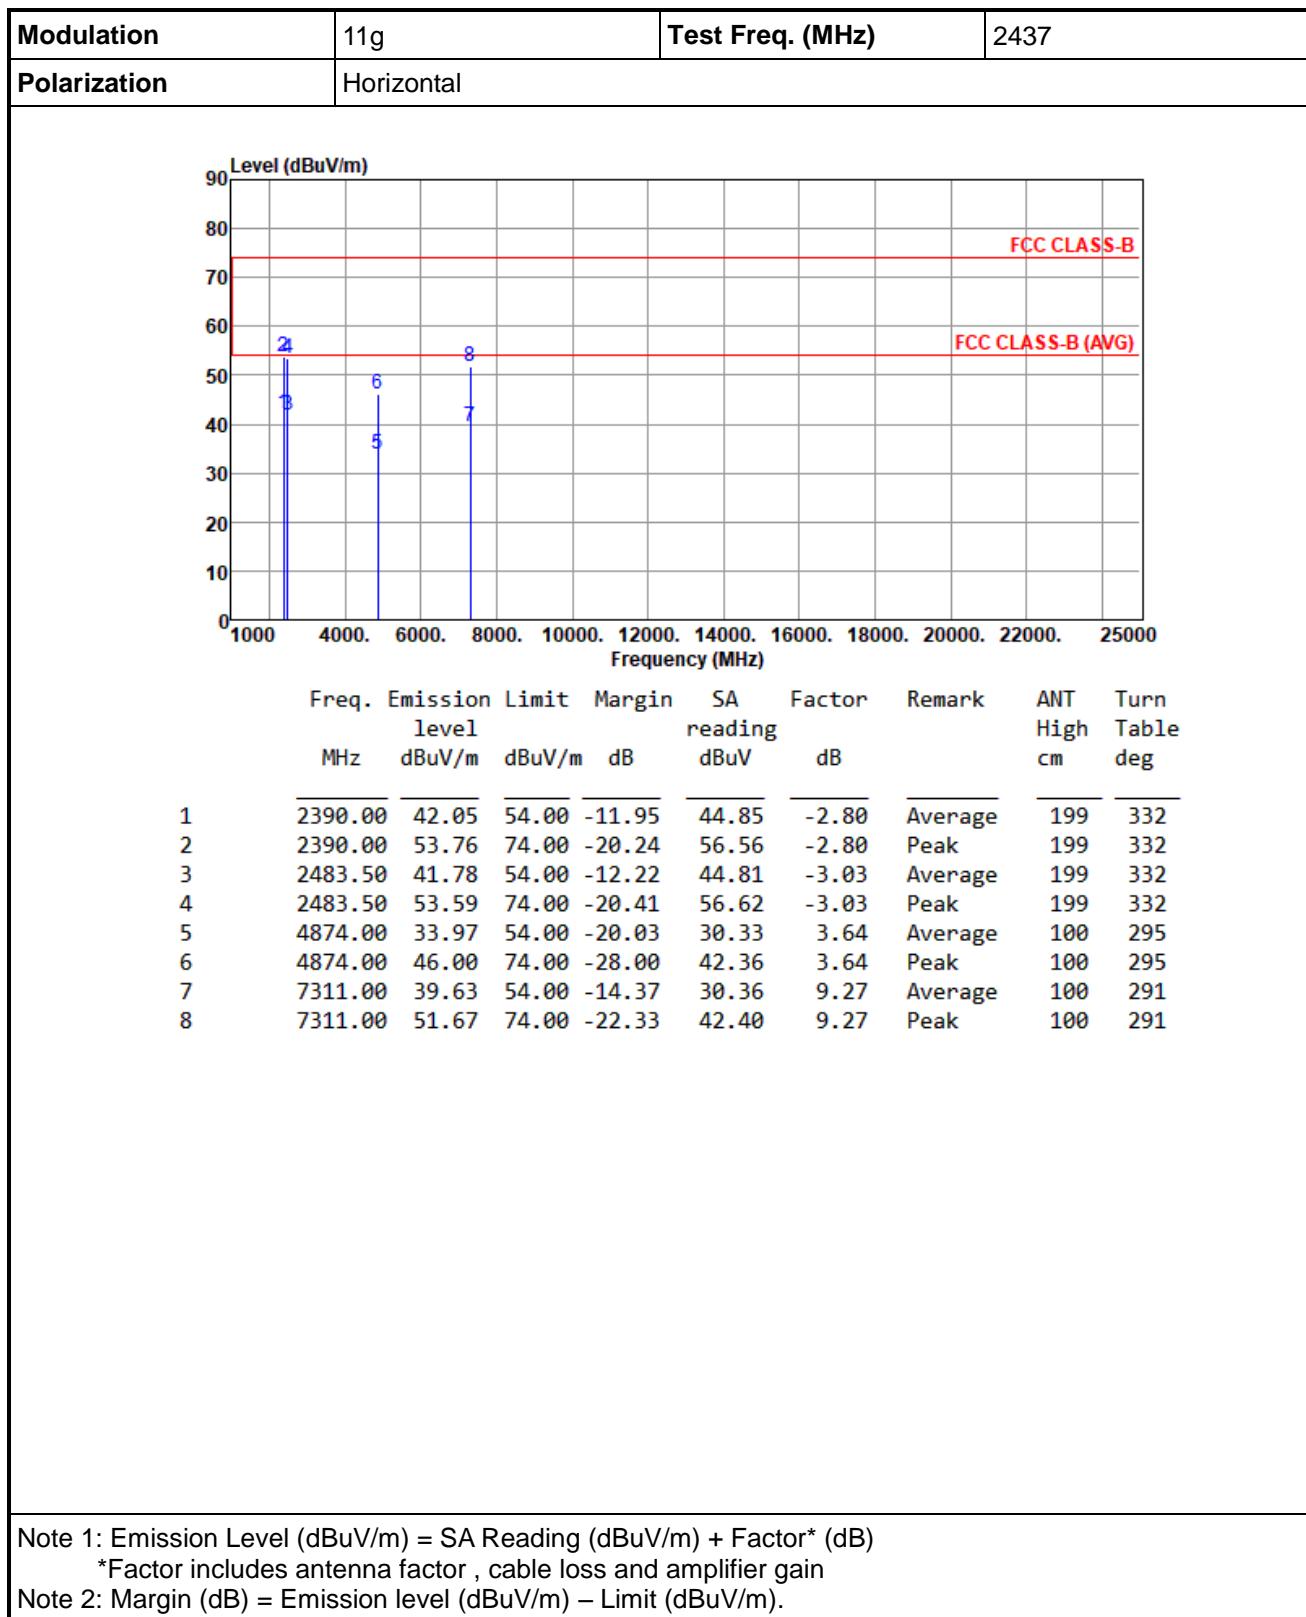

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
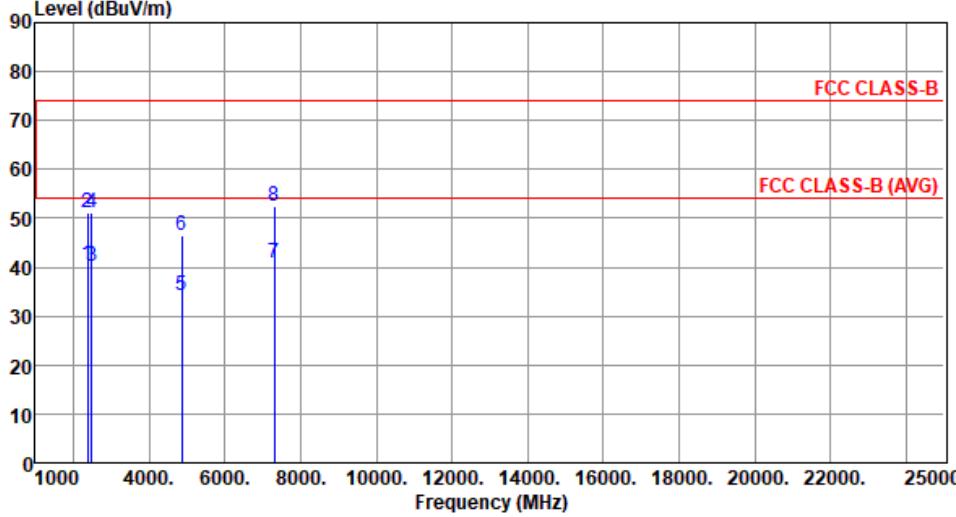
<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437																																																																																																		
<b>Polarization</b>	Vertical																																																																																																				
																																																																																																					
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>40.45</td> <td>54.00</td> <td>-13.55</td> <td>43.25</td> <td>-2.80</td> <td>Average</td> <td>100</td> <td>128</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>51.20</td> <td>74.00</td> <td>-22.80</td> <td>54.00</td> <td>-2.80</td> <td>Peak</td> <td>100</td> <td>128</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>40.28</td> <td>54.00</td> <td>-13.72</td> <td>43.31</td> <td>-3.03</td> <td>Average</td> <td>100</td> <td>128</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>51.29</td> <td>74.00</td> <td>-22.71</td> <td>54.32</td> <td>-3.03</td> <td>Peak</td> <td>100</td> <td>128</td> </tr> <tr> <td>5</td> <td>4874.00</td> <td>34.19</td> <td>54.00</td> <td>-19.81</td> <td>30.55</td> <td>3.64</td> <td>Average</td> <td>100</td> <td>59</td> </tr> <tr> <td>6</td> <td>4874.00</td> <td>46.49</td> <td>74.00</td> <td>-27.51</td> <td>42.85</td> <td>3.64</td> <td>Peak</td> <td>100</td> <td>59</td> </tr> <tr> <td>7</td> <td>7311.00</td> <td>40.84</td> <td>54.00</td> <td>-13.16</td> <td>31.57</td> <td>9.27</td> <td>Average</td> <td>332</td> <td>123</td> </tr> <tr> <td>8</td> <td>7311.00</td> <td>52.51</td> <td>74.00</td> <td>-21.49</td> <td>43.24</td> <td>9.27</td> <td>Peak</td> <td>332</td> <td>123</td> </tr> </tbody> </table>				Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm		1	2390.00	40.45	54.00	-13.55	43.25	-2.80	Average	100	128	2	2390.00	51.20	74.00	-22.80	54.00	-2.80	Peak	100	128	3	2483.50	40.28	54.00	-13.72	43.31	-3.03	Average	100	128	4	2483.50	51.29	74.00	-22.71	54.32	-3.03	Peak	100	128	5	4874.00	34.19	54.00	-19.81	30.55	3.64	Average	100	59	6	4874.00	46.49	74.00	-27.51	42.85	3.64	Peak	100	59	7	7311.00	40.84	54.00	-13.16	31.57	9.27	Average	332	123	8	7311.00	52.51	74.00	-21.49	43.24	9.27	Peak	332	123
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table deg																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm																																																																																														
1	2390.00	40.45	54.00	-13.55	43.25	-2.80	Average	100	128																																																																																												
2	2390.00	51.20	74.00	-22.80	54.00	-2.80	Peak	100	128																																																																																												
3	2483.50	40.28	54.00	-13.72	43.31	-3.03	Average	100	128																																																																																												
4	2483.50	51.29	74.00	-22.71	54.32	-3.03	Peak	100	128																																																																																												
5	4874.00	34.19	54.00	-19.81	30.55	3.64	Average	100	59																																																																																												
6	4874.00	46.49	74.00	-27.51	42.85	3.64	Peak	100	59																																																																																												
7	7311.00	40.84	54.00	-13.16	31.57	9.27	Average	332	123																																																																																												
8	7311.00	52.51	74.00	-21.49	43.24	9.27	Peak	332	123																																																																																												

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

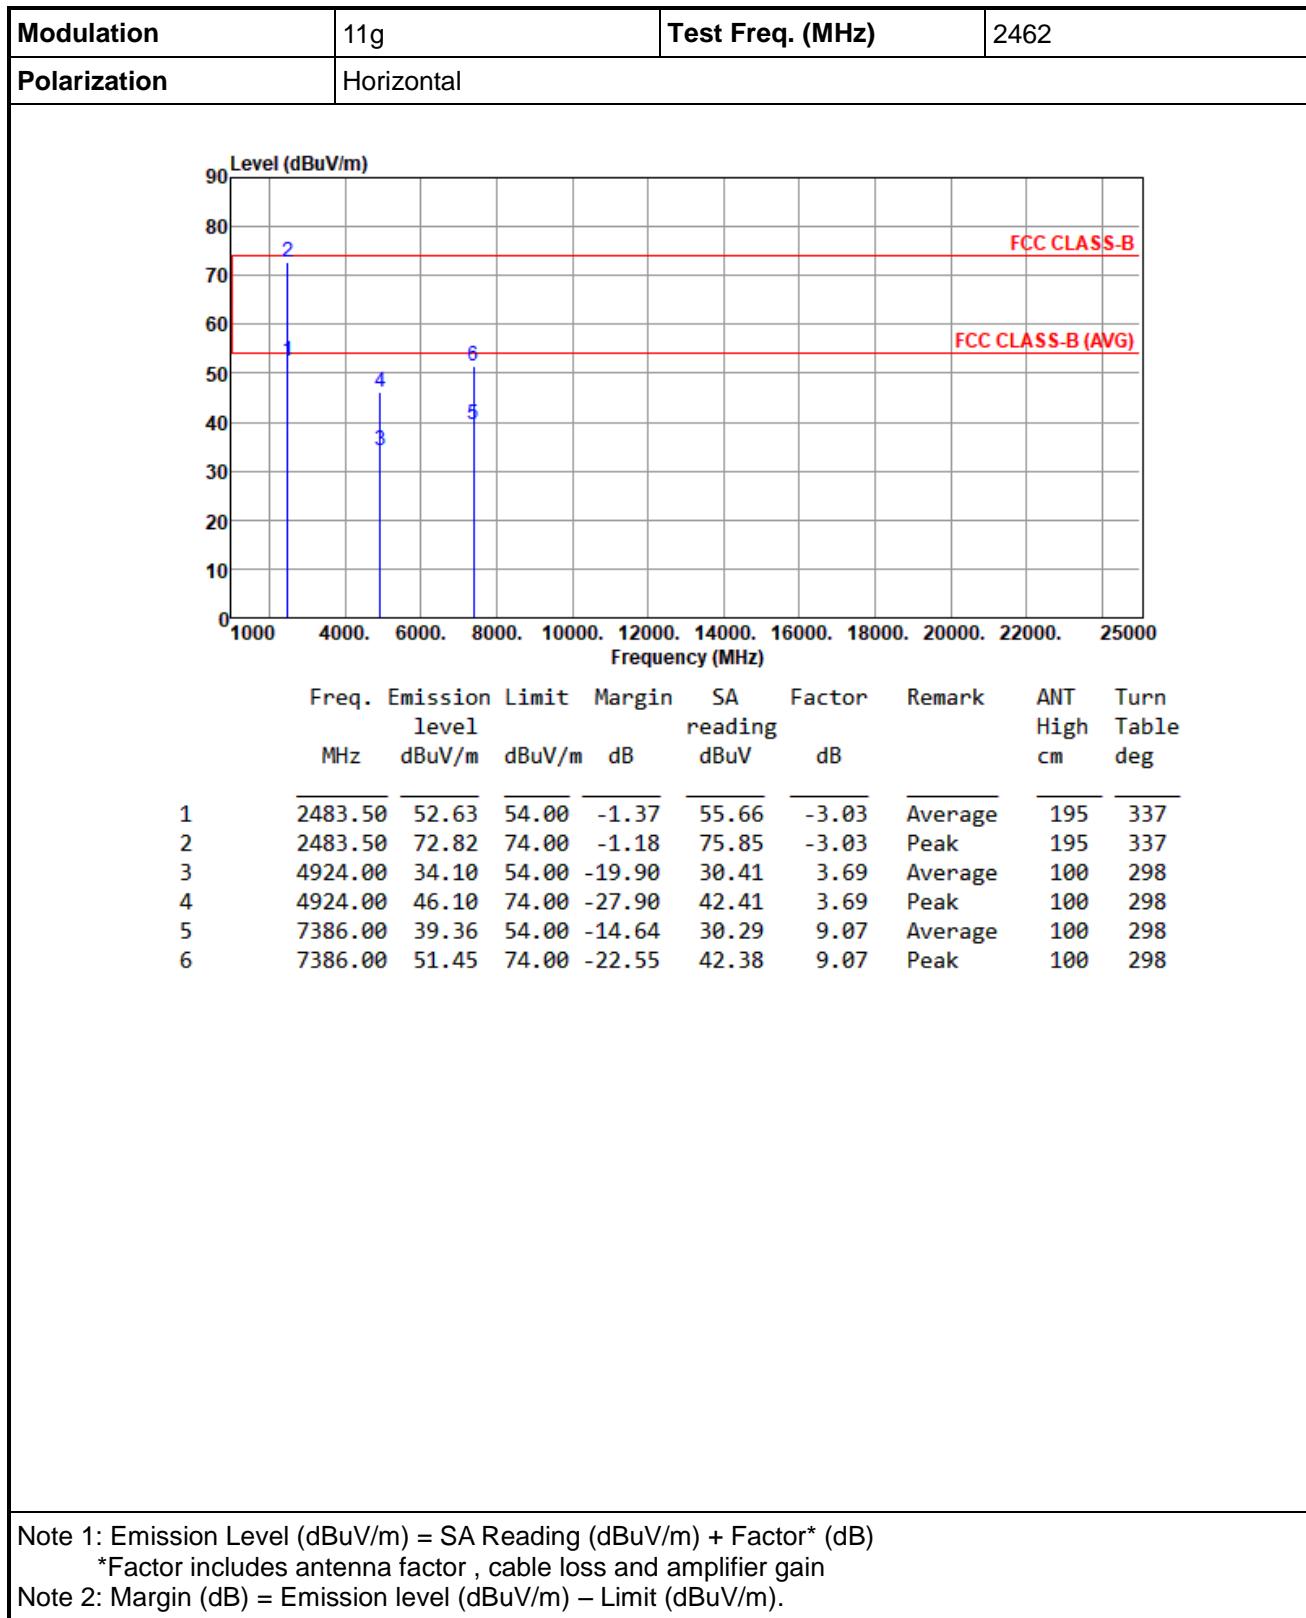

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

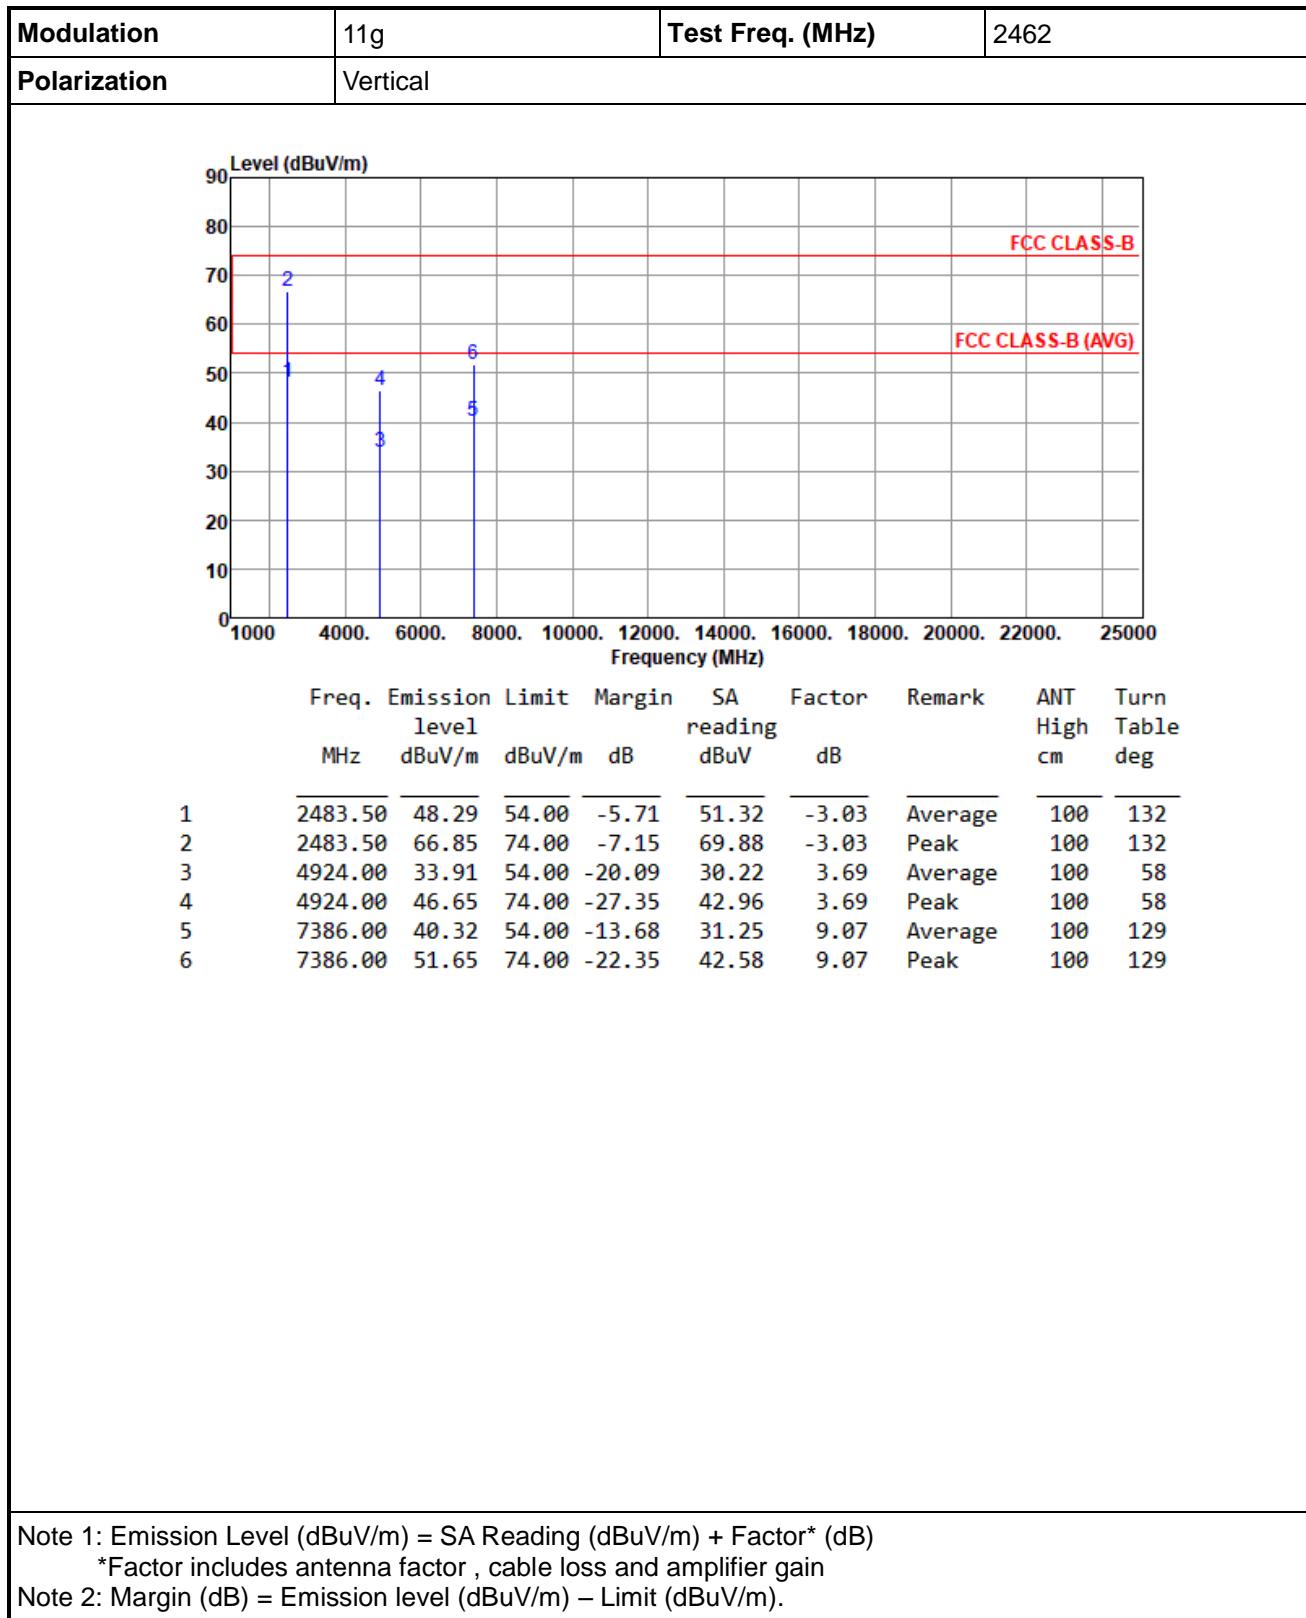



Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

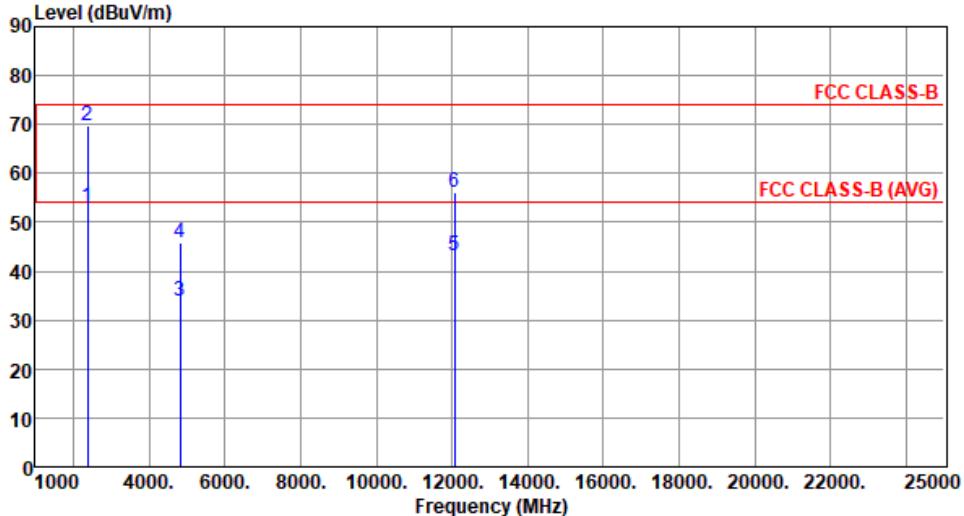Modulation	HT20	Test Freq. (MHz)	2412																																																																												
Polarization	Horizontal																																																																														
																																																																															
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA</th> <th>Factor</th> <th>Remark</th> <th>ANT</th> <th>Turn</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>level</th> <th>reading</th> <th>reading</th> <th></th> <th>High</th> <th>Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>52.99</td> <td>54.00</td> <td>-1.01</td> <td>55.79</td> <td>-2.80</td> <td>Average</td> <td>210</td> <td>338</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>69.75</td> <td>74.00</td> <td>-4.25</td> <td>72.55</td> <td>-2.80</td> <td>Peak</td> <td>210</td> <td>338</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>33.97</td> <td>54.00</td> <td>-20.03</td> <td>30.37</td> <td>3.60</td> <td>Average</td> <td>100</td> <td>296</td> </tr> <tr> <td>4</td> <td>4824.00</td> <td>45.79</td> <td>74.00</td> <td>-28.21</td> <td>42.19</td> <td>3.60</td> <td>Peak</td> <td>100</td> <td>296</td> </tr> <tr> <td>5</td> <td>12060.00</td> <td>43.15</td> <td>54.00</td> <td>-10.85</td> <td>29.30</td> <td>13.85</td> <td>Average</td> <td>100</td> <td>296</td> </tr> <tr> <td>6</td> <td>12060.00</td> <td>56.06</td> <td>74.00</td> <td>-17.94</td> <td>42.21</td> <td>13.85</td> <td>Peak</td> <td>100</td> <td>296</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	level	reading	reading		High	Table	1	2390.00	52.99	54.00	-1.01	55.79	-2.80	Average	210	338	2	2390.00	69.75	74.00	-4.25	72.55	-2.80	Peak	210	338	3	4824.00	33.97	54.00	-20.03	30.37	3.60	Average	100	296	4	4824.00	45.79	74.00	-28.21	42.19	3.60	Peak	100	296	5	12060.00	43.15	54.00	-10.85	29.30	13.85	Average	100	296	6	12060.00	56.06	74.00	-17.94	42.21	13.85	Peak	100	296
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																								
MHz	level	level	reading	reading		High	Table																																																																								
1	2390.00	52.99	54.00	-1.01	55.79	-2.80	Average	210	338																																																																						
2	2390.00	69.75	74.00	-4.25	72.55	-2.80	Peak	210	338																																																																						
3	4824.00	33.97	54.00	-20.03	30.37	3.60	Average	100	296																																																																						
4	4824.00	45.79	74.00	-28.21	42.19	3.60	Peak	100	296																																																																						
5	12060.00	43.15	54.00	-10.85	29.30	13.85	Average	100	296																																																																						
6	12060.00	56.06	74.00	-17.94	42.21	13.85	Peak	100	296																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

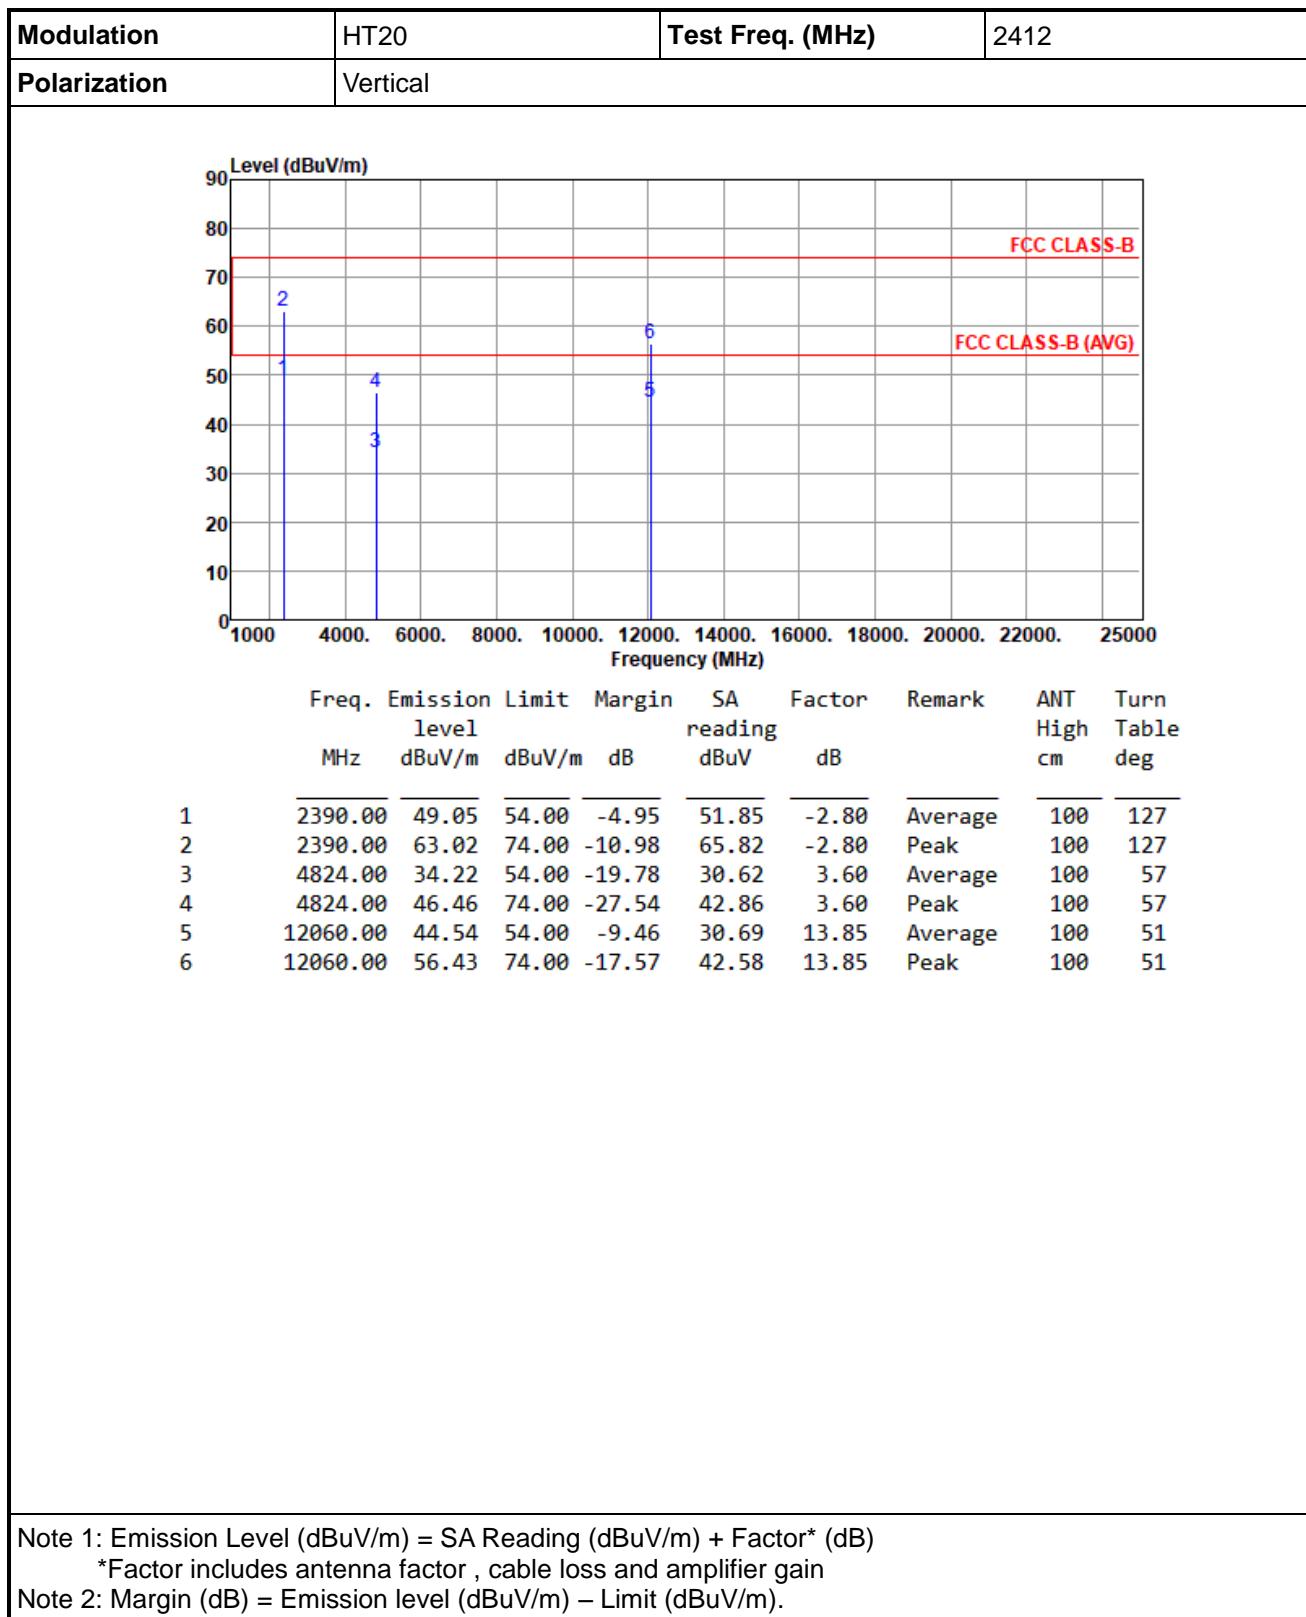


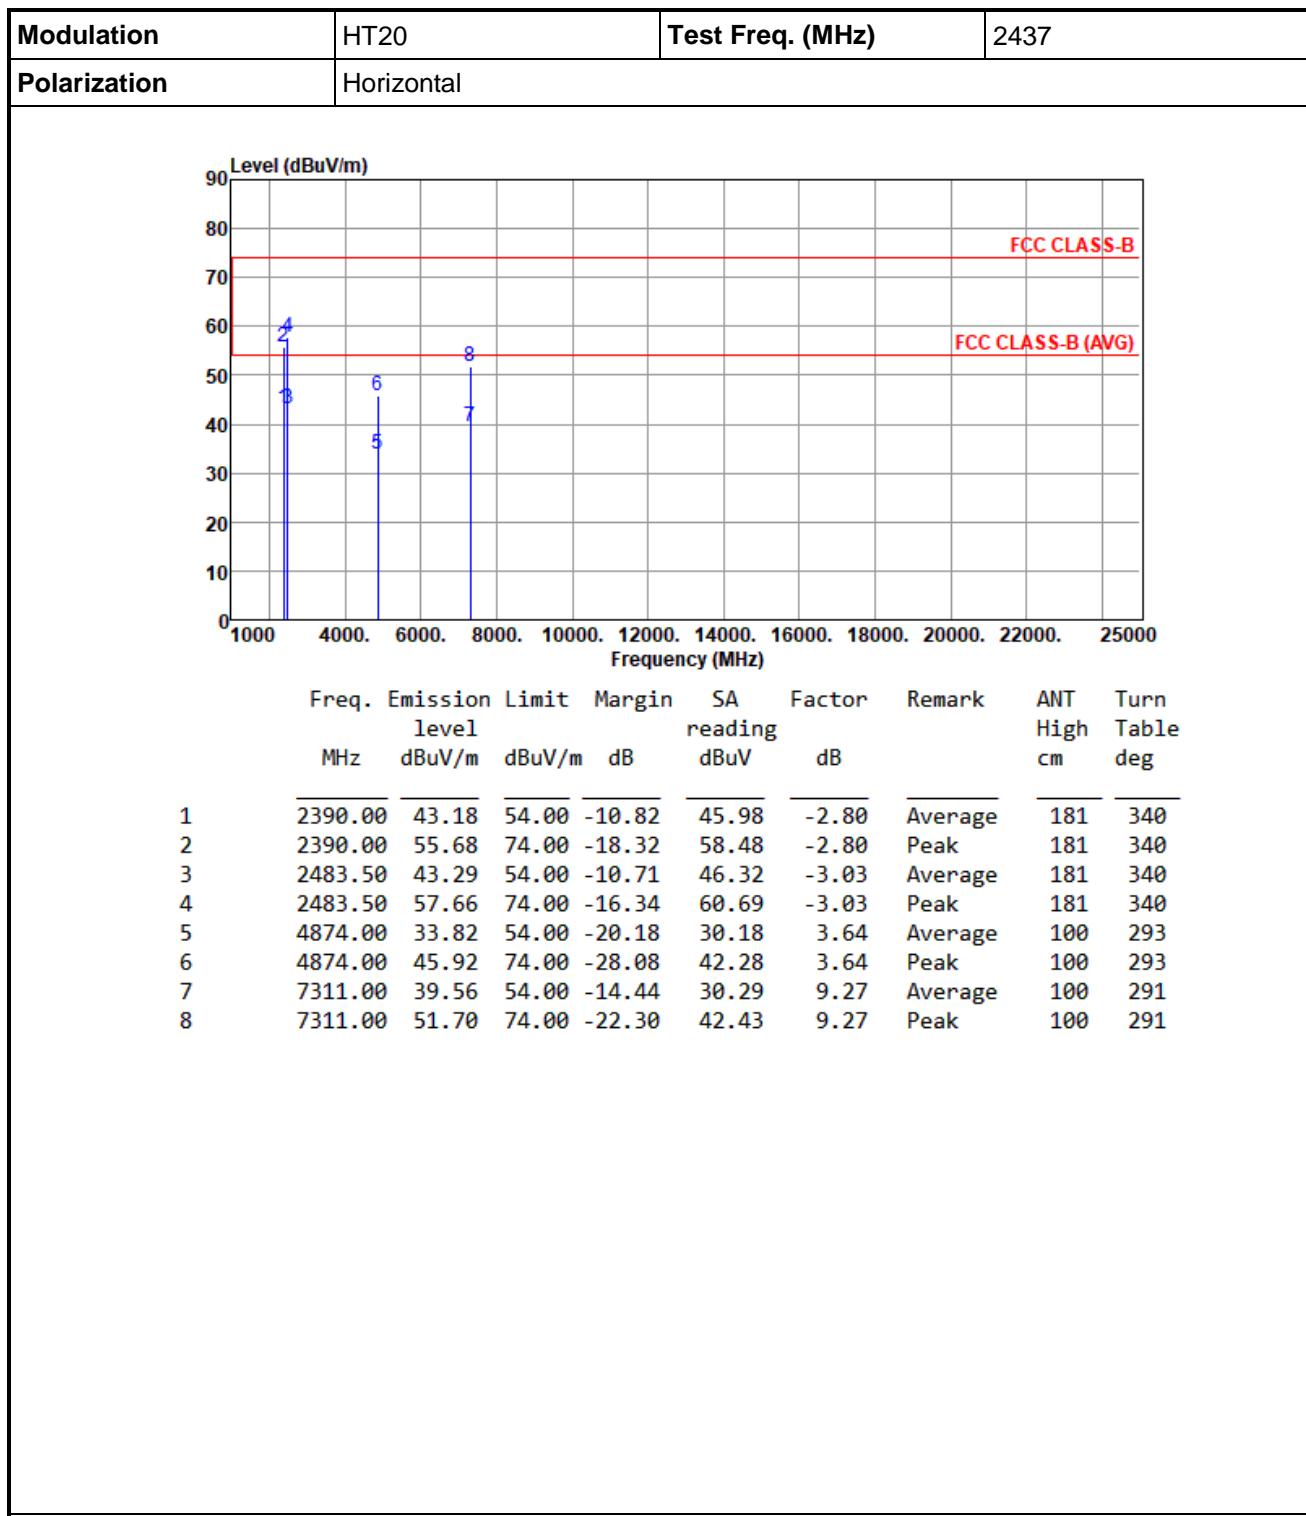


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

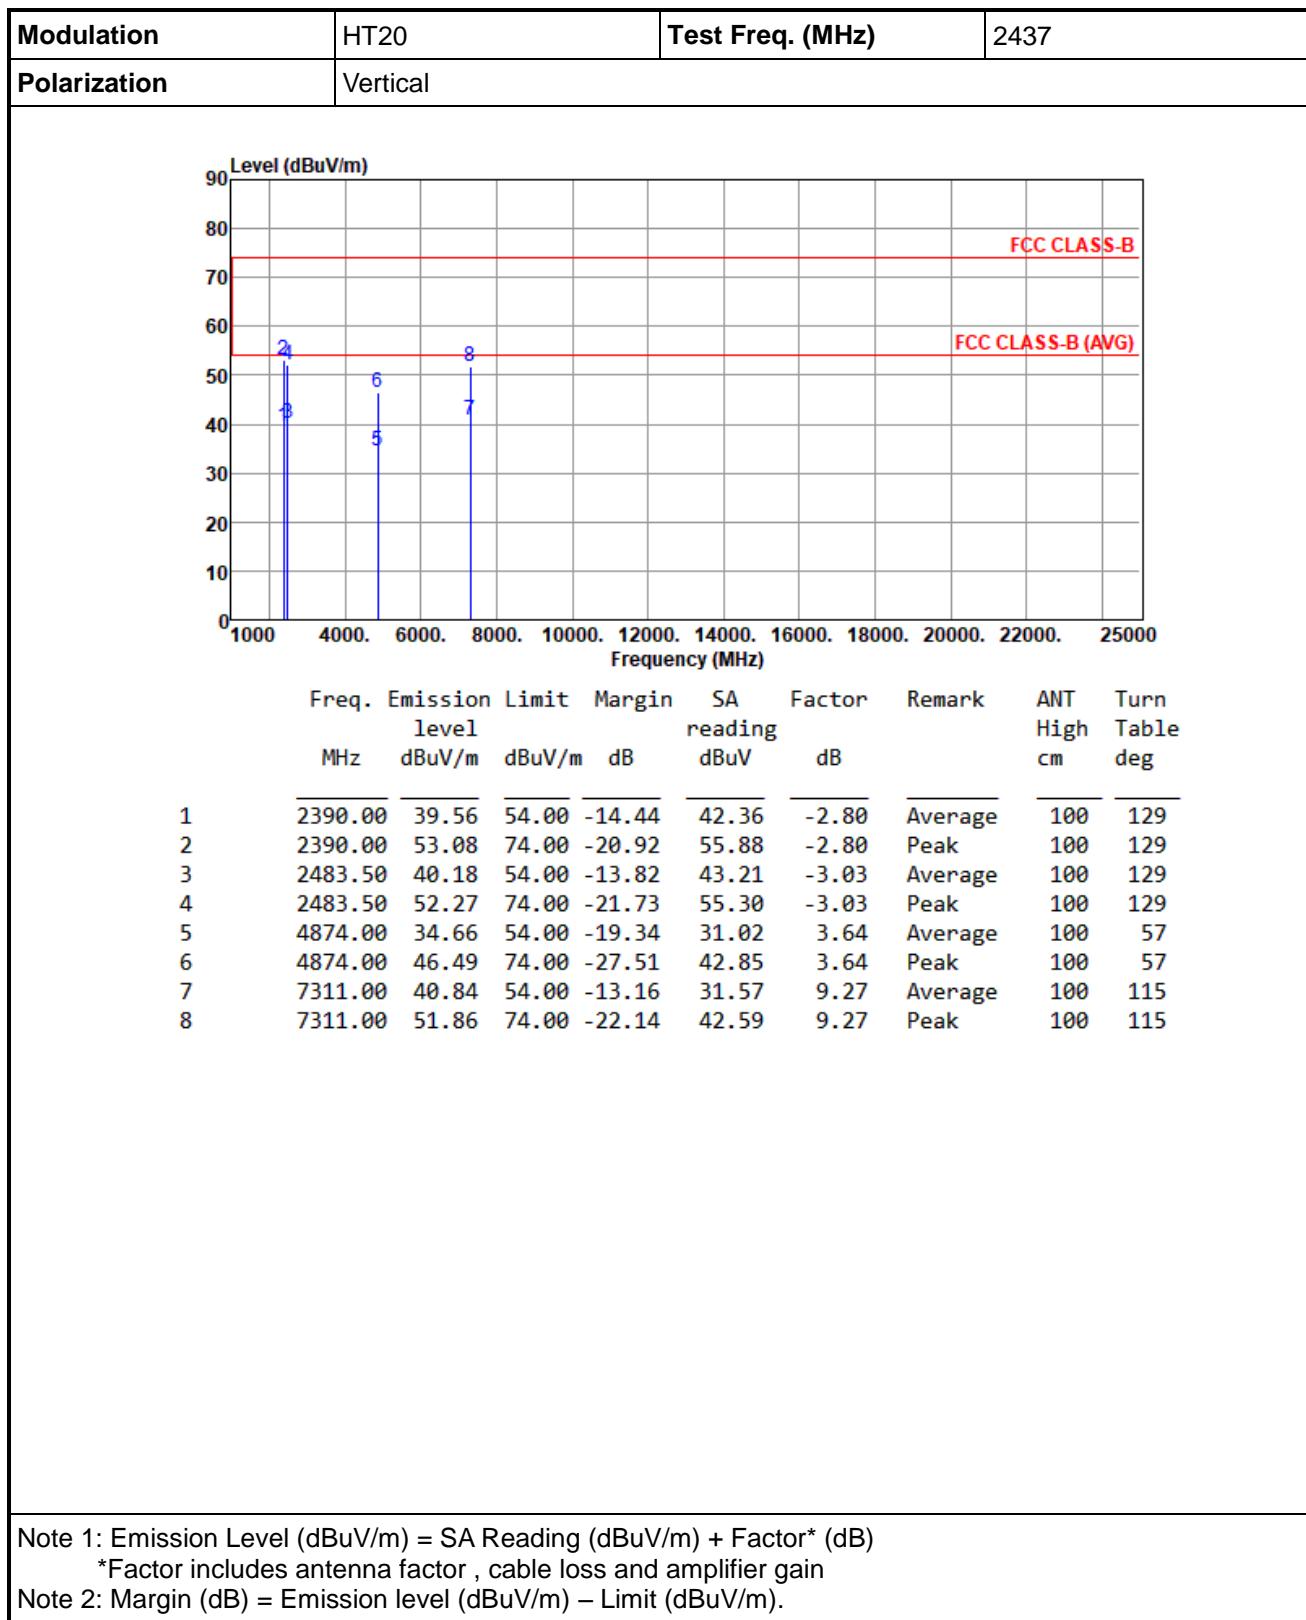


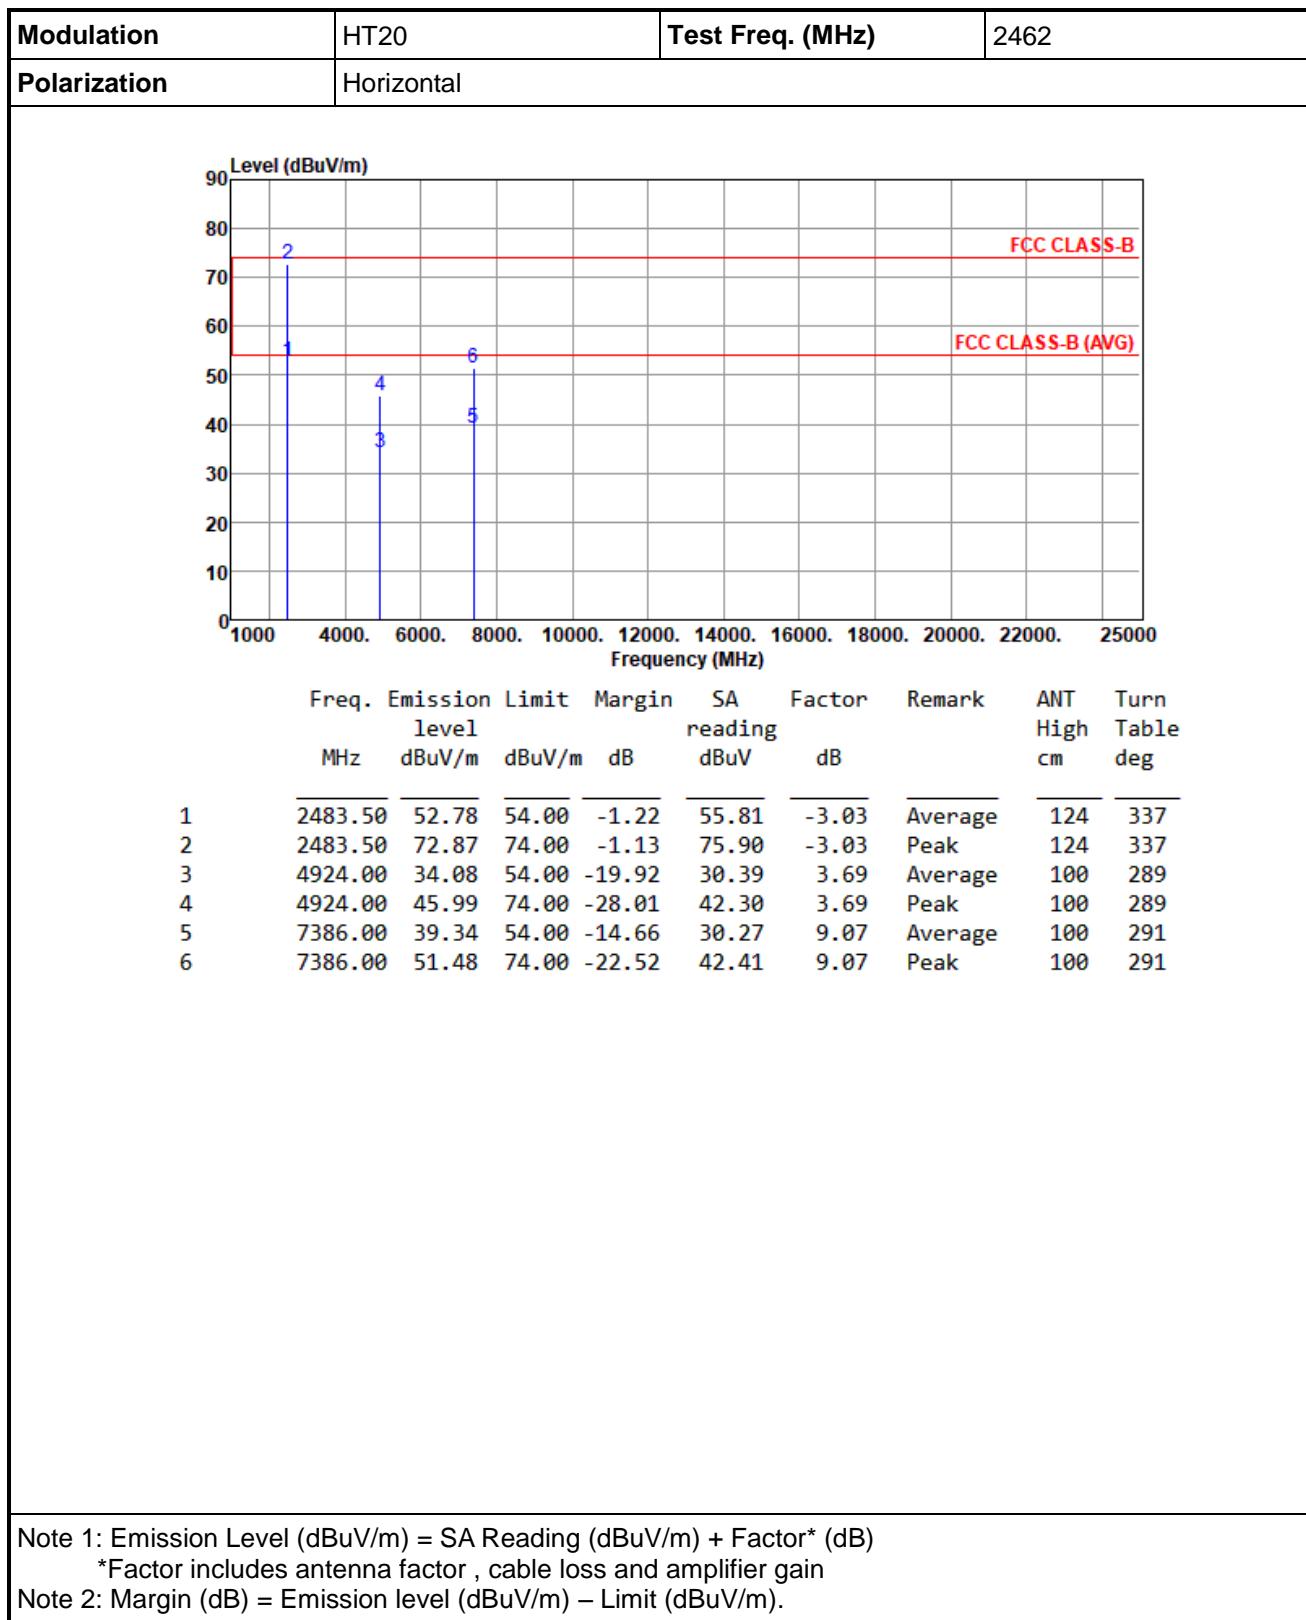

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

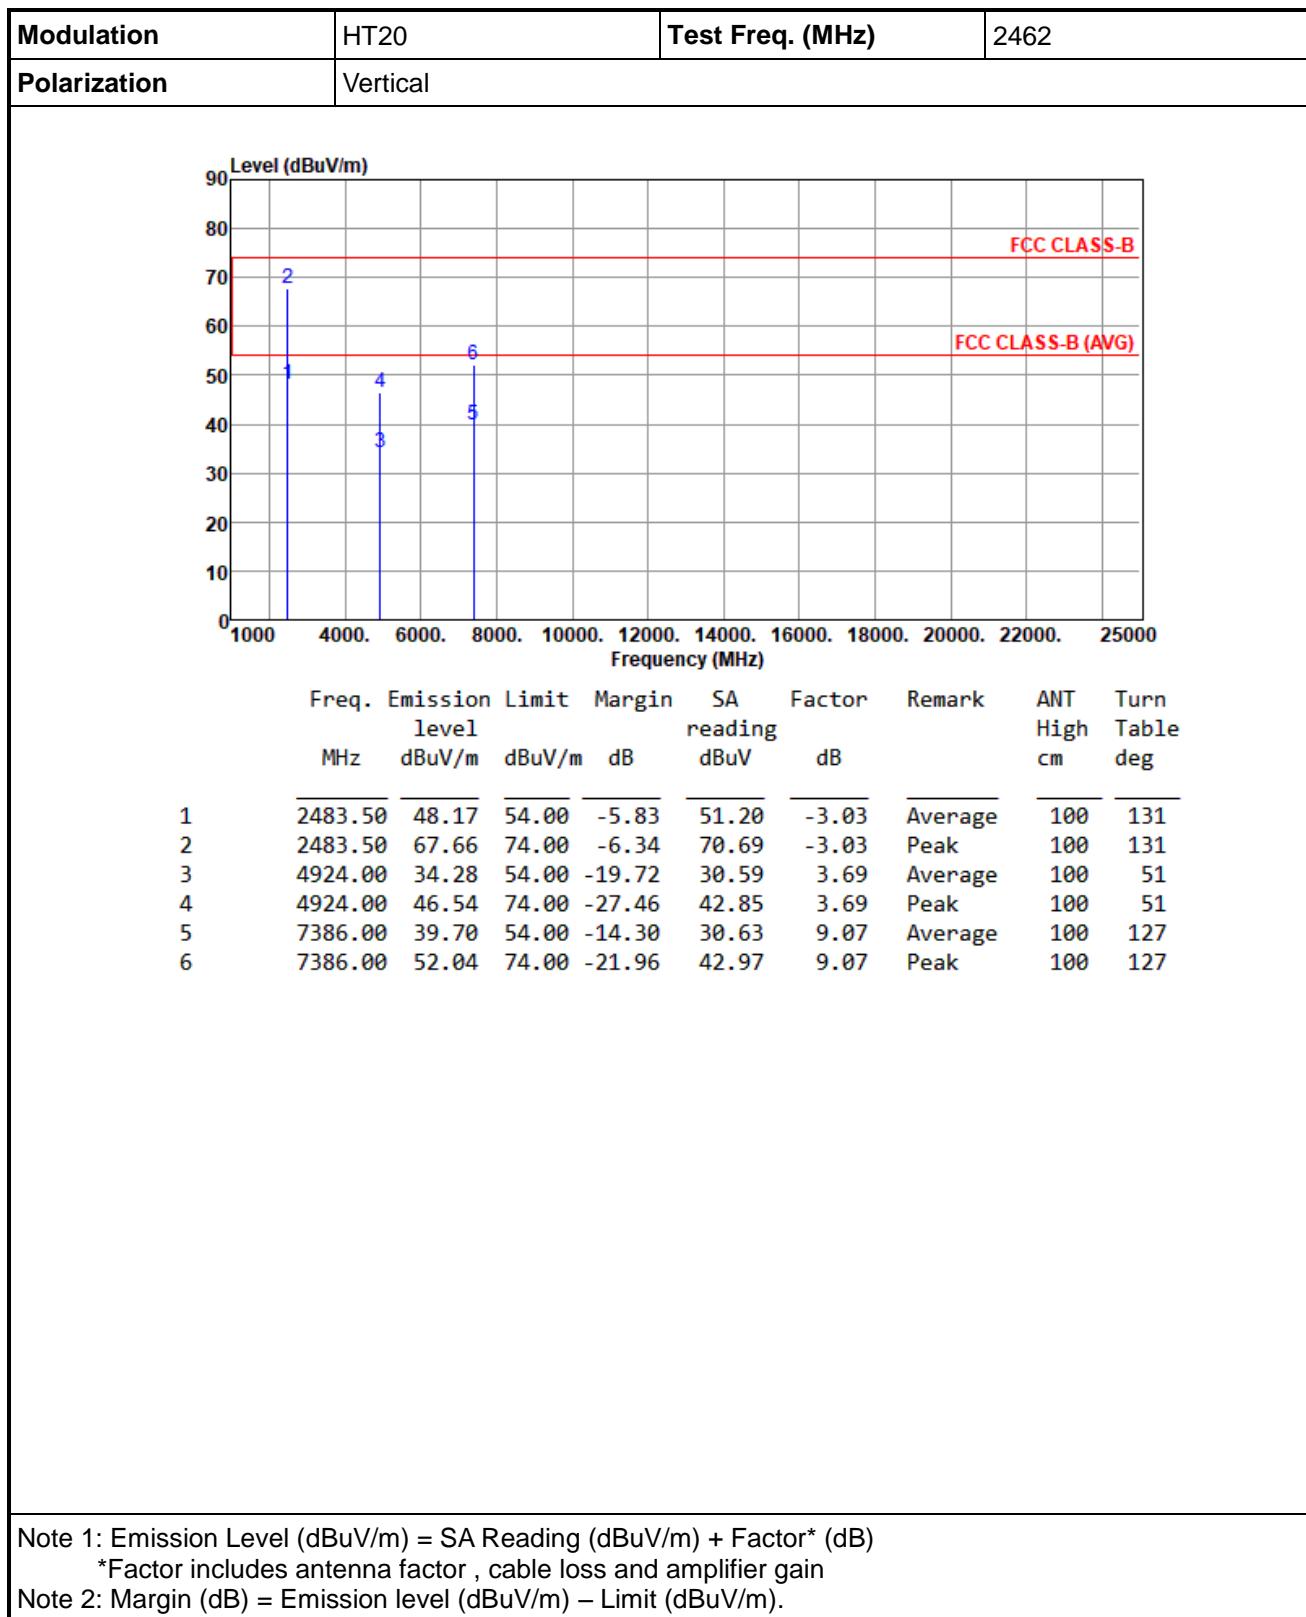

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.3 Test Setup

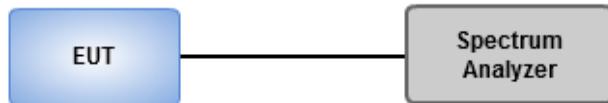


### 3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

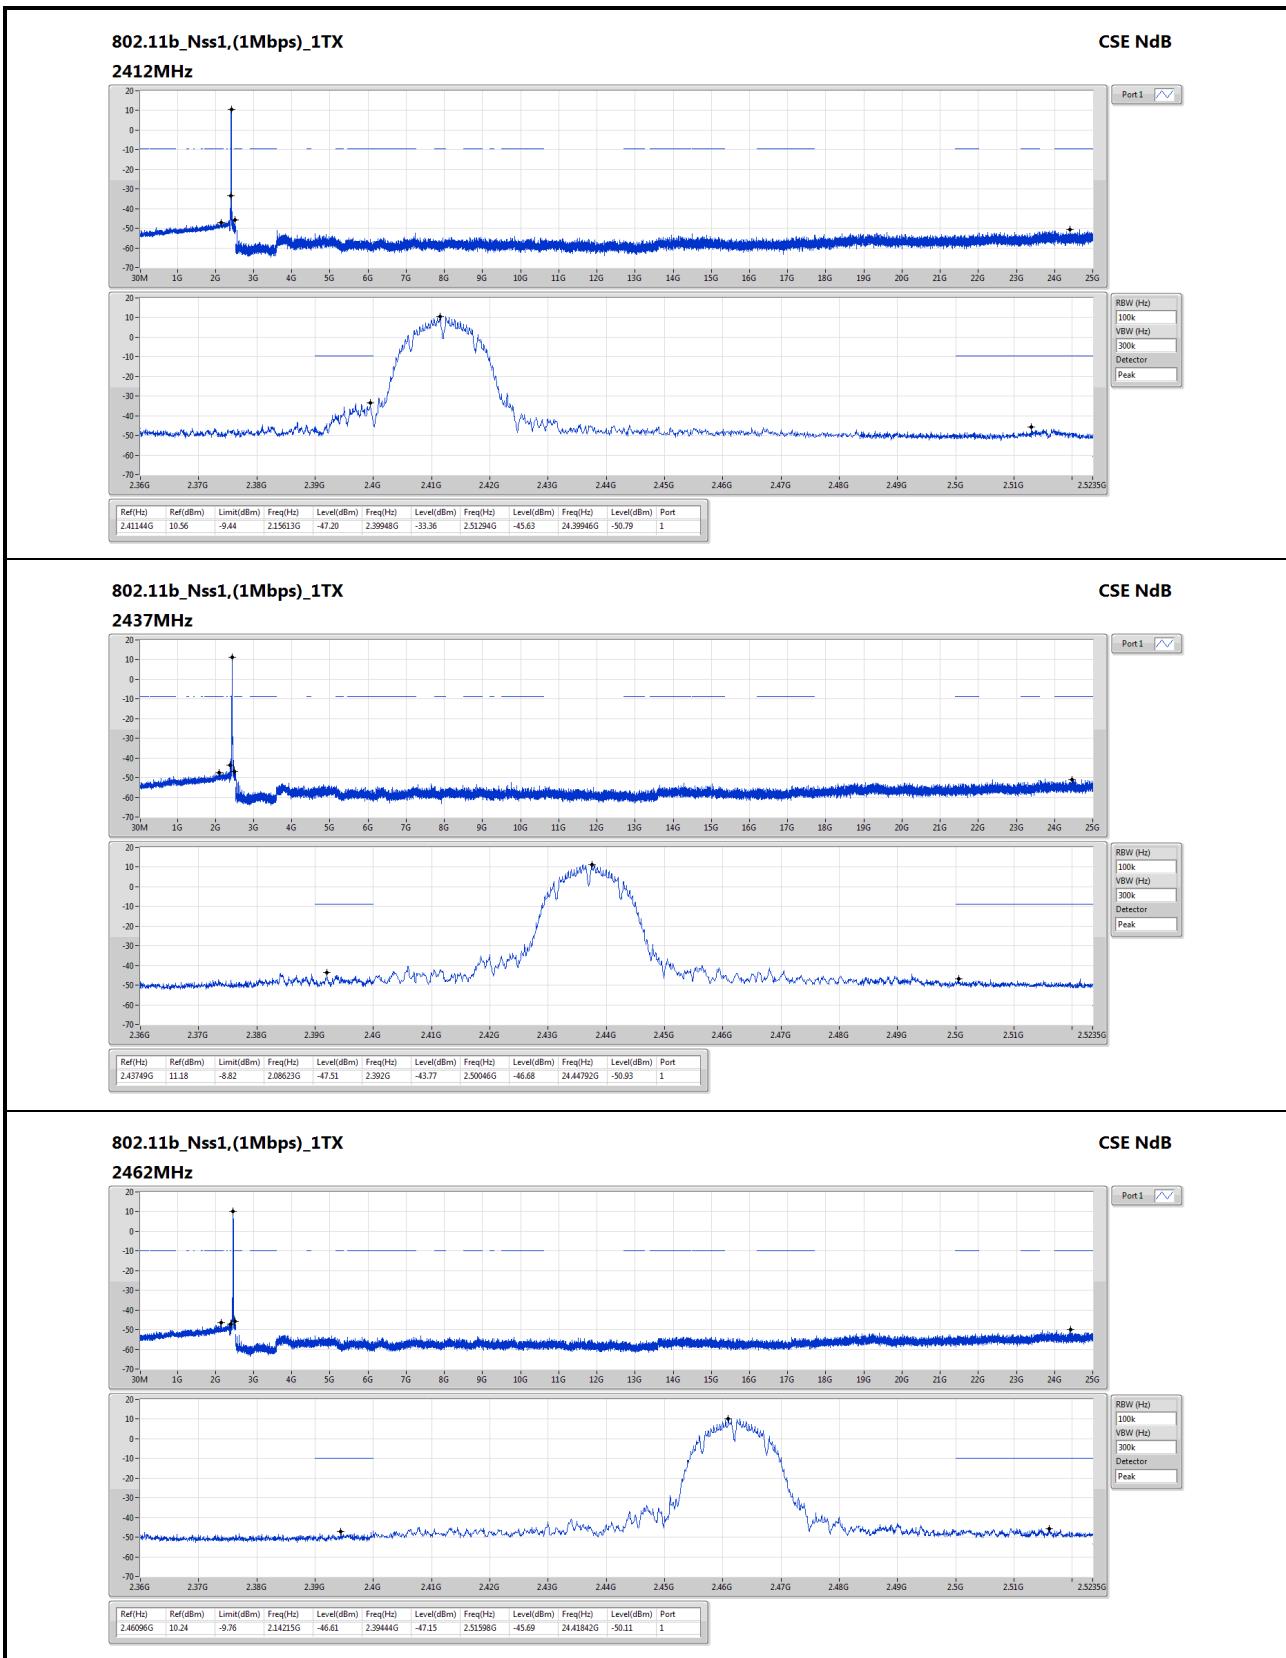

**802.11g\_Nss1,(6Mbps)\_1TX**

**CSE NdB**


**2412MHz**

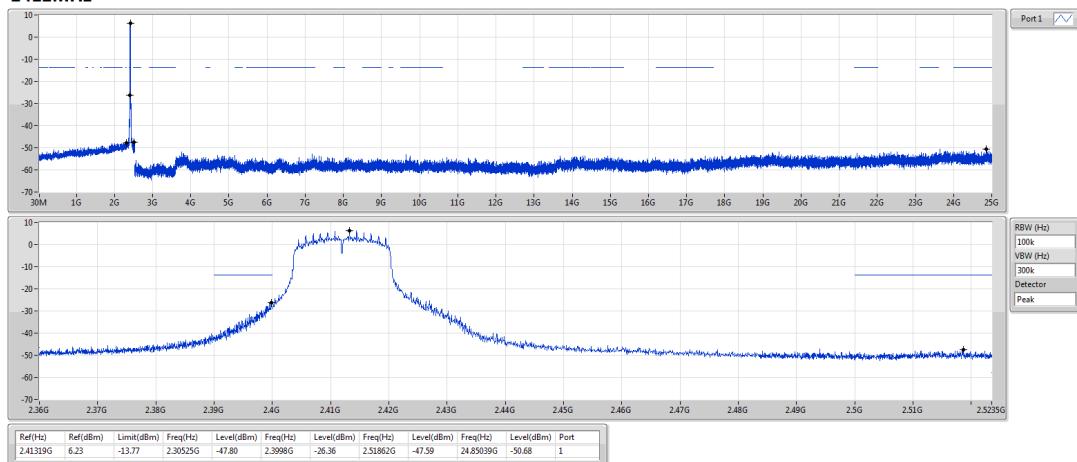

**802.11g\_Nss1,(6Mbps)\_1TX**

**CSE NdB**


**2437MHz**

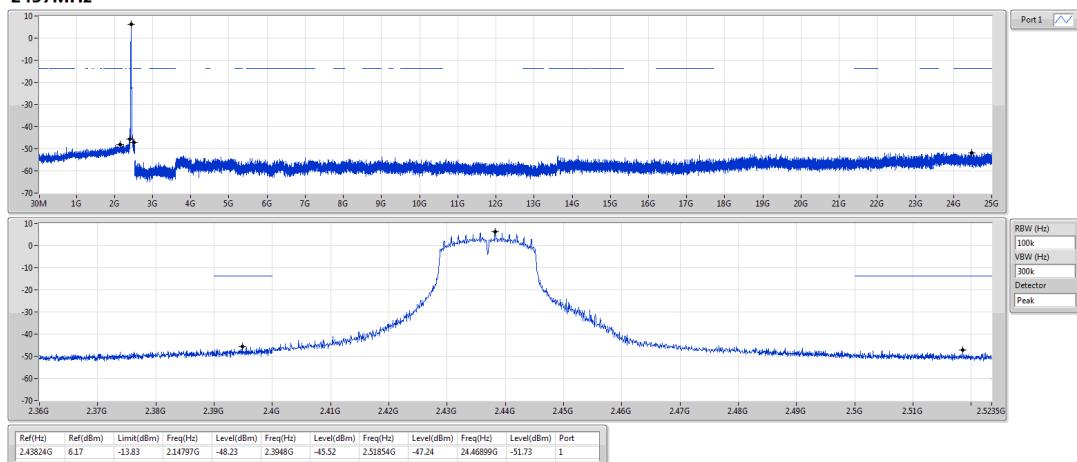

**802.11g\_Nss1,(6Mbps)\_1TX**

**CSE NdB**


**2462MHz**

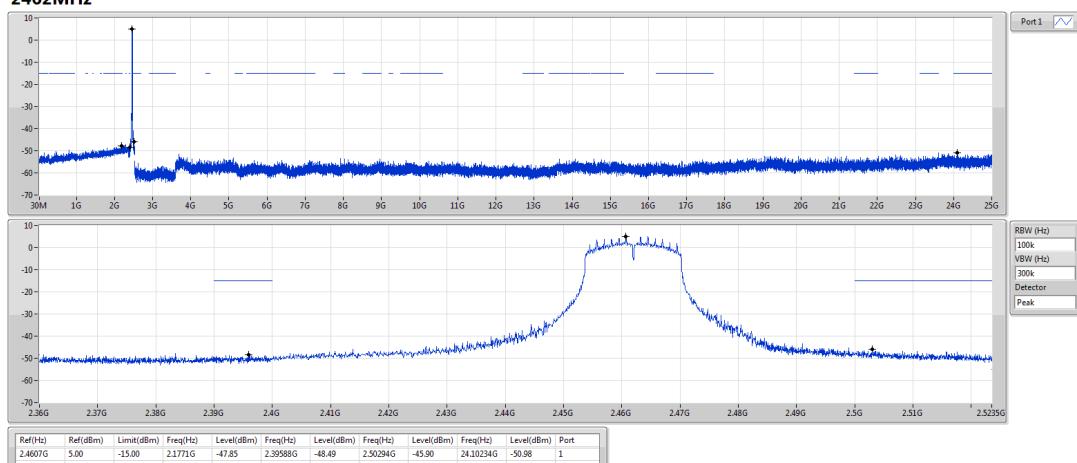

**802.11n HT20\_Nss1,(MCS0)\_1TX**

**CSE NdB**


**2412MHz**

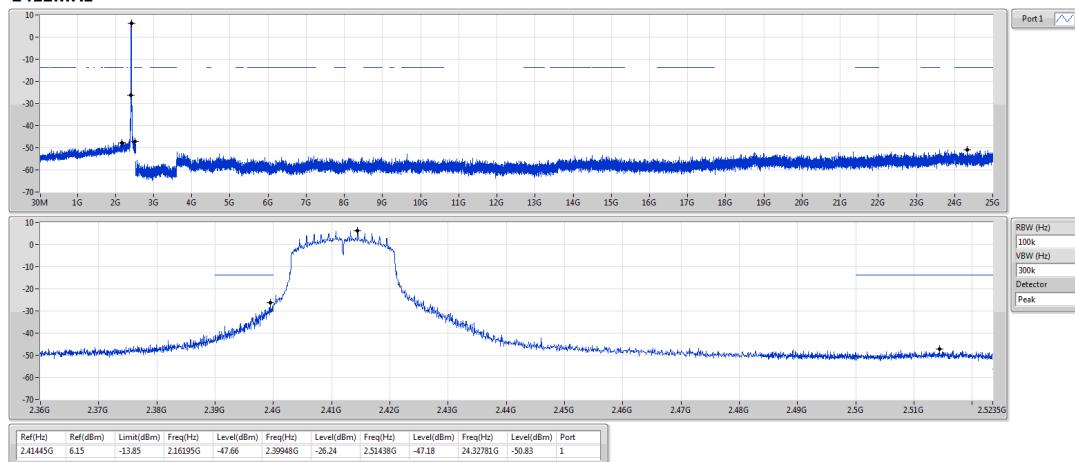

**802.11n HT20\_Nss1,(MCS0)\_1TX**

**CSE NdB**


**2437MHz**

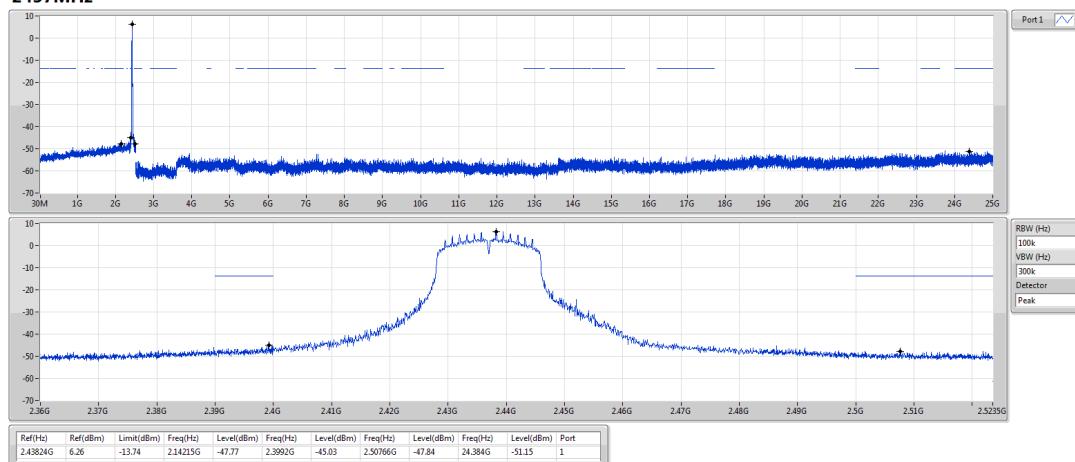

**802.11n HT20\_Nss1,(MCS0)\_1TX**

**CSE NdB**

**2462MHz**

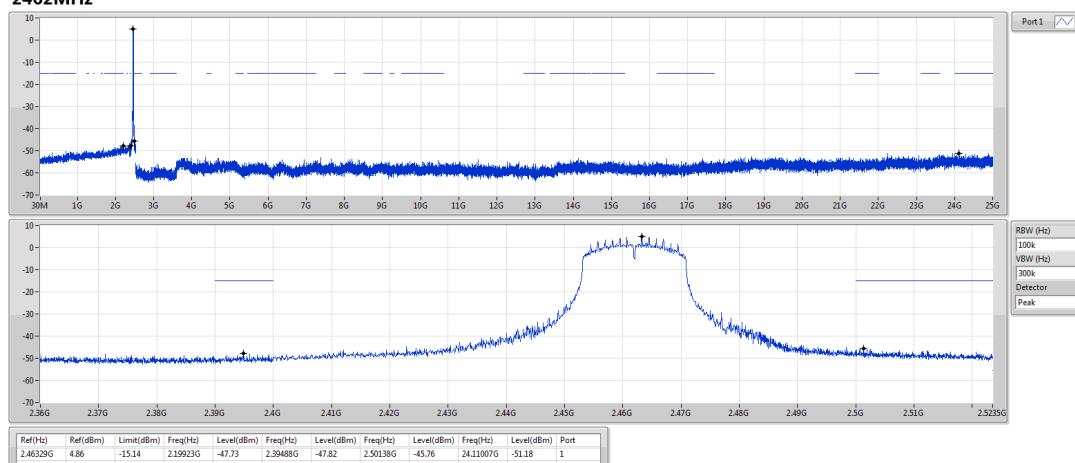

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: [ICC\\_Service@icertifi.com.tw](mailto:ICC_Service@icertifi.com.tw)

==END==