

FCC Test Report

FCC ID:XNBRS8426D3

For

Electromagnetic Interference

Of

Product: Digital Clock

Trade Name: N/A

Model Number: RS8426D3, RS8426D3G

Prepared for

Fuzhou Rise Electronic Co., Ltd.

Bldg 15, Zone C, Pushang Industial Area, No.6, Hongjiang RD, Fuzhou, Fujian, China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Room 203-204, 2F, Xinye Building, No.67 Shijing, Guanzhang
Road, Dongguan, China



TEST RESULT CERTIFICATION

Applicant's name:	Fuzhou R	Rise Electronic Co., Ltd.
		Zone C, Pushang Industial Area, No.6, Hongjiang RD, Fujian, China
Manufacturer's Name:		
Address:	Bldg 15, Fuzhou, F	Zone C, Pushang Industial Area, No.6, Hongjiang RD, Fujian, China
Product description		
Product name:	Digital Clo	ock
Model and/or type reference :	RS8426D	03, RS8426D3G
Standards:	FCC Part ANSI C63	15B 3.4:2003
	complian	sted by PTS, and the test results show that the ce with Part 15 of FCC Rules. And it is applicable only to
•	•	t in full, without the written approval of PTS, this ΓS, personal only, and shall be noted in the revision of
the document.		
Date of Test	:	
Date (s) of performance of tests .	:	20 May 2014 ~03 Jun. 2014
Date of Issue	:	03 Jun. 2014
Test Result	:	Pass
Testing Engine	er :	Jones Song Assistant
Technical Mana	ager :	Supervisor
Authorized Sig	natory:	Jacky Ou / Manager



lable of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 DESCRIPTION OF TEST SETUP	8
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.5 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS 3.1.5 TEST RESULTS	12 13
	_
3.2 RADIATED EMISSION MEASUREMENT 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14 14
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 3.2.2 TEST PROCEDURE	14
3.2.3 TEST SETUP	15
3.2.4 EUT OPERATING CONDITIONS	15
3.2.5 TEST RESULTS	16
3.2.6 TEST RESULTS(Above 1GHz)	18
4 . EUT TEST PHOTO	19
ATTACHMENT PHOTOGRAPHS OF EUT	20



1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission							
Standard Test Item Limit Judgment Rema							
FCC Part15B ANSI C63.4: 2003	Conducted Emission	Class B	N/A				
	Radiated Emission	Class B	PASS				

NOTE:

^{(1) &#}x27;N/A' denotes test is not applicable in this Test Report





1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.: 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
PTSC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
PTSA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~6GHz	5.0	



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Digital Clock				
Model Name	RS8426D3				
Additional Model	D00400D00				
Number(s)	RS8426D3G				
Model Difference	All models are identical exc	cept model names.			
Product Description	The EUT is a Digital Clock. Operating frequency: 433.92MHz Connecting I/O port: N/A				
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.				
Power Rating	DC 3V				



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	RX

For Conducted Test				
Final Test Mode	Description			
1	1			

For Radiated Test			
Final Test Mode	Description		
Mode 1	RX		



2.3 DESCRIPTION OF TEST SETUP

Mode RE:

E-1 EUT Page 9 of 27 Report No.: PT1401061005E

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Digital Clock	N/A	RS8426D3	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>"Length_"</code> column.
- (3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".



Page 10 of 27 Report No.: PT1401061005E

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibra tion period
1	LISN	R&S	ENV216	101313	Jul. 06, 2013	Jul. 05, 2014	1 year
2	LISN	SCHWARZBE CK	NNLK 8129	8129245	Dec. 25, 2013	Dec. 24, 2014	1 year
3	Pulse Limiter	SCHWARZBE CK	VTSD 9561F	9716	Dec. 25, 2013	Dec. 24, 2014	1 year
4	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2013	Jul. 05, 2014	1 year
5	Test Cable	N/A	C01	N/A	Jul. 06, 2013	Jul. 05, 2014	1 year
6	Test Cable	N/A	C02	N/A	Jul. 06, 2013	Jul. 05, 2014	1 year
7	Test Cable	N/A	C03	N/A	Jul. 06, 2013	Jul. 05, 2014	1 year
8	EMI Test Receiver	R&S	ESCI	101160	Jul. 06, 2013	Jul. 05, 2014	1 year
9	Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2013	Jul. 05, 2014	1 year
10	Triple-Loop Antenna	EVERFINE	LIA-2	11020003	Jul. 06, 2013	Jul. 05, 2014	1 year
11	Absorbing Clamp	R&S	MDS-21	100423	Jul. 08, 2013	Jul. 07, 2014	1 year

2.5.2 RADIATED TEST SITE

<u> </u>	101011110	TEOT OTTE					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibra tion period
1	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06, 2013	Jul. 05, 2014	1 year
2	Test Cable	N/A	R-01	N/A	Dec. 25, 2013	Dec. 24, 2014	1 year
3	Test Cable	N/A	R-02	N/A	Dec. 25, 2013	Dec. 24, 2014	1 year
4	EMI Test Receiver	R&S	ESCI-7	101318	Jul. 06, 2013	Jul. 05, 2014	1 year
5	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
6	Turn Table	EM	SC100	060531	N/A	N/A	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2013	Jul. 05, 2014	1 year
8	Spectrum Analyzer	Aglient	E4407B	MY45108040	Jul. 06, 2013	Jul. 05. 2014	1 year
9	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06, 2013	Jul. 05. 2014	1 year
10	Amplifier	EM	EM-30180	060538	Jul. 06, 2013	Jul. 05. 2014	1 year



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A	(dBuV)	Class B (dBuV)		
TILQUENCT (MITZ)	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	
0.50 -5.0	73.00	60.00	56.00	46.00	
5.0 -30.0	73.00	60.00	60.00	50.00	

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

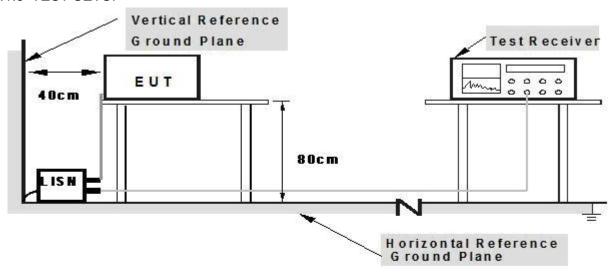

Note: 1.Support units were connected to second LISM.

2.Both of LISMs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



3.1.5 TEST RESULTS

EUT:	Digital Clock	Model Name. :	RS8426D3
Temperature :	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Test Date :	N/A
Test Mode:	N/A	Phase :	N/A
Test Voltage :	N/A		

Note:Due to the EUT is powered by batteries, this test item is not applicable



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
PREQUENCT (WITZ)	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following: FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE


- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




Page 15 of 27 Report No.: PT1401061005E

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

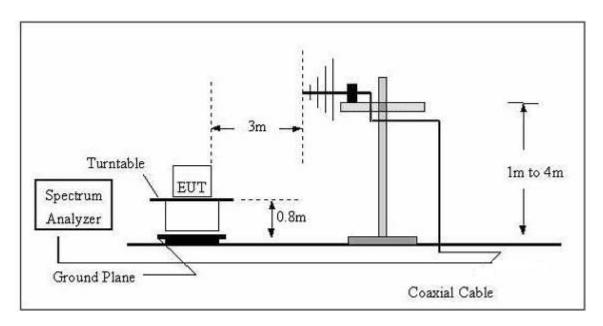

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

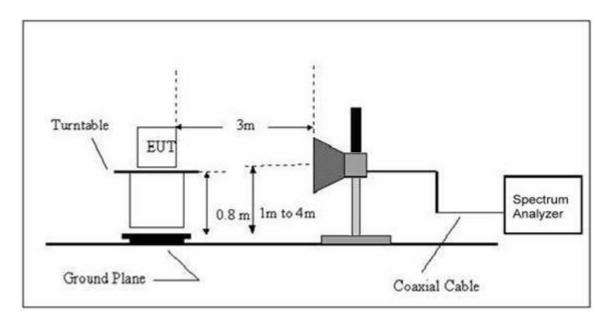

3.2.4 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.5 TEST RESULTS

EUT:	Digital Clock	Model Name :	RS8426D3
Temperature :	24 ℃	Relative Humidity:	54%
Pressure :	1010 hPa	Test Date :	2014-05-27
Test Mode :	RX	Polarization :	Horizontal
Test Power :	DC 3V		


Freq	Reading	C.F	Result	Limit	Over Limit	Remark	Polarity
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Remaik	Folanty
30.00	10.36	19.00	29.36	40.00	-10.64	QP	HORIZONTAL
37.76	16.35	14.93	31.28	40.00	-8.72	QP	HORIZONTAL
50.37	21.31	8.59	29.90	40.00	-10.10	QP	HORIZONTAL
114.39	17.45	12.39	29.84	43.50	-13.66	QP	HORIZONTAL
159.98	16.91	10.73	27.64	43.50	-15.86	QP	HORIZONTAL
826.37	14.42	21.92	36.34	46.00	-9.66	QP	HORIZONTAL

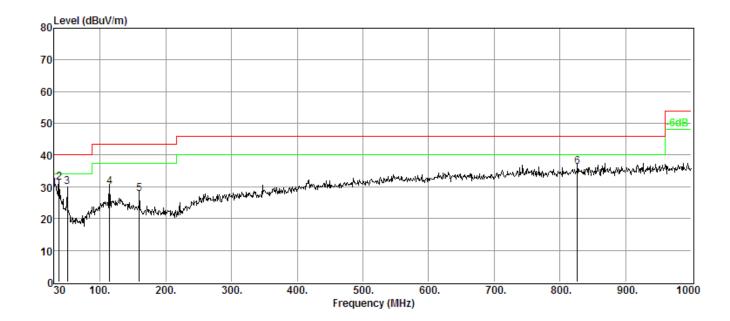



EUT:	Digital Clock	Model Name :	RS8426D3
Temperature :	24 °C	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2014-05-27
Test Mode :	RX	Polarization :	Vertical
Test Power :	DC 3V		

Freq	Reading	C.F	Result	Limit	Over Limit	Remark	Polarity
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Remark	Polatity
30.00	11.56	19.00	30.56	40.00	-9.44	QP	VERTICAL
46.49	19.89	10.18	30.07	40.00	-9.93	QP	VERTICAL
103.72	14.22	11.78	26.00	43.50	-17.50	QP	VERTICAL
450.98	12.79	17.94	30.73	46.00	-15.27	QP	VERTICAL
543.13	12.87	20.09	32.96	46.00	-13.04	QP	VERTICAL
949.56	14.01	22.55	36.56	46.00	-9.44	QP	VERTICAL

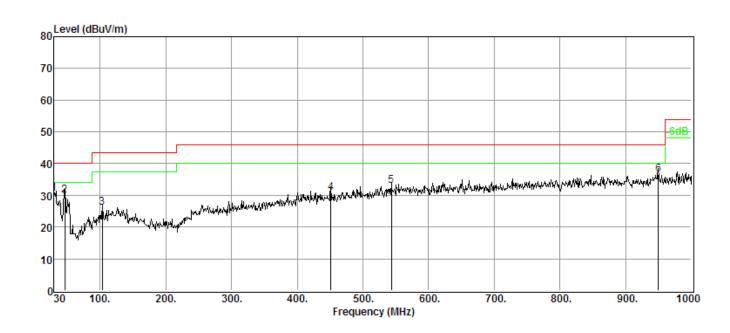



3.2.6 TEST RESULTS(Above 1GHz)

EUT:	Digital Clock	Model Name :	RS8426D3
Temperature :	24 ℃	Relative Humidity:	54%
Pressure:	1010 hPa	Test Date :	2014-05-27
Test Mode :	RX	Polarization :	H/V
Test Power :	DC 3V		

Polar	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Туре
V	1124.24	51.35	9.24	60.59	74	-13.41	PK
V	1124.24	40.87	9.24	50.11	54	-3.89	AVG
V	1478.67	48.67	11.74	60.41	74	-13.59	PK
V	1478.67	37.61	11.74	49.35	54	-4.65	AVG
V	3978.24	34.25	16.35	50.6	74	-23.4	PK
V	3978.24	28.27	16.35	44.62	54	-9.38	AVG
V					74		PK
V					54		AVG
Н	1245.57	49.57	10.24	59.81	74	-14.19	PK
Н	1245.57	30.57	10.24	40.81	54	-13.19	AVG
Н	2754.24	42.18	12.33	54.51	74	-19.49	PK
Н	2754.24	31.27	12.33	43.6	54	-10.4	AVG
Н	3687.25	33.51	14.67	48.18	74	-25.82	PK
Н	3687.25	28.37	14.67	43.04	54	-10.96	AVG
Н					74		PK
Н			•••		54		AVG

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit





4. EUT TEST PHOTO



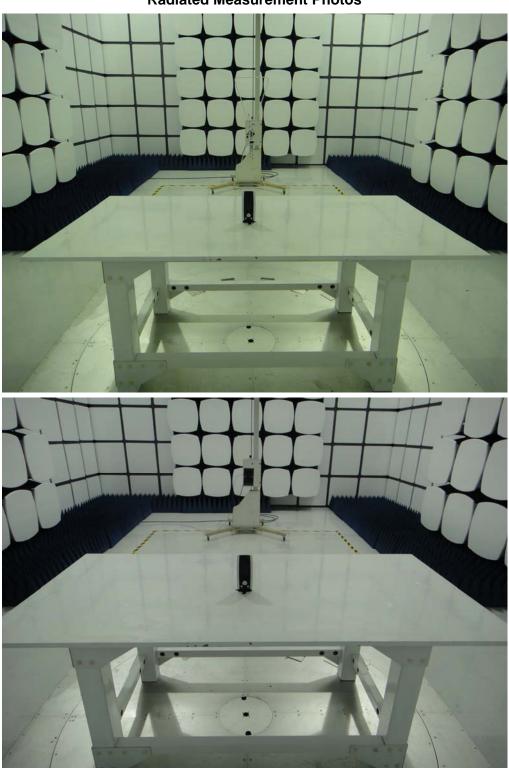



ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2







Photo 3



Photo 4











Photo 6



Photo 7





Photo 8

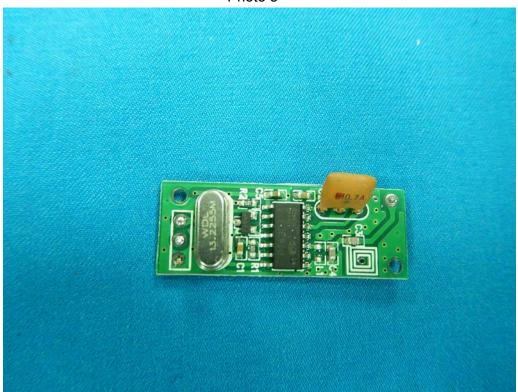


Photo 9





Photo 10



Photo 11





Photo 12



Photo 13





Photo 14



Photo 15

