

FCC Radio TEST Report FCC ID: XNT-GL-800RF

This report concerns (check one): Original Grant Class II Change

Issued Date : Aug. 06, 2009
Project No. : 0907C072

Equipment : wireless Mouse

Model Name : GL-800RF;GL-801RF;GL-809RF;GL-810RF
Applicant : DongGuan Goldland Electronics Co.,LTD.

Address : Qiaoxin Industrial Park, Qiaotou, Dongguan

Guangdong, China.

Tested by:

Neutron Engineering Inc. EMC Laboratory

Date of Test:

Jul. 23, 2009 ~ Aug. 04, 2009

Testing Engineer

(Jeff Yang)

Technical Manager

(Vic Chiu)

Authorized Signatory

(Steven Lu)

NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Rd., Shijr City, Taipei, Taiwan TEL: (02) 2646-5426 FAX: (02) 2646-6815









Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: NEI-FCCP-1-0907C072 Page 2 of 63

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED) 12
3.4 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS 4.1.2 MEASUREMENT INSTRUMENTS LIST	14 14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP 4.1.6 EUT OPERATING CONDITIONS	15 15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 Radiated Emission Limits 4.2.2 MEASUREMENT INSTRUMENTS LIST	17 18
4.2.3 TEST PROCEDURE	19
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP 4.2.6 EUT OPERATING CONDITIONS	20 20
4.2.7 TEST RESULTS (BETWEEN 30 – 1000 MHz)	21
4.2.8 TEST RESULTS (ABOVE 1000 MHz)	23
4.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)	35
5 . NUMBER OF HOPPING CHANNEL	39
5.1 APPLIED PROCEDURES / LIMIT 5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	39 39
5.1.2 TEST PROCEDURE	39
5.1.3 DEVIATION FROM STANDARD	39
5.1.4 TEST SETUP 5.1.5 EUT OPERATION CONDITIONS	39 39
5.1.6 TEST RESULTS	40

Report No.: NEI-FCCP-1-0907C072 Page 3 of 63

Table of Contents	Page
6 . AVERAGE TIME OF OCCUPANCY	41
6.1 APPLIED PROCEDURES / LIMIT	41
6.1.1 MEASUREMENT INSTRUMENTS LIST	41
6.1.2. TEST PROCEDURES	41
6.1.3. TEST SETUP LAYOUT	41
6.1.4. TEST DEVIATION	41
6.1.5. EUT OPERATION DURING TEST6.1.6. RESULTS OF OCCUPIED BANDWIDTH AND SPREAD-SPECTRUM	41
BANDWIDTH	42
7 . Hopping Channel Separation Measurement	46
7.1 APPLIED PROCEDURES / LIMIT	46
7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	46
7.1.2 TEST PROCEDURE	46
7.1.3 DEVIATION FROM STANDARD 7.1.4 TEST SETUP	46 46
7.1.4 TEST SETUP 7.1.5 EUT OPERATION CONDITIONS	46 46
7.1.6 TEST RESULTS	47
8 . BANDWIDTH TEST	49
8.1 APPLIED PROCEDURES / LIMIT	49
8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	49
8.1.2 TEST PROCEDURE	49
8.1.3 DEVIATION FROM STANDARD	49
8.1.4 TEST SETUP	49
8.1.5 EUT OPERATION CONDITIONS 8.1.6 TEST RESULTS	49 50
9 . PEAK OUTPUT POWER TEST	52
9.1 APPLIED PROCEDURES / LIMIT	52
9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING 9.1.2 TEST PROCEDURE	52 52
9.1.2 TEST PROCEDURE 9.1.3 DEVIATION FROM STANDARD	52 52
9.1.4 TEST SETUP	52 52
9.1.5 EUT OPERATION CONDITIONS	52
9.1.6 TEST RESULTS	53
10 . ANTENNA CONDUCTED SPURIOUS EMISSION	55
10.1 APPLIED PROCEDURES / LIMIT	55
10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	55
10.1.2 TEST PROCEDURE	55
10.1.3 DEVIATION FROM STANDARD	55
10.1.4 TEST SETUP	56

Report No.: NEI-FCCP-1-0907C072 Page 4 of 63



Table of Contents	Page
10.1.5 EUT OPERATION CONDITIONS 10.1.6 TEST RESULTS	56 57
11 . RF EXPOSURE TEST	59
11.1 APPLIED PROCEDURES / LIMIT 11.1.1 MEASUREMENT INSTRUMENTS LIST 11.1.2 MPE CALCULATION METHOD 11.1.3 DEVIATION FROM STANDARD 11.1.4 TEST SETUP 11.1.5 EUT OPERATION CONDITIONS 11.1.6 TEST RESULTS	59 59 60 61 61 61 62
12 . EUT TEST PHOTO	63

Report No.: NEI-FCCP-1-0907C072 Page 5 of 63

1. CERTIFICATION

Equipment: wireless Mouse

Brand Name: N/A

Model Name.: GL-800RF;GL-801RF;GL-809RF;GL-810RF A p p I i c a n t: DongGuan Goldland Electronics Co.,LTD.

Date of Test: Jul. 23, 2009 ~ Aug. 04, 2009 Test Item: ENGINEERING SAMPLE

Standards: FCC Part15, Subpart C(15.247) / ANSI C63.4: 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-0907C072) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: NEI-FCCP-1-0907C072 Page 6 of 63

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

	FCC Part15 (15.247) , Subpart C				
Standard Section	Test Item	Judgment	Remark		
15.207	Conducted Emission	-	Note(1)		
15.247 (c)	Antenna conducted Spurious Emission	PASS			
15.247 (a)(1)	Hopping Channel Separation	PASS			
15.247 (b)(1)	Peak Output Power	PASS			
15.247 (c)	Radiated Spurious Emission	PASS			
15.247 (b)(1)	Number of Hopping Frequency	PASS			
15.247 (a)(1)	Dwell Time	PASS			
15.205	Restricted Bands	PASS			
15.203	Antenna Requirement	PASS			
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS			

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Report No.: NEI-FCCP-1-0907C072 Page 7 of 63

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **C01/OS02** at the location of No.132-1, Lane 329, Sec. 2, Palain Road, Shijr City, Taipei, Taiwan. Neutron's test firm number is 95335

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately 95 % \circ

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)	NOTE
C01	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)	NOTE
OS-01	ANSI	30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	Н	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	Н	3.94	
OS-02	ANSI	30MHz ~ 200MHz	V	2.48	
		30MHz ~ 200MHz	Н	2.16	
		200MHz ~ 1,000MHz	V	2.50	
		200MHz ~ 1,000MHz	Н	2.66	

Report No.: NEI-FCCP-1-0907C072 Page 8 of 63



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	wireless Mouse			
Brand Name	N/A			
Model Name.	GL-800RF;GL-801RF;C	GL-800RF;GL-801RF;GL-809RF;GL-810RF		
OEM Brand/Model Name	N/A			
Model Difference	9	ed based on similar electrical circuit		
	but different aspect of e	enclosure.		
	The EUT is a wireless N			
	Product Type	Low Power Communication Device		
	Operation Frequency:	2403~2479 MHz		
	Modulation Type:	GFSK		
	Number Of Channel	77CH		
Product Description	Antenna Designation:	Printed antenna		
	Antenna Gain(Peak)	2.34 dBi		
	Output Power:	-1.98dBm		
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.			
Channel List	Please refer to the Note 2.			
Power Source	DC Voltage supplied from 2*AA size Battery			
Power Rating	DC 3.0V			
Connecting I/O Port(s)	Please refer to the User's Manual			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Report No.: NEI-FCCP-1-0907C072 Page 9 of 63



	٦
	/
•	

	Channel List				
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453		
25	2427	52	2454		
26	2428	53	2455		
27	2429	54	2456		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed Antenna	N/A	2.34

Report No.: NEI-FCCP-1-0907C072 Page 10 of 63

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH Lower - 2403MHz
Mode 2	CH Middle - 2441MHz
Mode 3	CH Highest -2479MHz


For Conducted Test		
Final Test Mode	Description	
-	" N/A" denotes test is not applicable in this Test Report	

For Radiated Test				
Final Test Mode	Description			
Mode 1	CH Lower - 2403MHz			
Mode 2	CH Middle - 2441MHz			
Mode 3	CH Highest -2479MHz			

NOTE

(1) The EUT use new battery.

Report No.: NEI-FCCP-1-0907C072 Page 11 of 63

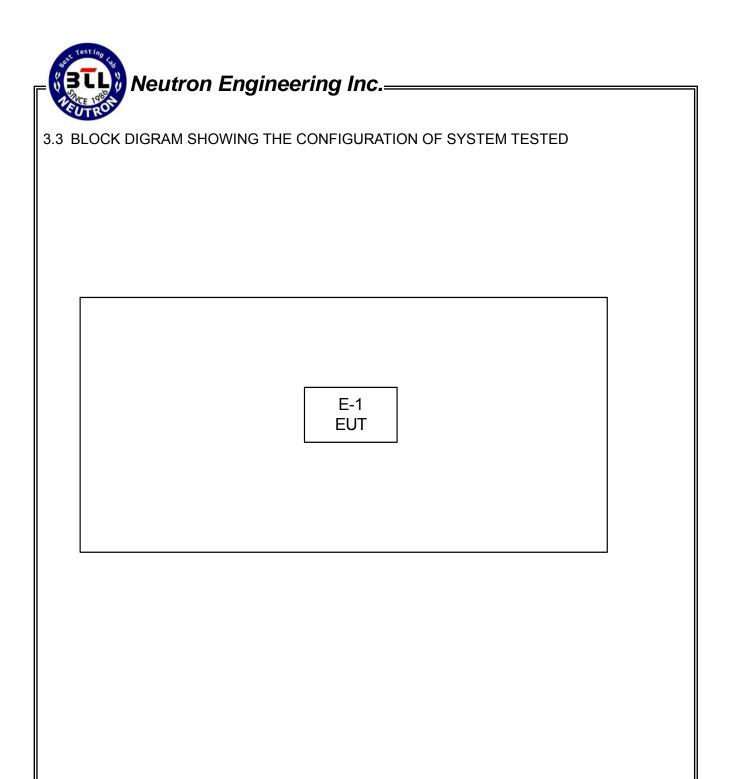

Report No.: NEI-FCCP-1-0907C072 Page 12 of 63

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	wireless Mouse	N/A	GL-800RF	XNT-GL-800RF	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.

Report No.: NEI-FCCP-1-0907C072 Page 13 of 63

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
TREQUENCT (MHZ)	Quasi-peak	Average	Quasi-peak	Average	Stanuaru
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00042991	Jan. 23, 2010
2	LISN	EMCO	3816/2	00042990	Jan. 23, 2010
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Nov. 26, 2009
4	50Ω Terminator	N/A	N/A	N/A	May.11, 2010
5	Test Cable	N/A	C01	N/A	Nov. 26, 2009
6	EMI Test Receiver	R&S	ESCI	100082	Mar. 06, 2010

Remark: "N/A" denotes No Model Name., Serial No. or No Calibration specified.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

Report No.: NEI-FCCP-1-0907C072 Page 14 of 63


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

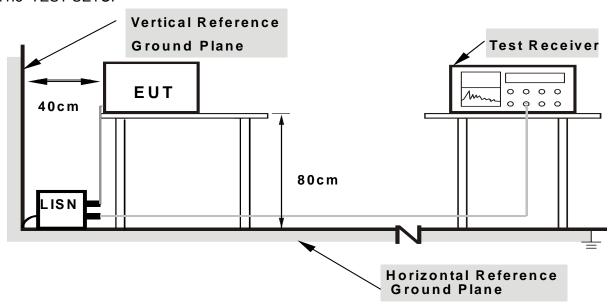

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

Report No.: NEI-FCCP-1-0907C072 Page 15 of 63

4.1.7 TEST RESULTS

EUT:	wireless Mouse	Model Name. :	GL-800RF	
Temperature:	29 ℃	Relative Humidity:	50 %	
Pressure:	1010 hPa	Test Power :	DC 3.0V	
Test Mode :	" N/A" denotes test is not applicable in this Test Report			

Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform on In this case, a " * " marked in AVG Mode column of Interference Voltage Measured on the North AVG Mode column of Interference Voltage Measured on
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) " N/A" denotes test is not applicable in this Test Report

Report No.: NEI-FCCP-1-0907C072 Page 16 of 63

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 Radiated Emission Limits (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBu	ıV/m) (at 3M)	Class B (dBuV/m) (at 3M)		
FREQUENCT (MITZ)	PEAK	AVERAGE	PEAK	AVERAGE	
Above 1000	80	60	74	54	

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Report No.: NEI-FCCP-1-0907C072 Page 17 of 63



4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9160	3058	Nov. 26, 2009
2	Test Cable	N/A	10M_OS02	N/A	Nov. 26, 2009
3	Test Cable	N/A	OS02-1/-2/-3	N/A	Nov. 26, 2009
4	Pre-Amplifier	Anritsu	MH648A	M09961	Nov. 26, 2009
5	EMI Test Receiver	R&S	ESCI	100082	Jan. 29, 2010
6	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A
7	Turn Table	Chance Most	CMTB-1.5	N/A	N/A
8	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010
9	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-325	Oct. 23, 2009
10	Horn Antenna	Schwarzbeck	BBHA9170	9170187	Oct. 23, 2009
11	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Mar. 08, 2010
12	Microflex Cable	United Microwave	57793	1m	Mar. 08, 2010
13	Microflex Cable	United Microwave	A30A30-5006	10M	Jul. 05, 2010

Remark: "N/A" denotes No Model Name. / Serial No. and No Calibration specified.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10 Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Report No.: NEI-FCCP-1-0907C072 Page 18 of 63



4.2.3 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.2.4	DEVIATION FROM TEST STANDARD
No de	viation

Report No.: NEI-FCCP-1-0907C072 Page 19 of 63




4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

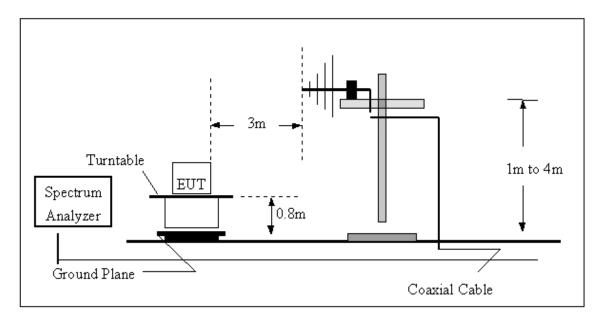

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

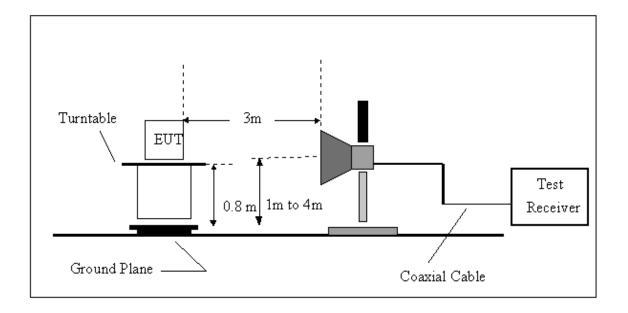

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0907C072 Page 20 of 63


4.2.7 TEST RESULTS (BETWEEN 30 – 1000 MHz)

EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	26 ℃	Relative Humidity:	69 %
Pressure:	1010hPa	Test Power :	DC 3.0V
Test Mode :	TX 2479MHz		

Freq.	Ant.	Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Note
48.65	V	47.75	-17.46	30.29	40.00	- 9.71	
65.65	V	51.21	-19.79	31.42	40.00	- 8.58	
98.12	V	51.43	-17.48	33.95	43.50	- 9.55	
143.76	V	51.98	-17.58	34.40	43.50	- 9.10	
228.97	V	47.87	-13.59	34.28	46.00	- 11.72	
342.65	V	41.98	-9.36	32.62	46.00	- 13.38	

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

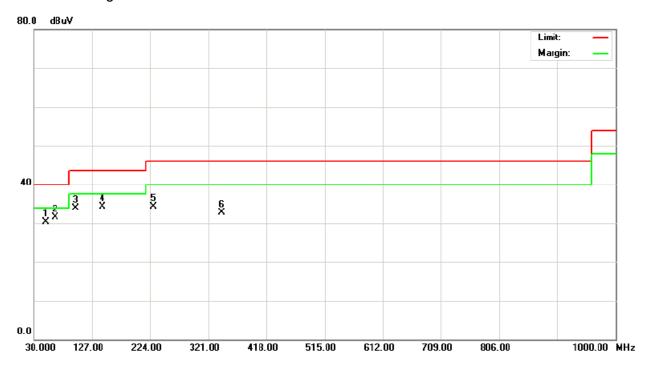


Report No.: NEI-FCCP-1-0907C072 Page 21 of 63

EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	26 ℃	Relative Humidity:	69 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX 2479MHz		

Freq.	Ant.	• • •	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	11010
56.71	Н	49.98	-19.18	30.80	40.00	- 9.20	
98.94	Н	51.12	-17.41	33.71	43.50	- 9.79	
142.77	Ι	52.23	-17.69	34.54	43.50	- 8.96	
266.53	Н	48.76	-12.14	36.62	46.00	- 9.38	
333.65	Н	47.21	-9.54	37.67	46.00	- 8.33	
391.61	Н	42.21	-8.32	33.89	46.00	- 12.11	

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ∘
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency \circ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

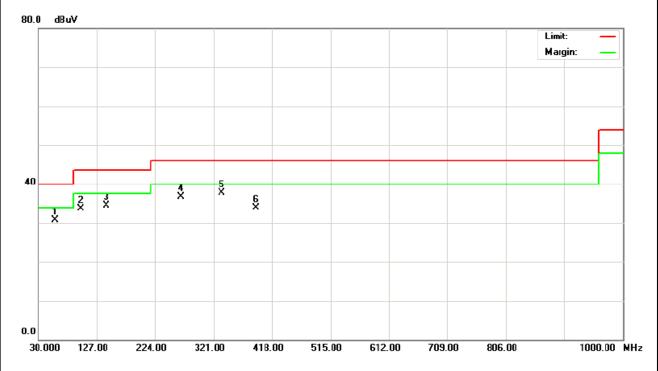

Report No.: NEI-FCCP-1-0907C072 Page 22 of 63

4.2.8 TEST RESULTS (ABOVE 1000 MHz)


EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	24 ℃	Relative Humidity:	52 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX 2403MHz		

Freq.	Ant.Pol.	Rea	ding	Ant./CF	Ad	et.	Lir	nit	
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	21.24	10.07	32.32	53.56	42.39	74.00	54.00	X/E
2403.04	٧	46.47	45.95	32.36	78.83	78.31			X/F
4805.65	V	52.91	47.76	4.45	57.36	52.21	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ∘
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-0907C072 Page 23 of 63

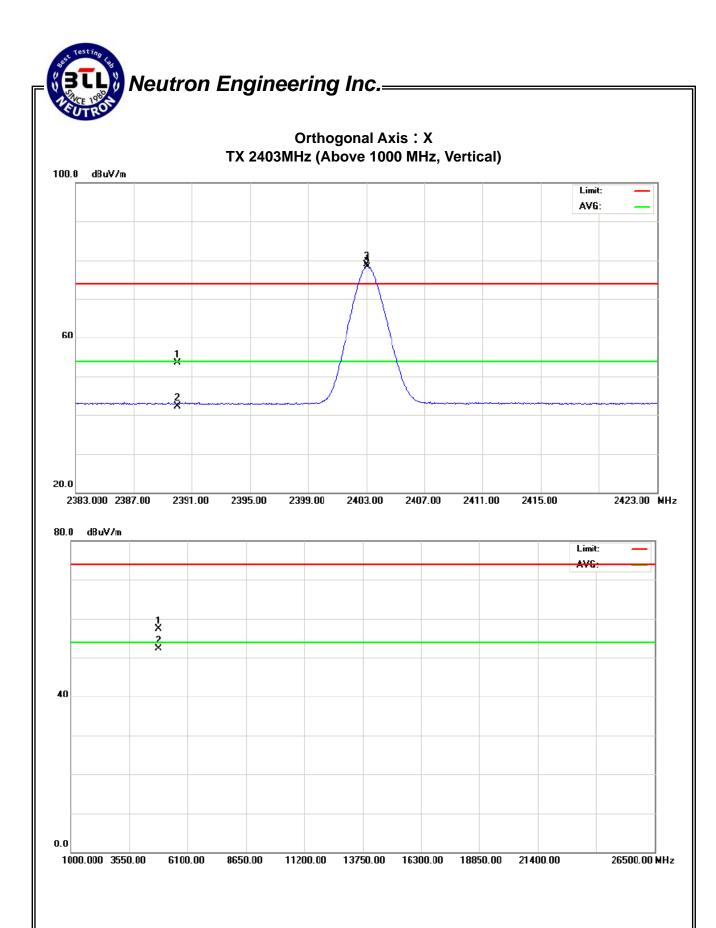


EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	24 ℃	Relative Humidity:	52 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX 2403MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	Н	19.74	10.12	32.32	52.06	42.44	74.00	54.00	X/E
2403.04	Н	52.32	52.01	32.36	84.68	84.37			X/F
4806.18	Н	52.78	47.58	4.45	57.24	52.03	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-0907C072 Page 25 of 63

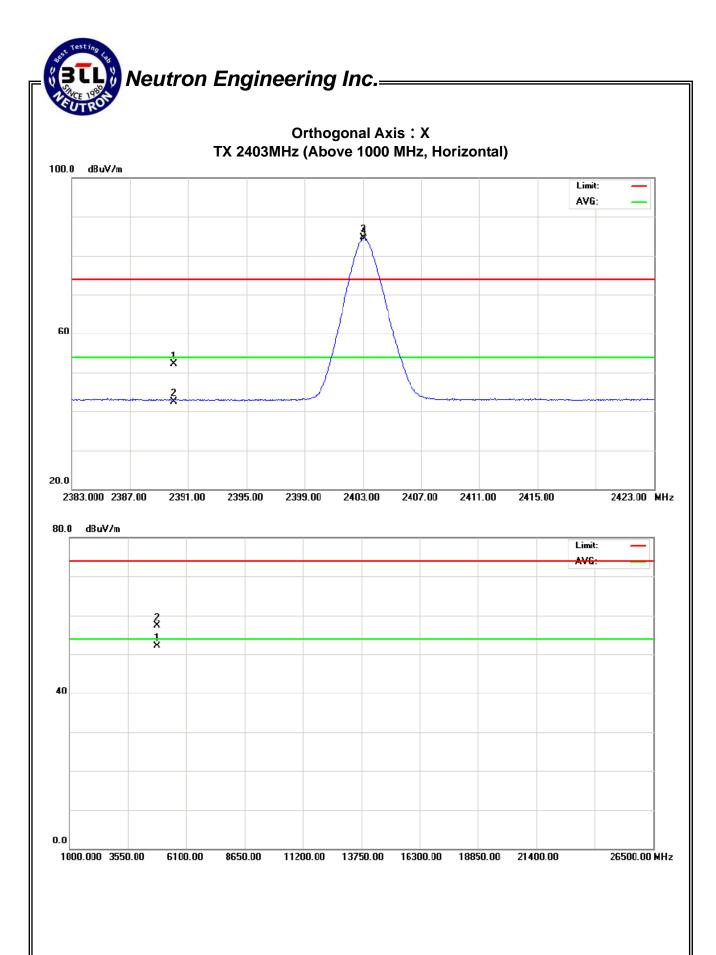

Page 26 of 63


EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	24 ℃	Relative Humidity:	52 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX 2441MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2441.04	٧	45.75	45.23	32.49	78.24	77.72			X/F
4882.64	V	52.76	46.65	4.70	57.46	51.35	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-0907C072 Page 27 of 63

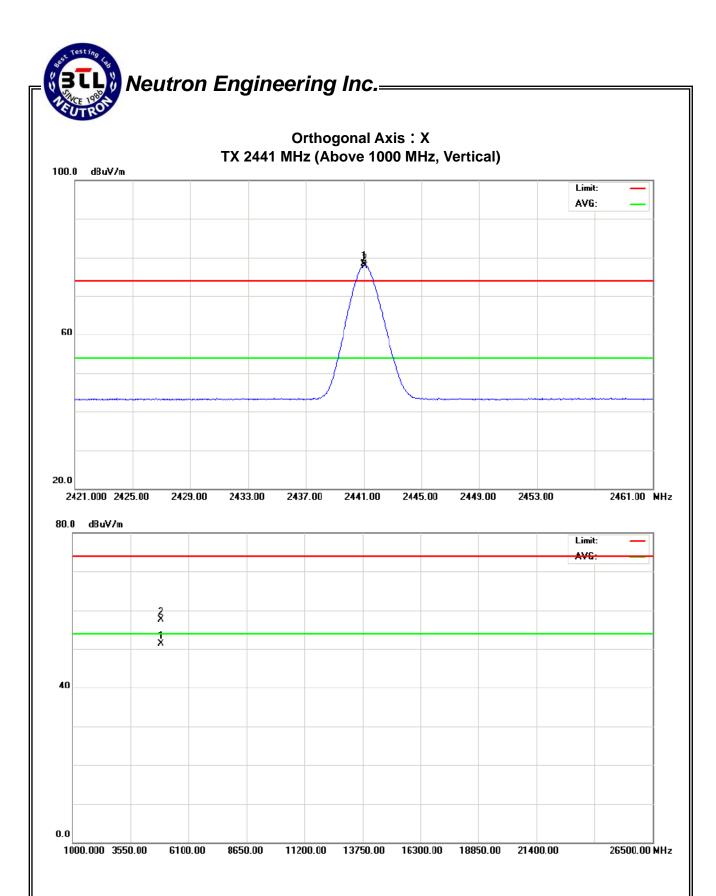


EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	24 ℃	Relative Humidity:	52 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX 2441MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2441.04	Н	51.41	51.07	32.49	83.90	83.56			X/F
4882.19	Н	52.81	47.60	4.70	57.51	52.30	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}_{\circ}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission •
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-0907C072 Page 29 of 63

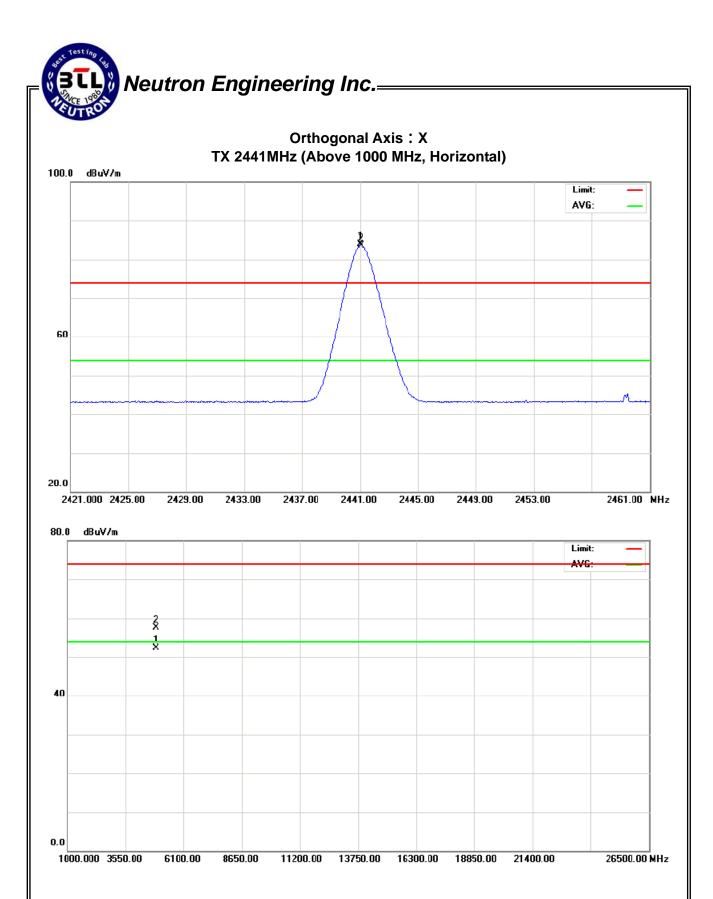

Page 30 of 63


EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	24 ℃	Relative Humidity:	52 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX 2479MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2479.08	V	46.08	45.56	32.61	78.69	78.17			X/F
2483.50	V	21.67	10.19	32.63	54.30	42.82	74.00	54.00	X/E
4958.20	V	53.82	48.76	4.95	58.77	53.71	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m J}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m O}$
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission o
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-0907C072 Page 31 of 63

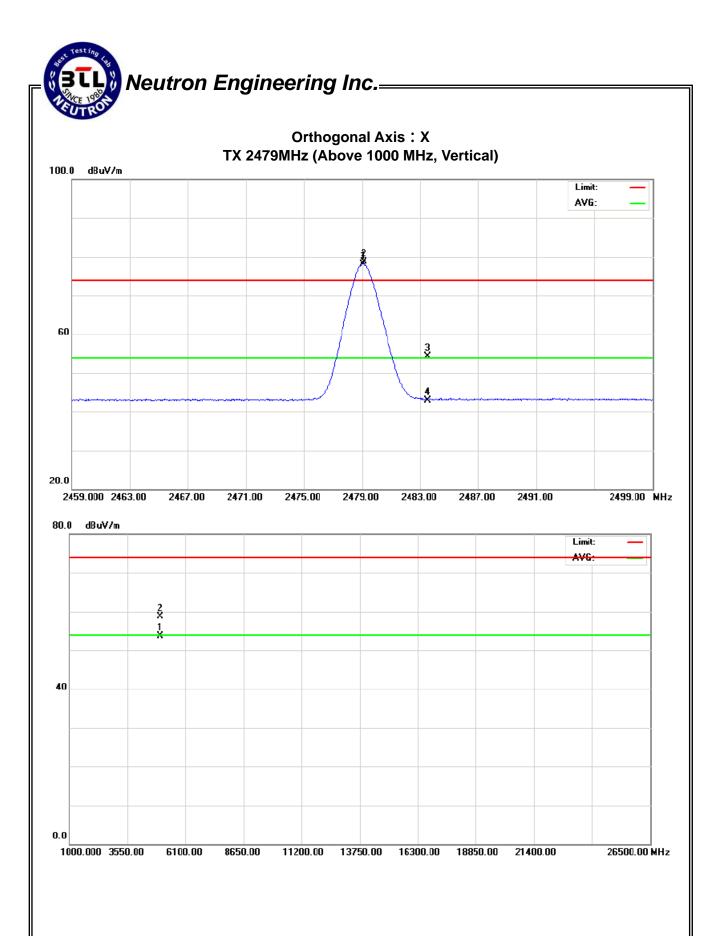


EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature:	24 ℃	Relative Humidity:	52 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX 2479MHz		


Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2479.00	Н	50.34	50.00	32.61	82.95	82.61			X/F
2483.50	Н	19.44	10.30	32.63	52.07	42.93	74.00	54.00	X/E
4957.48	Н	51.99	46.44	4.95	56.94	51.39	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (4) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna

Report No.: NEI-FCCP-1-0907C072 Page 33 of 63

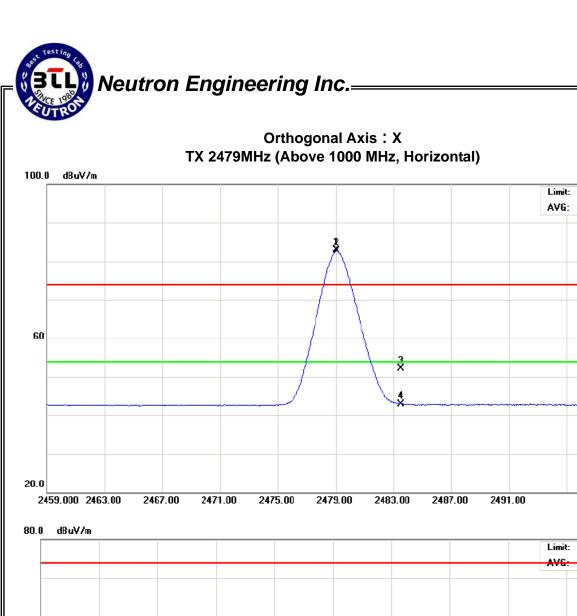

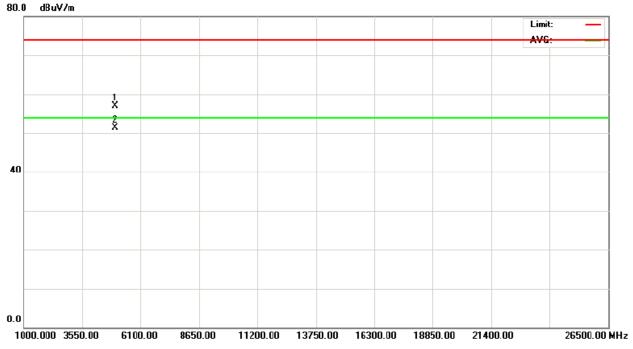

2499.00 MHz

4.2.9 TEST RESULTS (RESTRICTED BANDS REQUIREMENTS)

EUT:	wireless Mouse	Model Name. :	GL-800RF					
Temperature:	25℃	Relative Humidity:	52 %					
Pressure:	1010 hPa	Test Power :	DC 3.0V					
Test Mode :	TX CH 2403MHz/2479MHz(Vertical)							
Note:	 The emission of the carrier rad AV) as following: 1. The transmitter was then conto transmit at the lowest chameasured at 2310-2390 MH. 2. The transmitter was configurations to the highest change measured at 2483.5-2500 MH. 	nfigured with the wor nnel (CH01). Then th z. red with the worst ca nel (CH77). Then the	st case antenna and setup ne field strength was se antenna and setup to					


Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	V	21.24	10.07	32.32	53.56	42.39	74.00	54.00	CH01
2483.50	V	21.67	10.19	32.63	54.30	42.82	74.00	54.00	CH77

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (2) EUT Orthogonal Axis:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0907C072 Page 35 of 63

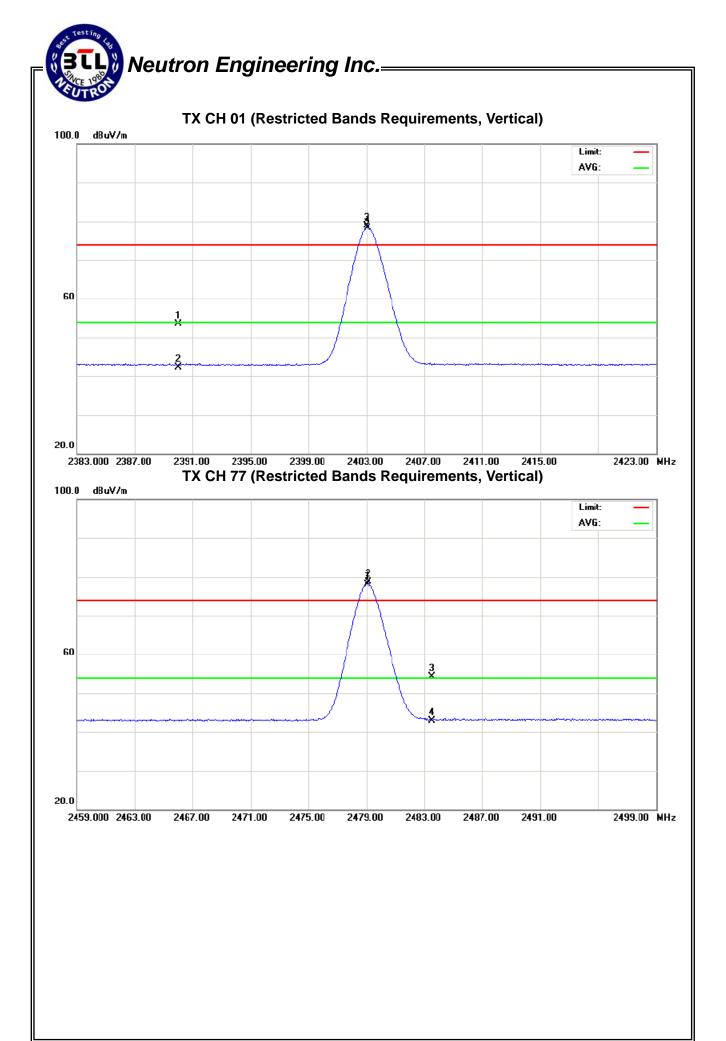

EUT:	wireless Mouse	Model Name. :	GL-800RF
Temperature :	25 ℃	Relative Humidity:	52 %
Pressure:	1010 hPa	Test Power :	DC 3.0V
Test Mode :	TX CH 2403MHz/2479MHz (Ho	orizontal)	
Note:	 The emission of the carrier radial AV) as following: 1. The transmitter was then conto transmit at the lowest charmeasured at 2310-2390 MHz 2. The transmitter was configured transmit at the highest charmeasured at 2483.5-2500 M 	nfigured with the wor nnel (CH01). Then th z. red with the worst can nel (CH77). Then the	st case antenna and setup ne field strength was se antenna and setup to


Freq.	Ant.Pol.	Reading		Ant./CF	Α	Act.		Limit	
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
2390.00	Н	19.74	10.12	32.32	52.06	42.44	74.00	54.00	CH01
2483.50	Н	19.44	10.30	32.63	52.07	42.93	74.00	54.00	CH77

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission $\,^{\circ}$
- (2) EUT Orthogonal Axis:

"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand

Report No.: NEI-FCCP-1-0907C072 Page 37 of 63

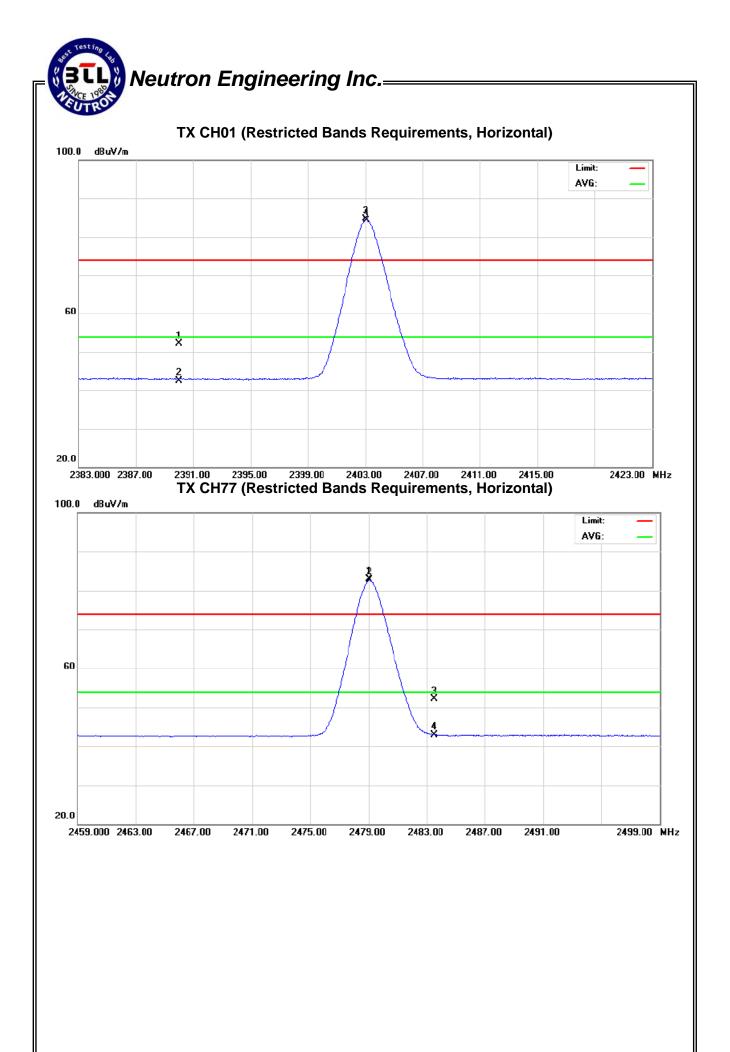

5. NUMBER OF HOPPING CHANNEL

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Frequency Range (MHz)	Result	
15.247 (a)(1)(ii)	Number of Hopping Channel	2400-2483.5	PASS	

5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Ite	em	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
	1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0907C072 Page 39 of 63



EUT:	wireless Mouse	Model Name :	GL-800RF
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage :	DC 3.0V
Test Mode :	Hopping Mode		

Number of Hopping Channel	77

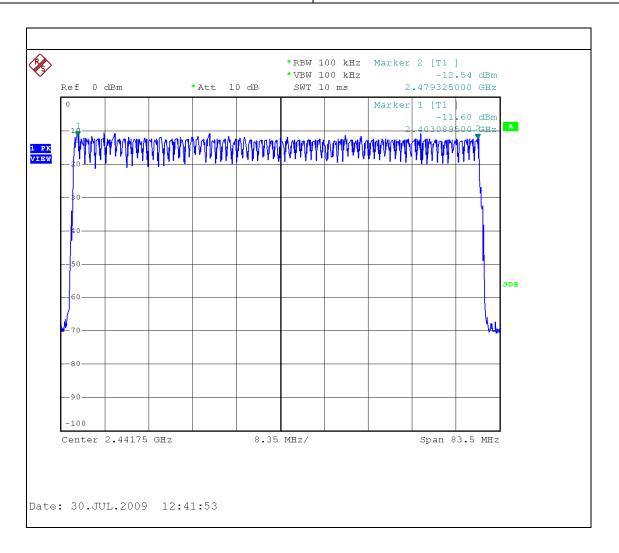

Report No.: NEI-FCCP-1-0907C072 Page 40 of 63

6. AVERAGE TIME OF OCCUPANCY

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section Test Item Limit Frequency Range (MHz)					
15.247 (a)(1)(ii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS	

6.1.1 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

6.1.2. TEST PROCEDURES

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- C. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f Measure the maximum time duration of one single pulse.
- g. Set the EUT for packet transmitting.
- h Measure the maximum time duration of one single pulse.
- j. Dwell time = [spreading rate/77] x duty-cycle x 0.4 seconds

6.1.3. TEST SETUP LAYOUT



6.1.4. TEST DEVIATION

There is no deviation with the original standard.

6.1.5. EUT OPERATION DURING TEST

The EUT was programmed to be in continuously transmitting/Hopping mode.

Report No.: NEI-FCCP-1-0907C072 Page 41 of 63

6.1.6. RESULTS OF OCCUPIED BANDWIDTH AND SPREAD-SPECTRUM BANDWIDTH


EUT:	wireless Mouse	Model Name :	GL-800RF
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1015 hPa	Test Voltage :	DC 3.0V
Test Mode :	Hopping Mode		


Mode	Mode Number of transmission in a 30.8 (77Hopping*0.4)		Result (msec)	Limit (msec)
2403 MHz	32 (times /1sec) *30.8=985.6 times	0.344	339.064	400
2441 MHz	32 (times /1sec) *30.8=985.6 times	0.352	346.931	400
2479 MHz	32 (times /1sec) *30.8=985.6 times	0.332	327.219	400

NOTE: For the test plots please refer to the below pages.


Report No.: NEI-FCCP-1-0907C072 Page 42 of 63


Neutron Engineering Inc.

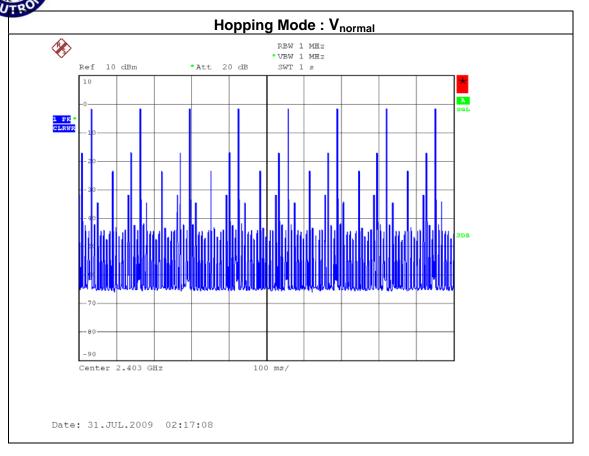


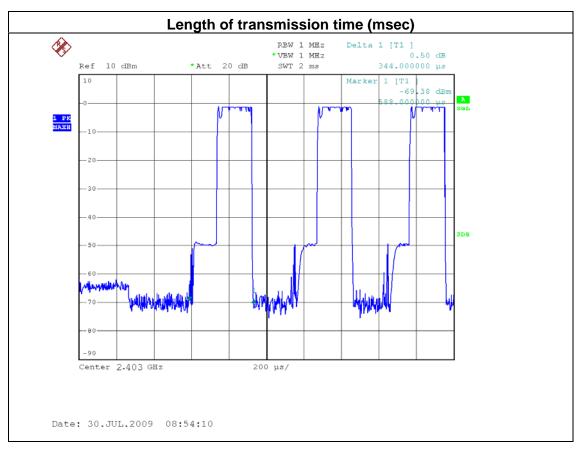


Neutron Engineering Inc.

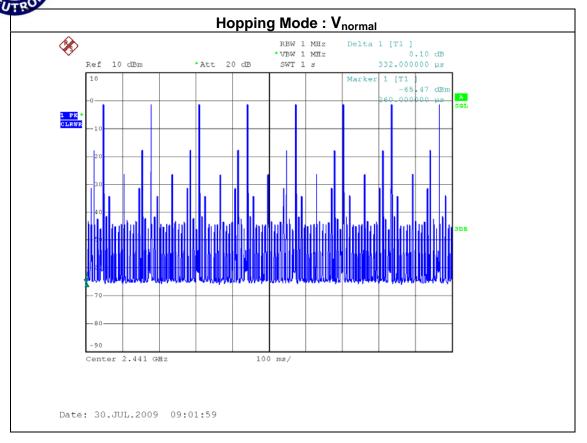

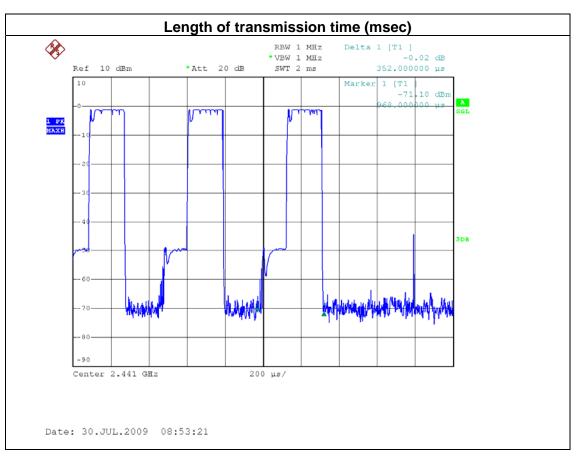

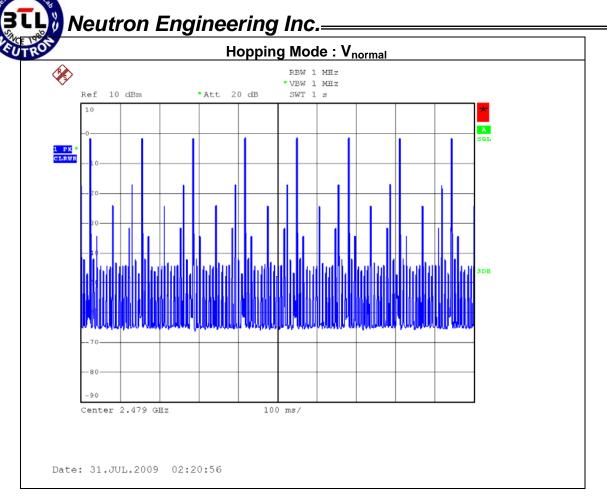

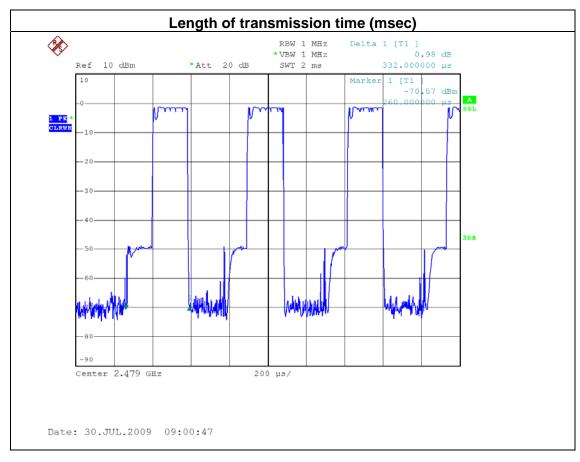

7. Hopping Channel Separation Measurement

7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


7.1.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- b. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- c. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP



7.1.5 EUT OPERATION CONDITIONS


The EUT was programmed to be in continuously transmitting mode.

Report No.: NEI-FCCP-1-0907C072 Page 46 of 63

EUT:	wireless Mouse	Model Name :	GL-800RF
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	CH01 / CH39 /CH77	·	

Frequency	Ch. Separation (MHz)	20d Bandwidth B (MHz)	99% Occupied Bandwidth (MHz)	Result
2403 MHz	1	1.23	1.10	Complies
2441 MHz	1	1.21	1.10	Complies
2479 MHz	1	1.23	1.12	Complies

Ch. Separation Limits: >20dB bandwidth or >2/3 of 20dB bandwidth

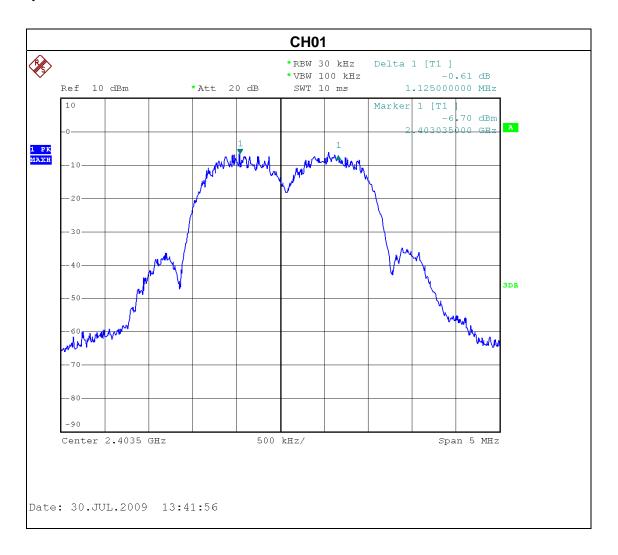

Report No.: NEI-FCCP-1-0907C072 Page 47 of 63

Neutron Engineering Inc. **CH39** *RBW 30 kHz *VBW 100 kHz SWT 10 ms -0.13 dB Ref 10 dBm *Att 20 dB 1.005000000 MHz Marker 1 [T1 42 dBm 1 PK MAXH 3DB Center 2.4415 GHz 500 kHz/ Span 5 MHz Date: 30.JUL.2009 13:45:41 **CH77** *RBW 30 kHz Delta 1 [T1] *VBW 100 kHz SWT 10 ms -0.25 dB 1.035000000 MHz Ref 10 dBm *Att 20 dB Marker 1 [T1 .91 dBm 1 PK VIEW 3DB Center 2.4795 GHz 500 kHz/ Span 5 MHz

Date: 30.JUL.2009 13:48:20

8. BANDWIDTH TEST

8.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result		
15.247	Bandwidth	<= 1 MHz	2400-2483.5	PASS		
(a)(2)	Banawiati	(20dB bandwidth)	2100 2100.0	17.00		

8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


8.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP




8.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0907C072 Page 49 of 63

EUT:	wireless Mouse	Model Name :	GL-800RF
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	CH01 / CH39 /CH77		

Frequency	20dB Bandwidth (MHz)	Channel Separation (MHz)	Result
2403 MHz	1.23	<= 1MHz	PASS
2441 MHz	1.21	<= 1MHz	PASS
2479 MHz	1.23	<= 1MHz	PASS

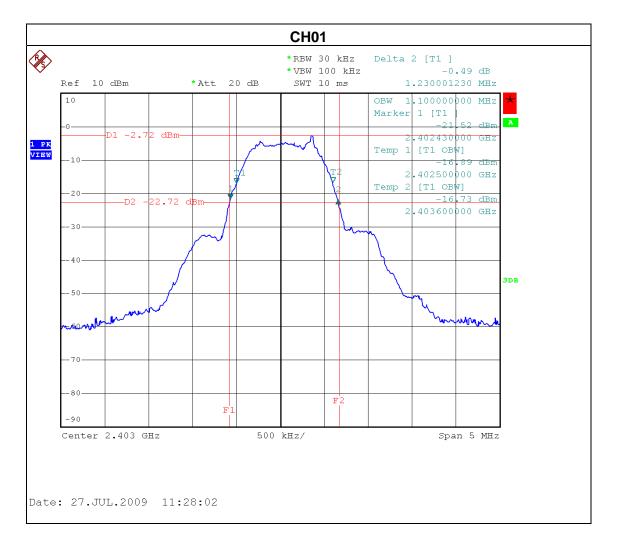

Report No.: NEI-FCCP-1-0907C072 Page 50 of 63

Neutron Engineering Inc. **CH39** *RBW 30 kHz *VBW 100 kHz -1.09 dB Ref 10 dBm *Att 20 dB SWT 10 ms 1.210000000 MHz OBW 1.100000000 MHz Marker 1 [T1] .440450000 GHz 1 PK VIEW 1 [T1 OBW] 2.440500000 GHz Temp 2 [T1 OBW] 2.441600000 GH: 3DB Span 5 MHz Center 2.441 GHz Date: 27.JUL.2009 11:29:43 **CH77** *RBW 30 kHz Delta 2 [T1] 0.54 dB 1.230000000 MHz *VBW 100 kHz SWT 10 ms Ref 10 dBm *Att 20 dB OBW 1.120000000 MHz Marker 1 [T1 .478440000 GHz 1 PK VIEW 1 [T1 OBW] 2.478490000 GHz [T1 OBW] 2.479610000 GH: 3DB Center 2.479 GHz Span 5 MHz Date: 27.JUL.2009 11:31:17

9. PEAK OUTPUT POWER TEST

9.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result		
15.247 (b)(1)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS		

9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

9.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz, VBW= 1MHz, Sweep time = Auto.

9.1.3 DEVIATION FROM STANDARD

No deviation.

9.1.4 TEST SETUP




9.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0907C072 Page 52 of 63


EUT:	wireless Mouse	Model Name :	GL-800RF
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	CH01/ CH39 /CH77		


Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)
CH01	2403	-1.98	30	1
CH39	2441	-2.62	30	1
CH77	2479	-3.40	30	1

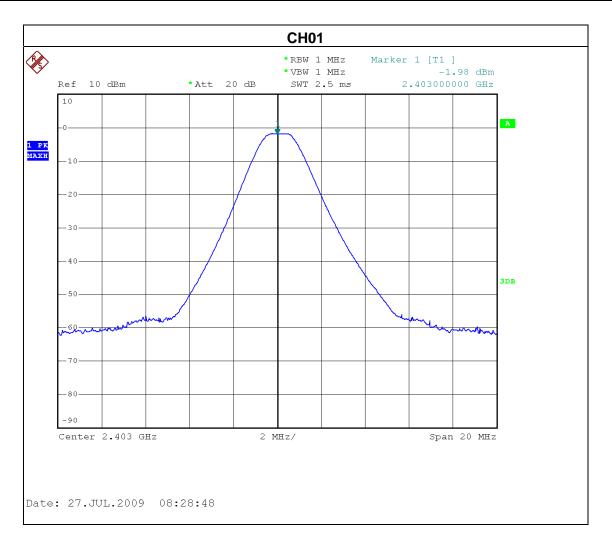

Report No.: NEI-FCCP-1-0907C072 Page 53 of 63

Neutron Engineering Inc.

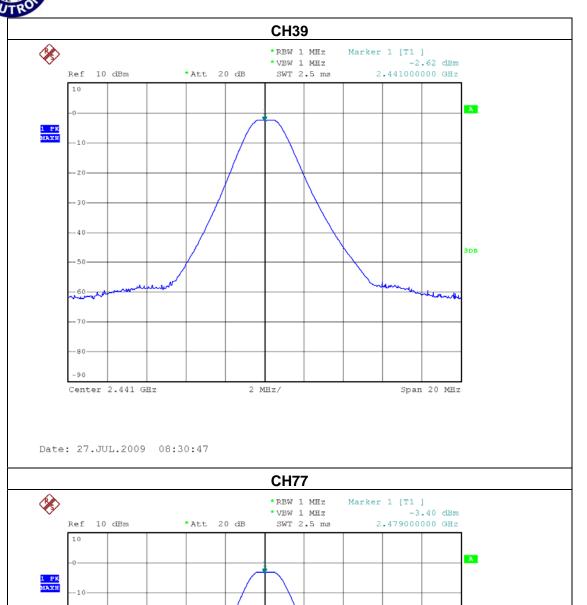

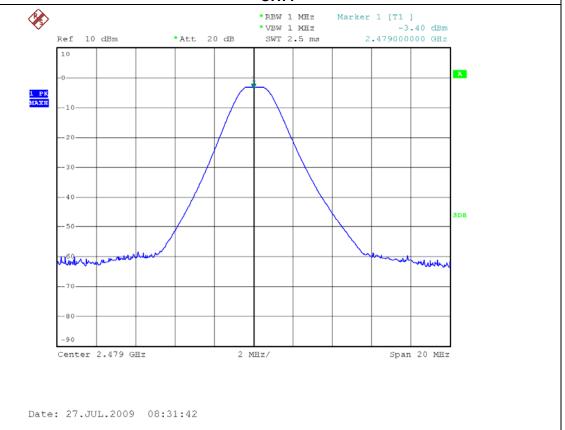

10. ANTENNA CONDUCTED SPURIOUS EMISSION

10.1 APPLIED PROCEDURES / LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Iter	n Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting		
Attenuation	Auto		
Span Frequency	100 MHz		
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average		
RB / VB (other emission)	100 KHz /100 KHz for Peak		


10.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

10.1.3 DEVIATION FROM STANDARD

No deviation.

Report No.: NEI-FCCP-1-0907C072 Page 55 of 63

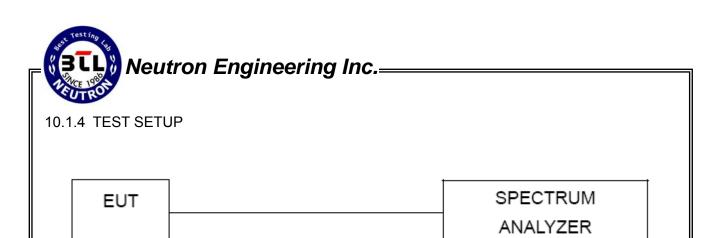

10.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0907C072 Page 56 of 63

EUT:	wireless Mouse	Model Name :	GL-800RF
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.0V
Test Mode :	CH01 / CH77		


The max. radio frequent bandwidth outside t		The max. radio frequence bandwidth within the	cy power in any 100 kHz ne frequency band.			
FREQUENCY(MHz) POWER(dBm)		FREQUENCY(MHz)	POWER(dBm)			
2339.62	-60.30	2487.62	-59.56			
	Dogult					


Result

In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.

Report No.: NEI-FCCP-1-0907C072 Page 57 of 63

Neutron Engineering Inc.

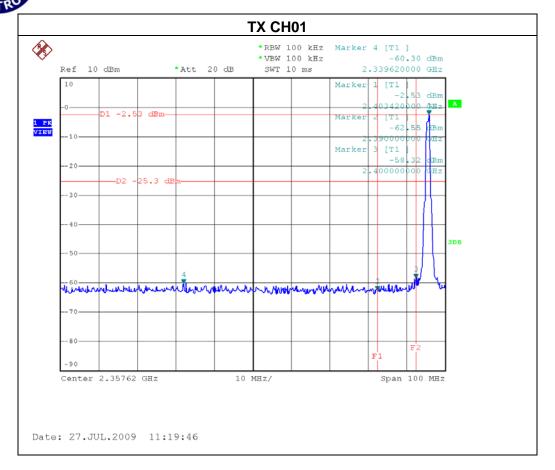

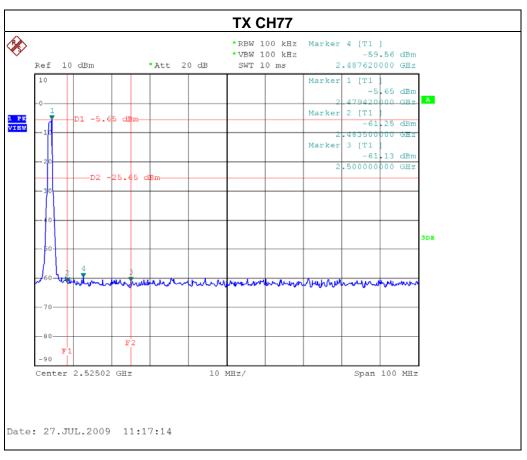

11. RF EXPOSURE TEST

11.1 APPLIED PROCEDURES / LIMIT

These devices are not exempted from compliance does not exceed the Commission's RF exposure guidelines. Unless a device operates at substantially low power levels, with a low gain antenna(s), supporting information is generally needed to establish the various potential operating configurations and exposure conditions of a transmitter and its antenna(s) in order to determine compliance with the RF exposure guidelines.

In order to demonstrate compliance with MPE requirement(see Section 2.1091),the following information is typically needed:

Calculation that estimates the minimum separation distance(20 cm or more)between an antenna and persons required to satisfy power density limits defined for free space.

Antenna installation and device operating instructions for installers(professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement Any caution statements and/or warming labels that are necessary in order to comply with the exposure limits Any other RF exposure related issues that may affect MPE compliance.

FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency(RF) radiation as specified in 1.1307(b).

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	61.4 0.163 1.0		6
300-1500			F/300	6
1500-100,000	_		5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm²)	Averaging Time E ², H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz; *Plane-wave equivalent power density

11.1.1 MEASUREMENT INSTRUMENTS LIST

Iter	n Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Jan. 06, 2010

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

Report No.: NEI-FCCP-1-0907C072 Page 59 of 63

11.1.2 MPE CALCULATION METHOD

Calculation Method of RF Safety Distance:

$$S = \frac{PG}{4\pi r^2} = \frac{EIRP}{4\pi r^2}$$

P :power input to the antenna in Mw

EIRP : Equivalent (effective) isotropic radiated power.

S :power density mW/ cm²

G ;numeric gain of antenna relative to isotropic radiator

R :distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{\frac{PG}{4\pi S}} = \sqrt{\frac{EIRP}{4\pi S}}$$

Note

1. s=1.0 mW /cm² for limits for General Population/Uncontrolled Exposures.

2. The time averaged power over 30 minutes will be equaled Output Power.

3. Minimum calculated separation distance betweet antenna and persons required:0.53 cm

4. The Power Density at a distance of 20cm calculated from the formula is far below the limit of 1MW/ cm²

5. For portable device, the power limit is 60/f(in GHz) mW

6. For limit 60/f is equal:

60/2.405=24.95mW

60/2.439=24.60mW

60/2.476=24.23mW

7. The max.output power E.I.R.P is 0.7798 mW

So it is complied with the limit, SAR report is not requied.

Report No.: NEI-FCCP-1-0907C072



No deviation.

11.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

11.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-0907C072 Page 61 of 63

EUT:	wireless Mouse	Model Name :	GL-800RF	
Temperature:	25 ℃	Relative Humidity:	60%	
Pressure:	1012 hPa	Test Voltage :	DC 3.0V	
Test Mode :	CH01 (2403 MHz), CH39(2441 MHz), CH77 (2479 MHz)			

Frequency (MHz)	Antenna Gain (dBi)	Peak Output Power (dBm)	Calculated EIRP (mW)	Power Density (S) (mW/cm²)	FCC Threshold (mW)	Test Result
2403	2.34	-1.98	0.6339	0.00021625	24.95	Complies
2441	2.34	-2.62	0.5470	0.00018662	24.60	Complies
2479	2.34	-3.40	0.4571	0.00015594	24.23	Complies

Report No.: NEI-FCCP-1-0907C072 Page 62 of 63

12. EUT TEST PHOTO

Radiated Measurement Photos





Report No.: NEI-FCCP-1-0907C072 Page 63 of 63