

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up



5.1.3 Applicable standard

According to FCC Part 15C, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

FCC ID: XO2-SPB228D

IC: 8713A-SPB228D

5.2 Maximum conducted output power

For test instruments and accessories used see section 6 Part **CPR 3**.

5.2.1 Description of the test location

Test location: Anechoic chamber 1

5.2.2 Photo documentation of the test set-up



5.2.3 Applicable standard

According to FCC Part 15E, Section 15.407(a):

The maximum conducted output power over the frequency band of operation shall not exceed the effective values. If transmitting antennas of directional gain are greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.4 Description of Measurement

The output power is measured conducted using a spectrum analyser. The EUT has no constant duty cycle and may be smaller than 98% therefore the procedure according the KDB 789033; item E g) Method SA-3 Alternative is followed. The EUT is set while measuring in TX continuous mode with a maximum duty cycle. The insertion loss of

FCC ID: XO2-SPB228D

IC: 8713A-SPB228D


5.3 Emission bandwidth

For test instruments and accessories used see section 6 Part MB.

5.3.1 Description of the test location

Test location: Shielded Room S6

5.3.2 Photo documentation of the test set-up

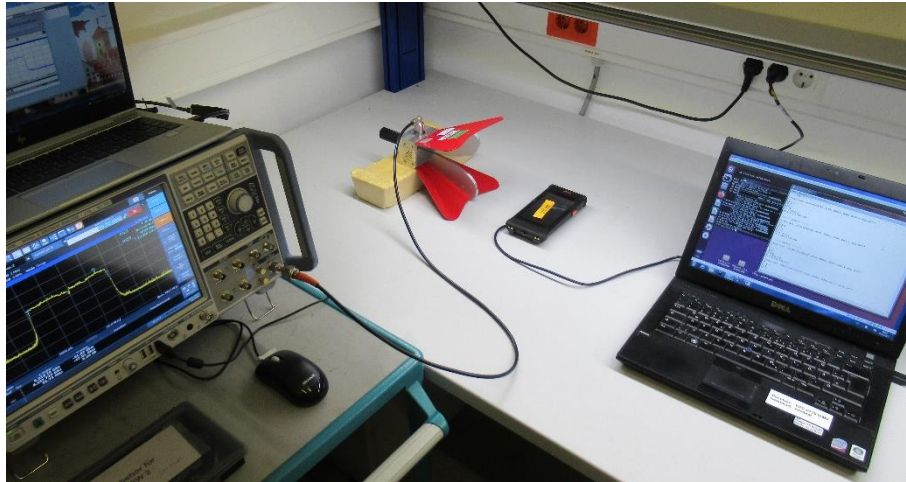

5.3.3 Applicable standard

According to FCC Part 15, Section 15.407(e):

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.3.4 Description of Measurement

The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitter at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. An alternative is to use the bandwidth measurement of the analyser.

Spectrum analyser settings:

RBW: approx. 1% of EBW, VBW: > RBW, Detector: Max peak, Sweep time: auto, Span: approx.. 2 EBW;

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XO2-SPB228D

IC: 8713A-SPB228D

5.4 Undesirable emissions

For test instruments and accessories used see section 6 Part **SER 2** and **SER 3**.

5.4.1 Description of the test location

Test location: OATS 1
 Test location: Anechoic chamber 1
 Test distance: 3 m

5.4.2 Photo documentation of the test set-up

30 MHz – 1 GHz:



1 GHz – 18 GHz:



FCC ID: XO2-SPB228D

IC: 8713A-SPB228D

18 GHz – 25 GHz:



5.4.3 Applicable standard

According to FCC Part 15E, Section 15.407(b):

For transmitters operating in the defined bands shall not exceed the appropriate emission limit outside of the operating bands.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

5.4.4 Description of Measurement

Undesirable emissions are measured using a spectrum analyser and following the procedures according to the KDB 789033, item H. If the emission level of the EUT in peak mode complies with the average limit then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported. Up from 8 GHz a HP filter is used.

Spectrum analyser settings for peak values:

RBW: 1 MHz, VBW: 3 MHz, Sweep: Auto, Trace mode: max hold;

Spectrum analyser settings for average values:

RBW: 1 MHz VBW: 10 Hz Sweep: Auto, Trace mode: max hold;